

EMC

TEST REPORT

Report No. : TS10010024-EME
Model No. : CBUSB
Issued Date : Aug. 27, 2010

Applicant: CHINESE RAYS TECHNOLOGY CO., LTD.
2F., No. 74, Jhouzih St., Neihu District, Taipei City 114,
Taiwan

Test Method/ Standard: 47 CFR FCC Part 15.249 & ANSI C63.4 2003

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by: Sign on File
Grace Lee/ Assistant

These measurements were taken by: Sign on File
Leon Cheng/ Engineer

The test report was reviewed by:

Name Rex Liao
Title Engineer

Table of Contents

Summary of Tests	3
1. General information.....	4
1.1 Identification of the EUT.....	4
1.2 Antenna description	5
1.4 Peripherals equipment	5
2. Test specifications.....	6
2.1 Test standard	6
2.2 Operation mode	6
2.4 Test equipment.....	7
3. Radiated emission test FCC 15.249 (C)	8
3.1 Operating environment	8
3.2 Test setup & procedure	8
3.3 Emission limit.....	9
3.3.1 Fundamental and harmonics emission limits.....	9
3.3.2 General radiated emission limits	9
3.4 Radiated spurious emission test data	10
3.4.1 Measurement results: frequencies equal to or less than 1 GHz.....	10
3.4.2 Measurement results: frequency above 1GHz.....	11
3.4.3 Measurement results: Fundamental emission.....	14
4. Radiated emission on the band edge FCC 15.209	16
4.1 Measurement results	16
5. Conducted emission test FCC 15.207	18
5.1 Operating environment	18
5.2 Test setup & procedure	18
5.3 Emission limit.....	19
5.4 Conducted emission data FCC 15.207	20
6. Calculation of Average Factor	22

Summary of Tests

Test	Reference	Results
Radiated Emission test	15.249(c), 15.209	Pass
Emission on the Band Edge	15.249(d)	Pass
Conducted Emission of AC Power	15.207	Pass
Calculation of Average Factor	15.35	Pass

1. General information**1.1 Identification of the EUT**

Product: Transmitter
Model No.: CBUSB
FCC ID.: YN2CB11BGU-126S
Frequency Range: 2402MHz ~ 2479MHz
Channel Number: 78 channels
Frequency of Each Channel: 2402 MHz + k MHz; k=0~77
Type of Modulation: GFSK
Rated Power: DC 5 V from Notebook PC USB port & DC 6 V from battery
Power Cord: N/A
Data Cable: N/A
Sample Received: Jan. 06, 2010
Test Date(s): Aug. 17, 2010 ~ Aug. 18, 2010
Note 1: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2: When determining the test conclusion, the Measurement Uncertainty of test has been considered.

1.2 Antenna description

The EUT uses a permanently connected antenna.

Antenna Type : Chip antenna

Connector Type : N/A

1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.	FCC ID
Notebook PC	DELL	Latitude D610	2YWZK1S	E2K24BNHM
Printer	HP	DeskJet 400	SG5CQ170C0	B94C2642X
Modem	LEMEL	MD-56KVT-100	00V230A00078422	FCC DoC Approved

2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

The EUT was transmitted continuously during the test.

The following TX test mode(s) were pre- test:

mode	Test Condition	mode	Test Condition
1	USB dongle mode 	3	Remote controller Y axis mode 
2	Remote controller X axis mode 	4	Remote controller Z axis mode 

After the pre-test, the TX worst case is mode 1.The EUT configuration please refer to the “Spurious set-up photo.pdf”.

2.4 Test equipment

Equipment	Brand	Frequency range	Model No.	Last Cal.	Cal. interval
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	2010/9/3	1 year
EMI Test Receiver	Rohde & Schwarz	9kHz~3GHz	ESCI	2009/12/8	1 year
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	2010/8/16	1 year
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	2010/1/18	1 year
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA9120D	2010/8/31	2 years
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9168	2009/9/22	2 years
Turn Table	HDGmbH	N/A	DS 420S	N/A	N/A
Antenna Tower	HDGmbH	N/A	MA 240	N/A	N/A
Pre-Amplifier	MITER	100MHz~26.5GHz	AFS42-001026 50	2009/10/27	2 years
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	2009/3/13	2 years
Power Meter	Anritsu	N/A	2495A	2010/10/20	1 year
Power Senor	Anritsu	N/A	2411B	2010/10/20	1 year

Note: The above equipments are within the valid calibration period.


3. Radiated emission test FCC 15.249 (C)

3.1 Operating environment

Temperature: 26 °C
Relative Humidity: 56 %
Atmospheric Pressure 1008 hPa

3.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

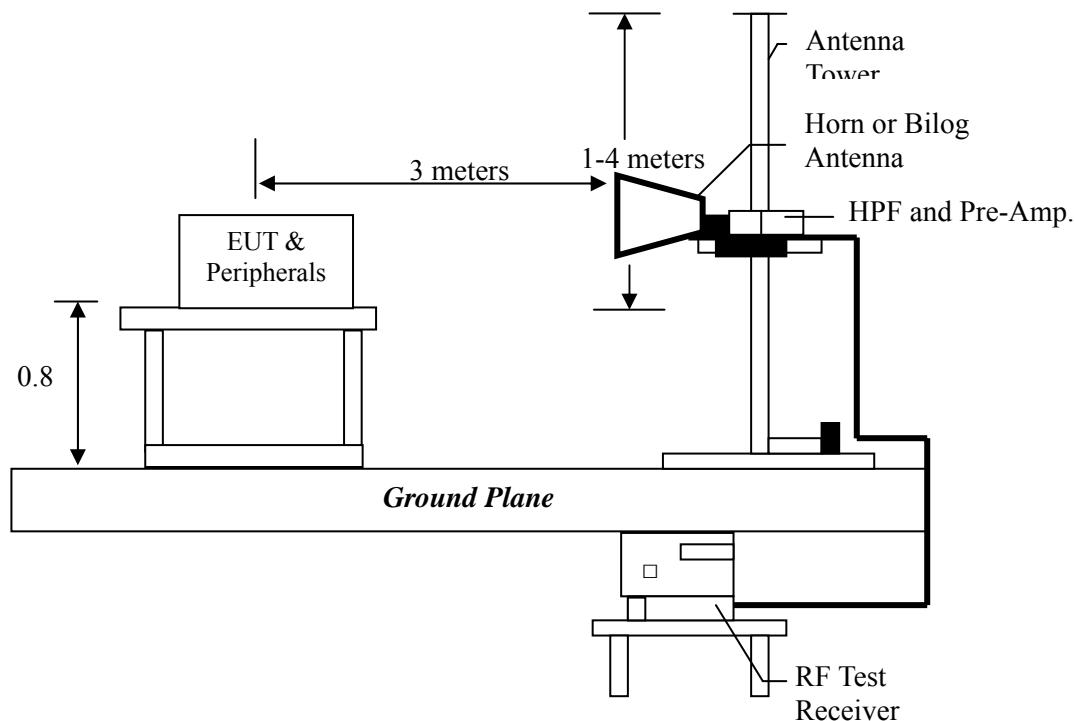

Radiated emissions were investigated over the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

3.3 Emission limit

3.3.1 Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m@3m)	(dBuV/m@3m)	(uV/m@3m)	(dBuV/m@3m)
2400-2483.5	50	94	500	54

3.3.2 General radiated emission limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency MHz	15.209 Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Measurement uncertainty was calculated in accordance with TR 100 028-1.

Parameter	Uncertainty
Radiated Emission	± 5.10 dB
Conducted Emission	± 2.786 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

3.4 Radiated spurious emission test data

3.4.1 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under continuously transmitting mode. Low, middle and high channels were verified. The worst case occurred Tx low channel.

EUT : CBUSB

Test Condition : Tx at low channel

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	129.91	QP	9.47	23.82	33.28	43.50	-10.22
V	191.99	QP	12.00	16.87	28.87	43.50	-14.63
V	318.09	QP	14.10	18.62	32.72	46.00	-13.28
V	330.70	QP	14.98	14.21	29.19	46.00	-16.81
V	356.89	QP	15.06	11.82	26.88	46.00	-19.12
V	663.41	QP	21.50	11.39	32.89	46.00	-13.11
H	159.98	QP	13.60	12.63	26.23	43.50	-17.27
H	232.73	QP	11.74	19.46	31.20	46.00	-14.80
H	311.30	QP	14.32	15.09	29.40	46.00	-16.60
H	317.12	QP	14.32	15.57	29.88	46.00	-16.12
H	337.49	QP	14.40	15.27	29.66	46.00	-16.34
H	747.80	QP	22.95	11.09	34.04	46.00	-11.96

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

3.4.2 Measurement results: frequency above 1GHz

EUT : CBUSB

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4804.00	PK	V	35.1	38.54	50.27	53.71	74	-20.29
4804.00	AV	V	35.1	38.54	50.27	18.50	54	-35.50
4980.00	PK	V	35.1	38.54	46.89	50.33	74	-23.67
4980.00	AV	V	35.1	38.54	46.89	15.12	54	-38.88
4804.00	PK	H	35.1	38.54	53.68	57.12	74	-16.88
4804.00	AV	H	35.1	38.54	53.68	21.91	54	-32.09
4980.00	PK	H	35.1	38.54	43.58	47.02	74	-26.98
4980.00	AV	H	35.1	38.54	43.58	11.81	54	-42.19

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

EUT : CBUSB

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4880.00	PK	V	35.1	38.54	50.99	54.43	74	-19.57
4880.00	AV	V	35.1	38.54	50.99	19.22	54	-34.78
4980.00	PK	V	35.1	38.54	45.86	49.30	74	-24.70
4980.00	AV	V	35.1	38.54	45.86	14.09	54	-39.91
4880.00	PK	H	35.1	38.54	51.95	55.39	74	-18.61
4880.00	AV	H	35.1	38.54	51.95	20.18	54	-33.82
4980.00	PK	H	35.1	38.54	42.57	46.01	74	-27.99
4980.00	AV	H	35.1	38.54	42.57	10.80	54	-43.20

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

EUT : CBUSB

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4958.00	PK	V	35.1	38.54	53.51	56.95	74	-17.05
4958.00	AV	V	35.1	38.54	53.51	21.74	54	-32.26
4958.00	PK	H	35.1	38.54	49.53	52.97	74	-21.03
4958.00	AV	H	35.1	38.54	49.53	17.76	54	-36.24

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

3.4.3 Measurement results: Fundamental emission

EUT : CBUSB

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2402.00	PK	H	32.8	64.30	97.10	113.9794	-16.88
2402.00	AV	H	32.8	64.30	61.89	93.9794	-32.09

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.
3. Average value = peak value + average factor
4. Both vertical and horizontal antenna polarization conditions are tested, and the worst case is reported.

EUT : CBUSB

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2440.00	PK	H	32.95	61.50	94.45	113.9794	-19.53
2440.00	AV	H	32.95	61.50	59.24	93.9794	-34.74

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.
3. Average value = peak value + average factor
4. Both vertical and horizontal antenna polarization conditions are tested, and the worst case is reported.

EUT : CBUSB

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2479.00	PK	H	33.1	58.49	91.59	113.9794	-22.39
2479.00	AV	H	33.1	58.49	56.38	93.9794	-37.60

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.
3. Average value = peak value + average factor
4. Both vertical and horizontal antenna polarization conditions are tested, and the worst case is reported.

4. Radiated emission on the band edge FCC 15.209

Method of Measurement:

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were invested cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.


4.1 Measurement results

Channel	Measurement Freq.Band (MHz)	Detector	Average Factor (dB)	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
Low Channel	2310-2390	PK	-	58.99	74	-15.01
Low Channel	2310-2390	AV	-35.21	23.78	54	-30.22
High Channel	2483.5-2500	PK	-	59.54	74	-14.46
High Channel	2483.5-2500	AV	-35.21	24.33	54	-29.67


Remark: Both vertical and horizontal antenna polarization conditions are tested, and the worst case is reported.

Please see the plots below.

Band Edge @ Low Channel (PK)

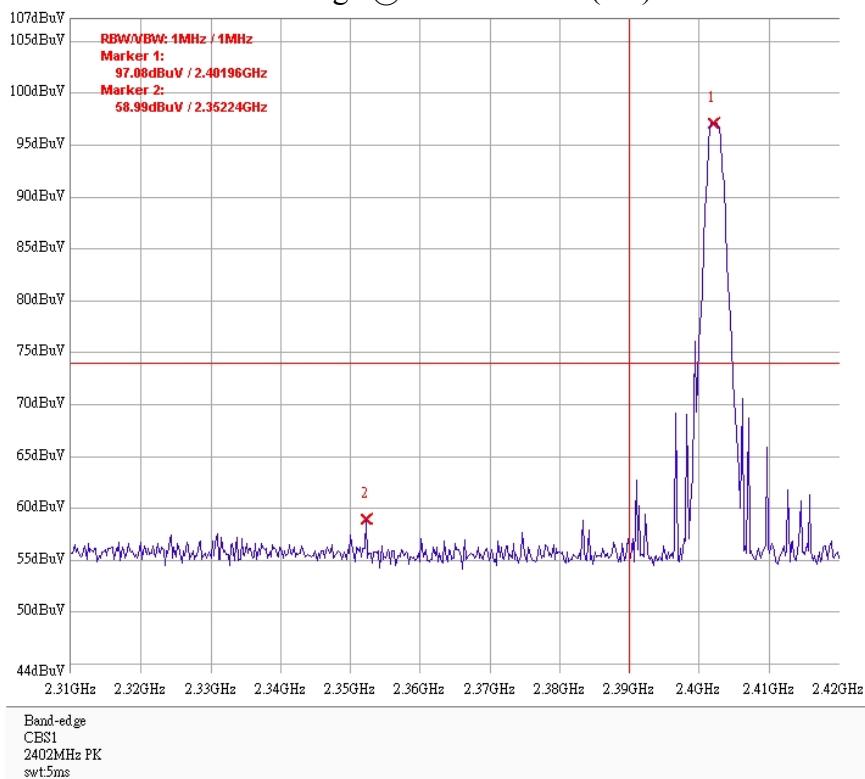

Band Edge @ High Channel (PK)

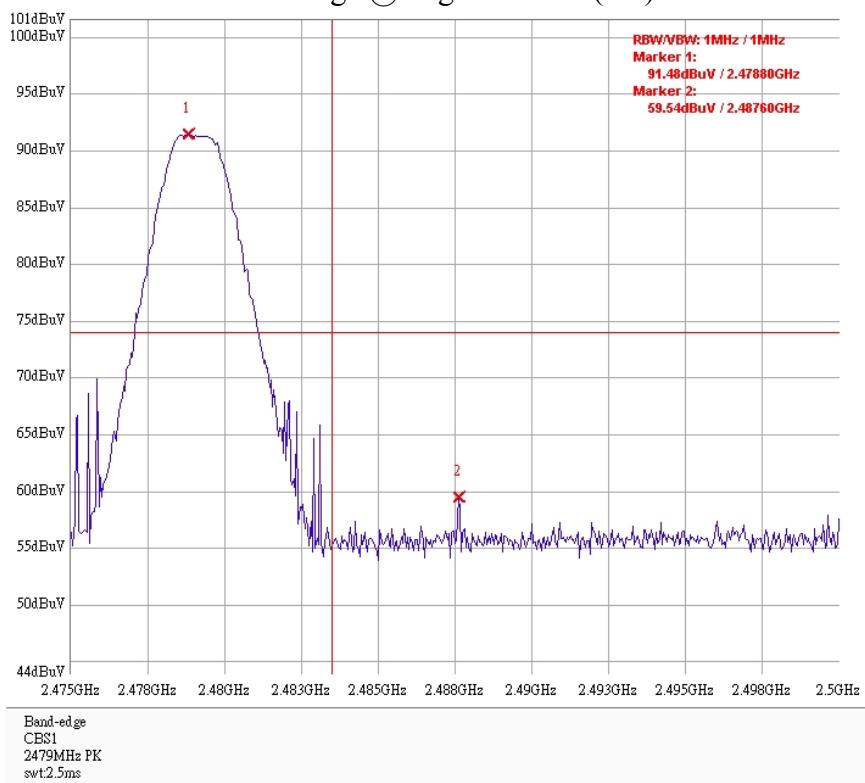


5. Conducted emission test FCC 15.207

5.1 Operating environment

Temperature: 25 °C
Relative Humidity: 54 %
Atmospheric Pressure 1008 hPa

5.2 Test setup & procedure

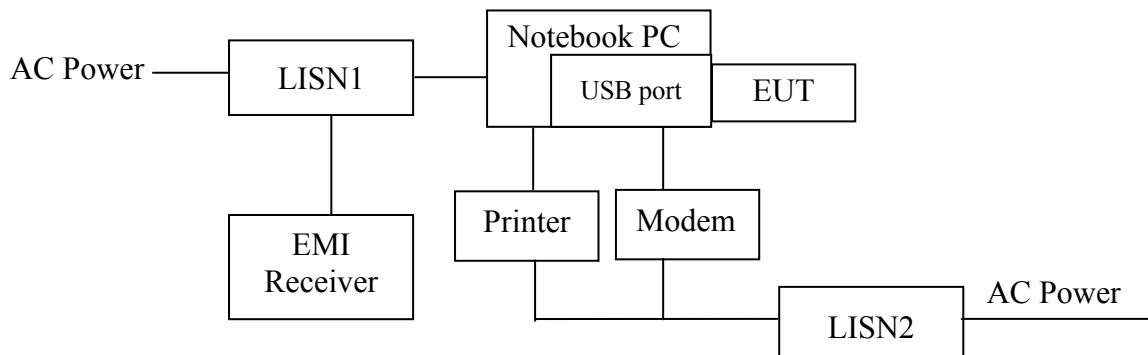

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

5.3 Emission limit

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.


5.4 Conducted emission data FCC 15.207

Phase: Line
Model No.: CBUSB
Worst case: Mode 1

Frequency (MHz)	Corr. Factor (dB)	Level Q _p (dBuV)	Limit Q _p (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB) Q _p	Margin (dB) Av
0.15	0.81	49.97	65.78	37.32	55.78	-15.81	-18.46
0.17	0.81	47.05	64.99	30.90	54.99	-17.94	-24.09
0.21	0.75	42.20	63.14	29.93	53.14	-20.94	-23.21
0.29	0.45	35.58	60.63	20.98	50.63	-25.06	-29.66
3.47	0.22	36.11	56.00	22.85	46.00	-19.89	-23.15
3.74	0.23	33.77	56.00	21.25	46.00	-22.23	-24.75

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

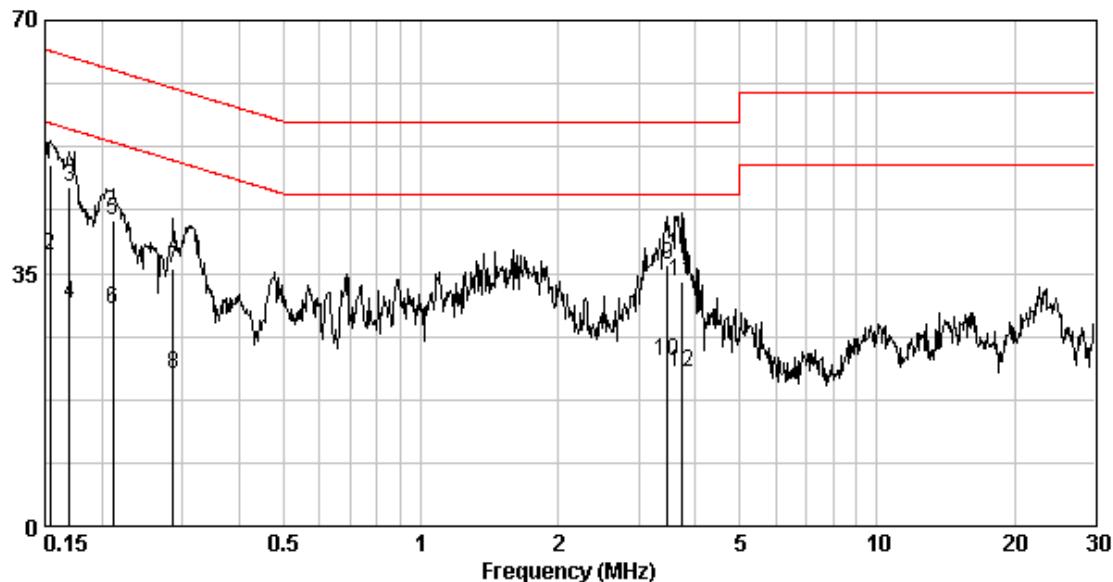


Phase: Neutral
Model No.: CBUSB
Worst case: Mode 1

Frequency (MHz)	Corr. Factor (dB)	Level Q _p (dBuV)	Limit Q _p (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB) Q _p	Margin (dB) Av
0.15	0.11	49.23	65.74	36.82	55.74	-16.51	-18.92
0.17	0.11	44.30	64.81	27.00	54.81	-20.52	-27.82
0.21	0.11	40.50	63.14	28.60	53.14	-22.64	-24.54
0.31	0.11	36.60	59.84	27.65	49.84	-23.24	-22.19
3.49	0.22	35.76	56.00	23.09	46.00	-20.24	-22.91
3.68	0.23	35.65	56.00	22.18	46.00	-20.35	-23.82

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

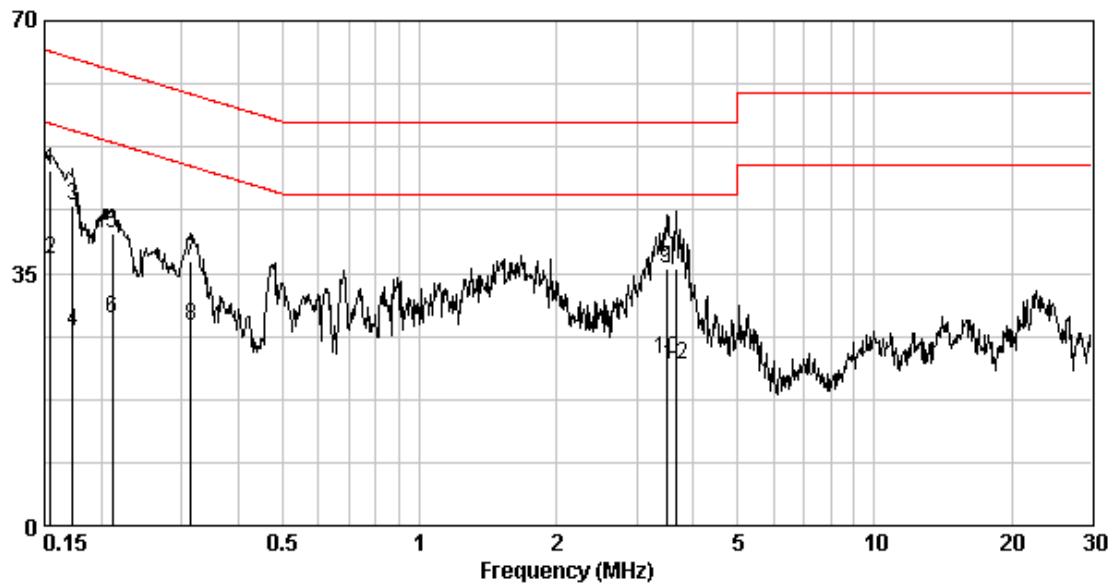

6. Calculation of Average Factor

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured in 100 ms or the repetition cycle, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer in zero span mode at 100 resolution bandwidth.

Averaging factor in dB = $20\log(\text{duty cycle})$

The duty cycle is simply the on-time divided by the period:


The number of pulses in each period (5) multiplied by the duration of each pulses (0.347ms) = 1.735ms

Duty Cycle = 1.735 ms / 100 ms = 0.01735


Therefore, the duty cycle correction factor will be $20 \log_{10}(0.01735) = -35.21$ dB

Please see the plot below.


Duty Cycle at low channel: number of pulse

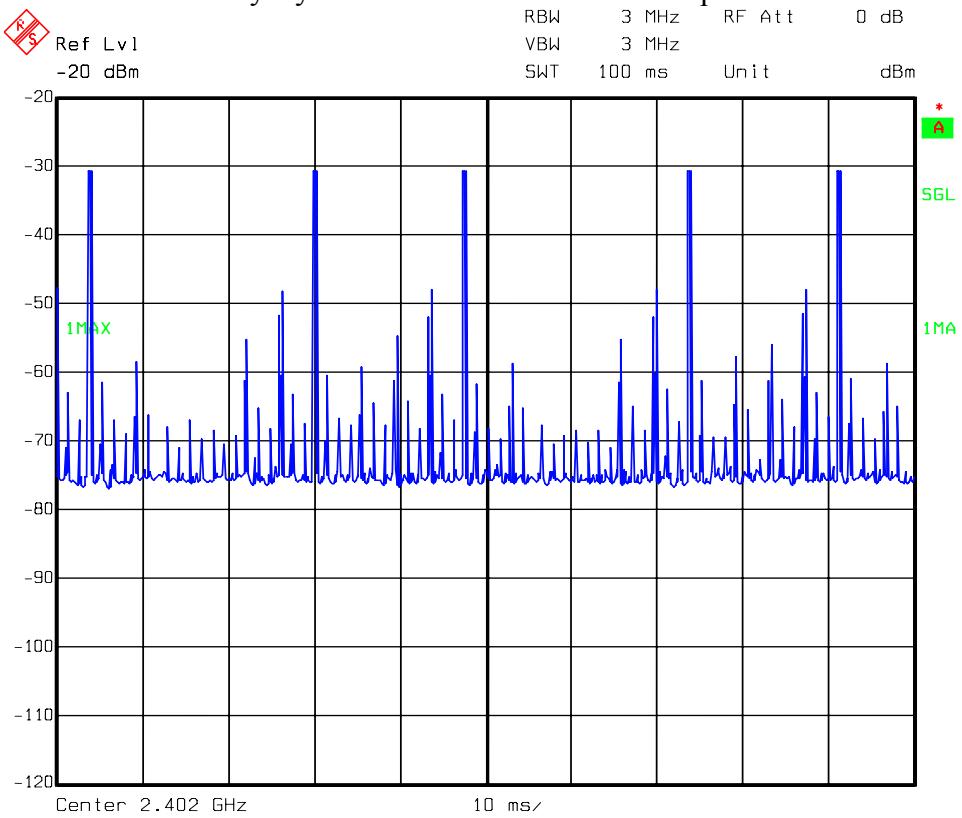


Duty Cycle at low channel: on time of one pulse

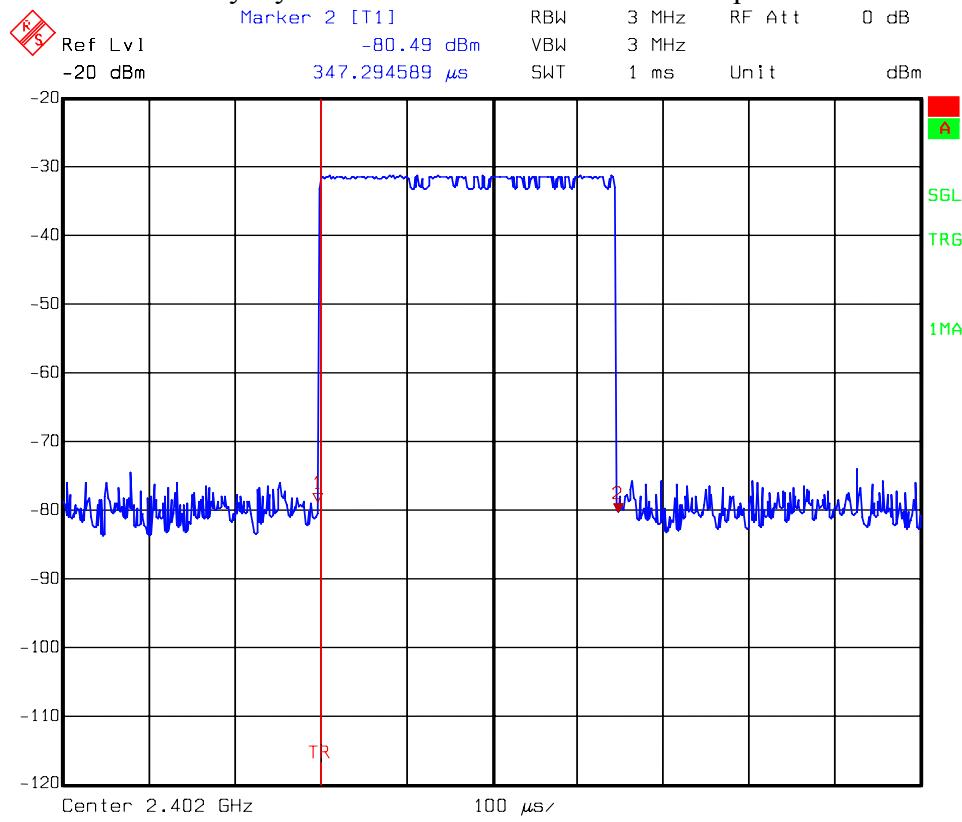


Duty Cycle at middle channel: number of pulse

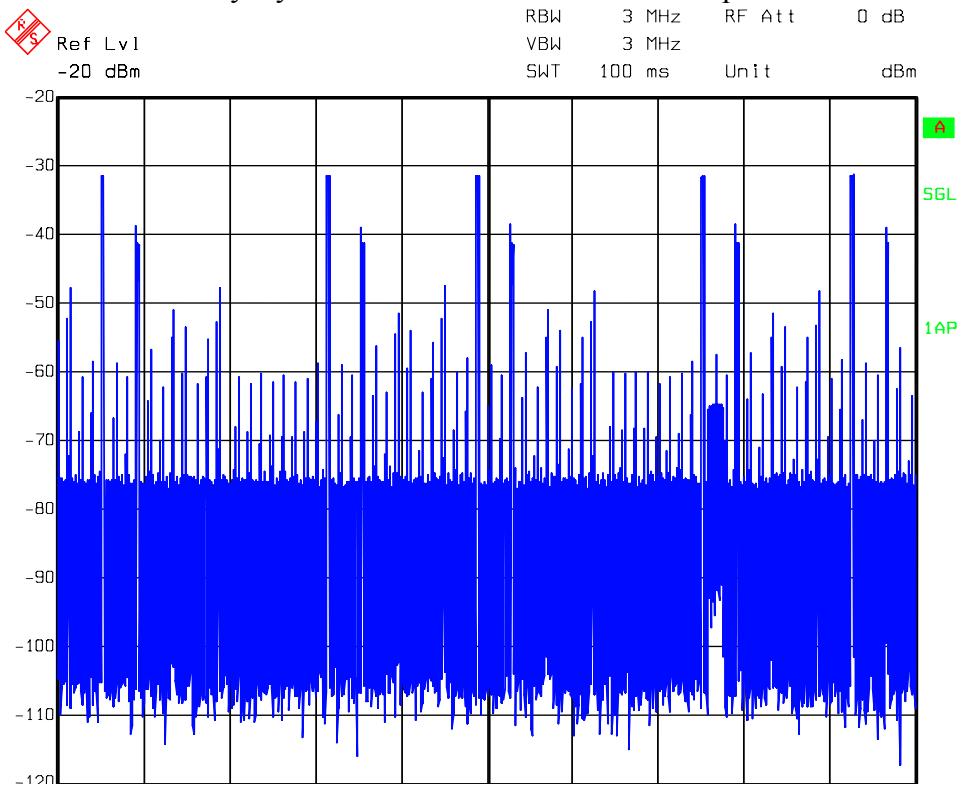

Duty Cycle at middle channel: on time of one pulse

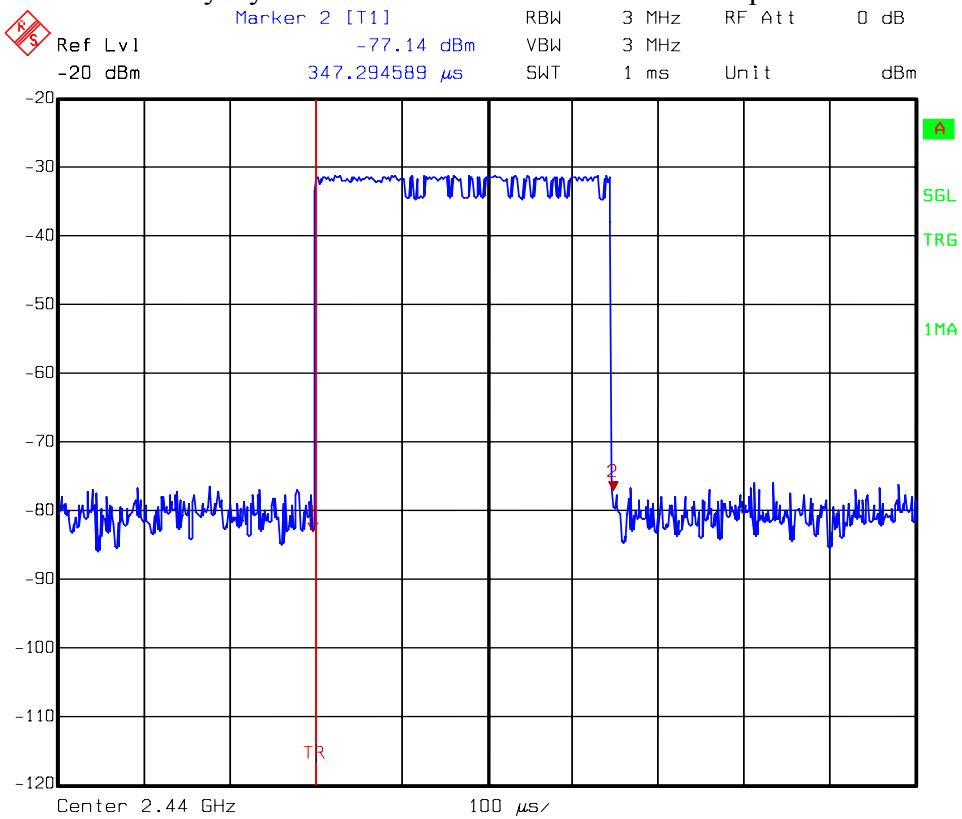

Duty Cycle at high channel: number of pulse

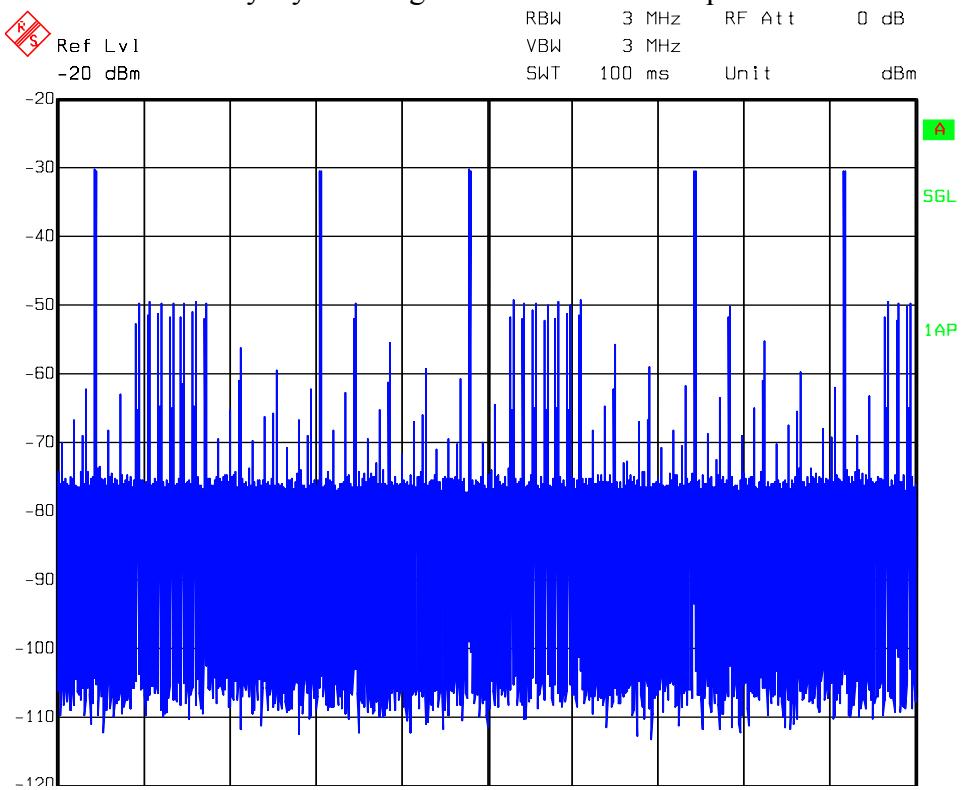

Duty Cycle at high channel: on time of one pulse

