



FCC 47 CFR PART 15 SUBPART B

TEST REPORT

For

Applicant : Shenzhen Lantian Electronics Co., Ltd.

Address : Building A2, Area 4, Fuqiao Industrial Park, Qiaotou Village,
Fuyong Town, Bao' an Zone, Shenzhen, China

Product Name : Wireless Mouse- Receiver

Model Name : LM-5602

Brand Name : N/A

FCC ID : YN5R5605

Report No. MOST100718F1

Date of Issue : July. 30, 2010

Issued by : Most Technology Service Co., Ltd.

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial
Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8617 0306

Fax : 86-755-8617 0310

The report consists 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	3
2. GENERAL INFORMATION	4
2.1 PRODUCT INFORMATION	4
2.2 OBJECTIVE	4
2.3 TEST STANDARDS AND RESULTS	4
2.4 ENVIRONMENTAL CONDITIONS	5
2.5 MEASUREMENT UNCERTAINTY	5
3. TEST METHODOLOGY	6
3.1 TEST FACILITY	6
3.2 GENERAL TEST PROCEDURES	6
4. SETUP OF EQUIPMENT UNDER TEST	7
4.1 SETUP CONFIGURATION OF EUT	7
4.2 SUPPORT EQUIPMENT	7
4.3 TEST EQUIPMENT LIST	8
5. FCC 47 CFR PART 15B REQUIREMENTS	9
5.1 GENERAL INFORMATION	9
6. LINE CONDUCTED EMISSION TEST	10
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
6.2. BLOCK DIAGRAM OF TEST SETUP	10
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
7. RADIATED EMISSION TEST	14
7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B	14
7.2. TEST DESCRIPTION	14
7.3. TEST RESULT	16
APPENDIX 1	19
PHOTOGRAPHS OF TEST SETUP	19
APPENDIX 2	21
PHOTOGRAPHS OF EUT	21


1. VERIFICATION OF CONFORMITY

Equipment Under Test: Wireless Mouse- Receiver
Brand Name: N/A
Model Number: LM-5602
FCC ID: YN5R5605
Applicant: Shenzhen Lantian Electronics Co., Ltd.
Building A2, Area 4, Fuqiao Industrial Park, Qiaotou Village, Fuyong Town,
Bao' an Zone, Shenzhen, China
Manufacturer: Shenzhen Lantian Electronics Co., Ltd.
Building A2, Area 4, Fuqiao Industrial Park, Qiaotou Village, Fuyong Town,
Bao' an Zone, Shenzhen, China
Technical Standards: FCC Part 15 B
File Number: MOST100718F1
Date of test: July. 29 ~ July. 30, 2010
Deviation: None
Condition of Test Sample: Normal
Test Result: PASS

The above equipment was tested by MOST for compliance with the requirements set forth in FCC Part 15 and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.


The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):



Petter Ping July. 30, 2010

Review by (+ signature):



July Wen July. 30, 2010

Approved by (+ signature):



Terry Yang July. 30, 2010

2. GENERAL INFORMATION

2.1 PRODUCT INFORMATION

Housing Type: Plastic
EUT Rating Voltage: DC 5V by USB port
Voltage During Test: DC 5V by USB port
I/O Type of EUT: N/A
I/O Q'TY: N/A
Model Number: LM-5602
Series Number: N/A
Description of Differences: N/A

NOTE:

1. Please refer to Appendix 2 for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 OBJECTIVE

Perform FCC Part 15 tests for FCC Marking.

2.3 TEST STANDARDS AND RESULTS

Test items and the results are as bellow:

EMISSION			
Standard	Item	Result	Remarks
FCC Part 15B	Conducted	PASS	Meet Class B limit
	Radiated	PASS	Meet Class B limit

Note: 1. The test result judgment is decided by the limit of measurement standard
 2. The information of measurement uncertainty is available upon the customer's request.

2.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

2.5 MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

- Uncertainty of Conducted Emission, $U_c = \pm 1.8\text{dB}$
- Uncertainty of Radiated Emission, $U_c = \pm 3.2\text{dB}$

3. TEST METHODOLOGY

3. 1 TEST FACILITY

Test Site: Most Technology Service Co.,ltd

Location: No.5, Langshan 2nd Rd, North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2003 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2003, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2003.

4 SETUP OF EQUIPMENT UNDER TEST**4.1 SETUP CONFIGURATION OF EUT**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Audio Cable	Power Cord
Notebook	HP	---	---	---	---	1.8M Un-shielding

Remark:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. 3 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2011/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2011/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2011/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2011/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2011/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C	--	2011/03/14
9	Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	--	2011/03/14
10	Cable	Resenberger	N/A	NO.1	2011/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2011/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2011/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2011/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2011/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2011/03/14
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2011/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2011/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2011/03/14
21	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2011/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2011/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2011/03/14
24	Signal Generator	IFR	2032	203002/100	2011/03/14
25	Amplifier	A&R	150W1000	301584	2011/03/14
26	CDN	FCC	FCC-801-M2-25	47	2011/03/14
27	CDN	FCC	FCC-801-M3-25	107	2011/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2011/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2011/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2011/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2011/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. FCC 47 CFR PART 15B REQUIREMENTS

5.1 GENERAL INFORMATION

EUT Test Procedure:

1. Put EUT on the test table.
2. Make sure the EUT operates normally during the test.

6. LINE CONDUCTED EMISSION TEST


6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

6.2. BLOCK DIAGRAM OF TEST SETUP

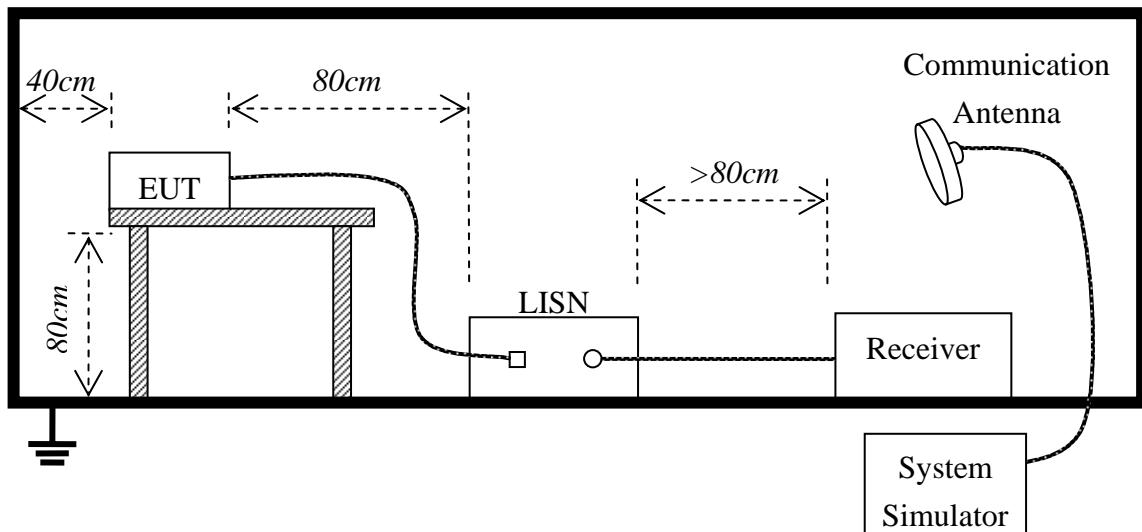

6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received DC 5V by USB port of Notebook which through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Preliminary Conducted Emission Test				
Frequency Range Investigated		150KHz TO 30 MHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
Normal Working	2010-7-29	MOST100718F1	LM-5602_(L, N)	<input checked="" type="checkbox"/>

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition(s) was reported on the Summary Data page.

6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: LM-6602

Data #1

Date: 2010/07/29

Time: 18:28:34

80.0 dBuV

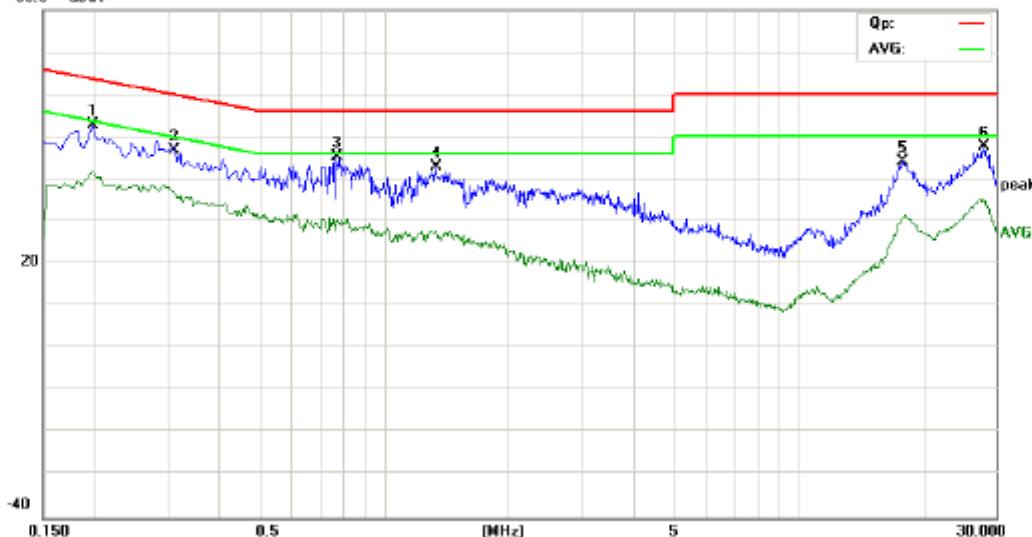

Site site #1

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 5V From PC laptop

Humidity: 60 %

EUT: Wireless Mouse-Receiver

Act120V/60Hz

M/N: LM-5602

Mode: Normal Working

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1980	41.05	11.88	52.93	63.69	-10.76	peak	
2		0.3115	35.63	11.26	46.89	59.93	-13.04	peak	
3	*	0.7660	35.38	10.00	45.38	56.00	-10.62	peak	
4		1.3260	33.38	9.67	43.05	56.00	-12.95	peak	
5		17.7700	35.26	9.00	44.26	60.00	-15.74	peak	
6		27.8900	38.67	9.00	47.67	60.00	-12.33	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement

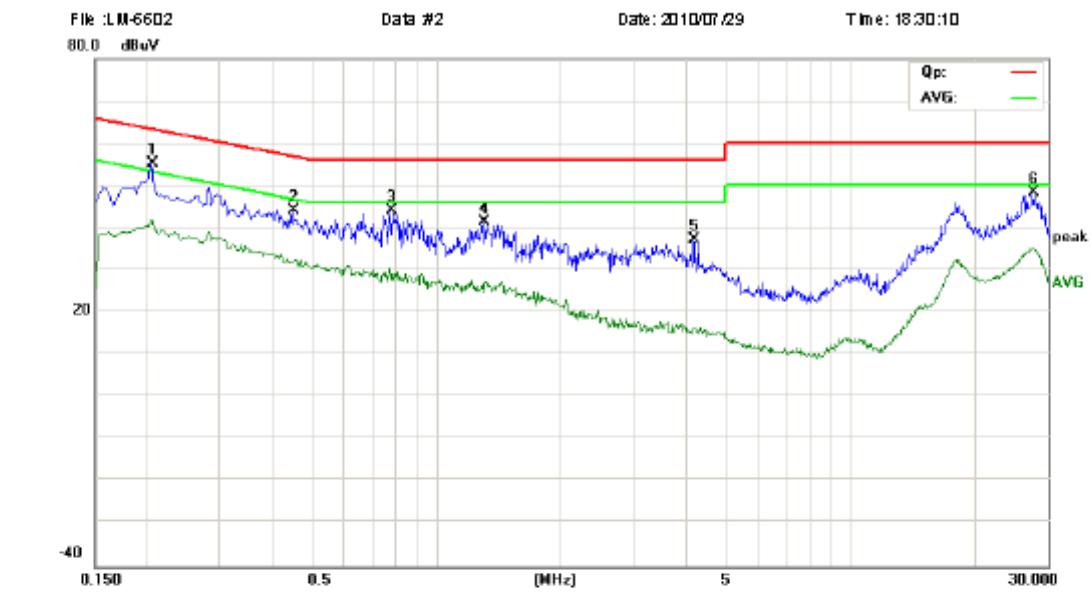

Site: site #1

Phase: *L1*

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 5V From PC Input
AC120V/60Hz

Humidity: 60 %

EUT: Wireless Mouse-Receiver

M/N: LM-5602

Mode: Normal Working

Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.2060	43.16	11.96	55.12	63.37	-8.25	peak	
2	0.4500	33.89	10.33	44.22	56.88	-12.66	peak	
3	0.7780	34.14	10.00	44.14	56.00	-11.86	peak	
4	1.2980	31.63	9.70	41.33	56.00	-14.67	peak	
5	4.1660	26.19	11.17	37.36	56.00	-18.64	peak	
6	27.5580	39.43	9.00	48.43	60.00	-11.57	peak	

*:Maximum data x:Over limit !:over margin

7. RADIATED EMISSION TEST

7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B


According to FCC section 15.109 (b), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


7.2 TEST DESCRIPTION

Test Setup:

Below 1GHz:

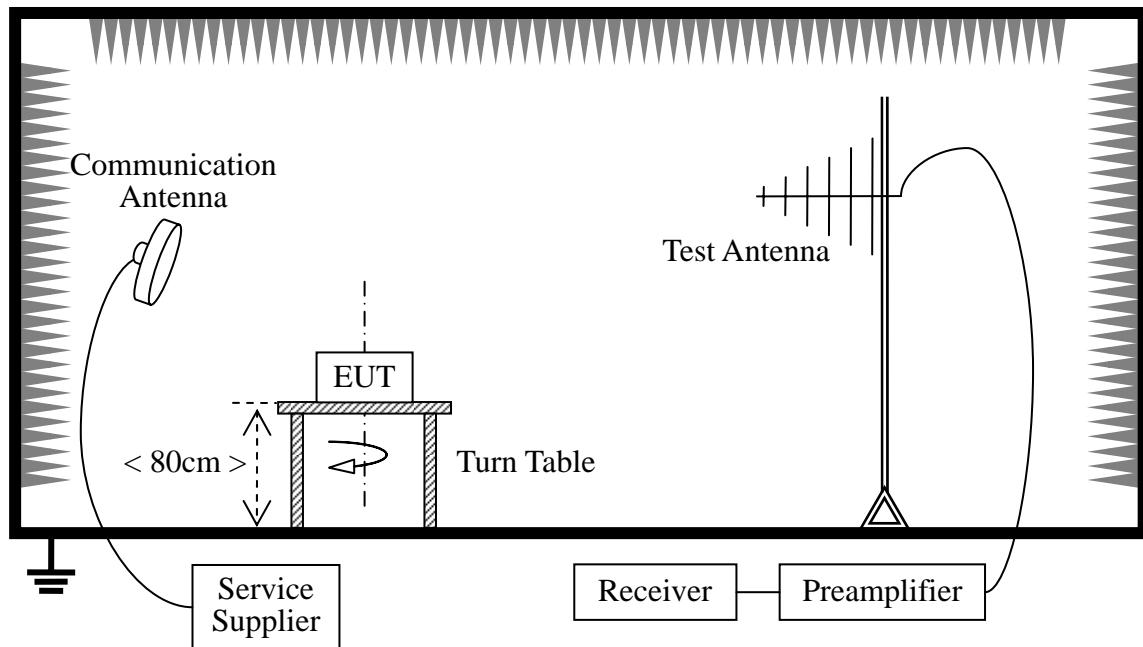

Above 1GHz:

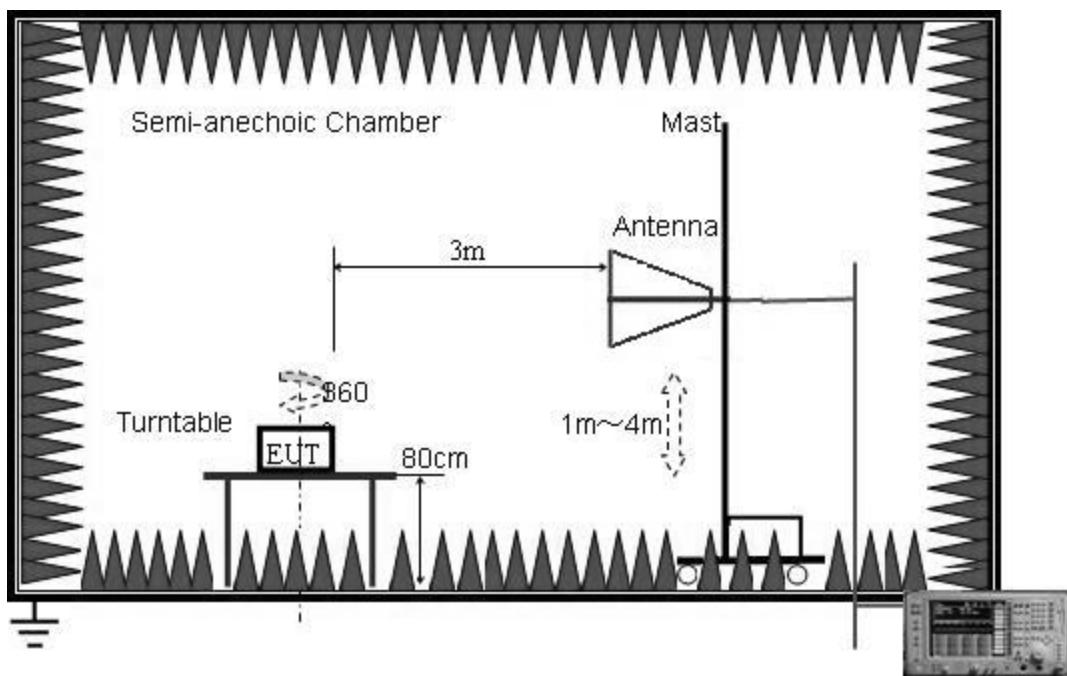

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and transmitting with the other device (Supply by the Applicant) during the test.

For the Test Antenna:

- (a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.


Preliminary Radiated Emission Test				
Frequency Range Investigated			30 MHz TO 1000 MHz	
Mode of operation	Date	Report No.	Data#	Worst Mode
Normal Working	2010-07-29	MOST100718F1	LM-5602_(H, V)	<input checked="" type="checkbox"/>

7.3 TEST RESULT



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax 0755-86170310

Radiated Emission Measurement

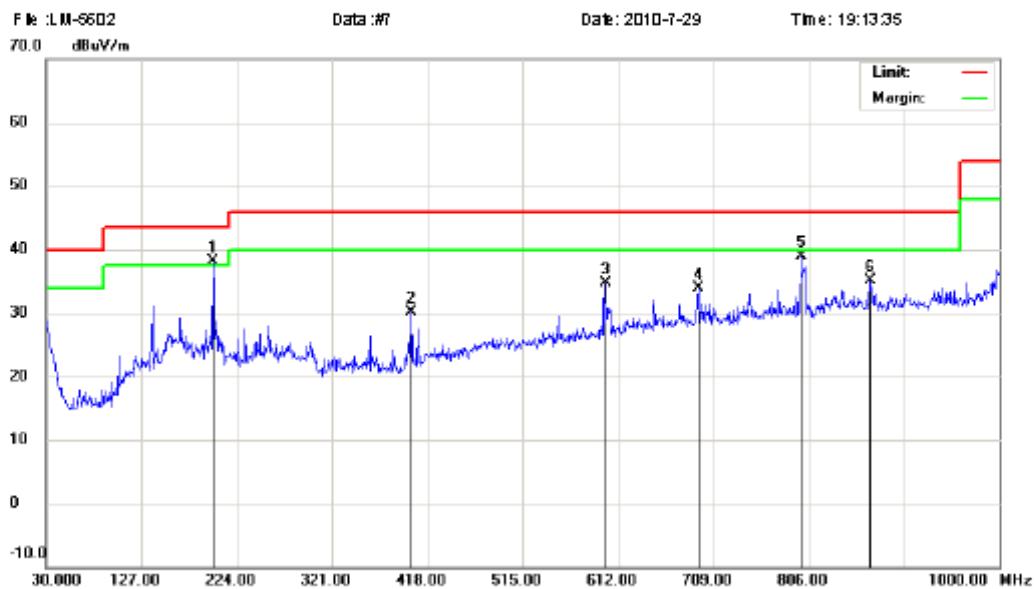

Site: site MOST 3M

Polarization: **Vertical**

Temperature: 25

Limit: FCC Part15 B 3M Radiation

Power: DC 5V by USB port of Notebook

Humidity: 60 %

EUT: Wireless Mouse- Receiver

Distance:

M/N: LM-5602

Mode: Normal working

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBmV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	199.7500	20.77	17.37	38.14	43.50	-5.36	peak			
2		401.5099	11.41	18.73	30.14	46.00	-15.86	peak			
3		598.4199	11.71	22.95	34.66	46.00	-11.34	peak			
4		693.4800	9.32	24.50	33.82	46.00	-12.18	peak			
5		798.2400	12.91	25.92	38.83	46.00	-7.17	peak			
6		868.0800	8.03	27.02	35.05	46.00	-10.95	peak			

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax 0755-86170310

Radiated Emission Measurement


File : LM-5602

Data : #6

Date: 2010-7-29

Time: 19:14:53

70.0 dBuV/m

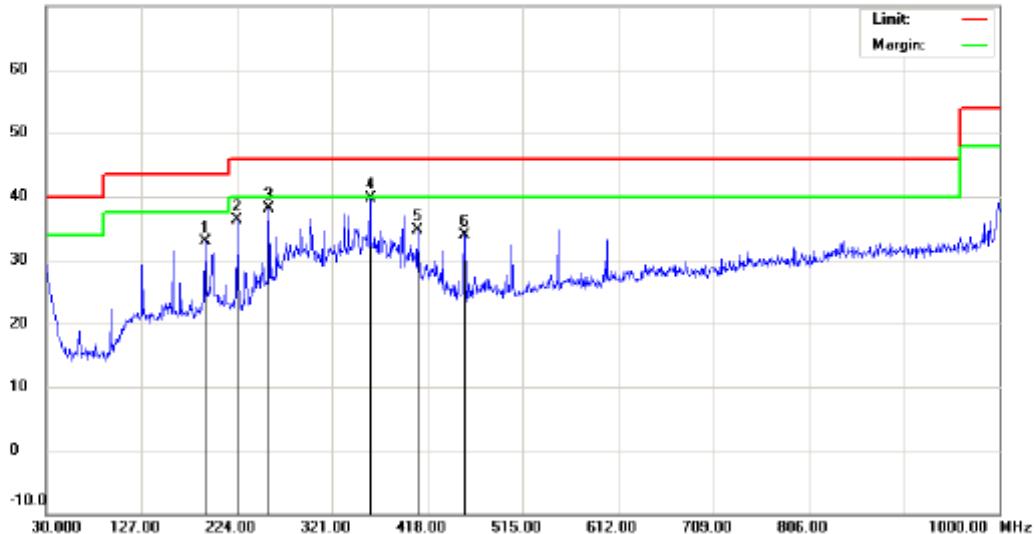

Site: site MOST 3M

Polarization: **Horizontal**

Temperature: 25

Limit: FCC Part15 B 3M Radiation

Power: DC 5V by USB port of Notebook

Humidity: 60 %

EUT: Wireless Mouse- Receiver

Distance:

M/N: LM-5602

Mode: Normal working


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Height	Degree
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		191.9900	16.12	16.70	32.82	43.50	-10.68	peak			
2		224.9699	19.86	16.40	36.26	46.00	-9.74	peak			
3		256.9800	20.66	17.48	38.14	46.00	-7.86	peak			
4	*	359.8000	21.48	18.30	39.78	46.00	-6.22	peak			
5		408.3000	15.74	19.00	34.74	46.00	-11.26	peak			
6		455.8299	13.80	20.19	33.99	46.00	-12.01	peak			


*:Maximum data x:Over limit !:over margin

APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

Line Conducted Emission Test Setup

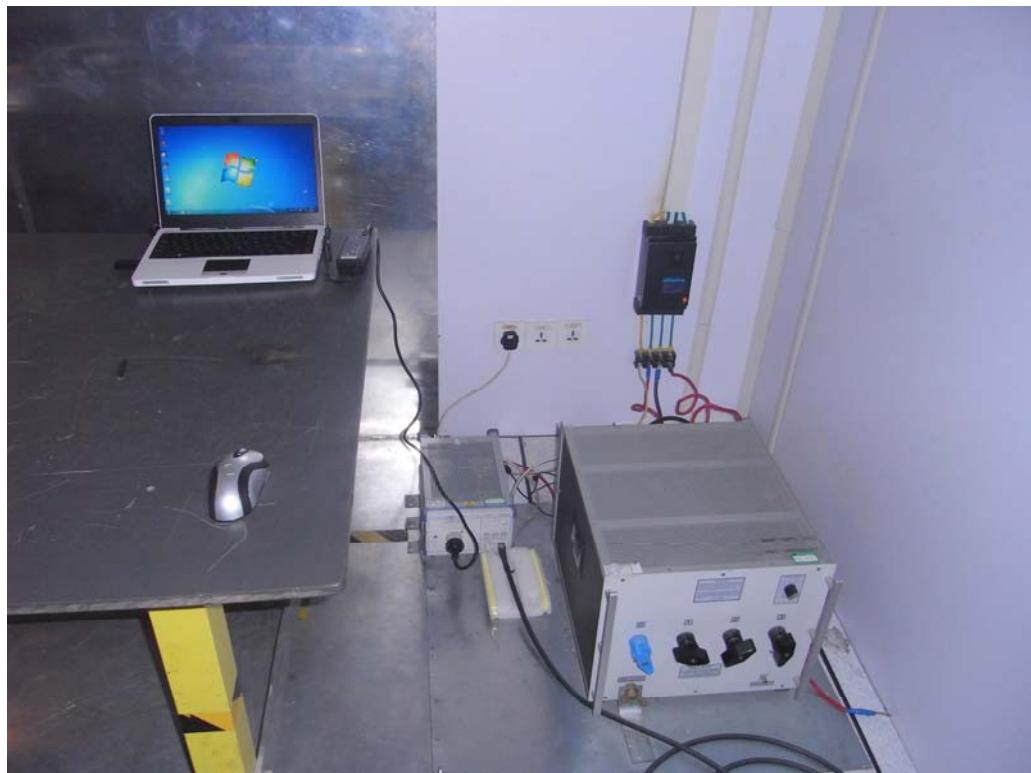

Radiated Emission Test Setup

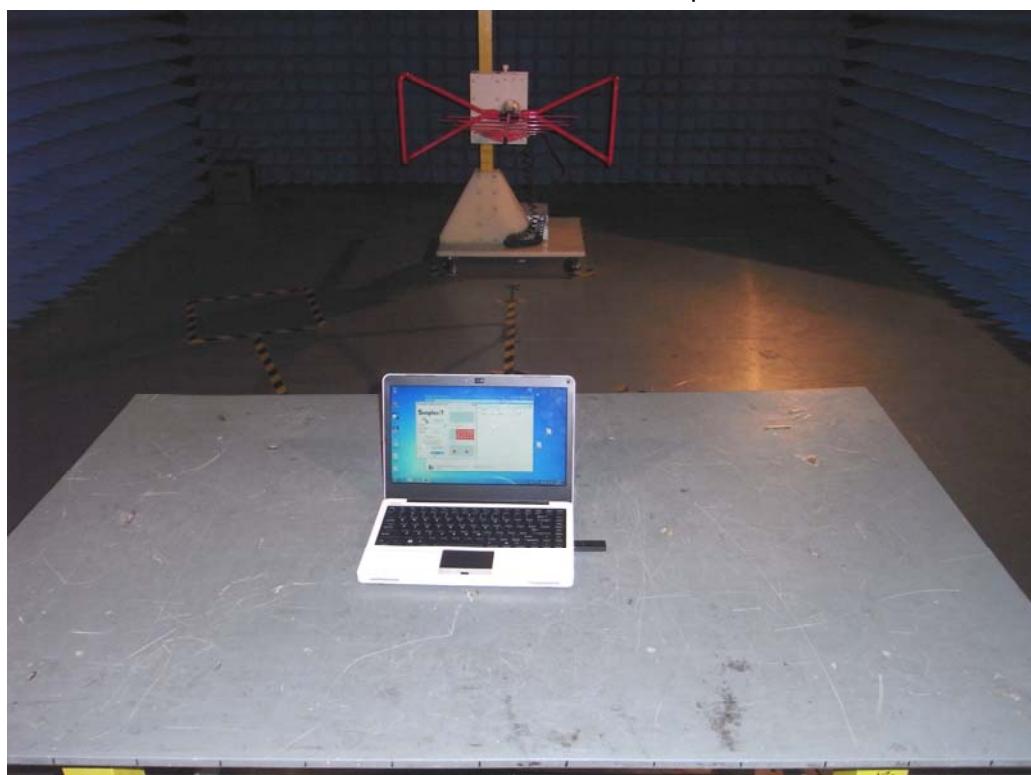

APPENDIX 2
PHOTOGRAPHS OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE





TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



INTERNAL PHOTO OF SAMPLE

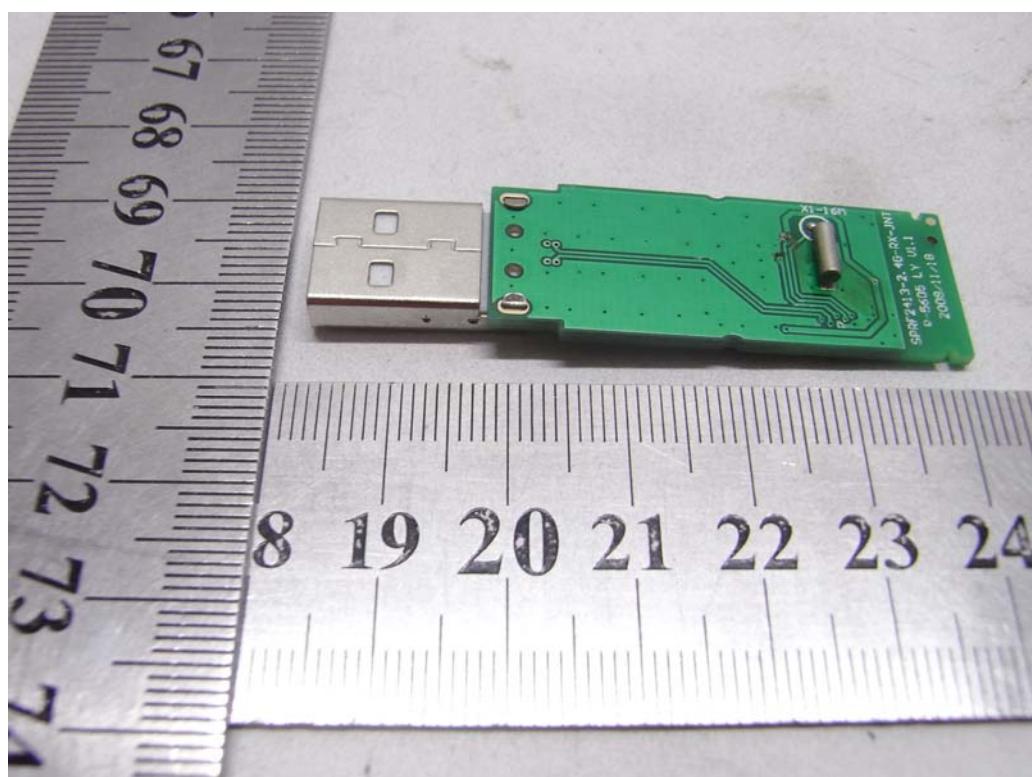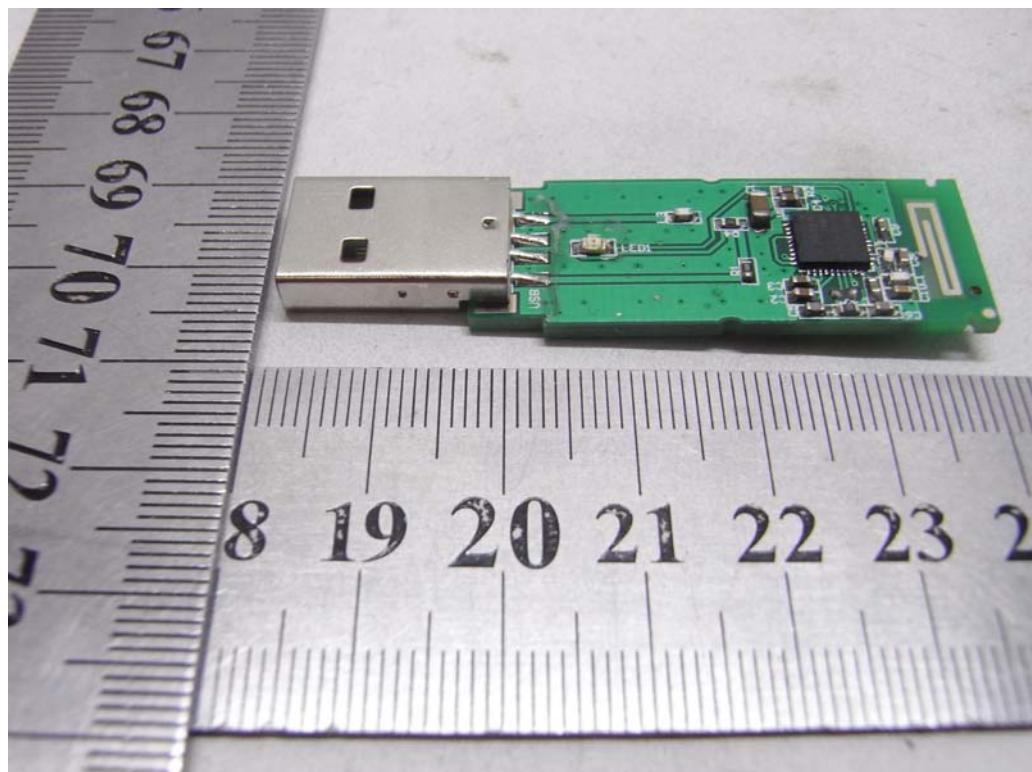

-----END OF REPORT-----