



Shenzhen VITE Technology Co., Ltd  
Tel: +86-755-89486194 Fax: +86-755-89486187

## FCC PART 22 AND PART 24 TEST REPORT

### FCC Part 22 / Part 24

**Report Reference No.....** **VITE10016G**

Compiled by

( position+printed name+signature)..**File administrators Andy Zhang**

*Andy Zhang*

Name of the organization performing  
the tests **Test Engineer Kendy Wang**

*Kendy Wang*

( position+printed name+signature)..

Approved by

( position+printed name+signature)..**Manager Tracy Qi**

*Tracy Qi*

Date of issue..... **Oct 18, 2010**

**Representative Laboratory Name :** **Shenzhen VITE Technology Co., Ltd**

Address..... **Suite 2123, Building 4, Hongfa Centre, Central Area Baoan, Baoan District, Shenzhen, Guangdong, 518101, P.R. China**

**Test Firm.....** **Bontek Compliance Testing Laboratory Ltd**

Address..... **1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China**

**Applicant's name.....** **Newport Wholesale**

Address..... **11037 Warner AVE#201,Fountain Valley,CA92708,USA**

#### **Test specification:**

Standard ..... **FCC CFR Title 47 Part 2, Part 22H and Part 24E**

**EIA/TIA 603-C: 2004**

TRF Originator..... **Shenzhen VITE Technology CO., Ltd**

Master TRF..... **Dated 2009-03**

#### **Shenzhen VITE Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen VITE Technology Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen VITE Technology Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....** **Mobile Phone**

Trade Mark ..... **MAXWEST**

Model/Type reference..... **WT8000, WT8001, WT8002**

Difference description..... **Only the model name is difference**

Modulation ..... **GMSK**

Multislot Class ..... **GPRS: 12**

Tx Frequency Range..... **GSM 850: 824MHz to 849MHz, PCS 1900: 1850MHz to 1910MHz**

Rx Frequency Range..... **GSM 850: 869MHz to 894MHz, PCS 1900: 1930MHz to 1990MHz**

Antenna Type..... **Fixed**

FCC ID..... **YNFWT8000**

Result..... **Positive**

## TEST REPORT

<b>Test Report No. :</b>	<b>VITE10016G</b>	Oct 18, 2010
		Date of issue

**Equipment under Test** : Mobile Phone

**Model /Type** : WT8000

**Listed Models** : WT8001, WT8002

**Applicant** : Newport Wholesale

**Address** : 11037 Warner AVE#201,Fountain Valley,CA92708,USA

**Manufacturer** : Newport Wholesale

**Address** : 11037 Warner AVE#201,Fountain Valley,CA92708,USA

<b>Test Result</b> according to the standards on page 4:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<u>1.</u>	<u>TEST STANDARDS .....</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY .....</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<u>3.</u>	<u>TEST ENVIRONMENT .....</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
3.7.	Summary of Test Result	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS .....</u>	<u>10</u>
4.1.	Peak Output Power	10
4.2.	Modulation Characteristic	14
4.3.	Occupied Bandwidth	19
4.4.	Spurious Emission At Antenna Terminals (+/- 1MHz)	24
4.5.	Spurious Emission	27
4.6.	Frequency Stability under Temperature & Voltage Variations	36
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT .....</u>	<u>39</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u>	<u>40</u>

## 1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22:](#) Public Mobile Services

[FCC Part 24:](#) Personal Communications Services

[EIA/TIA 603-C: 2004](#)

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample : Sep 16, 2010

Testing commenced on : Sep 18, 2010

Testing concluded on : Oct 17, 2010

### 2.2. Equipment Under Test

#### Power supply system utilised

Power supply voltage :  120V / 60 Hz  115V / 60Hz  
 12 V DC  24 V DC  
 Other (specified in blank below)

DC 3.7V from Battery

### 2.3. Short description of the Equipment under Test (EUT)

GSM mobile phone with Bluetooth and Wi-fi function.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

### 2.4. EUT operation mode

VITE has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode

Mode 1: GSM 850

Mode 2: PCS 1900

### 2.5. EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- supplied by the manufacturer

- supplied by the lab

Manufacturer :  
Model No. :

Manufacturer :  
Model No. :

## **2.6. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: **YNFWT8000** filing to comply with of the FCC Part 22 and Part 24 Rules.

## **2.7. Modifications**

No modifications were implemented to meet testing criteria.

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Bontek Compliance Testing Laboratory Ltd  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements  
of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **IC Registration No.: 7631A**

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2008.

##### **FCC-Registration No.: 338263**

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

#### **3.4. Configuration of Tested System**

**Fig. 2-1 Configuration of Tested System**

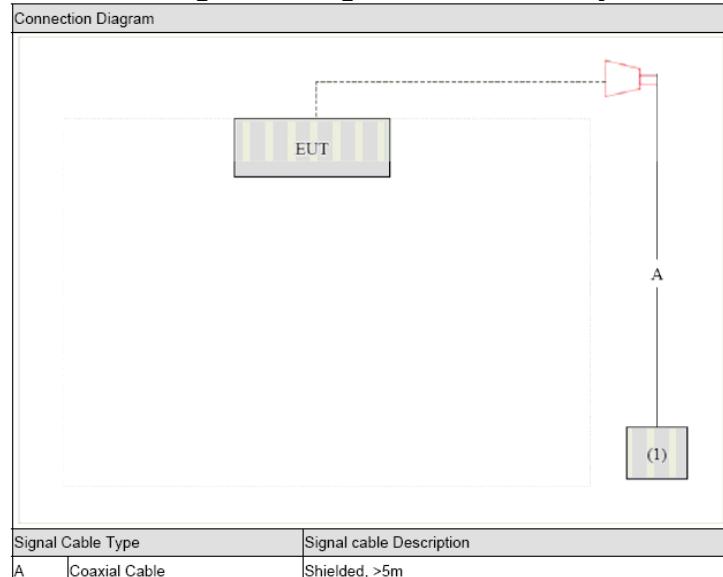

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2010/04/15	2011/04/14
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2010/04/15	2011/04/14
3	Dual Directional Coupler	Agilent	778D	2010/04/15	2011/04/14
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2010/04/15	2011/04/14
5	Tunable Bandreject filter	K&L	3TNF-800	2010/04/15	2011/04/14
6	Tunable Bandreject filter	K&L	5TNF-1700	2010/04/15	2011/04/14
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2010/04/15	2011/04/14
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2010/04/15	2011/04/14
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2010/04/15	2011/04/14
10	AC Power Supply	IDRC	CF-500TP	2010/04/15	2011/04/14
11	DC Power Supply	IDRC	CD-035-020PR	2010/04/15	2011/04/14
12	RF Current Probe	FCC	F-33-4	2010/04/15	2011/04/14
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2010/04/15	2011/04/14
14	MICROWAVE AMPLIFIER	HP	8349B	2010/04/15	2011/04/14
15	Amplifier	HP	8447D	2010/04/15	2011/04/14
16	SIGNAL GENERATOR	HP	8647A	2010/04/15	2011/04/14
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2010/04/15	2011/04/14
18	Horn Antenna	Schwarzbeck	BBHA9120A	2010/04/15	2011/04/14
19	EMI Test Receiver	R&S	ESPI	2010/04/15	2011/04/14

### 3.7. Summary of Test Result

No deviations from the test standards

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 22.913(a)(2) and Part 2.1046 EIA/TIA 603-C	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 22.917(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 22.917(b) and Part 2.1051, 2.1053 EIA/TIA 603-C	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 22.355 and 2.1055 EIA/TIA 603-C	Yes	No

Deviations from the test standards as below description: For GSM 850 (FCC Part 22H & Part 2)

For PCS 1900 (FCC Part 24E & Part 2)


Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 24.232(b) and Part 2.1046 EIA/TIA 603-C	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 24.238(b) and Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 24.238(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 24.238(b) and Part 2.1051, 2.1053 EIA/TIA 603-C	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 24.235 and 2.1055 EIA/TIA 603-C	Yes	No

## 4. TEST CONDITIONS AND RESULTS


### 4.1. Peak Output Power

#### TEST CONFIGURATION

Conducted Power Measurement:

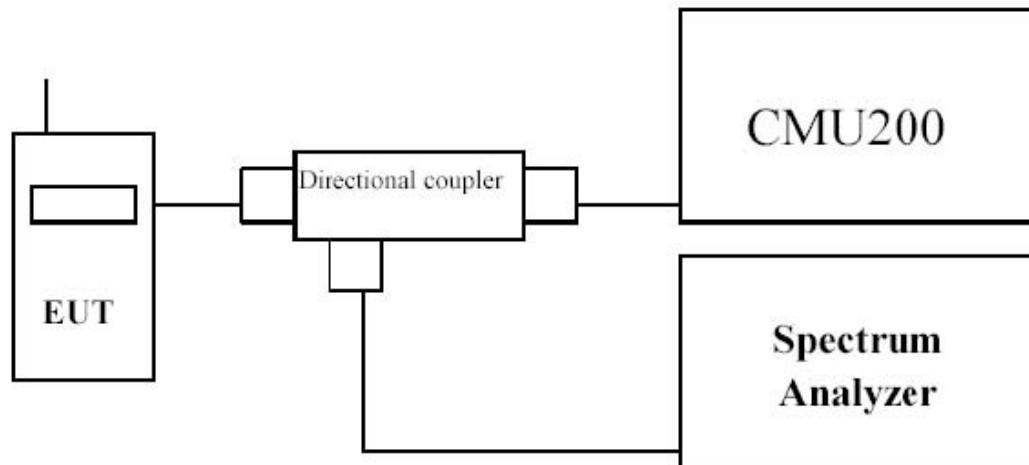

Radiated Power Measurement:

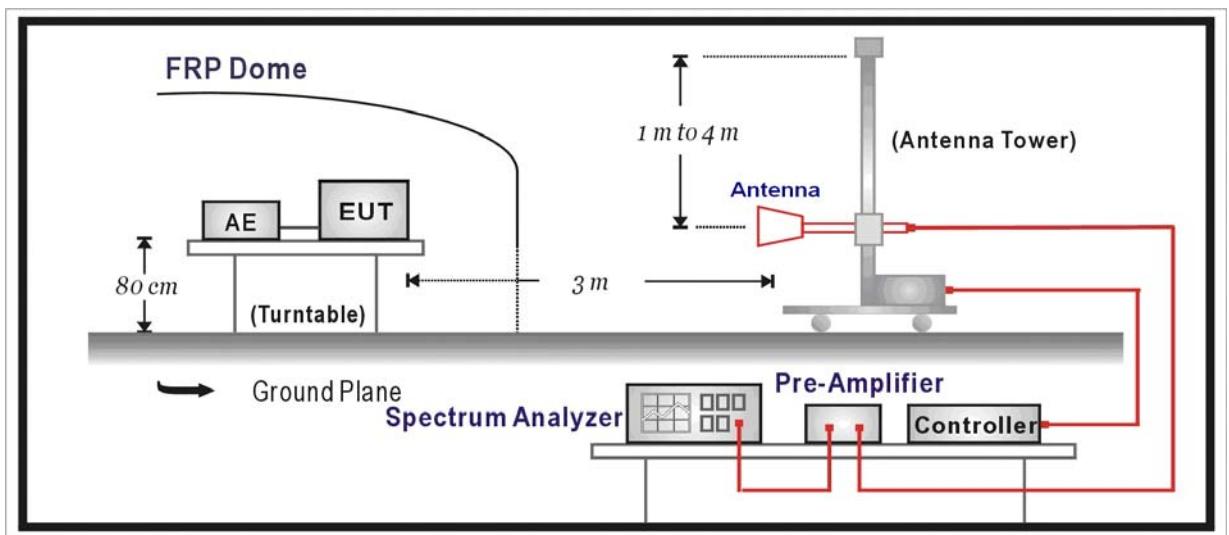

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

**Radiated Power Measurement:**

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

**LIMIT**

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

**TEST RESULTS**

Product	Mobile Phone					
Test Item	Peak Output Power					
Test Mode	Mode 1: GSM 850					
Date of Test	2010/09/20			Test Site	AC-2	

Channel No.	Frequency (MHz)	Modulation	Conducted Peak Output Power Measurement	Radiated Peak Output Power Measurement (dBm)	Limit (dBm)	Result
128	824.2	GSM	32.43	30.05	38.50	Pass
189	836.4	GSM	32.65	30.12	38.50	Pass
251	848.8	GSM	32.57	30.07	38.50	Pass

**Radiated Measurement**

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 128 (824.20MHz)</b>								
824.20	-13.50	H	19.61	2.56	-0.02	17.03	38.50	-21.47
824.20	-1.41	V	32.63	2.56	-0.02	30.05	38.50	-9.35
<b>Middle Channel 380 (836.40MHz)</b>								
836.40	-13.12	H	19.92	2.59	0.10	17.43	38.50	-21.07
836.40	-1.22	V	32.61	2.59	0.10	30.12	38.50	-10.28
<b>High Channel 773 (848.80MHz)</b>								
848.80	-13.04	H	20.46	2.54	0.13	18.05	38.50	-20.45
848.80	-1.13	V	32.48	2.54	0.13	30.07	38.50	-9.46

Product	Mobile Phone					
Test Item	Peak Output Power					
Test Mode	Mode 2: PCS 1900					
Date of Test	2010/09/20			Test Site	AC-2	


Channel No.	Frequency (MHz)	Modulation	Conducted Peak Output Power Measurement	Radiated Peak Output Power Measurement (dBm)	Limit (dBm)	Result
512	1850.2	GPRS	29.44	25.37	33.00	Pass
661	1880.0	GPRS	29.61	25.46	33.00	Pass
810	1909.8	GPRS	29.52	25.39	33.00	Pass

## Radiated Measurement

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 512 (1850.20MHz)</b>								
1850.20	-16.11	H	9.70	3.55	10.40	16.55	33.00	-6.52
1850.20	-10.25	V	18.52	3.55	10.40	25.37	33.00	-5.69
<b>Middle Channel 661 (1880.00MHz)</b>								
1880.00	-15.93	H	10.31	3.53	10.43	17.21	33.00	-5.98
1880.00	-10.06	V	18.56	3.53	10.43	25.46	33.00	-5.55
<b>High Channel 810 (1909.80MHz)</b>								
1909.80	-15.06	H	9.85	3.56	10.44	16.73	33.00	-5.65
1909.80	-10.14	V	18.51	3.56	10.44	25.39	33.00	-4.82

## 4.2. Modulation Characteristic

### TEST CONFIGURATION

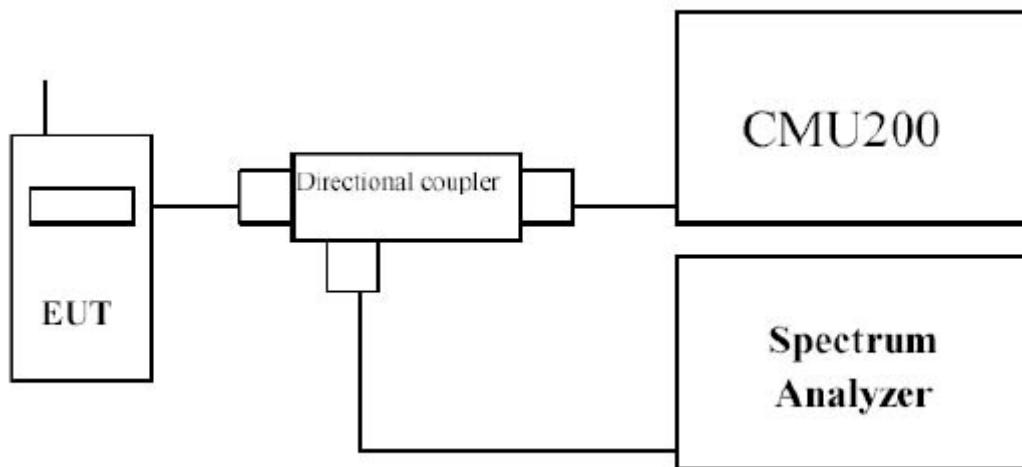

### LIMIT

N/A

### TEST PROCEDURE

GMSK is a form of binary signaling schemes which represent digital states as a shift between discrete sinusoidal frequencies called Frequency Shift Keying (FSK). Minimum Shift Keying (MSK) is continuous phase FSK with the smallest possible modulation index  $h$ . Modulation index is defined as:  $h = 2 * F * T_b$

where  $F$  = Peak frequency deviation in Hz and  $T_b$  = Bit period in seconds

Two discrete frequencies, representing two distinct digital states, with equal phases at switch time  $t = 0$  requires a minimum value of  $h = 0.5$ . The Gaussian part of GMSK describes the fact that the digital pulses are filtered in the time domain. This results in bits which are sinusoidal rather than square. The effective spectrum is then compressed with the average carrier frequency in the center of the passband. This is a great advantage because of the significantly reduced bandwidth. GMSK is utilized because of these bandwidth conservation properties.

The bandwidth for GSM is a 60 MHz up-link at 1850-1910 MHz and down-link at 1930-1990 MHz. The 65 MHz is divided into 299 channels, each of which is 200 kHz wide. Slight spectral spilloff is allowed into neighboring channels (which is minimized by GMSK). This separated transmit/receive frequencies scheme under GSM enables easier duplex filtering.

Within the bandwidth, individual channels are subdivided into multiframe (made of 26 frames), frames (made of 8 time slots), and time slots (made of 8 fields). The time slots are 0.57 ms long allowing 156.25 bits of information including overhead.

**TEST RESULTS**

Product	Mobile Phone		
Test Item	Modulation Characteristic		
Test Mode	Mode 1: GSM 850		
Date of Test	2010/09/20	Test Site	AC-4

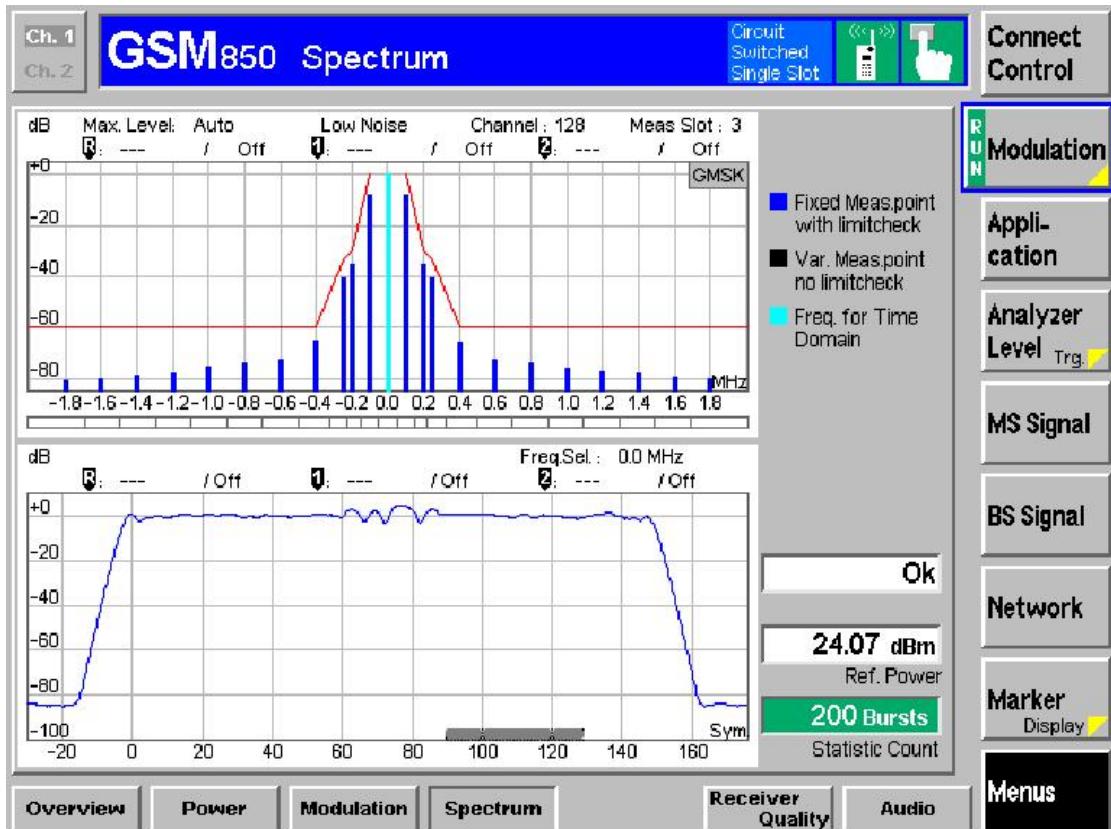
**Figure (GSM 850-Channel 128)**

Figure (GSM 850-Channel 189)



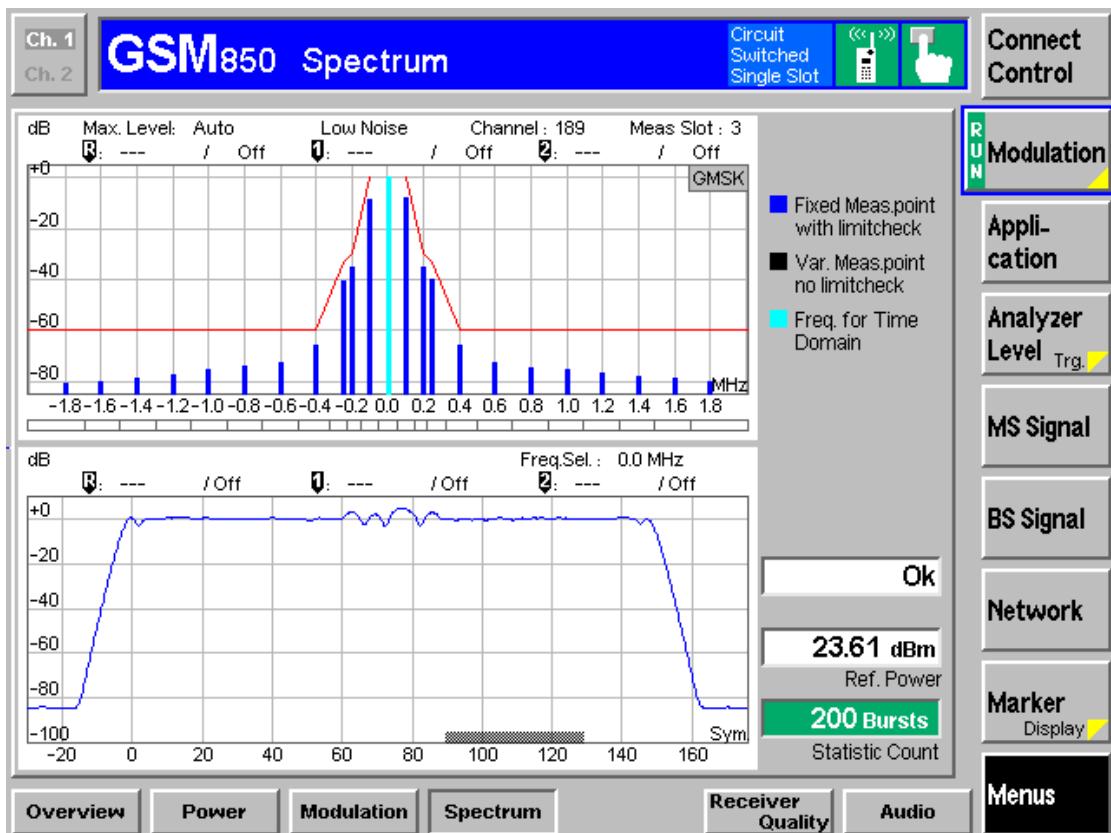


Figure (GSM 850-Channel 251)

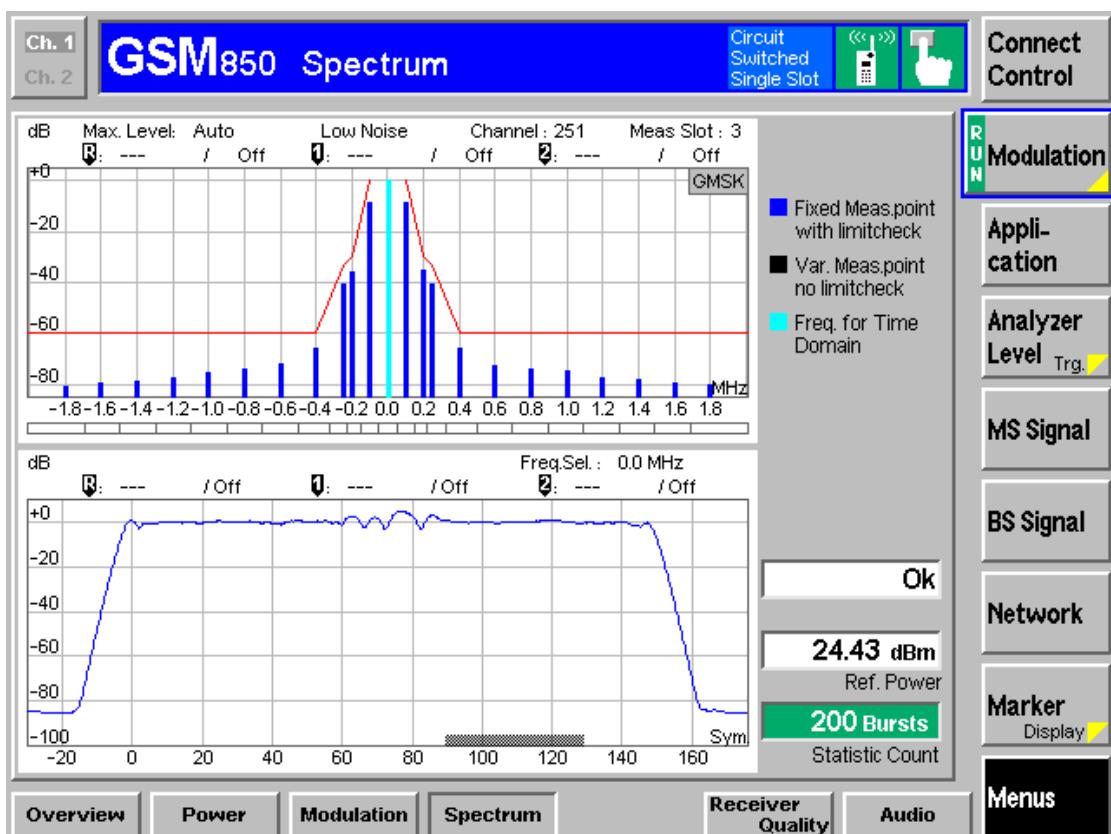


Product	Mobile Phone		
Test Item	Modulation Characteristic		
Test Mode	Mode 2: PCS 1900		
Date of Test	2010/09/20	Test Site	AC-4


Figure (PCS 1900-Channel 512)

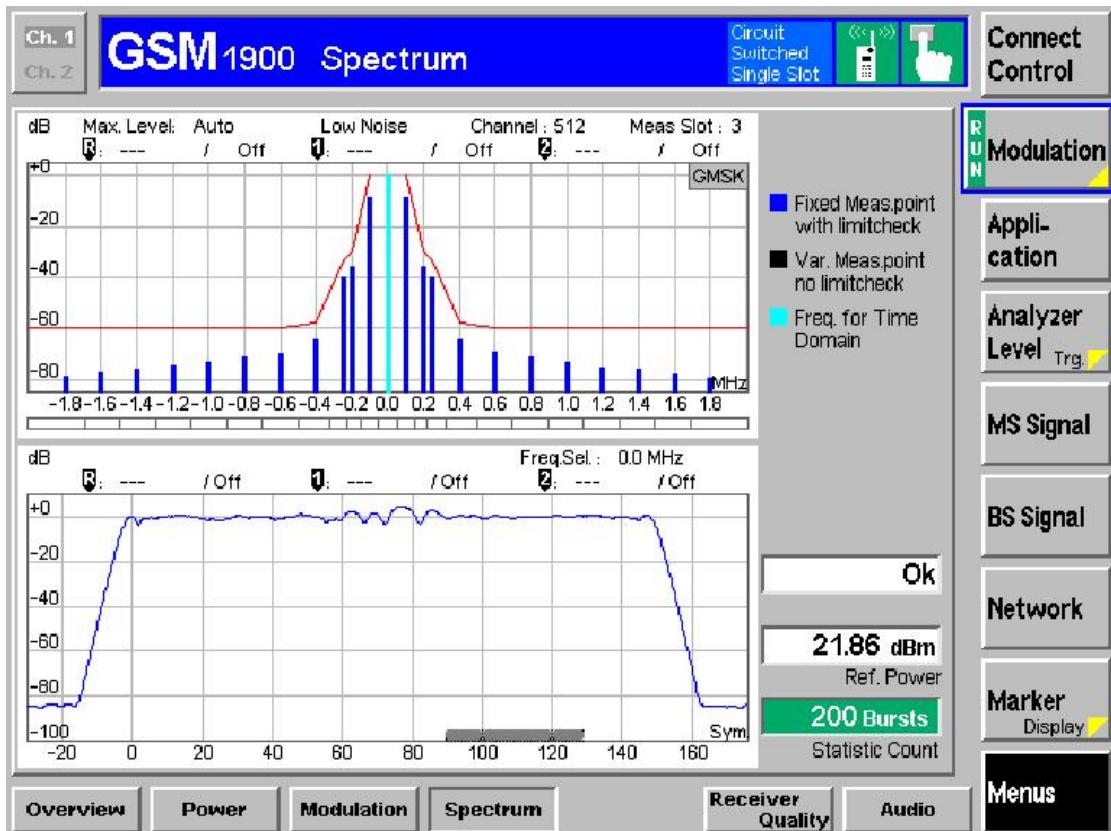

## Figure (PCS 1900-Channel 661)

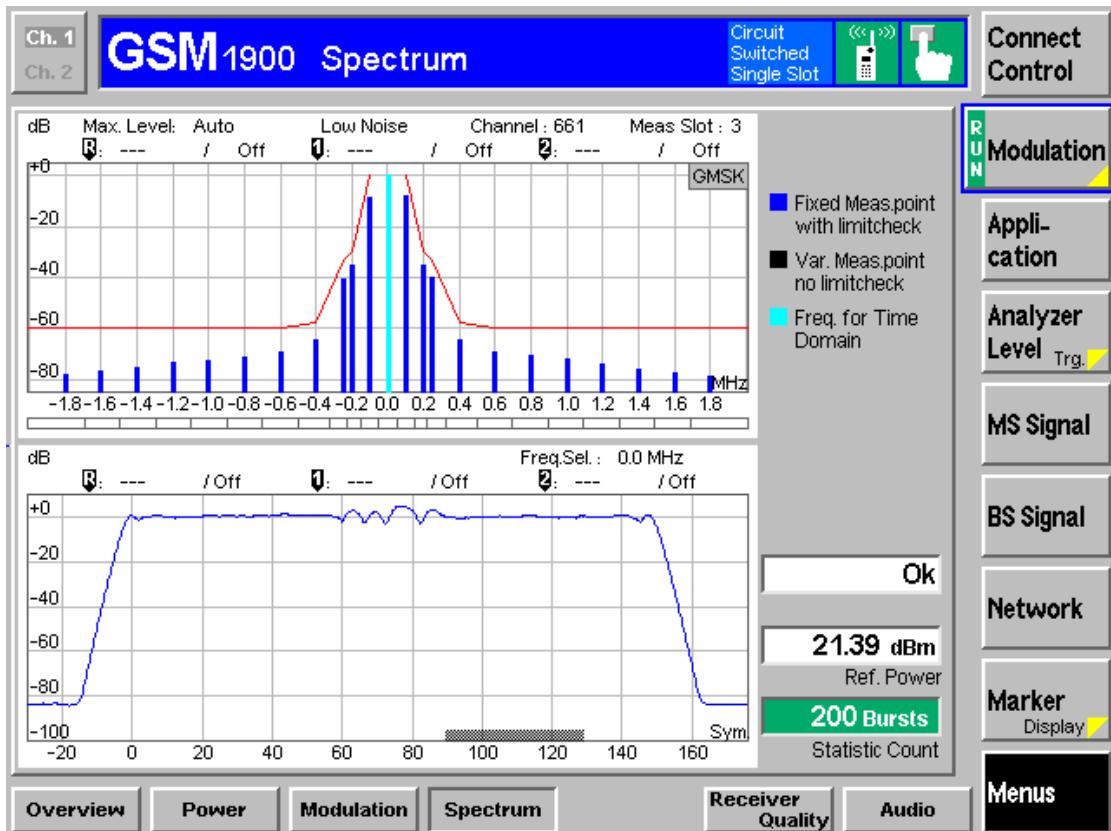


## Figure (PCS 1900-Channel 810)

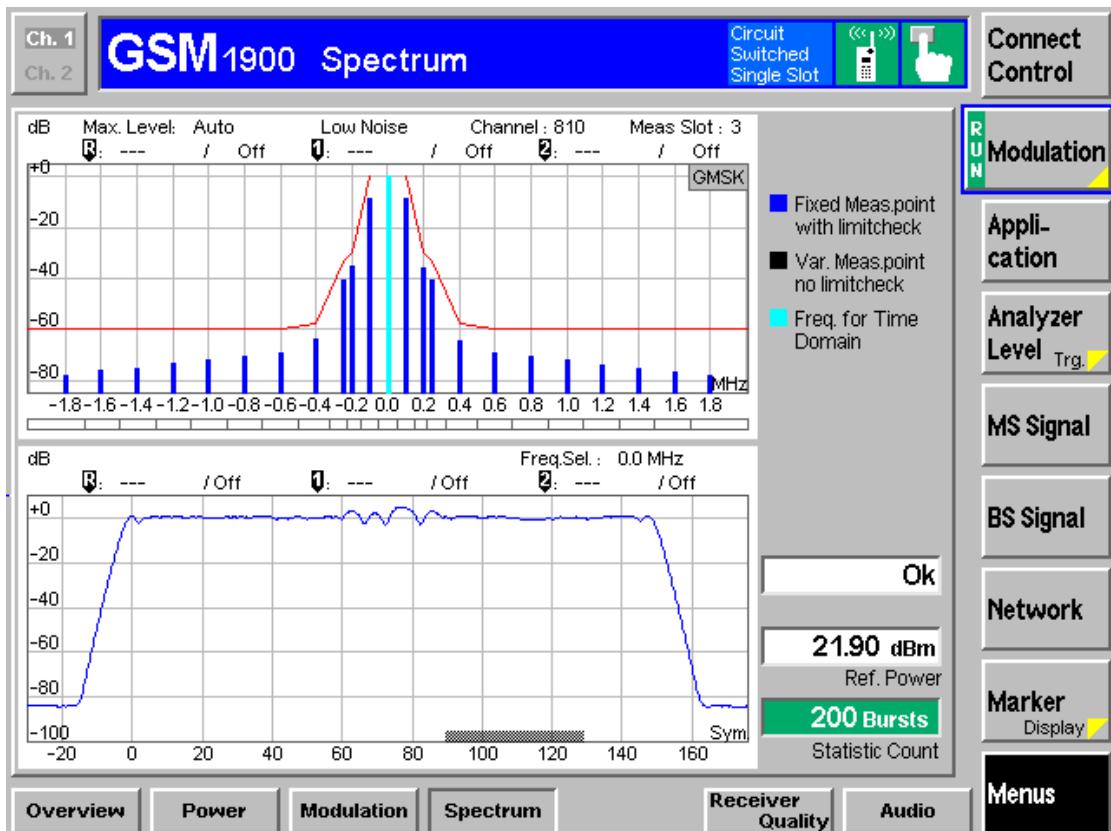

### 4.3. Occupied Bandwidth

#### TEST CONFIGURATION

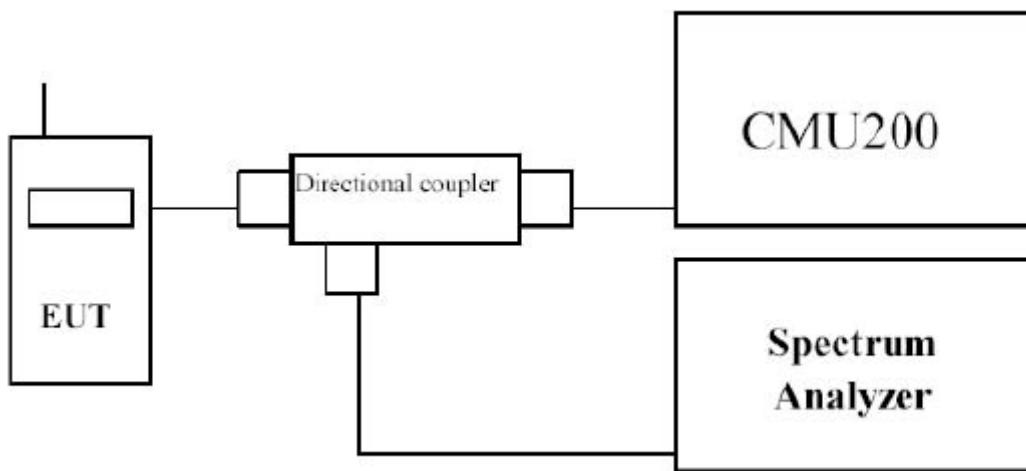

#### TEST PROCEDURE

Using a resolution bandwidth of 3kHz and a video bandwidth of 10kHz, the -26dBc points were established and the emission bandwidth determined. The plots below show the resultant display from the Spectrum Analyzer.

#### LIMIT

N/A

#### TEST RESULTS

Product	Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: GSM 850		
Date of Test	2010/09/20	Test Site	AC-4

Channel No.	Frequency (MHz)	Measurement of -26dB Bandwidth (kHz)
128	824.20	319.13
189	836.40	314.10
251	848.80	319.79

Figure Channel 128 (824.20MHz)

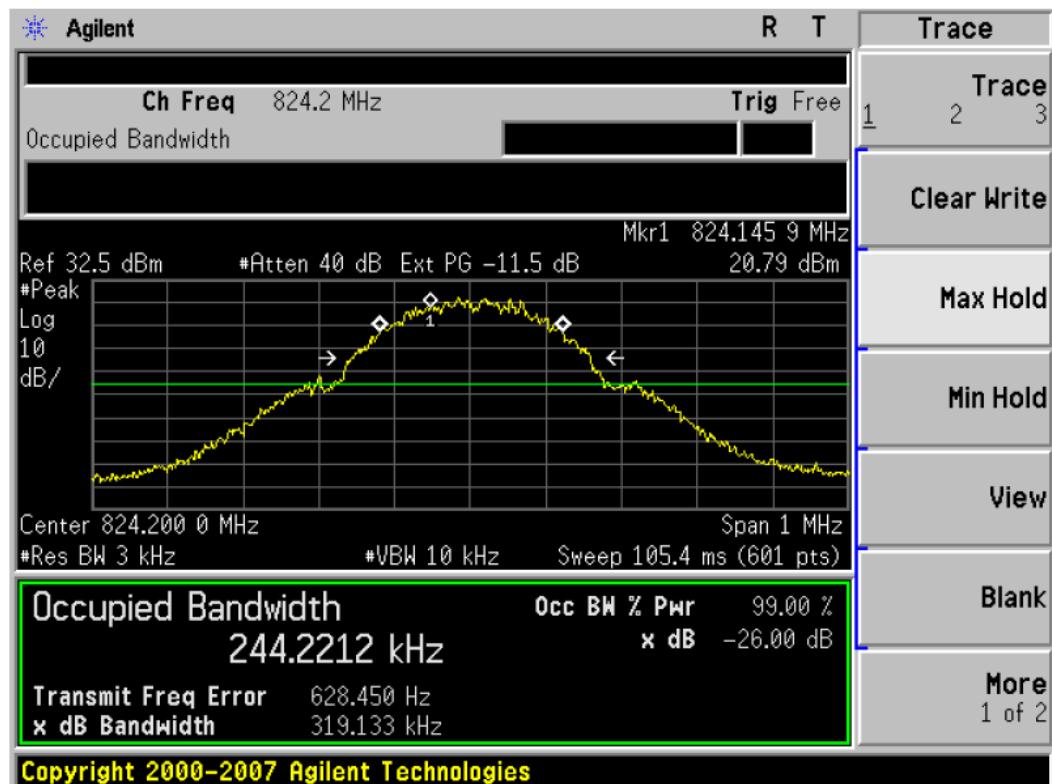


Figure Channel 189 (836.40MHz)


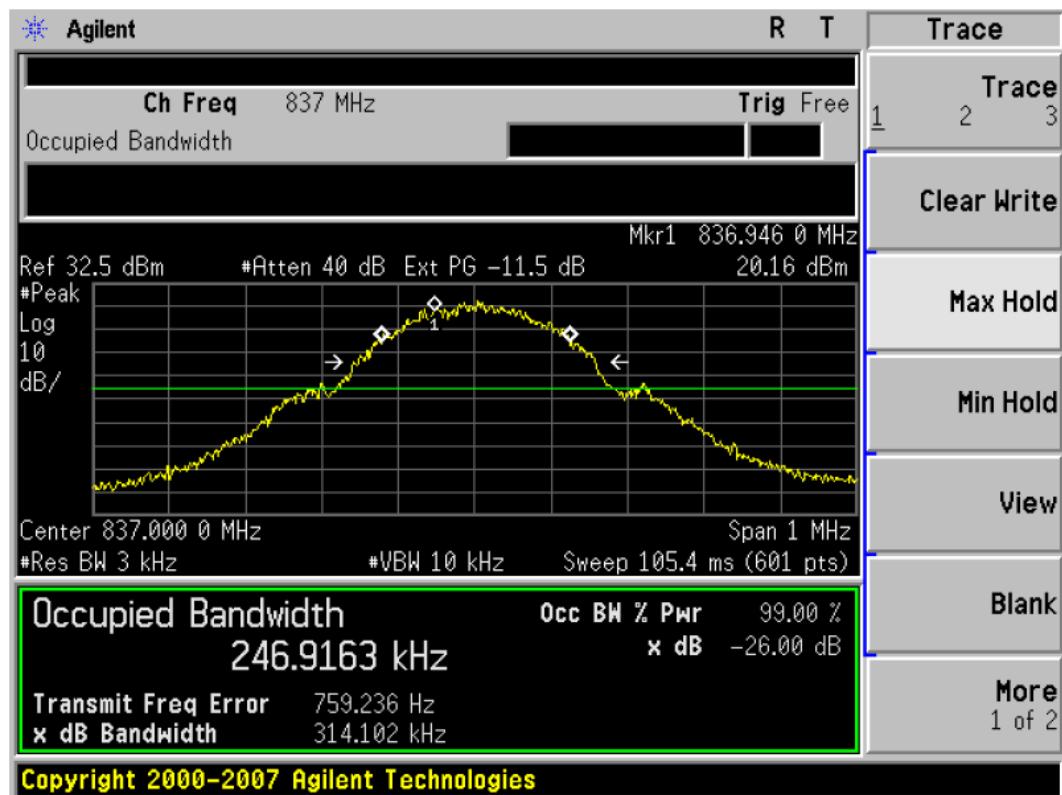


Figure Channel 251 (848.80MHz)

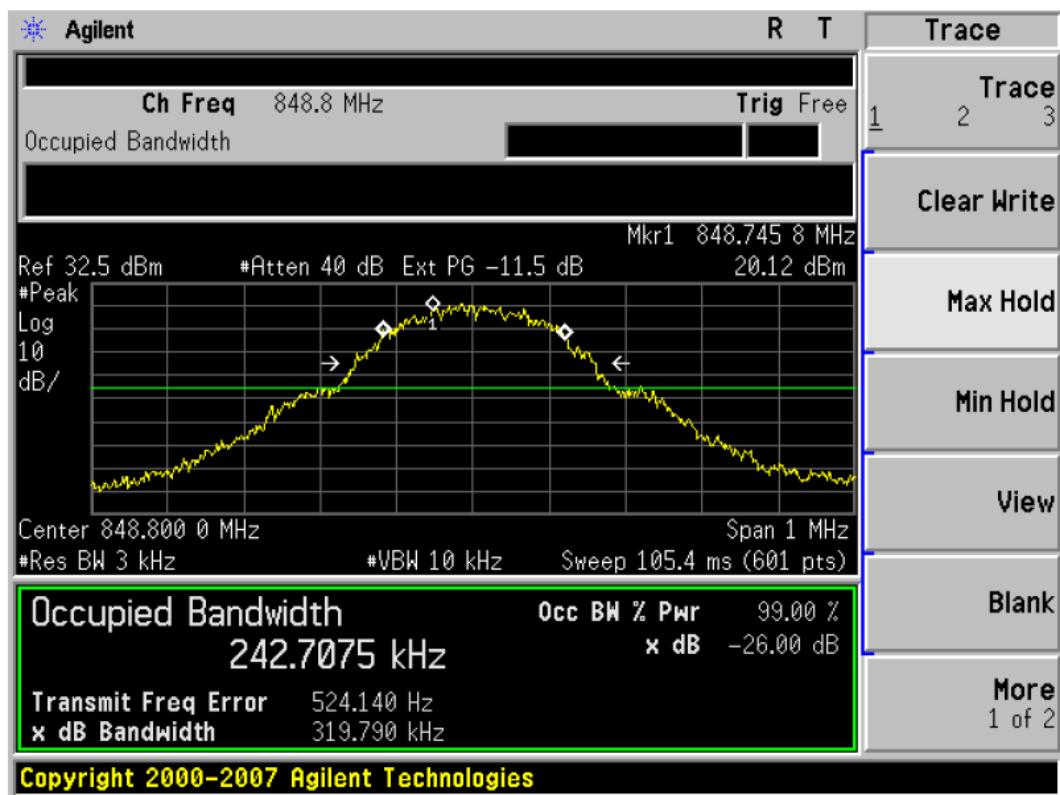

Product	Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: PCS 1900		
Date of Test	2010/09/20	Test Site	AC-4

Channel No.	Frequency (MHz)	Measurement of -26dB Bandwidth (kHz)
512	1850.20	307.86
661	1880.00	308.74
810	1909.80	315.04

Figure Channel 512 (1850.20MHz)

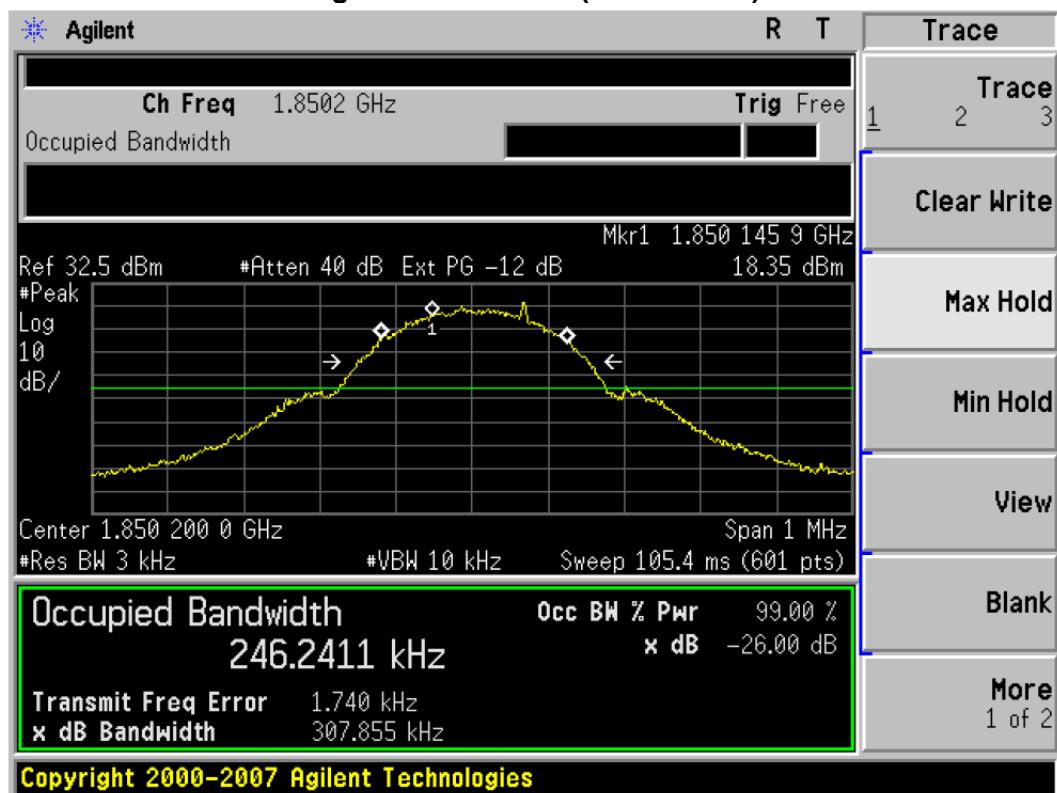


Figure Channel 661 (1880.00MHz)



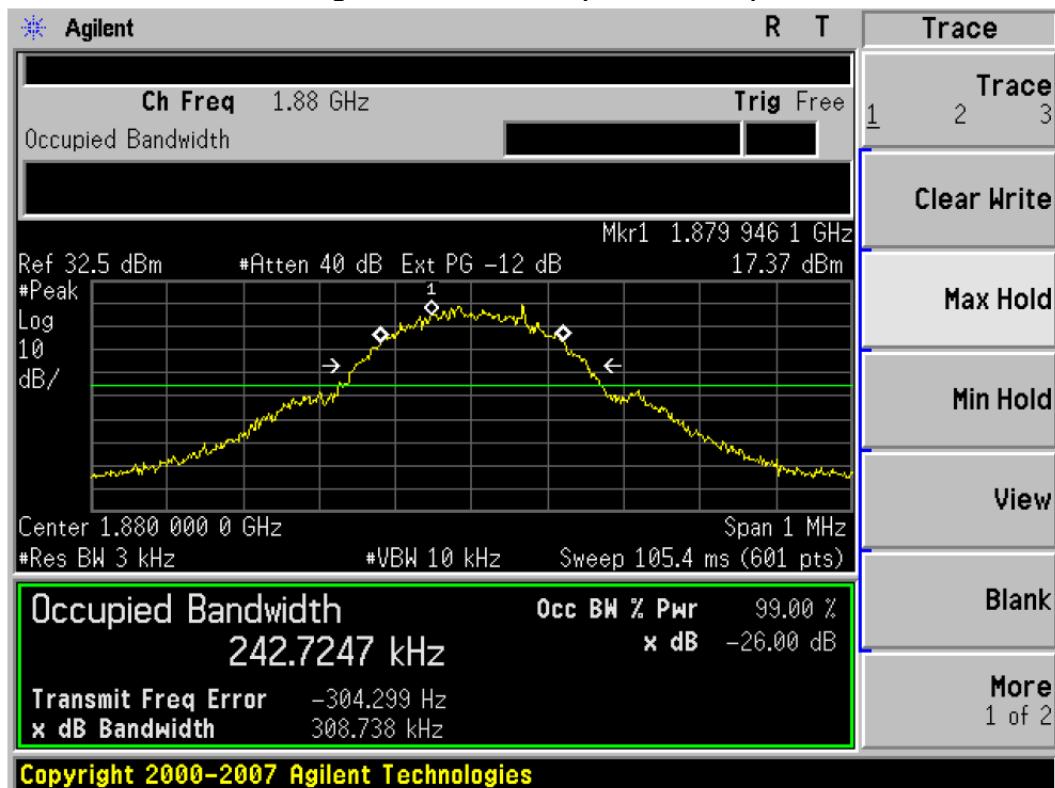


Figure Channel 810 (1909.80MHz)

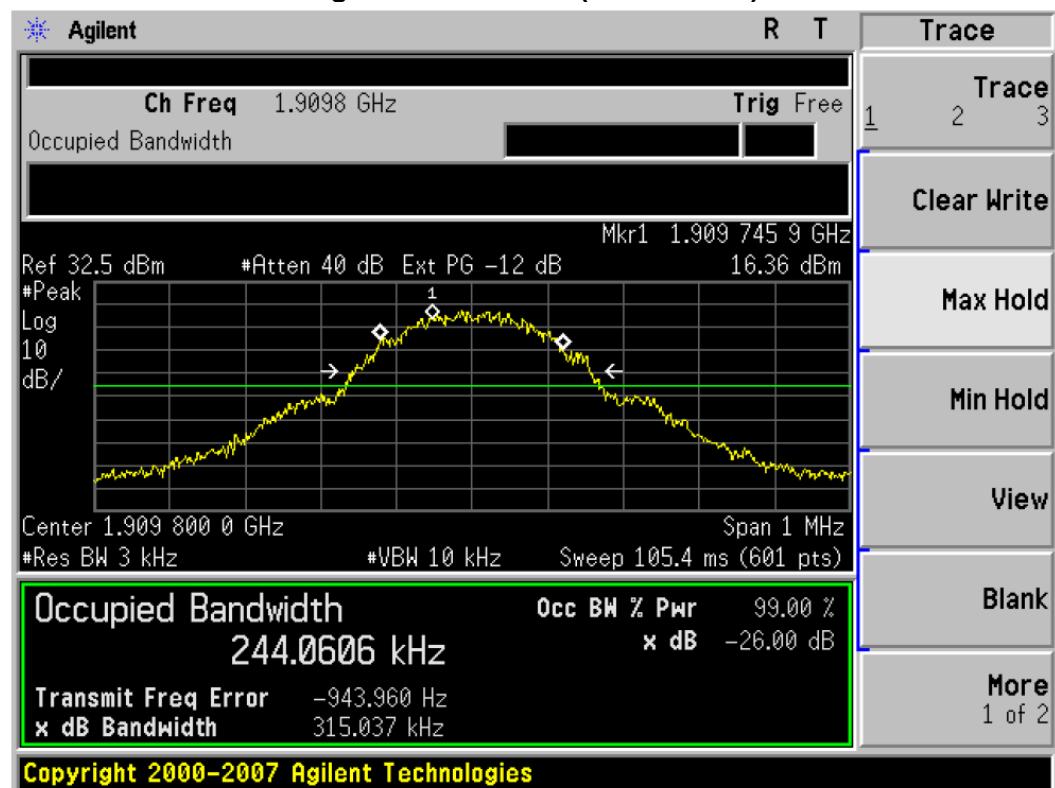

#### 4.4. Spurious Emission At Antenna Terminals (+/- 1MHz)

##### TEST CONFIGURATION

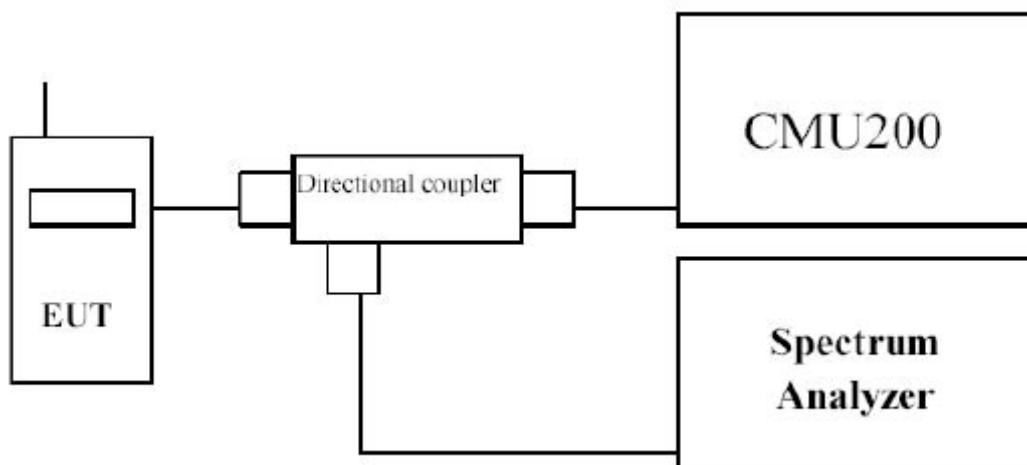

##### TEST PROCEDURE

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

##### LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

##### TEST RESULTS

Figure Channel 128 (Mode 1: GSM850--824.20MHz)

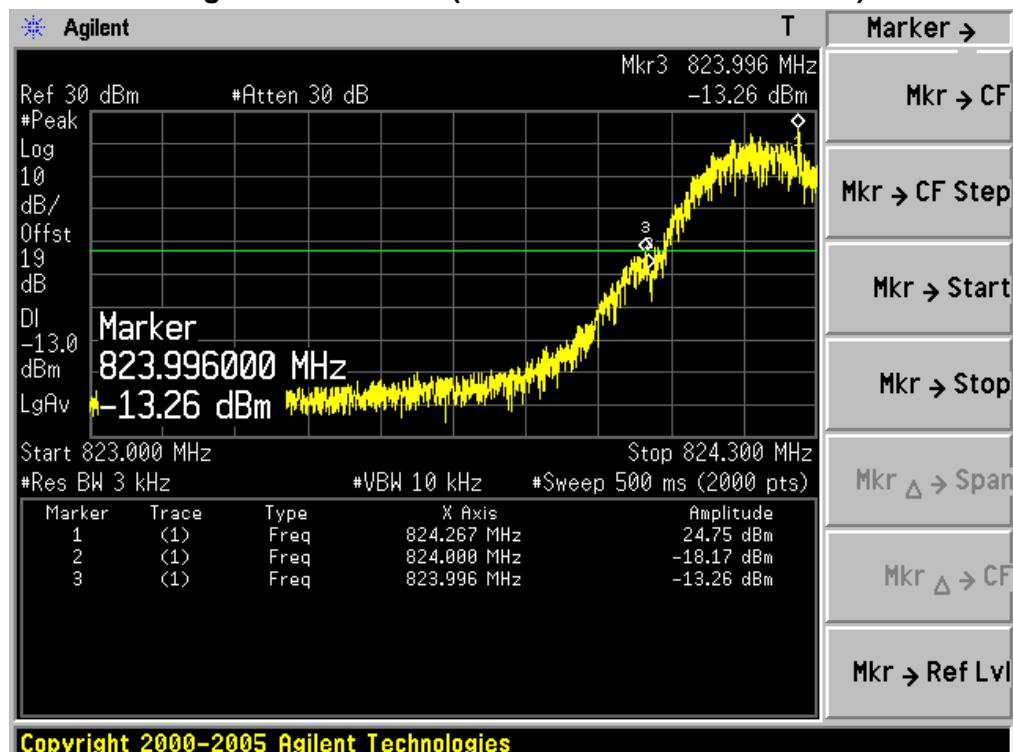


Figure Channel 251 (Mode 1: GSM850--848.80MHz)

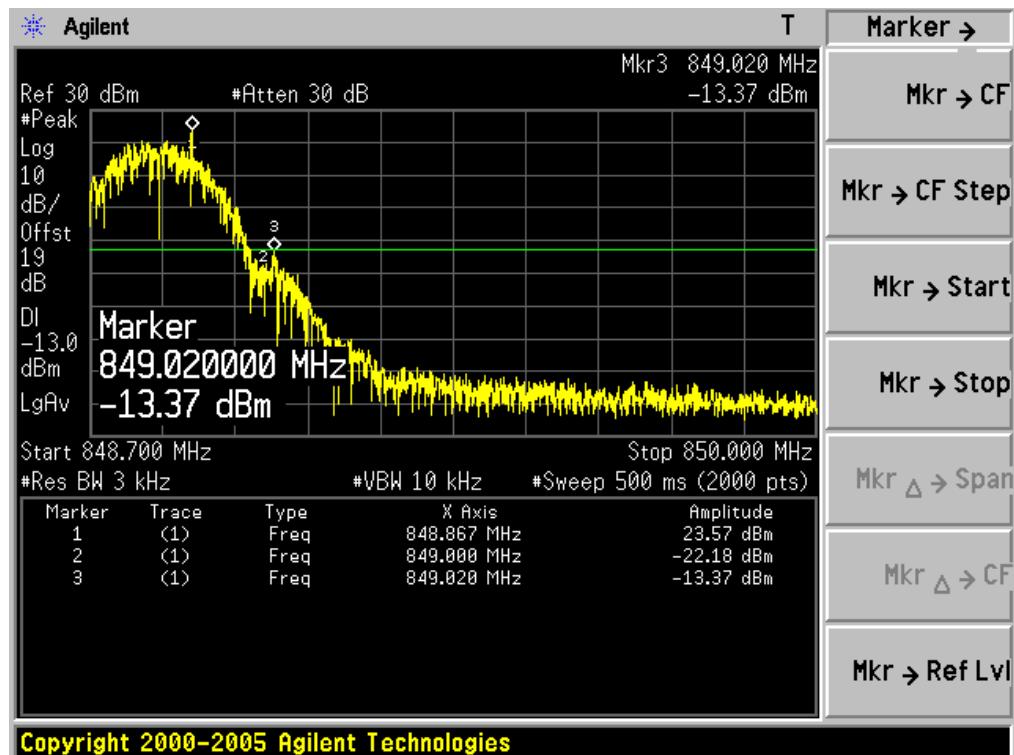


Figure Channel 512 (Mode 2: PCS1900--1850.20MHz)


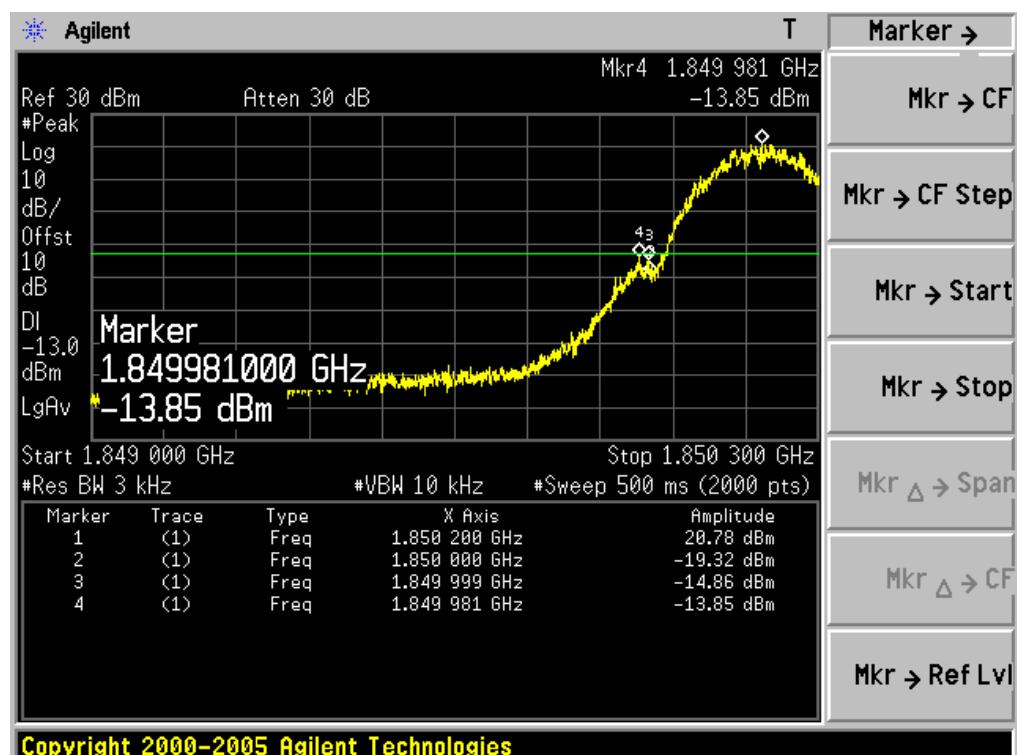



Figure Channel 810 (Mode 2: PCS1900--1909.80MHz)

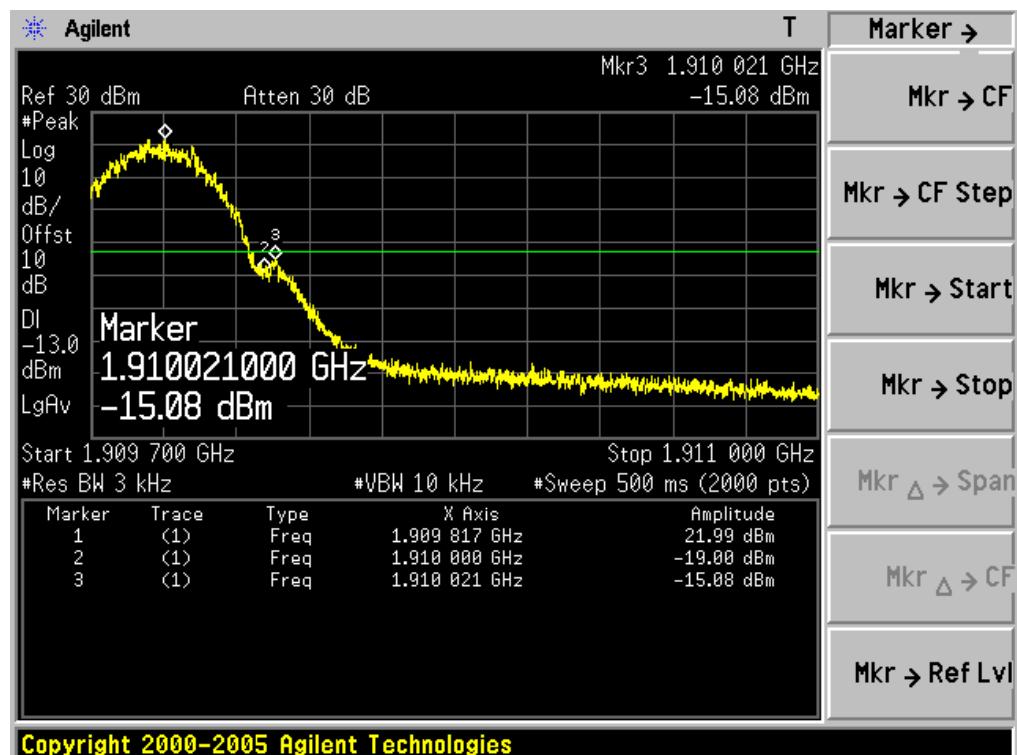


## 4.5. Spurious Emission

### TEST CONFIGURATION

Conducted Spurious Measurement:

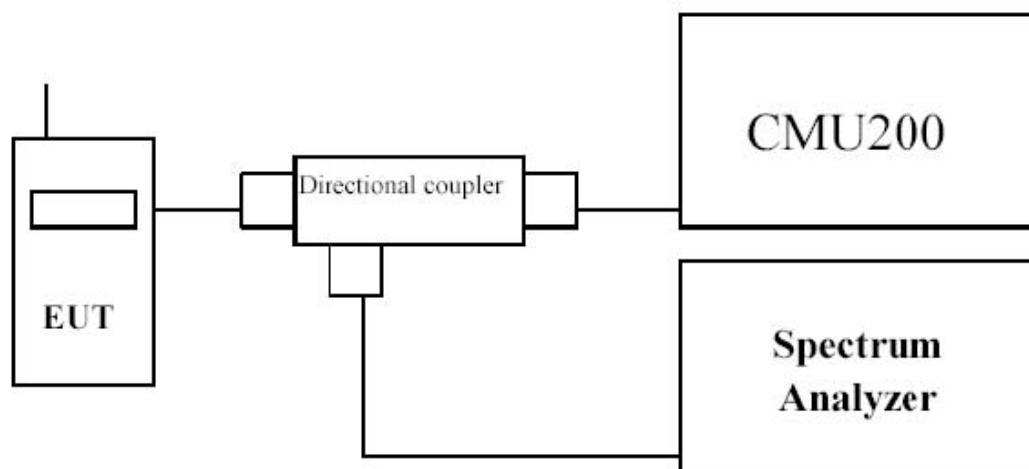

Radiated Spurious Measurement:

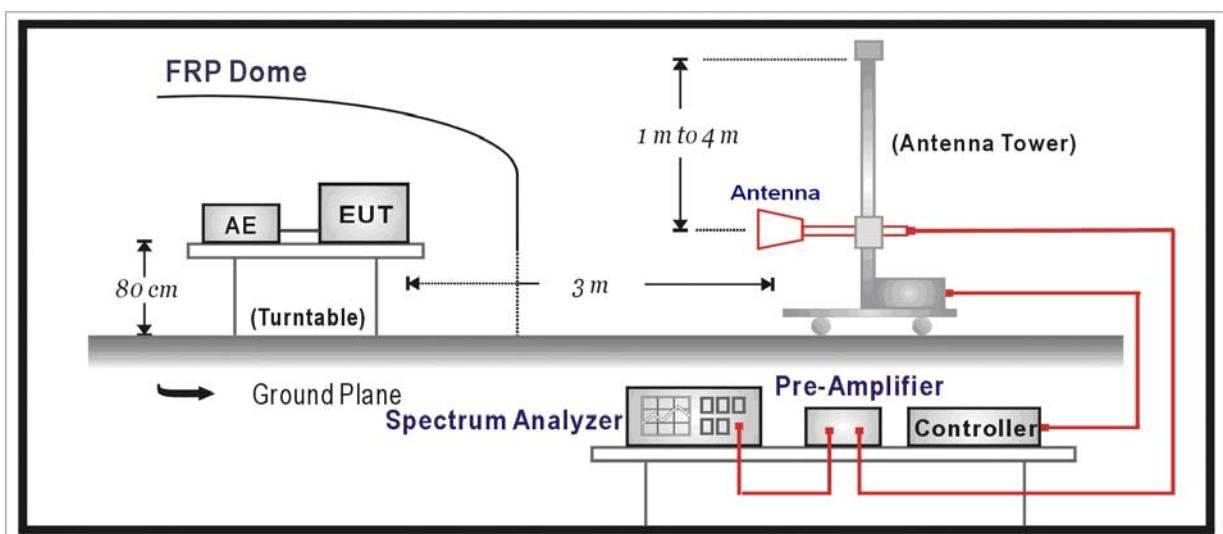

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

#### Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

**Radiated Spurious Measurement:**


- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The transmitter shall be replaced by a substitution antenna.
- i) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j) The substitution antenna shall be connected to a calibrated signal generator.
- k) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- o) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p) The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1 MHz for Part 24. The frequency range was checked up to 10th harmonic.

**LIMIT**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.


**TEST RESULTS**

Engineer : John	Time : 2010/09/22 - 19:02
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 128

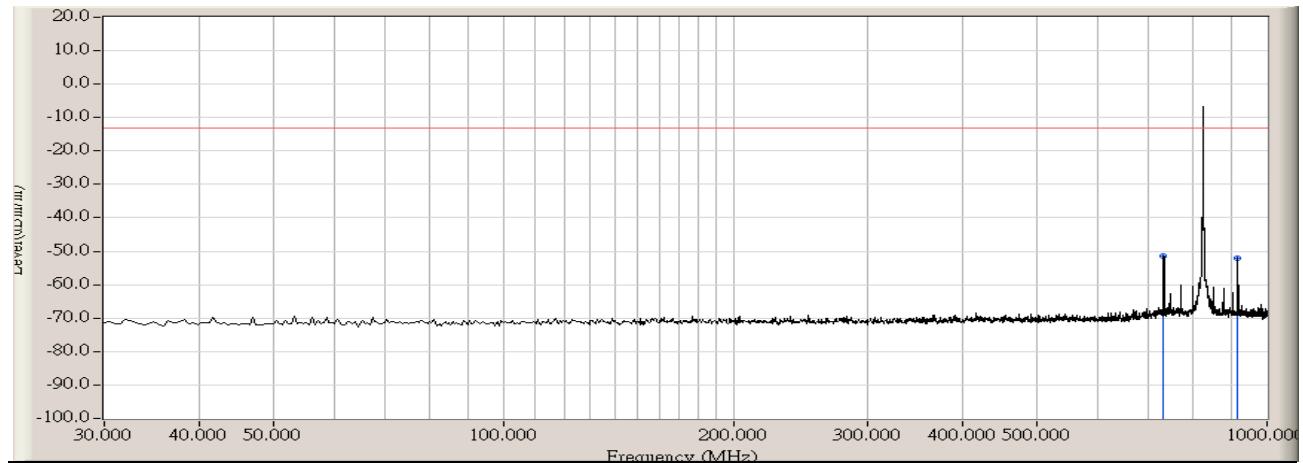


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	732.146	0.000	-51.578	-51.578	-38.578	-13.000	PEAK
2	915.568	0.000	-52.158	-52.158	-39.158	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:04
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 189

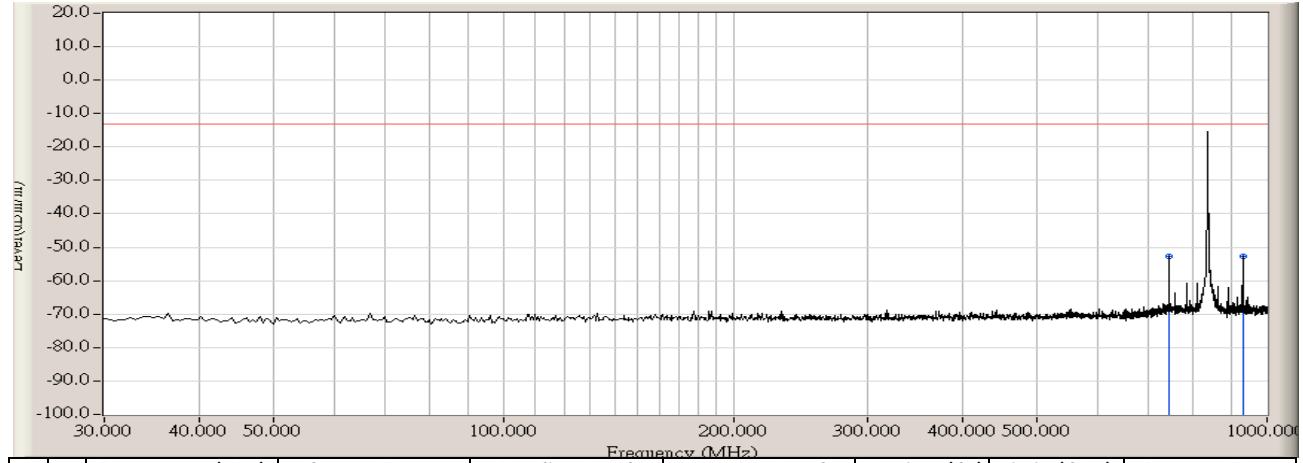


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	743.792	0.000	-52.658	-52.658	-39.658	-13.000	PEAK
2	929.640	0.000	-52.849	-52.849	-39.849	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:04
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 251

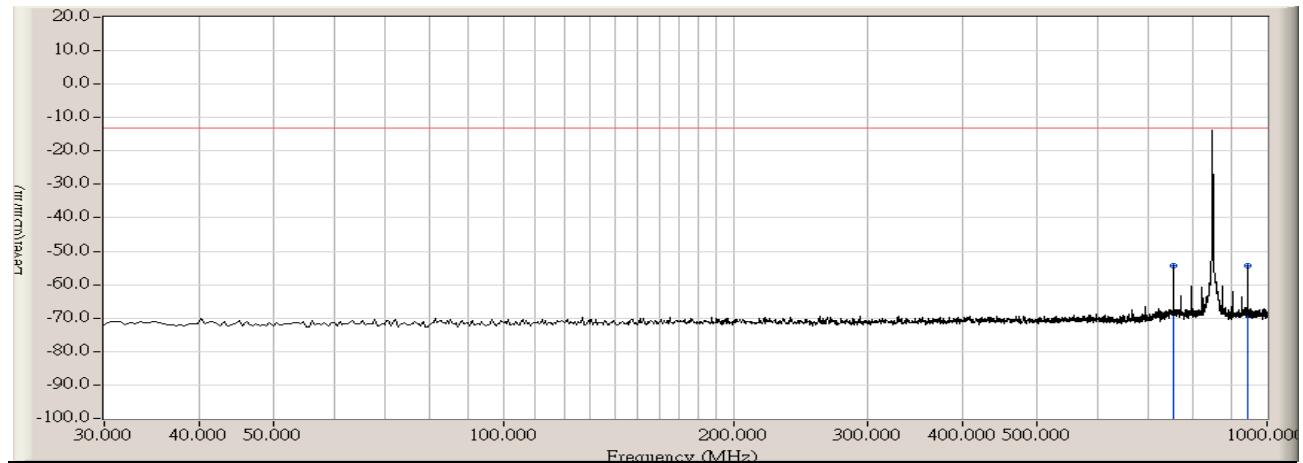


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	754.952	0.000	-54.249	-54.249	-41.249	-13.000	PEAK
2	942.741	0.000	-54.457	-54.457	-41.457	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:25
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 128

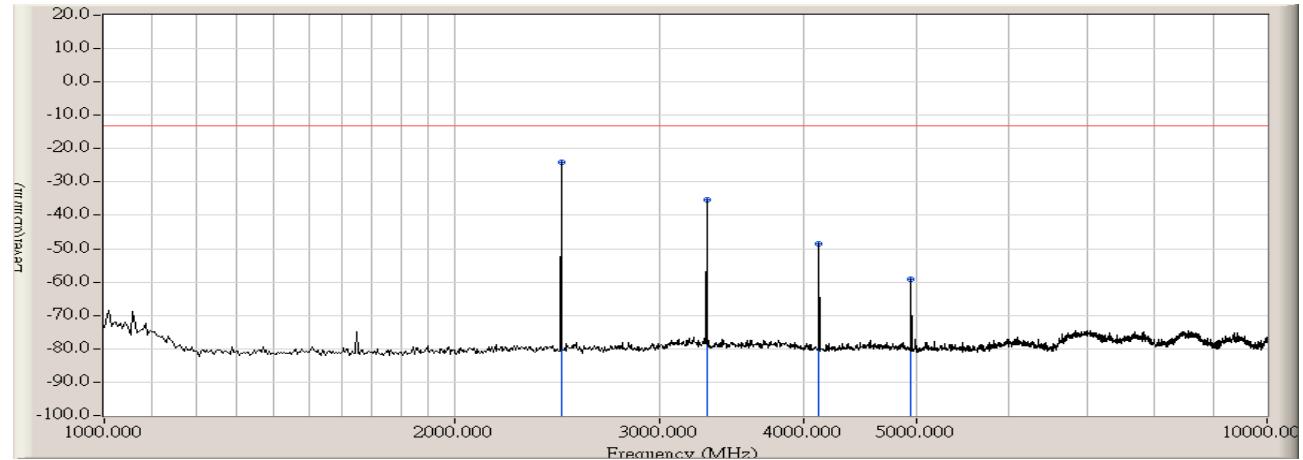


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	2472.236	0.000	-24.197	-24.197	-11.197	-13.000	PEAK
2	3296.148	0.000	-35.256	-35.256	-22.256	-13.000	PEAK
3	4120.060	0.000	-48.495	-48.495	-35.495	-13.000	PEAK
4	4943.972	0.000	-59.276	-59.276	-46.276	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:26
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 189

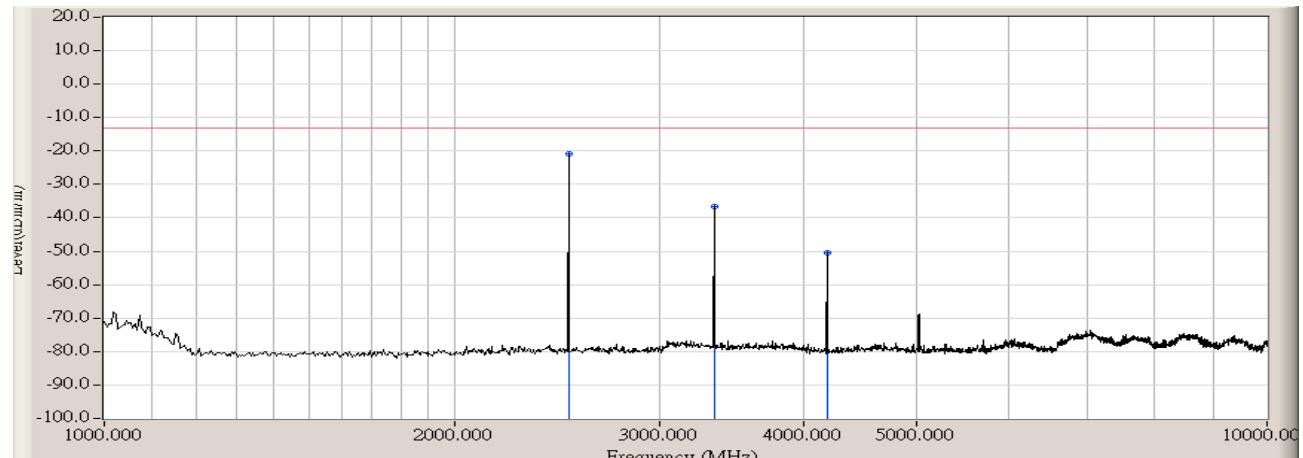


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	2508.254	0.000	-20.882	-20.882	-7.882	-13.000	PEAK
2	3345.673	0.000	-36.762	-36.762	-23.762	-13.000	PEAK
3	4183.091	0.000	-50.368	-50.368	-37.368	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:27
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : GSM850 Channel 251

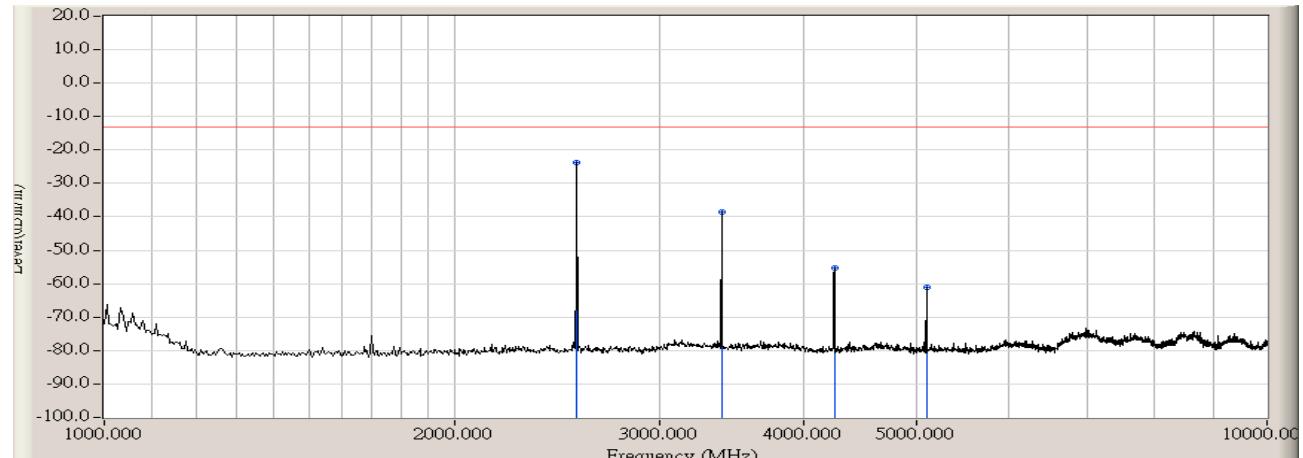


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	2548.774	0.000	-23.703	-23.703	-10.703	-13.000	PEAK
2	3395.198	0.000	-38.711	-38.711	-25.711	-13.000	PEAK
3	4246.123	0.000	-55.136	-55.136	-42.136	-13.000	PEAK
4	5092.546	0.000	-61.004	-61.004	-48.004	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:07
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 512

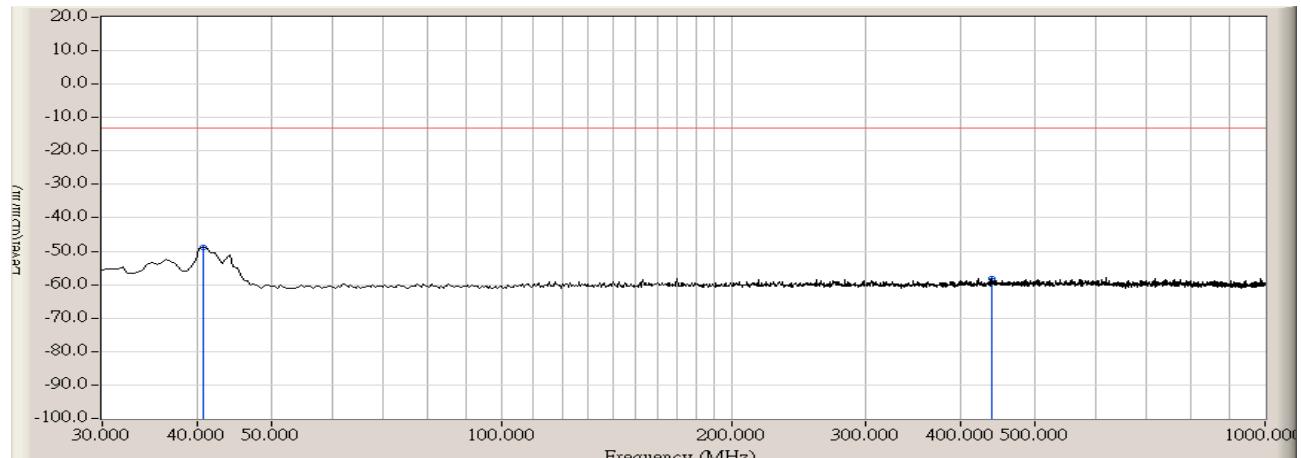


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	40.675	0.000	-48.713	-48.713	-35.713	-13.000	PEAK
2	439.060	0.000	-58.094	-58.094	-45.094	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:08
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 661

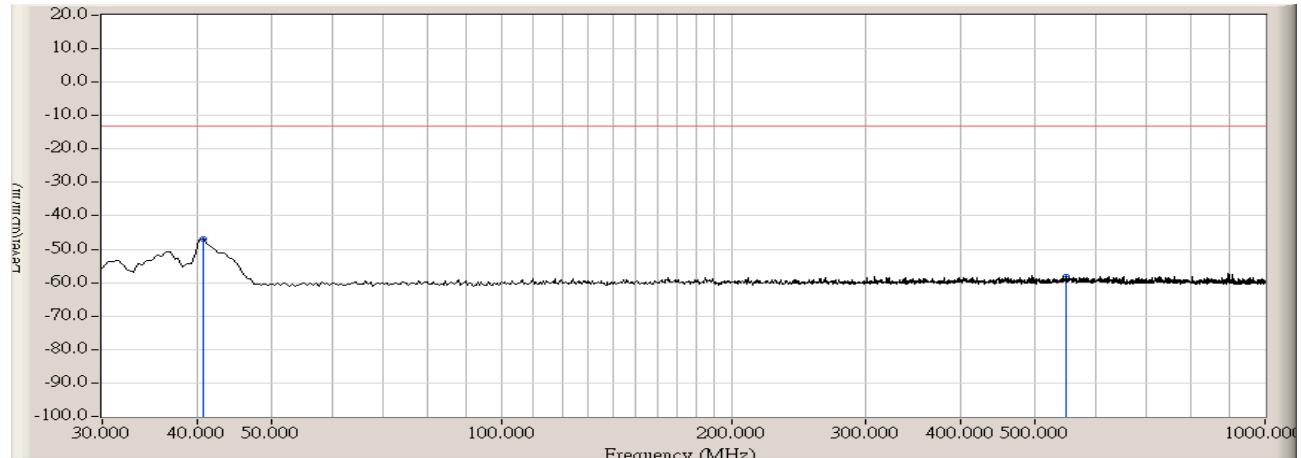


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	40.675	0.000	-46.816	-46.816	-33.816	-13.000	PEAK
2	548.724	0.000	-58.207	-58.207	-45.207	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:08
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 810

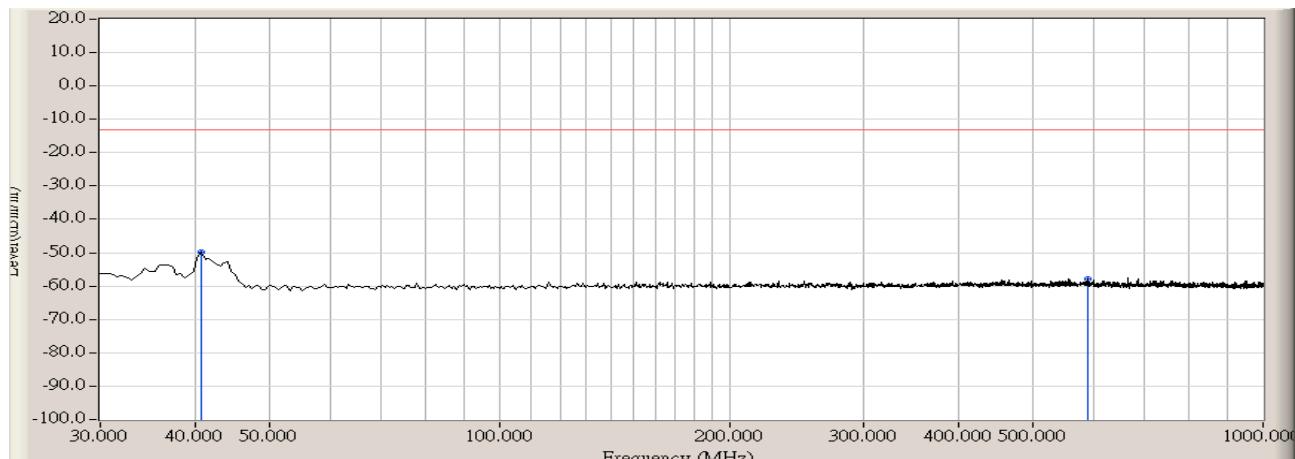


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	40.675	0.000	-49.711	-49.711	-36.711	-13.000	PEAK
2	588.514	0.000	-57.736	-57.736	-44.736	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:20
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 512

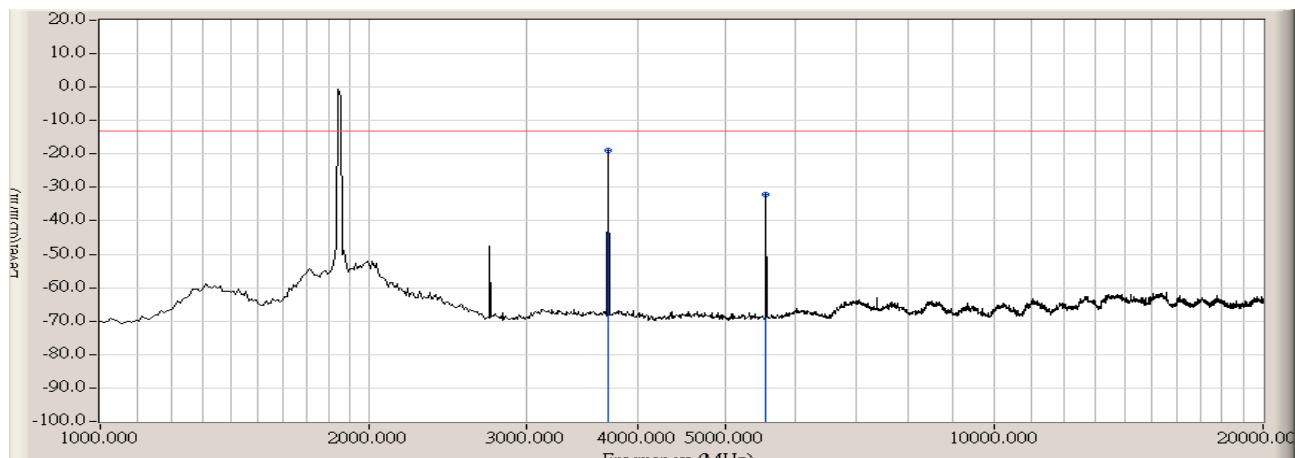


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type
1 *	3699.350	0.000	-18.939	-18.939	-5.939	-13.000	PEAK
2	5552.776	0.000	-32.076	-32.076	-19.076	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:21
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 661 GPRS

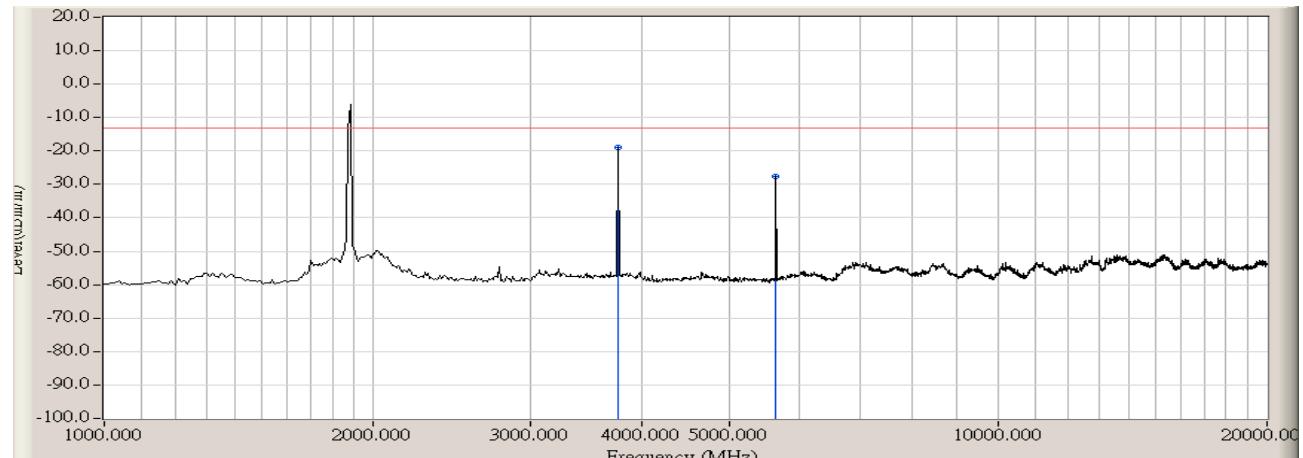

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type	
1	*	3756.378	0.000	-18.785	-18.785	-5.785	-13.000	PEAK
2		5638.319	0.000	-27.464	-27.464	-14.464	-13.000	PEAK

Engineer : John	Time : 2010/09/22 - 19:21
Site : Shielding Room	
Limit : FCC_22&24_Spurious_03M_PK	Margin : 0
EUT : WT8000	Probe : - Line1
Power : DC 3.7V	Note : PCS1900 Channel 810 GPRS

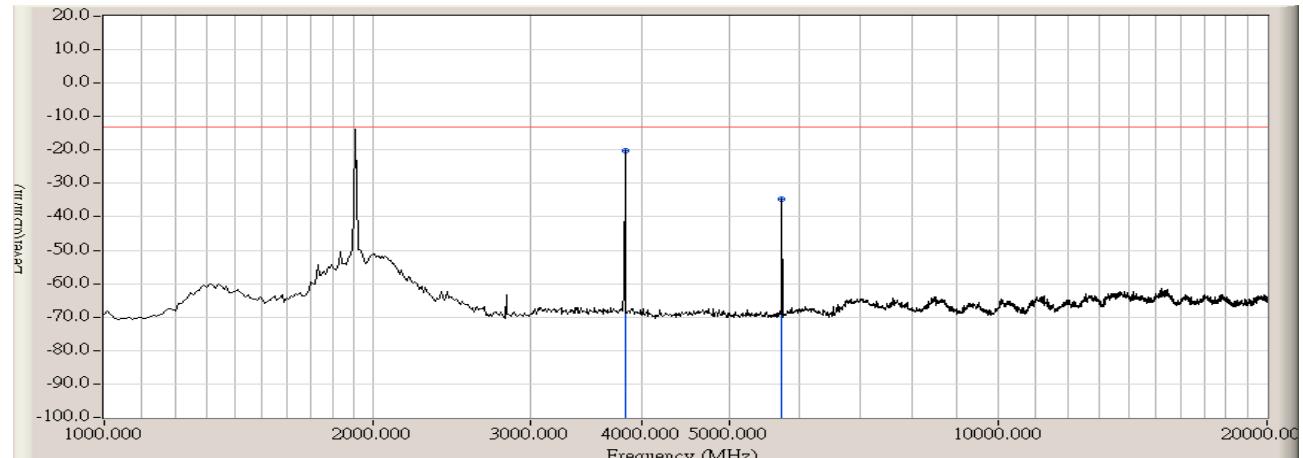

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm)	Margin (dB)	Limit (dBm)	Detector Type	
1	*	3822.911	0.000	-20.186	-20.186	-7.186	-13.000	PEAK
2		5733.367	0.000	-34.701	-34.701	-21.701	-13.000	PEAK

Product	Mobile Phone							
Test Item	Radiated Spurious Emission							
Test Mode	Mode 1: GSM 850							
Date of Test	2010/09/22				Test Site	AC-2		


Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 128 (824.20MHz)</b>								
1645.00	-31.32	V	-40.15	3.28	9.75	-33.68	-13.00	-20.68
2470.00	-44.24	V	-56.06	4.10	10.48	-49.68	-13.00	-36.68
1645.00	-41.25	H	-36.64	3.28	9.75	-30.17	-13.00	-17.17
2470.00	-38.26	H	-53.40	4.10	10.48	-47.02	-13.00	-34.02
<b>Middle Channel 189 (836.40MHz)</b>								
1675.00	-32.03	V	-43.82	3.32	9.95	-37.19	-13.00	-24.19
2515.00	-48.27	V	-57.85	3.81	10.62	-51.04	-13.00	-38.04
1675.00	-40.42	H	-44.00	3.32	9.95	-37.37	-13.00	-24.37
2515.00	-49.54	H	-54.84	3.81	10.62	-48.03	-13.00	-35.03
<b>High Channel 251 (848.80MHz)</b>								
1690.00	-32.92	V	-43.82	3.35	10.06	-37.11	-13.00	-24.11
2545.00	-48.65	V	-58.65	4.19	10.68	-52.16	-13.00	-39.16
1705.00	-34.31	H	-42.50	3.35	10.06	-35.79	-13.00	-22.79
2545.00	-46.12	H	-55.81	4.19	10.68	-49.32	-13.00	-36.32

Product	Mobile Phone							
Test Item	Radiated Spurious Emission							
Test Mode	Mode 2: PCS 1900							
Date of Test	2010/09/22				Test Site	AC-2		

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 512 (1850.20MHz)</b>								
3698.40	-41.87	V	-43.68	4.78	12.69	-35.77	-13.00	-22.77
5550.60	-48.16	V	-46.54	6.03	13.15	-39.42	-13.00	-26.42
3698.40	-43.28	H	-46.83	4.78	12.69	-38.92	-13.00	-25.92
5550.60	-47.22	H	-43.93	6.03	13.15	-36.81	-13.00	-23.81
<b>Middle Channel 661 (1880.00MHz)</b>								
3759.00	-44.86	V	-46.43	5.03	12.72	-38.74	-13.00	-25.74
5640.00	-46.53	V	-45.10	5.93	13.14	-37.89	-13.00	-24.89
3759.00	-37.76	H	-44.57	5.03	12.72	-36.88	-13.00	-23.88
5640.00	-39.14	H	-44.07	5.93	13.14	-36.86	-13.00	-23.86
<b>High Channel 810 (1909.80MHz)</b>								
3819.60	-43.61	V	-46.12	5.03	12.73	-38.42	-13.00	-25.42
5729.40	-49.12	V	-47.61	6.20	13.11	-40.70	-13.00	-27.70
3819.60	-42.86	H	-46.78	5.03	12.73	-39.08	-13.00	-26.08
5729.40	-47.62	H	-46.07	6.20	13.11	-39.16	-13.00	-26.16

## 4.6. Frequency Stability under Temperature & Voltage Variations

### TEST CONFIGURATION

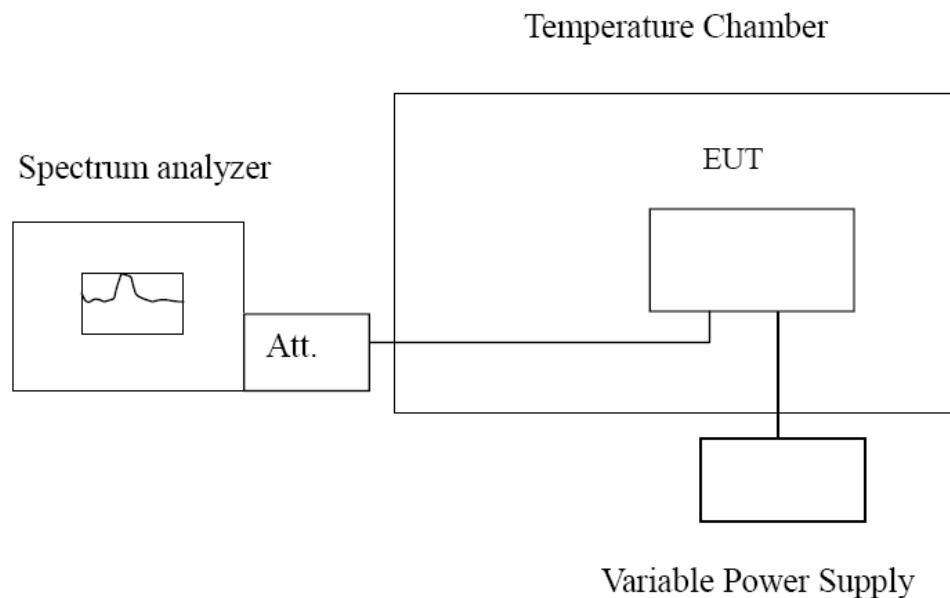

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

#### **Frequency Stability Under Temperature Variations:**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### LIMIT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit  $< \pm 2.5$  ppm

**TEST RESULTS**

Product	Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 1: GSM 850		
Date of Test	2010/09/22	Test Site	Shielding Room

**Frequency Stability Under Temperature**

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.40	-15	± 2091
-20	836.40	20	± 2091
-10	836.40	13	± 2091
0	836.40	-12	± 2091
10	836.40	15	± 2091
20	836.40	-11	± 2091
30	836.40	15	± 2091
40	836.40	-14	± 2091
50	836.40	9	± 2091

**Frequency Stability Under Voltage**

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (KHz)
3.14	836.40	-21	± 2091
3.70	836.40	16	± 2091
4.25	836.40	-14	± 2091

Product	Mobile Phone		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 2: PCS 1900		
Date of Test	2010/09/22	Test Site	Shielding Room

#### Frequency Stability Under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880.0	-25	± 4700
-20	1880.0	-15	± 4700
-10	1880.0	8	± 4700
0	1880.0	21	± 4700
10	1880.0	15	± 4700
20	1880.0	-10	± 4700
30	1880.0	19	± 4700
40	1880.0	-24	± 4700
50	1880.0	16	± 4700


#### Frequency Stability Under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
3.14	1880.0	24	± 4700
3.70	1880.0	-16	± 4700
4.25	1880.0	13	± 4700

**Note:**

1. Normal Voltage: 3.7V
2. Battery End Point(BEP) = 3.5V

## 5. Test Setup Photos of the EUT

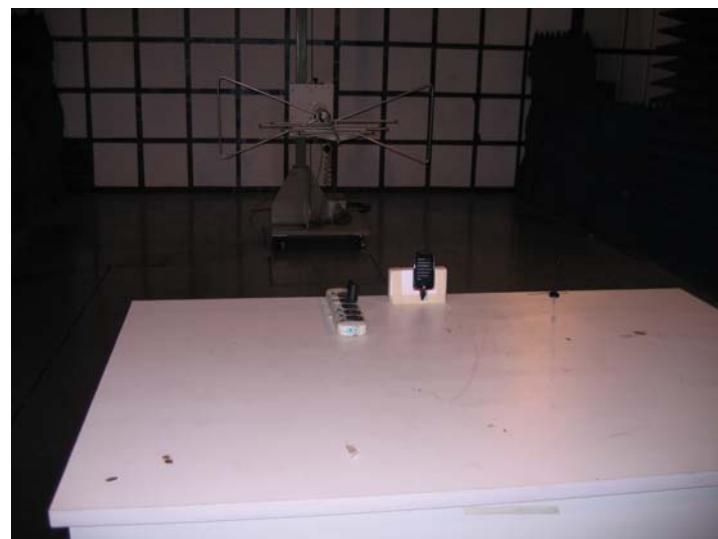



## 6. External and Internal Photos of the EUT

### External Photos



Internal Photos

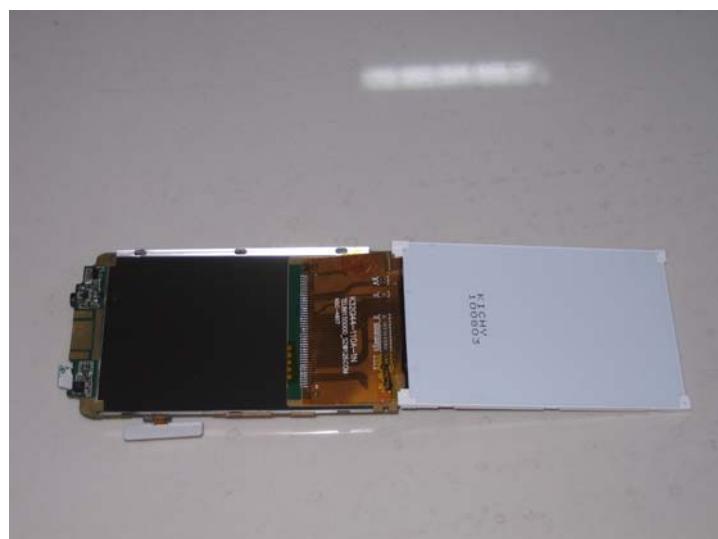

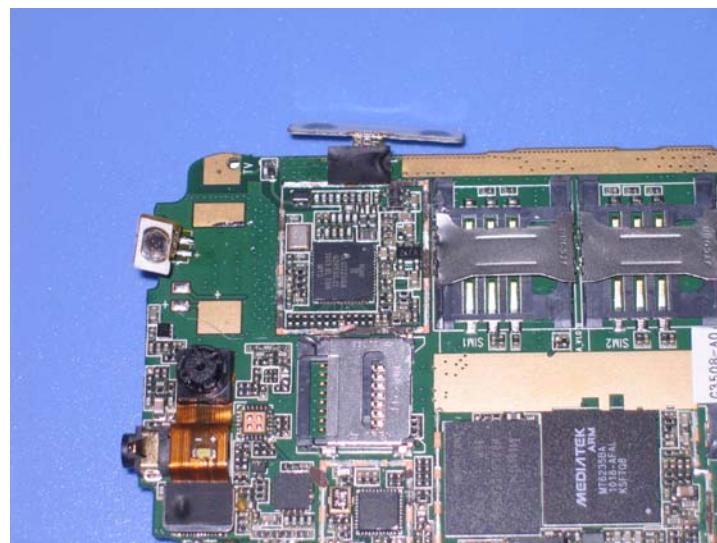

.....End of Report.....