

# **FCC Radio Test Report FCC ID: YOPGS2100MIE**

This report concerns (check one): ☐ Original Grant ☐ Class II Change

Project No. : 1412211 Equipment : Wifi Module Model Name : GS21∪∪IVIIL

\* Gainspan Corporation.

\* Gainspan Corporation.

\* Gainspan Corporation.

: 3590 N. First Street Suite 300 San Jose California

United States 95134.

Date of Receipt : Jan.21, 2015

**Date of Test** : Jan.21, 2015~Feb.05, 2015

Issued Date : Feb.06, 2015 Tested by : BTL Inc.

**Testing Engineer** 

(Josh Lin)

**Technical Manager** 

**Authorized Signatory** 

BTL INC

B1, No.37, Lane 365, Yang Guang St., Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Report No.: BTL-FCCP-1-1412211 Page 1 of 102



#### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

#### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-1-1412211 Page 2 of 102



Table of Contents P	age
1. CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 4.1.2 TEST PROCEDURE	13 13
4.1.2 TEST PROCEDURE  4.1.3 DEVIATION FROM TEST STANDARD	13 13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS 4.1.7 TEST RESULTS	14 14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD 4.2.4 TEST SETUP	16 16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ) 4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18 18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS 5.1.5 EUT TEST CONDITIONS	19 19
5.1.6 TEST RESULTS	19

Report No.: BTL-FCCP-1-1412211 Page 3 of 102



Table of Contents	Page
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD	20 20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP	21 21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT TEST CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD	22 22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
ATTACHMENT A - CONDUCTED EMISSION	29
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	37
ATTACHMENT E - BANDWIDTH	74
ATTACHMENT F - MAXIMUM PEAK CONDUCTED OUTPUT POWER	81
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	83
ATTACHMENT H - POWER SPECTRAL DENSITY	96

Report No.: BTL-FCCP-1-1412211 Page 4 of 102



# **REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
R1404031-247	Original Report.	Jun.17, 2014
BTL-FCCP-1-1412211	Compared with the previous report (R1404031-247), Added a new PCB antenna, the gain value (3.56 dBi) is higher than the original PCB antenna (1 dBi). All tests are performed and test results are recorded in this report.	Feb.06, 2015

Report No.: BTL-FCCP-1-1412211 Page 5 of 102



#### 1. CERTIFICATION

Equipment : Wifi Module Brand Name : XYZprinting Model Name : GS2100MIE

Applicant : Gainspan Corporation.

Manufacturer: Cal-Comp Electronics (Thailand) Public Company Limited

Address : 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140,

Thailand.

Factory : Cal-Comp Electronics (Thailand) Public Company Limited

Address : 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140,

Thailand.

Date of Test : Jan.21, 2015~Feb.05, 2015 Test Sample : ENGINEERING SAMPLE

Standard(s): FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1412211) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-1-1412211 Page 6 of 102



## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247), Subpart C: 2013				
Standard(s) Section FCC	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247(d)	Antenna conducted Spurious Emission	PASS		
15.247(a)(2)	6dB Bandwidth	PASS		
15.247(b)(3)	Peak Output Power	PASS		
15.247(e)	Power Spectral Density	PASS		
15.203	Antenna Requirement	PASS		
15.209/15.205	Transmitter Radiated Emissions	PASS		

# NOTE:

- (1)" N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

Report No.: BTL-FCCP-1-1412211 Page 7 of 102



#### 2.1TEST FACILITY

The test facilities used to collect the test data in this report:

#### **Conducted emission Test:**

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

## Radiated emission Test (Below 1 GHz):

**CB08:** (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428A-1)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

#### Radiated emission Test (Above 1 GHz):

**CB08:** (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428A-1)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

#### 2.2MEASUREMENT UNCERTAINTY

#### The measurement uncertainty is not specified by Canada Industry for reference only.

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

#### A. Conducted emission test:

Test Site	Measurement Frequency Range	U,(dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

#### B. Radiated emission test:

Test Site	Item	Measurement Frequency Range		Uncertainty	NOTE										
					30 - 200MHz	3.35 dB									
		Horizontal	200 - 1000MHz	3.11 dB											
	Dadiated	Polarization	1 - 18GHz	3.97 dB											
CB08	Radiated emission at 3m	emission at	emission at	emission at	emission at	emission at	emission at	emission at	emission at	emission at	emission at		18 - 40GHz	4.01 dB	
CBUO														30 - 200MHz	3.22 dB
		Vertical	200 - 1000MHz	3.24 dB											
				Polarization	1 - 18GHz	4.05 dB									
			18 - 40GHz	4.04 dB											

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U<sub>CISPR</sub>, as follows:

Conducted Disturbance (mains port) - 150 kHz - 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .

If  $U_{lab}$  is less than or equal to  $U_{CISPR}$ , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{CISPR}$ , then:

- compliance is deemed to occur if no measured disturbance level, increased by (U<sub>lab</sub> U<sub>CISPR</sub>), exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} U_{CISPR})$ , exceeds the disturbance limit.



## 3. GENERAL INFORMATION

## 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wifi Module			
Brand Name	XYZprinting	XYZprinting		
Model Name	GS2100MIE			
Model Difference	N/A			
	Operation Frequency	2412~2462 MHz		
Product Description	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM		
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 72.2 Mbps		
	Output Power (Max.)	802.11b: 14.94dBm 802.11g: 19.48dBm 802.11n(20MHz): 19.45dBm		
Power Source	System supplied.			
Power Rating	DC 3.3V/355mA			

## Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2. Channel List:

	CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz)						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

## 3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna	Connector	Gain	Note
	Dianu	Type		Connector	(dBi)	NOLE
1	WIESON	GY196HT0131C-002	PCB	U.F.L	3.56	TX/RX

Report No.: BTL-FCCP-1-1412211 Page 9 of 102



#### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test		
Final Test Mode	Description	
Mode 4	TX MODE	

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

#### Note

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)

802.11g mode: OFDM (6Mbps)

802.11n HT20 mode: BPSK (6.5Mbps)

For radiated emission tests, the highest output powers were set for final test.

- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Report No.: BTL-FCCP-1-1412211 Page 10 of 102



## 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	teraterm-4.84		
Frequency (MHz)	2412 2437 2462		
802.11b	18	18	18
802.11g	27	27	27
802.11n (20MHz)	27	27	27

Report No.: BTL-FCCP-1-1412211 Page 11 of 102



## 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

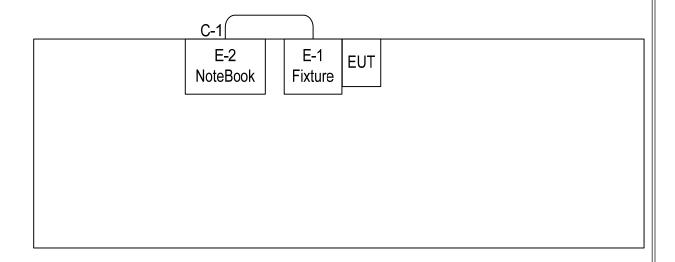

## 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Notebook PC	DELL	PP18L	DOC	PF329 A01	
E-2	Fixture	N/A	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	YES	1M	USB Cable

Report No.: BTL-FCCP-1-1412211 Page 12 of 102



#### 4. EMC EMISSION TEST

#### 4.1 CONDUCTED EMISSION MEASUREMENT

## 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frague pay of Emission (MIII)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

#### Note

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use) Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item –EUT Test Photos.


#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: BTL-FCCP-1-1412211 Page 13 of 102



#### 4.1.4 TEST SETUP

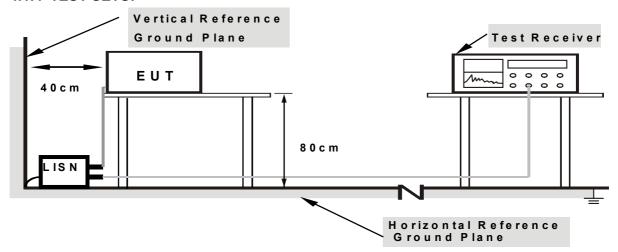

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## **4.1.6 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

## 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Report No.: BTL-FCCP-1-1412211 Page 14 of 102



#### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)		
	PEAK	AVERAGE	
Above 1000	74	54	

## Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RBW / VBW	RBW 1MHz VBW 3MHz peak detector for Pk value	
(Emission in restricted band)	band) RMS detector for AV value	

Report No.: BTL-FCCP-1-1412211 Page 15 of 102



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### **4.2.2 TEST PROCEDURE**


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 4.2.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

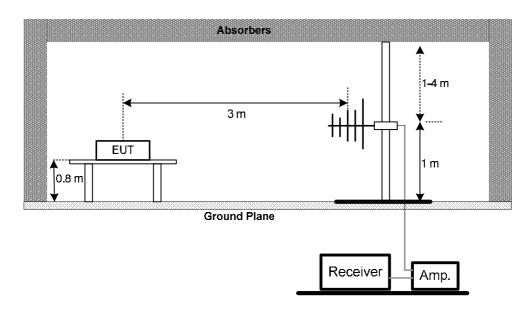


Report No.: BTL-FCCP-1-1412211 Page 16 of 102



## (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

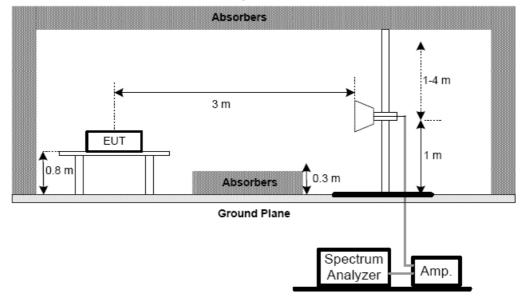

## (C) For radiated emissions below 30MHz

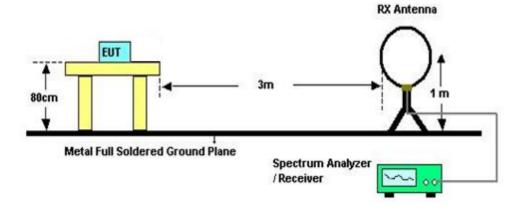

## **4.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

## **4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

Report No.: BTL-FCCP-1-1412211 Page 17 of 102



## 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

#### Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

## 4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

#### Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FCCP-1-1412211 Page 18 of 102



## **5. BANDWIDTH TEST**

#### **5.1 APPLIED PROCEDURES**

FCC Part15 (15.247) , Subpart C			
Section Test Item Frequency Range (MHz) Result			
15.247(a)(2) Bandwidth 2400-2483.5 PAS			

#### **5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### **5.1.2 DEVIATION FROM STANDARD**

No deviation.

#### **5.1.3 TEST SETUP**

EUT	SPECTRUM
	ANALYZER

## **5.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

## **5.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

## **5.1.6 TEST RESULTS**

Please refer to the Attachment E.

Report No.: BTL-FCCP-1-1412211 Page 19 of 102



#### 6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

#### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section Test Item Limit			Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

#### **6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

EUT	Power Meter
	1 ower weter

## **6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

Report No.: BTL-FCCP-1-1412211 Page 20 of 102



#### 7. ANTENNA CONDUCTED SPURIOUS EMISSION

#### 7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### **7.1.3 TEST SETUP**

EUT	SPECTRUM
	ANALYZER

#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

Report No.: BTL-FCCP-1-1412211 Page 21 of 102



## 8. POWER SPECTRAL DENSITY TEST

## 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C						
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS		

## **8.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

## 8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

## **8.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

## **8.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

## 8.1.6 TEST RESULTS

Please refer to the Attachment H.

Report No.: BTL-FCCP-1-1412211 Page 22 of 102



# 9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until				
1	LISN	R&S	ENV216	100087	Dec. 7, 2015				
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 15, 2015				
3	EMI Test Receiver	R&S	ESCI	100082	Apr. 13, 2015				
4	Measurement Software	EZ	EZ_EMC (Version NB-02A)	N/A	N/A				

	Radiated Emission Measurement							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until			
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015			
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Jun. 12, 2016			
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015			
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 12, 2015			
5	Microflex Cable	EMC	S104-SMA	8m	May. 12, 2015			
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 12, 2015			
7	Test Cable	LMR	LMR-400	12m	May. 13, 2015			
8	Test Cable	LMR	LMR-400	3m	May. 13, 2015			
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 17, 2015			
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	July. 10, 2015			

Report No.: BTL-FCCP-1-1412211 Page 23 of 102



	6dB Bandwidth Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015		

	Peak Output Power Measurement						
Item	Kind of Equipment	Serial No.	Calibrated until				
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015		

	Antenna Conducted Spurious Emission Measurement							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No. Calibrated un				
1	1 Spectrum Analyzer R&S FSP30 100854 Oct. 26, 2015							

	Power Spectral Density Measurement						
Iter	m Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
	1 Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015		


Remark: "N/A" denotes no model name, serial no. or calibration specified. All calibration period of equipment list is one year.

Report No.: BTL-FCCP-1-1412211 Page 24 of 102



# **10. EUT TEST PHOTO**

## **Conducted Measurement Photos**

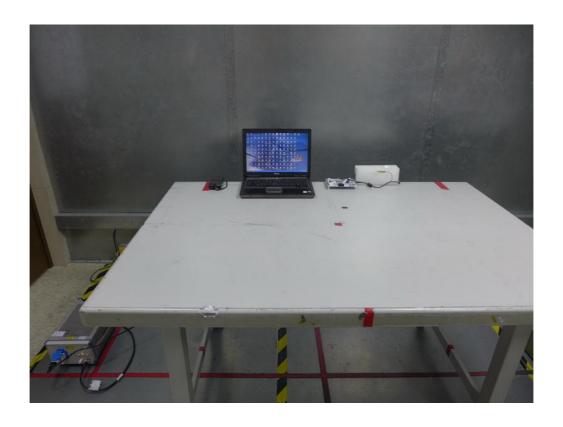




Report No.: BTL-FCCP-1-1412211 Page 25 of 102



# **Radiated Measurement Photos**

# 9KHz to 30MHz



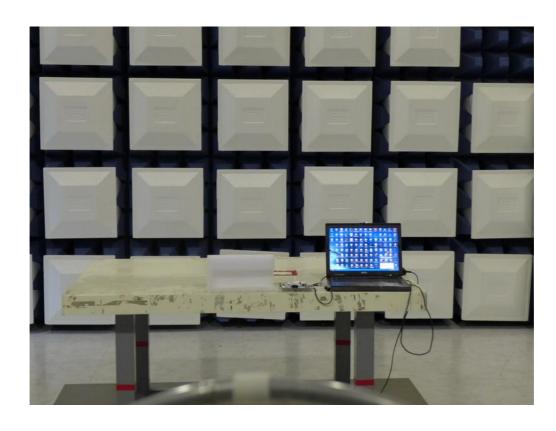



Report No.: BTL-FCCP-1-1412211 Page 26 of 102



# **Radiated Measurement Photos**

# 30MHz to 1000MHz

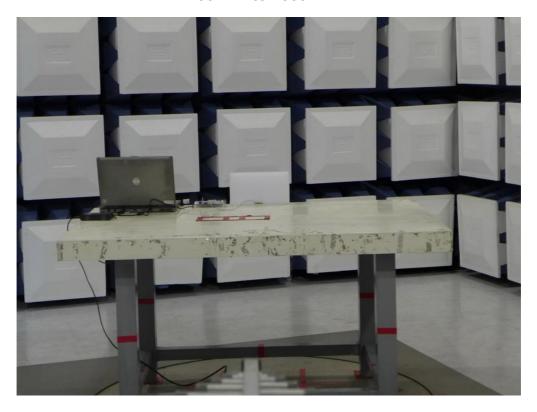

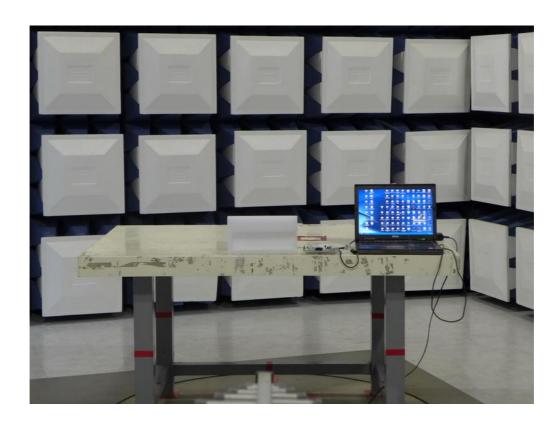



Report No.: BTL-FCCP-1-1412211 Page 27 of 102



# **Radiated Measurement Photos**

# Above 1000MHz

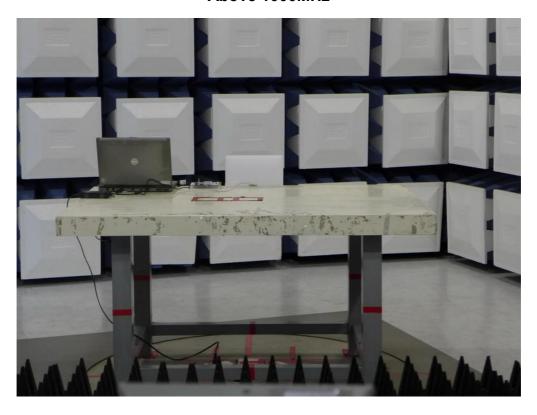

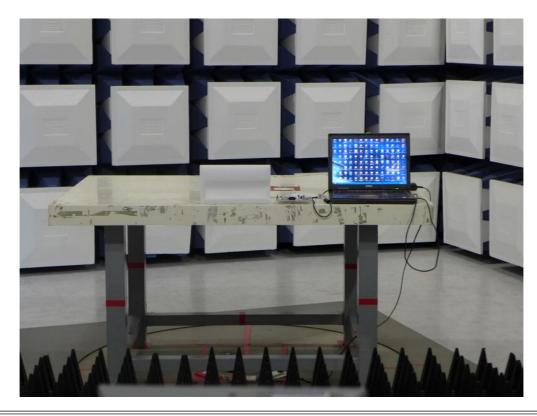


Report No.: BTL-FCCP-1-1412211 Page 28 of 102



ATTACHMENT A - CONDUCTED EMISSION

Report No.: BTL-FCCP-1-1412211 Page 29 of 102




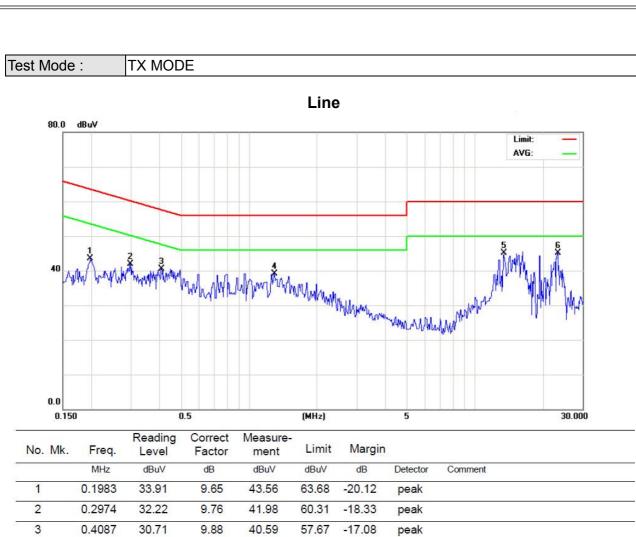

No. Mk	. Freq.	Level	Factor	ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1983	33.91	9.65	43.56	63.68	-20.12	peak	
2	0.2974	32.22	9.76	41.98	60.31	-18.33	peak	
3	0.4087	30.71	9.88	40.59	57.67	-17.08	peak	
4	1.2919	29.33	9.72	39.05	56.00	-16.95	peak	
5	13.4000	34.96	10.11	45.07	60.00	-14.93	peak	
6 *	23.1498	34.67	10.46	45.13	60.00	-14.87	peak	
							10957	

Report No.: BTL-FCCP-1-1412211 Page 30 of 102



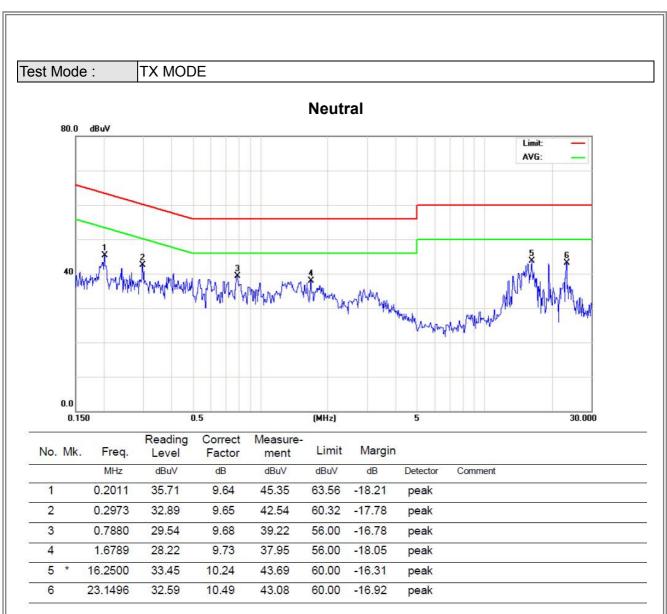

Report No.: BTL-FCCP-1-1412211 Page 31 of 102



ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Report No.: BTL-FCCP-1-1412211 Page 32 of 102



Test Mode: TX Mode 2412MHz

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	0°/90°	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOLE
0.0102	0°	42.66	19.11	61.77	107.43	-45.66	AVG
0.0102	0°	51.74	19.11	70.85	127.43	-56.58	PK
0.0241	0°	41.68	16.14	57.82	99.96	-42.14	AVG
0.0241	0°	51.26	16.14	67.40	119.96	-52.56	PK
0.0346	0°	44.31	14.49	58.80	96.82	-38.03	AVG
0.0346	0°	52.53	14.49	67.02	116.82	-49.81	PK
0.2820	0°	39.48	11.21	50.69	78.60	-27.91	AVG
0.2820	0°	50.42	11.21	61.63	98.60	-36.97	PK
0.5330	0°	34.77	11.23	46.00	73.07	-27.07	QP
1.1890	0°	31.69	11.48	43.17	66.10	-22.93	QP

Freq. Ant. Reading		Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note	
(MHz) 0°/90° (dE		(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOIC	
0.0098	90°	43.55	19.30	62.85	107.78	-44.93	AVG	
0.0098	90°	51.87	19.30	71.17	127.78	-56.61	PK	
0.0245	90°	41.28	16.05	57.33	99.82	-42.49	AVG	
0.0245	90°	52.69	16.05	68.74	119.82	-51.08	PK	
0.0339	90°	44.51	14.55	59.06	97.00	-37.94	AVG	
0.0339	90°	53.61	14.55	68.16	117.00	-48.84	PK	
0.2810	90°	39.56	11.22	50.78	78.63	-27.85	AVG	
0.2810	90°	50.66	11.22	61.88	98.63	-36.75	PK	
0.5310	90°	34.51	11.23	45.74	73.10	-27.36	QP	
1.1880	90°	30.77	11.48	42.25	66.11	-23.86	QP	


Report No.: BTL-FCCP-1-1412211 Page 33 of 102




ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ

Report No.: BTL-FCCP-1-1412211 Page 34 of 102





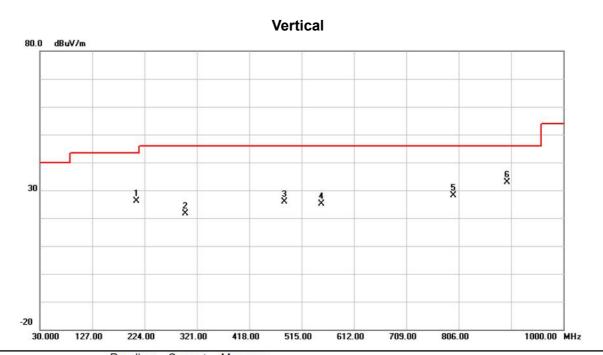


No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	_
1		209.4500	42.64	-16.57	26.07	43.50	-17.43	peak		
2		299.1750	35.18	-13.51	21.67	46.00	-24.33	peak		
3		483.4750	35.36	-9.42	25.94	46.00	-20.06	peak		
4		551.3750	33.17	-7.97	25.20	46.00	-20.80	peak		
5		796.3000	32.80	-4.75	28.05	46.00	-17.95	peak		
6	*	895.7250	35.86	-2.91	32.95	46.00	-13.05	peak		

Report No.: BTL-FCCP-1-1412211 Page 35 of 102





## Horizontal

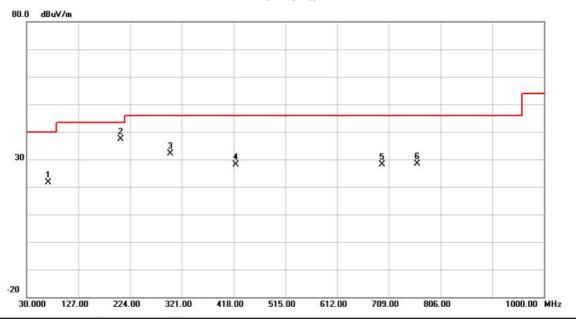

No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		71.2250	38.08	-16.48	21.60	40.00	-18.40	peak	
2	*	207.0250	53.92	-16.61	37.31	43.50	-6.19	peak	
3		299.1750	45.55	-13.51	32.04	46.00	-13.96	peak	
4		422.8500	38.51	-10.44	28.07	46.00	-17.93	peak	
5		696.8750	33.53	-5.51	28.02	46.00	-17.98	peak	
6		762.3500	33.33	-4.94	28.39	46.00	-17.61	peak	

Report No.: BTL-FCCP-1-1412211 Page 36 of 102




ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-1-1412211 Page 37 of 102



## Vertical

120.0 dBuV/m

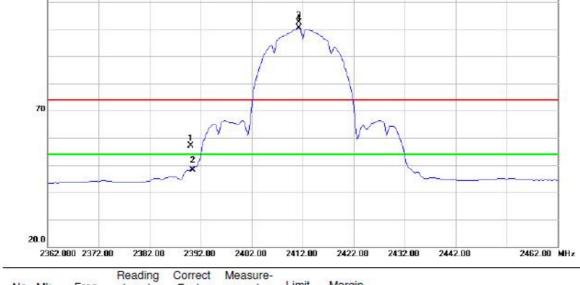

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	26.04	31.02	57.06	74.00	-16.94	peak	11.554.11.5564	
2		2390.000	17.07	31.02	48.09	54.00	-5.91	AVG		
3	X	2411.250	71.16	31.12	102.28	74.00	28.28	peak	NO LIMIT	
4	*	2411.250	69.18	31.12	100.30	54.00	46.30	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 38 of 102



#### Vertical



No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4823.980	45.86	6.78	52.64	74.00	-21.36	peak	100 0000 11000 00000	
2		4823.980	38.53	6.78	45.31	54.00	-8.69	AVG		
3		7233.825	42.85	15.16	58.01	74.00	-15.99	peak		
4	*	7233.825	31.05	15.16	46.21	54.00	-7.79	AVG		


Report No.: BTL-FCCP-1-1412211 Page 39 of 102



Orthogonal Axis: X

Test Mode : TX B MODE 2412MHz

#### Horizontal

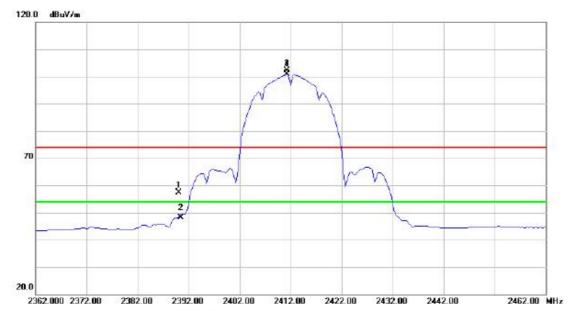


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	26.44	31.02	57.46	74.00	-16.54	peak		
2		2390.000	17.12	31.02	48.14	54.00	-5.86	AVG		
3	X	2411.250	71.10	31.12	102.22	74.00	28.22	peak	NO LIMIT	
4	*	2411.250	69.74	31.12	100.86	54.00	46.86	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 40 of 102



#### Horizontal

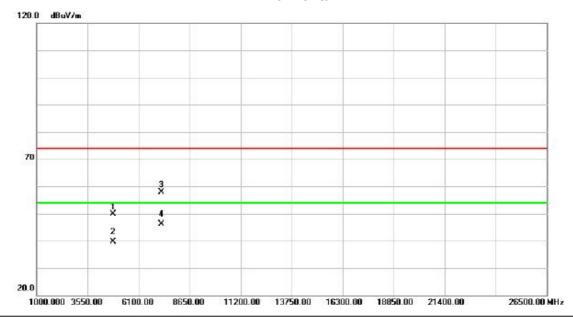

No.	Mk	. Freq.	Level	Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.813	43.18	6.78	49.96	74.00	-24.04	peak	
2		4824.813	32.77	6.78	39.55	54.00	-14.45	AVG	
3		7235.350	42.82	15.17	57.99	74.00	-16.01	peak	
4	*	7235.350	31.05	15.17	46.22	54.00	-7.78	AVG	

Report No.: BTL-FCCP-1-1412211 Page 41 of 102




# Vertical 120.0 dBuV/m 70 20.0 2387.000 2397.00 2407.00 2417.00 2427.00 2437.00 2447.00 2457.00 2467.00 2487.00 MHz

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	i			
		Mi	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2436.2	50	70.48	31.24	101.72	74.00	27.72	peak	NO LIMIT	
2	*	2436.2	50	68.56	31.24	99.80	54.00	45.80	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 42 of 102



#### Vertical

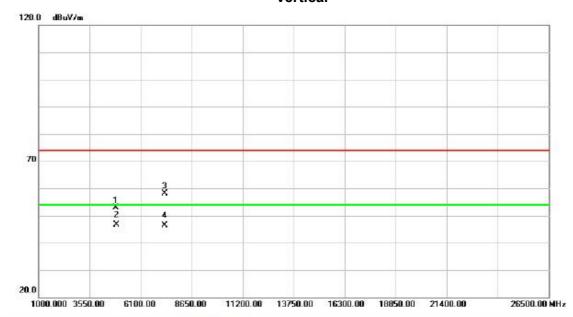

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4874.038	46.01	6.78	52.79	74.00	-21.21	peak		
2	*	4874.038	39.74	6.78	46.52	54.00	-7.48	AVG		
3		7310.100	42.47	15.57	58.04	74.00	-15.96	peak		
4		7310.100	30.76	15.57	46.33	54.00	-7.67	AVG		


Report No.: BTL-FCCP-1-1412211 Page 43 of 102



Orthogonal Axis: X

Test Mode: TX B MODE 2437MHz

#### Horizontal

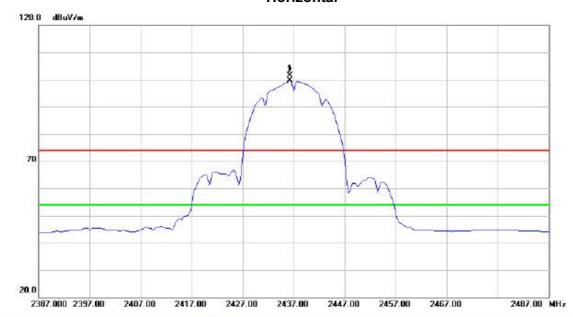


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2436.250	70.24	31.24	101.48	74.00	27.48	peak	NO LIMIT	
2	*	2436.250	68.29	31.24	99.53	54.00	45.53	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 44 of 102



#### Horizontal

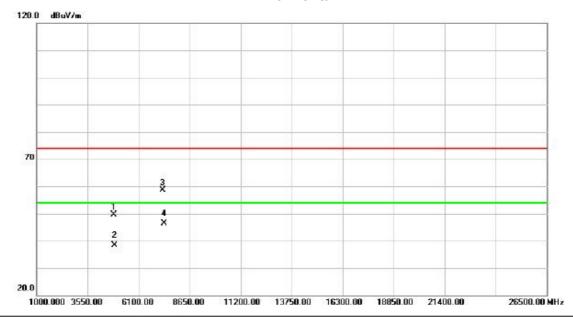

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4873.975	42.78	6.78	49.56	74.00	-24.44	peak		
2		4873.975	31.59	6.78	38.37	54.00	-15.63	AVG		
3		7311.387	43.05	15.58	58.63	74.00	-15.37	peak		
4	*	7311.387	30.75	15.58	46.33	54.00	-7.67	AVG		

Report No.: BTL-FCCP-1-1412211 Page 45 of 102



2512.00 MHz

Orthogonal Axis: X
Test Mode: TX B MODE 2462MHz

## Vertical 120.0 dBuV/m 70

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2461.250	69.45	31.36	100.81	74.00	26.81	peak	NO LIMIT	
2	٠	2461.250	67.50	31.36	98.86	54.00	44.86	AVG	NO LIMIT	
3		2483.500	25.81	31.46	57.27	74.00	-16.73	peak		
4		2483.500	15.50	31.46	46.96	54.00	-7.04	AVG		

2462.00

2472.00

2482.00

2492.00

2412.000 2422.00

2432.00


2442.00

2452.00

Report No.: BTL-FCCP-1-1412211 Page 46 of 102



#### Vertical

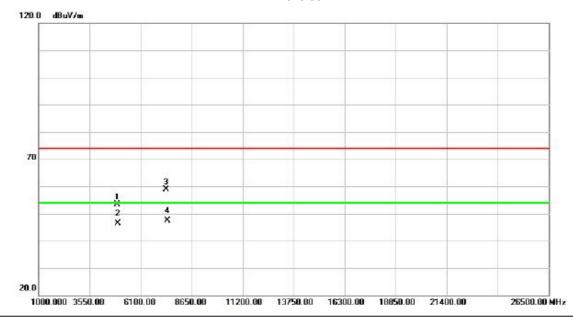

No.	Mk.	Freq.	Reading Level	Correct Factor		Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4923.925	46.56	6.77	53.33	74.00	-20.67	peak	14 - 0.01 - 1.00 - 0.00	
2		4923.925	39.73	6.77	46.50	54.00	-7.50	AVG		
3		7386.740	42.81	15.98	58.79	74.00	-15.21	peak		
4	*	7386.740	31.33	15.98	47.31	54.00	-6.69	AVG		


Report No.: BTL-FCCP-1-1412211 Page 47 of 102



Orthogonal Axis: X

Test Mode: TX B MODE 2462MHz

#### Horizontal

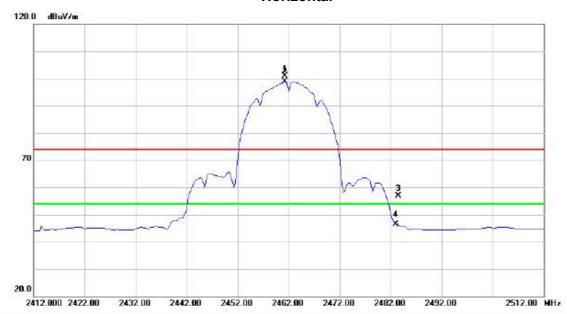


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2461.250	69.58	31.36	100.94	74.00	26.94	peak	NO LIMIT	
2	*	2461.250	67.63	31.36	98.99	54.00	44.99	AVG	NO LIMIT	
3		2483.500	25.35	31.46	56.81	74.00	-17.19	peak		
4		2483.500	14.83	31.46	46.29	54.00	-7.71	AVG		

Report No.: BTL-FCCP-1-1412211 Page 48 of 102



#### Horizontal

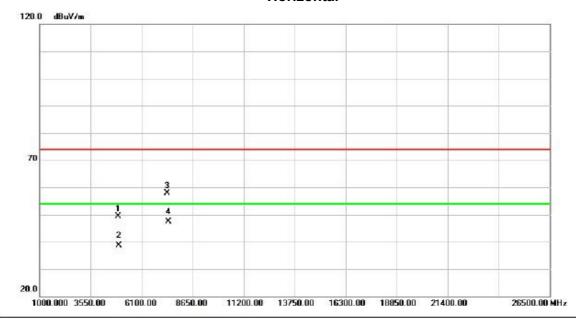


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4923.130	42.72	6.77	49.49	74.00	-24.51	peak		
2		4923.130	31.82	6.77	38.59	54.00	-15.41	AVG		
3		7389.400	41.93	16.00	57.93	74.00	-16.07	peak		
4	*	7389.400	31.48	16.00	47.48	54.00	-6.52	AVG		

Report No.: BTL-FCCP-1-1412211 Page 49 of 102



#### Vertical

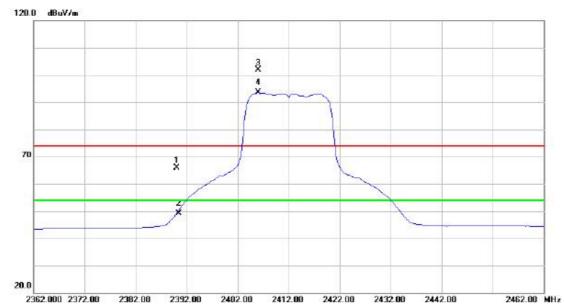

	MHz	1-1-1-1				Margin			
	IVIITIZ	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
2	2390.000	34.74	31.02	65.76	74.00	-8.24	peak		
2	2390.000	18.15	31.02	49.17	54.00	-4.83	AVG		
X 2	2406.000	70.78	31.10	101.88	74.00	27.88	peak	NO LIMIT	
* 2	2406.000	62.43	31.10	93.53	54.00	39.53	AVG	NO LIMIT	
>	( :	2390.000 2390.000 ( 2406.000 2406.000	2390.000 18.15 ( 2406.000 70.78	2390.000 18.15 31.02 ( 2406.000 70.78 31.10	2390.000 18.15 31.02 49.17 ( 2406.000 70.78 31.10 101.88	2390.000 18.15 31.02 49.17 54.00 ( 2406.000 70.78 31.10 101.88 74.00	2390.000 18.15 31.02 49.17 54.00 -4.83 ( 2406.000 70.78 31.10 101.88 74.00 27.88	2390.000 18.15 31.02 49.17 54.00 -4.83 AVG ( 2406.000 70.78 31.10 101.88 74.00 27.88 peak	2390.000 18.15 31.02 49.17 54.00 -4.83 AVG ( 2406.000 70.78 31.10 101.88 74.00 27.88 peak NO LIMIT

Report No.: BTL-FCCP-1-1412211 Page 50 of 102



#### Vertical




No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4824.025	45.29	6.78	52.07	74.00	-21.93	peak		
2		4824.025	38.15	6.78	44.93	54.00	-9.07	AVG		
3		7234.150	42.38	15.17	57.55	74.00	-16.45	peak		
4	*	7234.150	31.01	15.17	46.18	54.00	-7.82	AVG		

Report No.: BTL-FCCP-1-1412211 Page 51 of 102



#### Horizontal

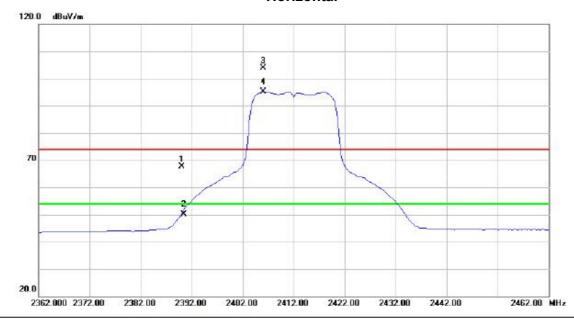

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	36.60	31.02	67.62	74.00	-6.38	peak		
2		2390.000	19.22	31.02	50.24	54.00	-3.76	AVG		
3	X	2406.000	72.67	31.10	103.77	74.00	29.77	peak	NO LIMIT	
4	*	2406.000	64.01	31.10	95.11	54.00	41.11	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 52 of 102



#### Horizontal




No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4823.800	43.43	6.78	50.21	74.00	-23.79	peak		
2		4823.800	32.87	6.78	39.65	54.00	-14.35	AVG		
3		7234.775	42.76	15.17	57.93	74.00	-16.07	peak		
4	*	7234.775	30.92	15.17	46.09	54.00	-7.91	AVG		

Report No.: BTL-FCCP-1-1412211 Page 53 of 102



#### Vertical

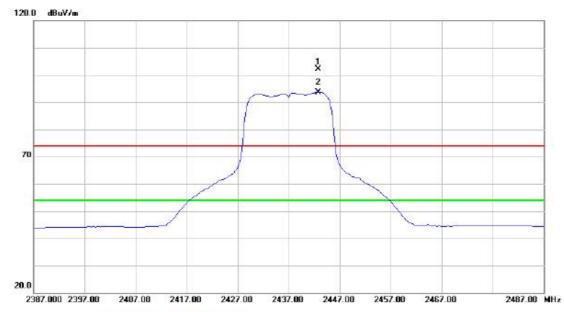


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2442.750	70.96	31.27	102.23	74.00	28.23	peak	NO LIMIT	
2	*	2442.750	62.34	31.27	93.61	54.00	39.61	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 54 of 102



#### Vertical

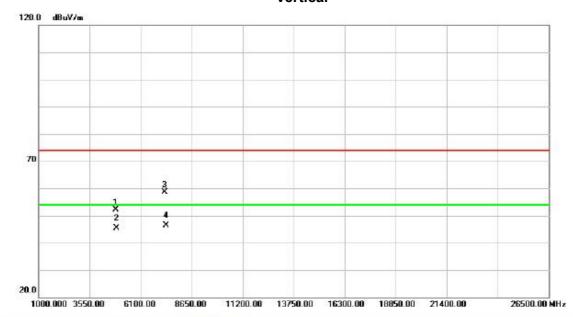


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4874.038	45.35	6.78	52.13	74.00	-21.87	peak		
2		4874.038	38.69	6.78	45.47	54.00	-8.53	AVG		
3		7311.800	42.99	15.58	58.57	74.00	-15.43	peak		
4	*	7311.800	30.70	15.58	46.28	54.00	-7.72	AVG		

Report No.: BTL-FCCP-1-1412211 Page 55 of 102



#### Horizontal

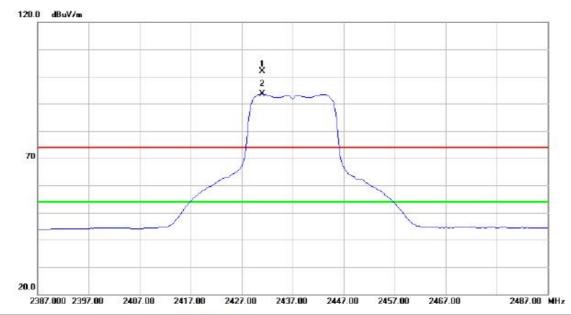


No.	M	k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2431	.000	70.75	31.22	101.97	74.00	27.97	peak	NO LIMIT	
2	*	2431	.000	62.30	31.22	93.52	54.00	39.52	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 56 of 102



#### Horizontal

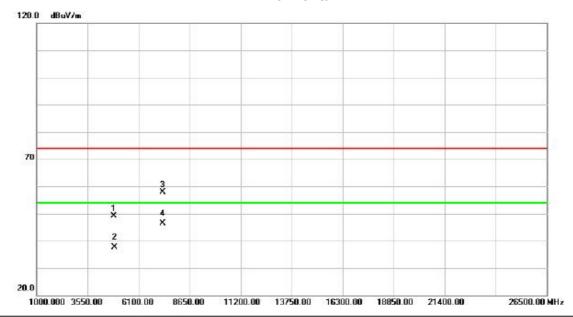


No.	Mk	. Freq.	Level	Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4875.900	42.33	6.77	49.10	74.00	-24.90	peak	
2		4875.900	30.83	6.77	37.60	54.00	-16.40	AVG	
3		7309.900	42.36	15.57	57.93	74.00	-16.07	peak	
4	*	7309.900	30.69	15.57	46.26	54.00	-7.74	AVG	

Report No.: BTL-FCCP-1-1412211 Page 57 of 102



#### Vertical

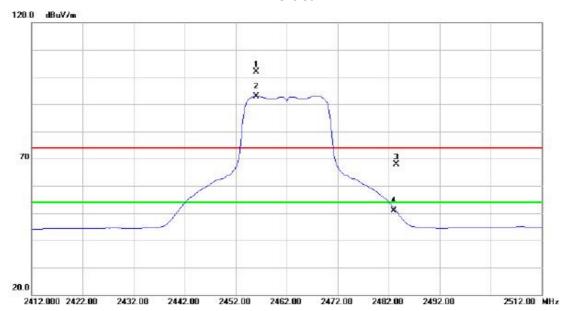


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2456.000	70.60	31.33	101.93	74.00	27.93	peak	NO LIMIT	
2	٠	2456.000	61.64	31.33	92.97	54.00	38.97	AVG	NO LIMIT	
3		2483.500	36.32	31.46	67.78	74.00	-6.22	peak		
4		2483.500	19.30	31.46	50.76	54.00	-3.24	AVG		

Report No.: BTL-FCCP-1-1412211 Page 58 of 102



#### Vertical

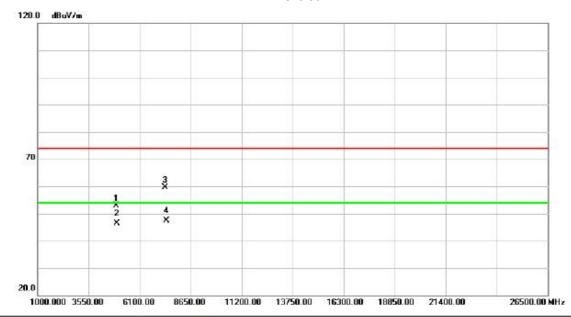


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4923.860	46.15	6.77	52.92	74.00	-21.08	peak		
2		4923.860	39.69	6.77	46.46	54.00	-7.54	AVG		
3		7385.580	43.56	15.98	59.54	74.00	-14.46	peak		
4	*	7385.580	31.35	15.98	47.33	54.00	-6.67	AVG		

Report No.: BTL-FCCP-1-1412211 Page 59 of 102



#### Horizontal

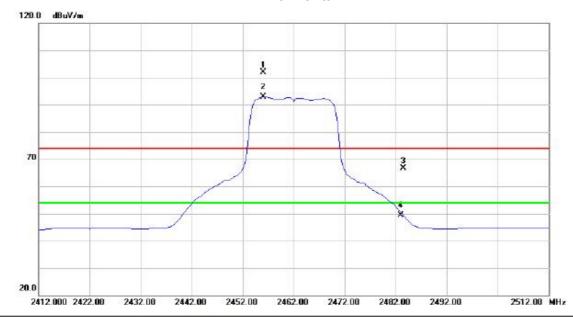

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2456.000	70.67	31.33	102.00	74.00	28.00	peak	NO LIMIT	
2	*	2456.000	61.57	31.33	92.90	54.00	38.90	AVG	NO LIMIT	
3		2483.500	35.11	31.46	66.57	74.00	-7.43	peak		
4		2483.500	18.03	31.46	49.49	54.00	-4.51	AVG		-

Report No.: BTL-FCCP-1-1412211 Page 60 of 102



#### Horizontal




No.	Mk	Freq.	Level	Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.105	42.65	6.77	49.42	74.00	-24.58	peak	
2		4923.105	32.67	6.77	39.44	54.00	-14.56	AVG	
3		7385.545	43.41	15.98	59.39	74.00	-14.61	peak	
4	*	7385.545	31.30	15.98	47.28	54.00	-6.72	AVG	

Report No.: BTL-FCCP-1-1412211 Page 61 of 102



### Vertical

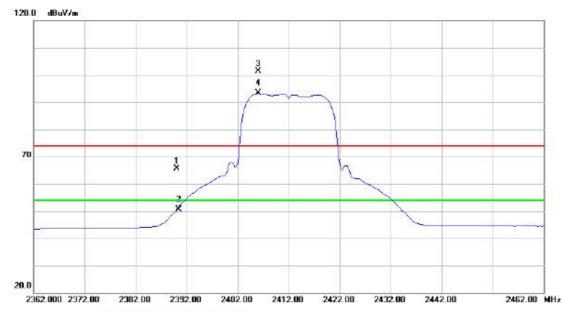


No.	Mk	K.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		23	90.000	34.50	31.02	65.52	74.00	-8.48	peak		
2		23	90.000	19.55	31.02	50.57	54.00	-3.43	AVG		
3	X	24	06.000	70.34	31.10	101.44	74.00	27.44	peak	NO LIMIT	
4	*	24	06.000	62.18	31.10	93.28	54.00	39.28	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 62 of 102



#### Vertical

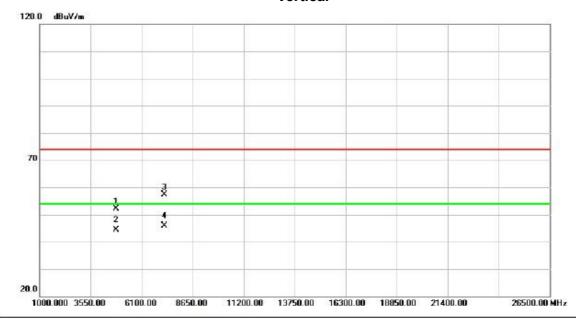


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4824.110	45.31	6.78	52.09	74.00	-21.91	peak	10-0-11-0-0-0-0-0	
2		4824.110	37.55	6.78	44.33	54.00	-9.67	AVG		
3		7235.700	42.30	15.17	57.47	74.00	-16.53	peak		
4	*	7235.700	30.82	15.17	45.99	54.00	-8.01	AVG		

Report No.: BTL-FCCP-1-1412211 Page 63 of 102



#### Horizontal

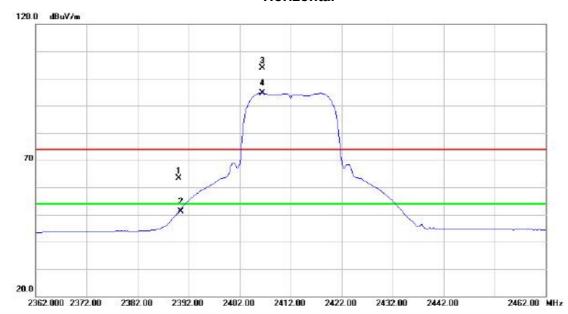

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	32.41	31.02	63.43	74.00	-10.57	peak		
2		2390.000	20.18	31.02	51.20	54.00	-2.80	AVG		
3	X	2406.500	72.70	31.10	103.80	74.00	29.80	peak	NO LIMIT	
4	*	2406.500	63.46	31.10	94.56	54.00	40.56	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 64 of 102



#### Horizontal



No.	Mk	. Freq.	Level	Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4823.305	42.76	6.78	49.54	74.00	-24.46	peak	
2		4823.305	31.38	6.78	38.16	54.00	-15.84	AVG	
3		7236.245	42.79	15.17	57.96	74.00	-16.04	peak	
4	*	7236.245	30.82	15.17	45.99	54.00	-8.01	AVG	

Report No.: BTL-FCCP-1-1412211 Page 65 of 102



### 

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
,		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2443.000	70.52	31.27	101.79	74.00	27.79	peak	NO LIMIT	
2	*	2443.000	62.20	31.27	93.47	54.00	39.47	AVG	NO LIMIT	

2437.00

2447.00

2457.00

2467.00

2487.00 MHz

2387.000 2397.00

2407.00


2417.00

2427.00

Report No.: BTL-FCCP-1-1412211 Page 66 of 102



#### Vertical

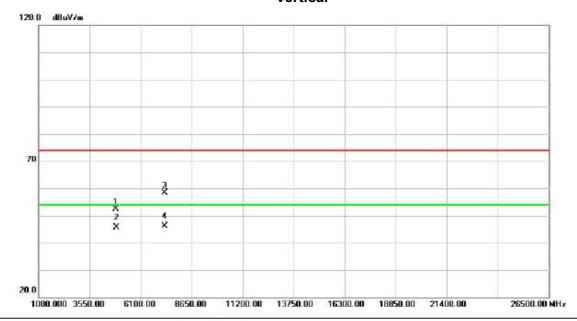


No.	Mk	. Freq.	Level	Factor	ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4873.940	45.51	6.78	52.29	74.00	-21.71	peak	
2		4873.940	38.80	6.78	45.58	54.00	-8.42	AVG	
3		7310.855	42.89	15.57	58.46	74.00	-15.54	peak	
4	*	7310.855	30.67	15.57	46.24	54.00	-7.76	AVG	

Report No.: BTL-FCCP-1-1412211 Page 67 of 102



#### Horizontal

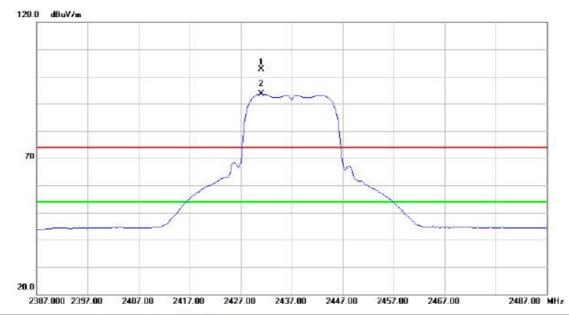


No.	M	ĸ.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	243	31.000	71.34	31.22	102.56	74.00	28.56	peak	NO LIMIT	
2	*	243	31.000	62.33	31.22	93.55	54.00	39.55	AVG	NO LIMIT	

Report No.: BTL-FCCP-1-1412211 Page 68 of 102



#### Horizontal

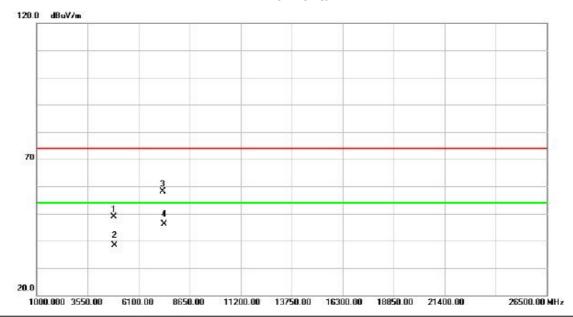


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4874.055	42.00	6.78	48.78	74.00	-25.22	peak	10.000	
2		4874.055	31.50	6.78	38.28	54.00	-15.72	AVG		
3		7311.390	42.64	15.58	58.22	74.00	-15.78	peak		
4	*	7311.390	30.64	15.58	46.22	54.00	-7.78	AVG		

Report No.: BTL-FCCP-1-1412211 Page 69 of 102



#### Vertical

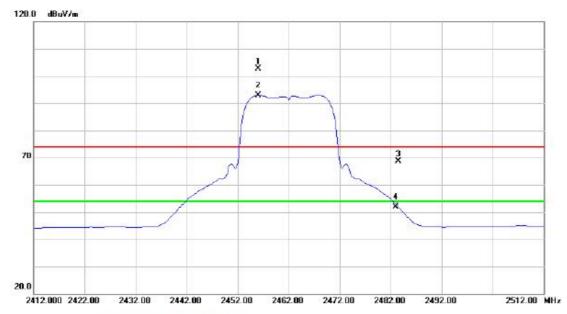


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2456.000	71.33	31.33	102.66	74.00	28.66	peak	NO LIMIT	
2	*	2456.000	61.64	31.33	92.97	54.00	38.97	AVG	NO LIMIT	
3		2483.500	37.15	31.46	68.61	74.00	-5.39	peak		
4		2483.500	20.50	31.46	51.96	54.00	-2.04	AVG		

Report No.: BTL-FCCP-1-1412211 Page 70 of 102



#### Vertical

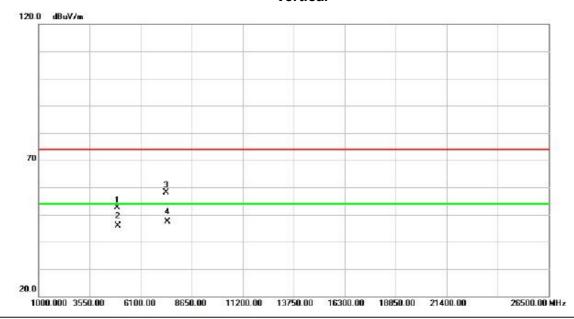


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4923.875	45.85	6.77	52.62	74.00	-21.38	peak	14 - 0.04 11.00 24.000	
2		4923.875	39.15	6.77	45.92	54.00	-8.08	AVG		
3		7385.540	42.21	15.98	58.19	74.00	-15.81	peak		
4	*	7385.540	31.37	15.98	47.35	54.00	-6.65	AVG		

Report No.: BTL-FCCP-1-1412211 Page 71 of 102



#### Horizontal

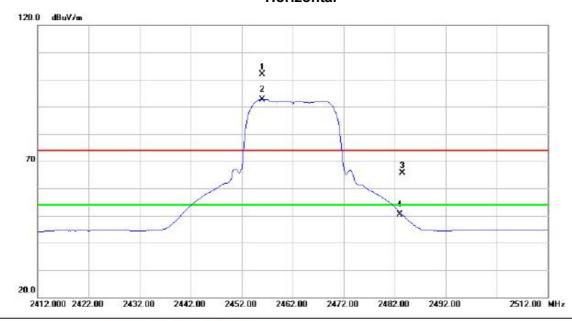


No.	Mk	c. Freq.	Level	Factor	ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2456.000	70.43	31.33	101.76	74.00	27.76	peak	NO LIMIT	
2	*	2456.000	61.39	31.33	92.72	54.00	38.72	AVG	NO LIMIT	
3		2483.500	34.17	31.46	65.63	74.00	-8.37	peak		
4		2483.500	19.04	31.46	50.50	54.00	-3.50	AVG		
-						1112 11				

Report No.: BTL-FCCP-1-1412211 Page 72 of 102



Orthogonal Axis: X
Test Mode: TX N-20M MODE 2462MHz

### Horizontal

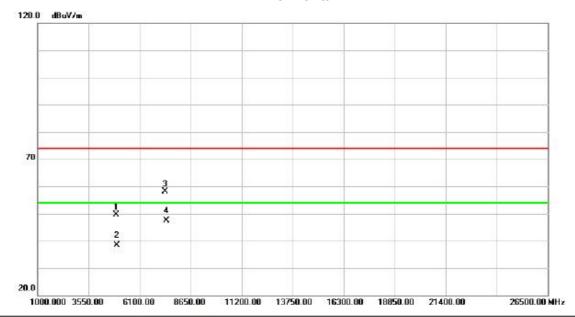

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4924.400	42.75	6.77	49.52	74.00	-24.48	peak		
2		4924.400	31.63	6.77	38.40	54.00	-15.60	AVG		
3		7386.980	42.04	15.98	58.02	74.00	-15.98	peak		
4	*	7386.980	31.32	15.98	47.30	54.00	-6.70	AVG		

Report No.: BTL-FCCP-1-1412211 Page 73 of 102



ATTACHMENT E - BANDWIDTH	


Report No.: BTL-FCCP-1-1412211 Page 74 of 102



# Test Mode: TX B Mode\_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.07	15.90	500	Complies
2437	10.02	15.90	500	Complies
2462	10.12	15.90	500	Complies


### **TX CH01**

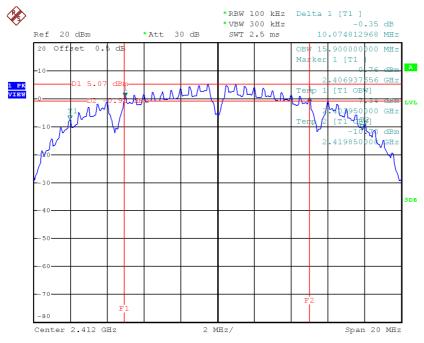


Date: 8.JAN.2015 19:17:19

Report No.: BTL-FCCP-1-1412211 Page 75 of 102



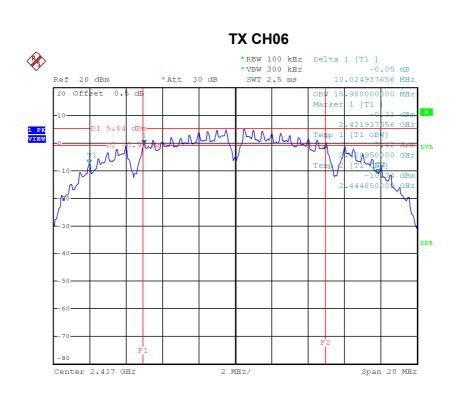

Date: 8.JAN.2015 19:22:21

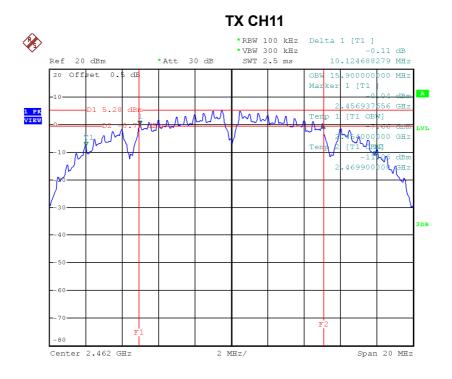


Date: 8.JAN.2015 19:25:35



# Test Mode: TX G Mode\_CH01/06/11

Fre quency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.06	16.35	500	Complies
2437	15.81	16.30	500	Complies
2462	15.66	16.35	500	Complies


#### **TX CH01**

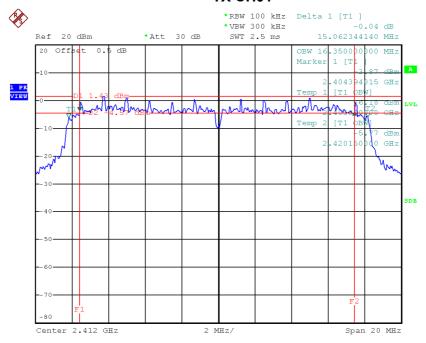

Date: 8.JAN.2015 19:29:34

Report No.: BTL-FCCP-1-1412211 Page 77 of 102



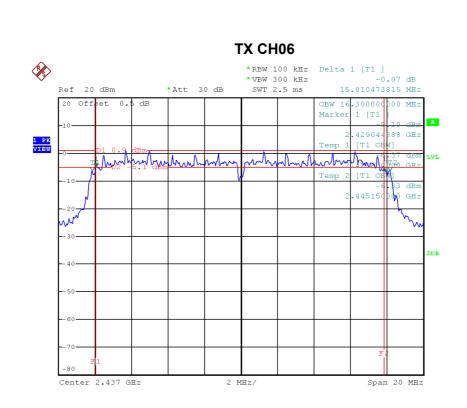

Date: 8.JAN.2015 19:32:22

### **TX CH11** \*RBW 100 kHz Delta 1 [T1] \*VTRW 300 kHz -0.19 dB **P** Ref 20 dBm \*Att 30 dB 15.660847880 MHz SWT 2.5 ms 20 Offset 0.5 dB OBW 16.35000 Marker 1 [T1 45409 63 GH2 1 PK VIEW wh GH 2 Center 2.462 GHz Span 20 MHz


Date: 8.JAN.2015 19:37:52



### Test Mode: TX N-20MHz Mode\_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min . Limit (kHz)	Test Result
2412	15.51	17.25	500	Complies
2437	15.51	17.25	500	Complies
2462	15.16	17.25	500	Complies


### **TX CH01**

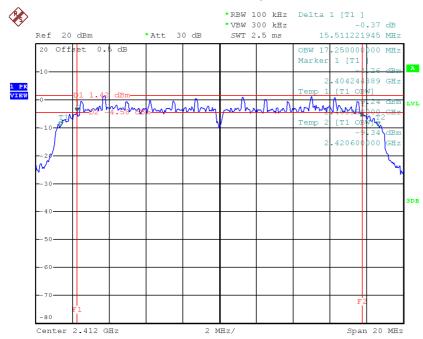

Date: 8.JAN.2015 19:41:31

Report No.: BTL-FCCP-1-1412211 Page 79 of 102



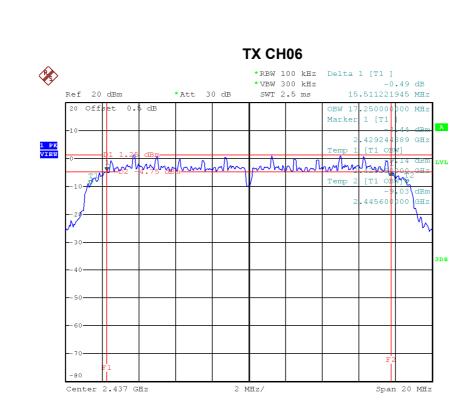

Date: 8.JAN.2015 19:44:37

# 

Date: 8.JAN.2015 20:04:35



ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Report No.: BTL-FCCP-1-1412211 Page 81 of 102



# Test Mode :TX B Mode\_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	14.94	0.03	30.00	1.00	Complies
2437	14.89	0.03	30.00	1.00	Complies
2462	14.74	0.03	30.00	1.00	Complies

# Test Mode :TX G Mode\_CH01/06/11


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.47	0.09	30.00	1.00	Complies
2437	19.33	0.09	30.00	1.00	Complies
2462	19.48	0.09	30.00	1.00	Complies

# Test Mode :TX N20 Mode\_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.45	0.09	30.00	1.00	Complies
2437	19.24	0.08	30.00	1.00	Complies
2462	19.03	0.08	30.00	1.00	Complies

Report No.: BTL-FCCP-1-1412211 Page 82 of 102



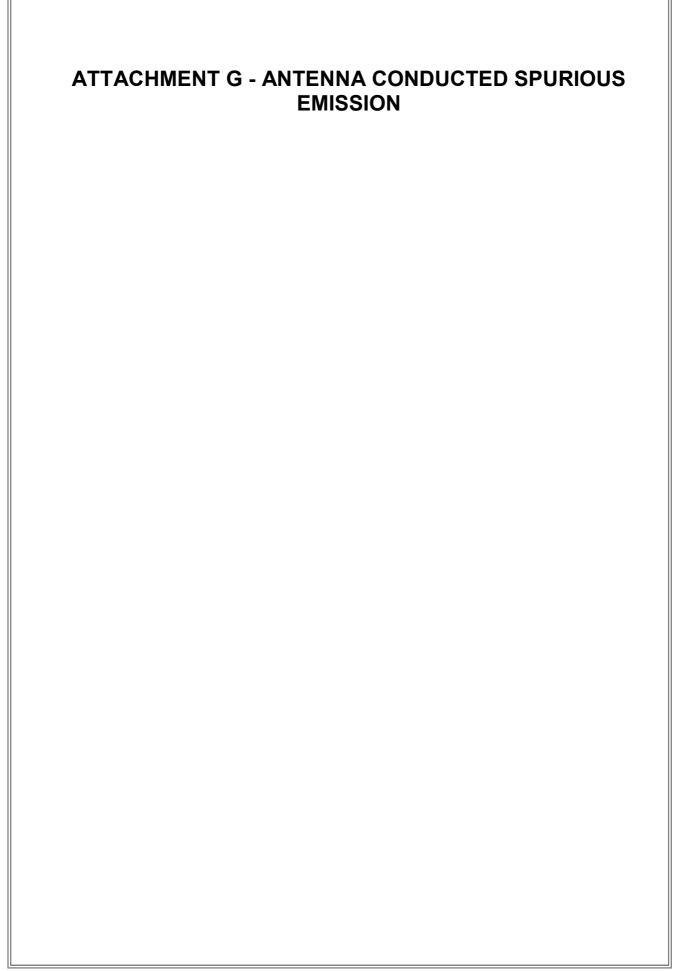


Report No.: BTL-FCCP-1-1412211 Page 83 of 102




est Mode :	TX B Mode

Report No.: BTL-FCCP-1-1412211 Page 84 of 102



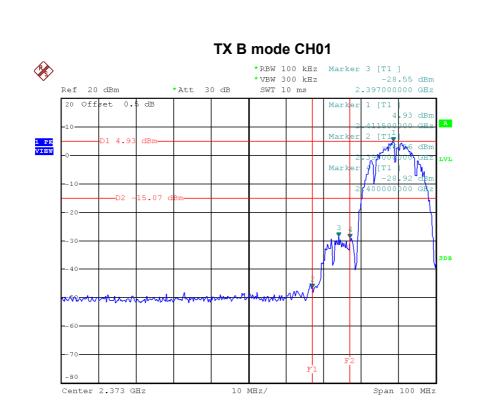




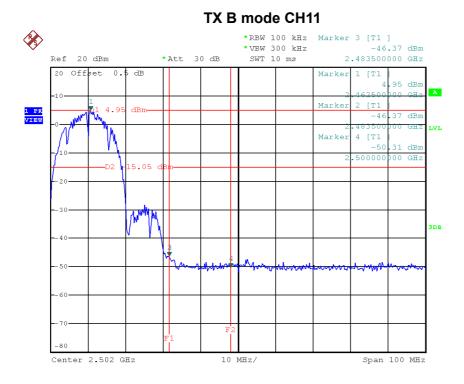

Date: 8.JAN.2015 19:25:51






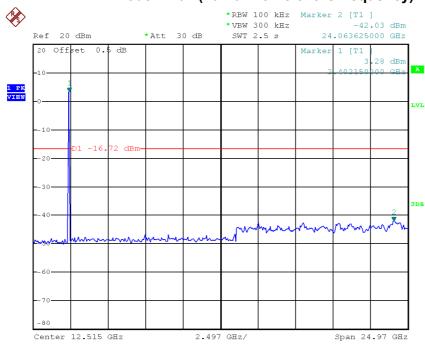


Date: 8.JAN.2015 19:19:18


### TX B mode CH06 (10 Harmonic of the frequency)

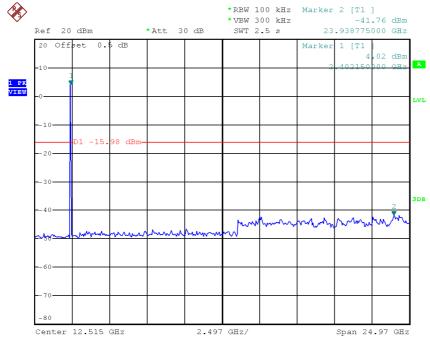

Date: 8.JAN.2015 19:21:41





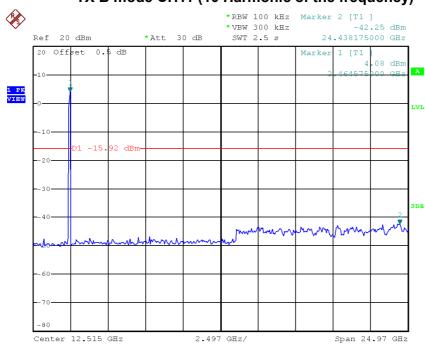

Date: 8.JAN.2015 19:25:14


Report No.: BTL-FCCP-1-1412211 Page 87 of 102




4 B# - 1	TV O Marda
Test Mode :	TX G Mode

Report No.: BTL-FCCP-1-1412211 Page 88 of 102



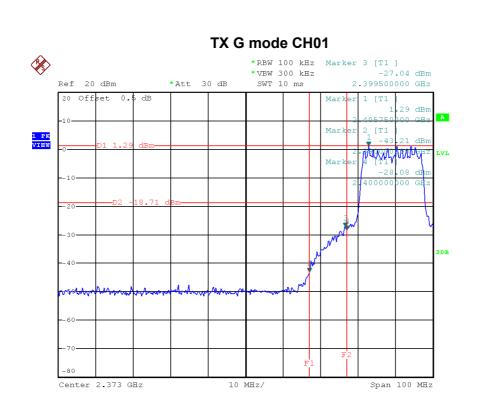




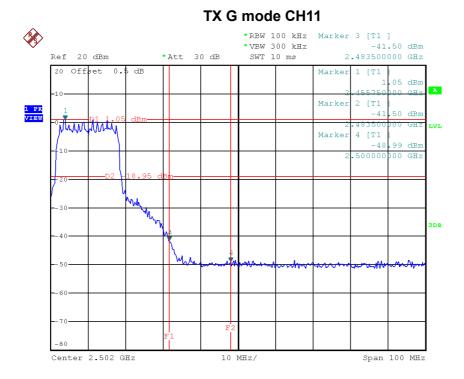

Date: 8.JAN.2015 19:38:11






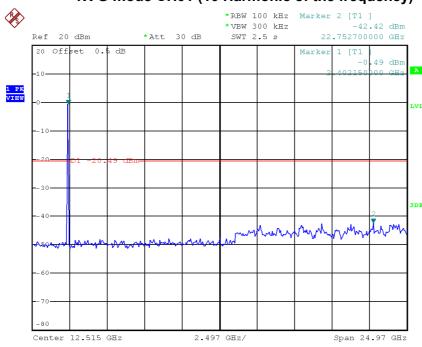


Date: 8.JAN.2015 19:29:15


# TX G mode CH06 (10 Harmonic of the frequency)

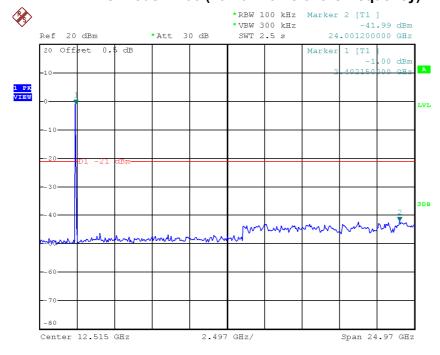

Date: 8.JAN.2015 19:32:06





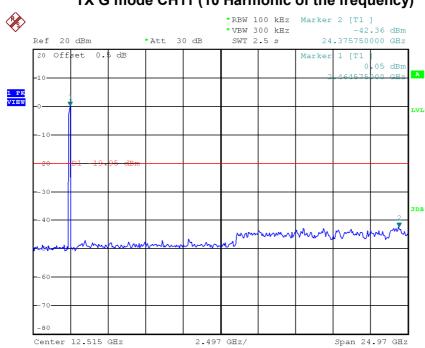

Date: 8.JAN.2015 19:37:25


Report No.: BTL-FCCP-1-1412211 Page 91 of 102



est Mode :	TX N-20M Mode


Report No.: BTL-FCCP-1-1412211 Page 92 of 102



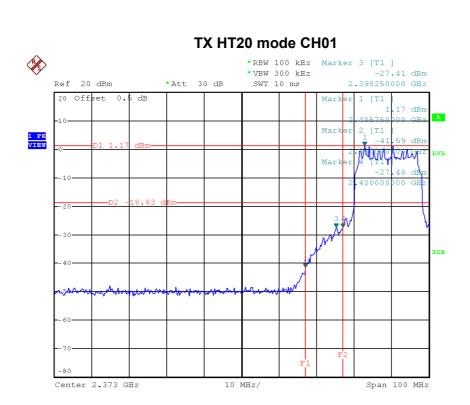

Date: 8.JAN.2015 19:41:49


# TX HT20 mode CH11

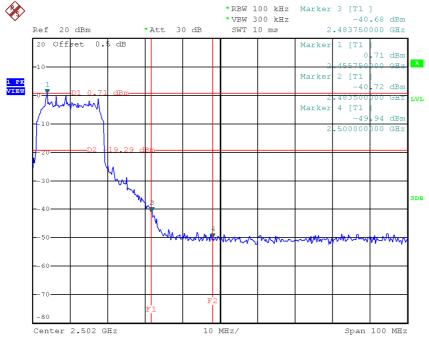

Date: 8.JAN.2015 20:04:47






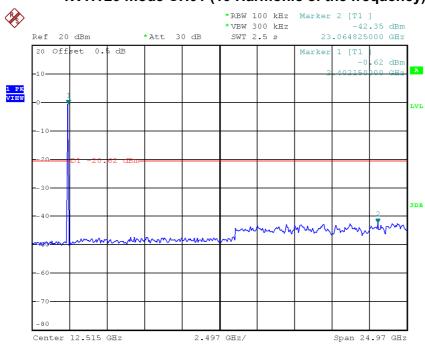

Date: 8.JAN.2015 19:41:11


### TX HT20 mode CH06 (10 Harmonic of the frequency)

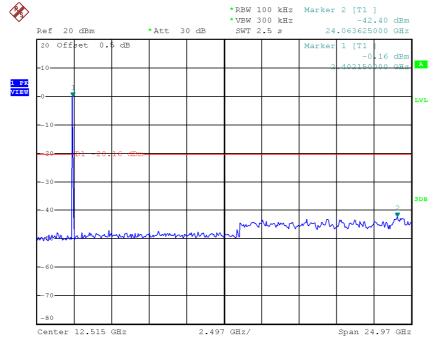

Date: 8.JAN.2015 19:43:57





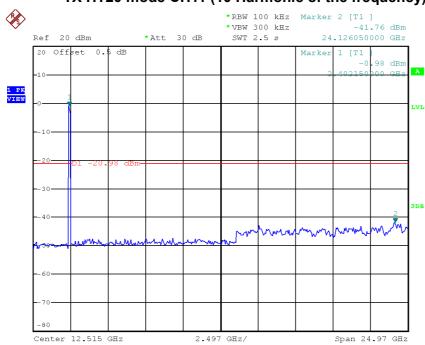

Date: 8.JAN.2015 20:05:32

Report No.: BTL-FCCP-1-1412211 Page 95 of 102



ATTACHMENT H - POWER SPECTRAL DENSITY						


Report No.: BTL-FCCP-1-1412211 Page 96 of 102



# Test Mode: TX B Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-8.18	0.15	8.00	Complies
2437	-9.33	0.12	8.00	Complies
2462	-8.60	0.14	8.00	Complies


### TX CH01

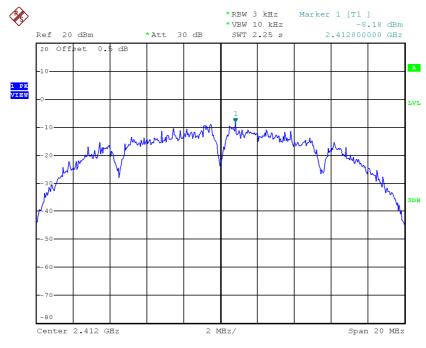

Date: 8.JAN.2015 19:17:52

Report No.: BTL-FCCP-1-1412211 Page 97 of 102



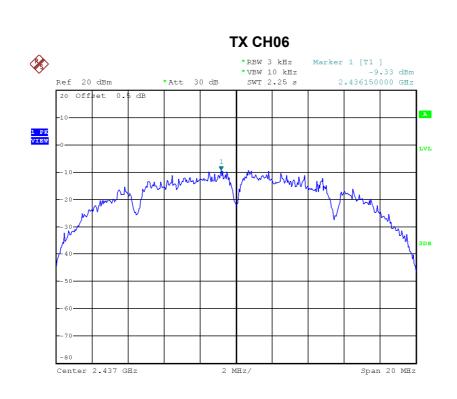

Date: 8.JAN.2015 19:22:46

# 


Date: 8.JAN.2015 19:26:11



### Test Mode :TX G Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.05	0.08	8.00	Complies
2437	-14.05	0.04	8.00	Complies
2462	-12.45	0.06	8.00	Complies


#### TX CH01

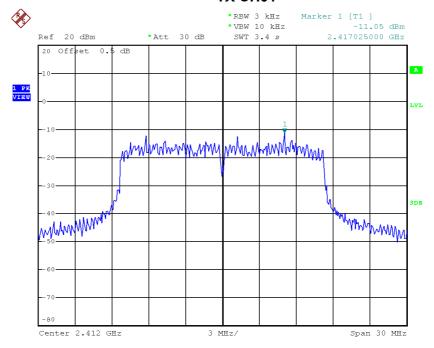

Date: 8.JAN.2015 19:30:15

Report No.: BTL-FCCP-1-1412211 Page 99 of 102



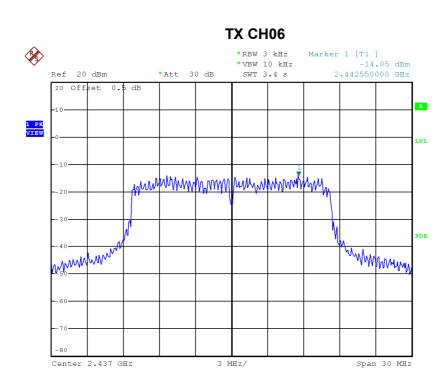

Date: 8.JAN.2015 19:32:47

# 


Date: 8.JAN.2015 19:38:57



### Test Mode: TX N-20M Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.54	0.04	8.00	Complies
2437	-13.58	0.04	8.00	Complies
2462	-13.92	0.04	8.00	Complies


#### **TX CH01**

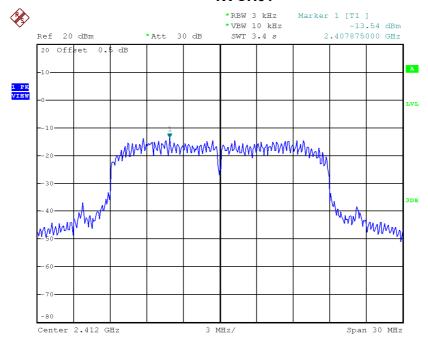

Date: 8.JAN.2015 19:42:17


Report No.: BTL-FCCP-1-1412211 Page 101 of 102



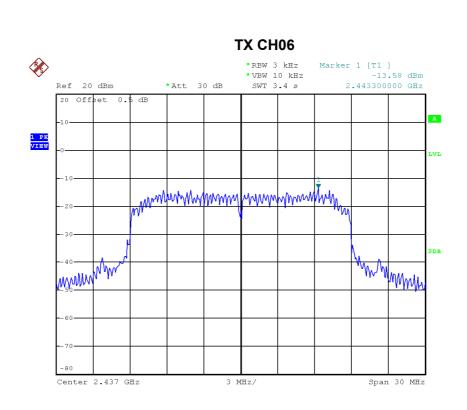

Date: 8.JAN.2015 19:45:07

Date: 8.JAN.2015 20:05:03

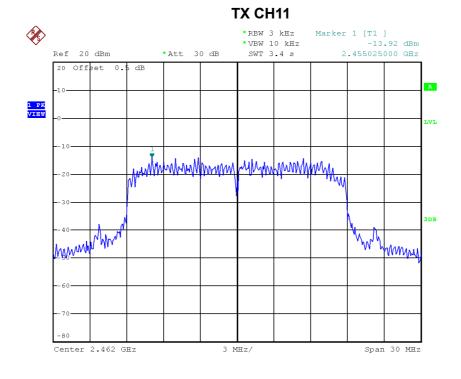

Report No.: BTL-FCCP-1-1412211