




Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	78%
Test Engineer	Paul Chen	Configurations	2.4GHz + 5GHz

Horizontal

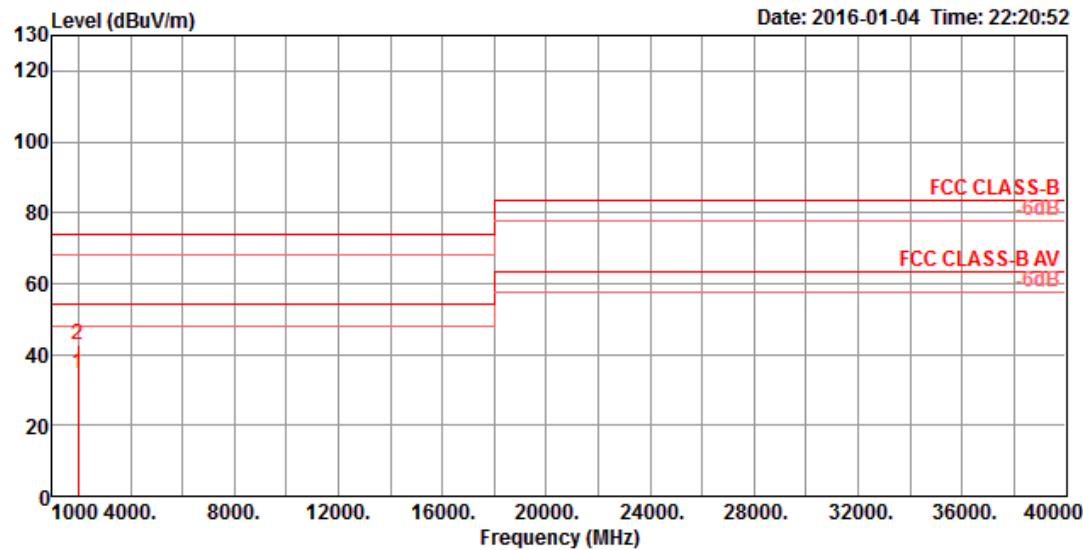

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2000.08	34.77	54.00	-19.23	38.85	4.84	26.20	35.12	165	288	Average
2	2000.08	42.88	74.00	-31.12	46.96	4.84	26.20	35.12	165	288	Peak
											HORIZONTAL

Vertical

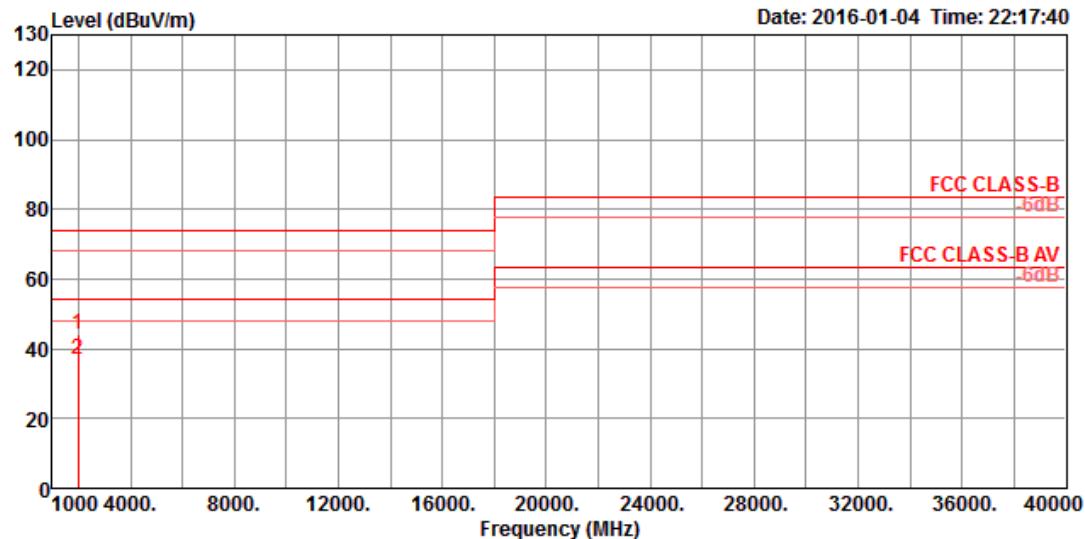

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	dB	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1999.92	44.25	74.00	-29.75	48.34	4.84	26.20	35.13	162	121 Peak	VERTICAL
2	2000.20	36.78	54.00	-17.22	40.86	4.84	26.20	35.12	162	121 Average	VERTICAL