

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD Monitor

MODEL/TYPE NO : OR1940S / NONE FCC ID : YPD-OR1940S

MULTIPLE MODEL : 19RCM, KMC-19BD, NO1901

BRAND NAME TopSync DRIDN KOCOM WANDV

APPLICANT: ORION COMMUNICATIONS CO., LTD.

Rm1614, Samgoo Building, 16-49 Hangangro-3ga,

Yongsan-gu, Seoul, Korea

Attn.: Oh, Jong-bok / R&D Manager

MANUFACTURER : ORION COMMUNICATIONS CO., LTD.

Rm1614, Samgoo Building, 16-49 Hangangro-3ga,

Yongsan-gu, Seoul, Korea

FCC CLASSIFICATION : Class B Personal computers and peripherals

RULE PART(S) : FCC Part 15 Subpart B

TEST PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE100812.0414

DATES OF TEST : August 23, 2010 to August 24, 2010

REPORT ISSUE DATE : August 31, 2010

TEST LABORATORY : ETL Inc. (FCC Designation Number: KR0022)

This LCD Monitor, Model OR1940S has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yo Han, Park / Chief Engineer

ETL Inc.

#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel: 82-2-858-0786 Fax: 82-2-858-0788



FCC ID: YPD-OR1740S

Table of Contents

FCC Measurement Report

- 1. Introduction
- 2. Product Information
- 3. Description of Tests
- 4. Test Condition
- 5. Test Results
 - 5.1 Summary of Test Results
 - **5.2 Conducted Emissions Measurement**
 - **5.3 Radiated Emissions Measurement**
- 6. Sample Calculation
- 7. List of test Equipment used for Measurement

Appendix A. FCC Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. User Manual



FCC ID: YPD-OR1740S

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name: ORION COMMUNICATIONS CO., LTD.

Address : Rm1614, Samgoo Building, 16-49 Hangangro-3ga,

Yongsan-gu, Seoul, Korea

Attention : Oh, Jong-bok / R&D Manager

EUT Type : LCD Monitor

Model Number : OR1940S

• S/N: NONE

Frequency Range: X-TAL → 12.000 MHz

Rule Part(s): FCC Part 15 Subpart B

Test Procedure: ANSI C63.4-2003

• FCC Classification: Class B Personal computers and peripherals

Dates of Tests: August 23, 2010 to August 24, 2010

Place of Tests: ETL Inc. Testing Lab. (FCC Designation Number: KR0022)

Radiated Emission test;

#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,

Gyeonggi-do, 445-882, Korea

Conducted Emission test:

ETL Inc. Testing Lab. (FCC Designation Number : KR0022) 371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

• Test Report No.: ETLE100812.0414



FCC ID: YPD-OR1740S

1. INTRODUCTION

The measurement tests for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number: KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the ORION COMMUNICATIONS CO., LTD., Model: OR1940S.



FCC ID: YPD-OR1740S

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the LCD Monitor (model: OR1940S)

The model OR1940S is basic that was tested.

The multi models 19RCM, KMC-19BD and NO1901 are identical to basic model, except for model designation and brand name.

| Brand Name | Model Name | |
|--------------|------------|--|
| TopSync | OR1940S | |
| | 19RCM | |
| KOCOM | KMC-19BD | |
| NANOV | NO1901 | |



FCC ID: YPD-OR1740S

2.2 General Specification

| Item | | Specification | | |
|------------------|---------|-------------------------------------------------|--|--|
| Screen size | | 19" | | |
| Display size | | 376 mm x 301 mm | | |
| Screen coating | | Anti-glare & Hard-coating | | |
| Pixel pitch | | 0.294 mm x 0.294 mm | | |
| Brightness | | 300 cd/m ² | | |
| Contrast scaling | | 1 000:1 | | |
| Viewing angle | | 70°/70°/75°/65° (Left/Right/Up/Down) | | |
| Response time | | 2 msec, 6 msec | | |
| Input Signal | | HDMI, Analog RGB, CVBS 1-In/Out, CVBS 2-In/Out, | | |
| Input Signal | | Audio L/R, Stereo In | | |
| Speaker (Option) | | 2 W x 2 W | | |
| H-Frequency | | 30 kHz ~ 81 kHz | | |
| V-Frequency | | 50 Hz ~ 75 Hz | | |
| Resolution | | 1 280 x 1 024 @ 75 Hz | | |
| Power | | 45 W (Normal mode) | | |
| Consumption | | 2 W (Power-saving mode) | | |
| Adaptor | | Input: AC 100 V – 240 V; 50 Hz – 60 Hz; 1.5 A | | |
| Adapter | | Output: DC 12 V; 5.0 A | | |
| Product size | | 495 mm x 155 mm x 508 mm (W x D x H) | | |
| Weight | Monitor | 5.4 kg | | |
| vveignt | Package | 7.4 kg | | |



FCC ID: YPD-OR1740S

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω / 50uH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.



FCC ID: YPD-OR1740S

3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10 m. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.



FCC ID: YPD-OR1740S

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner and which tends to maximize its emission level in a typical application.

4.2 EUT operation

- Stand by mode
- The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (Worst case)

4.3 Support Equipment Used

| Description | Model Name | Serial No. | Manufacturer |
|----------------------|------------|--------------|--------------------------------------------------|
| Adapter (for EUT) | PA-1061-0 | A30938106175 | Suzhou Li Shin Electronic Co., Ltd. |
| PC | D07M001 | DMJFQBX | Dell Inc. |
| AV Surround Receiver | AVR-1508 | NONE | Shenzhen Inkel-Languang Electronics Co., Ltd. |
| Keyboard | SK-8115 | NONE | Yet Foundate Ltd |
| Mouse | MOC5UO | NONE | Dongguan Primax Electronics Ltd |



FCC ID: YPD-OR1740S


4.4 Type of Cables Used

| Device from | Device to | Type of I/O port | Length[m] | Type of shield |
|----------------------|----------------------|------------------|-----------|----------------|
| EUT | PC | RGB | 1.5 | Shielded |
| EUT | PC | HDMI | 1.5 | Shielded |
| EUT | PC | Audio In | 1.2 | Shielded |
| EUT | AV Surround Receiver | CVBS 1 In | 1.2 | Shielded |
| EUT | AV Surround Receiver | CVBS 1 Out | 1.2 | Shielded |
| EUT | AV Surround Receiver | CVBS 2 In | 1.2 | Shielded |
| EUT | AV Surround Receiver | CVBS 2 Out | 1.2 | Shielded |
| EUT | AV Surround Receiver | Audio L/R | 1.2 | Shielded |
| EUT | Adapter | DC Input | 1.2 | Shielded |
| PC | Keyboard | USB | 1.2 | Shielded |
| PC | Mouse | USB | 1.2 | Shielded |
| PC | Power socket | AC Input | 1.0 | Unshielded |
| AV Surround Receiver | Power socket | AC Input | 1.5 | Unshielded |



FCC ID: YPD-OR1740S

4.5 The setup drawing(s)

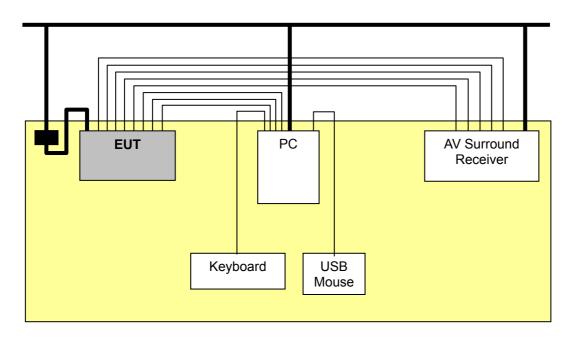

-----: Data Line

: Power Line

: Adapter



FCC ID: YPD-OR1740S

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| FCC Rule | Measurement Required | Result |
|-----------|--------------------------------|--------------------|
| 15.107(a) | Conducted Emission Measurement | Passed by 15.57 dB |
| 15.109(g) | Radiated Emission Measurement | Passed by 3.50 dB |

The data collected shows that the **ORION COMMUNICATIONS CO.**, **LTD. / LCD Monitor / OR1940S** complied with technical requirements of above rules part 15.107(a) and 15.109(g) Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.



FCC ID: YPD-OR1740S

5.2 Conducted Emissions Measurement

5.2.1 Conducted Emissions Data

| EUT | LCD Monitor / OR1940S (S/N: N/A) |
|---------------------|----------------------------------|
| Limit apply to | FCC Part 15.107(a) Class B |
| Test Date | August 24, 2010 |
| Operating Condition | Full "H" pattern display mode |
| Result | Passed by 15.57 dB |

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

| Frequency [MHz] | Result [dB(µV)] | | Phase | Limit [dB(μ V)] | | Margin [dB] | |
|--------------------|--------------------|---------|----------|-------------------------|---------|----------------|---------|
| | Quasi-peak | Average | (*H/**N) | Quasi-peak | Average | Quasi-peak | Average |
| 0.170 | 47.04 | - | Н | 64.96 | 54.96 | 17.92 | - |
| 0.220 | 40.97 | - | Н | 62.82 | 52.82 | 21.85 | - |
| 0.460 | 38.40 | - | N | 56.69 | 46.69 | 18.29 | - |
| 0.590 | 40.43 | - | N | 56.00 | 46.00 | 15.57 | - |
| 1.110 | 39.63 | - | N | 56.00 | 46.00 | 16.37 | - |
| 4.960 | 34.51 | - | N | 56.00 | 46.00 | 21.49 | - |
| 8.135 | 33.30 | - | Н | 60.00 | 50.00 | 26.70 | - |
| 10.870 | 35.03 | - | Н | 60.00 | 50.00 | 24.97 | - |
| 24.100 | 35.08 | - | N | 60.00 | 50.00 | 24.92 | - |

NOTES:

- 1. * H: HOT Line, **N: Neutral Line
- 2. Margin value = Limit Result
- 3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz \sim 30 MHz according to the FCC Part 15.107(a) Class B.
- 4. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Test Engineer: Yoon Seop, Kim


Report no. ETLE100812.0414, Page 13 of 18




FCC ID: YPD-OR1740S





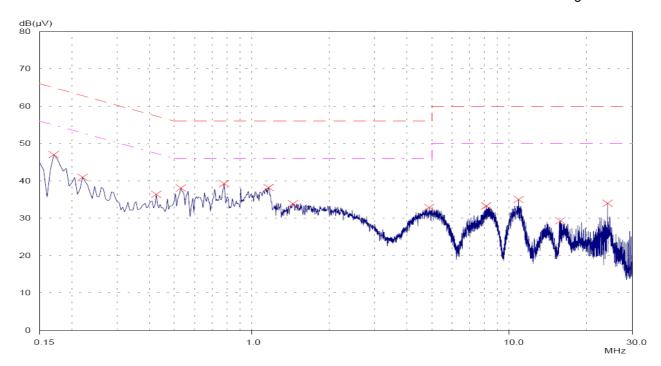

Line: Neutral Line

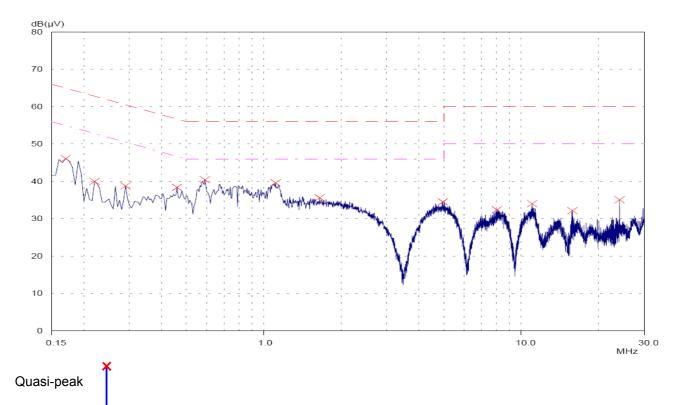

Report no. ETLE100812.0414, Page 14 of 18



FCC ID: YPD-OR1740S

5.3 Radiated Emissions Measurement

5.3.1 Radiated Emissions Data

| EUT | LCD Monitor / OR1940S (S/N: N/A) |
|---------------------|---------------------------------------|
| Limit apply to | FCC Part 15.109(g) (CISPR 22 Class B) |
| Test Date | August 23, 2010 |
| Operating Condition | Full "H" pattern display mode |
| Result | Passed by 3.50 dB |

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB(μV)] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB(μV)] | Result [dB(µV/m)] | Limit [dB(µV/m)] | Margin [dB] |
|--------------------|------------------|--------------------------|-----------------------|------------------------|----------------------|---------------------|----------------|
| 33.40 | 16.57 | V | 9.07 | 0.86 | 26.50 | 30.00 | 3.50 |
| 45.02 | 13.46 | V | 9.74 | 1.10 | 24.30 | 30.00 | 5.70 |
| 148.32 | 10.71 | V | 11.52 | 2.47 | 24.70 | 30.00 | 5.30 |
| 326.51 | 15.66 | Н | 13.63 | 3.91 | 33.20 | 37.00 | 3.80 |
| 331.98 | 10.22 | Н | 13.72 | 3.96 | 27.90 | 37.00 | 9.10 |
| 390.02 | 11.11 | Н | 14.89 | 4.50 | 30.50 | 37.00 | 6.50 |
| 425.49 | 11.56 | Н | 15.79 | 4.75 | 32.10 | 37.00 | 4.90 |


NOTES:

- 1. * H : Horizontal polarization , ** V : Vertical polarization
- 2. Result = Reading + Antenna factor + Cable loss
- 3. Margin value = Limit Result
- 4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(g) and CISPR 22 Class B.

Test Engineer: Yoon Seop, Kim



FCC ID: YPD-OR1740S

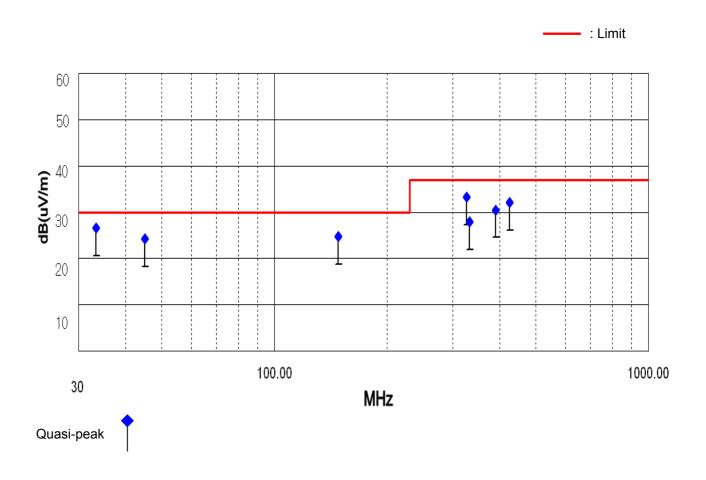



FCC ID: YPD-OR1740S

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

 $dB(\mu V) = 20 \log_{10} (\mu V)$ $dB\mu V = dBm + 107$

Example : @ 33.40 MHz

Class B Limit = 30.00 dB(μ V/m) (CISPR 22 Class B)

Reading = $16.57 \text{ dB}(\mu\text{V})$

Antenna Factor + Cable Loss = $9.07 + 0.86 = 9.93 \text{ dB}(\mu\text{//m})$

Total = $26.50 \text{ dB}(\mu\text{V/m})$

Margin = 30.00 - 26.50 = 3.50 dB

= 3.50 dB below Limit



FCC ID: YPD-OR1740S

7. List of test equipments used for measurements

| | Test Equipment | Model | Mfg. | Serial No. | Cal. Due Date |
|-------------|-------------------|----------|--------------------------|------------|---------------|
| \boxtimes | EMI TEST Receiver | ESVS10 | R&S | 835165/001 | 11.04.02 |
| \boxtimes | EMI TEST Receiver | ESHS 30 | R&S | 840190/002 | 11.04.02 |
| \boxtimes | LISN | 3825/2 | ЕМСО | 9208-1995 | 10.09.17 |
| \boxtimes | LISN | 3816-2 | ЕМСО | 1002 | 10.09.17 |
| \boxtimes | LogBicon Antenna | VULB9165 | Schwarzbeck | 2023 | 11.09.08 |
| \boxtimes | Turn-Table | MFT-120S | Max-Full Antenna Corp | - | N/A |
| \boxtimes | Antenna Master | MFA-440E | Max-Full Antenna Corp | - | N/A |