



# **FCC TEST REPORT**

**Product** : WIFI Digital Microscope

Trade mark : INFINOPTIX

Model/Type reference : 738W Serial number : N/A

Ratings : 5V=, 1,5A, Class III, IPX0

FCC ID : YPR738W

Report number : EESZG06110003

Date : June 30, 2014

Regulations : See below

Test Standards	Results
	PASS

#### Prepared for:

Zhongshan Sunpet Plastics & Electronics Mfy. Ltd. 109 Zhongshan Port Avenue, Zhongshan Torch Development Zone, Zhongshan City, Guangdong Province, China, 528437

Prepared by:

Centre Testing International (Shenzhen) Corporation Hongwei Industrial Zone, 70 Area, Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Tested by

Approved by:

Reviewed by:

June 30, 2014

Date:

Check No.: 1727823388



# **TABLE OF CONTENTS**

Descrip	otion		Pag	ge
	ERTIFICATION INFORMATION			
2. TE	ST SUMMARY	••••••		4
	EASUREMENT UNCERTAINTY			
4. PR	RODUCT INFORMATION			5
5. SY	STEM TEST CONFIGURATION	<u>()</u>		6
6. TE	ST EQUIPMENT LIST			6
7. SU	IPPORT EQUIPMENT LIST			7
8. 6D	B BANDWIDTH MEASUREMENT	•••••	••••••	8
8.1.	LIMITS			8
8.2.	BLOCK DIAGRAM OF TEST SETUP			
8.3.	TEST PROCEDURE			8
8.4.	TEST RESULT			8
9. PO	OWER SPECTRAL DENSITY	•••••		16
9.1.	LIMITS			16
9.2.	BLOCK DIAGRAM OF TEST SETUP			
9.3.	TEST PROCEDURE			16
9.4.	TEST RESULT			16
10.	MAXIMUM PEAK CONDUCTED OUTPUT	POWER MEA	SUREMENT	24
	LIMITS			
10.2.	BLOCK DIAGRAM OF TEST SETUP			24
10.3.	TEST PROCEDURE			24
10.4.	TEST RESULT			24
	AND EDGE EMISSION MEASUREMENT			
11.1.	LIMITS			32
	BLOCK DIAGRAM OF TEST SETUP			
11.3.	TEST PROCEDURE			33
11.4.	TEST RESULT		()	33



Page 3 of 65

12.	SPURIOUS RF CONDUCTED EMISSIONS MEASUREMENT	42
12.1	. LIMITS	42
12.2	BLOCK DIAGRAM OF TEST SETUP	42
12.3	. TEST PROCEDURE	42
	. TEST RESULT	
13.	RADIATED EMISSIONS MEASUREMENT	49
13.1	. LIMITS	49
13.2	BLOCK DIAGRAM OF TEST SETUP	49
13.3	. TEST PROCEDURE	50
13.4	TEST RESULT	51
14.	CONDUCTED EMISSION TEST	55
14.1	. LIMITS	55
14.2	BLOCK DIAGRAM OF TEST SETUP	55
14.3	PROCEDURE OF CONDUCTED EMISSION TEST	55
14.4	GRAPHS AND DATA	56
APPE	NDIX 1 PHOTOGRAPHS OF TEST SETUP	58
APPE	NDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT	60
APPE	NDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT	62
N/A m	eans not applicable.	



























#### 1. CERTIFICATION INFORMATION

Applicant: Zhongshan Sunpet Plastics & Electronics Mfy. Ltd.

109 Zhongshan Port Avenue, Zhongshan Torch Development Zone, Zhongshan City, Guangdong Province, China, 528437

Manufacturer: N/A

**Equipment authorization:** Certification **FCC ID:** YPR738W

Product: WIFI Digital Microscope

Model/Type reference: 738W

Trade Mark: INFINOPTIX

Serial Number: N/A

Report Number: EESZG06110003

Sample Received Date: June 11, 2014

Sample tested Date: June 11, 2014 to June 30, 2014

The above equipment was tested by Centre Testing International (Shenzhen) Corporation for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart C and the measurement procedure according to ANSI C63.4:2009.

## 2. TEST SUMMARY

No.	Test Item	Rule	Result
1	6dB Bandwidth	15.247(a)(2)	PASS
2	Peak Output Power	15.247(b)(3)	PASS
3	Power Spectral Density	15.247(e)	PASS
4	Bandedge Emission	15.247(d)	PASS
5	Spurious RF Conducted Emission	15.247(d)	PASS
6	Radiated Emission	15.247(d)	PASS
7	Conducted Emission	15.207	PASS
8	Antenna requirements	15.203	PASS (See Notes)

Notes: The product uses a Internal integral antenna which in accordance with Section 15.203 is considered sufficient to comply with the provisions of this section.







## 3. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted disturbance	3.0
Radiated disturbance	4.9

## 4. PRODUCT INFORMATION

Items	Description
Rating	5V==, 1,5A, Class III, IPX0
Transmit Data Rate	IEEE 802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps IEEE 802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps IEEE 802.11n HT20: MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7 IEEE 802.11n HT40: MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7
Type of Modulation	IEEE 802.11b: DSSS (CCK, QPSK, BPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	Integral antenna
Connector	fixed on board
Gain	0dBi

#### Technical Specification of WiFi module (802.11b/g/n)

ltom		Description				
Item	IEEE 802.11b	IEEE 802.11g	IEEE 802.11n			
Operating Frequency band		2412-2462MHz for 802.11bgnHT20; 2422-2452MHz for 802.11n HT40				
Channel Number	11	11	11	7		
Channel Bandwidth (MHz)	20	20	20	40		

**Technical Specification of Carrier Frequency** 

reclinical Specification of Carrier Frequency						
Frequency Band	Channel No.	Frequency	Channel No.	Frequency	Channel No.	Frequency
2412-2462MHz (802.11b/g/n HT20)	1	2412 MHz	6	2437 MHz	11	2462 MHz
	2	2417 MHz	7	2442 MHz		(S)
	3	2422 MHz	8	2447 MHz		
	4	2427 MHz	9	2452 MHz		
	5	2432 MHz	10	2457 MHz		/



Report No.: EESZG06110003 Page 6 of 65

Frequency Band	Channel No.	Frequency	Channel No.	Frequency	Channel No.	Frequency
2422-2452MHz (802.11n HT40)	1	2422 MHz	4	2437 MHz	7	2452 MHz
	2	2427 MHz	5	2442 MHz		
	3	2432 MHz	6	2447 MHz		

#### 5. SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. It was powered by 3.7DC from battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

#### 6. TEST EQUIPMENT LIST

o. ILOI LQOII II				
Equipment	Manufacturer	Model Number	Serial Number	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/12/2016
Spectrum Analyzer	Agilent	E4443A	MY45300910	01/15/2015
Spectrum Analyzer	R&S	FSP40	100416	07/06/2014
Receiver	R&S	ESCI	100435	07/19/2014
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	06/25/2015
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/07/2015
Microwave Preamplifier	Agilent	8449B	3008A02425	03/19/2015
Receiver	R&S	ESCI	100009	07/19/2014
LISN	R&S	ENV216	100098	07/19/2014









Page 7 of 65

# 7. SUPPORT EQUIPMENT LIST

No.	Device Type	Brand	Model	Series No.	Data Cable	Remark
1.	Notebook	DELL	Vostro 3400	GYQTVP1	N/A	FCC DOC
2.	Mouse	L.Selectron	M004	02284699	Un-shielded 1.2M	FCC DOC
3.	Printer	HP	1020	CNCK766629	Un-shielded 1.2M	FCC DOC
























Report No.: EESZG06110003 Page 8 of 65

#### 8. 6DB BANDWIDTH MEASUREMENT

#### **8.1. LIMITS**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### **8.2. BLOCK DIAGRAM OF TEST SETUP**



#### 8.3. TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level.
- 4. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

#### **8.4. TEST RESULT**

The test data of worst case are below:

#### 802.11b, 1Mbps

Frequency (MHz)	Measured Value (MHz)	Result
2412	12.18	PASS
2437	11.28	PASS
2462	11.70	PASS

#### 802.11g, 6Mbps

Frequency (MHz)	Measured Value (MHz)	Result
2412	16.44	PASS
2437	16.56	PASS
2462	16.44	PASS






## 802.11n HT20, MSC0

Frequency (MHz)	Measured Value (MHz)	Result
2412	17.40	PASS
2437	17.52	PASS
2462	17.52	PASS

## 802.11n HT40, MCS0

Frequency (MHz)	Measured Value (MHz)	Result
2422	35.80	PASS
2437	36.00	PASS
2452	36.00	PASS

Please see the following plots (worst case): 802.11b, 1Mbps:

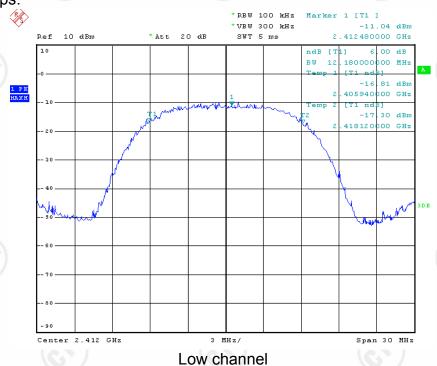



E-mail:info@cti-cert.com











Report No.: EESZG06110003

Page 10 of 65

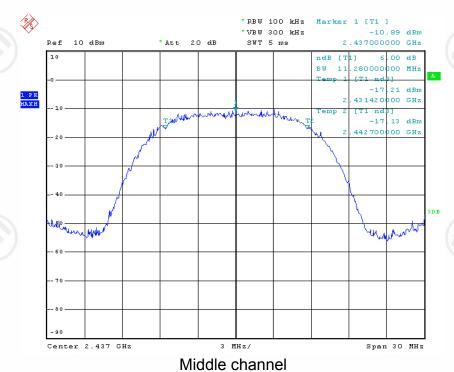

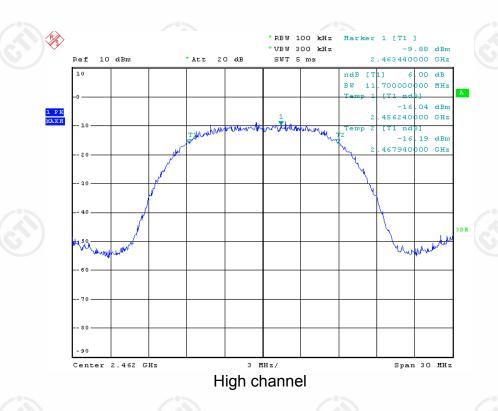













802.11g, 6Mbps:

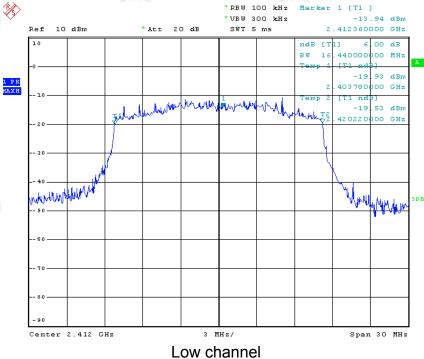

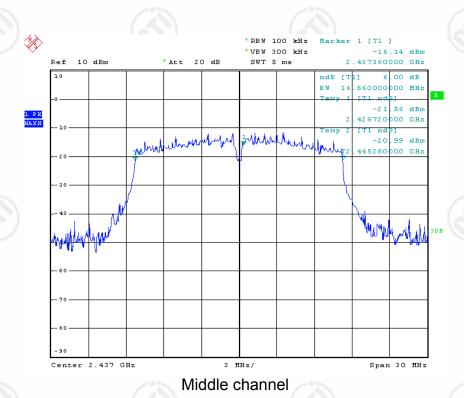











Page 12 of 65

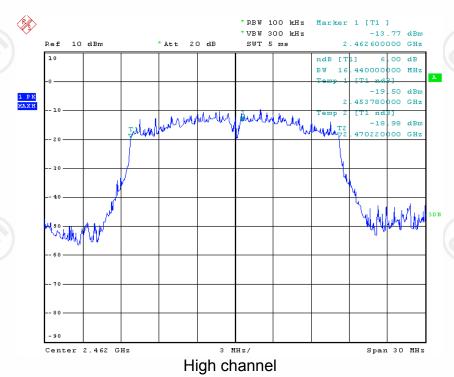

## 802.11n HT20, MCS0:

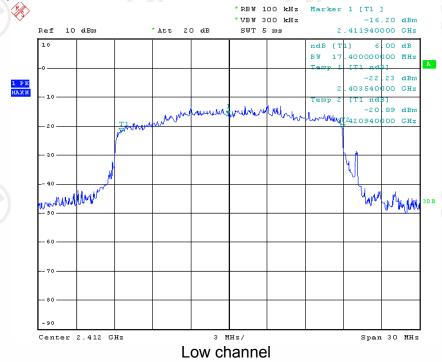











Report No.: EESZG06110003

Page 13 of 65

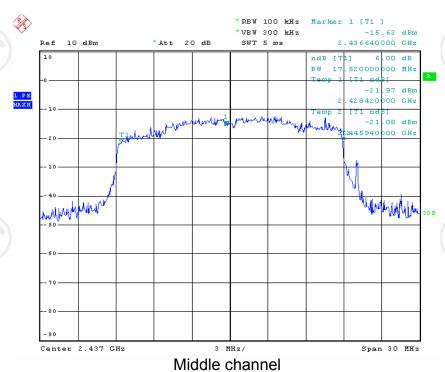

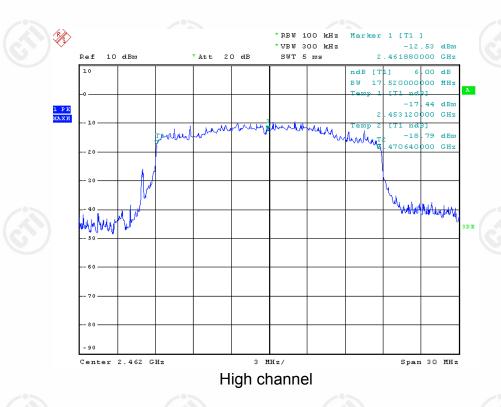













802.11n HT40, MCS0:

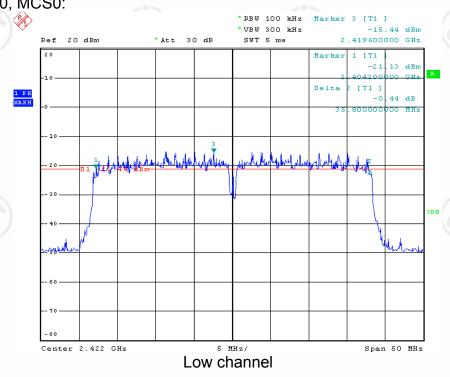

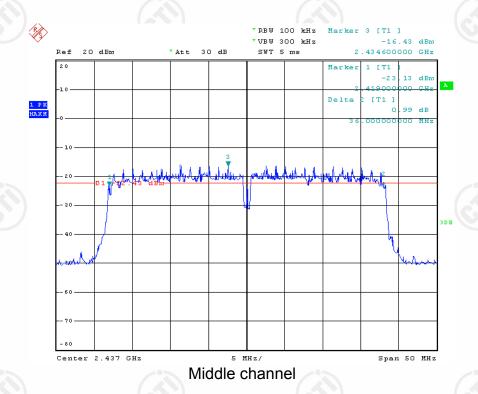










Page 15 of 65

Report No.: EESZG06110003

\* RBW 100 kHz \*VBW 300 kHz -16.39 dBm 2.449600000 GHz 20 dBm \* Att 30 dB [T1 63 dBm 55 **d**B

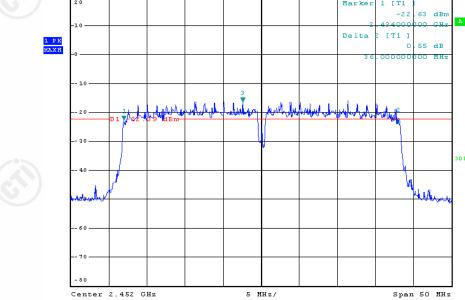

High channel












Report No.: EESZG06110003 Page 16 of 65

#### 9. POWER SPECTRAL DENSITY

#### **9.1. LIMITS**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2. BLOCK DIAGRAM OF TEST SETUP



#### 9.3. TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable and set span wide enough to capture the whole plot, record the frequency of the max emission in the plot.
- 3. Set the frequency as center frequency, and set RBW = 3 kHz, VBW >RBW, sweep= (SPAN/3 kHz) with Peak detector in Max Hold mode.
- 4. Read the output peak data from the spectrum analyzer directly.

#### 9.4. TEST RESULT

The test data of worst case are below:

#### 802.11b, 1Mbps

Frequency (MHz)	Measured Value (dBm)	Result
2412	-25.45	PASS
2437	-24.27	PASS
2462	-22.62	PASS

#### 802.11g, 6Mbps

Frequency (MHz)	Measured Value (MHz)	Result
2412	-27.07	PASS
2437	-26.05	PASS
2462	-27.13	PASS






## 802.11n HT20, MSC0

Frequency (MHz)	Measured Value (MHz)	Result
2412	-28.54	PASS
2437	-26.86	PASS
2462	-25.64	PASS

## 802.11n HT40, MCS0

Frequency (MHz)	Measured Value (MHz)	Result
2422	-41.02	PASS
2437	-39.66	PASS
2452	-42.61	PASS

# Please see the following plots (worst case): 802.11b, 1Mbps:

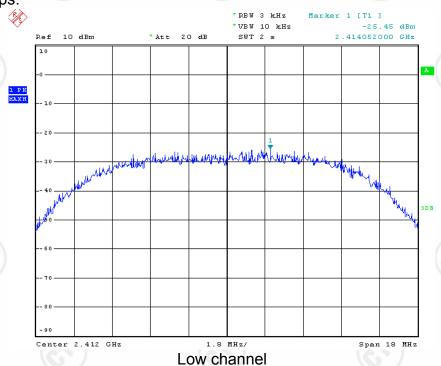













Report No.: EESZG06110003

Page 18 of 65

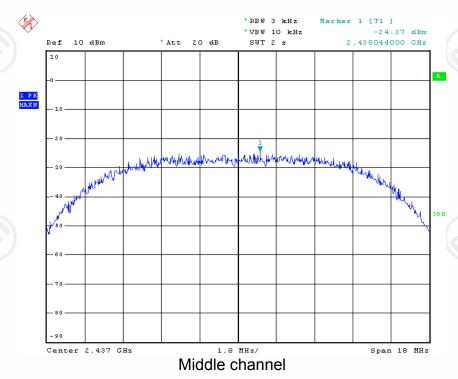

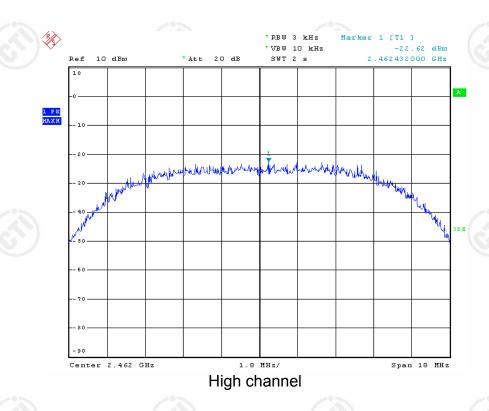













802.11g, 6Mbps:

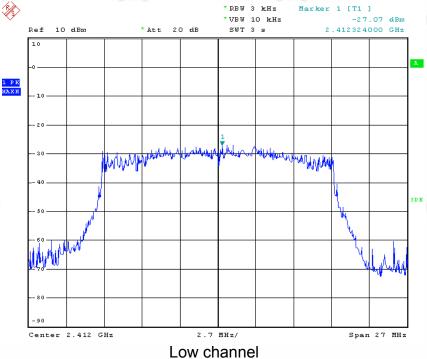

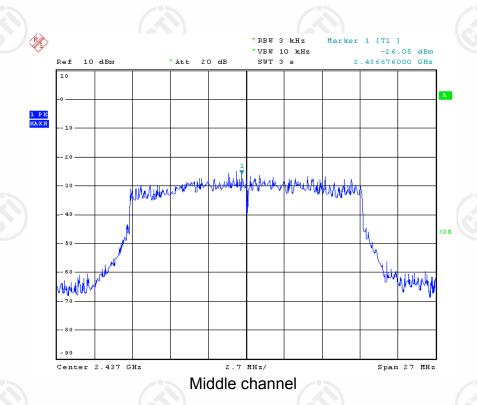













Page 20 of 65

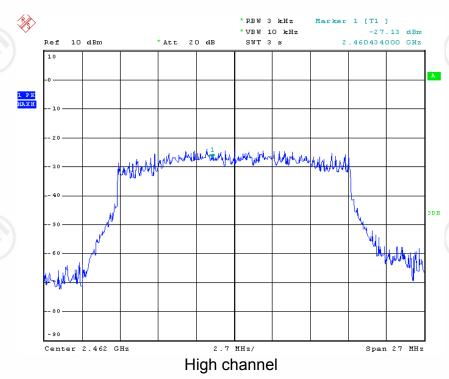

## 802.11n HT20, MCS0:

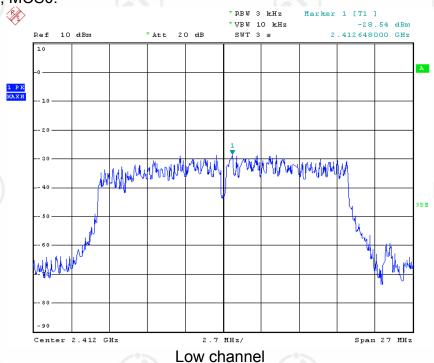














Page 21 of 65

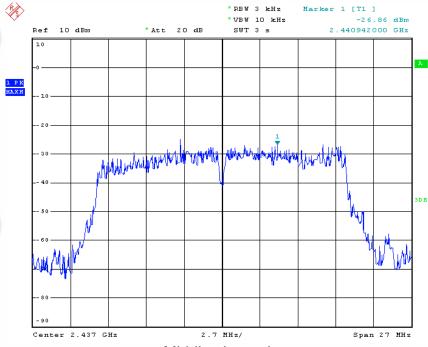



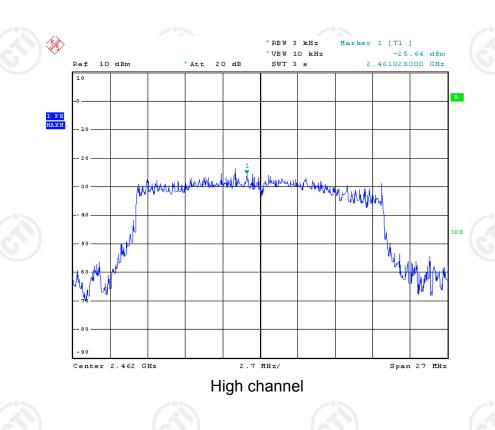













802.11n HT40, MCS0:

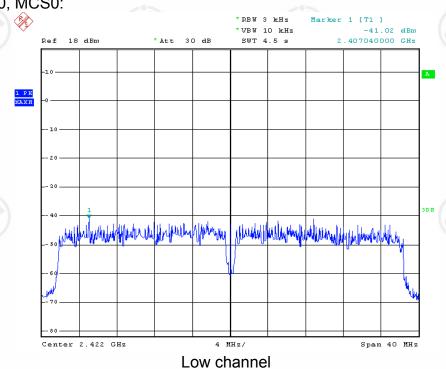

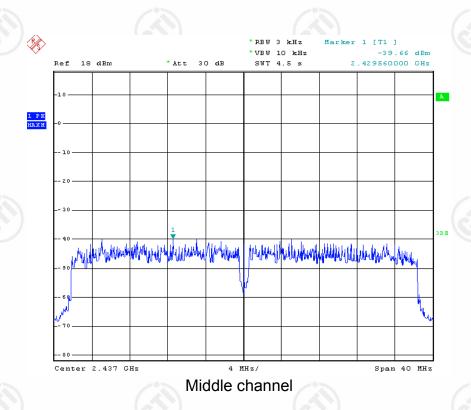












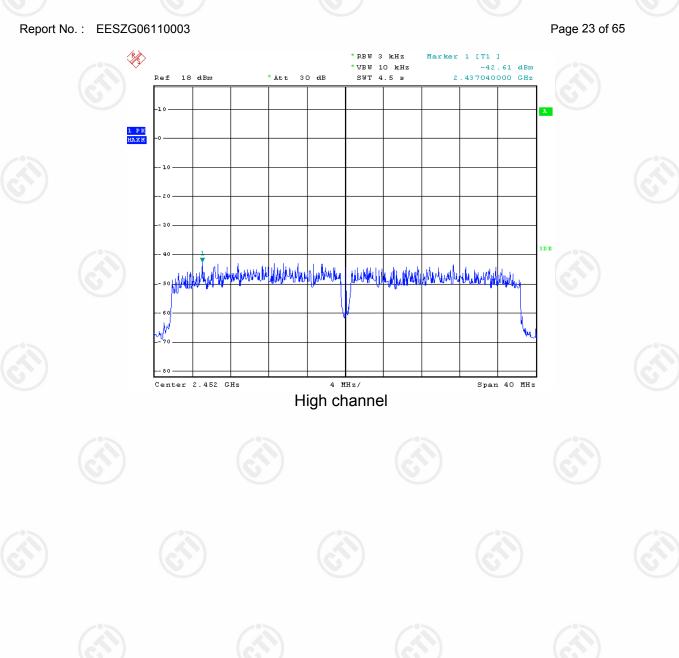







































Report No.: EESZG06110003 Page 24 of 65


#### 10. MAXIMUM PEAK CONDUCTED OUTPUT POWER MEASUREMENT

#### **10.1. LIMITS**

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt (30dBm).

#### 10.2. BLOCK DIAGRAM OF TEST SETUP



#### 10.3. TEST PROCEDURE

- 1. The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.
- 2. Set spectrum analyzer's RBW and VBW to applicable and set span wide enough to capture the whole plot, record the frequency of the max emission in the plot.
- 3. Set the frequency as center frequency, and set RBW = 1 MHz, VBW >RBW, sweep= auto with Peak detector in Max Hold mode.

### 10.4. TEST RESULT

#### 802.11b:

Frequency (MHz)	Data rate (Mbps)	Result (dBm)	Limit (dBm)
		6.83	30
Low Channel: 2412	5.5	6.80	30
	11	6.85	30
	1	6.27	30
Middle Channel: 2437	5.5	6.29	30
	11	6.30	30
	1	6.02	30
High Channel: 2462	5.5	6.05	30
	11	6.17	30







## 802.11g:

Frequency (MHz)	Data rate (Mbps)	Result (dBm)	Limit (dBm)
	6	8.41	30
Low Channel: 2412	18	8.53	30
	54	8.46	30
	6	8.76	30
Middle Channel: 2437	18	8.79	30
	54	8.62	30
	6	8.97	30
High Channel: 2462	18	8.99	30
	54	8.92	30

# 802.11n HT20:

Frequency (MHz)	Data rate (Mbps)	Result (dBm)	Limit (dBm)	
	MCS0	7.85	30	
Low Channel: 2412	MCS3	7.83	30	
(6,7,5)	MCS7	7.86	30	
Middle Channel: 2437	MCS0	8.37	30	
	MCS3	8.46	30	
	MCS7	8.42	30	
	MCS0	8.69	30	
High Channel: 2462	MCS3	8.77	30	
	MCS7	8.80	30	

## 802.11n HT40:

Frequency (MHz)	Data rate (Mbps)	Result (dBm)	Limit (dBm)
	MCS0	6.45	30
Low Channel: 2422	MCS3	6.41	30
	MCS7	6.43	30
	MCS0	6.52	30
Middle Channel: 2437	MCS3	6.50	30
	MCS7	6.55	30
	MCS0	6.57	30
High Channel: 2452	MCS3	6.62	30
	MCS7	6.49	30











Please see the following plots (typical set):

802.11b, 1Mbps:

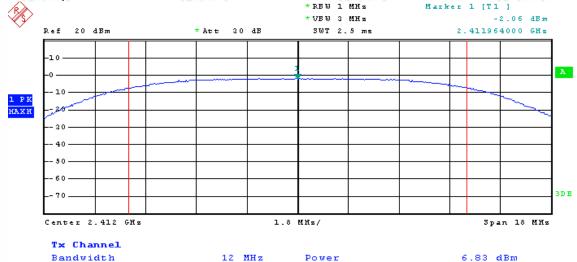

Low channel

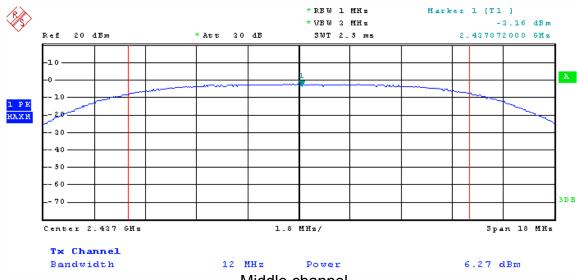

Middle channel



400-6788-333










Report No.: EESZG06110003 Page 27 of 65

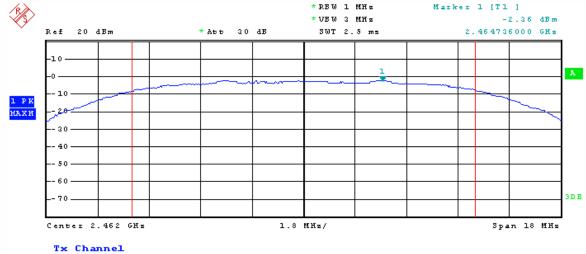


Bandwidth

12 MHz Power

6.02 dBm

High channel

802.11g, 6Mbps:

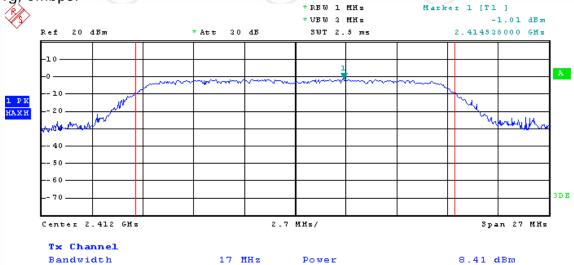

Low channel








































Page 28 of 65

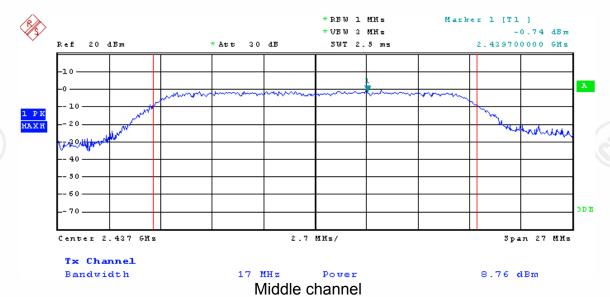



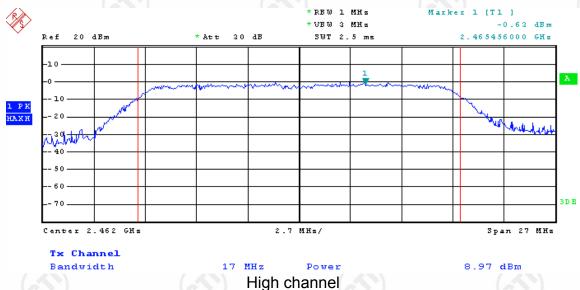












7.85 dBm



Report No.: EESZG06110003 Page 29 of 65

802.11n HT20, MCS0:


Bandwidth

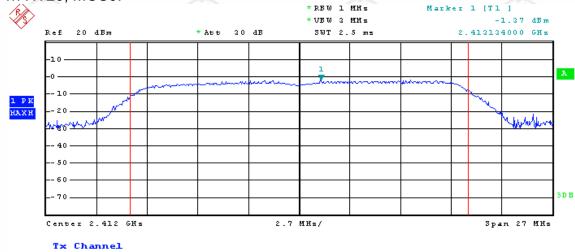

Low channel

Power

18 MHz

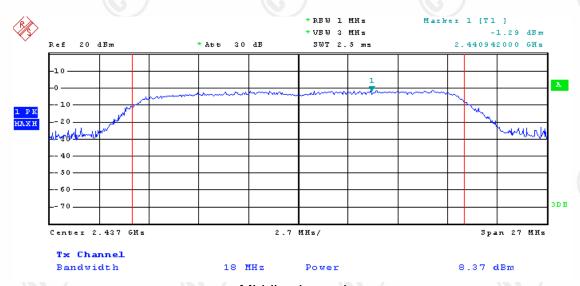

Middle channel



400-6788-333









Report No.: EESZG06110003

Page 30 of 65

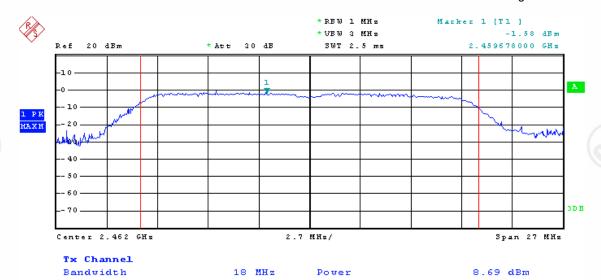

## High channel

# 802.11n HT40, MCS0:

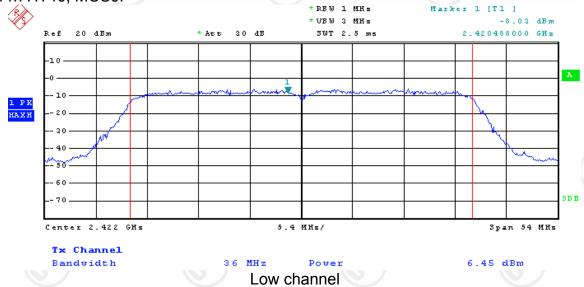


























Page 31 of 65 Report No.: EESZG06110003

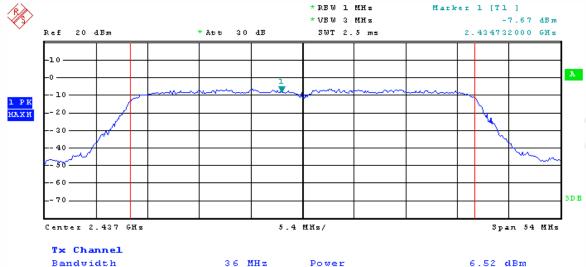

36 MHz Power Bandwidth Middle channel

\*RBW 1 MHz Marker 1 [T1 ] \*VBW 3 MHz -6.70 dBm Ref 20 dBm \* Att 30 dB 3WT 2.5 ms 2.455672000 GHz 1 PK HAXH Span 54 MHz Center 2.452 GHs 5.4 MHz/ Tx Channel





6.57 dBm



Bandwidth






#### 11. BAND EDGE EMISSION MEASUREMENT

#### **11.1. LIMITS**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

#### 11.2. BLOCK DIAGRAM OF TEST SETUP

For radiated emissions from 30 - 1000MHz

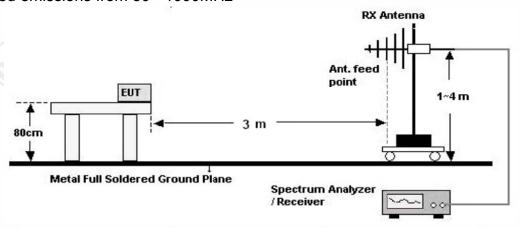

For radiated emissions from 1GHz to 25GHz

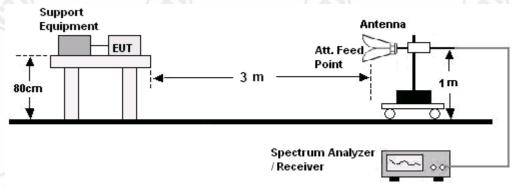





#### 11.3. TEST PROCEDURE

#### 30MHz ~ 1GHz:

- a. The product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### Above 1GHz:

- a. The product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, set 1MHz RBW. Record the maximum PK field strength in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### 11.4. TEST RESULT

Worst case data attached.---please see the following plots.









802.11b 1Mbps:

2412MHz:

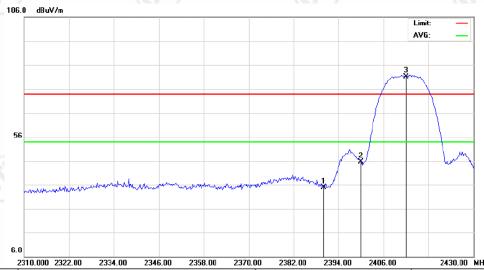


		2310.000 2322.00	2334.00	2346.00	2338.00	2370.00	J 2382.UU	2394	.00 2406.00	2430.00 MHZ		
_		Me	Measurement value				Limit			Antenna	Result	
Freque (MH:		PK (dBµV/	m)	(d	AV BµV/m)		PK (dBµV/m	1)	AV (dBµV/m)	(H/V)	(P/F)	
2390.0	000	34.36	3				74		54	H	Р	
2400.0	000	45.15	5	(0)			74		54	HC	Р	
2412.0	000	80.76	3							Н		

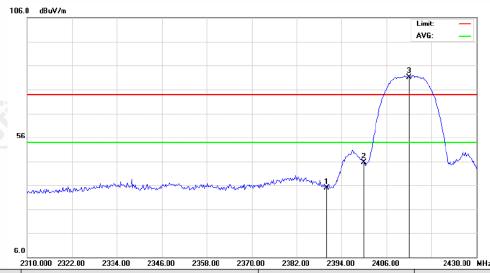


Frequency (MHz)	Measurement value		Limit		Antenna	Result
	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBμV/m)	(H/V)	(P/F)
2390.000	34.88		74	54	V	Р
2400.000	45.63		74	54	V	Р
2412.000	81.03				V	(






#### 2462MHz:

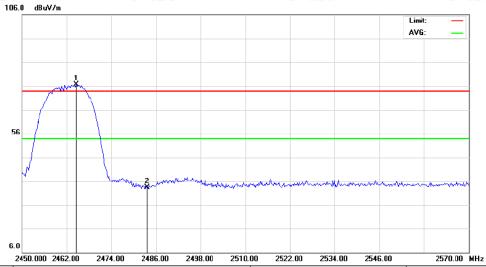

Frequency (MHz)	_	Measurement value		Limit		Antenna	Result
	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)	
	2483.500	33.39		74	54	Н	Р

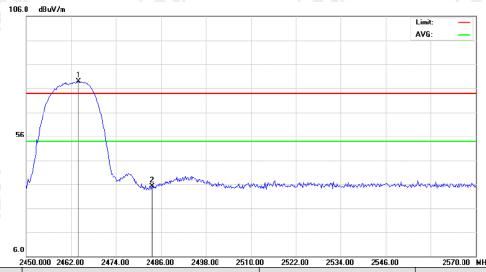


_	Measurement value		Limit		Antenna	Result
Frequency (MHz)	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2483.500	35.12		74	54	V	Р






802.11g, 6Mbps:

2412MHz:

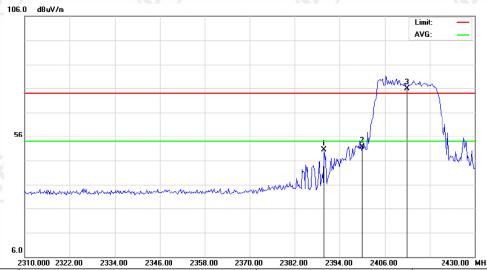

	Frequency (MHz)	Measurement value		Limit		Antenna	Result
		PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
	2390.000	50.28		74	54	Н	Р
	2400.000	51.71		74	54	Н	Р
	2412.000	75.99				Н	

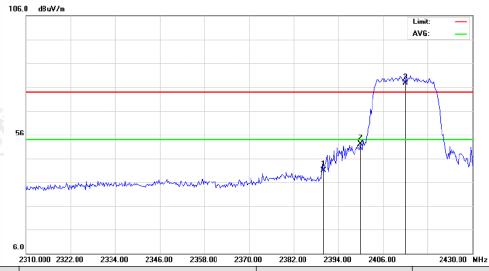


Eroguepov	Measurement value		Limit		Antenna	Result
Frequency (MHz)	PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2390.000	41.23		74	54	V	Р
2400.000	52.21		74	54	V	Р
2412.000	77.60				V	






#### 2462MHz:

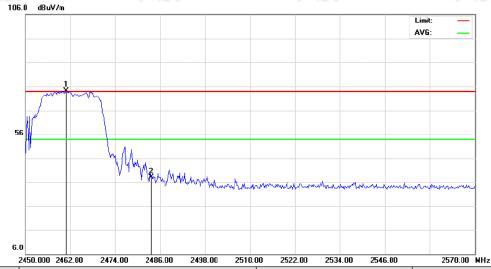

		2100.00 2100.00 2010.			2010:00 1:::2	
_	Measurement value		Li	mit	Antenna	Result
Frequency (MHz)	PK (dBμV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2483.500	38.25		74	54	Н	Р

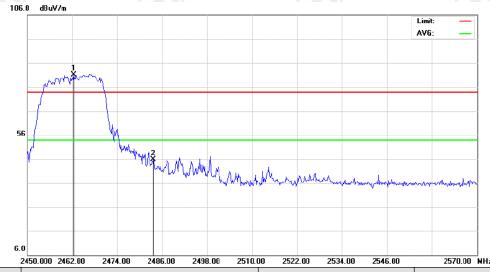


	2430.000 2402.00 2414.00	2400.00 2430.00 2310.0	30 2322.00 23.	34.00 2340.00	2310.00 14112	
_	Measure	Li	mit	Antenna	Result	
Frequency (MHz)	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2483.500	45.83		74	54	V	Р



Report No.: EESZG06110003 Page 38 of 65

802.11n HT20, MCS0:

2412MHz:

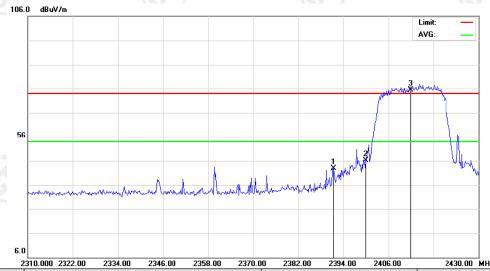

	2310.000 2322.00	2334.00	2346.00	2358.00	2370.00	J 2382.UU	J 2370.00 2382.00 2394.00 2406.00		2430.00 MHz	
Frequency	Measurement value			Limit			Antenna	Result		
(MHz)	PK (dBµV/	/m)	(d	AV BµV/m	)	PK (dBµV/n	n)	AV (dBµV/m)	(H/V)	(P/F)
2390.000	42.78	8				74		54	Н	Р
2400.000	46.0	7		)		74		54	Н	Р
2412.000	75.50	0				-10			Н	




Frequency	Measurement value		Li	mit	Antenna	Result
(MHz)	PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2390.000	47.67	<u> </u>	74	54	V	Р
2400.000	60.83		74	54	V	Р
2412.000	82.46				V	





#### 2462MHz:

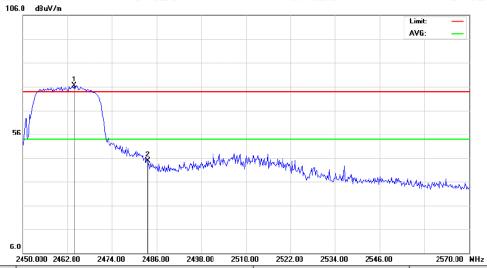

	E100.000 E10E.00 E111.00	2100.00 2100.00 2010.0		20 10.00	20.0.00 12		
_	Measurement value		Limit		Antenna	Result	
Frequency (MHz)	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)	
2483.500	44.81		74	54	Н	Р	



_		Measure		mit	Antenna	Result	
F	requency (MHz)	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	ΑV (dBμV/m)	(H/V)	(P/F)
2	2483.500	43.96		74	54	V	Р

E-mail:info@cti-cert.com


CENTRE TESTING INTERNATIONAL CORPORATION




Report No.: EESZG06110003 Page 40 of 65

802.11n HT40, MCS0:

2422MHz:

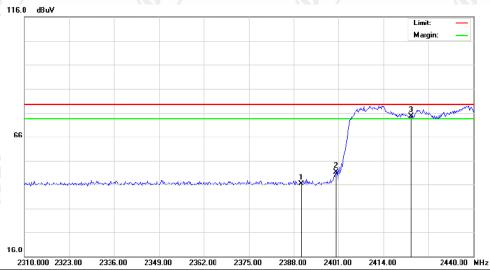

Frequency	Measurement value		Li	mit	Antenna	Result
(MHz)	PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2390.000	46.43		74	54	Н	Р
2400.000	51.31	()	74	54	Н	Р
2422.000	74.51	<u> </u>			Н	

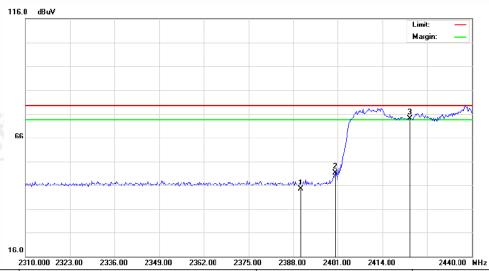

Frequency Measurer		ment value	nent value Lii		Antenna	Result
(MHz)	PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2390.000	44.44	<u> </u>	74	54	V	Р
2400.000	51.31		74	54	V	Р
2422.000	74.01				V	









Report No.: EESZG06110003 Page 41 of 65

#### 2452MHz:

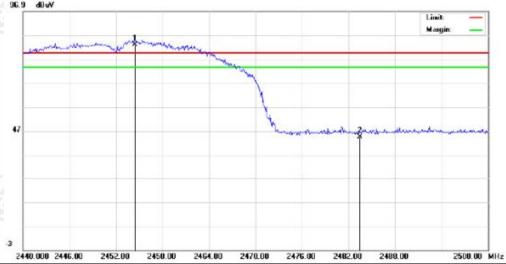

_	Measurement value		Limit		Antenna	Result
Frequency (MHz)	PK (dBµV/m)	ΑV (dBμV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2483.500	45.61		74	54	Н	Р

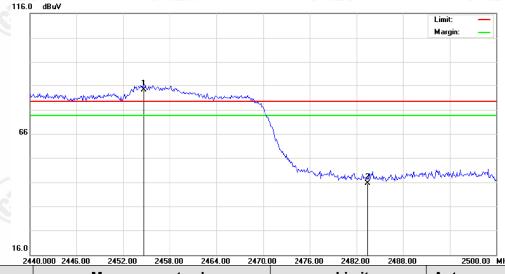

24-	40.000 2446.00 2452.00	2458.UU 2464.UU 247U.	<u>UU 2476.UU 24</u>	182.UU 2488.UU	2500.00 MHz	
_	Measure	Li	mit	Antenna	Result	
Frequency (MHz)	PK (dBµV/m)	AV (dBµV/m)	PK (dBµV/m)	AV (dBµV/m)	(H/V)	(P/F)
2483.500	45.28		74	54	V	Р

**Note:** The above plots show that the peak data of the frequencies which out of the operating band are all below the average limit, so the average data of these frequencies are deems to fulfill the average limits and not reported.






Report No.: EESZG06110003 Page 42 of 65

#### 12. SPURIOUS RF CONDUCTED EMISSIONS MEASUREMENT

#### **12.1. LIMITS**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 12.2. BLOCK DIAGRAM OF TEST SETUP




#### 12.3. TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
- 3. Record the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the product up through the 10<sup>th</sup> harmonic.

#### 12.4. TEST RESULT

Worst case data---Please see the following plots.

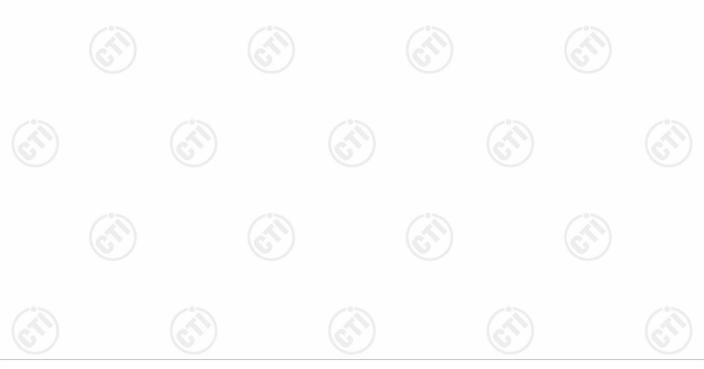











802.11b, 1Mbps:

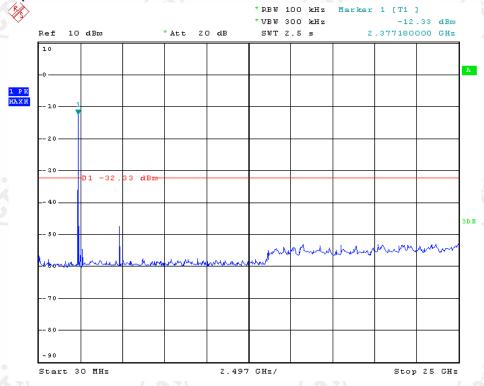

#### Low channel

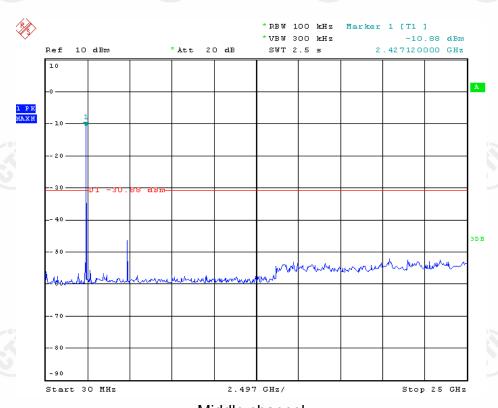










Stop 25 GHz




Report No.: EESZG06110003

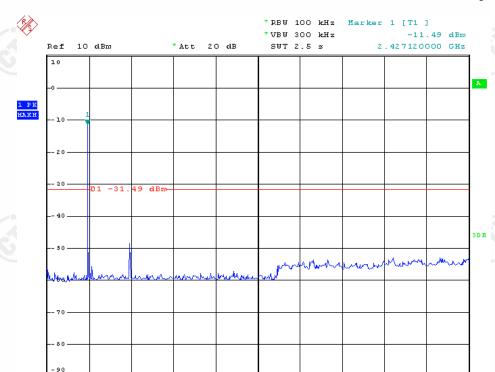

2.497 GHz/
High channel

# 802.11g, 6Mbps:

Start 30 MHz

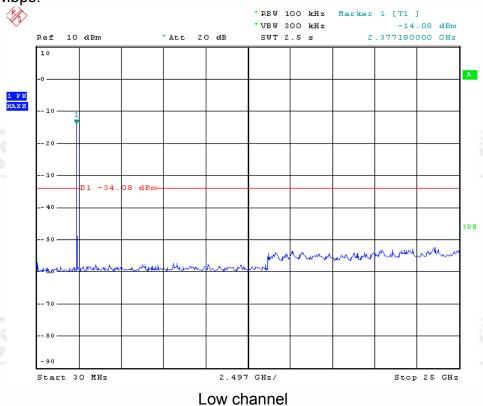















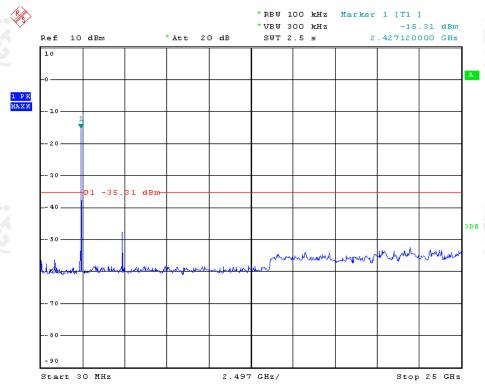

#### Middle channel

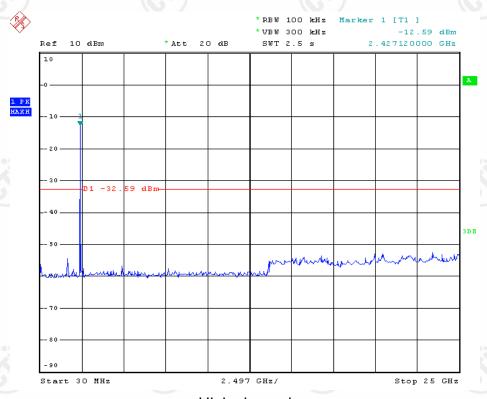

High channel













Report No.: EESZG06110003 Page 46 of 65

### 802.11n HT20, MCS0:

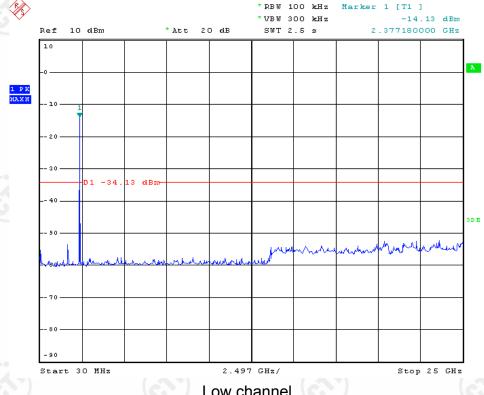


#### Low channel

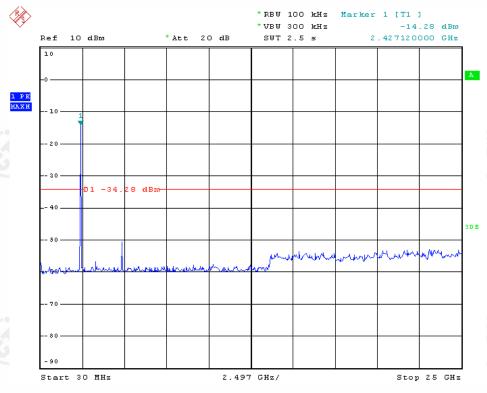






Page 47 of 65

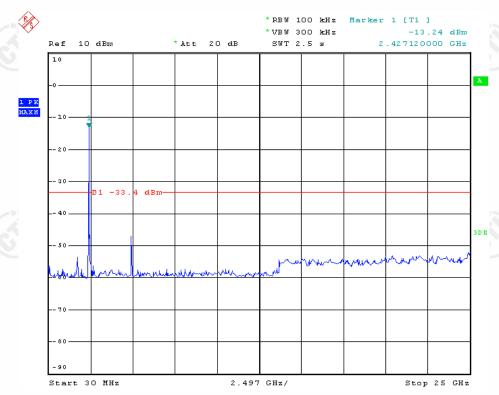

## High channel

### 802.11n HT40, MCS0:

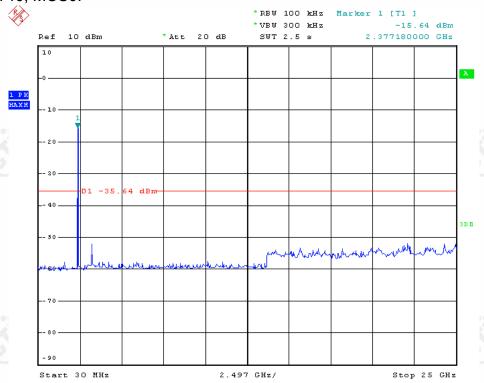













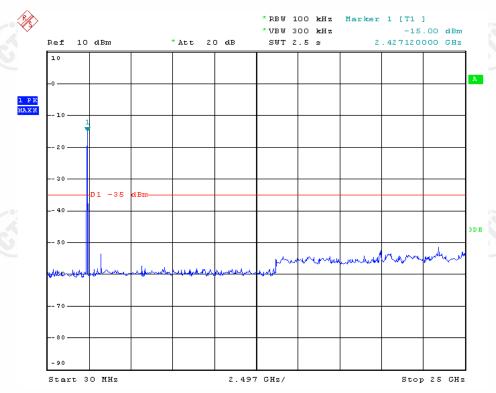

#### Middle channel

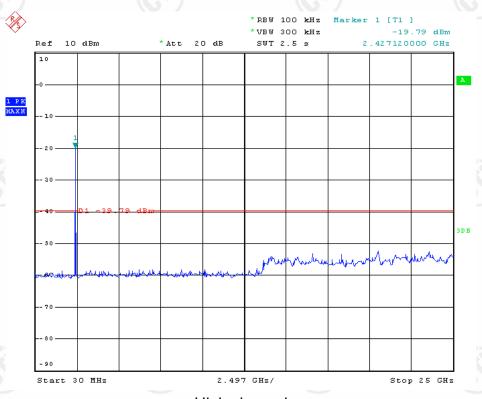

High channel





Report No.: EESZG06110003 Page 49 of 65

### 13. RADIATED EMISSIONS MEASUREMENT

#### **13.1. LIMITS**


The field strength of any emissions, which appear outside of operating frequency band and restricted band specified on 15.205(a), shall not exceed the general radiated emission limits as below.

<u> </u>		
Frequency (MHz)	Field strength (μV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Note:** the tighter limit applies at the band edges.


#### 13.2. BLOCK DIAGRAM OF TEST SETUP

For radiated emissions from 9kHz to 30MHz

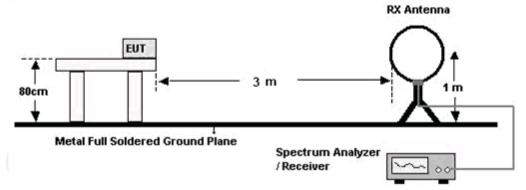

For radiated emissions from 30 - 1000MHz


CENTRE TESTING INTERNATIONAL CORPORATION

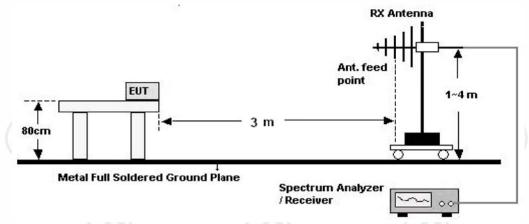



Report No.: EESZG06110003 Page 50 of 65

For radiated emissions from 1GHz to 25GHz

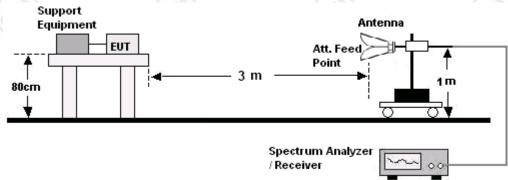

#### 13.3. TEST PROCEDURE

#### Below 30MHz:

- a. The product is placed on a turntable 0.8 meters above the ground in the chamber, 1 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- b. For each suspected emission, the product was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### 30MHz ~ 1GHz:

- a. The Product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value (120 kHz RBW): vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### Above 1GHz:

- a. The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees





#### 13.4. TEST RESULT

#### **Below 30MHz:**

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

#### Above 30MHz:

The test data of worst case are below:

IEEE 802.11b, 1Mbps:

Frequency (MHz)	Antenna Polarization (H / V)	Detector (PK / QP / AV)	Factor (dB)	Final Result (dBµV/m)	Limit (dBµV/m)	Result (Pass / Fail)
		Low chan	nel (2412N	lHz)		
335.550	Н	QP	17.77	37.57	46.0	Pass
359.800	Н	QP	18.43	40.33	46.0	Pass
*2412.000	H	PK	1.99	76.49	")	Pass
4824.000	Н	PK	6.97	47.36	74.0	Pass
359.800	V	QP	18.43	35.44	46.0	Pass
600.683	V	QP	23.51	38.75	46.0	Pass
*2412.000	V	PK	1.99	76.48	-(-(-)-)	Pass
4824.000	V	PK	6.97	47.49	74.0	Pass
<u>.</u>		Middle cha	nnel (2437	MHz)		•
359.800	Н	PK	18.43	40.45	46.0	Pass
*2437.000	H	PK	1.99	72.59	*)	Pass
4874.000	Н	PK	6.97	48.06	74.0	Pass
359.800	V	QP	18.43	35.49	46.0	Pass
600.683	V	QP	23.51	38.38	46.0	Pass
*2437.000	V	PK	1.99	70.20	-(-(-)-)	Pass
4874.000	V	PK	6.97	48.16	74.0	Pass
		High chan	nel (2462N	1Hz)		
359.800	Н	PK	18.43	40.76	46.0	Pass
*2462.000	H	PK	1.99	67.71		Pass
4924.000	Н	PK	6.97	47.14	74.0	Pass
359.800	V	QP	18.43	35.25	46.0	Pass
600.683	V	QP	23.51	39.36	46.0	Pass
*2462.000	V	PK	1.99	68.71	-(-(-(-)-)-	Pass
4924.000	V	PK	6.97	47.84	74.0	Pass

<sup>\*:</sup> fundamental frequency













IEEE 802.11a, 6Mbps:

IEEE 802.1				<u></u>					
Frequency (MHZ)	Antenna Polarization (H / V)	Detector (PK / QP / AV)	Factor (dB)	Final Result (dBµV/m)	Limit (dBµV/m)	Result (Pass / Fail)			
		Low cha	nnel (2412	MHz)					
335.550	Н	QP	17.77	37.92	46.0	Pass			
359.800	Н	QP	18.43	40.54	46.0	Pass			
*2412.000	Н	PK	1.99	73.58		Pass			
4824.000	Н	PK	6.97	48.29	74.0	Pass			
359.800	V	QP	18.43	36.85	46.0	Pass			
600.683	V	QP	23.51	39.35	46.0	Pass			
*2412.000	V	PK	1.99	69.91		Pass			
4824.000	V	PK	6.97	47.50	74.0	Pass			
:		Middle ch	annel (243	7MHz)		(:5)			
359.800	Н	PK	18.43	41.02	46.0	Pass			
*2437.000	Н	PK	1.99	69.09		Pass			
4874.000	Н	PK	6.97	48.34	74.0	Pass			
359.800	V	QP	18.43	34.12	46.0	Pass			
600.683	V	QP	23.51	37.58	46.0	Pass			
*2437.000	V	PK	1.99	69.18		Pass			
4874.000	V	PK	6.97	47.85	74.0	Pass			
:	(3)	High cha	annel (2462	MHz)					
359.800	Н	PK	18.43	41.84	46.0	Pass			
*2462.000	Н	PK	1.99	69.84		Pass			
4924.000	Н	l PK		48.24	74.0	Pass			
359.800	V	QP	18.43 34.22		46.0	Pass			
600.683 V		QP	23.51	36.28	46.0	Pass			
*2462.000	V	PK	1.99	67.79		Pass			
4924.000	V	PK	6.97	48.47	74.0	Pass			
		i		1					

<sup>\*:</sup> fundamental frequency

























IEEE 802 11n HT20 MCS0:

Frequency (MHZ)	Antenna Polarization (H / V)	Detector (PK / QP / AV)	Factor (dB)	Final Result (dBµV/m)	Limit (dBµV/m)	Result (Pass / Fail)	
		Low cha	annel (2412	MHz)			
335.550	Н	QP	17.77	37.36	46.0	Pass	
359.800	Н	QP	18.43	40.28	46.0	Pass	
*2412.000	Н	PK	1.99	72.33		Pass	
4824.000	Н	PK	6.97	48.08	74.0	Pass	
359.800	V	QP	18.43	35.98	46.0	Pass	
600.683	V	QP	23.51	37.28	46.0	Pass	
*2412.000	V	PK	1.99	66.00		Pass	
4824.000	V	PK	6.97	47.81	74.0	Pass	
2		Middle cl	nannel (243	37MHz)			
359.800	H	PK	18.43	40.74	46.0	Pass Pass	
*2437.000	Н	PK	1.99	69.56			
4874.000	Н	PK	6.97	47.92	74.0	Pass	
359.800	V	QP	18.43	34.13	46.0	Pass	
600.683	V	QP	23.51	37.28	46.0	Pass	
*2437.000	V	PK	1.99	68.45		Pass	
4874.000	V	PK	6.97	47.91	74.0	Pass	
27		High ch	annel (2462	2MHz)			
359.800	Н	PK	18.43	41.27	46.0	Pass	
*2462.000	Н	PK	1.99	71.89		Pass	
4924.000	Н	PK	6.97	48.71	74.0	Pass	
359.800	V	V QP 18.43 35.76 46.0		Pass			
600.683	V QP 23.51 38.10 46.0		46.0	Pass			
*2462.000	V	PK					
4924.000	V	PK	6.97	48.66	74.0	Pass	

<sup>\*:</sup> fundamental frequency























Report No.: EESZG06110003 Page 54 of 65

### IEEE 802.11n HT40, MCS0:

Frequency (MHZ)	Antenna Polarization (H / V)	Detector (PK / QP / AV)	Factor Final Result (dB) (dBµV/m)		Limit (dBµV/m)	Result (Pass / Fail)	
		Low cha	annel (2422	PMHz)			
335.550	Н	QP	17.77	37.48	46.0	Pass	
359.800	НС	QP	18.43	40.63	46.0	Pass	
*2422.000	Н	PK	1.99	71.25		Pass	
4844.000	Н	PK	6.97	48.13	74.0	Pass	
359.800	V	QP	18.43	35.27	46.0	Pass	
600.683	V	QP	23.51	37.39	46.0	Pass	
*2422.000	V	PK	1.99	64.26		Pass	
4844.000	V	PK	6.97	48.19	74.0	Pass	
		Middle cl	nannel (243	B7MHz)			
359.800	н	PK	18.43	40.85	46.0	Pass	
*2437.000	Н	PK	1.99	71.49		Pass	
4874.000	Н	PK	6.97 18.43	48.28	74.0	Pass	
359.800	V	QP		35.06	46.0	Pass	
600.683	V	QP	23.51	37.22	46.0	Pass	
*2437.000	V	PK	1.99	64.02		Pass	
4874.000	V	PK	6.97	48.34	74.0	Pass	
		High ch	annel (2452	2MHz)			
359.800	Н	PK	18.43	40.93	46.0	Pass	
*2452.000	Н	PK	1.99	70.15		Pass	
4904.000	Н	PK	6.97	48.62	74.0	Pass	
359.800	V	QP	18.43	35.13	46.0	Pass	
600.683 V		QP	23.51	37.45	46.0	Pass	
*2452.000	V	PK	1.99	63.15		Pass	
4904.000	V	PK	6.97	47.58	74.0	Pass	

<sup>\*:</sup> fundamental frequency

### Remark:

- 1. The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deems to fulfill the average limits and not reported.
- 2. According to the emissions below 18GHz, the data curve is lower than the limit, and the data between 18GHz to 25GHz will be lower than the limit, so they are not recorded in the report.
- 3. All outside of operating frequency band and restricted band specified are below 15.209.















### 14. CONDUCTED EMISSION TEST

#### **14.1. LIMITS**

Limits for Class B digital devices


Frequency range	Limits dB(μV)						
(MHz)	Quasi-peak	Average					
0,15 to 0,50	66 to 56	56 to 46					
0,50 to 5	56	46					
5 to 30	60	50					

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

#### 14.2. BLOCK DIAGRAM OF TEST SETUP

CENTRE TESTING INTERNATIONAL CORPORATION

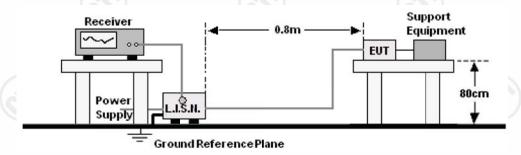

#### 14.3. PROCEDURE OF CONDUCTED EMISSION TEST

- a. The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.










Report No.: EESZG06110003 Page 56 of 65

# 14.4. GRAPHS AND DATA

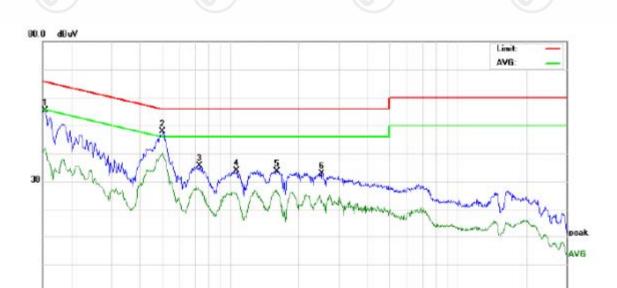

Site site #1

-20 0.150

Limit: FCC Conducted Emission

0.5

EUT: WIFI Digital Microscope

M/N: 738W Mode: WIFI Note:

No.	I PRODUKT <b>#</b> NOTE TO STATE OF THE PRODUCT OF THE PRODU		(dBuV	urement BuV)		Limit (dBuV)		Margin (dB)						
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1539	45.68	33.36	20.80	9.75	55.43	43.11	30.55	65.78	55.78	-22.67	-25.23	Р	
2	0.5060	38.17	34.94	29.57	9.80	47.97	44.74	39.37	56.00	46.00	-11.26	-6.63	Р	
3	0.7339	25.95	20.98	16.38	9.80	35.75	30.78	26.18	56.00	46.00	-25.22	-19.82	Р	
4	1.0660	23.95	18.97	14.31	9.81	33.76	28.78	24.12	56.00	46.00	-27.22	-21.88	Р	
5	1.6100	23.69	19.88	15.09	9.86	33.55	29.74	24.95	56.00	46.00	-26.26	-21.05	Р	
6	2.5178	22.85	17.75	12.22	9.92	32.77	27.67	22.14	56.00	46.00	-28.33	-23.86	Р	

(MHz)

L

AC 120V/60Hz

Phase:

Power:











30.000

56 %

Temperature:

Humidity:
















Humidity:

56 %



Report No.: EESZG06110003

Page 57 of 65

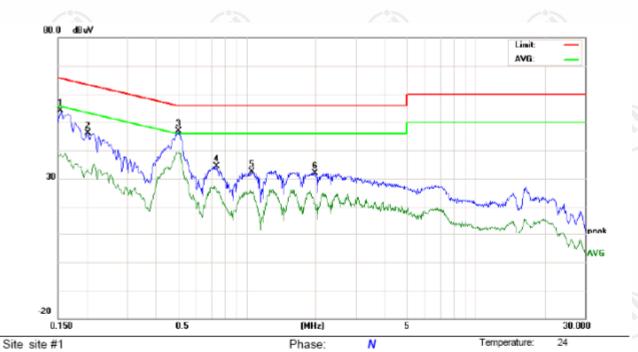

AC 120V/60Hz

Limit: FCC Conducted Emission

EUT: WIFI Digital Microscope

M/N: 738W Mode: WIFI Note:

Reading_Level No. Freq. (dBuV)							Lin (dB		Margin (dB)					
	MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F	Comment
1	0.1539	44.31	42.12	28.80	9.75	54.06	51.87	38.55	65.78	55.78	-13.91	-17.23	Ρ	
2	0.2020	36.41	34.41	22.73	9.80	46.21	44.21	32.53	63.52	53.52	-19.31	-20.99	Р	
3	0.5020	37.09	34.56	29.33	9.80	46.89	44.36	39.13	56.00	46.00	-11.64	-6.87	Р	
4	0.7420	24.70	20.87	16.13	9.80	34.50	30.67	25.93	56.00	46.00	-25.33	-20.07	Р	
5	1.0540	22.44	19.42	14.85	9.81	32.25	29.23	24.66	56.00	46.00	-26.77	-21.34	Р	
6	1.9900	22.05	17.24	9.47	9.90	31.95	27.14	19.37	56.00	46.00	-28.86	-26.63	Р	

Power:





Report No.: EESZG06110003 Page 58 of 65

# **APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**



**TEST SETUP OF RADIATED EMISSION (30MHz-1GHz)** 



TEST SETUP OF RADIATED EMISSION (above 1GHz)



















Page 59 of 65



TEST SETUP OF CONDUCTED EMISSION
































































Report No.: EESZG06110003 Page 60 of 65

# **APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT**

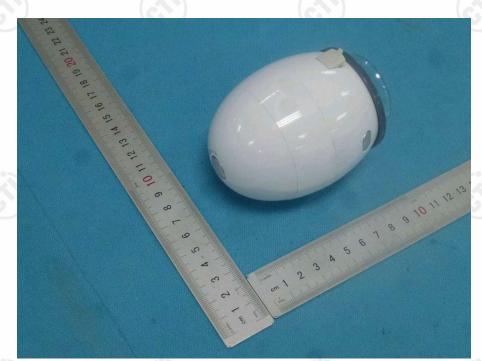

External View of product-1



External View of product-2





















External View of product-3



External View of product-4



















Report No.: EESZG06110003 Page 62 of 65

# **APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT**



Internal View of product-1



Internal View of product-2

























Internal View of product-4





















Internal View of product-5



Internal View of product-6






















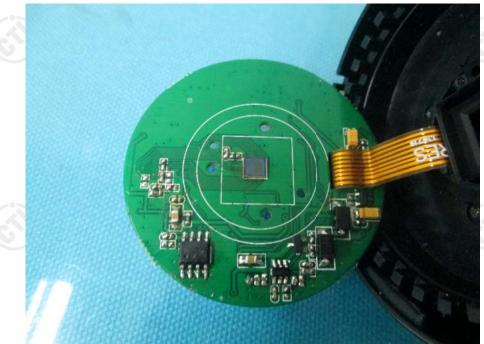

Internal View of product-7





































# \*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.









