



FCC PART 15 CLASS B MEASUREMENT AND TEST REPORT

For

ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, Florida, United States

FCC ID: YPVITALCOMTIKX2

Report Type: **Product Type:** Mobile Phone Original Report Jimmy xiao **Test Engineer:** Jimmy Xiao **Report Number:** RSZ111202006-00C **Report Date:** 2012-02-21 Merry Zhao **Reviewed By:** EMC Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building **Test Laboratory:** ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

^{*} This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "\(\nstructure \)" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	5
Printer	5
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	
EMI TEST RECEIVER SETUP.	9
TEST EQUIPMENT LIST AND DETAILS	9
TEST PROCEDURE	9
TEST RESULTS SUMMARY	9
Test Data	9
FCC §15.109 - RADIATED EMISSIONS	12
MEASUREMENT UNCERTAINTY	
EUT SETUP	12
EMI TEST RECEIVER SETUP.	
Test Procedure	
LEST LKOCEDAKE	
	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ITALCOM GROUP*'s product, model number: *tikx2 (FCC ID: YPVITALCOMTIKX2)* or the "EUT" in this report is a *Mobile Phone*, which was measured approximately: 11.5 cm (L) x 6.1 cm (W) x 1.3 cm (H), rated input voltage: DC 3.7 V battery or DC 5.0V from adapter for charging. The highest EUT operating frequency is 468 MHz.

Report No.: RSZ111202006-00C

Adapter Information: MODELO: tlkx2

ENTRADA: 100-240VAC 50/60 Hz 0.15A

SALIDA: 5.0V 500mA

* All measurement and test data in this report was gathered from production sample serial number: 1111086 (Assigned by BACL, Shenzhen). The EUT was received on 2011-12-02.

Objective

This report is prepared on behalf of *ITALCOM GROUP* in accordance with Part 2, Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 Class B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS (Bluetooth), 15.247 DTS (WiFi) and 22H&24E PCE submissions with FCC ID: YPVITALCOMTIKX2

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15 Class B Page 3 of 15

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).

NVLAP Lab Code: 200707-0

The current scope of accreditations can be found at http://ts.nist.gov/Standards/scopes/2007070.htm

FCC Part 15 Class B Page 4 of 15

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical mode which is provided by manufacture.

Report No.: RSZ111202006-00C

EUT Exercise Software

Software "WINPHRAX" was used.

Equipment Modifications

No modification was made to the unit tested.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Host PC	DCSCSF	127BP2X
IBM	CRT monitor	6737-66N	23-P3242
DELL	Mouse 1#	MOC5UO	G1B0096D
DELL	Keyboard 1#	L100	CNORH656658907BL04TY
НР	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293


External I/O Cable

Cable Description	Length (m)	From/Port	То
Shielded Detachable USB Keyboard Cable	1.5	Keyboard Port/Host	Keyboard
Shielded Detachable USB Cable	1.5	Mouse Port/Host	Mouse
Shielded Detachable Serial Cable	1.5	Serial Port/Host	Modem
Shielded Detachable Printer Cable	1.5	Parallel Port / Host	Printer
Shielded Detachable VGA Cable	1.5	VGA Port/Host	Monitor
Shielded Detachable USB Cable	1.0	EUT	PC


FCC Part 15 Class B Page 5 of 15

Report No.: RSZ111202006-00C

Configuration of Test Setup

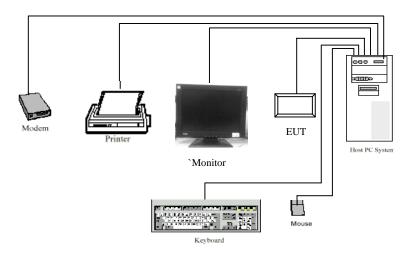

Block Diagram of Test Setup

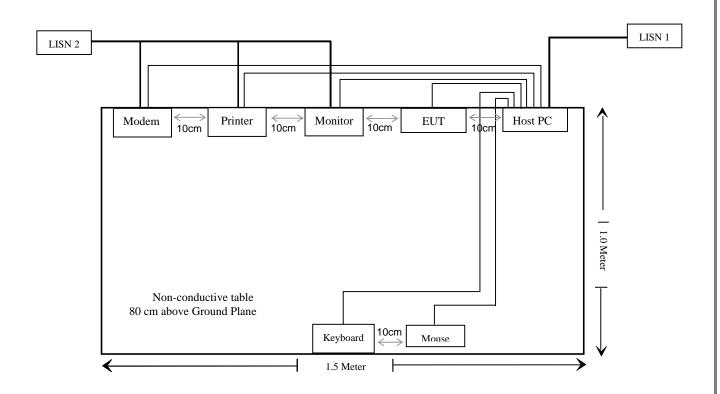

FCC Part 15 Class B Page 6 of 15

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

Report No.: RSZ111202006-00C

FCC Part 15 Class B Page 7 of 15

FCC §15.107 – AC LINE CONDUCTED EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 2.4 dB.(k=2, 95% level of confidence)

Report No.: RSZ111202006-00C

EUT Setup

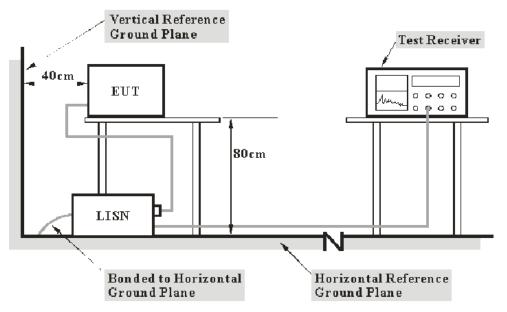

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

FCC Part 15 Class B Page 8 of 15

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Report No.: RSZ111202006-00C

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2011-07-08	2012-07-07

^{*} **Statement of Traceability:** Bay Area Compliance Laboratory Corp. attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the PC was connected to the outlet of the first LISN and the other relevant support equipments were connected to the outlet of the second LISN

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.107</u>, with the worst margin reading of:

20.64 dB at 0.185 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2011-12-12.

FCC Part 15 Class B Page 9 of 15


Test Mode: Downloading AC 120V/60 Hz, Line

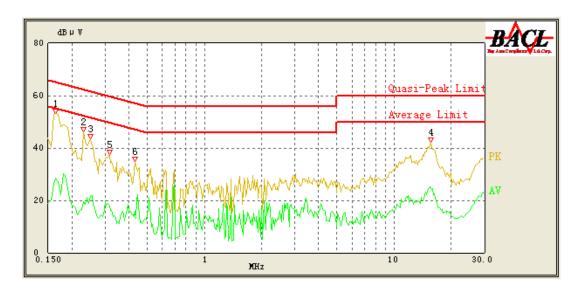

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/ QP/Ave.)
15.520	25.04	11.45	50.00	24.96	Ave.
15.560	34.86	11.45	60.00	25.14	QP
0.250	36.73	10.23	63.14	26.41	QP
0.230	37.07	10.23	63.71	26.64	QP
0.165	28.48	10.23	55.57	27.09	Ave.
0.315	30.54	10.23	61.29	30.75	QP
0.165	34.81	10.23	65.57	30.76	QP
0.430	26.49	10.23	58.00	31.51	QP
0.250	21.48	10.23	53.14	31.66	Ave.
0.430	16.00	10.23	48.00	32.00	Ave.
0.315	18.33	10.23	51.29	32.96	Ave.
0.230	19.41	10.23	53.71	34.30	Ave.

FCC Part 15 Class B Page 10 of 15

AC 120V/60 Hz, Neutral

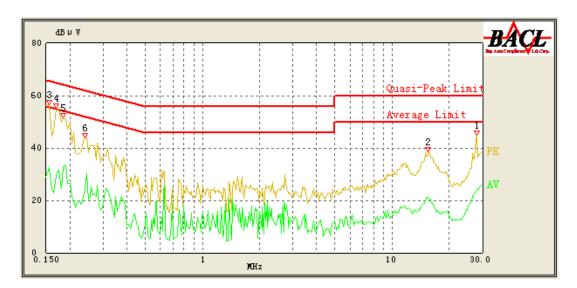

Report No.: RSZ111202006-00C

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/ QP/Ave.)
0.185	44.36	10.23	65.00	20.64	QP
0.185	32.67	10.23	55.00	22.33	Ave.
0.155	32.44	10.23	55.86	23.42	Ave.
0.155	41.23	10.23	65.86	24.63	QP
0.240	38.45	10.23	63.43	24.98	QP
0.170	39.69	10.23	65.43	25.74	QP
0.170	29.49	10.23	55.43	25.94	Ave.
27.925	23.80	12.82	50.00	26.20	Ave.
15.480	21.03	11.45	50.00	28.97	Ave.
0.240	24.09	10.23	53.43	29.34	Ave.
15.500	30.47	11.45	60.00	29.53	QP
27.875	27.72	12.81	60.00	32.28	QP

FCC Part 15 Class B Page 11 of 15

FCC §15.109 - RADIATED EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RSZ111202006-00C

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. (k=2, 95% level of confidence)

EUT Setup

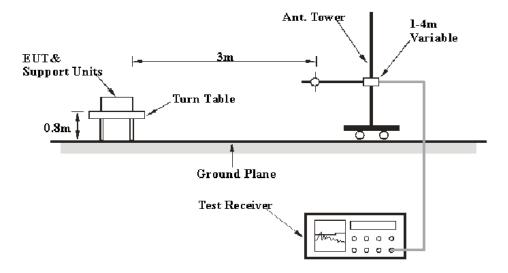

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

FCC Part 15 Class B Page 12 of 15

EMI Test Receiver Setup

The system was investigated from 30 MHz to 2000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Report No.: RSZ111202006-00C

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 2 GHz	1 MHz	3 MHz	PK
1000 MHz – 2 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emissions test, the host PC and all the other relevant equipments were connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp (Shenzhen). attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15 Class B Page 13 of 15

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

Report No.: RSZ111202006-00C

5.6 dB at 239.587500 MHz in the Horizontal polarization

Test Data


Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jimmy Xiao on 2011-12-12.

Test Mode: Downloading

1) 30MHz-1000MHz:



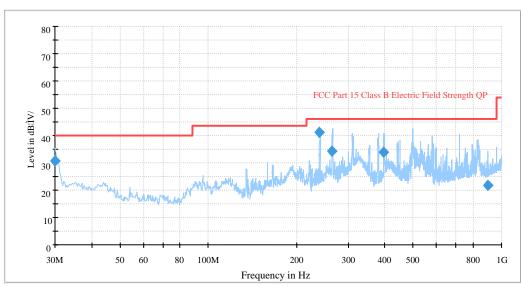

FCC Part 15 Class B Page 14 of 15

Report No.: RSZ111202006-00C

Note: 1-2 GHz: The data which below the limit 20dB was not recorded.

***** END OF REPORT *****

FCC Part 15 Class B Page 15 of 15