

Frequency stability test

No.1-8972-24-01-02_TR1-A201-R1

January 08, 2025

Test Standard(s)

Systems FCC.ISED - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Stephan Thiel
Testing Manager
Radio Labs

Systems FCC.ISED # Frequency stability over temperature & voltage ~ TID0056_1-8972-24-01-02_EUT_1_Freq_stability_FCC 116000-123000 MHz

References

TC start	06.01.2025 12:47:10
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	Systems FCC.ISED NI
Method	
Description	Systems FCC ISED Freq stability over temp/volt
Information	

Equipment

Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101332,5.30SP1
Power supply,Agilent Technologies,N5767A,US14J1569P,B.00.06,REV:F
Climatic box,CTS,T-40/50,064023,LAN


Test Parameter

EUT port	
Temperature	var
Voltage	var
Auto control enabled power supply Climatic Box	Yes Yes
Full path type	
Full path name	
Switch bits	

Test for temperature[°C]: 20 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

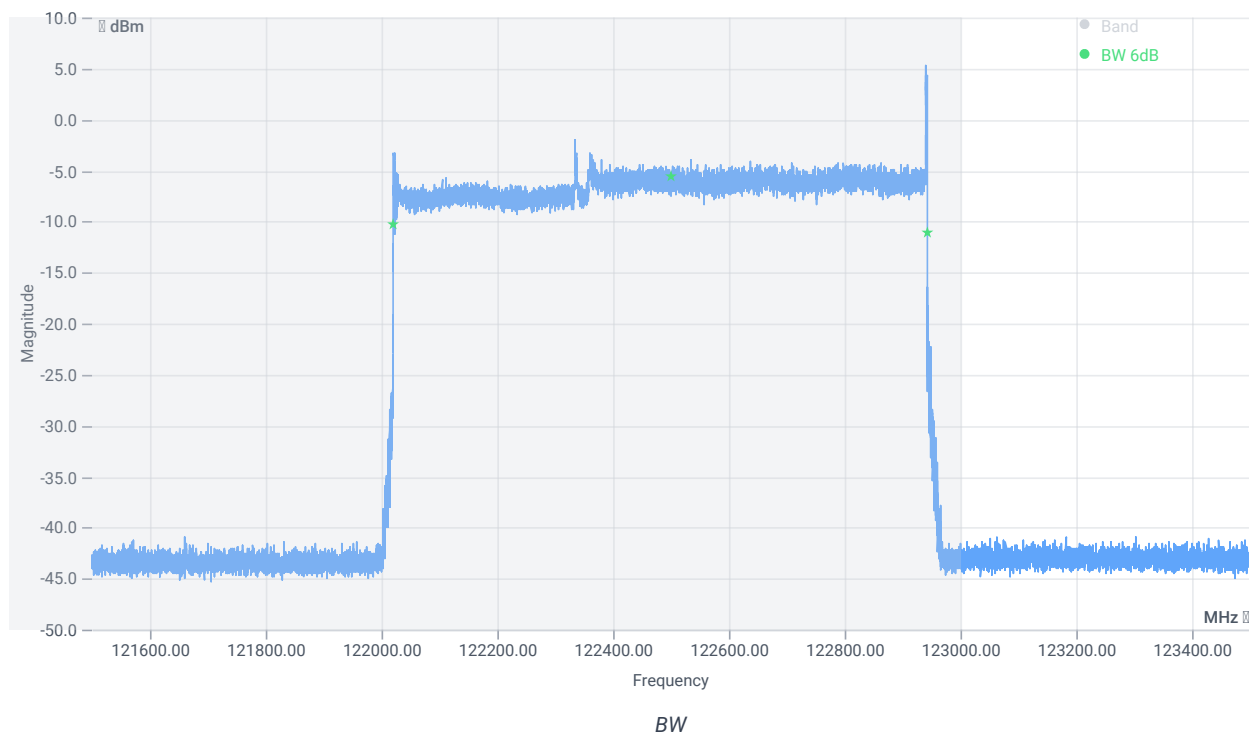


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.8	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122020.4000	MHz	PASS
T2 6dB	---	123000	122942.2000	MHz	PASS

Test for temperature[°C]: 20 | voltage [V]: 20.4

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

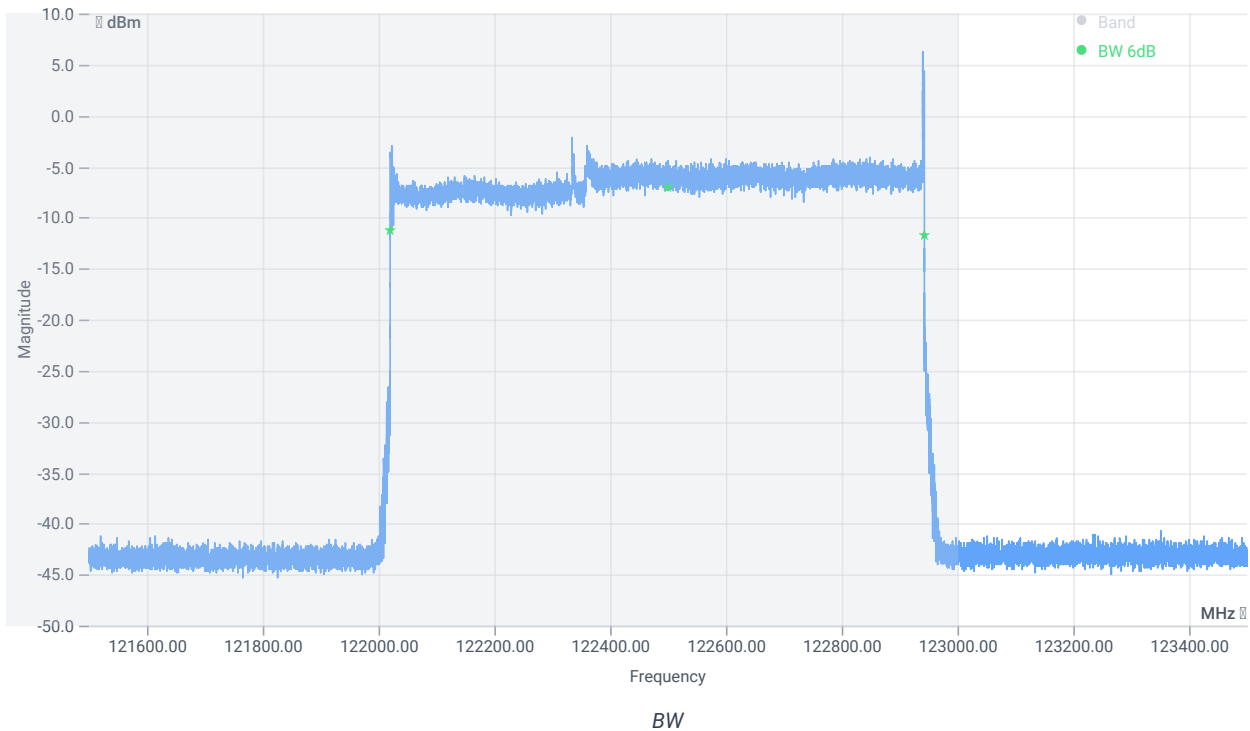


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.7	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122020.3000	MHz	PASS
T2 6dB	---	123000	122942.0000	MHz	PASS

Test for temperature[°C]: 20 | voltage [V]: 27.6

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

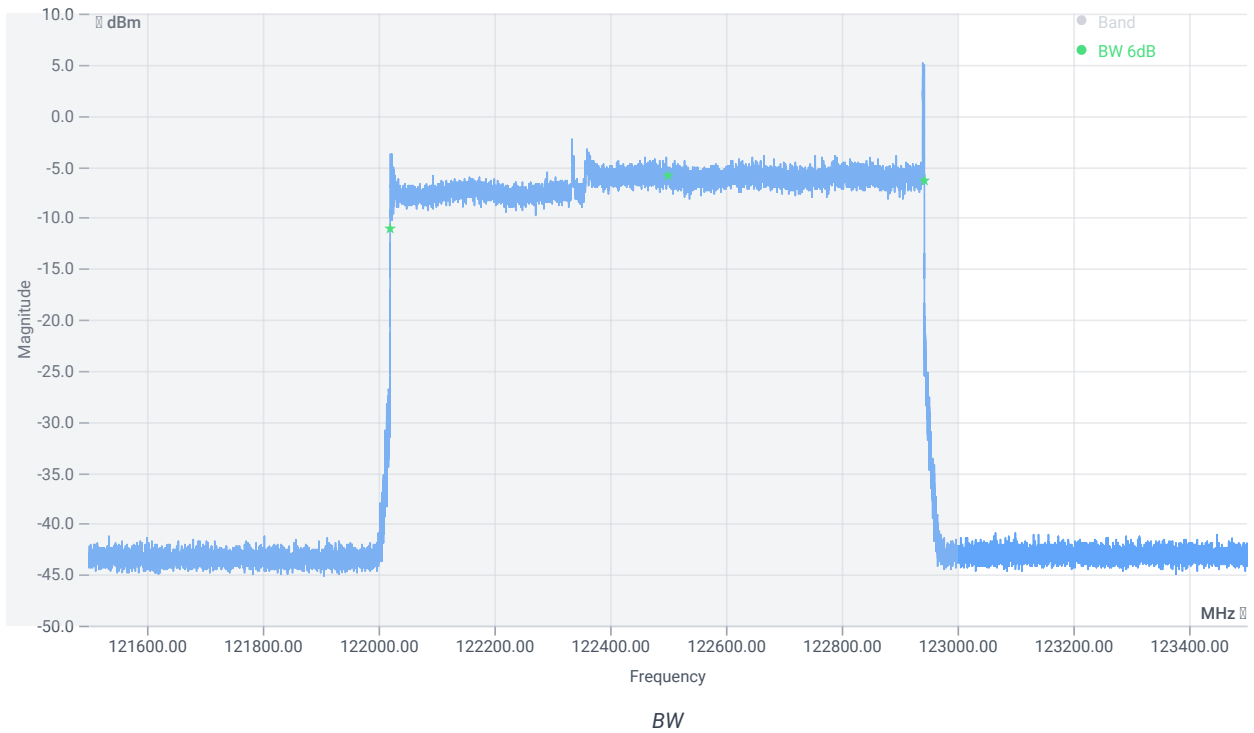


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.6	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122020.4000	MHz	PASS
T2 6dB	---	123000	122942.0000	MHz	PASS

Test for temperature[°C]: -20 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

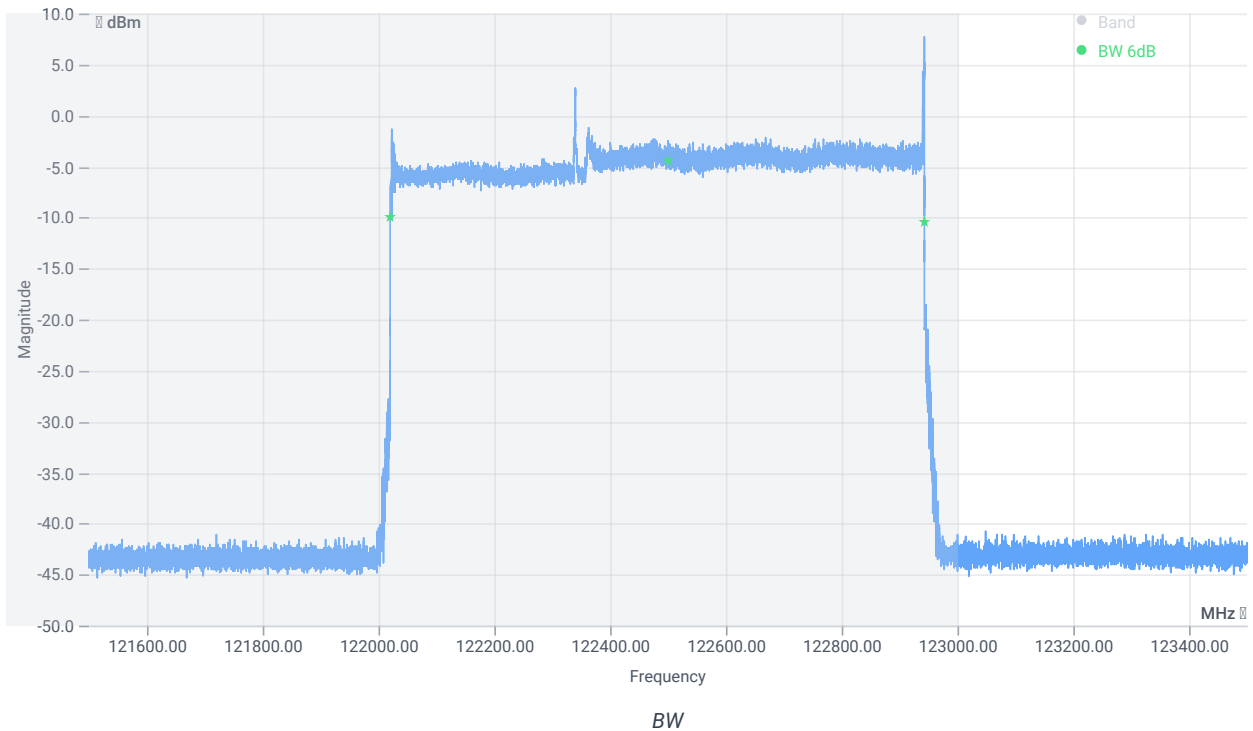


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.9	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122021.2000	MHz	PASS
T2 6dB	---	123000	122943.1000	MHz	PASS

Test for temperature[°C]: -10 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

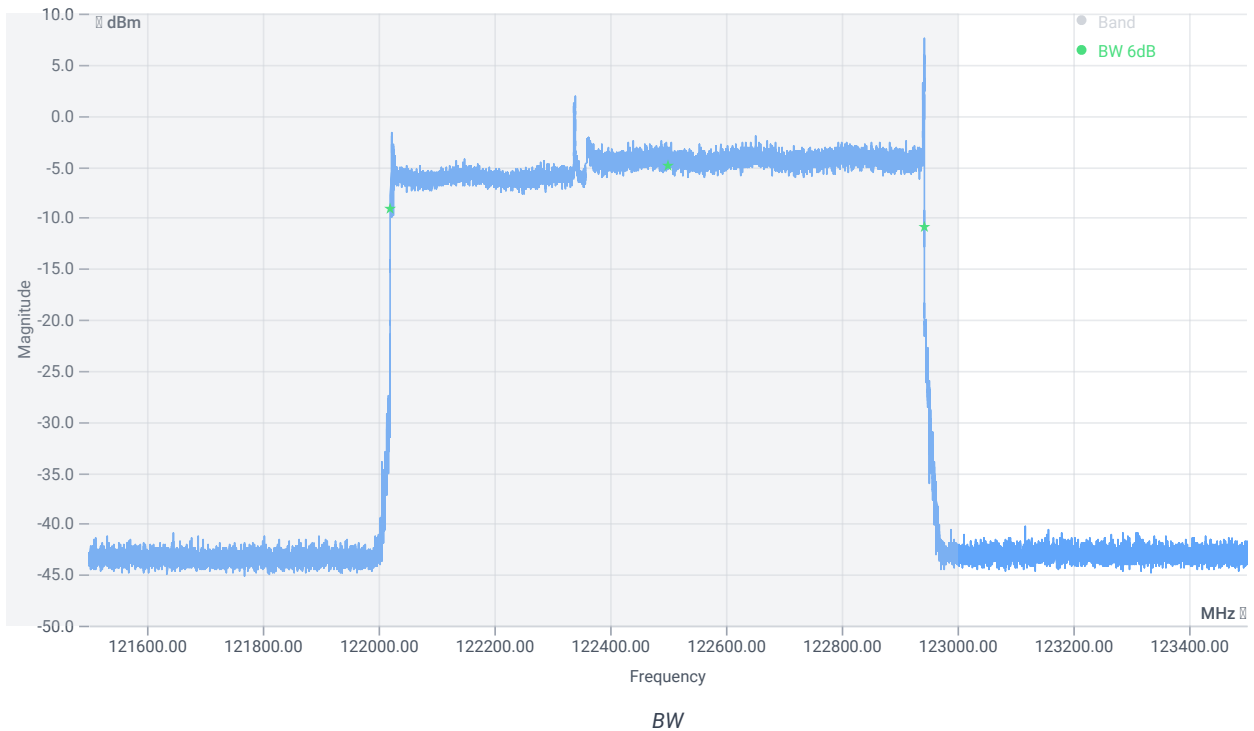


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.8	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122021.3000	MHz	PASS
T2 6dB	---	123000	122943.1000	MHz	PASS

Test for temperature[°C]: 0 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

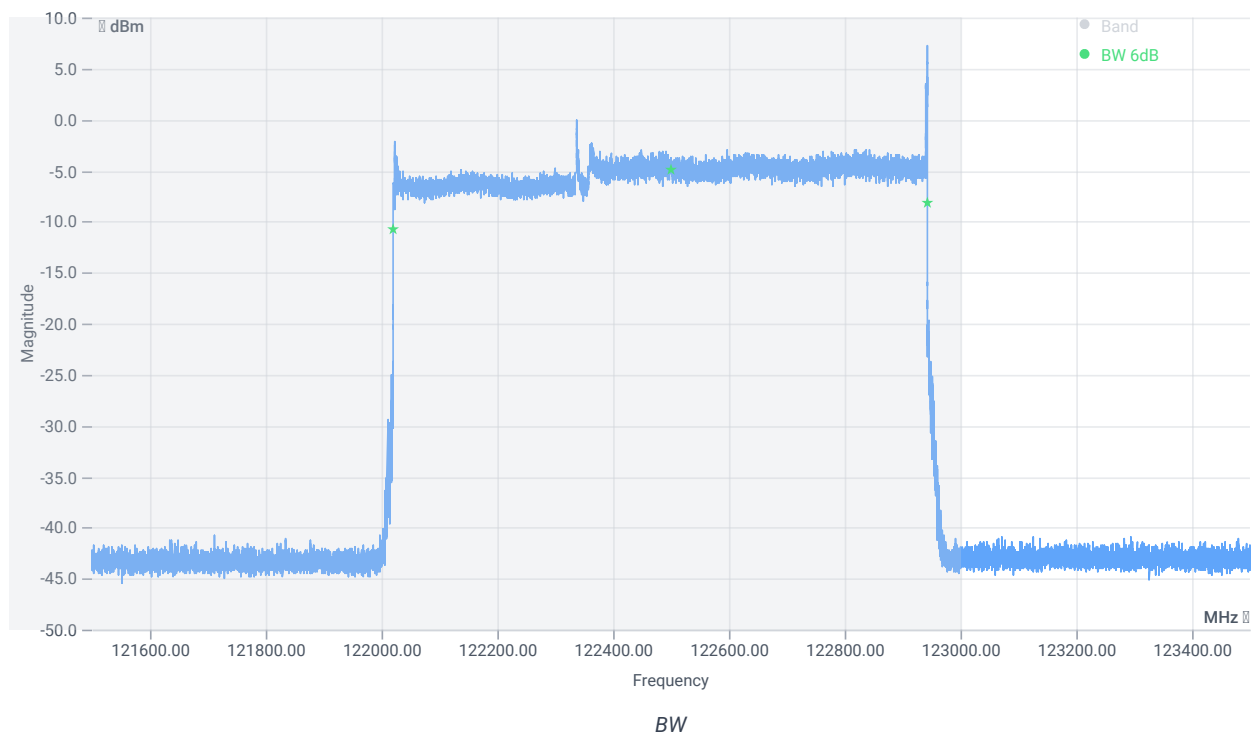


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.8	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122021.0000	MHz	PASS
T2 6dB	---	123000	122942.8000	MHz	PASS

Test for temperature[°C]: 10 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

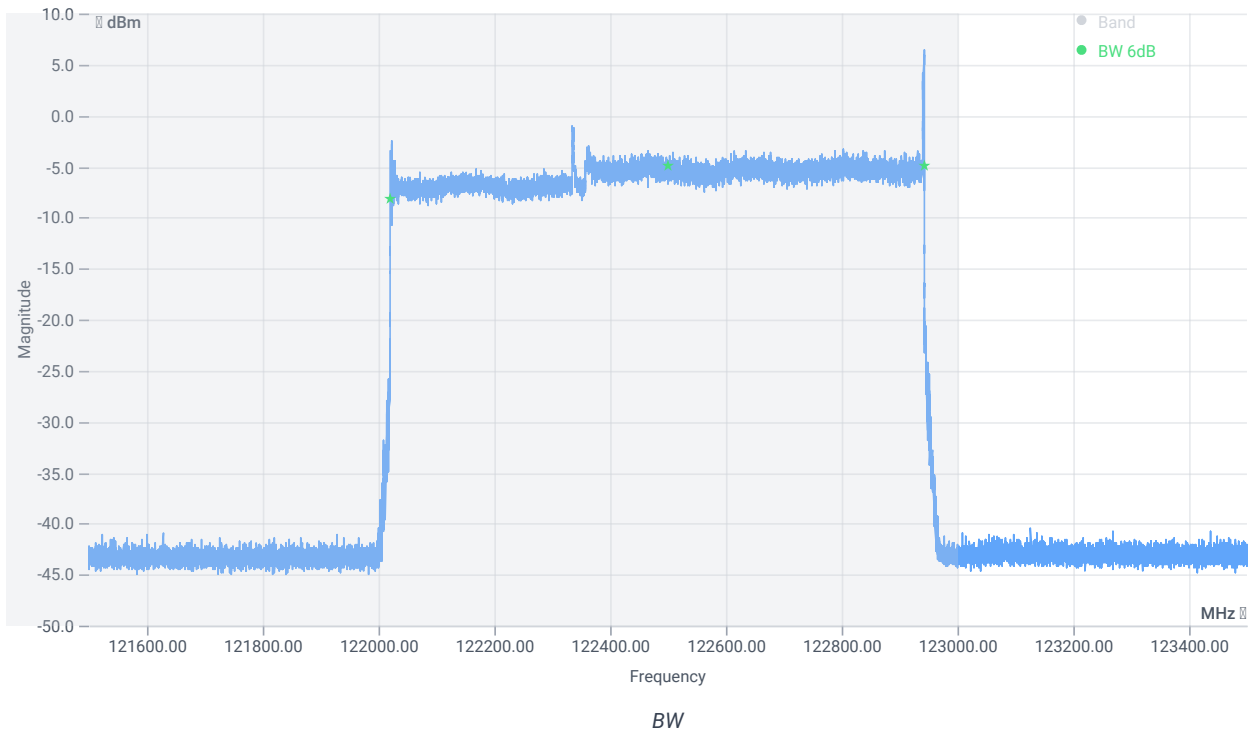


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.5	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122020.8000	MHz	PASS
T2 6dB	---	123000	122942.3000	MHz	PASS

Test for temperature[°C]: 20 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

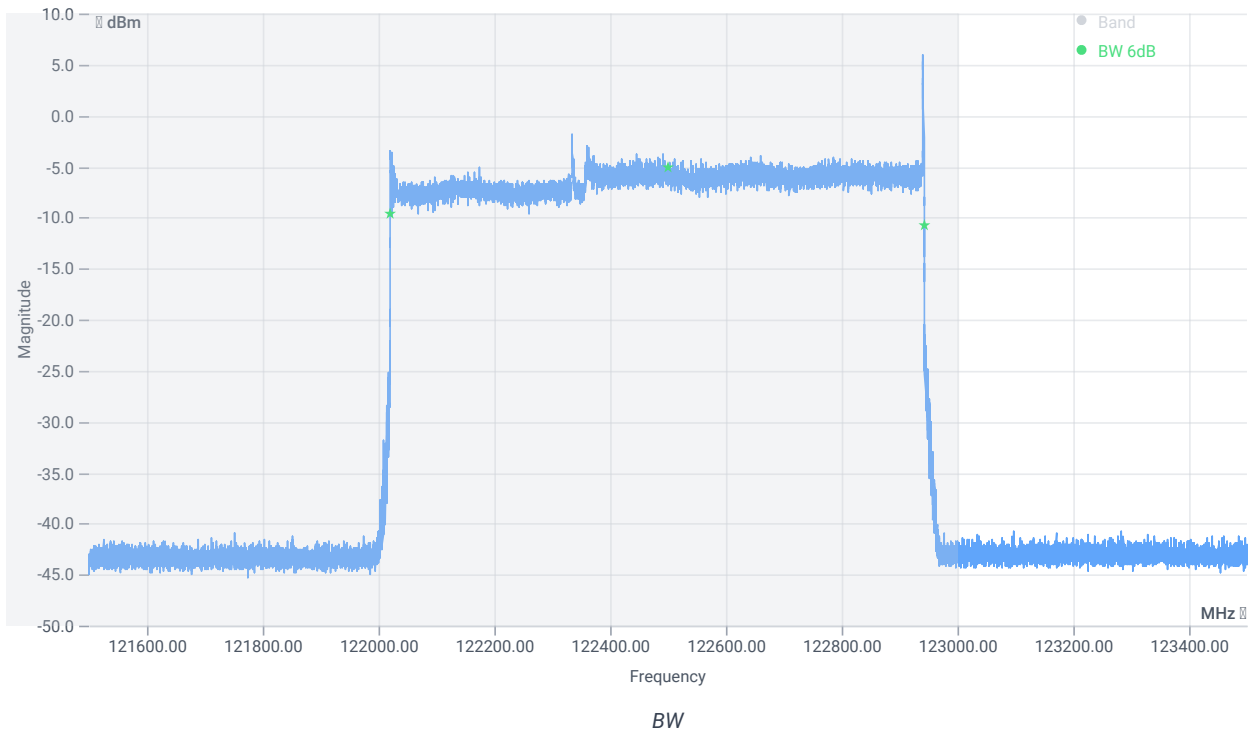


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.6	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122020.3000	MHz	PASS
T2 6dB	---	123000	122941.9000	MHz	PASS

Test for temperature[°C]: 30 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

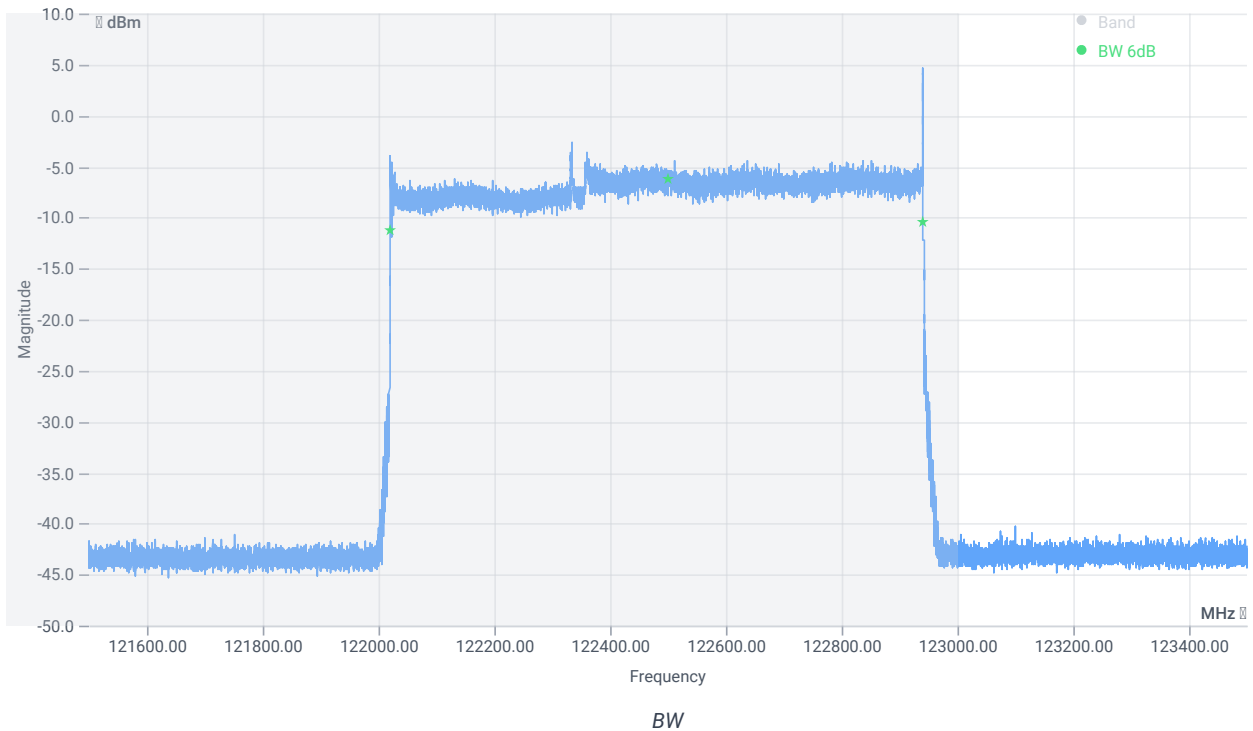


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.5	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122019.8000	MHz	PASS
T2 6dB	---	123000	122941.3000	MHz	PASS

Test for temperature[°C]: 40 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

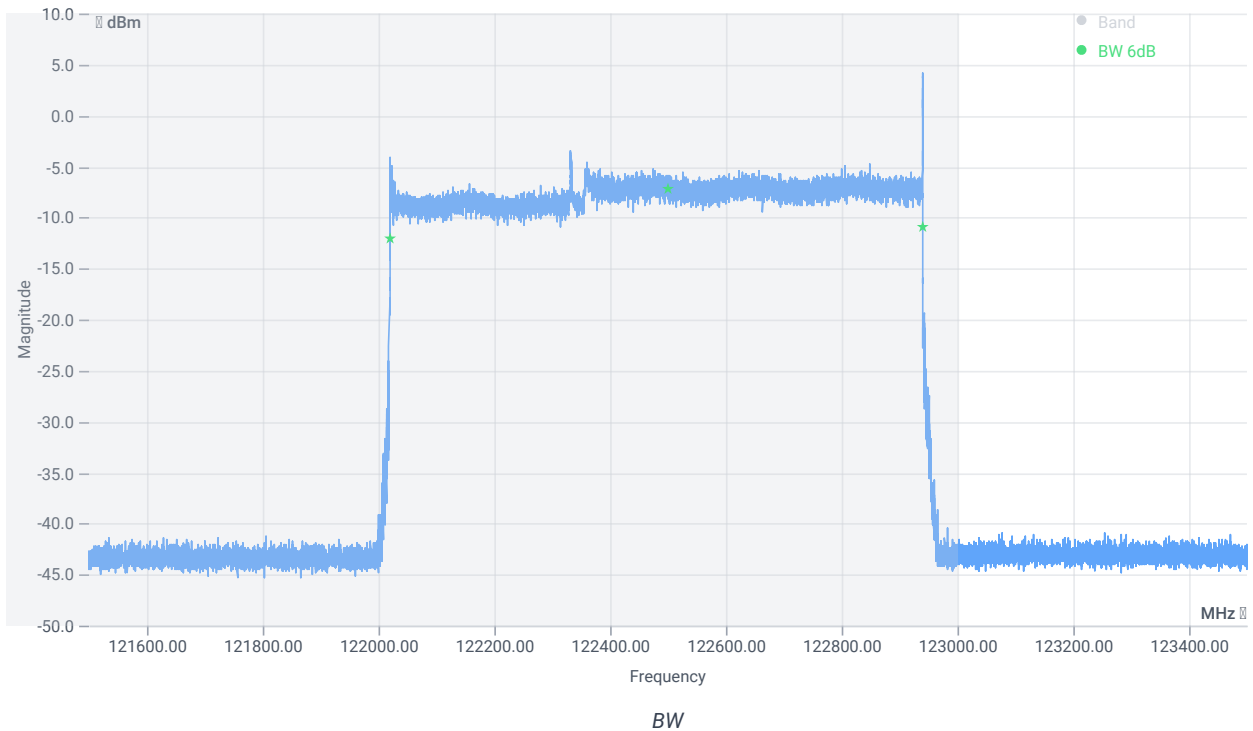


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.8	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122019.1000	MHz	PASS
T2 6dB	---	123000	122940.9000	MHz	PASS

Test for temperature[°C]: 50 | voltage [V]: 24

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.00 48.53 0
Start [MHz] Stop [MHz]	121500.000 123500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	60000 1 20001 SWE

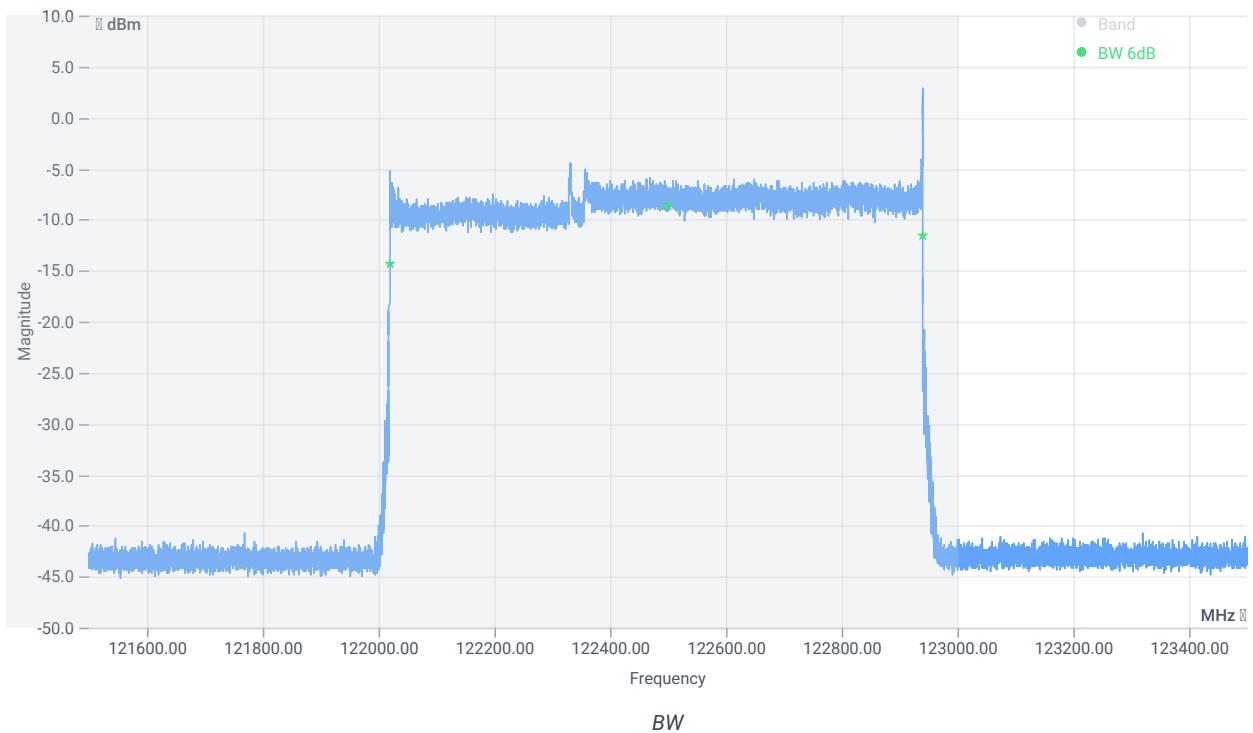

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 6dB	---	---	921.5	MHz	INFO
Reference freq.	---	---	122500	MHz	INFO
T1 6dB	116000	---	122019.0000	MHz	PASS
T2 6dB	---	123000	122940.5000	MHz	PASS

Verdict

PASS

- END OF DOCUMENT -