



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Queclink Wireless Solutions Co.,Ltd

3 Floor, Building 2, No.717 Yishan Road, Xuhui District, shanghai, 200233 China

FCC ID: YQD-GPSCANID100

Report Type: Original Report	Product Type: RFID Reader
Test Engineer:	<u>Carry Cai</u> <i>Carry Cai</i>
Report Number:	<u>RSHA200401001-00B</u>
Report Date:	<u>2020-07-09</u>
Reviewed By:	<u>Oscar Ye</u> <i>Oscar Ye</i> EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE.....	15
MEASUREMENT RESULT	16
FCC §15.203 - ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	19
FACTOR & OVER LIMIT CALCULATION.....	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	26
APPLICABLE STANDARD	26
EUT SETUP	26
EMI TEST RECEIVER SETUP.....	27
TEST PROCEDURE	27
CORRECTED AMPLITUDE & MARGIN CALCULATION	27
TEST RESULTS SUMMARY	27
TEST DATA	28
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST DATA	72

FCC §15.247(d) – BAND EDGE	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST DATA	75
FCC §15.247(e) - POWER SPECTRAL DENSITY	81
APPLICABLE STANDARD	81
TEST PROCEDURE	81
TEST DATA	81

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Queclink Wireless Solutions Co.,Ltd
Tested Model	GPScanID 100
Product Type	RFID Reader
Power Supply	DC 7.4V from battery, DC 12V from adapter
RF Function	2.4G Wi-Fi, BLE
Operating Band/Frequency	2.4G Wi-Fi: 2412~2462 MHz (802.11b/g/n20), 2422~2452 MHz (802.11n40) BLE: 2402-2480MHz
Channel Number	2.4G Wi-Fi: 11 (802.11b/g/n20), 7(802.11n40), BLE: 40
Channel Separation	2.4G Wi-Fi: 5MHz, BLE: 2MHz
Modulation Type	Wi-Fi: OFDM,DSSS; BLE: GFSK
Antenna Type	Wi-Fi: PIFA Antenna BLE: Patch Antenna
Maximum Antenna Gain	Wi-Fi: 1.51 dBi BLE: -2.5 dBi

Adapter Information:

Model: RCL-X120400Z

Input: AC100-240V 50/60Hz 1.0A

Output: 12V, 4.0A

**All measurement and test data in this report was gathered from production sample serial number: 20200401001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2020-04-01)*

Objective

This report is prepared on behalf of *Queclink Wireless Solutions Co.,Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS Submittal with FCC ID: YQD-GPSCANID100

FCC Part 15C DXX Submittal with FCC ID: YQD-GPSCANID100

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: sscom5.13.1

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level
802.11b	1 Mbps	Default
802.11g	6 Mbps	Default
802.11n-HT20	MCS0	Default
802.11n-HT40	MCS0	Default
BLE	1Mbps	Default

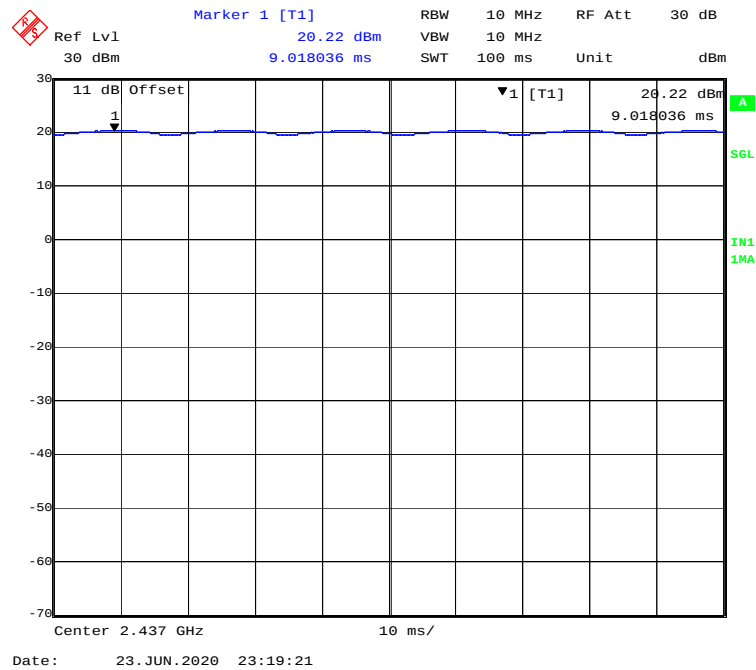Duty Cycle:**802.11b Mode Middle Channel**


802.11g Mode Middle Channel

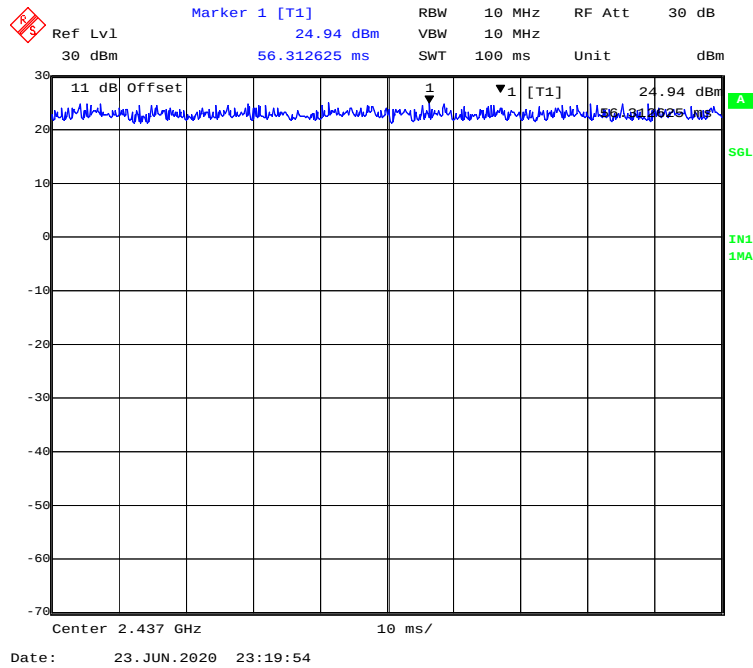


802.11n-HT20 Mode Middle Channel

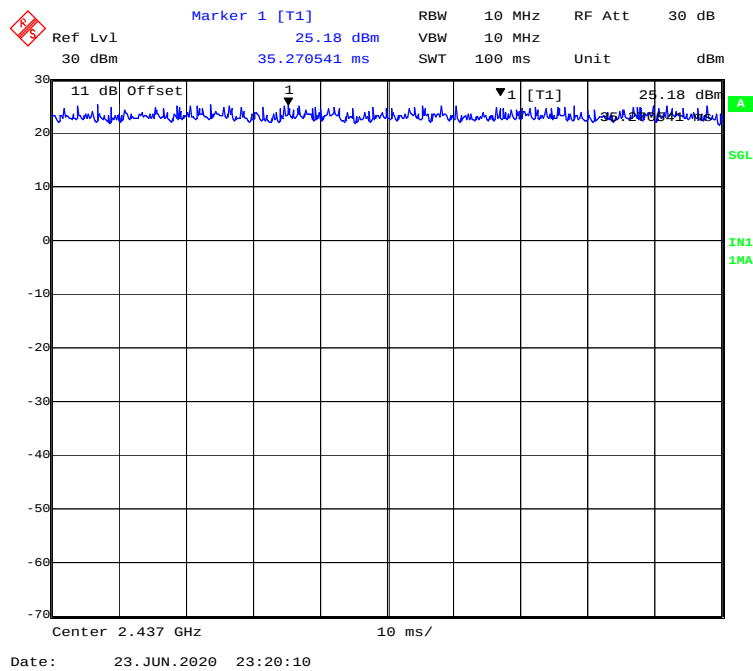

802.11n-HT40 Mode Middle Channel

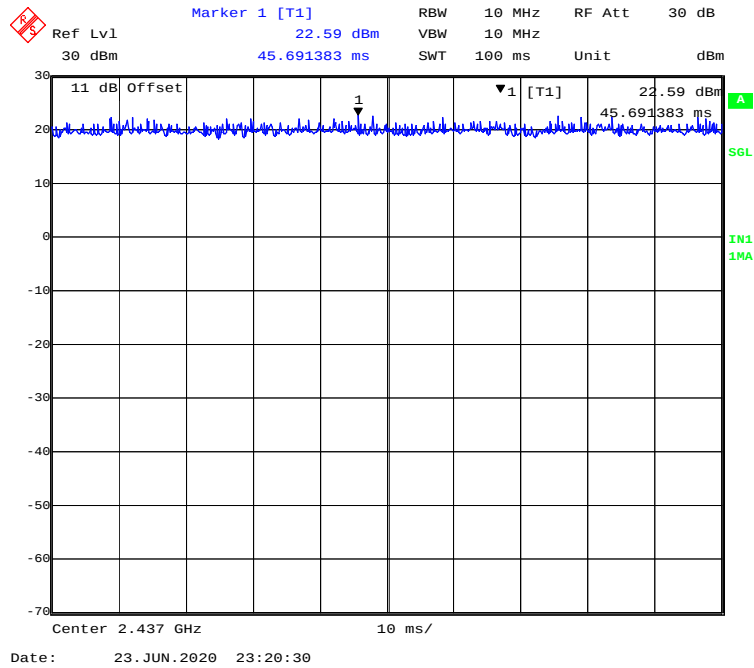

BLE Mode Middle Channel

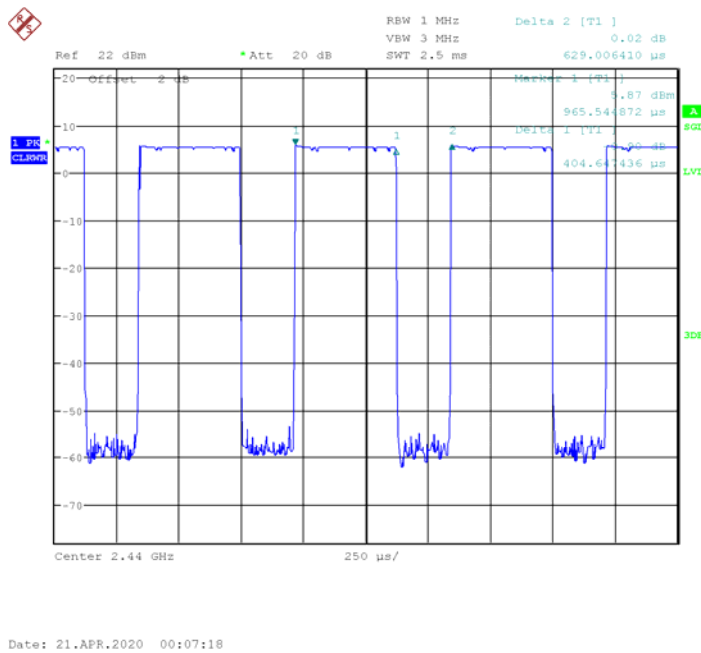

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/		0
BLE	64.33	0.405	2.47	3.77

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	E6410	3094742521

External I/O Cable


Cable Description	Length (m)	From Port	To
Data/Charging Cable	1.5	EUT	Notebook
Power Cable	1.2	Data/Charging Cable	Adapter
Power Cable	1.0	Adapter	LISN/AC source

Block Diagram of Test Setup


For Conducted Emissions:

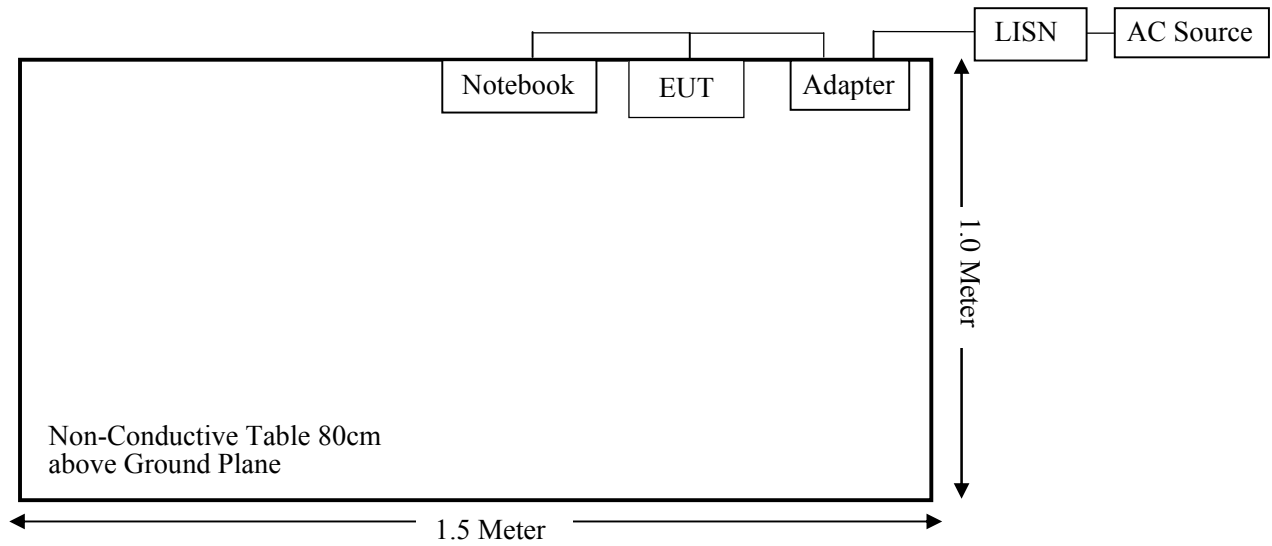

For Radiated Emissions (Below 1GHz):

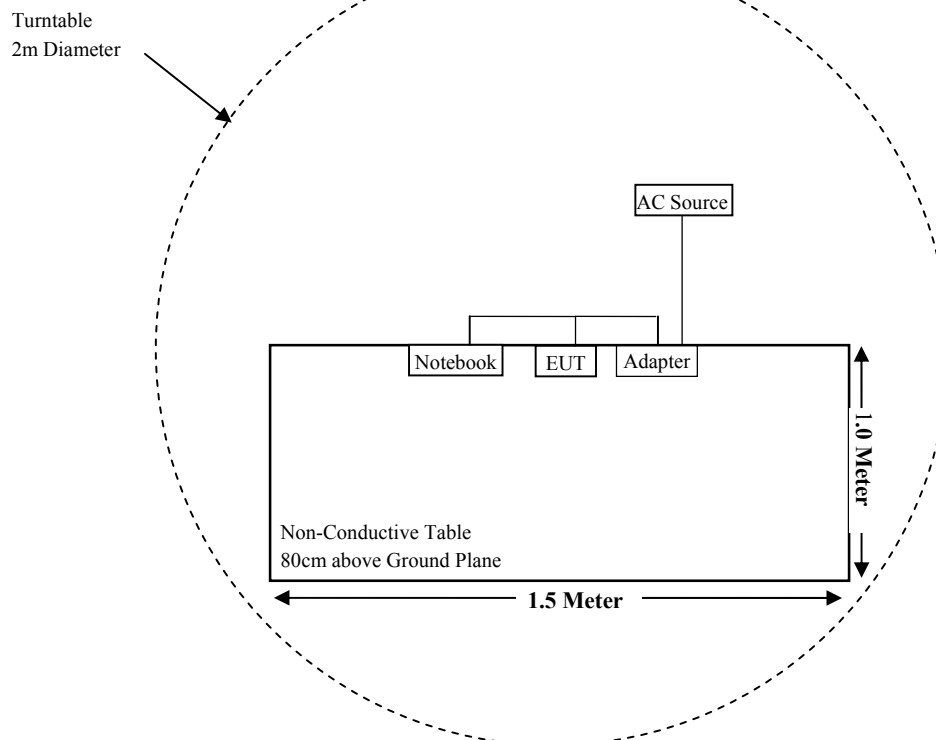

For Radiated Emissions (Above 1GHz):

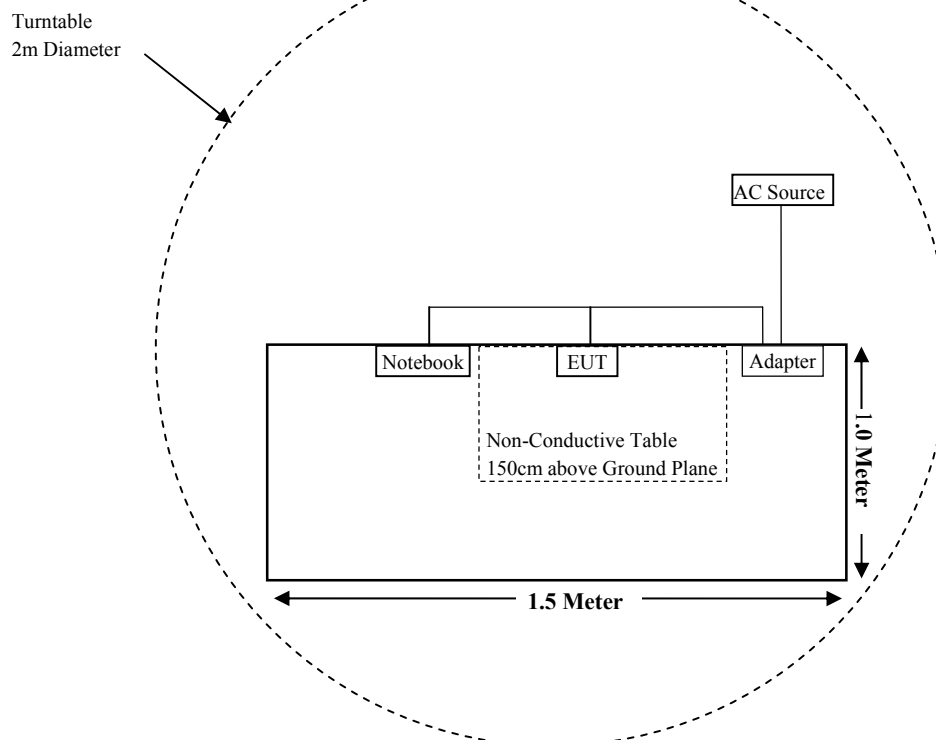

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Queclink Wireless Solutions Co.,Ltd	RF Cable	Queclink Wireless Solutions Co.,Ltd 01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-01-10	2021-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE

Applicable Standard

According to§2.1093and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

(a) For 100 MHz to 6 GHz and *test separation distances* ≤ 50 mm, the 1-g and 10-g SAR *test exclusion thresholds* are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.



The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

b) For 100 MHz to 6 GHz and *test separation distances* > 50 mm, the 1-g and 10-g SAR *test exclusion thresholds* are determined by the following:

1) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150)]\}$ mW, for 100 MHz to 1500 MHz

2) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\}$ mW, for > 1500 MHz and ≤ 6 GHz

Measurement Result

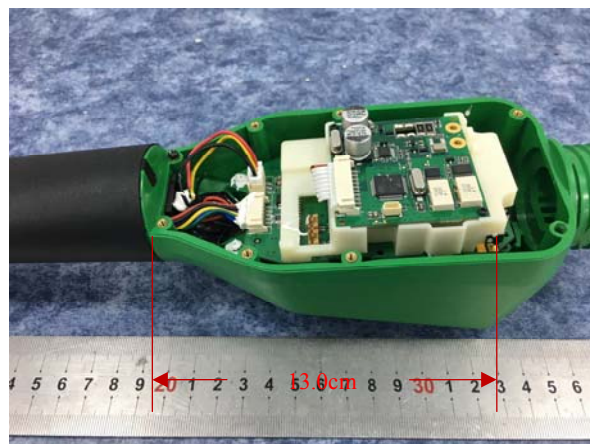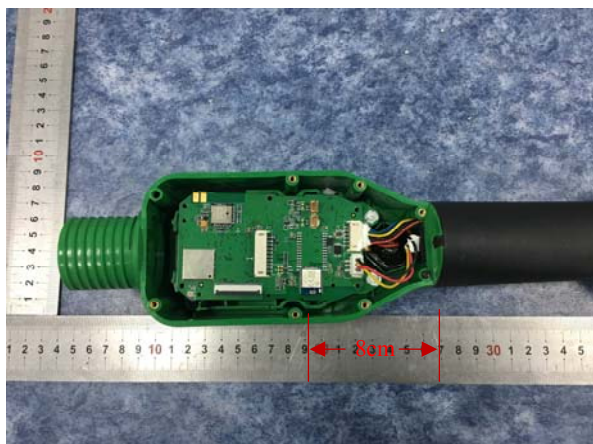

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	limit (mW)	SAR Test Exclusion
		(dBm)	(mW)			
Wi-Fi 802.11b	2412-2462	21.0	125.89	130	1038.9	Yes
Wi-Fi 802.11g		25.0	316.23	130	1038.9	Yes
Wi-Fi 802.11n-HT20		25.0	316.23	130	1038.9	Yes
Wi-Fi 802.11n-HT40	2422-2452	25.0	316.23	130	1038.9	Yes
BLE	2402-2480	6.5	4.47	80	538.9	Yes
Bluetooth	2402-2480	16.0	39.81	80	538.9	Yes

Note: The EUT is a handheld device.

Result: No SAR test is required.

Simultaneous SAR test exclusion considerations:

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f(\text{GHz})/x} \right] \text{ W/kg, } 0.4 \text{ W/kg for 1-g SAR and } 1.0 \text{ W/kg for 10-g SAR, when the test separation distance is } > 50 \text{ mm.}$$
 where $x = 18.75$ for 10-g SAR.

Wi-Fi and BT can transmit simultaneously, The worst condition is 802.11n-HT20 of Wi-Fi & BT, as below:

$$\Sigma \text{SAR} = 316.23/100 * (\sqrt{2.462/18.75}) + 39.81/100 * (\sqrt{2.480/18.75}) = 0.26 + 0.03 = 0.29 < 1.0 \text{ W/kg}$$

Conclusion: $\Sigma \text{SAR} < 1.0 \text{ W/kg}$ therefore simultaneous transmission SAR is not required.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PIFA Antenna for WIFI and a Patch Antenna for BLE, Wi-Fi antenna gain is 1.51 dBi, BLE antenna gain is -2.5 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

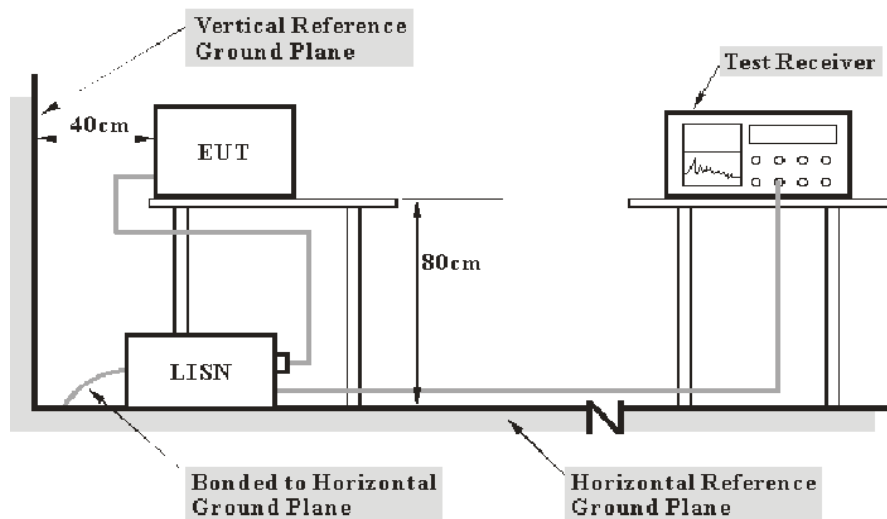

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	24.0~24.8°C
Relative Humidity:	50~53 %
ATM Pressure:	100.9~101.1 kPa


The testing was performed by Carry Cai from 2020-05-22 to 2020-07-09.

Test Result: Compliant.

For Wi-Fi Mode:


EUT operation mode: Transmitting in 802.11n-HT40 mode high channel (worst case)

AC 120V/60 Hz, Line

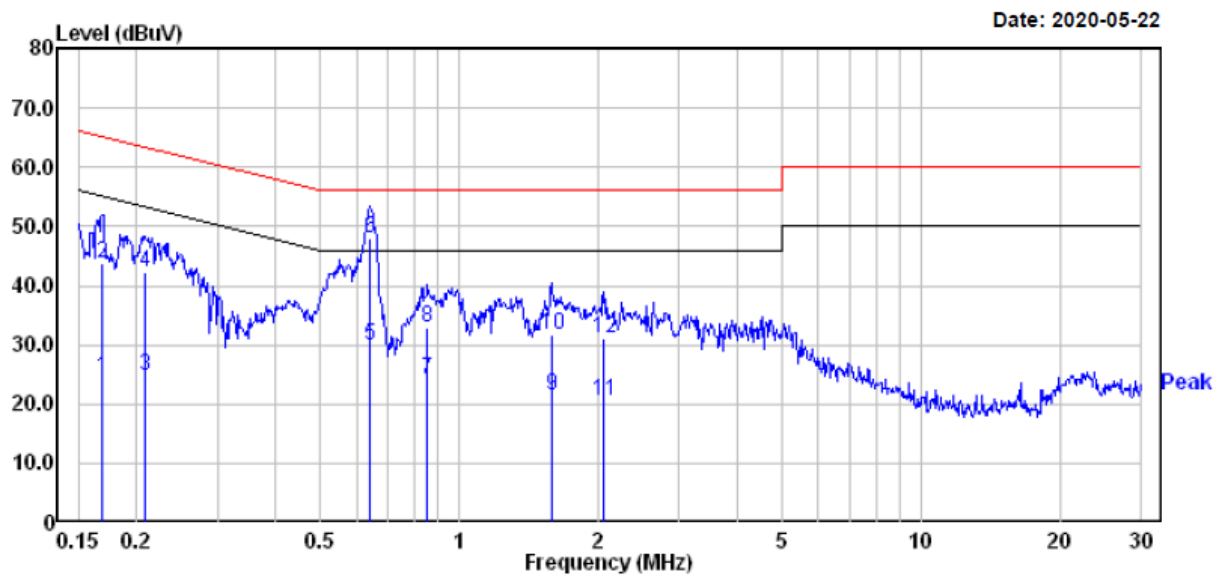

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.169	4.50	19.83	24.33	55.03	-30.70	Average
2	0.169	23.90	19.83	43.73	65.03	-21.30	QP
3	0.209	4.80	19.82	24.62	53.23	-28.61	Average
4	0.209	22.50	19.82	42.32	63.23	-20.91	QP
5	0.641	10.00	19.75	29.75	46.00	-16.25	Average
6	0.641	28.20	19.75	47.95	56.00	-8.05	QP
7	0.853	4.41	19.71	24.12	46.00	-21.88	Average
8	0.853	13.31	19.71	33.02	56.00	-22.98	QP
9	1.585	1.49	19.85	21.34	46.00	-24.66	Average
10	1.585	11.89	19.85	31.74	56.00	-24.26	QP
11	2.055	0.70	19.79	20.49	46.00	-25.51	Average
12	2.055	11.30	19.79	31.09	56.00	-24.91	QP

AC 120V/60 Hz, Neutral

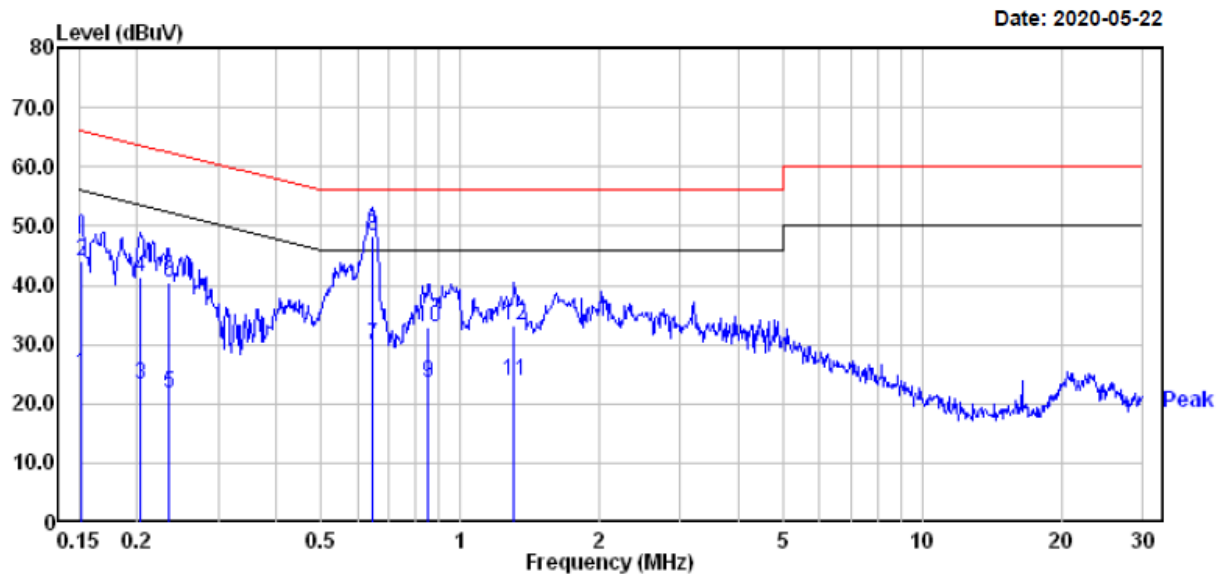


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	5.10	19.82	24.92	55.91	-30.99	Average
2	0.152	24.30	19.82	44.12	65.91	-21.79	QP
3	0.204	3.40	19.82	23.22	53.45	-30.23	Average
4	0.204	21.50	19.82	41.32	63.45	-22.13	QP
5	0.234	1.90	19.82	21.72	52.30	-30.58	Average
6	0.234	20.60	19.82	40.42	62.30	-21.88	QP
7	0.647	10.00	19.75	29.75	46.00	-16.25	Average
8	0.647	28.60	19.75	48.35	56.00	-7.65	QP
9	0.853	3.91	19.71	23.62	46.00	-22.38	Average
10	0.853	13.21	19.71	32.92	56.00	-23.08	QP
11	1.310	4.10	19.82	23.92	46.00	-22.08	Average
12	1.310	13.30	19.82	33.12	56.00	-22.88	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)


2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

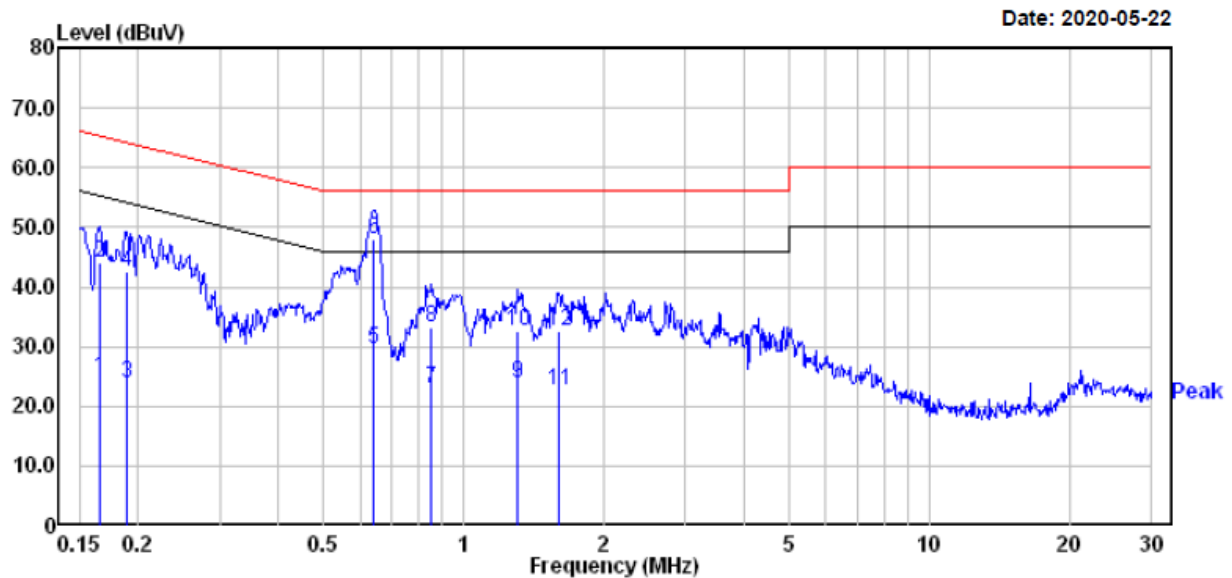For BLE Mode:*EUT operation mode: Transmitting in high channel (worst case)***AC 120V/60 Hz, Line**

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.165	5.00	19.83	24.83	55.21	-30.38	Average
2	0.165	24.20	19.83	44.03	65.21	-21.18	QP
3	0.189	3.90	19.82	23.72	54.06	-30.34	Average
4	0.189	22.80	19.82	42.62	64.06	-21.44	QP
5	0.641	9.90	19.75	29.65	46.00	-16.35	Average
6	0.641	28.20	19.75	47.95	56.00	-8.05	QP
7	0.853	3.11	19.71	22.82	46.00	-23.18	Average
8	0.853	13.41	19.71	33.12	56.00	-22.88	QP
9	1.310	3.90	19.82	23.72	46.00	-22.28	Average
10	1.310	12.80	19.82	32.62	56.00	-23.38	QP
11	1.602	2.89	19.85	22.74	46.00	-23.26	Average
12	1.602	12.79	19.85	32.64	56.00	-23.36	QP

AC 120V/60 Hz, Neutral

Date: 2020-05-22

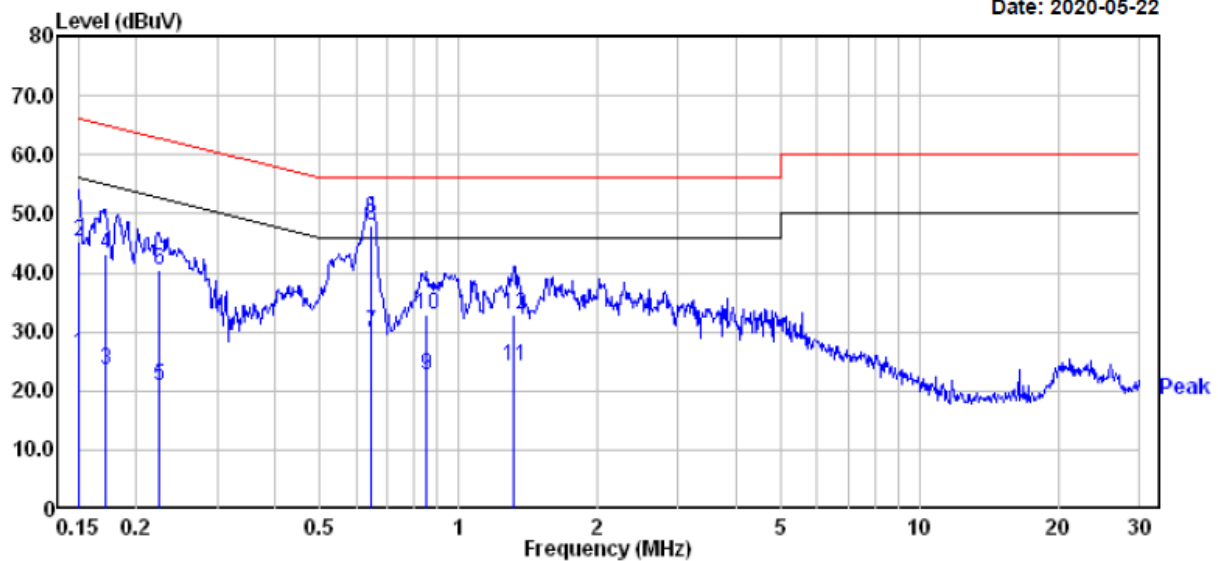

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	6.50	19.82	26.32	56.00	-29.68	Average
2	0.150	25.50	19.82	45.32	66.00	-20.68	QP
3	0.171	3.60	19.83	23.43	54.90	-31.47	Average
4	0.171	23.20	19.83	43.03	64.90	-21.87	QP
5	0.223	1.00	19.82	20.82	52.70	-31.88	Average
6	0.223	20.70	19.82	40.52	62.70	-22.18	QP
7	0.647	10.10	19.75	29.85	46.00	-16.15	Average
8	0.647	28.40	19.75	48.15	56.00	-7.85	QP
9	0.853	2.91	19.71	22.62	46.00	-23.38	Average
10	0.853	13.31	19.71	33.02	56.00	-22.98	QP
11	1.317	4.21	19.82	24.03	46.00	-21.97	Average
12	1.317	13.11	19.82	32.93	56.00	-23.07	QP

Note:


1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

Transmitting simultaneously test:


(The worst case low channel of EDR(8DPSK) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously was recorded)

AC 120V/60 Hz, Line

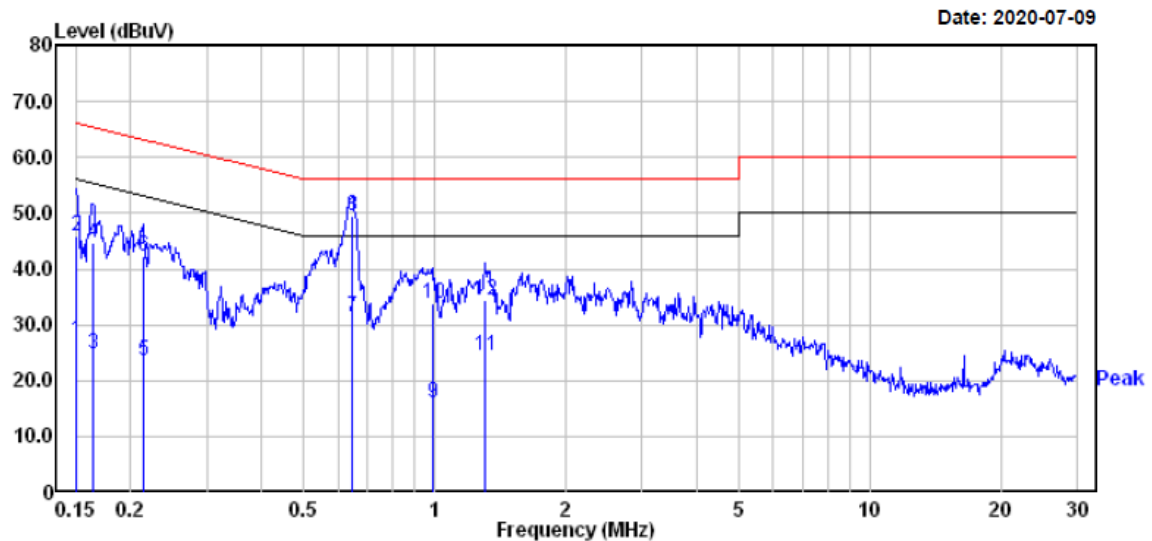

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBUV	dB	dBUV	dBUV	dB
1	0.150	7.20	19.82	27.02	56.00	-28.98 Average
2	0.150	26.20	19.82	46.02	66.00	-19.98 QP
3	0.164	4.90	19.83	24.73	55.25	-30.52 Average
4	0.164	24.80	19.83	44.63	65.25	-20.62 QP
5	0.214	3.60	19.82	23.42	53.05	-29.63 Average
6	0.214	22.40	19.82	42.22	63.05	-20.83 QP
7	0.647	11.50	19.75	31.25	46.00	-14.75 Average
8	0.647	29.70	19.75	49.45	56.00	-6.55 QP
9	0.989	-3.80	19.81	16.01	46.00	-29.99 Average
10	0.989	14.10	19.81	33.91	56.00	-22.09 QP
11	1.303	4.70	19.82	24.52	46.00	-21.48 Average
12	1.303	14.50	19.82	34.32	56.00	-21.68 QP

AC 120V/60 Hz, Neutral

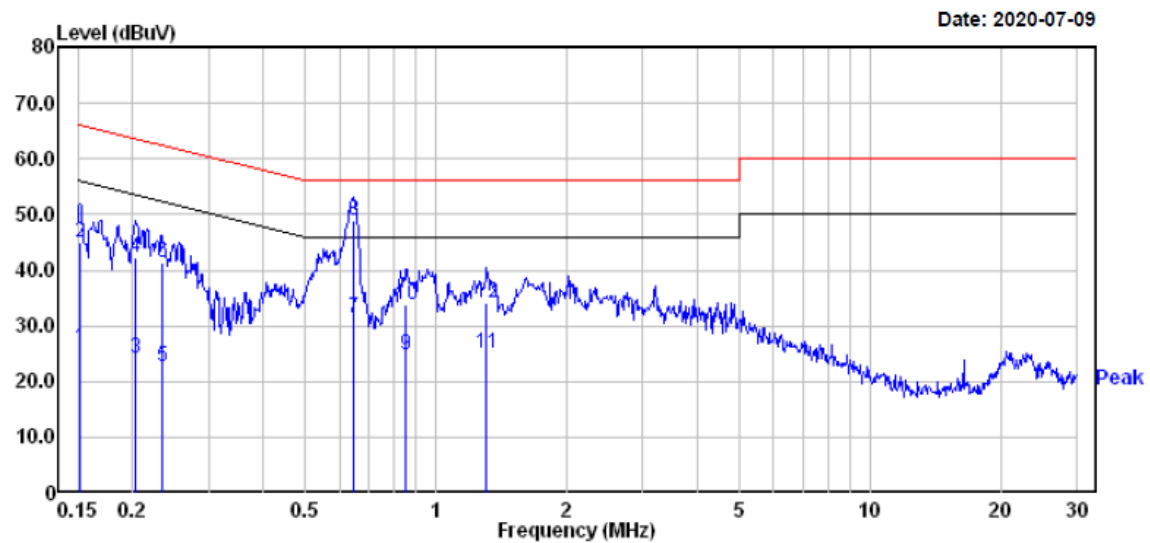

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	6.10	19.82	25.92	55.91	-29.99	Average
2	0.152	25.30	19.82	45.12	65.91	-20.79	QP
3	0.204	4.40	19.82	24.22	53.45	-29.23	Average
4	0.204	22.50	19.82	42.32	63.45	-21.13	QP
5	0.234	2.90	19.82	22.72	52.30	-29.58	Average
6	0.234	21.60	19.82	41.42	62.30	-20.88	QP
7	0.647	11.50	19.75	31.25	46.00	-14.75	Average
8	0.647	29.10	19.75	48.85	56.00	-7.15	QP
9	0.853	4.91	19.71	24.62	46.00	-21.38	Average
10	0.853	14.21	19.71	33.92	56.00	-22.08	QP
11	1.310	5.10	19.82	24.92	46.00	-21.08	Average
12	1.310	14.30	19.82	34.12	56.00	-21.88	QP



Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

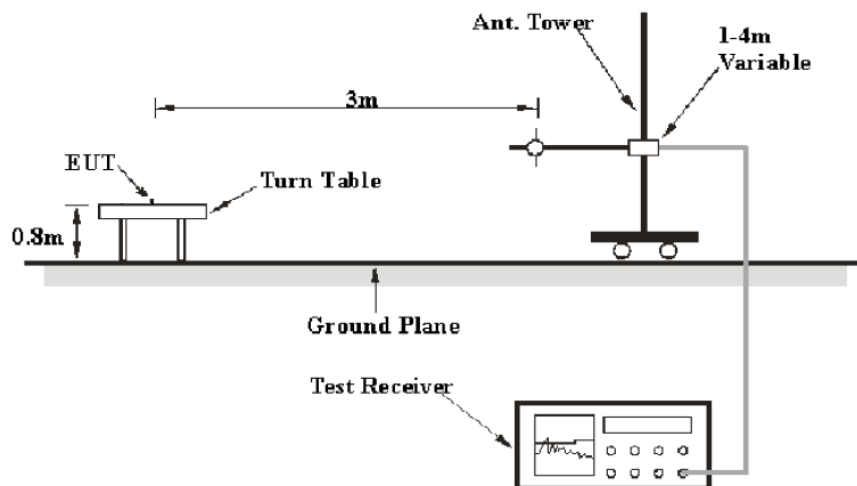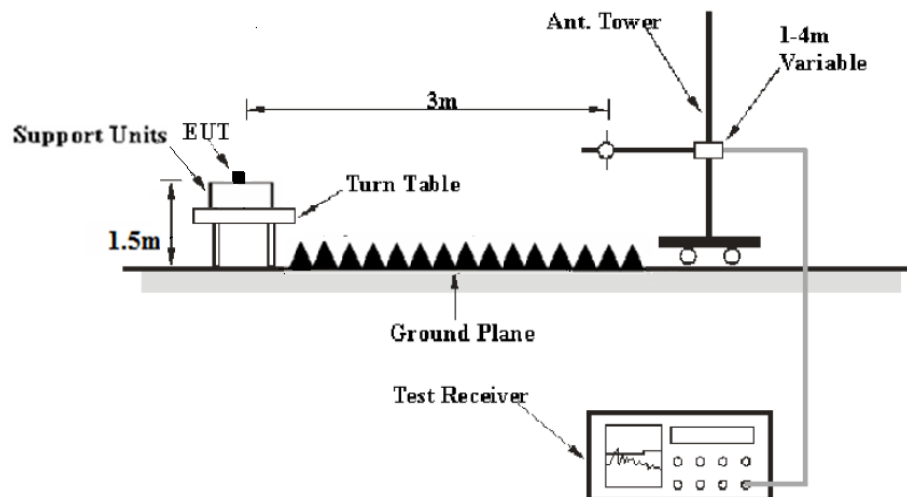EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	23.1~24.8℃
Relative Humidity:	49~52 %
ATM Pressure:	100.7~101.3 kPa

The testing was performed by Carry Cai from 2020-04-20 to 2020-07-09.


Test Result: Compliant.

EUT operation mode: Transmitting

For Wi-Fi Mode:

Spurious Emission Test:**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **high channel of 802.11n-HT40 mode in Z-axis of orientation** was recorded.

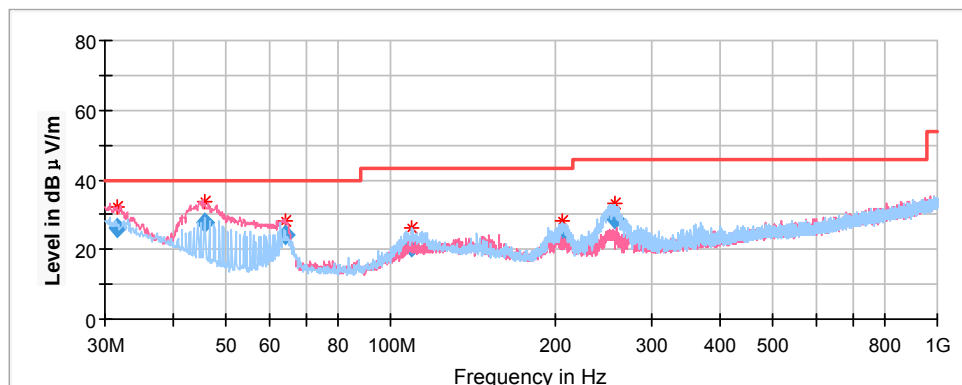

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.65	26.17	100.0	V	0.0	-5.5	40.00	13.83
45.75	27.70	100.0	V	4.0	-15.1	40.00	12.30
64.33	23.91	200.0	V	300.0	-18.1	40.00	16.09
109.39	20.61	200.0	H	358.0	-13.6	43.50	22.89
205.98	22.75	200.0	H	310.0	-12.7	43.50	20.75
257.88	28.60	100.0	H	142.0	-12.3	46.00	17.40

1GHz-18GHz:**802.11b Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz


Full Spectrum

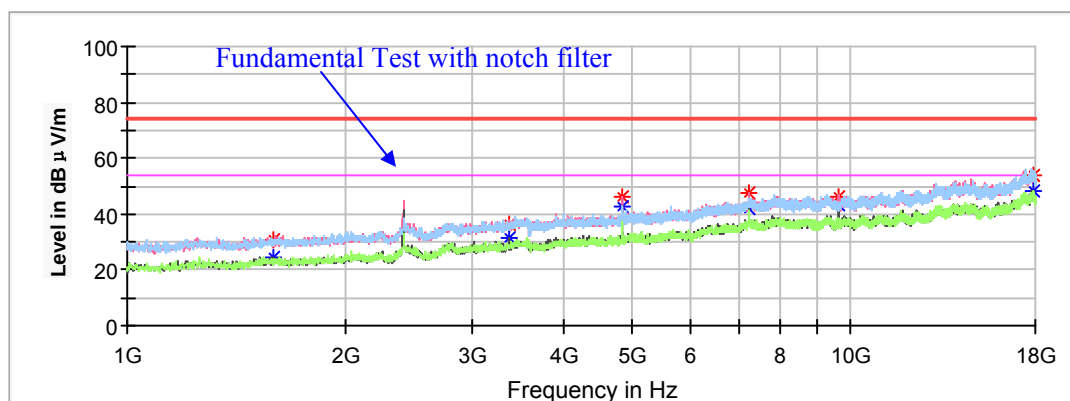

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	---	24.65	150	V	323.0	-16.0	54.00	29.35
1596.70	31.11	---	150	V	323.0	-16.0	74.00	42.89
3368.10	---	31.33	200	V	128.0	-9.2	54.00	22.67
3368.10	36.05	---	200	V	128.0	-9.2	74.00	37.95
4824.00	---	42.67	150	V	262.0	-5.5	54.00	11.33
4824.00	45.97	---	150	V	262.0	-5.5	74.00	28.03
7236.00	---	41.63	200	V	279.0	0.5	54.00	12.37
7236.00	47.79	---	200	V	279.0	0.5	74.00	26.21
9647.90	---	43.23	200	V	108.0	2.1	54.00	10.77
9647.90	46.24	---	200	V	108.0	2.1	74.00	27.76
17848.70	---	48.25	150	V	202.0	8.8	54.00	5.75
17848.70	54.02	---	150	V	202.0	8.8	74.00	19.98

Middle Channel: 2437MHz


Full Spectrum

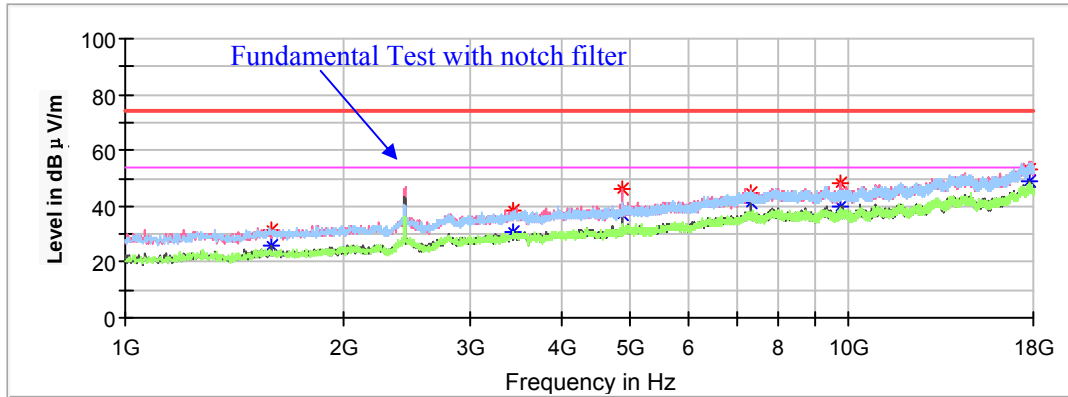

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	26.13	200	V	78.0	-16.0	54.00	27.87
1591.60	31.60	---	200	V	78.0	-16.0	74.00	42.40
3442.90	---	30.80	200	V	243.0	-9.0	54.00	23.20
3442.90	38.40	---	200	V	243.0	-9.0	74.00	35.60
4874.00	---	37.21	200	V	212.0	-5.4	54.00	16.79
4874.00	46.11	---	200	V	212.0	-5.4	74.00	27.89
7311.00	---	41.12	200	V	138.0	0.6	54.00	12.88
7311.00	44.68	---	200	V	138.0	0.6	74.00	29.32
9748.20	---	40.04	150	V	295.0	2.0	54.00	13.96
9748.20	48.47	---	150	V	295.0	2.0	74.00	25.53
17797.70	---	48.82	150	V	95.0	8.8	54.00	5.18
17797.70	53.25	---	150	V	95.0	8.8	74.00	20.75

High Channel: 2462MHz

Full Spectrum

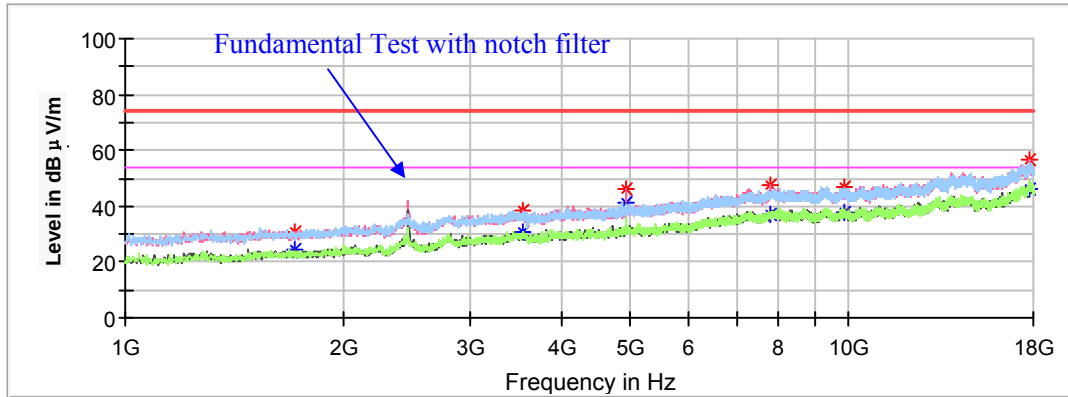

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1715.70	---	24.38	200	V	358.0	-15.5	54.00	29.62
1715.70	30.70	---	200	V	358.0	-15.5	74.00	43.30
3536.40	---	30.59	150	V	127.0	-8.7	54.00	23.41
3536.40	38.22	---	150	V	127.0	-8.7	74.00	35.78
4924.00	---	41.16	200	V	264.0	-5.3	54.00	12.84
4924.00	46.06	---	200	V	264.0	-5.3	74.00	27.94
7811.90	---	36.83	150	V	19.0	1.5	54.00	17.17
7811.90	47.61	---	150	V	19.0	1.5	74.00	26.39
9843.40	---	38.06	200	V	78.0	2.0	54.00	15.94
9843.40	46.80	---	200	V	78.0	2.0	74.00	27.20
17794.30	---	46.35	200	V	232.0	8.8	54.00	7.65
17794.30	56.64	---	200	V	232.0	8.8	74.00	17.36

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz


Full Spectrum

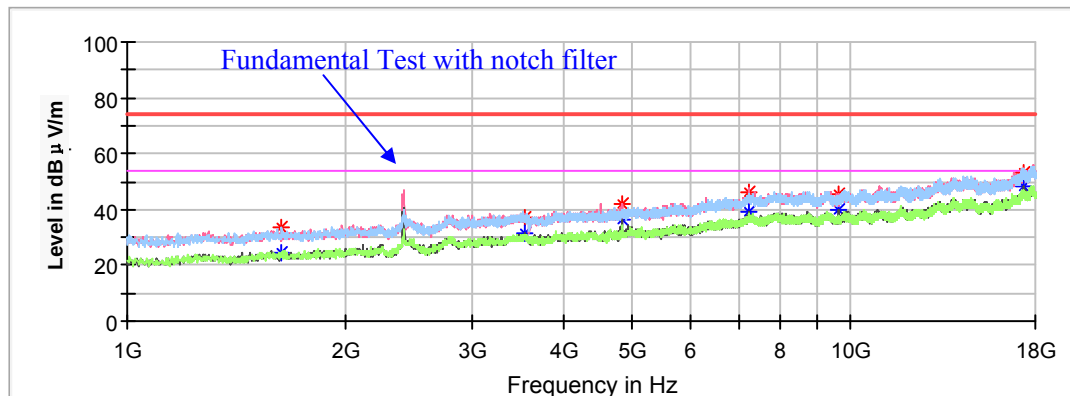

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1635.80	---	24.44	200	H	203.0	-15.8	54.00	29.56
1635.80	33.87	---	200	H	203.0	-15.8	74.00	40.13
3550.00	---	31.31	150	V	79.0	-8.6	54.00	22.69
3550.00	37.17	---	150	V	79.0	-8.6	74.00	36.83
4824.00	---	36.24	150	V	169.0	-5.5	54.00	17.76
4824.00	41.68	---	150	V	169.0	-5.5	74.00	32.32
7236.00	---	39.03	200	V	80.0	0.5	54.00	14.97
7236.00	46.46	---	200	V	80.0	0.5	74.00	27.54
9647.90	---	40.08	200	V	203.0	2.1	54.00	13.92
9647.90	45.23	---	200	V	203.0	2.1	74.00	28.77
17377.80	---	48.19	150	V	47.0	8.5	54.00	5.81
17377.80	52.91	---	150	V	47.0	8.5	74.00	21.09

Middle Channel: 2437MHz


Full Spectrum

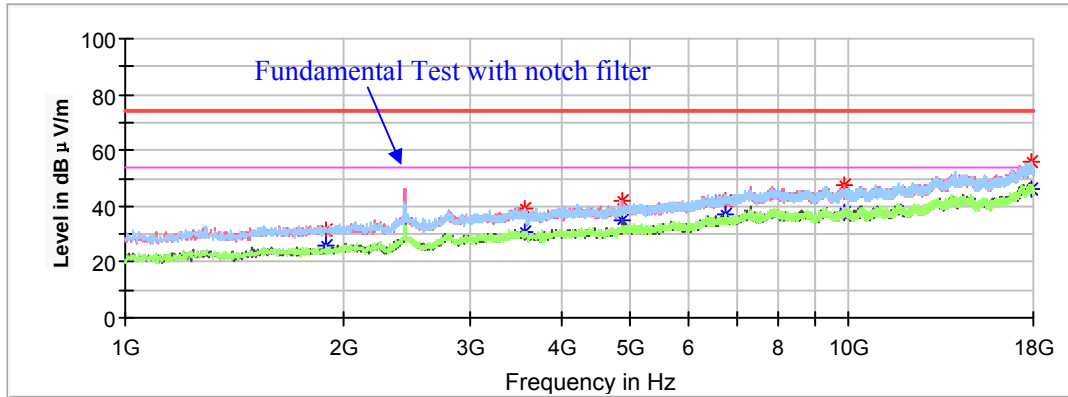

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1897.60	---	25.66	150	H	292.0	-14.9	54.00	28.34
1897.60	31.54	---	150	H	292.0	-14.9	74.00	42.46
3570.40	---	30.55	200	H	249.0	-8.6	54.00	23.45
3570.40	39.34	---	200	H	249.0	-8.6	74.00	34.66
4874.00	42.21	---	200	V	230.0	-5.4	74.00	31.79
4874.00	---	35.16	200	V	230.0	-5.4	54.00	18.84
6771.50	---	37.38	150	H	97.0	-0.6	54.00	16.62
6771.50	42.24	---	150	H	97.0	-0.6	74.00	31.76
9851.90	---	37.68	150	V	72.0	2.0	54.00	16.32
9851.90	47.48	---	150	V	72.0	2.0	74.00	26.52
17918.40	---	46.29	200	V	260.0	8.8	54.00	7.71
17918.40	55.83	---	200	V	260.0	8.8	74.00	18.17

High Channel: 2462MHz

Full Spectrum

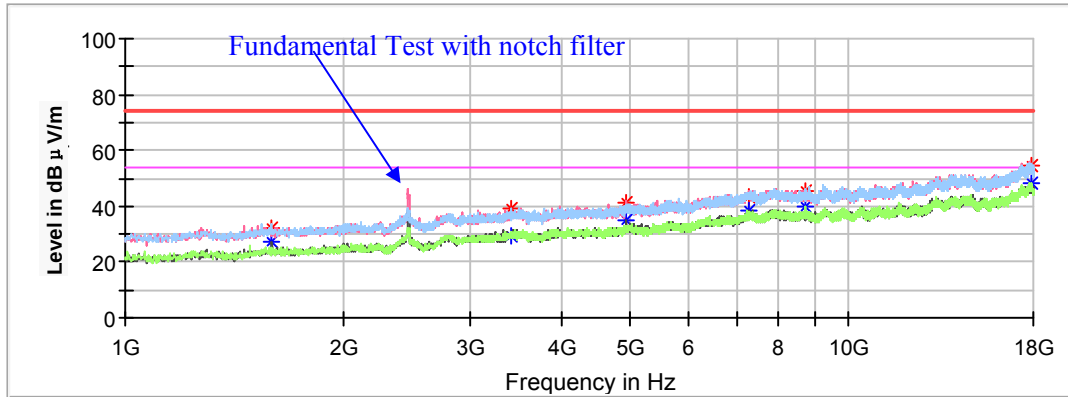

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1596.70	---	27.36	200	V	288.0	-16.0	54.00	26.64
1596.70	32.28	---	200	V	288.0	-16.0	74.00	41.72
3407.20	---	29.63	150	H	326.0	-9.1	54.00	24.37
3407.20	39.16	---	150	H	326.0	-9.1	74.00	34.84
4924.00	---	34.99	200	V	171.0	-5.3	54.00	19.01
4924.00	41.47	---	200	V	171.0	-5.3	74.00	32.53
7271.30	---	38.75	200	V	274.0	0.5	54.00	15.25
7271.30	43.23	---	200	V	274.0	0.5	74.00	30.77
8724.80	---	39.98	200	H	94.0	1.6	54.00	14.02
8724.80	45.19	---	200	H	94.0	1.6	74.00	28.81
17894.60	---	48.25	150	H	185.0	8.8	54.00	5.75
17894.60	54.28	---	150	H	185.0	8.8	74.00	19.72

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz


Full Spectrum

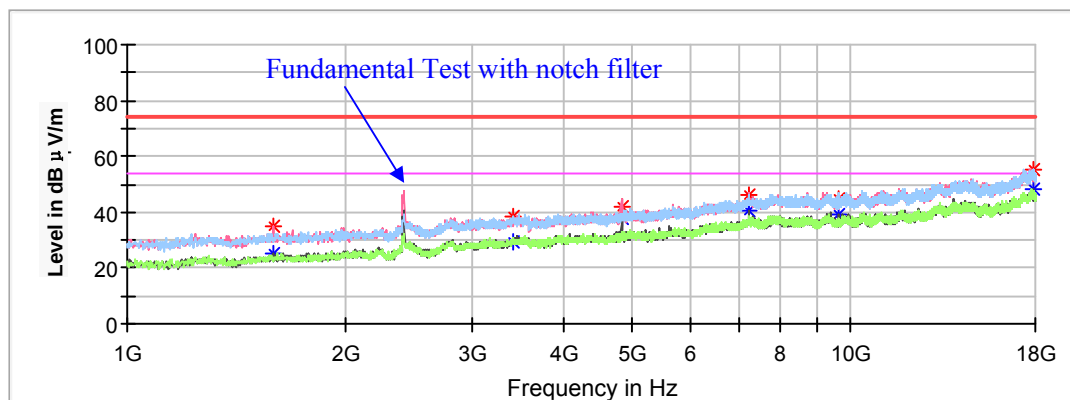

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1593.30	---	25.17	150	V	279.0	-16.0	54.00	28.83
1593.30	34.96	---	150	V	279.0	-16.0	74.00	39.04
3422.50	---	29.32	150	V	0.0	-9.0	54.00	24.68
3422.50	38.70	---	150	V	0.0	-9.0	74.00	35.30
4824.00	---	37.42	200	V	216.0	-5.5	54.00	16.58
4824.00	42.01	---	200	V	216.0	-5.5	74.00	31.99
7236.00	---	40.44	200	V	187.0	0.5	54.00	13.56
7236.00	46.01	---	200	V	187.0	0.5	74.00	27.99
9647.90	---	38.92	200	V	187.0	2.1	54.00	15.08
9647.90	45.06	---	200	V	187.0	2.1	74.00	28.94
17901.40	---	48.10	200	V	310.0	8.8	54.00	5.90
17901.40	55.06	---	200	V	310.0	8.8	74.00	18.94

Middle Channel: 2437MHz


Full Spectrum

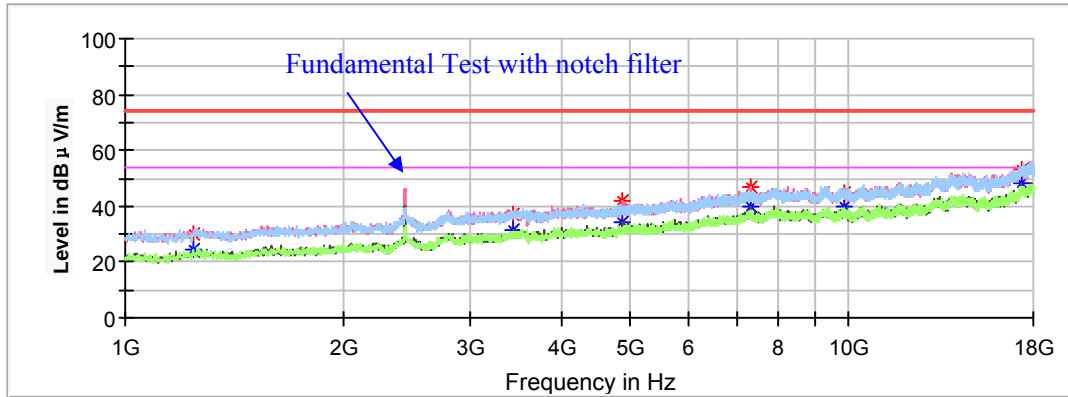

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1239.70	---	24.40	200	H	357.0	-17.8	54.00	29.60
1239.70	30.20	---	200	H	357.0	-17.8	74.00	43.80
3434.40	---	31.29	200	V	283.0	-9.0	54.00	22.71
3434.40	37.29	---	200	V	283.0	-9.0	74.00	36.71
4874.00	---	34.17	150	V	171.0	-5.4	54.00	19.83
4874.00	41.98	---	150	V	171.0	-5.4	74.00	32.02
7311.00	---	39.57	200	V	174.0	0.6	54.00	14.43
7311.00	46.77	---	200	V	174.0	0.6	74.00	27.23
9833.20	---	39.68	200	V	326.0	2.0	54.00	14.32
9833.20	44.86	---	200	V	326.0	2.0	74.00	29.14
17335.30	---	48.42	150	V	97.0	8.3	54.00	5.58
17335.30	53.17	---	150	V	97.0	8.3	74.00	20.83

High Channel: 2462MHz

Full Spectrum

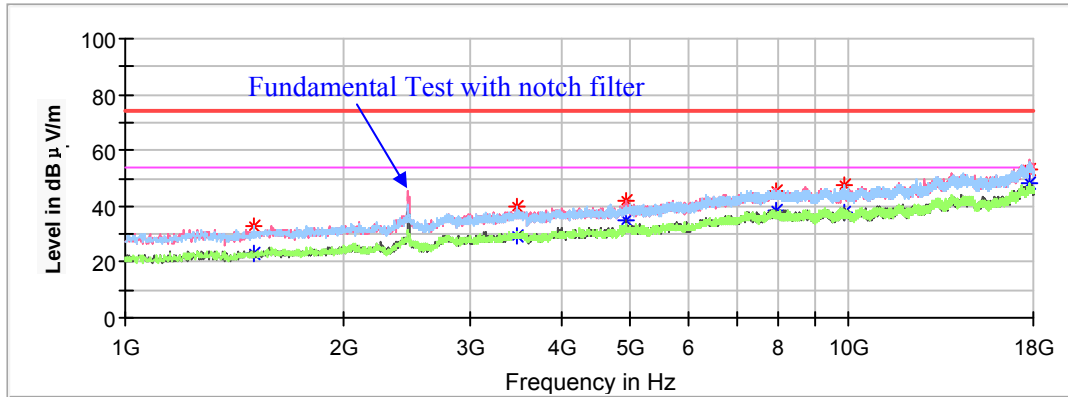

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1508.30	---	23.13	150	H	0.0	-16.3	54.00	30.87
1508.30	33.12	---	150	H	0.0	-16.3	74.00	40.88
3480.30	---	29.56	150	H	124.0	-8.9	54.00	24.44
3480.30	40.02	---	150	H	124.0	-8.9	74.00	33.98
4924.00	---	34.96	200	V	232.0	-5.3	54.00	19.04
4924.00	42.03	---	200	V	232.0	-5.3	74.00	31.97
7958.10	---	38.62	200	V	104.0	1.7	54.00	15.38
7958.10	45.37	---	200	V	104.0	1.7	74.00	28.63
9840.00	---	37.51	200	H	350.0	2.0	54.00	16.49
9840.00	47.69	---	200	H	350.0	2.0	74.00	26.31
17818.10	---	48.09	200	H	358.0	8.8	54.00	5.91
17818.10	52.92	---	200	H	358.0	8.8	74.00	21.08

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2422MHz


Full Spectrum

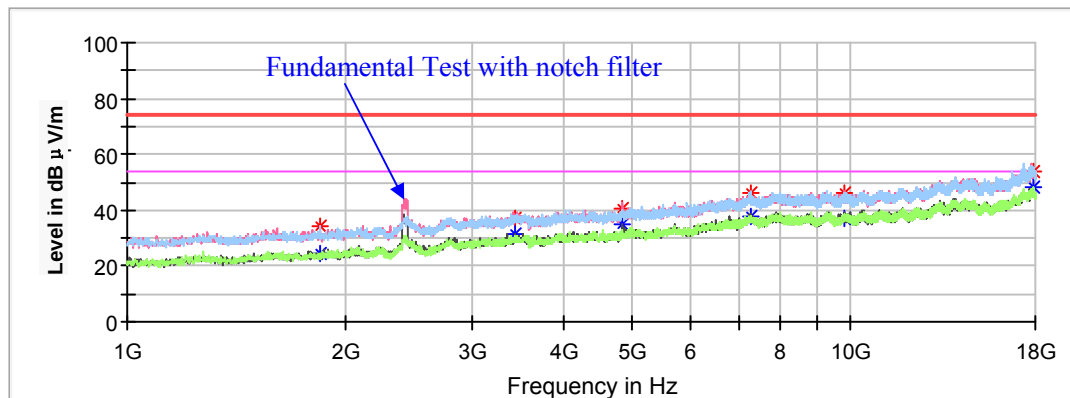

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1848.30	---	24.25	200	H	168.0	-15.0	54.00	29.75
1848.30	34.05	---	200	H	168.0	-15.0	74.00	39.95
3431.00	---	31.28	150	V	358.0	-9.0	54.00	22.72
3431.00	37.25	---	150	V	358.0	-9.0	74.00	36.75
4844.00	---	34.81	200	V	172.0	-5.5	54.00	19.19
4844.00	40.71	---	200	V	172.0	-5.5	74.00	33.29
7266.00	---	37.92	150	V	85.0	0.5	54.00	16.08
7266.00	46.36	---	150	V	85.0	0.5	74.00	27.64
9817.90	---	37.39	150	V	174.0	2.0	54.00	16.61
9817.90	46.49	---	150	V	174.0	2.0	74.00	27.51
17843.60	---	48.43	200	H	65.0	8.8	54.00	5.57
17843.60	53.54	---	200	H	65.0	8.8	74.00	20.46

Middle Channel: 2437MHz


Full Spectrum

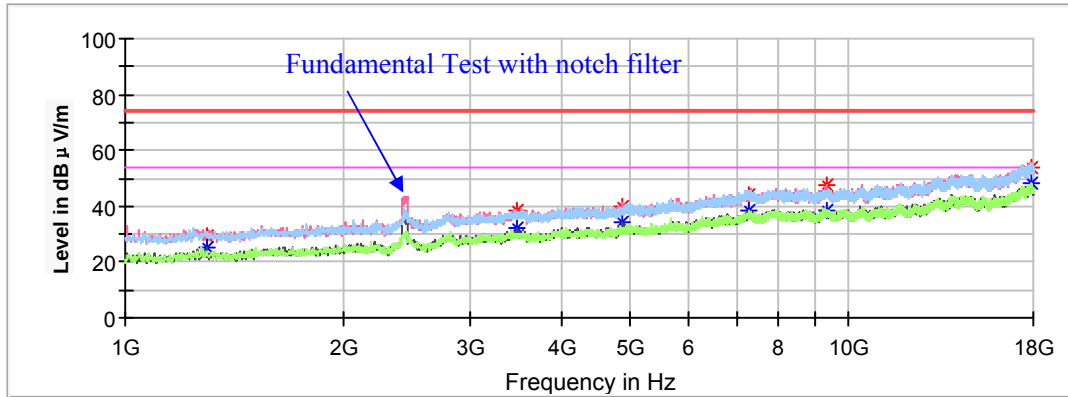

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1297.50	---	25.13	150	V	233.0	-17.5	54.00	28.87
1297.50	29.50	---	150	V	233.0	-17.5	74.00	44.50
3468.40	---	31.89	150	V	85.0	-8.9	54.00	22.11
3468.40	38.45	---	150	V	85.0	-8.9	74.00	35.55
4874.00	---	34.36	150	V	173.0	-5.5	54.00	19.64
4874.00	39.62	---	150	V	173.0	-5.5	74.00	34.38
7311.00	---	38.52	200	V	171.0	0.6	54.00	15.48
7311.00	44.34	---	200	V	171.0	0.6	74.00	29.66
9301.10	---	38.19	200	V	0.0	2.0	54.00	15.81
9301.10	47.80	---	200	V	0.0	2.0	74.00	26.20
17906.50	---	48.16	200	H	125.0	8.8	54.00	5.84
17906.50	54.11	---	200	H	125.0	8.8	74.00	19.89

High Channel: 2452MHz


Full Spectrum

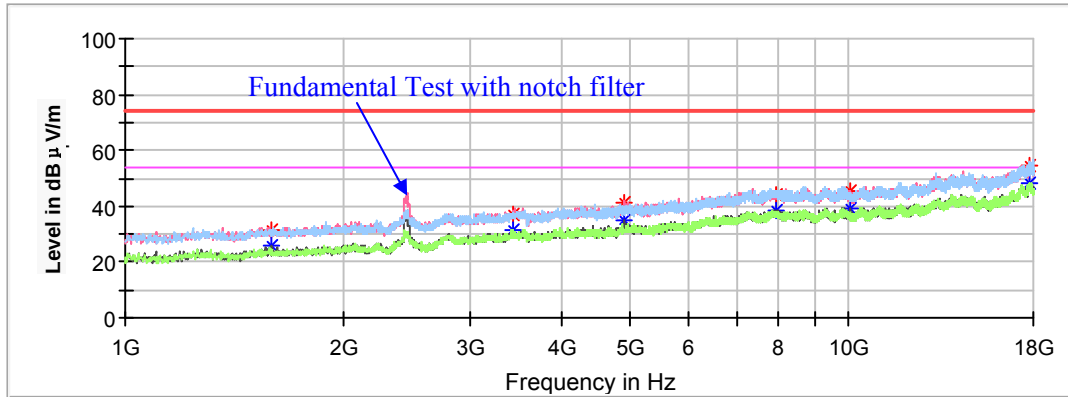


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	---	25.64	200	V	86.0	-16.0	54.00	28.36
1596.70	31.56	---	200	V	86.0	-16.0	74.00	42.44
3442.90	---	31.34	150	H	340.0	-9.0	54.00	22.66
3442.90	36.87	---	150	H	340.0	-9.0	74.00	37.13
4904.00	---	35.12	200	V	236.0	-5.4	54.00	18.88
4904.00	41.20	---	200	V	236.0	-5.4	74.00	32.80
7936.00	---	38.44	200	V	70.0	1.7	54.00	15.56
7936.00	44.38	---	200	V	70.0	1.7	74.00	29.62
10028.70	---	39.05	150	V	95.0	1.9	54.00	14.95
10028.70	45.62	---	150	V	95.0	1.9	74.00	28.38
17814.70	---	48.31	200	H	189.0	8.8	54.00	5.69
17814.70	54.44	---	200	H	189.0	8.8	74.00	19.56

18GHz-25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **high channel of 802.11n-HT40 mode in Z-axis of orientation** was recorded.

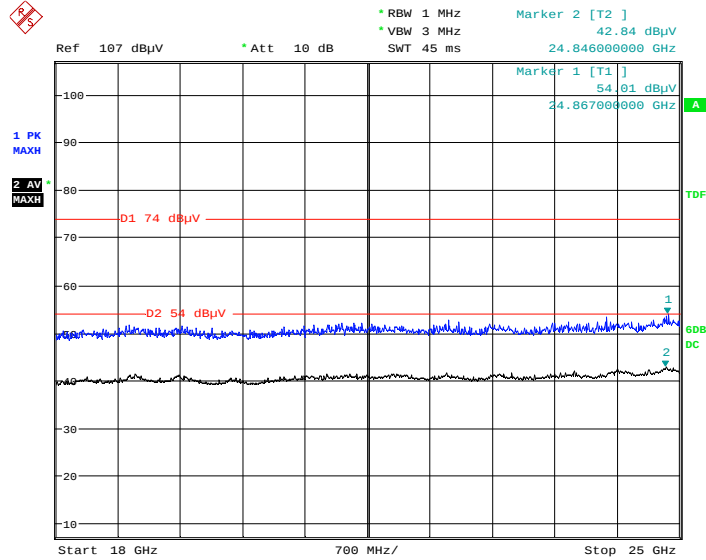Horizontal

Date: 23.JUN.2020 17:36:22

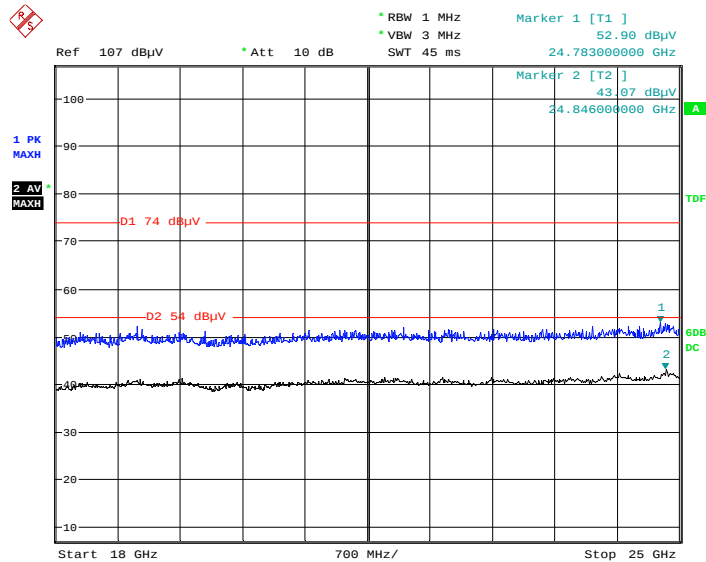Vertical

Date: 23.JUN.2020 17:57:16

Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)**802.11b Mode:** (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	44.94	200.0	V	4.0	-2.9	54.00	9.06
2390.00	53.11	---	200.0	V	4.0	-2.9	74.00	20.89
High Channel: 2462MHz								
2483.50	50.58	---	150.0	V	315.0	-2.5	74.00	23.42
2483.50	---	44.47	150.0	V	315.0	-2.5	54.00	9.53

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	---	50.67	150.0	V	335.0	-2.9	54.00	3.33
2390.00	62.79	---	150.0	V	335.0	-2.9	74.00	11.21
High Channel: 2462MHz								
2483.50	---	50.90	150.0	V	331.0	-2.5	54.00	3.10
2483.50	63.02	---	150.0	V	331.0	-2.5	74.00	10.98

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2390.00	64.87	---	150.0	V	185.0	-2.9	74.00	9.13
2390.00	---	52.89	150.0	V	185.0	-2.9	54.00	1.11
High Channel: 2462MHz								
2483.50	---	52.82	150.0	V	193.0	-2.5	54.00	1.18
2483.50	62.93	---	150.0	V	193.0	-2.5	74.00	11.07

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2390.000000	---	52.28	100.0	V	330.0	-2.9	54.00	1.72
2390.000000	64.84	---	100.0	V	330.0	-2.9	74.00	9.16
High Channel: 2452MHz								
2483.500000	---	47.16	200.0	V	275.0	-2.5	54.00	6.84
2483.500000	62.22	---	200.0	V	275.0	-2.5	74.00	11.78

For BLE Mode:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

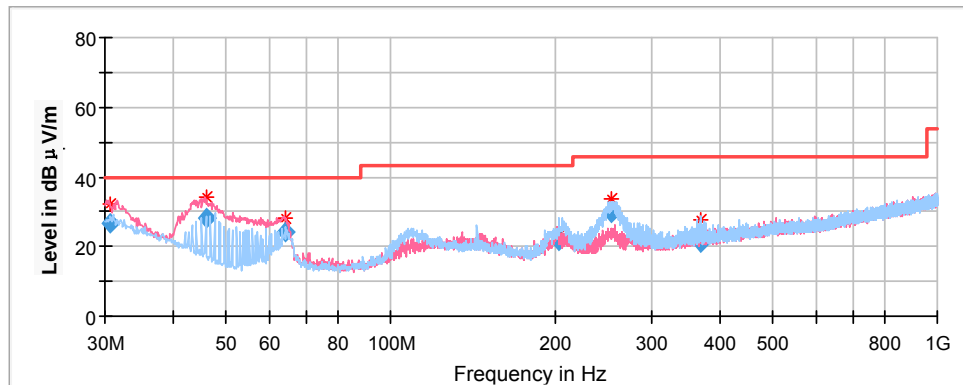

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.76	26.52	100.0	V	330.0	-4.9	40.00	13.48
45.87	28.03	100.0	V	313.0	-15.2	40.00	11.97
64.21	24.12	200.0	V	294.0	-18.1	40.00	15.88
202.31	21.46	100.0	H	300.0	-12.8	43.50	22.04
252.99	29.61	100.0	H	346.0	-12.5	46.00	16.39
369.36	21.23	100.0	H	326.0	-9.3	46.00	24.77

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz


Full Spectrum

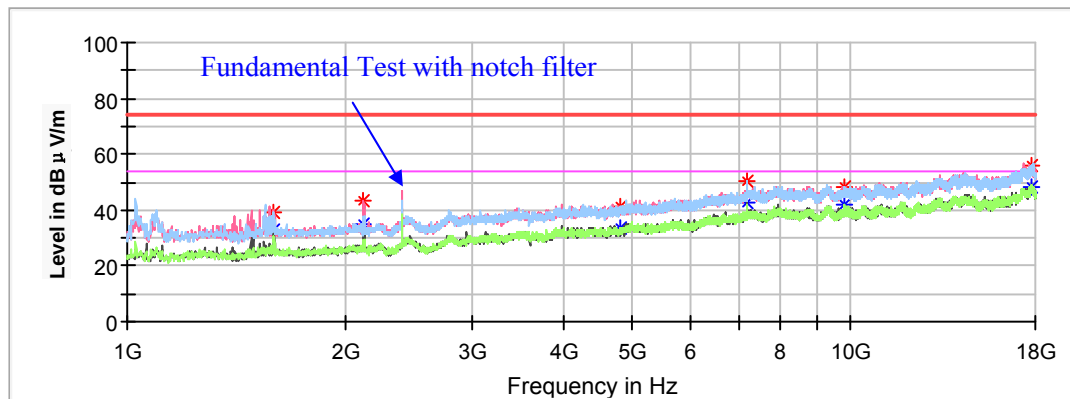

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1596.70	---	32.79	150	V	48.0	-16.0	54.00	21.21
1596.70	38.82	---	150	V	48.0	-16.0	74.00	35.18
2123.70	---	35.31	150	V	263.0	-14.0	54.00	18.69
2123.70	43.25	---	150	V	263.0	-14.0	74.00	30.75
4804.00	---	33.65	150	V	79.0	-5.6	54.00	20.35
4804.00	41.35	---	150	V	79.0	-5.6	74.00	32.65
7206.00	---	42.81	200	V	355.0	0.4	54.00	11.19
7206.00	50.19	---	200	V	355.0	0.4	74.00	23.81
9826.40	---	42.07	150	H	294.0	2.0	54.00	11.93
9826.40	48.59	---	150	H	294.0	2.0	74.00	25.41
17814.70	---	48.08	150	V	94.0	8.8	54.00	5.92
17814.70	56.28	---	150	V	94.0	8.8	74.00	17.72

Middle Channel: 2440MHz


Full Spectrum

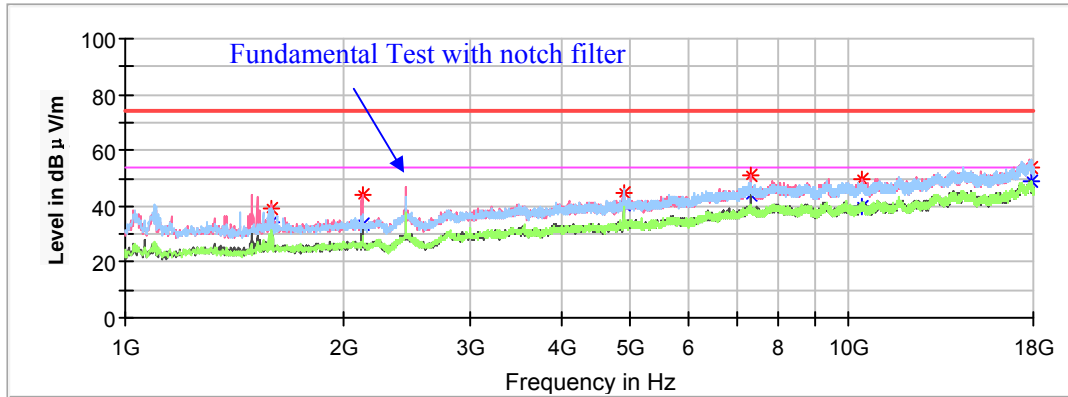

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	38.92	---	200	V	296.0	-16.0	74.00	35.08
1596.70	---	34.03	200	V	296.0	-16.0	54.00	19.97
2127.10	44.02	---	150	V	263.0	-13.9	74.00	29.98
2127.10	---	33.27	150	V	263.0	-13.9	54.00	20.73
4880.00	---	40.69	200	V	58.0	-5.4	54.00	13.31
4880.00	44.75	---	200	V	58.0	-5.4	74.00	29.25
7320.00	50.81	---	200	V	189.0	0.6	74.00	23.19
7320.00	---	43.86	200	V	189.0	0.6	54.00	10.14
10460.50	49.46	---	150	V	145.0	2.3	74.00	24.54
10460.50	---	39.61	150	V	145.0	2.3	54.00	14.39
17853.80	---	48.94	200	V	249.0	8.8	54.00	5.06
17853.80	53.63	---	200	V	249.0	8.8	74.00	20.37

High Channel: 2480MHz


Full Spectrum

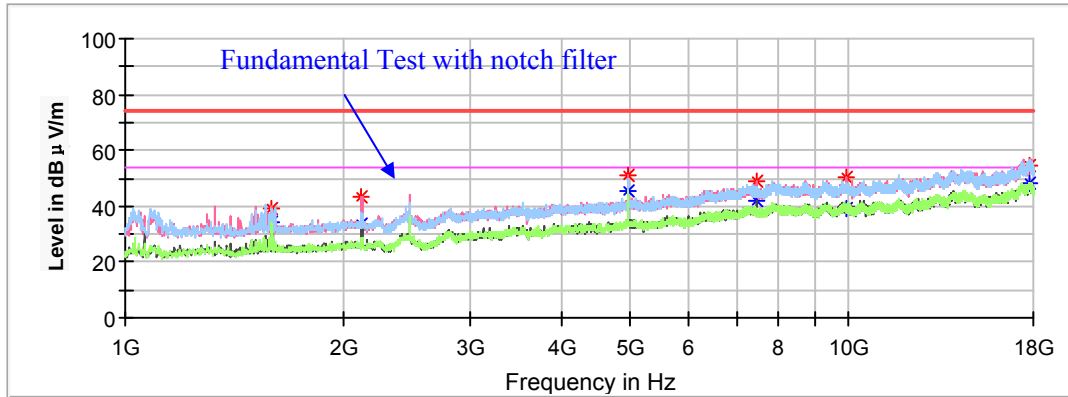


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	---	33.97	150	H	281.0	-16.0	54.00	20.03
1596.70	39.32	---	150	H	281.0	-16.0	74.00	34.68
2123.70	---	33.80	150	V	258.0	-14.0	54.00	20.20
2123.70	43.64	---	150	V	258.0	-14.0	74.00	30.36
4960.00	---	45.14	150	V	48.0	-5.3	54.00	8.86
4960.00	51.34	---	150	V	48.0	-5.3	74.00	22.66
7440.00	---	41.64	150	V	80.0	0.9	54.00	12.36
7440.00	48.65	---	150	V	80.0	0.9	74.00	25.35
9914.80	---	38.99	200	V	258.0	1.9	54.00	15.01
9914.80	50.21	---	200	V	258.0	1.9	74.00	23.79
17782.40	---	48.30	200	V	39.0	8.8	54.00	5.70
17782.40	54.29	---	200	V	39.0	8.8	74.00	19.71

18GHz-25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **high** channel of operation in the Z axis of orientation was recorded)

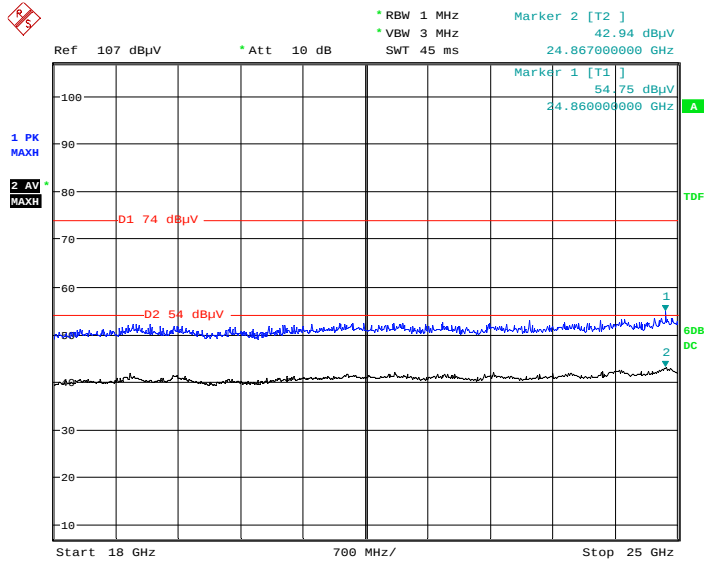Horizontal

Date: 23.JUN.2020 16:27:30

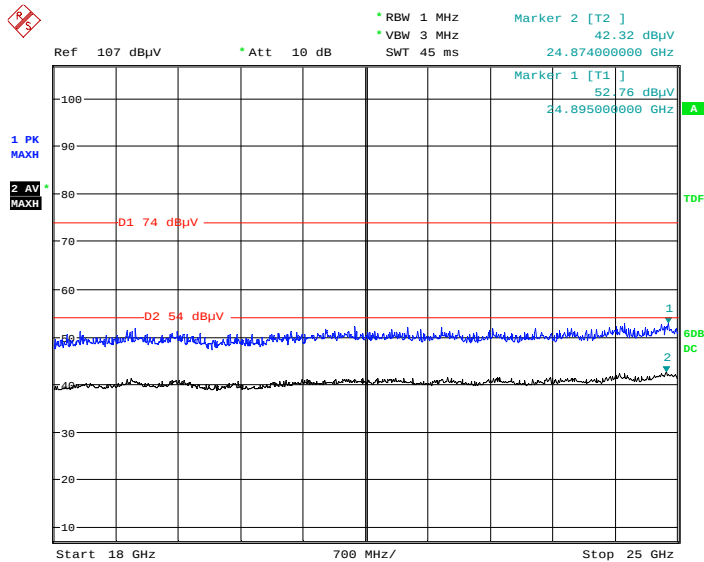Vertical

Date: 23.JUN.2020 16:48:18

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	40.27	150.0	V	27.0	-2.9	54.00	13.73
2390.00	50.38	---	150.0	V	27.0	-2.9	74.00	23.62
High Channel: 2480MHz								
2483.50	46.34	---	200.0	V	256.0	-2.5	74.00	27.66
2483.50	---	39.62	200.0	V	256.0	-2.5	54.00	14.38

Transmitting simultaneously test:**30MHz-1GHz**

(The worst case low channel of EDR(8DPSK) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)

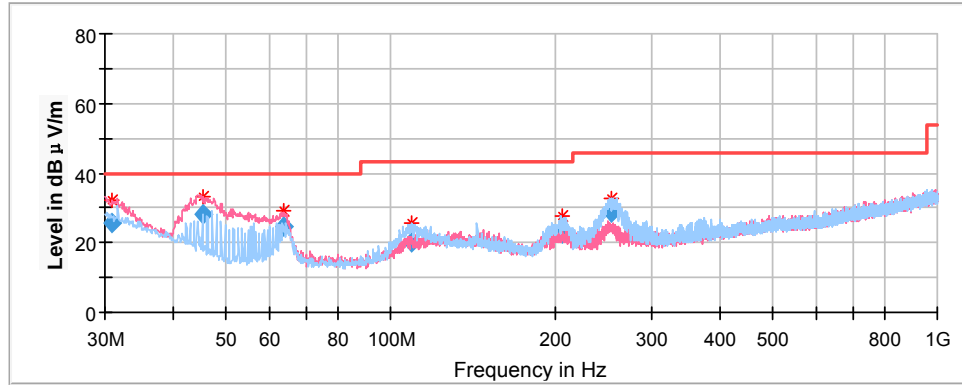


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.898600	25.58	100.0	V	347.0	-5.0	40.00	14.42
45.271350	28.15	100.0	V	309.0	-14.8	40.00	11.85
63.494800	24.67	100.0	V	51.0	-18.1	40.00	15.33
109.525900	20.13	200.0	H	2.00	-13.6	43.50	23.37
205.952850	22.87	100.0	H	284.0	-12.7	43.50	20.63
253.402050	28.63	100.0	H	147.0	-12.5	46.00	17.37

1GHz-18GHz

(The worst case low channel of EDR(8DPSK) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)

Full Spectrum

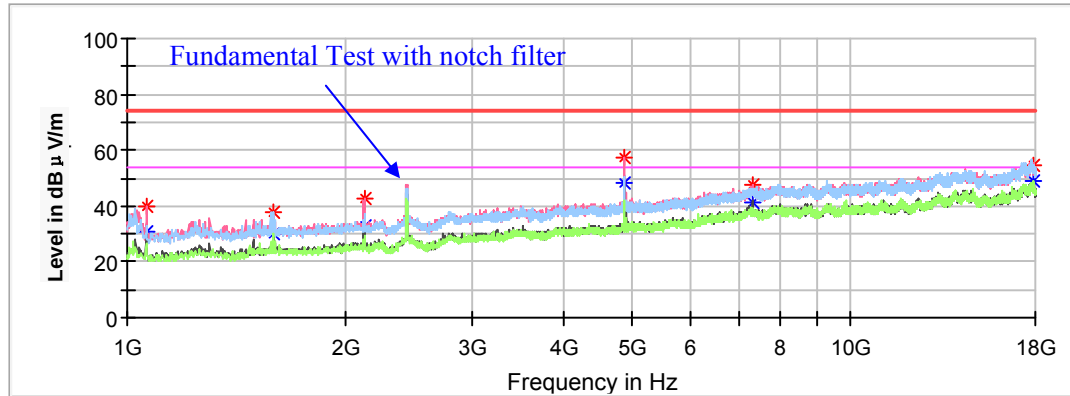


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1062.90	---	30.64	150.0	V	212.0	-18.7	54.00	23.36
1062.90	39.66	---	150.0	V	212.0	-18.7	74.00	34.34
1595.00	---	30.25	200.0	H	168.0	-16.0	54.00	23.75
1595.00	37.45	---	200.0	H	168.0	-16.0	74.00	36.55
2128.80	---	32.97	150.0	V	153.0	-13.9	54.00	21.03
2128.80	42.48	---	150.0	V	153.0	-13.9	74.00	31.52
4874.00	---	48.58	150.0	V	328.0	-5.4	54.00	5.42
4874.00	57.14	---	150.0	V	328.0	-5.4	74.00	16.86
7311.00	47.61	---	150.0	V	47.0	0.6	74.00	26.39
7311.00	---	41.53	150.0	V	47.0	0.6	54.00	12.47
17843.60	54.77	---	200.0	H	328.0	8.8	74.00	19.23
17843.60	---	48.66	200.0	H	328.0	8.8	54.00	5.34

18GHz-25GHz:


(The worst case low channel of EDR(8DPSK) and 802.11n-HT40 high Channel of Wi-Fi mode transmitting simultaneously in Z-axis of orientation was recorded)

Vertical

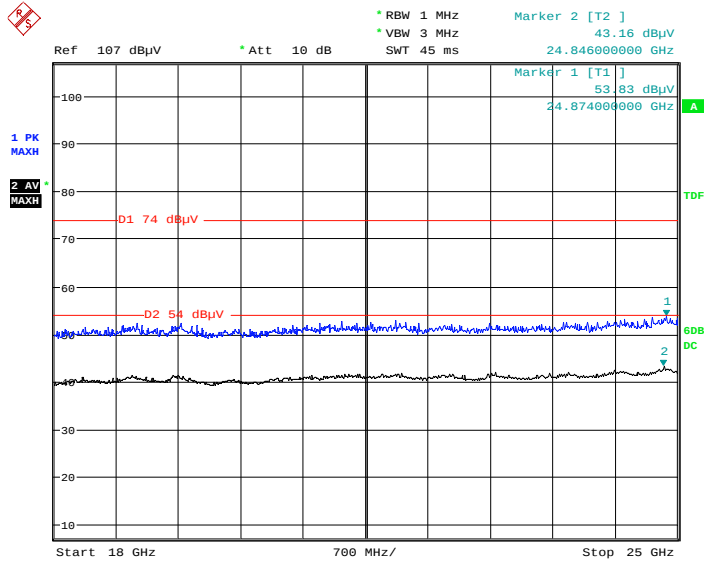

Date: 9.JUL.2020 03:08:21


Horizontal

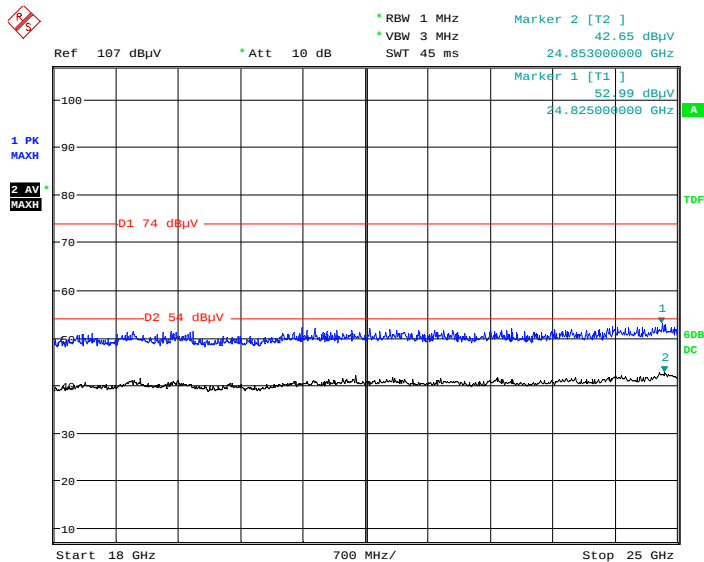


Date: 9.JUL.2020 03:36:15

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

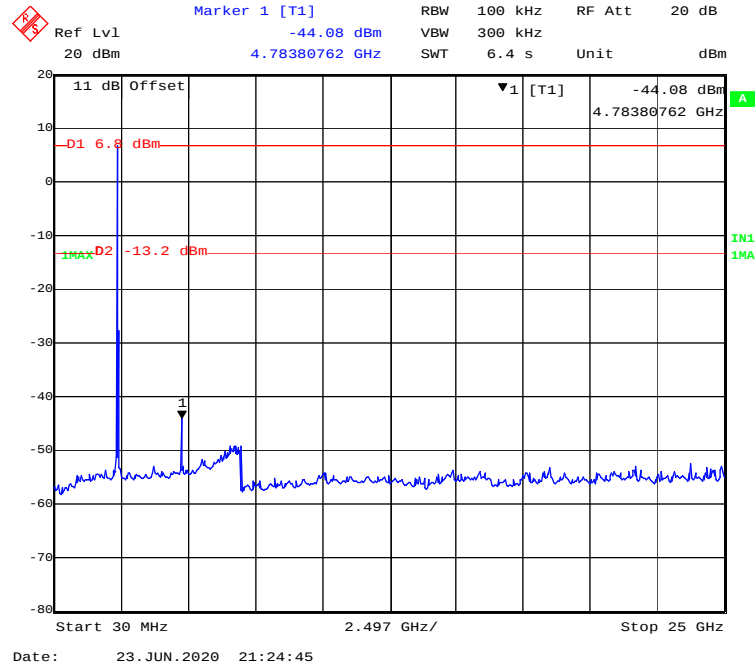


802.11b Mode Middle Channel

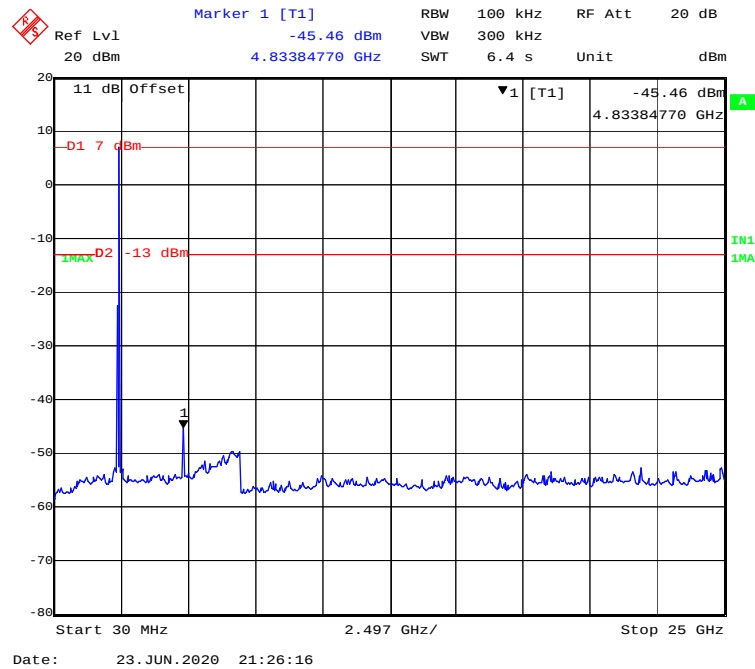


802.11b Mode High Channel

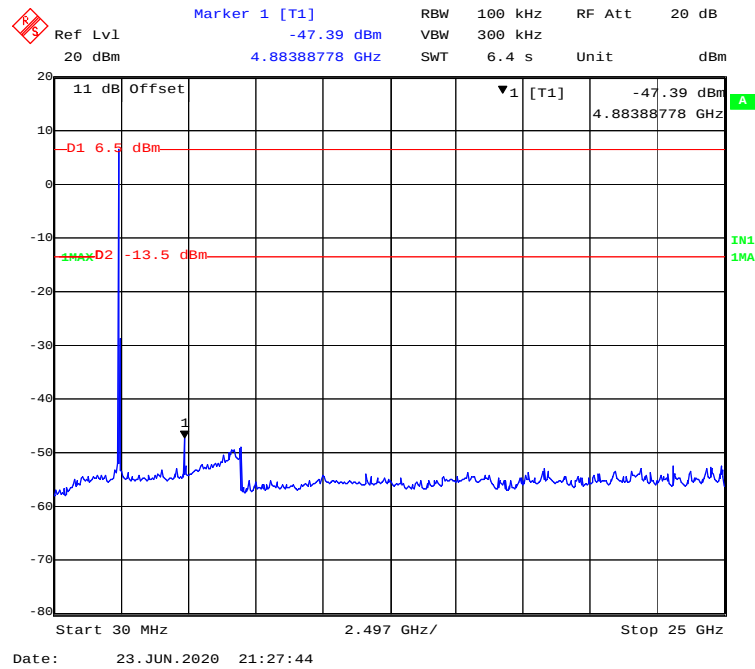


802.11g Mode Low Channel

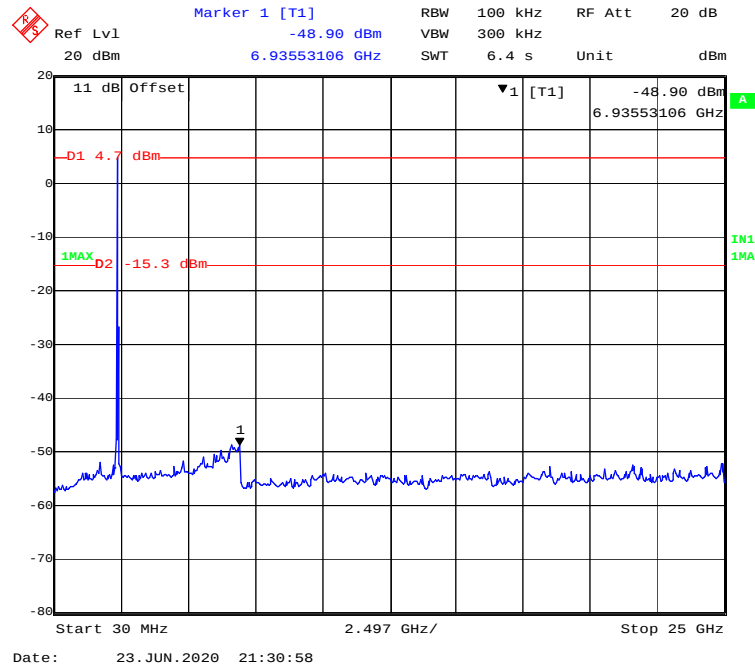

802.11g Mode Middle Channel

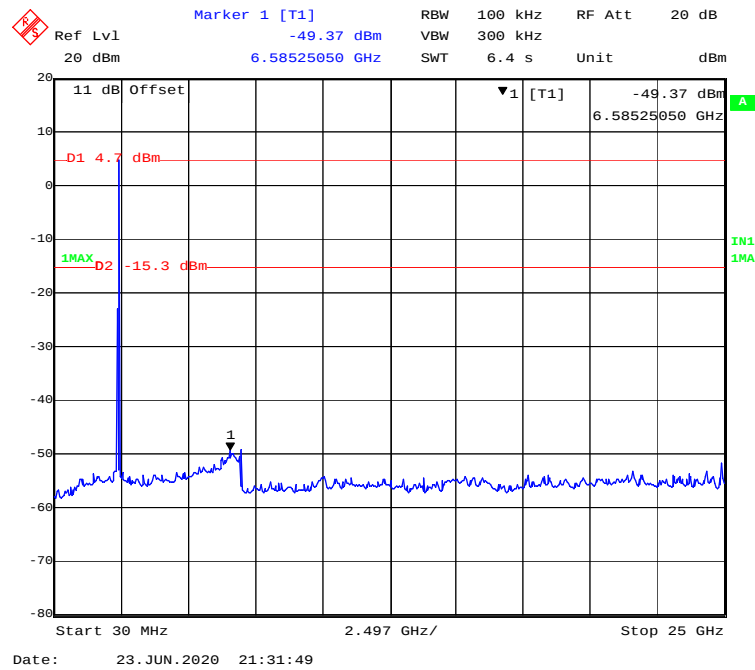

802.11g Mode High Channel

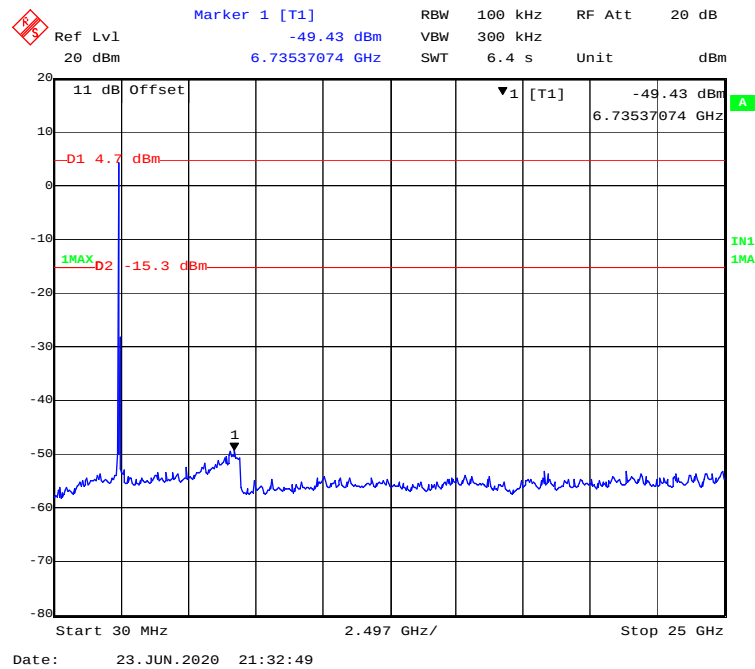

Ref Lvl 20 dBm RBW 100 kHz RF Att 20 dB
 20 dBm VBW 300 kHz Unit dBm
 6.83545090 GHz SWT 6.4 s

11 dB Offset
 ▼1 [T1]
 -49.33 dBm
 6.83545090 GHz

-D1 4.6 dBm
 1MAX D2 -15.4 dBm

1

Start 30 MHz 2.497 GHz/ Stop 25 GHz

Date: 23. JUN. 2020 21:42:38

Marker 1 [T1]

Ref Lvl -49.07 dBm

20 dBm 6.63529058 GHz

RBW 100 kHz RF Att 20 dB

VBW 300 kHz

SWT 6.4 s Unit dBm

11 dB Offset

▼1 [T1]

-49.07 dBm

6.63529058 GHz

-D1 4.6 dBm

1MAX D2 -15.4 dBm

IN1 1MA

1


Start 30 MHz

2.497 GHz/


Stop 25 GHz

Date: 23. JUN. 2020 21:36:52


802.11n-HT20 Mode High Channel

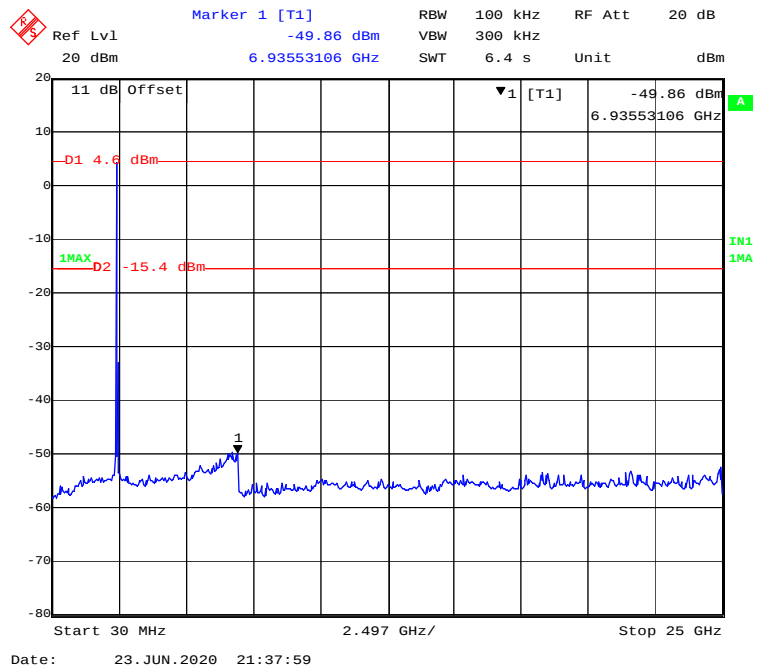


802.11n-HT40 Mode Low Channel

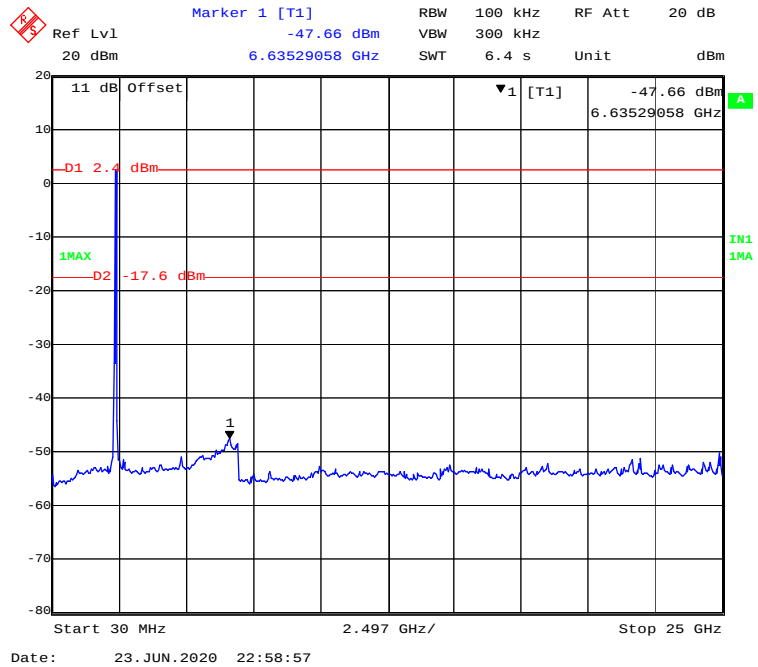


802.11n-HT40 Mode Middle Channel

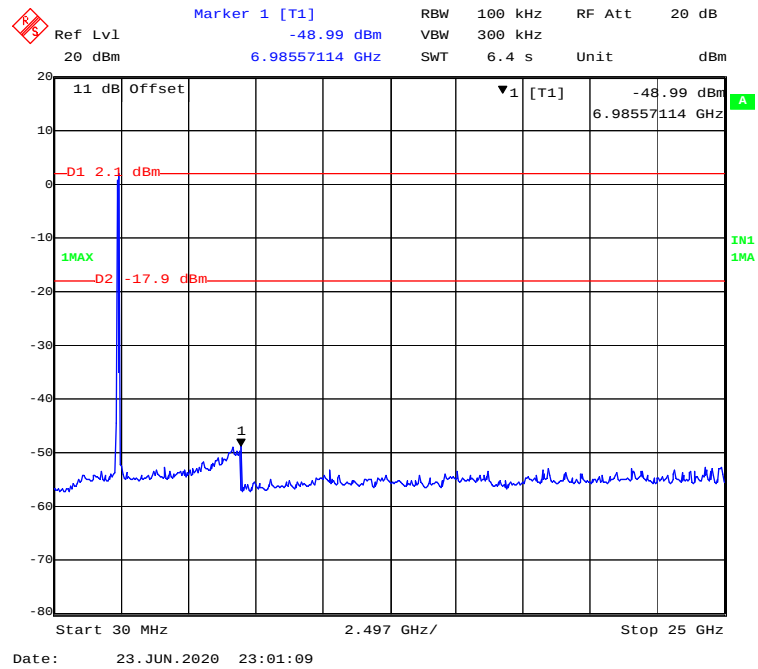

802.11n-HT40 Mode High Channel

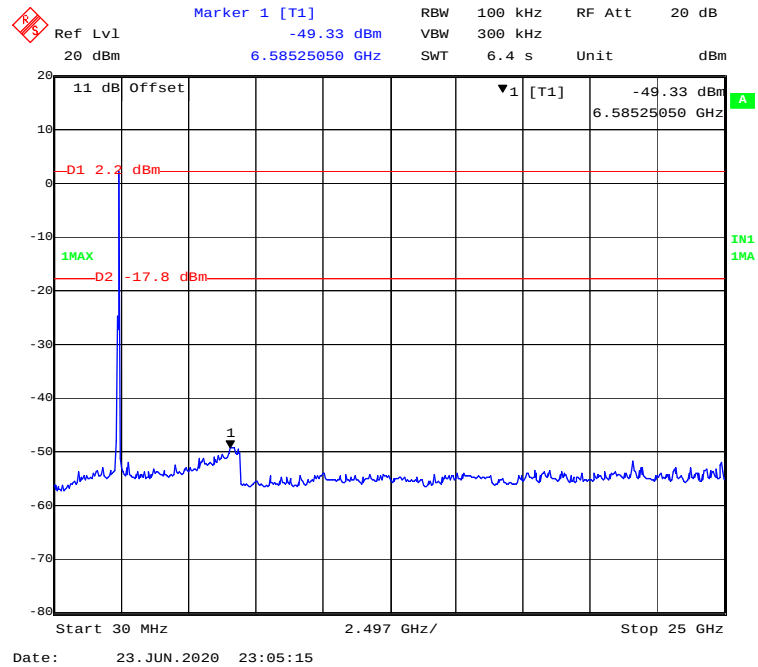


BLE Mode Low Channel

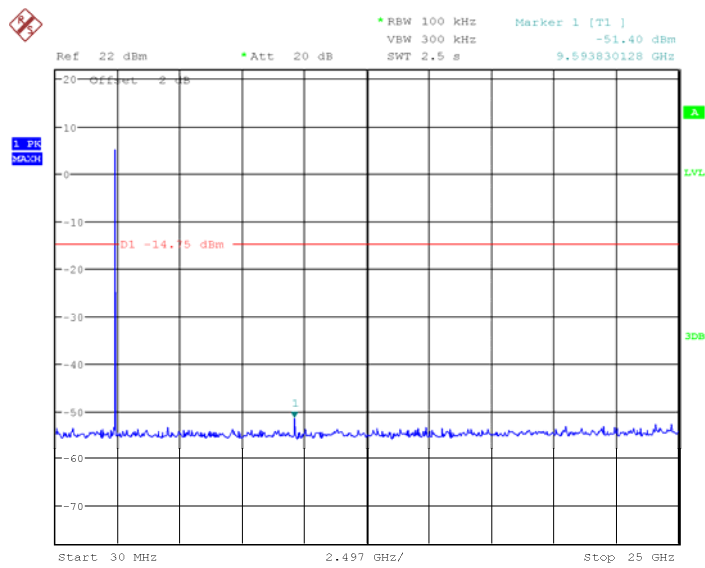


Date: 21.APR.2020 00:00:48

BLE Mode Middle Channel

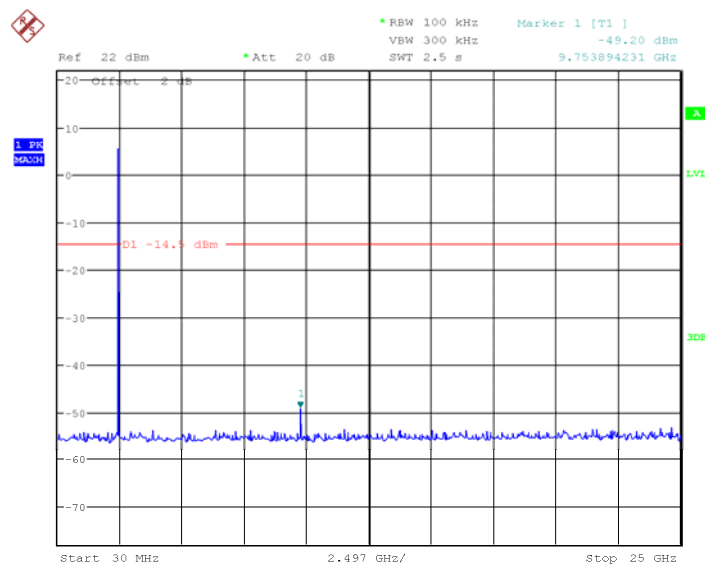

Date: 20.APR.2020 23:58:34

BLE Mode High Channel

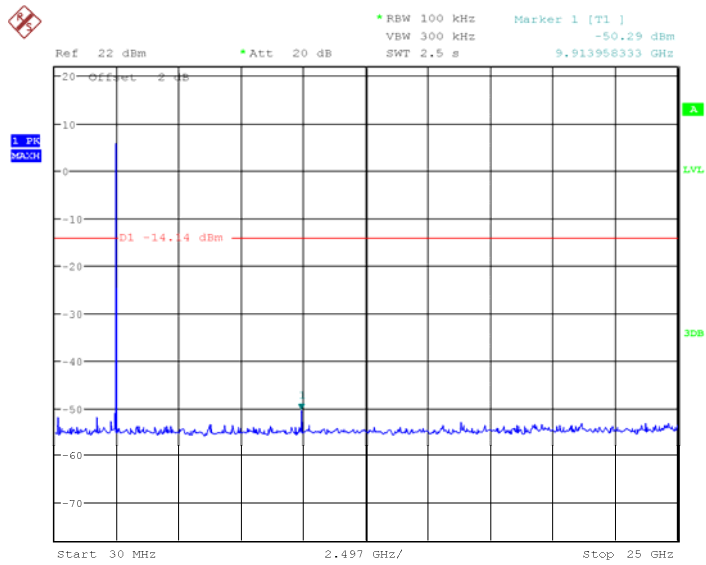

Date: 21.APR.2020 00:03:26


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	23.1~24.6 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.7~101.3 kPa


The testing was performed by Carry Cai from 2020-04-20 to 2020-06-23.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.261	≥ 0.5
Middle	2437	10.271	≥ 0.5
High	2462	10.281	≥ 0.5
802.11g Mode			
Low	2412	16.513	≥ 0.5
Middle	2437	16.603	≥ 0.5
High	2462	16.533	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.806	≥ 0.5
Middle	2437	17.796	≥ 0.5
High	2462	17.816	≥ 0.5
802.11n-HT40 Mode			
Low	2422	36.723	≥ 0.5
Middle	2437	36.723	≥ 0.5
High	2452	36.723	≥ 0.5
BLE Mode			
Low	2402	0.663	≥ 0.5
Middle	2440	0.663	≥ 0.5
High	2480	0.673	≥ 0.5


802.11b Mode Low Channel

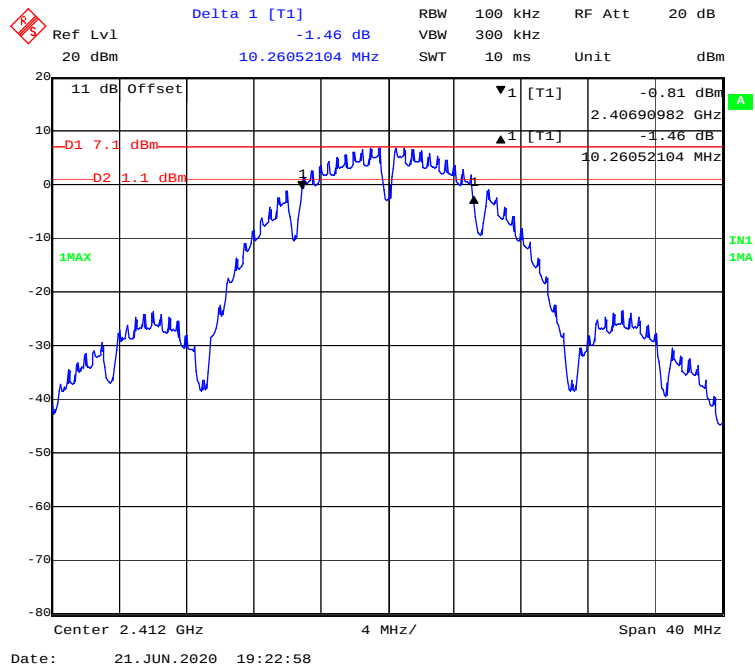


802.11b Mode Middle Channel

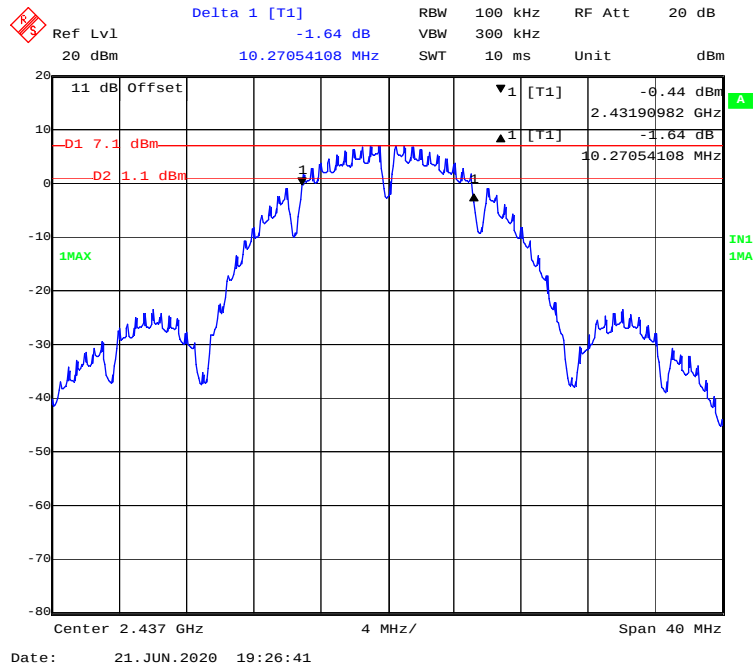


802.11b Mode High Channel

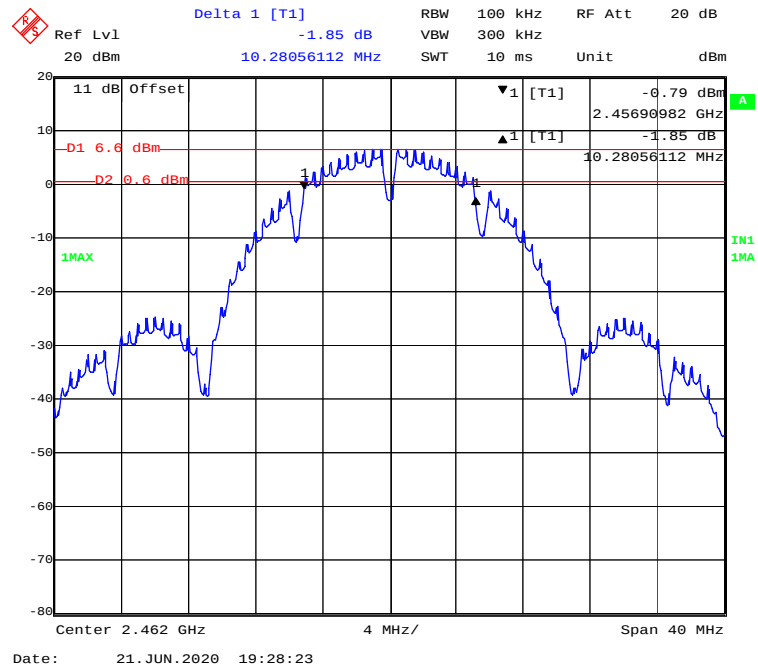


802.11g Mode Low Channel

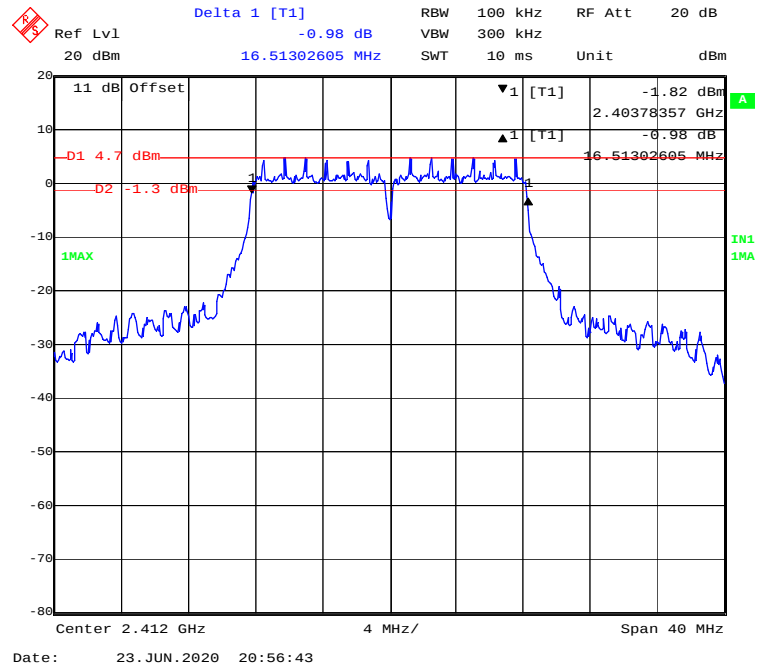

802.11g Mode Middle Channel

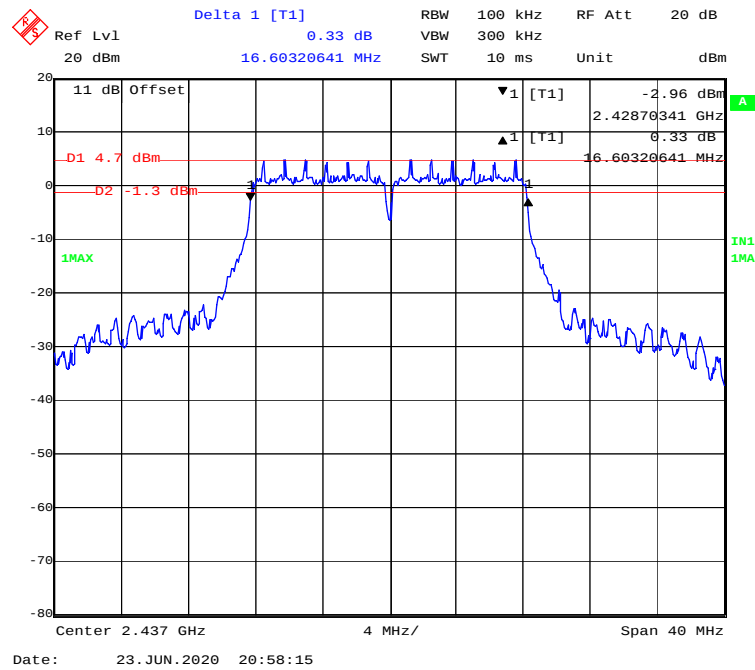

802.11g Mode High Channel

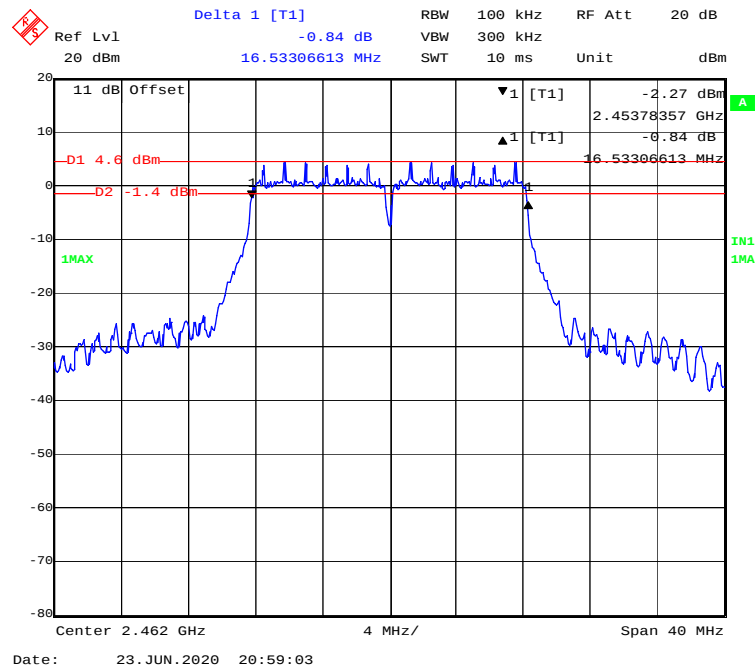

Delta 1 [T1] -1.06 dB

RBW 100 kHz RF Att 20 dB

Ref Lvl 20 dBm Unit dBm

2.40313226 GHz

-2.50 dBm

-1.06 dB

17.80561122 MHz

-1.3 dBm

11 dB Offset

D1 4.7 dBm

D2 -1.3 dBm

1MAX

IN1 1MA

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 23. JUN. 2020 21:01:28

Delta 1 [T1]

Ref Lvl -1.27 dB

RBW 100 kHz

RF Att 20 dB

20 dBm

17.79559118 MHz

SWT 10 ms

Unit dBm

11 dB Offset

D1 4.7 dBm

D2 -1.3 dBm

1MAX

▼1 [T1]

▲1 [T1]

-2.17 dBm

2.42814228 GHz

-1.27 dB

17.79559118 MHz

IN1

1MA


Center 2.437 GHz

4 MHz/


Span 40 MHz

Date: 23. JUN. 2020 21:00:35

802.11n-HT20 Mode High Channel

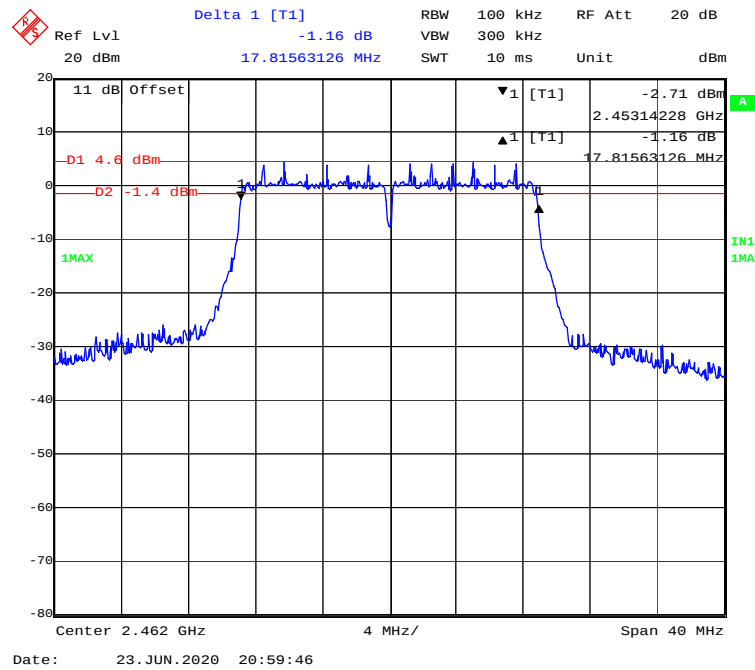

802.11n-HT40 Mode Low Channel

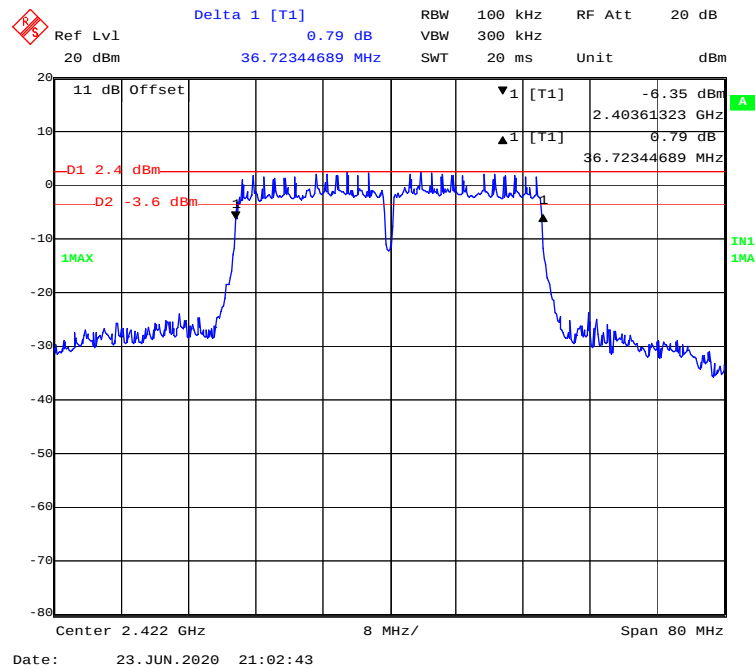

Delta 1 [T1]

Ref Lvl 0.79 dB

20 dBm 36.72344689 MHz

RBW 100 kHz

VBW 300 kHz

SWT 20 ms

RF Att 20 dB

Unit dBm

11 dB Offset

D1 2.4 dBm

D2 -3.6 dBm

1MAX

▼1 [T1]

▲1 [T1]

-6.35 dBm

2.41868337 GHz

0.79 dB

36.72344689 MHz

IN1

IMA

Center 2.437 GHz

8 MHz/

Span 80 MHz

Date: 23. JUN. 2020 21:03:27

Delta 1 [T1]

Ref Lvl 0.50 dB

RBW 100 kHz

RF Att 20 dB

20 dBm

36.72344689 MHz

SWT 20 ms

Unit dBm

11 dB Offset

D1 2.4 dBm

D2 -3.6 dBm

1MAX

▼1 [T1]

▲1 [T1]

-5.86 dBm

2.43359319 GHz

0.50 dB

36.72344689 MHz

IN1 1MA


Center 2.452 GHz

8 MHz/

Span 80 MHz


Date: 23. JUN. 2020 21:05:37

BLE Mode Low Channel

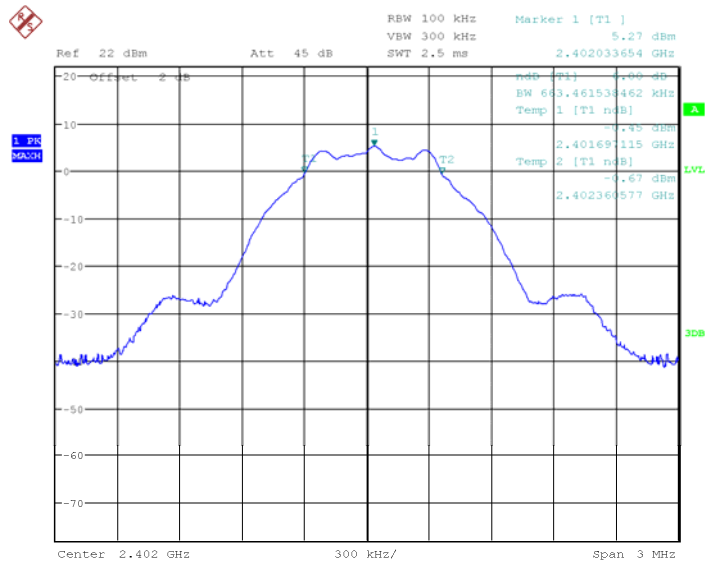


Date: 20.APR.2020 23:13:35

Middle Channel

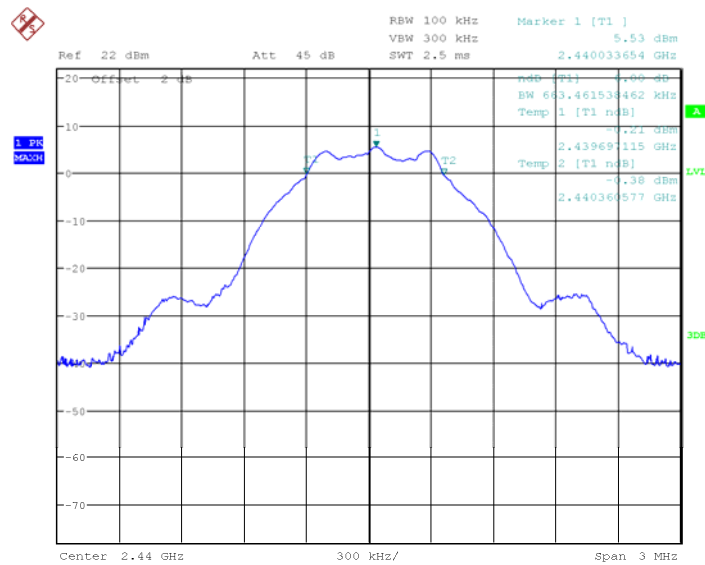

Date: 20.APR.2020 23:14:56

High Channel

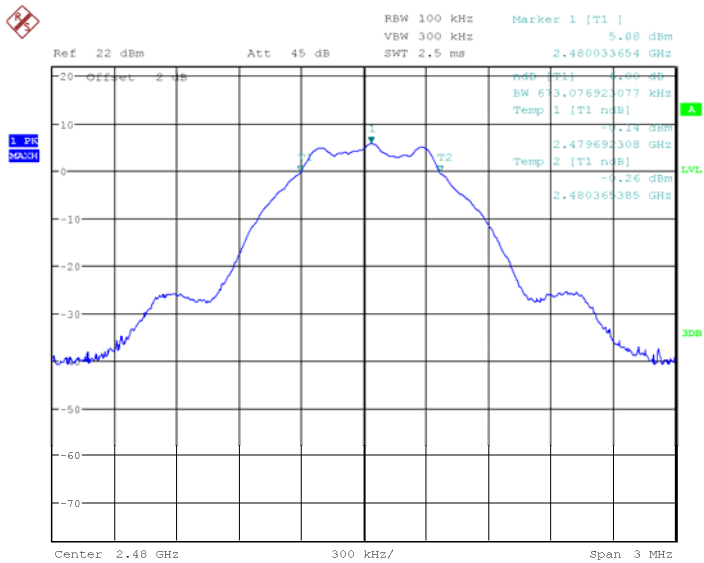

Date: 20.APR.2020 23:17:54

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

For Wi-Fi:

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.



For BLE:

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data**Environmental Conditions**

Temperature:	23.1~24.6 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.7~101.3 kPa


The testing was performed by Carry Cai from 2020-04-20 to 2020-06-23.

Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	20.50	30	Pass
Middle	2437	20.44	30	Pass
High	2462	20.02	30	Pass
802.11g Mode				
Low	2412	24.36	30	Pass
Middle	2437	24.59	30	Pass
High	2462	24.16	30	Pass
802.11n-HT20 Mode				
Low	2412	24.31	30	Pass
Middle	2437	24.54	30	Pass
High	2462	23.98	30	Pass
802.11n-HT40 Mode				
Low	2422	24.74	30	Pass
Middle	2437	24.78	30	Pass
High	2452	24.86	30	Pass
BLE Mode				
Low	2402	5.61	30	Pass
Middle	2440	5.87	30	Pass
High	2480	6.18	30	Pass

BLE Mode Low Channel

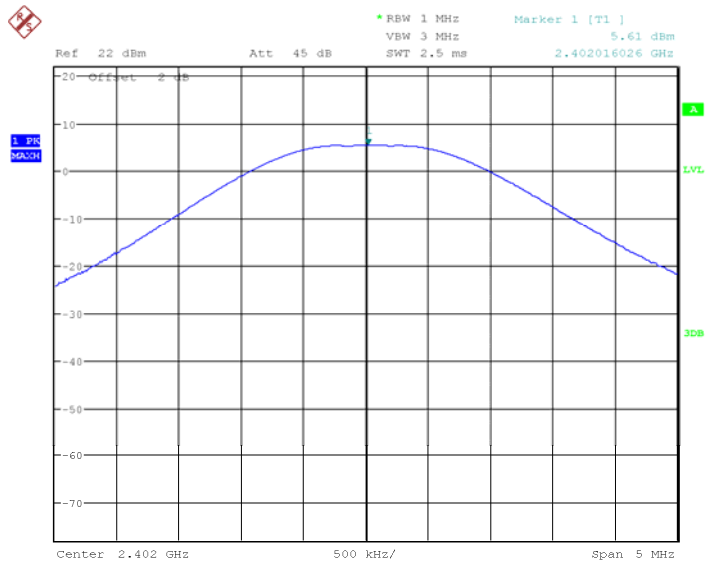


Date: 20.APR.2020 23:22:47

BLE Mode Middle Channel

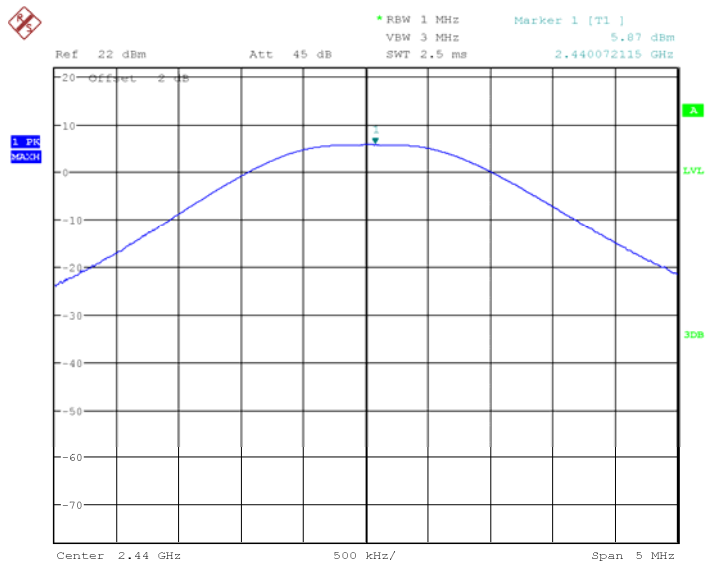

Date: 20.APR.2020 23:21:39

BLE Mode High Channel

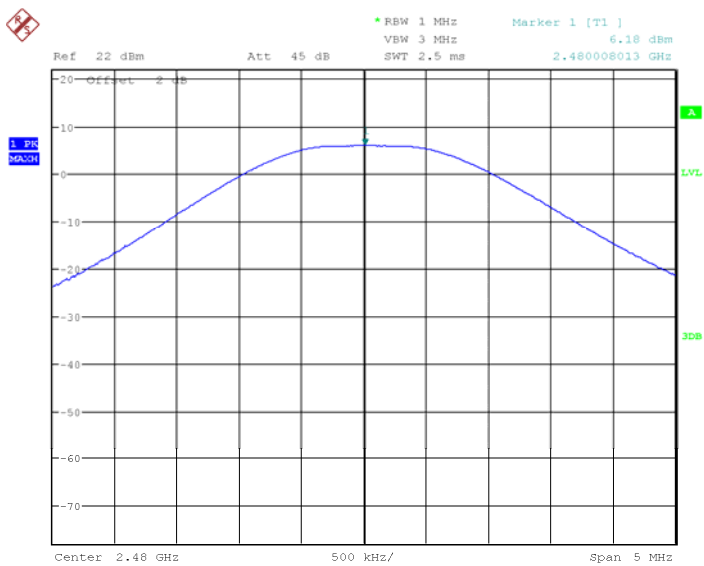

Date: 20.APR.2020 23:20:10

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	23.1~24.6 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.7~101.3 kPa

The testing was performed by Carry Cai from 2020-04-20 to 2020-06-23.


Test Result: Compliant.

EUT operation mode: Transmitting


802.11b Mode Left Side

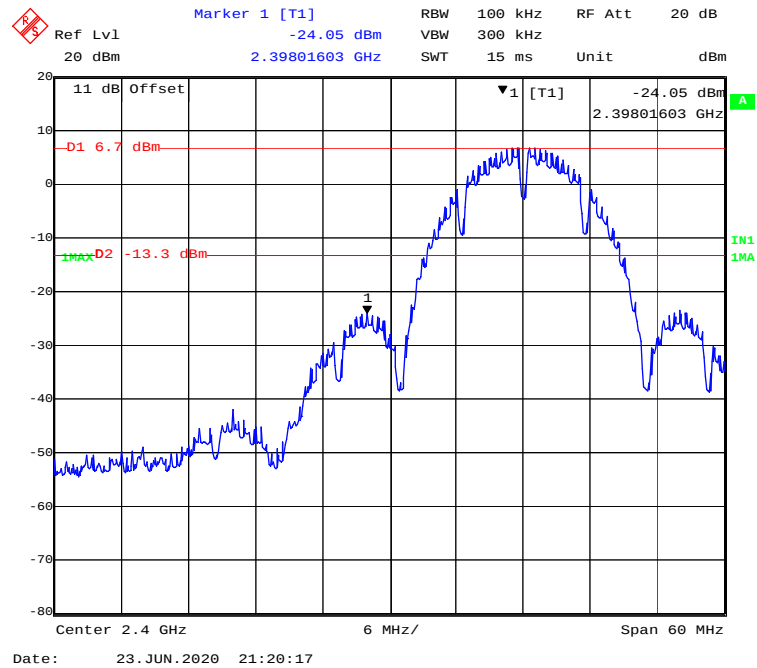


802.11b Mode Right Side

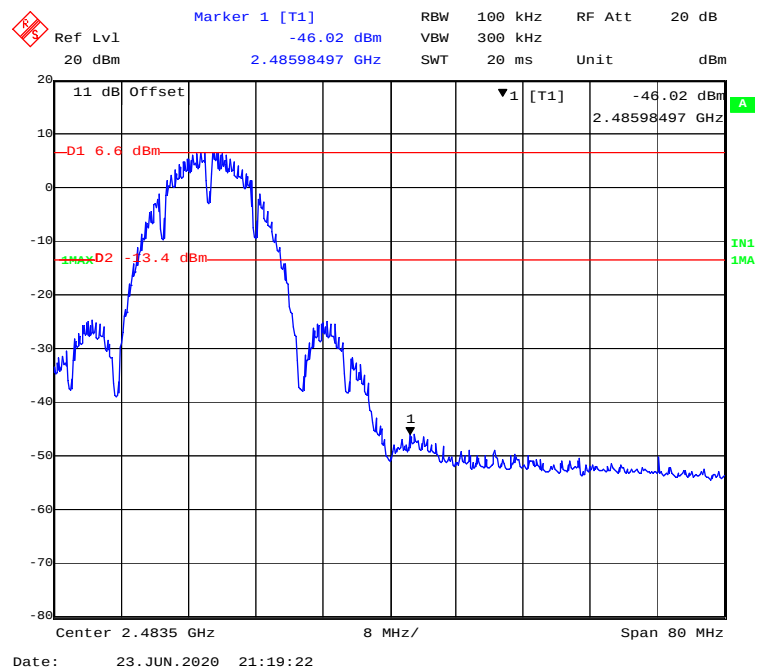


802.11g Mode Left Side

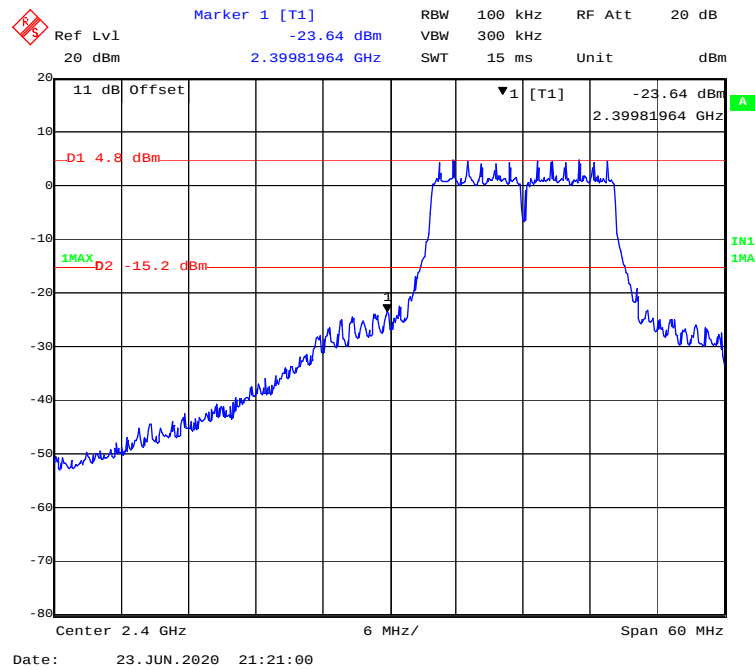


802.11g Mode Right Side

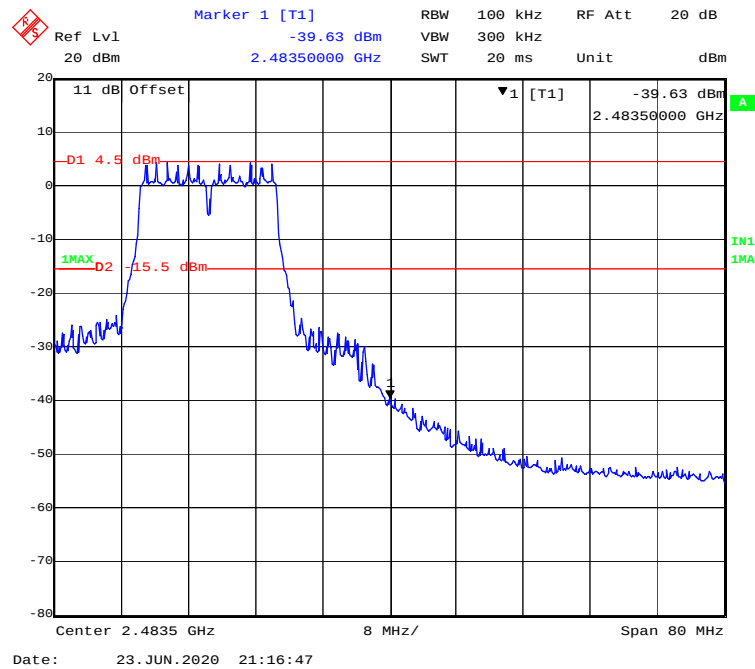


802.11n-HT20 Mode Left Side

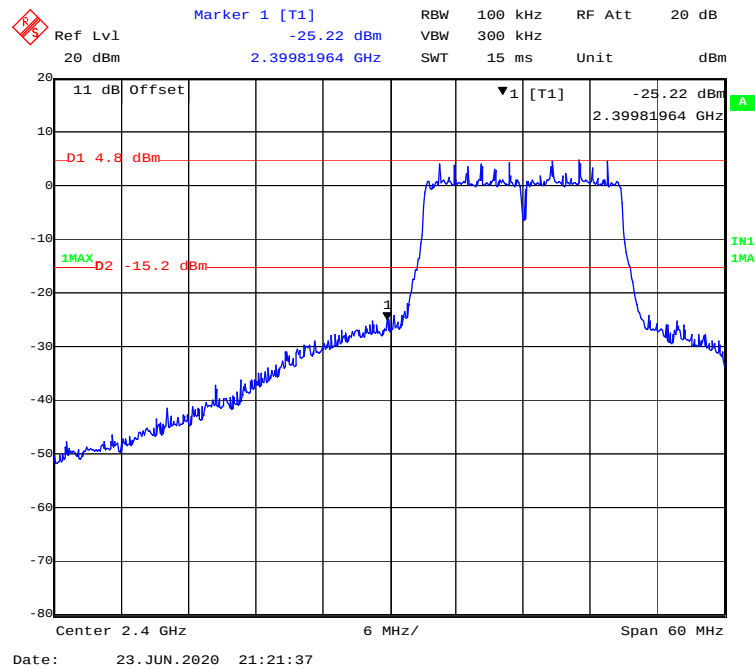


802.11n-HT20 Mode Right Side

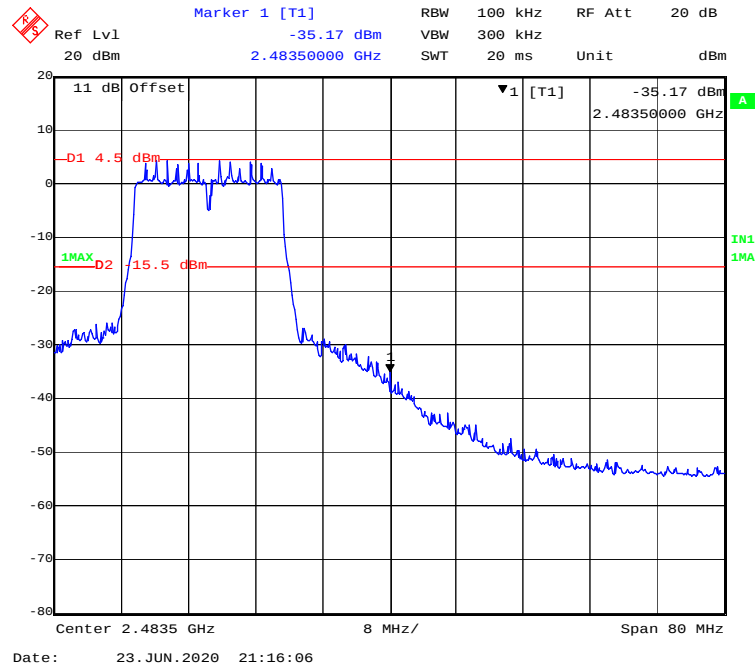


802.11n-HT40 Mode Left Side

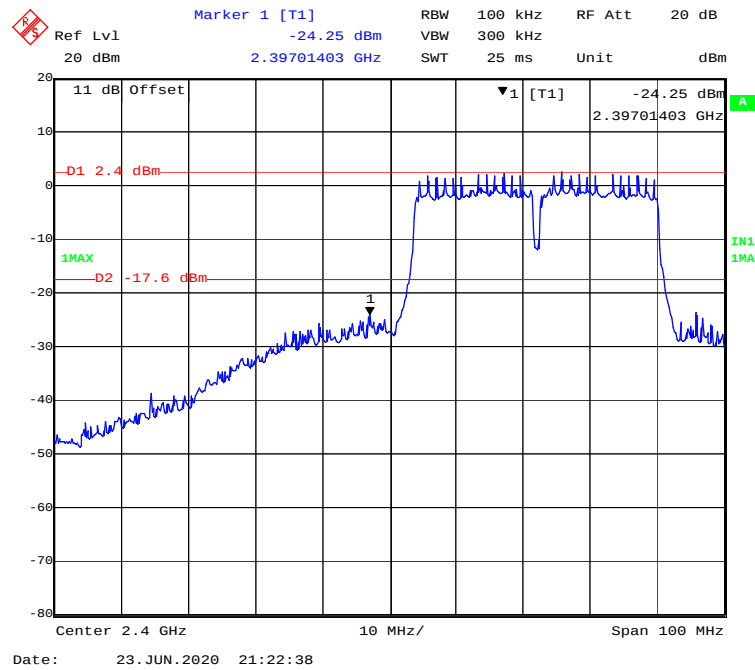

802.11n-HT40 Mode Right Side

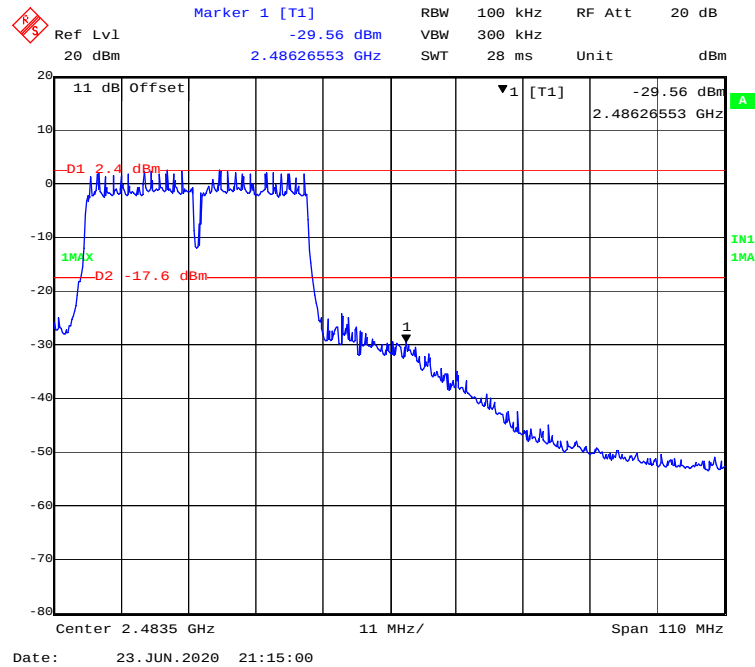


BLE Mode Left Side

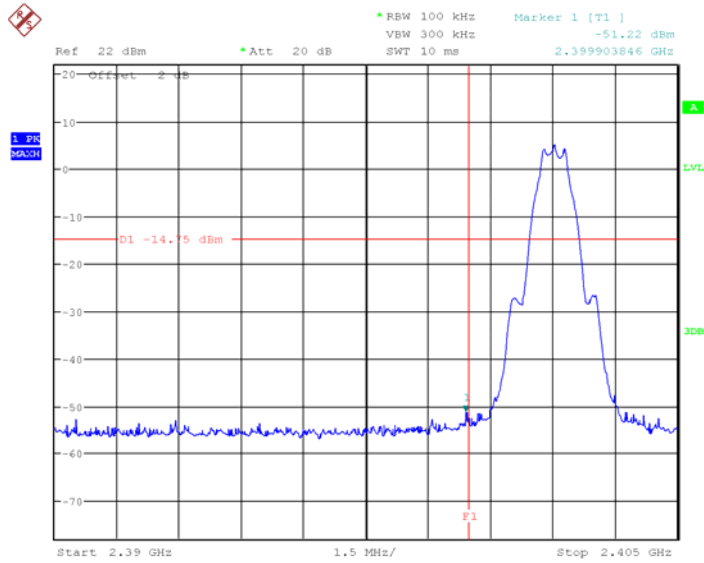

Date: 20.APR.2020 23:47:35

BLE Mode Right Side

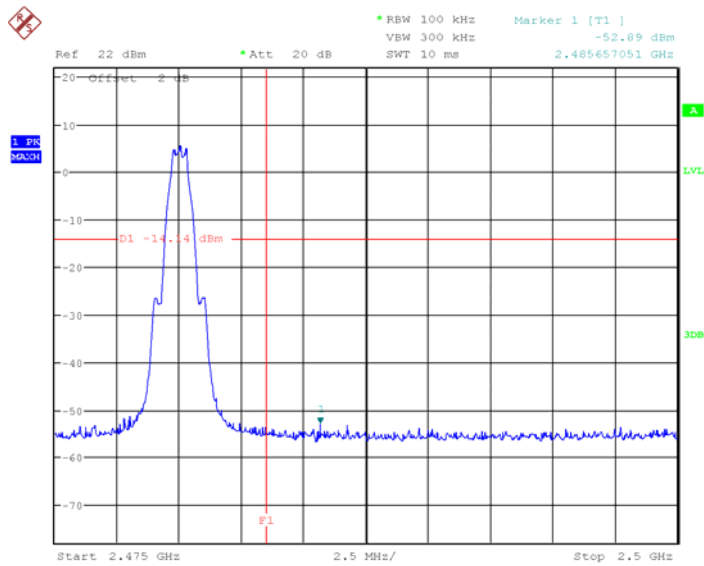

Date: 20.APR.2020 23:55:53

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	23.1~24.6 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.7~101.3 kPa


The testing was performed by Carry Cai from 2020-04-20 to 2020-06-23.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-9.10	≤8
Middle	2437	-9.05	≤8
High	2462	-10.34	≤8
802.11g Mode			
Low	2412	-11.93	≤8
Middle	2437	-11.56	≤8
High	2462	-11.91	≤8
802.11n-HT20 mode			
Low	2412	-11.84	≤8
Middle	2437	-11.69	≤8
High	2462	-10.99	≤8
802.11n-HT40 mode			
Low	2422	-13.25	≤8
Middle	2437	-13.79	≤8
High	2452	-13.57	≤8
BLE Mode			
Low	2402	-9.18	≤8
Middle	2440	-8.89	≤8
High	2480	-8.37	≤8


802.11b Mode Low Channel

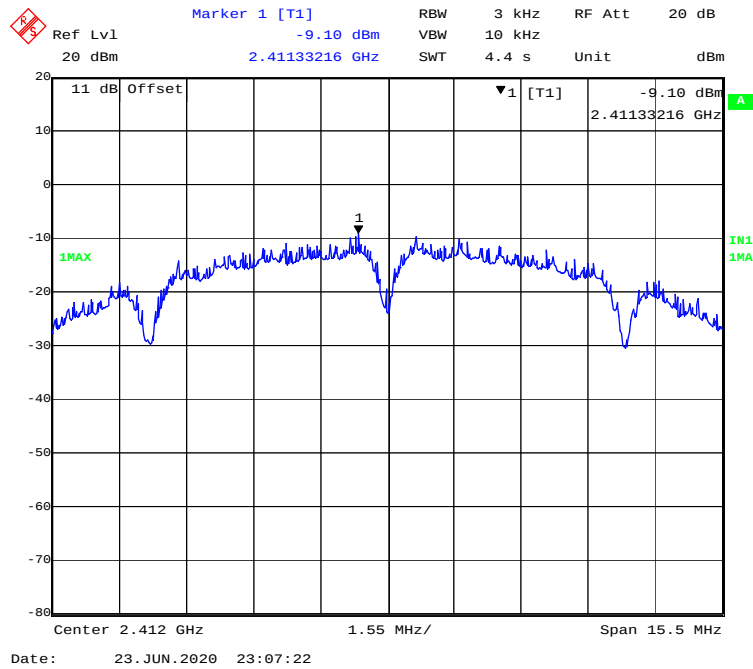


802.11b Mode Middle Channel

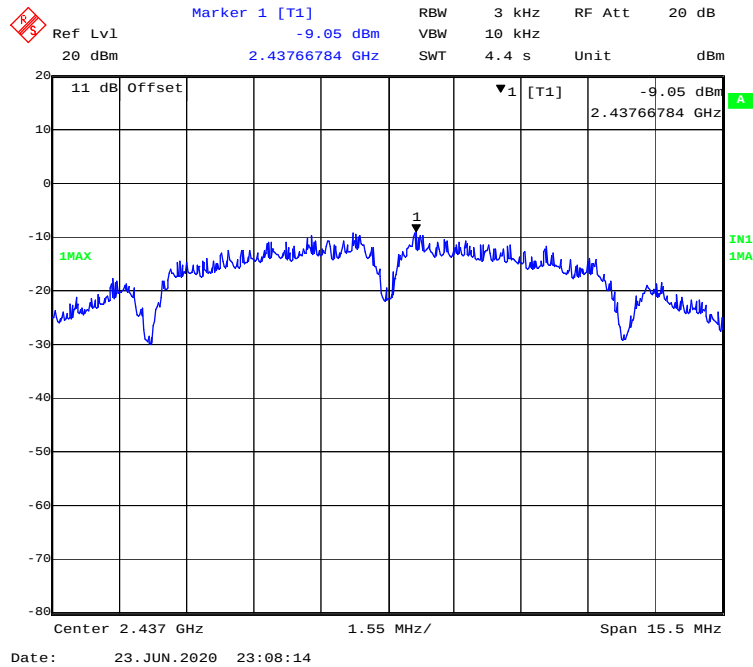


802.11b Mode High Channel

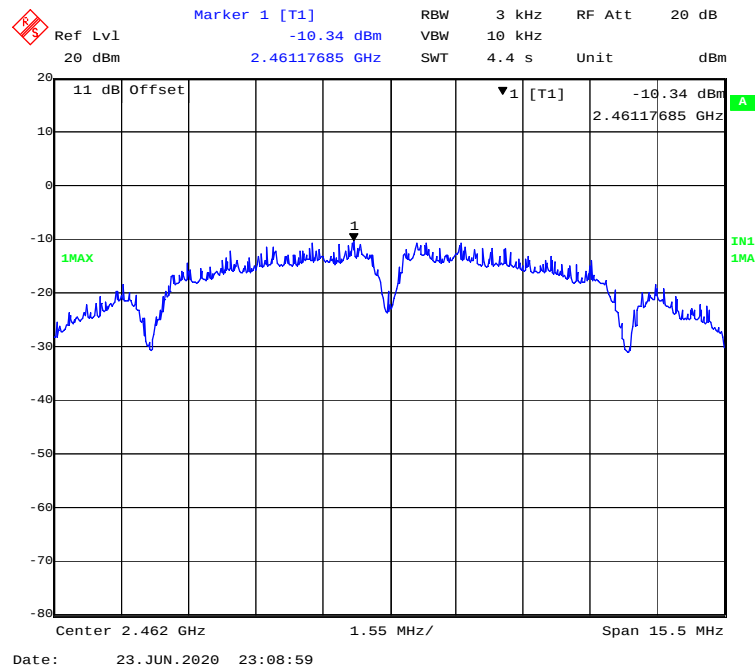


802.11g Mode Low Channel

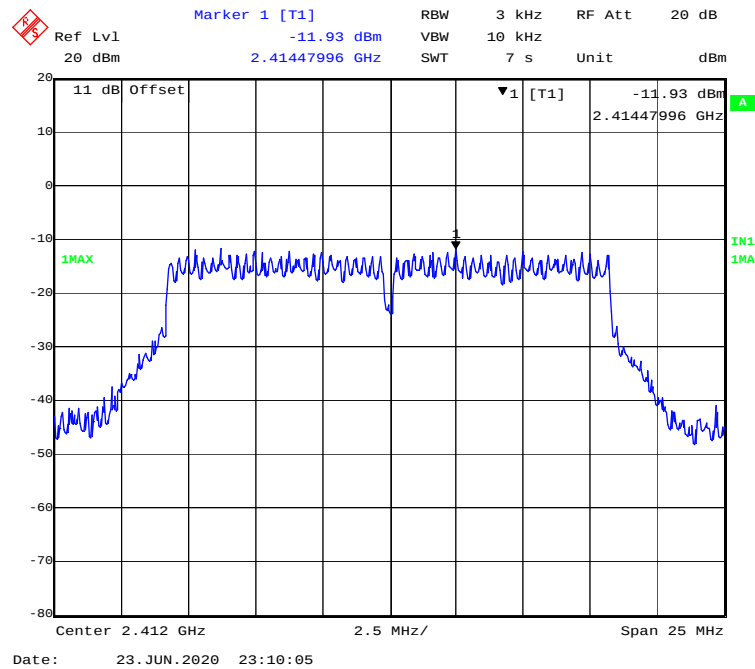


802.11g Mode Middle Channel

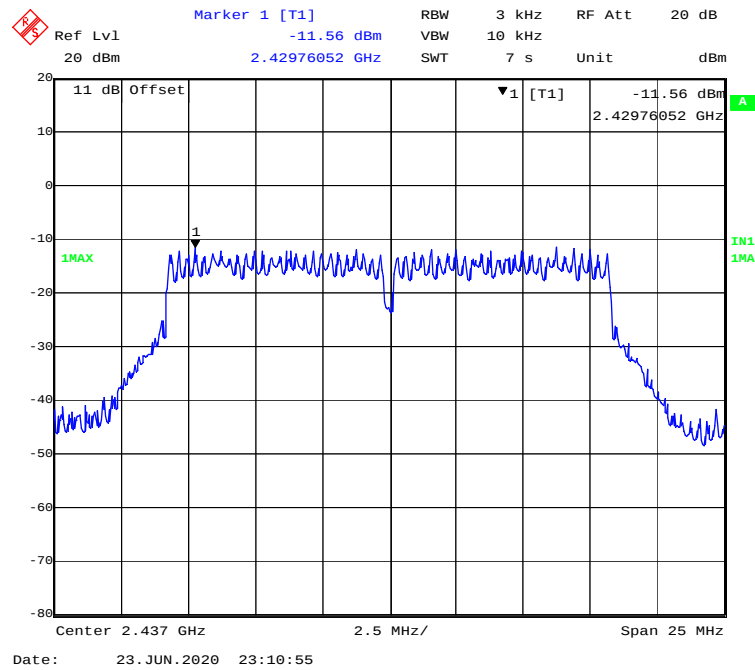


802.11g Mode High Channel

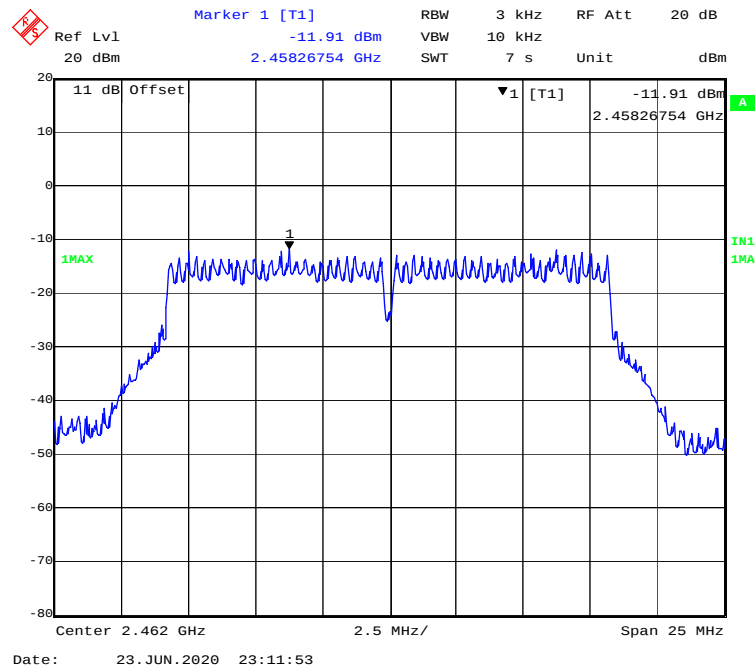


802.11n-HT20 Mode Low Channel

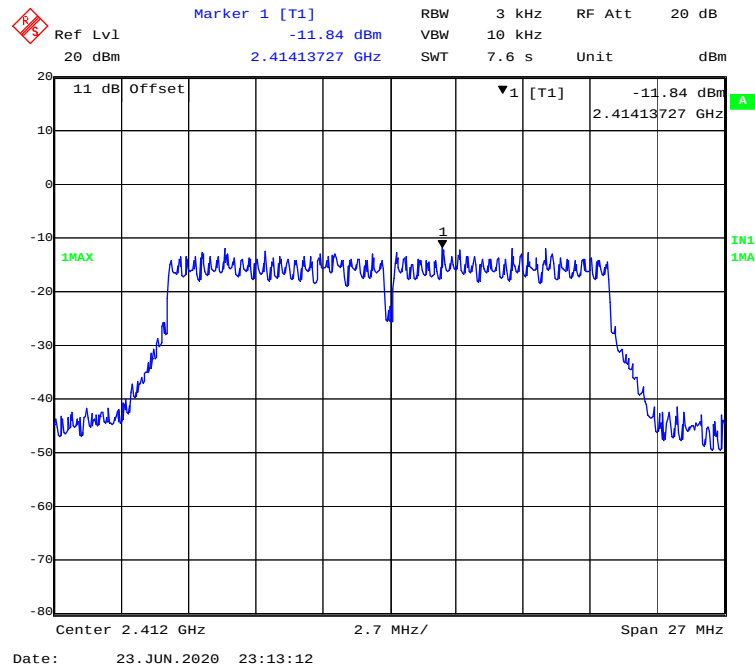


802.11n-HT20 Mode Middle Channel

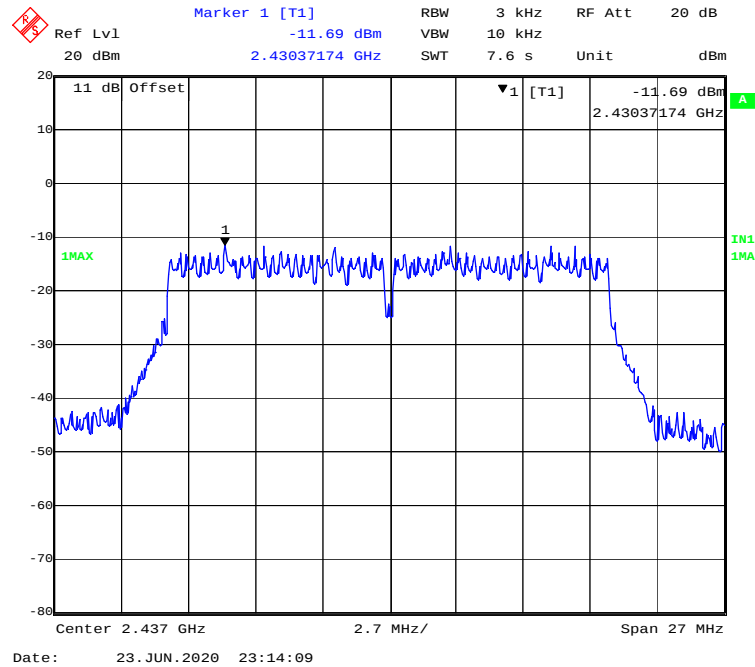


802.11n-HT20 Mode High Channel

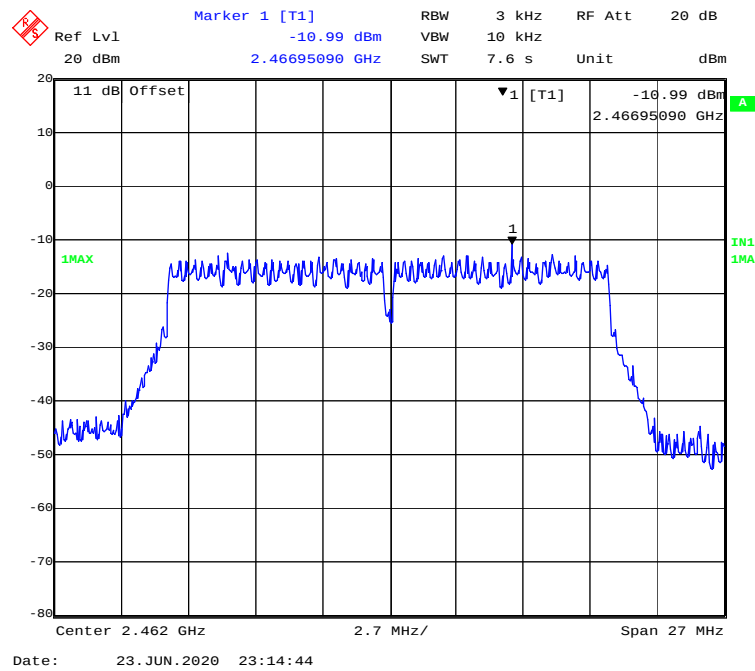


802.11n-HT40 Mode Low Channel

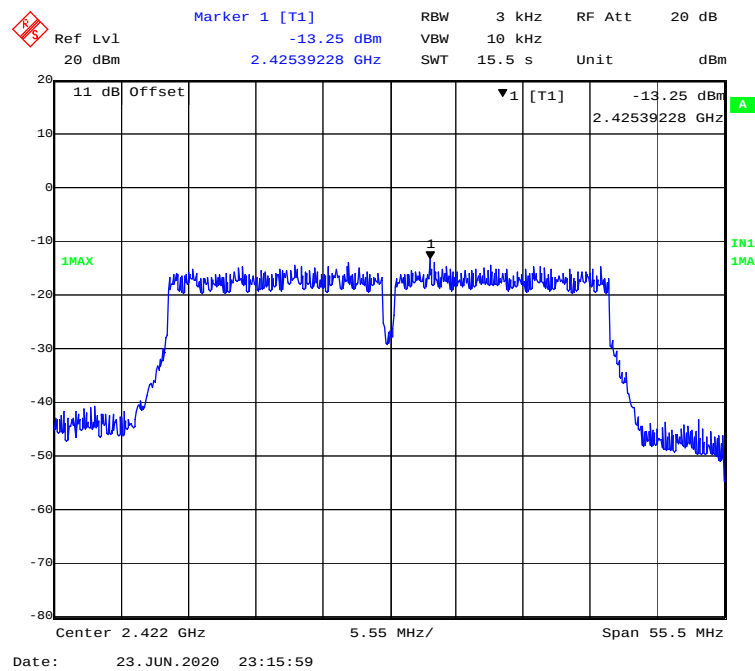


802.11n-HT40 Mode Middle Channel

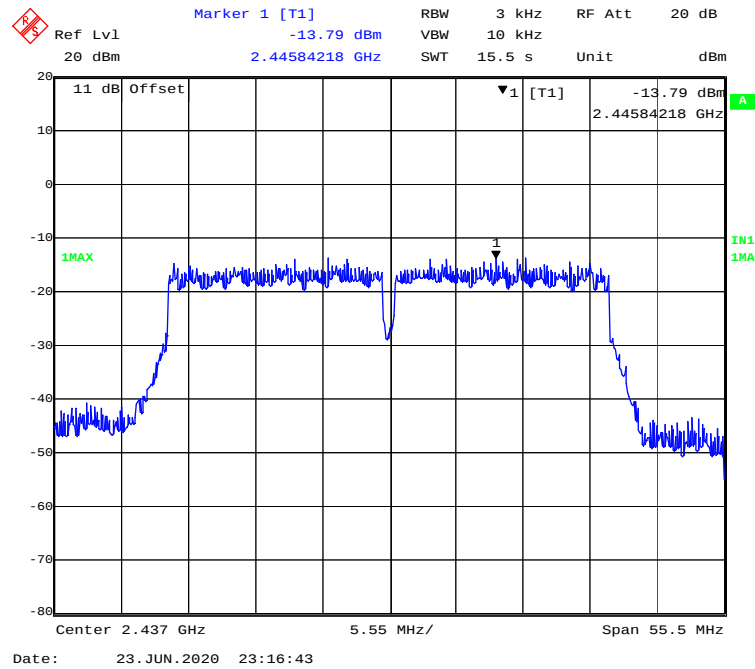

802.11n-HT40 Mode High Channel

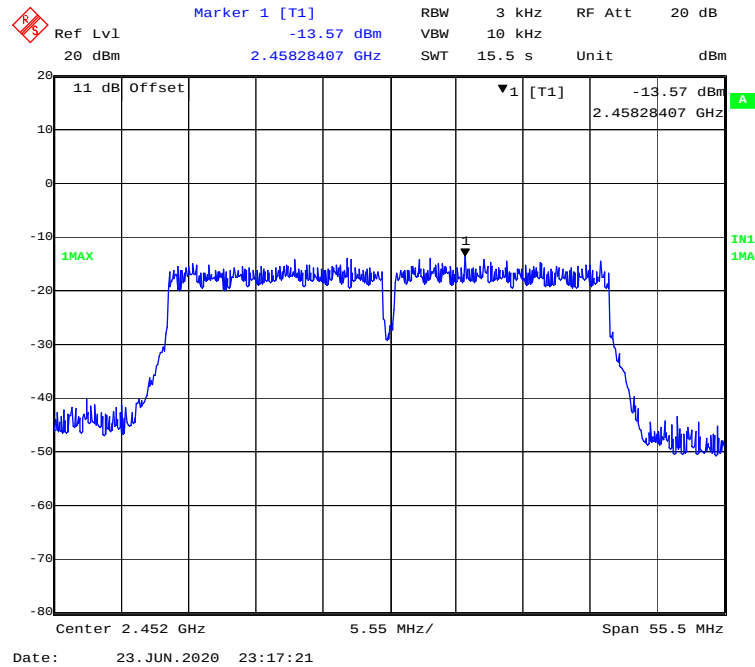


BLE Mode Low Channel

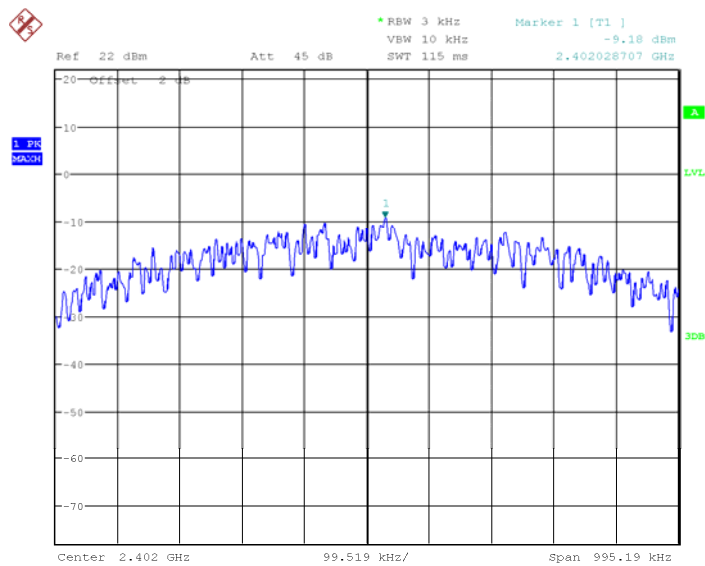


Date: 20.APR.2020 23:29:03

BLE Mode Middle Channel

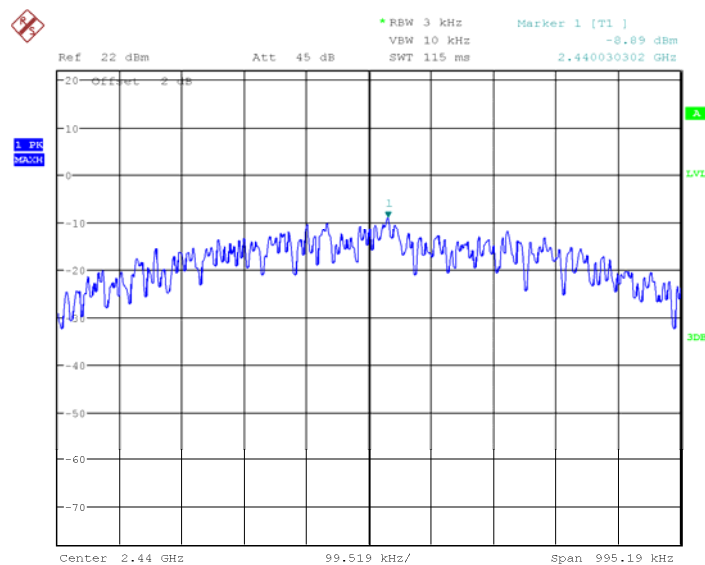

Date: 20.APR.2020 23:30:13

BLE Mode High Channel

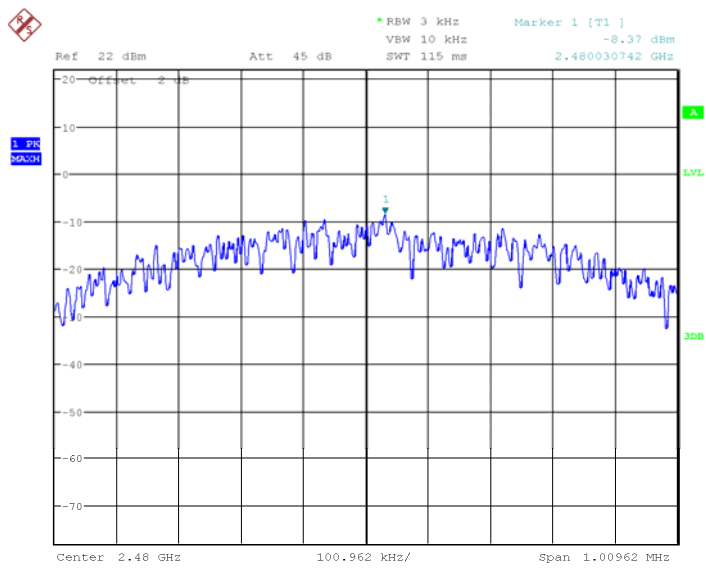

Date: 20.APR.2020 23:32:02

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

***** END OF REPORT *****