



**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**Mobile Payment Terminal with Bluetooth connectivity, Magnetic Strip and  
Contactless reader**

**MODEL NUMBER: BLUEPAD-50**

**FCC ID: YRWBLUEPAD-50**

**REPORT NUMBER: 11737160-E1V2**

**ISSUE DATE: 09/27/2017**

*Prepared for*

**DATECS Ltd.**

**DEPARTMENT OF INNOVATIVE TECHNOLOGIES  
4 "Datecs" Str.  
1592 SOFIA, BULGARIA**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	06/02/17	Initial Issue	B. Bayani
V2	09/27/17	Revised Report based on reviewer's comments: Updated Section 9.2.	B. Bayani

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	7
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	7
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>11</b>
7.1. <i>20 dB BANDWIDTH</i> .....	11
7.2. <i>FREQUENCY STABILITY</i> .....	12
<b>8. RADIATED EMISSION TEST RESULTS.....</b>	<b>13</b>
8.1. <i>LIMITS AND PROCEDURE</i> .....	13
8.1.1. <i>FUNDAMENTAL EMISSION MASK(11.56 to 15.56MHz)</i> .....	15
8.1.2. <i>SPURIOUS EMISSIONS (0.09 – 30 MHz)</i> .....	17
8.1.3. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz</i> .....	19
<b>9. AC MAINS LINE CONDUCTED EMISSIONS.....</b>	<b>21</b>
9.1. <i>NORMAL OPERATION</i> .....	22
9.2. <i>WITH ANTENNA PORT TERMINATED</i> .....	26
<b>10. SETUP PHOTOS.....</b>	<b>28</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** DATECS Ltd.  
DEPARTMENT OF INNOVATIVE TECHNOLOGIES  
4 "Datecs" Str.  
1592 SOFIA, BULGARIA

**EUT DESCRIPTION:** Mobile payment terminal with Bluetooth connectivity, magnetic strip and Contactless reader.

**MODEL:** BLUEPAD-50

**SERIAL NUMBER:** 917900023

**DATE TESTED:** May 12, 2017 to May 19, 2017; September 27, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Approved & Released For  
UL Verification Services Inc. By:

BOBBY BAYANI & DAN CORONIA  
PROJECT LEAD  
UL Verification Services Inc.

Prepared By:



LIONEL LARA  
LAB ENGINEER  
UL Verification Services Inc

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +  
Cable Loss (dB) – Preamp Gain (dB)  
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Mobile payment terminal with Bluetooth connectivity, magnetic strip, EMV chip & PIN and Contactless reader. Contains Bluetooth module FCC ID: GT3FC018.

### 5.2. MAXIMUM OUTPUT POWER

The testing was performed at 3 meter. The transmitter maximum E-field at 30 meter distance is 38.24 dBuV/m which is converted from the 3 meter data.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a flexible printed circuit board antenna, with a maximum gain of 0 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was IRETest\_PinPad 1.7.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z-orientation was the worst-case orientation, therefore, all final radiated testing was performed with the EUT in the Z-orientation while generating continuous emissions.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC charger	Apple	A1265	1X1132QX28QZ	-


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Unshielded	1	EUT to AC/DC Charger

### TEST SETUP

The EUT is connected to the AC/DC charger via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM FOR TESTS**

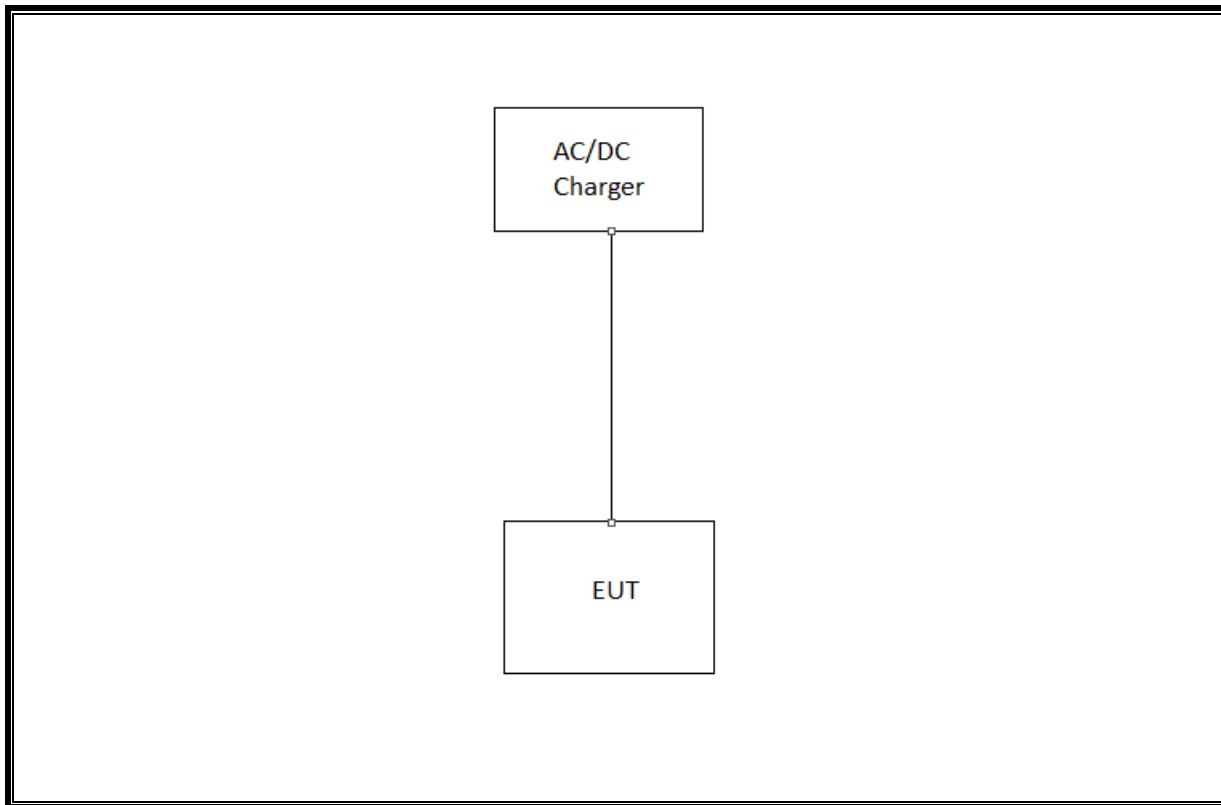

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T477	06/22/2017
Antenna, Active Loop 9kHz-30MHz	ETS-Lindgren	6502	T1683	02/17/2018
Amplifier, 10kHz-1GHz	Agilent (Keysight) Technologies	8447D	T15	08/26/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T907	01/23/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	01/10/2018
Temperature Chamber	Thermotron Industires	SE-600-10-10	T80	08/21/2017
EMI Test Receiver	Rohde & Schwarz	ESR	T1436	01/18/2018
LISN	Fischer Custom Communications	FCC-LISN-50/250-25-2-01	T1310	06/15/2018
Transient Limiter	COM-POWER	LIT-930	T1457	02/24/18
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 20 dB BANDWIDTH

#### LIMIT

None; for reporting purposes only.


#### TEST PROCEDURE

§2.1049

The 20dB bandwidth was measured by using a spectrum analyzer.

#### RESULTS

Frequency (MHz)	20 dB Bandwidth (KHz)
13.56	24.96

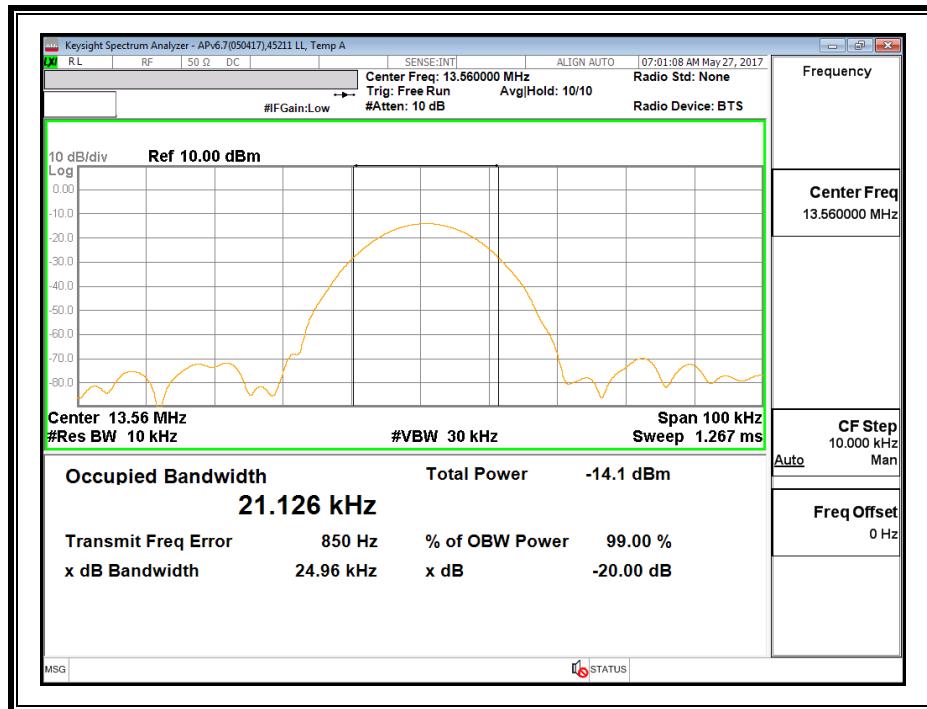

NOTE: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

## 7.2. FREQUENCY STABILITY

### LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### TEST PROCEDURE

ANSI C63.10

### RESULTS

<b>ID:</b>	45256 JB	<b>Date:</b>	5/12/2017
------------	----------	--------------	-----------

### TEST INFORMATION

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: $\pm 100$ ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.7	50	13.5607000	-7.375	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
3.7	40	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
3.7	30	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
3.7	20	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
3.7	10	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	$\pm 100$
3.7	0	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	$\pm 100$
3.7	-10	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	13.5607000	-7.375	$\pm 100$
3.7	-20	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
3.15	20	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$
4.26	20	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	13.5606000	0.000	$\pm 100$

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400 / $F$ (kHz)	300
0.490 – 1.705	24000 / $F$ (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.


KDB 414788 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**RESULTS**

### 8.1.1. FUNDAMENTAL EMISSION MASK(11.56 to 15.56MHz)

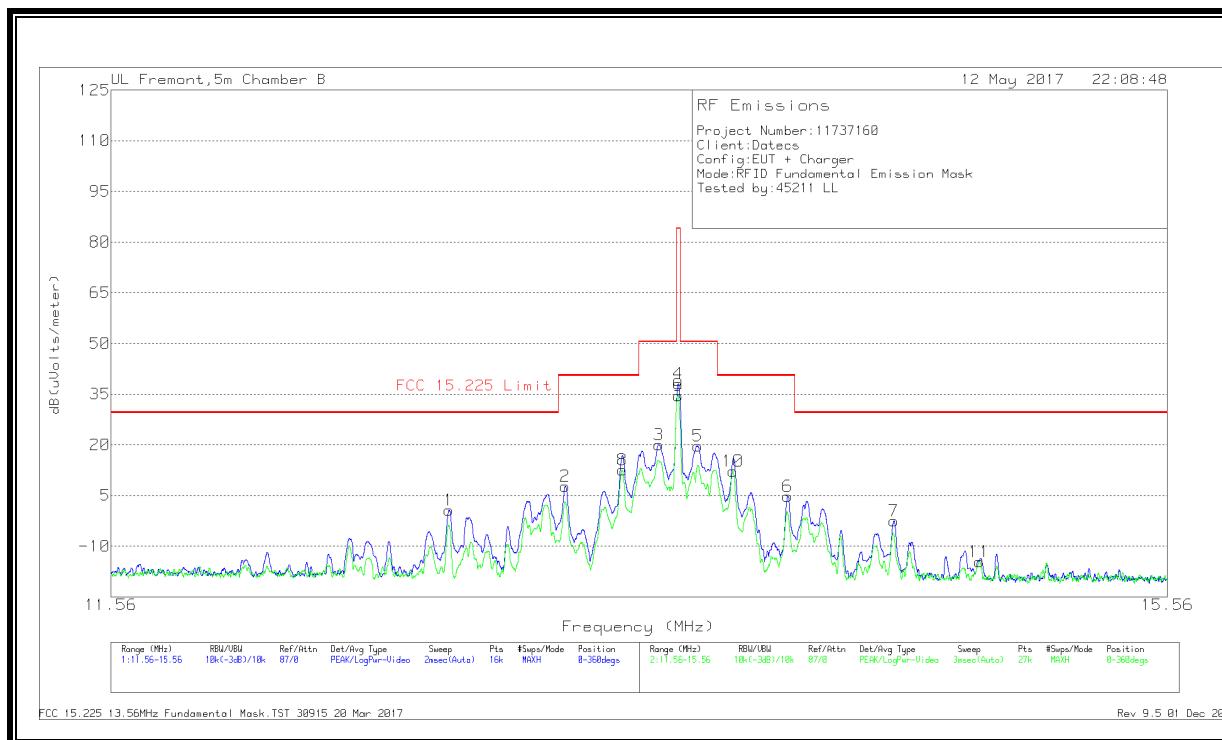

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
1	12.71363	28.6	Pk	10.5	1.6	-40	.7	29.54	-28.84	0-360
2	13.13663	35.71	Pk	10.4	1.6	-40	7.71	40.51	-32.8	0-360
8	13.34814	40.59	Pk	10.4	1.6	-40	12.59	40.51	-27.92	0-360
3	13.48663	48.02	Pk	10.4	1.6	-40	20.02	50.5	-30.48	0-360
9	13.55978	62.63	Pk	10.4	1.6	-40	34.63	84	-49.37	0-360
4	13.56038	66.08	Pk	10.4	1.6	-40	38.08	84	-45.92	0-360
5	13.63438	47.64	Pk	10.4	1.6	-40	19.64	50.5	-30.86	0-360
10	13.77045	40.21	Pk	10.3	1.6	-40	12.11	40.51	-28.4	0-360
6	13.98488	32.91	Pk	10.3	1.6	-40	4.81	40.51	-35.7	0-360
7	14.40838	25.57	Pk	10.3	1.6	-40	-2.53	29.54	-32.07	0-360
11	14.75895	13.56	Pk	10.2	1.6	-40	-14.64	29.54	-44.18	0-360


Pk - Peak detector

Fundamental

Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)	Antenna Position
13.5604	66.24	Pk	10.4	1.6	-40	38.24	84	-45.76	173	Face On
13.5606	62.89	Pk	10.4	1.6	-40	34.89	84	-49.11	268	Face Off

Pk - Peak detector

### 8.1.2. SPURIOUS EMISSIONS (0.09 – 30 MHz)

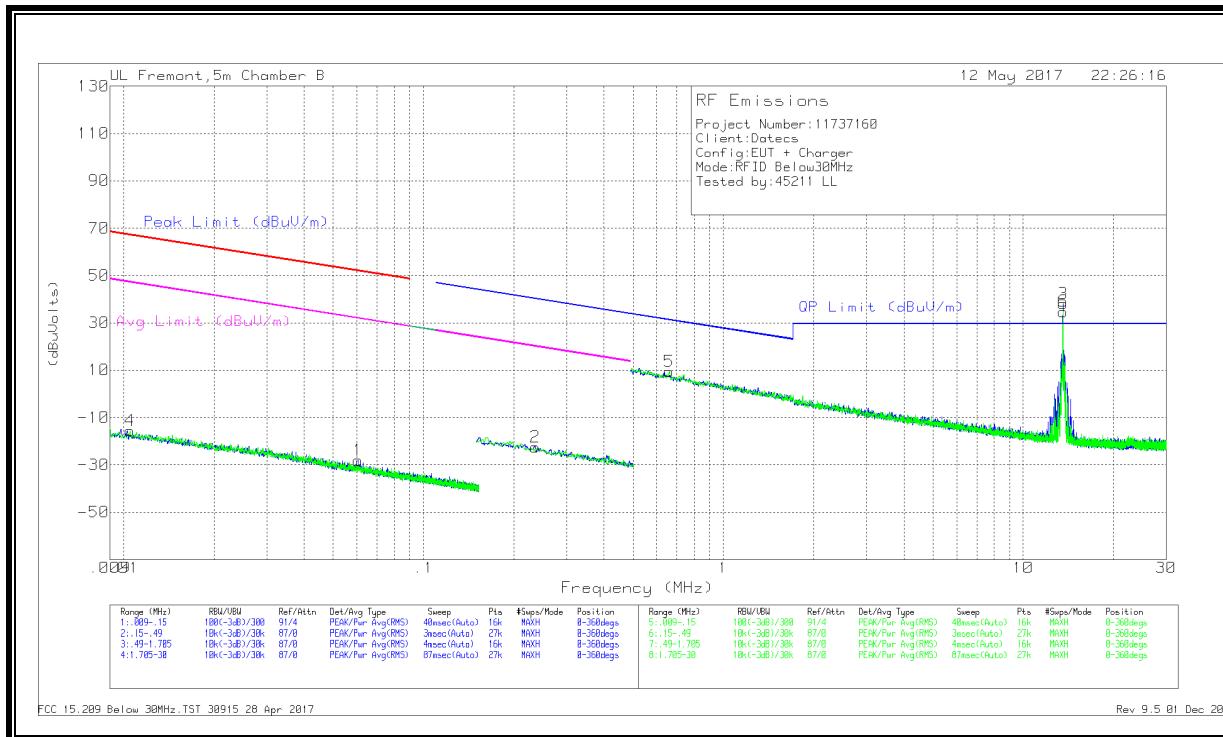

## Trace Markers



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
4	.0105	43.62	Pk	19.3	1.4	-80	-15.68	67.16	-82.84	47.16	-62.84	-	-	-	-	0-360
1	.06049	38.31	Pk	12.2	1.4	-80	-28.09	51.95	-80.04	31.95	-60.04	-	-	-	-	0-360
2	.23568	44.52	Pk	11.5	1.5	-80	-22.48	-	-	-	-	40.17	-62.65	20.17	-42.65	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	
5	.66081	36.32	Pk	11.5	1.5	-40	9.32	31.21	-21.89	-	-	-	-	-	0-360
3	**13.55998	66.12	Pk	10.4	1.6	-40	38.12	-	-	-	-	-	-	-	0-360
6	**13.55998	62.8	Pk	10.4	1.6	-40	34.8	-	-	-	-	-	-	-	0-360

Pk - Peak detector

\*\* - Fundamental frequency

### 8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

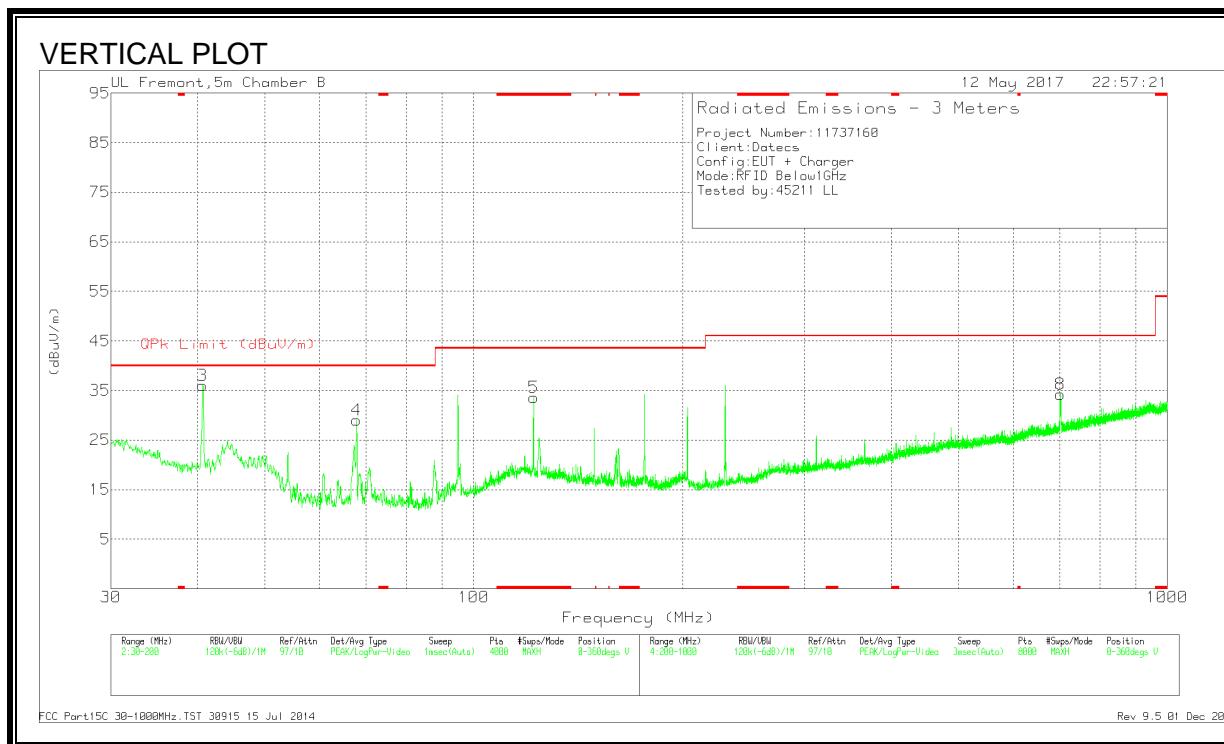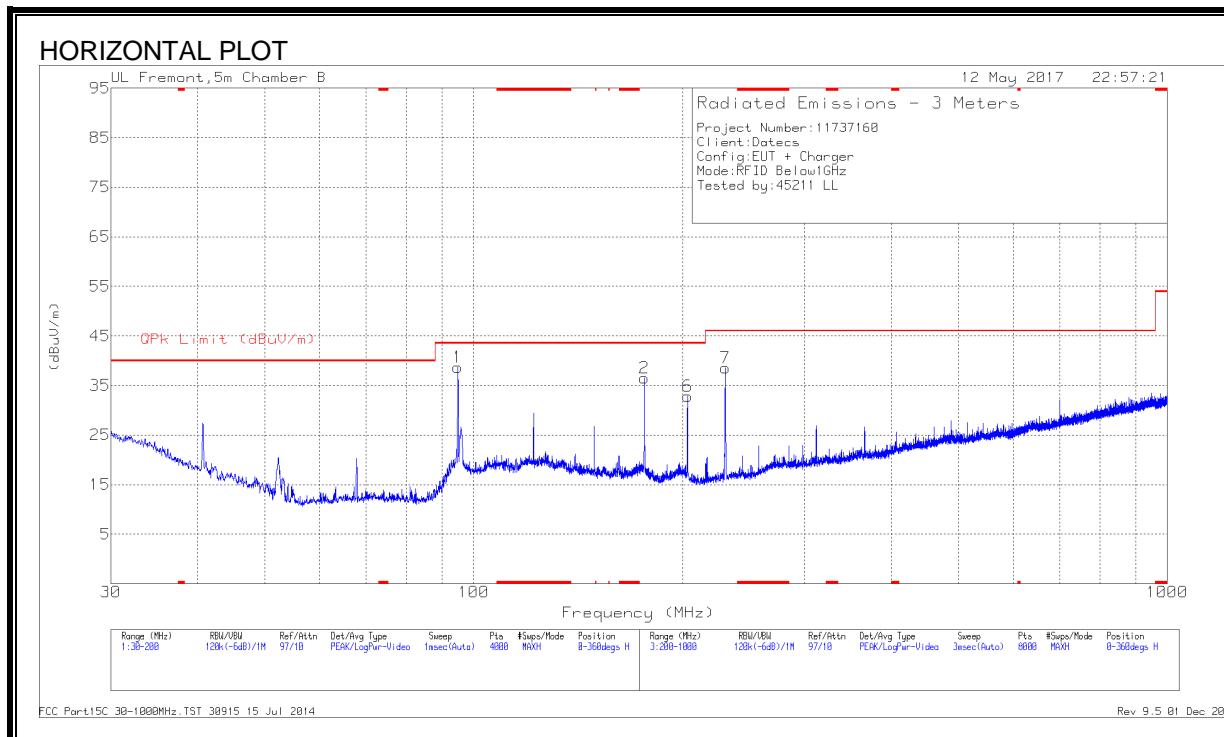

## Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 122.0363	43.56	Pk	17.7	-27.7	33.56	43.52	-9.96	0-360	100	V
3	40.6703	47.19	Pk	17.5	-28.7	35.99	40	-4.01	0-360	100	V
4	67.7923	45.47	Pk	11.9	-28.3	29.07	40	-10.93	0-360	100	V
1	94.9143	53.83	Pk	12.8	-28	38.63	43.52	-4.89	0-360	300	H
2	176.2804	48.26	Pk	15.4	-27.1	36.56	43.52	-6.96	0-360	100	H
6	203.4004	44.21	Pk	15.4	-26.8	32.81	43.52	-10.71	0-360	100	H
7	230.504	50.1	Pk	15	-26.5	38.6	46.02	-7.42	0-360	100	H
8	700.9651	35.16	Pk	24.1	-25	34.26	46.02	-11.76	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

## Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
40.6794	46.11	Qp	17.5	-28.7	34.91	40	-5.09	299	107	V
94.9225	53.42	Qp	12.8	-28	38.22	43.52	-5.3	203	263	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

## 9. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


### TEST PROCEDURE

ANSI C63.10

### RESULTS

## 9.1. NORMAL OPERATION

### LINE 1 RESULTS

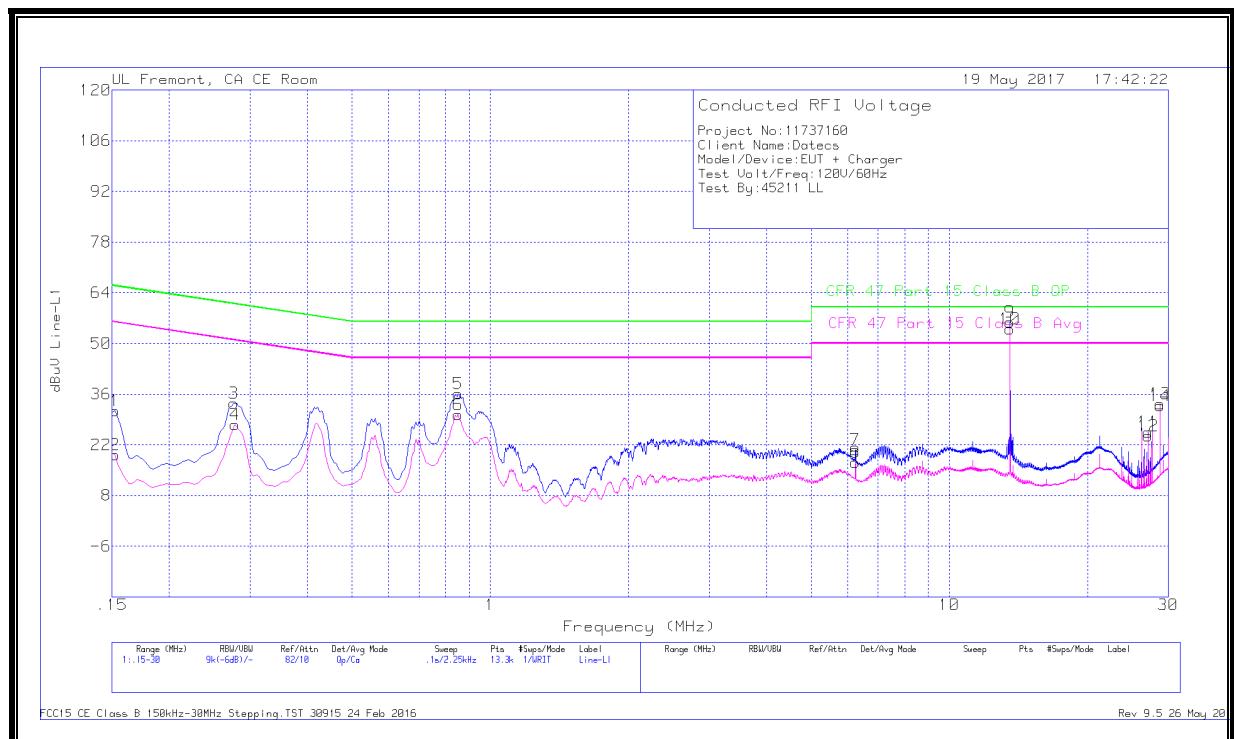

## Trace Markers


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.15225	21.06	Qp	.1	.1	10.1	31.36	65.88	-34.52	-	-
2	.15225	8.89	Ca	.1	.1	10.1	19.19	-	-	55.88	-36.69
3	.276	23.29	Qp	0	.1	10.1	33.49	60.94	-27.45	-	-
4	.27825	17.3	Ca	0	.1	10.1	27.5	-	-	50.87	-23.37
5	.852	25.94	Qp	0	.1	10.1	36.14	56	-19.86	-	-
6	.85087	20.08	Ca	0	.1	10.1	30.28	-	-	46	-15.72
7	6.24975	10.21	Qp	0	.2	10.2	20.61	60	-39.39	-	-
8	6.24975	6.72	Ca	0	.2	10.2	17.12	-	-	50	-32.88
9	**13.56	45.39	Qp	.1	.2	10.2	55.89	-	-	-	-
10	**13.56	43.44	Ca	.1	.2	10.2	53.94	-	-	-	-
11	27.12075	14.58	Qp	.1	.3	10.5	25.48	60	-34.52	-	-
12	27.12075	13.62	Ca	.1	.3	10.5	24.52	-	-	50	-25.48
13	28.74975	22.38	Qp	.1	.3	10.5	33.28	60	-26.72	-	-
14	28.74975	21.96	Ca	.1	.3	10.5	32.86	-	-	50	-17.14

Qp - Quasi-Peak detector

Ca - CISPR average detection

\*\* - Fundamental frequency, 13.56MHz.

**LINE 2 RESULTS**

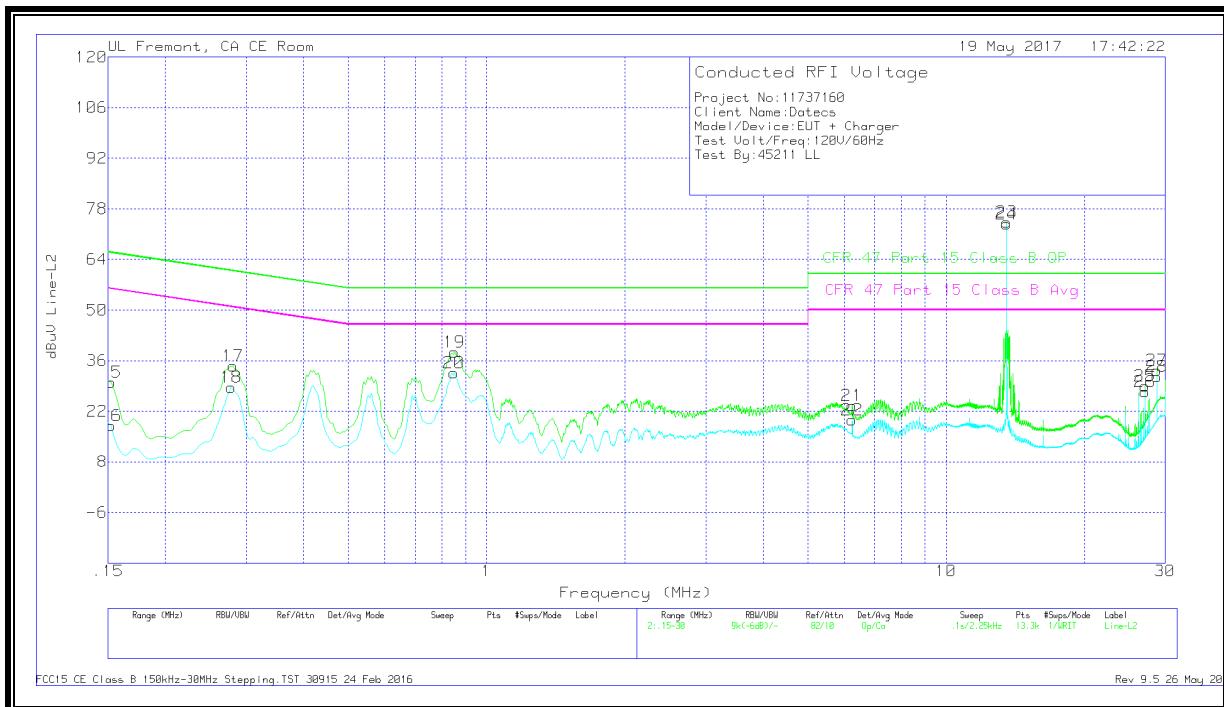

## Trace Markers

Range 2: Line-L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)	
15	.15225	19.89	Qp	0	0	10.1	29.99	65.88	-35.89	-	-	
16	.15225	7.88	Ca	0	0	10.1	17.98	-	-	55.88	-37.9	
17	.2805	24.25	Qp	0	.1	10.1	34.45	60.8	-26.35	-	-	
18	.27825	18.4	Ca	0	.1	10.1	28.6	-	-	50.87	-22.27	
19	.852	28.2	Qp	0	.1	10.1	38.4	56	-17.6	-	-	
20	.84975	22.42	Ca	0	.1	10.1	32.62	-	-	46	-13.38	
21	6.24975	13.14	Qp	0	.2	10.2	23.54	60	-36.46	-	-	
22	6.24975	9.18	Ca	0	.2	10.2	19.58	-	-	50	-30.42	
23	**13.56	63.81	Qp	.1	.2	10.2	74.31	-	-	-	-	
24	**13.56	63.29	Ca	.1	.2	10.2	73.79	-	-	-	-	
25	27.12075	18	Qp	.1	.3	10.5	28.9	60	-31.1	-	-	
26	27.12075	16.56	Ca	.1	.3	10.5	27.46	-	-	50	-22.54	
27	28.74975	22.45	Qp	.1	.3	10.5	33.35	60	-26.65	-	-	
28	28.74975	20.7	Ca	.1	.3	10.5	31.6	-	-	50	-18.4	


Qp - Quasi-Peak detector

Ca - CISPR average detection

\*\* - Fundamental frequency, 13.56MHz.

## 9.2. WITH ANTENNA PORT TERMINATED

### LINE 1 RESULTS

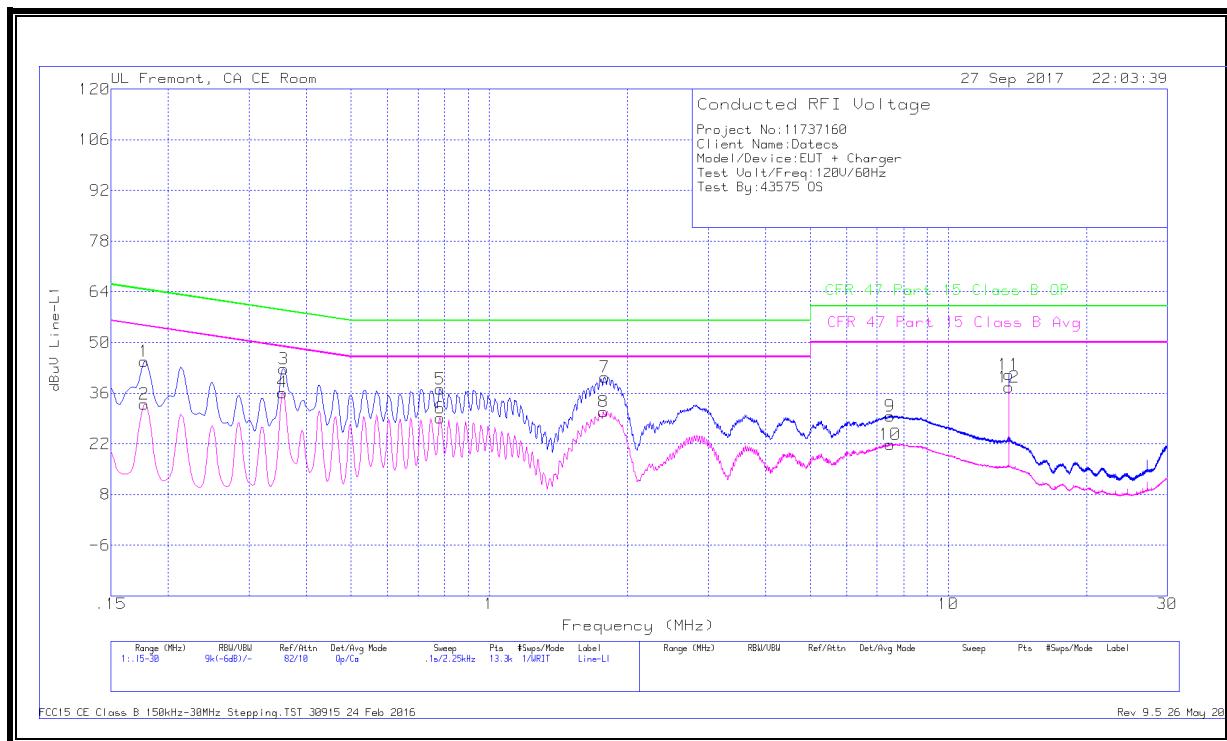

### Trace Markers

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.177	34.61	Qp	0	0	10.1	44.71	64.63	-19.92	-	-
2	.177	22.86	Ca	0	0	10.1	32.96	-	-	54.63	-21.67
3	.357	32.61	Qp	0	0	10.1	42.71	58.8	-16.09	-	-
4	.35475	26.08	Ca	0	0	10.1	36.18	-	-	48.85	-12.67
5	.78112	26.99	Qp	0	0	10.1	37.09	56	-18.91	-	-
6	.78225	19.06	Ca	0	0	10.1	29.16	-	-	46	-16.84
7	1.78575	30.24	Qp	0	.1	10.1	40.44	56	-15.56	-	-
8	1.77225	20.72	Ca	0	.1	10.1	30.92	-	-	46	-15.08
9	7.46475	19.21	Qp	0	.2	10.2	29.61	60	-30.39	-	-
10	7.458	11.48	Ca	0	.2	10.2	21.88	-	-	50	-28.12
11	**13.56	30.63	Qp	.1	.2	10.2	41.13	60	-18.87	-	-
12	**13.56	27.1	Ca	.1	.2	10.2	37.6	-	-	50	-12.4


Qp - Quasi-Peak detector

Ca - CISPR average detection

\*\* - Fundamental frequency, 13.56MHz.

**Note:** The 13.56MHz is a fundamental frequency of the EUT.

**LINE 2 RESULTS**

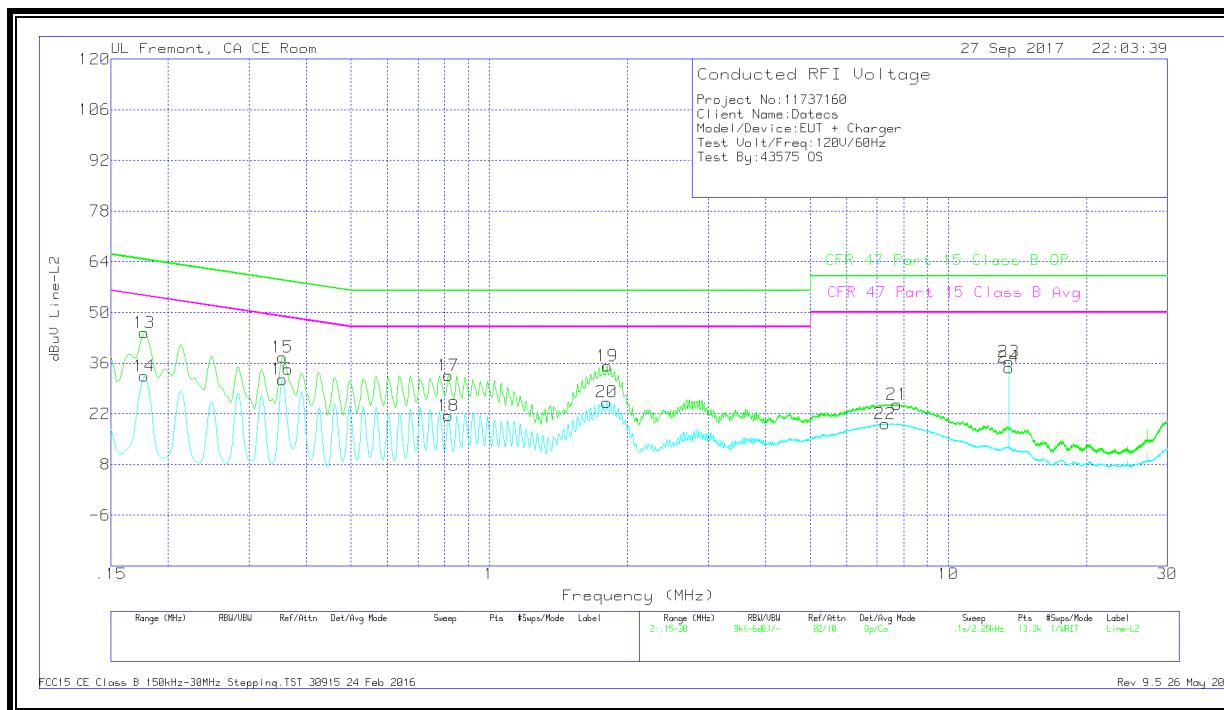

**Trace Markers**

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.177	34.4	Qp	0	0	10.1	44.5	64.63	-20.13	-	-
14	.177	22.32	Ca	0	0	10.1	32.42	-	-	54.63	-22.21
15	.35475	27.48	Qp	0	0	10.1	37.58	58.85	-21.27	-	-
16	.35475	21.39	Ca	0	0	10.1	31.49	-	-	48.85	-17.36
17	.81375	22.58	Qp	0	0	10.1	32.68	56	-23.32	-	-
18	.81375	11.37	Ca	0	0	10.1	21.47	-	-	46	-24.53
19	1.806	24.99	Qp	0	.1	10.1	35.19	56	-20.81	-	-
20	1.80375	15.03	Ca	0	.1	10.1	25.23	-	-	46	-20.77
21	7.74375	14.23	Qp	0	.2	10.2	24.63	60	-35.37	-	-
22	7.287	8.84	Ca	0	.2	10.2	19.24	-	-	50	-30.76
23	**13.56	25.96	Qp	.1	.2	10.2	36.46	60	-23.54	-	-
24	**13.56	24.29	Ca	.1	.2	10.2	34.79	-	-	50	-15.21

Qp - Quasi-Peak detector

Ca - CISPR average detection

\*\* - Fundamental frequency, 13.56MHz.

**Note:** The 13.56MHz is a fundamental frequency of the EUT.