

849 NW State Road 45 Newberry, Fl 32669 USA

Phone: 888.472.2424 or 352.472.5500

Fax: 352.472.2030

Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15 B SUBPART B AND IC RSS-210 RECEIVER TEST REPORT

Applicant	LEDWELL & SON ENTERPRISES		
Address	3300 WACO STREET TEXARCANA TX 75501 USA		
FCC ID	YS5-LEDWELL-RX1		
IC	9257A-JA2		
Model	RX1		
Product Description	UNIVERSAL WIRELESS RADIO CONTROL SYSTEM - RX		
Date Sample Received	11/16/2010		
Date Tested	11/23/2010		
Tested By	Joe Scoglio		
Approved By	Richard Block		
Report Number	2613AT10TestReport.doc		
Test Results			

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





TABLE OF CONTENTS

GENERAL REMARKS	Error! Bookmark not defined.
REPORT SUMMARY	Error! Bookmark not defined.
TEST ENVIRONMENT	Error! Bookmark not defined.
TEST SETUP SUMMARY	Error! Bookmark not defined.
DUT SPECIFICATION	Error! Bookmark not defined.
TEST EQUIPMENT LIST	Error! Bookmark not defined.
TEST PROCEDURES	Error! Bookmark not defined.
RADIATED SPURIOUS EMISSIONS	Error! Bookmark not defined.
POWER LINE CONDUCTED INTERFERENCE	Error! Bookmark not defined.
RADIATED EMISSIONS TEST SETUP PHOTO	Error! Bookmark not defined.

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



Authorized Signatory Name:

Richard Block Compliance Engineer

Date: 12/22/2010

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.			
Applicable Rule(s)	Pt 15.109, Pt 15.107, ANSI C63.4: 2003, RSS-210, RSS-GEN			
Related Report	None			

TEST ENVIRONMENT

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newber FL 32669 USA.			
Test Condition in the laboratory	Temperature: 26°C Relative humidity: 50%			

TEST SETUP SUMMARY

Test Setup Diagram/ Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification.	
Deviation from the standard/procedure	No deviation	
Modification of DUT	No modification	

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



DUT SPECIFICATION

DUT Description	UNIVERSAL WIRELESS RADIO CONTROL SYSTEM - RX					
FCC ID	YS5-LEDWELL-RX1					
IC	9257A-JA2					
Model	RX1					
	☐ 110-120Vac/50- 60Hz					
DUT Power Source	☑ DC Power 12v					
	☐ Battery Operated Exclusively					
	☐ Prototype					
Test Item	☑ Pre-Production					
	☐ Production					
	Fixed					
Type of Equipment	Mobile					
	□ Portable □					
Laboratory	Temperature: 26°C					
Test Conditions	s Humidity: 55%					
Modifications to DUT:	Yes (explanation below)					

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Antenna: Dipole Kit	Electro- Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro- Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	НР	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi- Peak Adapter	НР	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	НР	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	НР	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



TEST PROCEDURES

Power line conducted Emission: The test procedure used was ANSI C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Radiation Interference: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of $dB\mu V$) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz) Meter Reading + ACF +CL = FS

33 20 dB μ V + 10.36 dB/m +0.40 dB = 30.36 dB μ V/m @ 3m

ANSI C63.4-2003 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and verticals planes.

ANSI STANDARD C63.4-2003 12.1.1.1 SUPERREGENERATIVE RECEIVER: A Signal Generator was set to the unit under test operating frequency. An un-Modulated continuous wave (CW) signal was radiated at the super regenerative receiver operating frequency to cohere the characteristic broadband emissions from the receiver.

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

Frequency MHz	Limits			
30 – 88	40.0 dBμV/m measured @ 3 meters			
88 – 216	43.5 dBμV/m measured @ 3 meters			
216 – 960	46.0 dBμV/m measured @ 3 meters			
Above 960	54.0 dBμV/m measured @ 3 meters			

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
433.9	423.20	4.5	V	1.22	16.03	21.75	24.25
433.9	423.20	6.6	H	1.22	16.30	24.12	21.88
433.9	846.40	3.0	H	1.92	22.56	27.48	18.52

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107, RSS-210, RSS-GEN

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBµV)	Average Limits (dBμV)			
0.15 - 0.5	66 – 56 *	56 – 46 *			
0.5 - 5.0	46				
5.0 – 30 60 50					
* Decrease with logarithm of frequency					

Test Data: Not applicable. Battery operated device.


APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2



RADIATED EMISSIONS TEST SETUP PHOTO

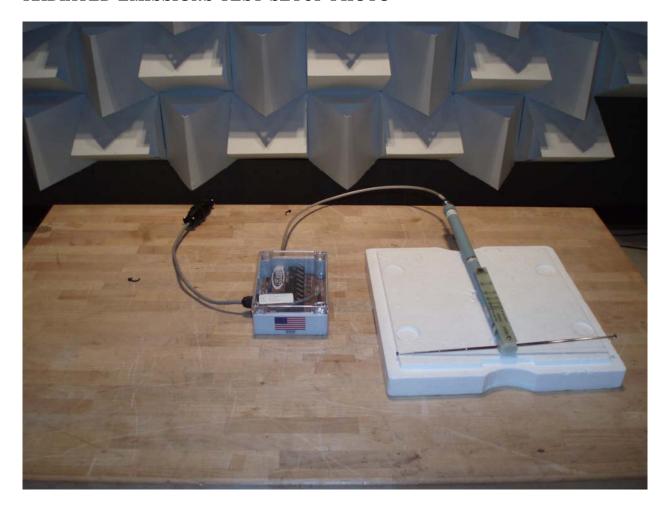

APPLICANT: LEDWELL & SON ENTERPRISES

FCC ID: YS5-LEDWELL-RX1

IC: 9257A-JA2