

# FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.249

<b>Equipment</b>	: Media Remote
<b>Brand Name</b>	: SUYIN, ACER
<b>Model No.</b>	: MagicPad, RMTP-PR-FC1, RMTP-PR-WS1, RMTP-PR-GN1
<b>Filing Type</b>	: New Application
<b>Applicant</b>	: SUYIN OPTRONICS CORP
<b>Manufacturer</b>	: No. 377, Fude 1 <sup>ST</sup> RD., Xizhi City, Taipei County 221, Taiwan
<b>FCC ID</b>	: YSXRMTP-PR-01
<b>Received Date</b>	: Apr. 24, 2012
<b>Final Test Date</b>	: May 21, 2012

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1.    Product Details.....	3
2.2.    Accessories.....	3
2.3.    Table for Test Modes .....	3
2.4.    Table for Testing Locations.....	3
2.5.    Table for Supporting Units .....	3
2.6.    EUT Operation during Test.....	4
2.7.    Test Configurations .....	4
<b>3. TEST RESULT .....</b>	<b>6</b>
3.1.    AC Power Line Conducted Emissions Measurement .....	6
3.2.    Field Strength of Fundamental Emissions Measurement .....	10
3.3.    20dB Spectrum Bandwidth Measurement .....	13
3.4.    Radiated Emissions Measurement .....	17
3.5.    Band Edge Emissions Measurement.....	29
3.6.    Antenna Requirements .....	31
<b>4. LIST OF MEASURING EQUIPMENTS.....</b>	<b>32</b>
<b>5. TEST LOCATION.....</b>	<b>34</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>35</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A6</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT .....</b>	<b>B1 ~ B11</b>

## History of This Test Report

Original Issue Date: Jun. 08, 2012

Report No.: FR242615

- No additional attachment.
- Additional attachment were issued as following record:


# **CERTIFICATE OF COMPLIANCE**

According to

47 CFR FCC Part 15 Subpart C § 15.249

**Equipment** : **Media Remote**  
**Brand Name** : **SUYIN, ACER**  
**Model No.** : **MagicPad, RMTP-PR-FC1,  
RMTP-PR-WS1, RMTP-PR-GN1**  
**Applicant** : **SUYIN Optronics Corp**  
No. 377, Fude 1<sup>ST</sup> RD., Xizhi City,  
Taipei County 221, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 24, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

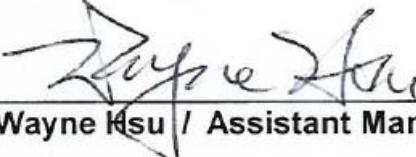

Wayne Hsu / Assistant Manager

***SPORTON International Inc.***

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	25.05 dB
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	20.35 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	3.20 dB
3.5	15.249(d)	Band Edge Emissions	Complies	5.67 dB
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1. Product Details

Items	Description
Power Type	From host
Modulation	GFSK
Frequency Range	2407.5 ~ 2470MHz
Channel Number	25
Channel Band Width (99%)	1.58 MHz
Max. Field Strength	73.65 dBuV/m at 3m (Average)
Antenna	Internal Antenna

### 2.2. Accessories

Power	Brand	Model	Rating
Rechargeable Li-polymer battery pack	Formosa Electronic Industries INC.	BE-RMTPX-600KGX-02	3.7V, 600mAh 2.22Wh
	WELL Tech	BE-RMTPX-600KGX-02	3.7V, 600mAh 2.22Wh

### 2.3. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Normal Mode	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	2407.5 MHz / 2440 MHz / 2470 MHz
Radiated Emissions 9kHz~1GHz	Normal Mode	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	2407.5 MHz / 2440 MHz / 2470 MHz
Band Edge Emissions	CTX	2407.5 MHz / 2440 MHz

Note: CTX=continuously transmitting.

### 2.4. Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

### 2.5. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E5520	DoC
iPod	APPLE	A1285	N/A
(USB) Mouse	Microsoft	1004	N/A
(USB) Dongle (Client Provide)	SUYIN	RMTP-PR-FC1	-

## 2.6. EUT Operation during Test

An executive program, "EMITEST.EXE" under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

Turn on the power of all equipment.


- a. The NB reads the test program from the hard disk drive and runs it.
- b. The NB sends "H" messages to the monitor and the displays "H" patterns on the screen.



At the same time, the following program was executed:

- Executed "Winthrax.exe" to read and write data from iPod.

## 2.7. Test Configurations

For conducted emissions

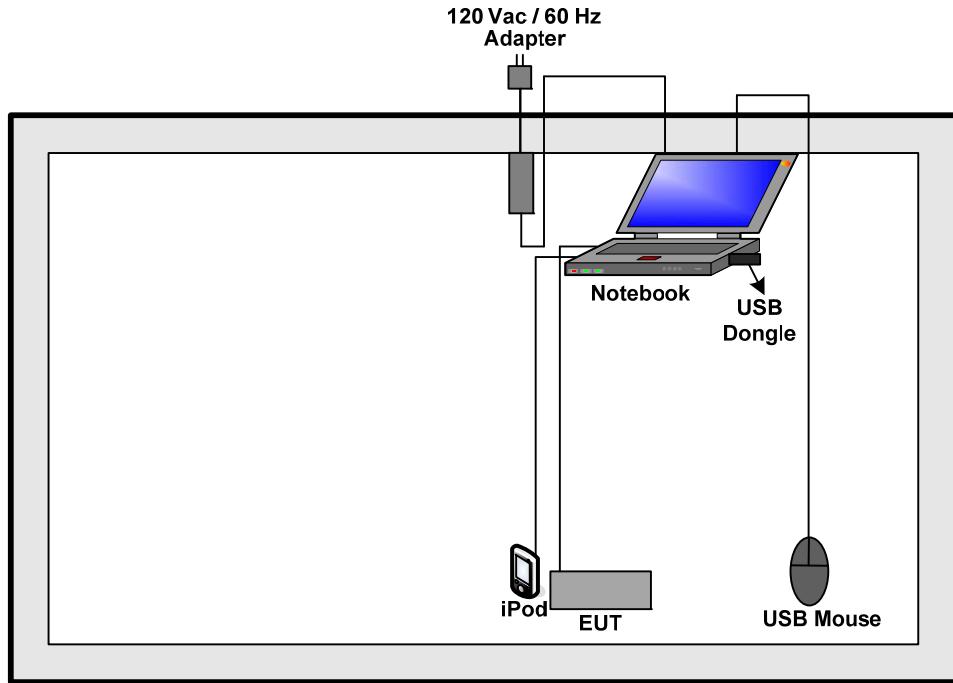

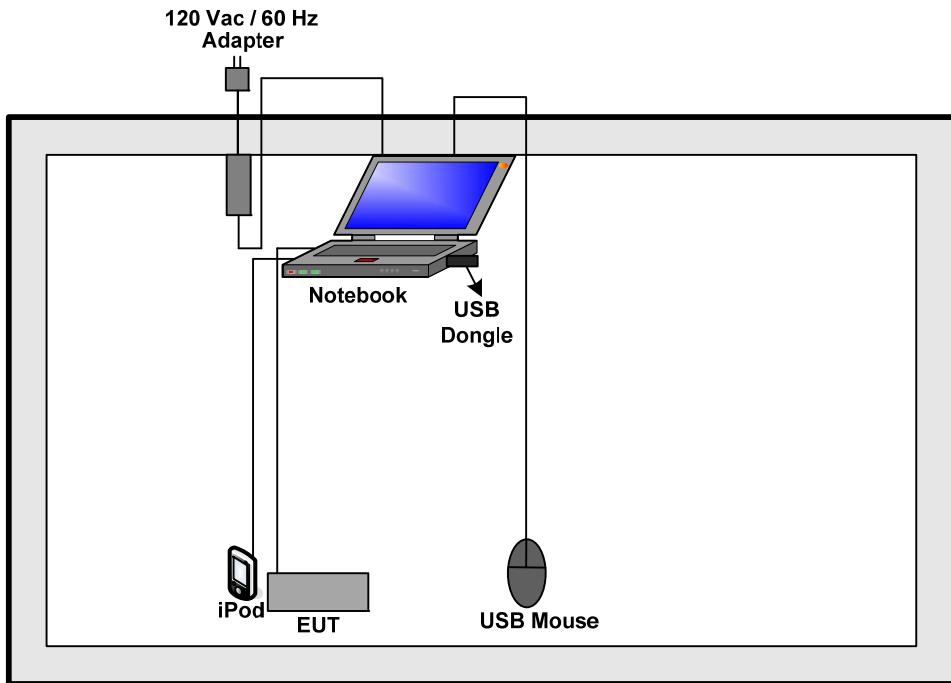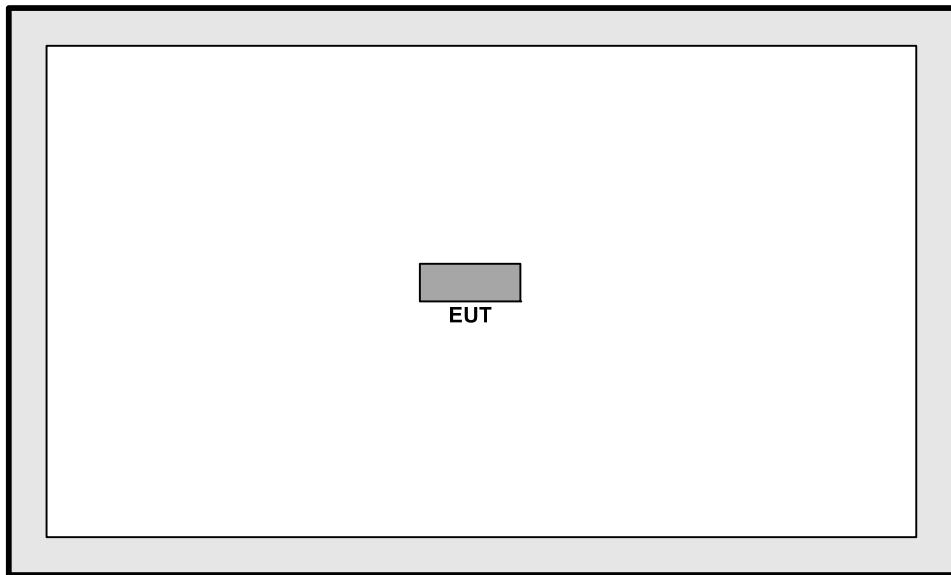**For radiated emissions 9kHz~1GHz****For radiated emissions above 1GHz**

### 3. TEST RESULT

#### 3.1. AC Power Line Conducted Emissions Measurement

##### 3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

##### 3.1.3. Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 kHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4. Test Setup Layout

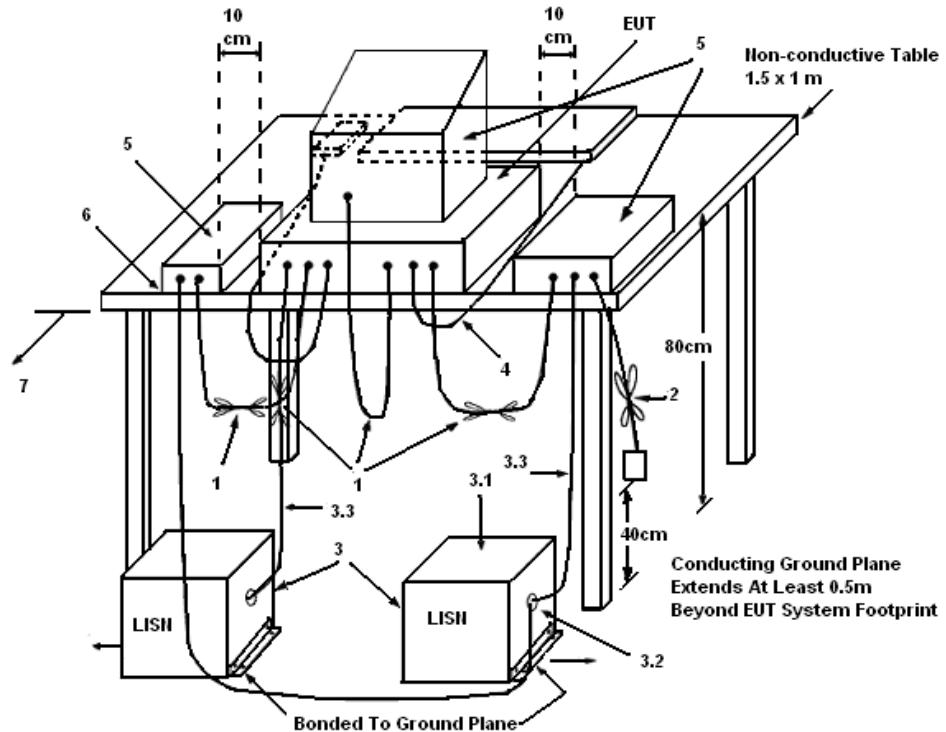

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

### 3.1.5. Test Deviation

There is no deviation with the original standard.


### 3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

## 3.1.7. Results of AC Power Line Conducted Emissions Measurement


Final Test Date	May 21, 2012	Test Site No.	CO04-HY
Temperature	24°C	Humidity	45%
Test Engineer	Sam	Configuration	Normal Mode

Line

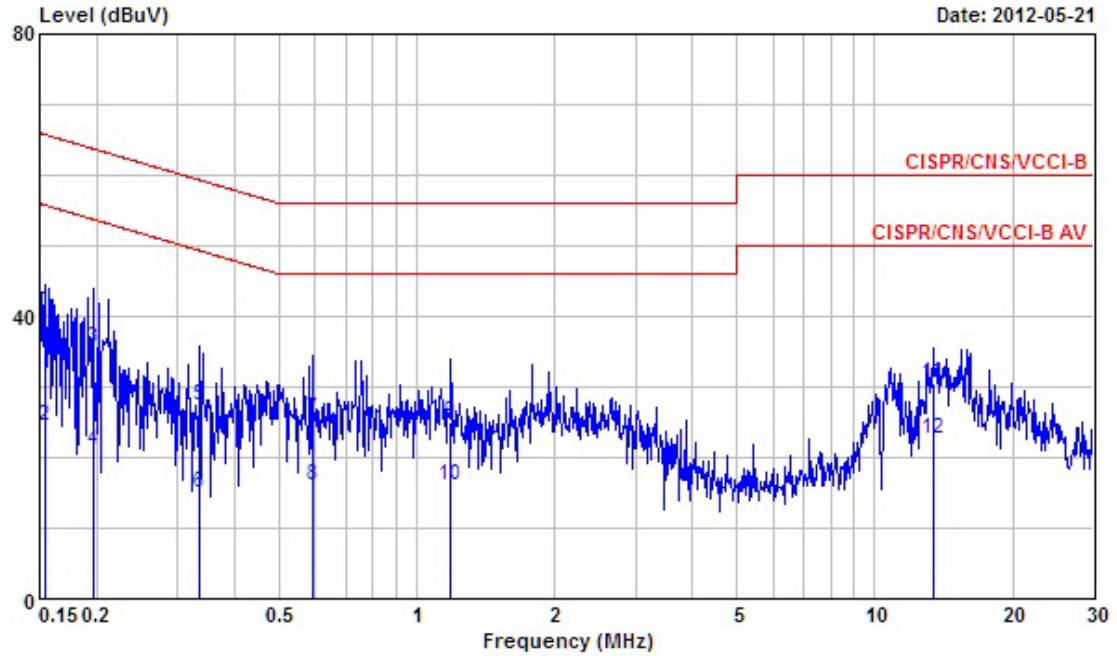

Freq	Level	Over Limit	Limit	Read Line	LISN		Cable Loss	Remark
					MHz	dBuV	dB	
1 0.1540270	40.73	-25.05	65.78	40.33	0.30	0.30	0.10	QP
2 0.1540270	24.47	-31.31	55.78	24.07	0.30	0.30	0.10	Average
3 0.1965370	35.61	-28.15	63.76	35.21	0.30	0.30	0.10	QP
4 0.1965370	21.09	-32.67	53.76	20.69	0.30	0.30	0.10	Average
5 0.3356200	27.43	-31.88	59.31	27.03	0.30	0.30	0.10	QP
6 0.3356200	14.93	-34.38	49.31	14.53	0.30	0.30	0.10	Average
7 0.5916410	25.46	-30.54	56.00	25.07	0.29	0.29	0.10	QP
8 0.5916410	15.95	-30.05	46.00	15.56	0.29	0.29	0.10	Average
9 1.180	25.04	-30.96	56.00	24.67	0.29	0.29	0.08	QP
10 1.180	16.16	-29.84	46.00	15.79	0.29	0.29	0.08	Average
11 13.410	30.44	-29.56	60.00	29.56	0.51	0.51	0.37	QP
12 13.410	22.60	-27.40	50.00	21.72	0.51	0.51	0.37	Average

### ***Neutral***

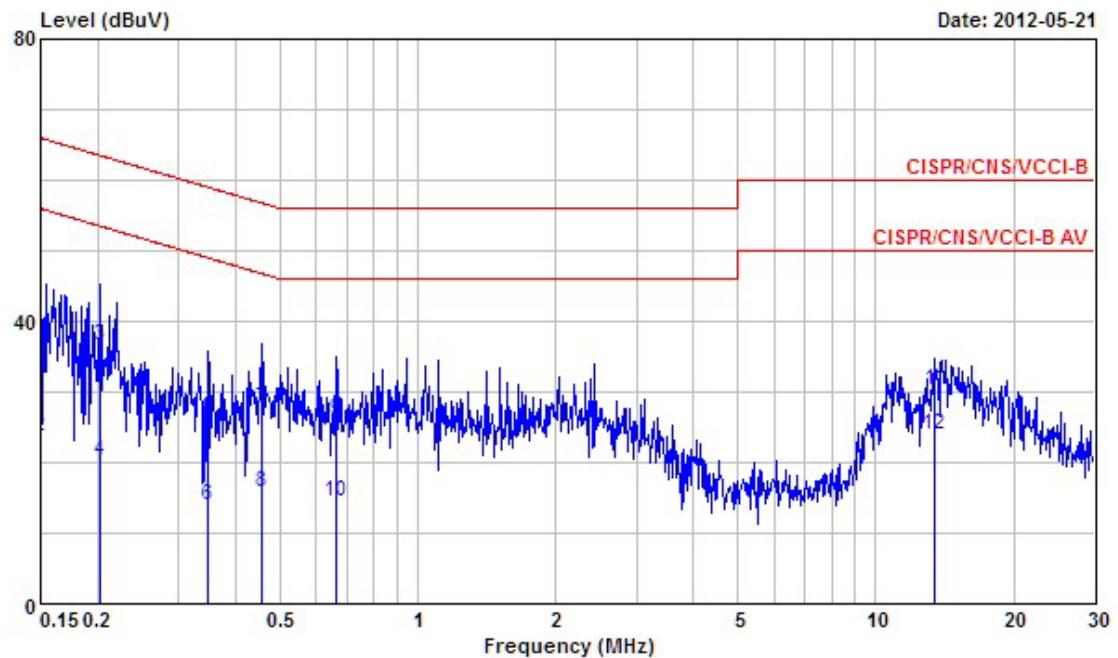

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1500000	39.24	-26.76	66.00	38.87	0.27	0.10 QP
2	0.1500000	23.78	-32.22	56.00	23.41	0.27	0.10 Average
3	0.2028850	36.58	-26.91	63.49	36.23	0.25	0.10 QP
4	0.2028850	20.28	-33.21	53.49	19.93	0.25	0.10 Average
5	0.3464610	25.95	-33.10	59.05	25.61	0.24	0.10 QP
6	0.3464610	13.86	-35.19	49.05	13.52	0.24	0.10 Average
7	0.4539490	27.65	-29.15	56.80	27.31	0.24	0.10 QP
8	0.4539490	15.72	-31.08	46.80	15.38	0.24	0.10 Average
9	0.6612710	25.93	-30.07	56.00	25.58	0.25	0.10 QP
10	0.6612710	14.49	-31.51	46.00	14.14	0.25	0.10 Average
11	13.480	30.26	-29.74	60.00	29.46	0.43	0.37 QP
12	13.480	23.95	-26.05	50.00	23.15	0.43	0.37 Average

### Note:

Level = Read Level + LISN Factor + Cable Loss.

### 3.2. Field Strength of Fundamental Emissions Measurement

#### 3.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94

#### 3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

### 3.2.4. Test Setup Layout

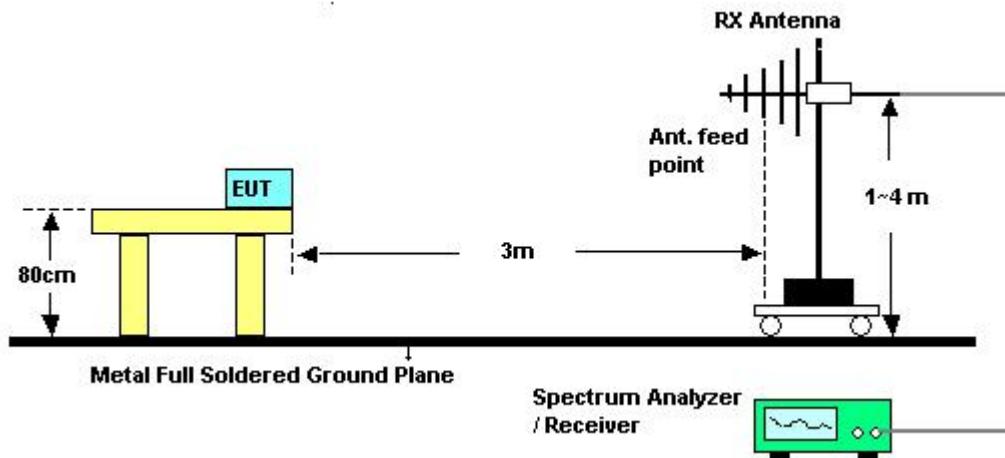

### 3.2.5. Test Deviation

There is no deviation with the original standard.

### 3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.2.7. Test Result of Field Strength of Fundamental Emissions

Final Test Date	Apr. 24, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	2407.5 MHz / 2440 MHz / 2470 MHz

## 2407.5 MHz

## Vertical

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
3 2407.090	95.63	-18.37	114.00	60.75	31.86	3.02	0.00	Peak	---	---
3 2407.090	73.65	-20.35	94.00	38.77	31.86	3.02	0.00	Average	---	---

## 2440 MHz

## Vertical

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 2439.770	94.76	-19.24	114.00	59.72	31.99	3.05	0.00	Peak	---	---
1 2439.770	73.16	-20.84	94.00	38.12	31.99	3.05	0.00	Average	---	---

## 2470 MHz

## Vertical

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 2470.740	94.36	-19.64	114.00	59.15	32.13	3.08	0.00	Peak	---	---
1 2469.980	73.12	-20.88	94.00	37.98	32.06	3.08	0.00	Average	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.3. 20dB Spectrum Bandwidth Measurement

#### 3.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band.

#### 3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

#### 3.3.4. Test Setup Layout

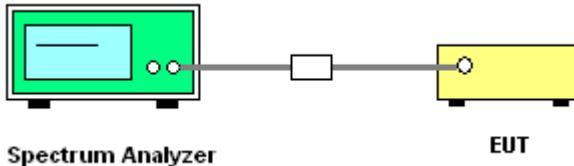

#### 3.3.5. Test Deviation

There is no deviation with the original standard.

#### 3.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

## 3.3.7. Test Result of 20dB Spectrum Bandwidth

Final Test Date	May 12, 2012	Test Site No.	TH01-HY
Temperature	28.4°C	Humidity	32%
Test Engineer	Ian	Configurations	2407.5 MHz / 2440 MHz / 2470 MHz


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483\text{MHz}$	Test Result
2407.5 MHz	1.54	1.42	2406.8200	-	Complies
2440 MHz	1.62	1.48	-	-	Complies
2470 MHz	1.72	1.58	-	2470.9600	Complies

## 20 dB / 99% Bandwidth Plot on 2407.5 MHz

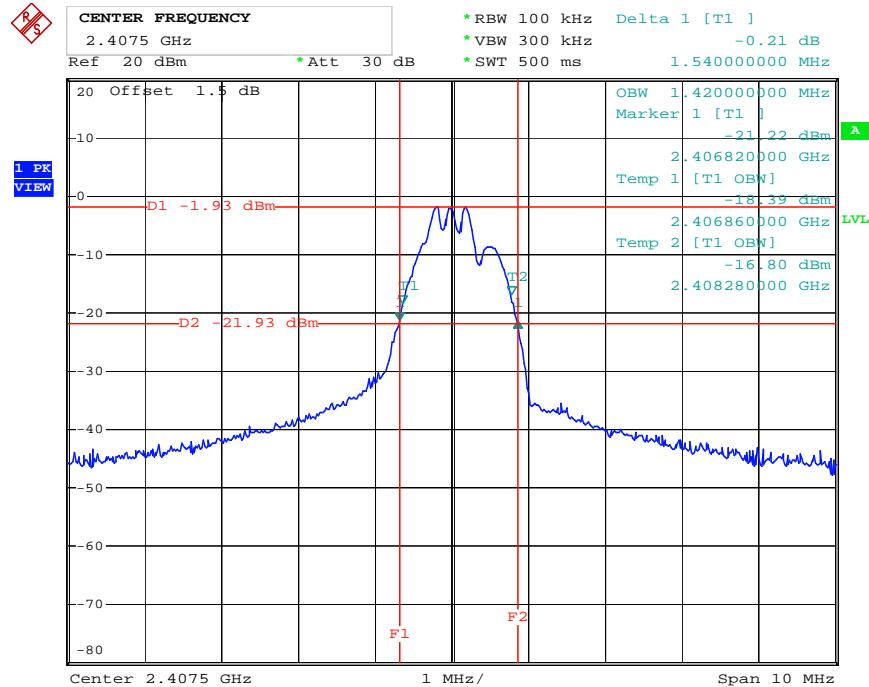


Date: 12.MAY.2012 11:31:59

## 20 dB / 99% Bandwidth Plot on 2440 MHz

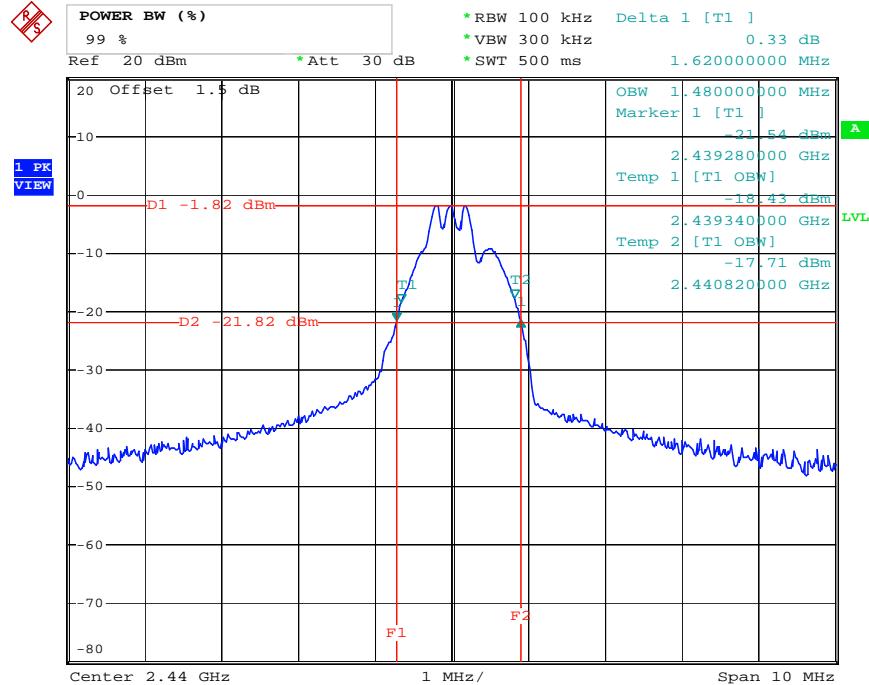

Date: 12.MAY.2012 11:33:51

## 20 dB / 99% Bandwidth Plot on 2470 MHz

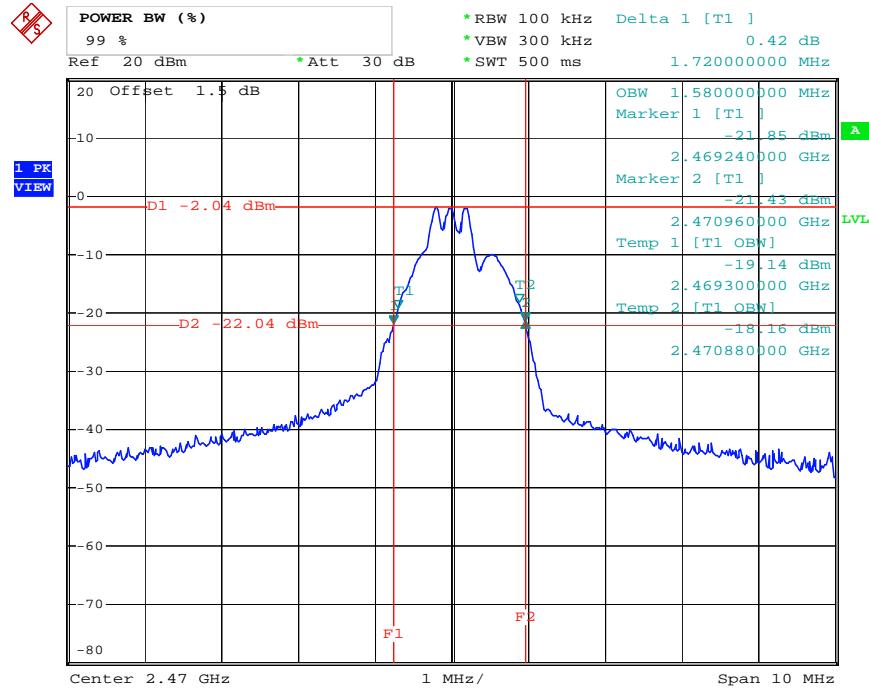

Date: 12.MAY.2012 11:36:54

### 3.4. Radiated Emissions Measurement

#### 3.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.4.4. Test Setup Layout

For radiated emissions below 30MHz

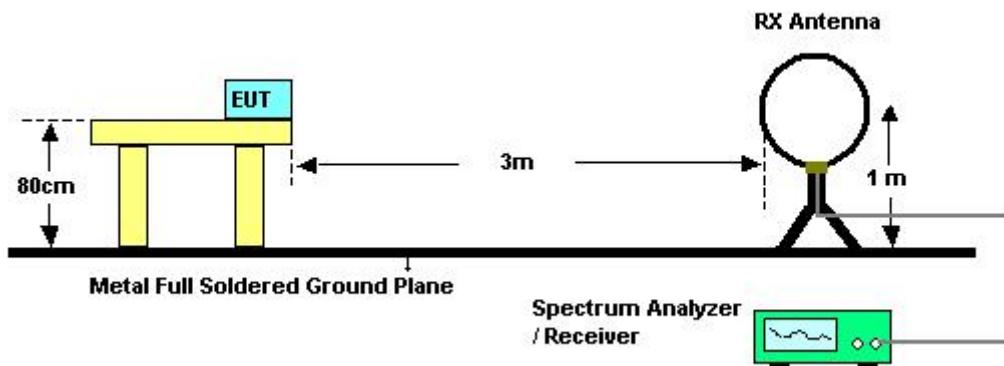

For radiated emissions above 30MHz

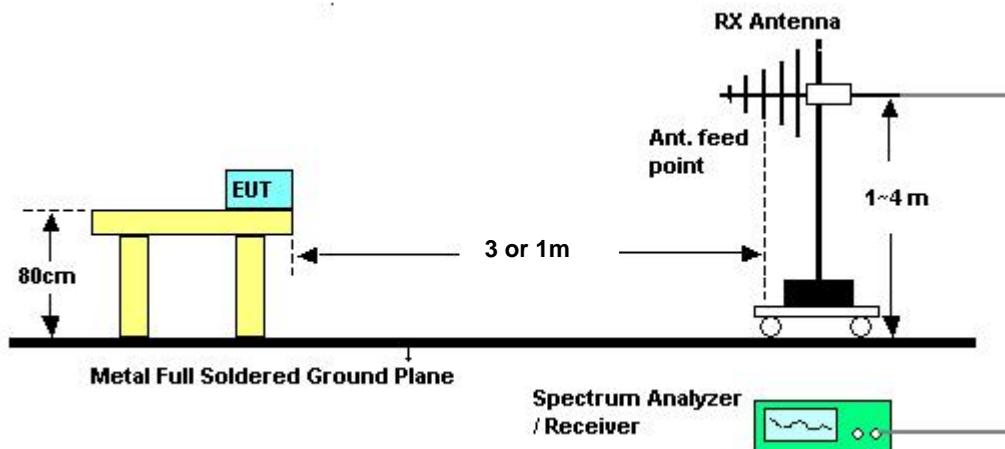

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.4.5. Test Deviation

There is no deviation with the original standard.

### 3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.4.7. Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	May 03, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

## Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);  
Limit line = specific limits (dBuV) + distance extrapolation factor.

## 3.4.8. Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	May 03, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	Normal Mode

## Horizontal

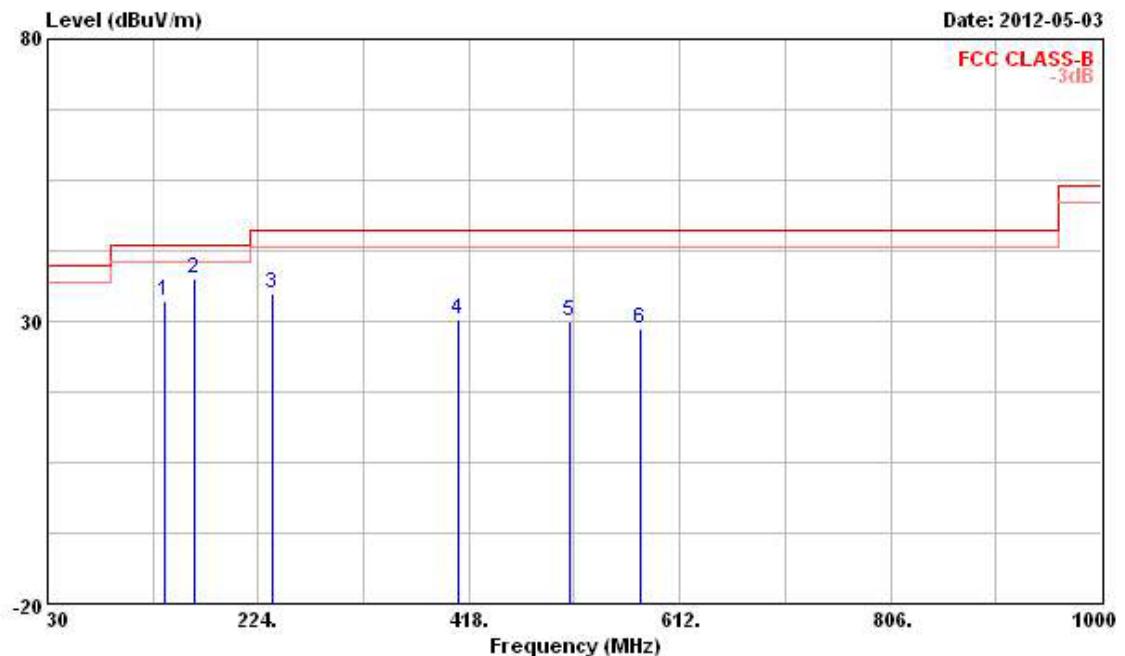

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Limit	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 137.670	33.76	-9.74	43.50	47.28	12.18	1.98	27.68	Peak	---	---
2 164.830	37.59	-5.91	43.50	52.67	10.34	2.14	27.56	Peak	---	---
3 237.580	34.79	-11.21	46.00	46.83	12.59	2.69	27.32	Peak	---	---
4 408.300	30.26	-15.74	46.00	39.31	15.43	3.43	27.91	Peak	---	---
5 510.150	29.90	-16.10	46.00	36.82	17.59	3.87	28.38	Peak	---	---
6 576.110	28.70	-17.30	46.00	33.51	19.48	4.15	28.44	Peak	---	---

## Vertical

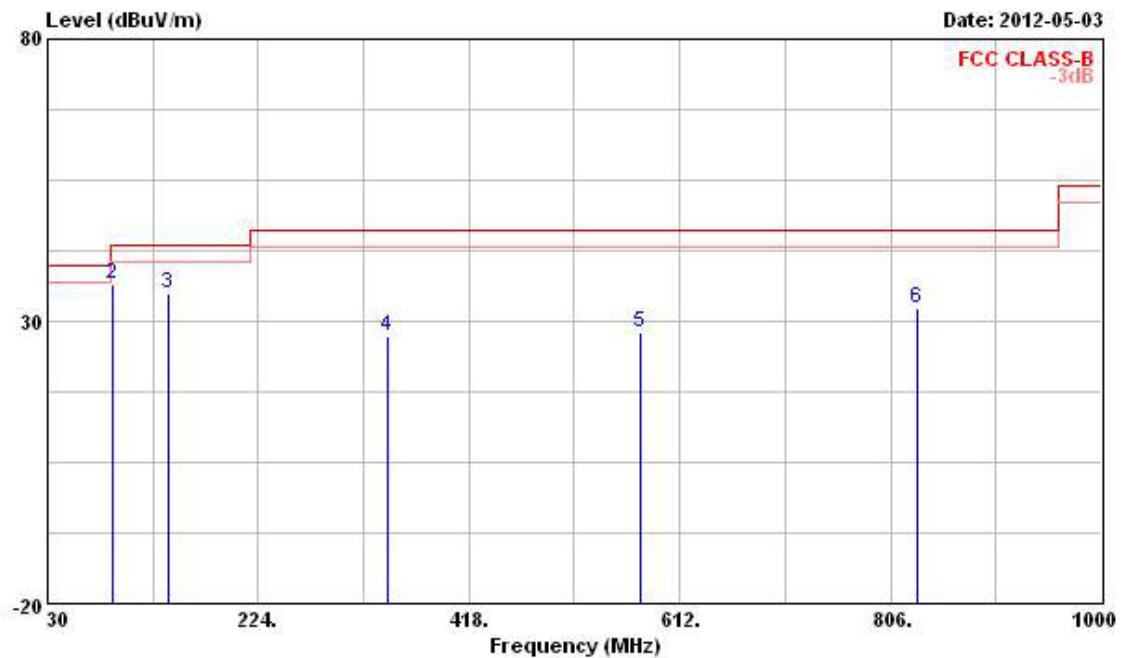

Freq	Level	Over Limit		Read		Ant	Table		
		Line	Limit	Antenna	Cable			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 30.000	36.48	-3.52	40.00	47.32	16.22	0.89	27.95	Peak	---
2 90.140	36.59	-6.91	43.50	53.36	9.50	1.58	27.85	Peak	---
3 141.550	34.93	-8.57	43.50	48.82	11.78	2.00	27.67	Peak	---
4 343.310	27.28	-18.72	46.00	37.22	14.37	3.15	27.46	Peak	---
5 576.110	27.89	-18.11	46.00	32.70	19.48	4.15	28.44	Peak	---
6 831.220	32.33	-13.67	46.00	34.98	20.19	4.99	27.83	Peak	---

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.4.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Final Test Date	Apr. 24, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	2407.5 MHz

## Horizontal

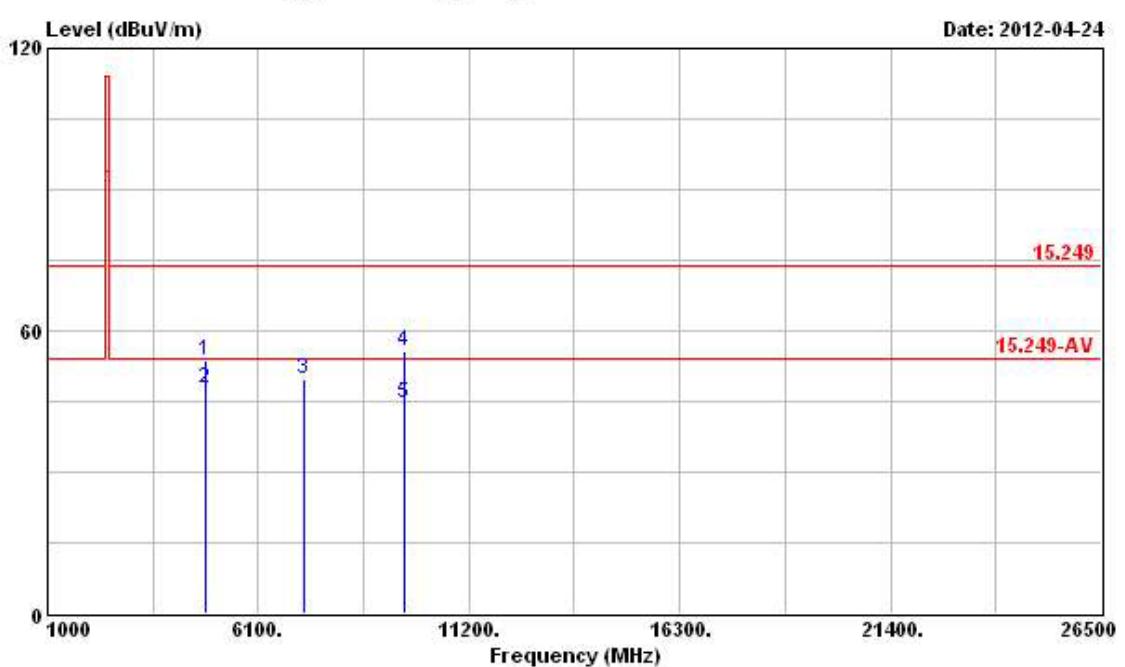


Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				dB	dBuV/m						
MHz	dBuV/m	dB	dBuV/m	dB	dBuV	dB/m	dB	dB		cm	deg
1 4815.000	53.68	-20.32	74.00	48.17	35.73	4.58	34.80	34.80	Peak	---	---
2 4815.000	47.92	-6.08	54.00	42.41	35.73	4.58	34.80	34.80	Average	---	---
3 7222.500	49.77	-4.23	54.00	41.38	37.84	5.63	35.08	35.08	PK	---	---
4 9630.000	55.80	-18.20	74.00	45.56	39.37	6.34	35.47	35.47	Peak	---	---
5 9630.000	44.61	-9.39	54.00	34.37	39.37	6.34	35.47	35.47	Average	---	---

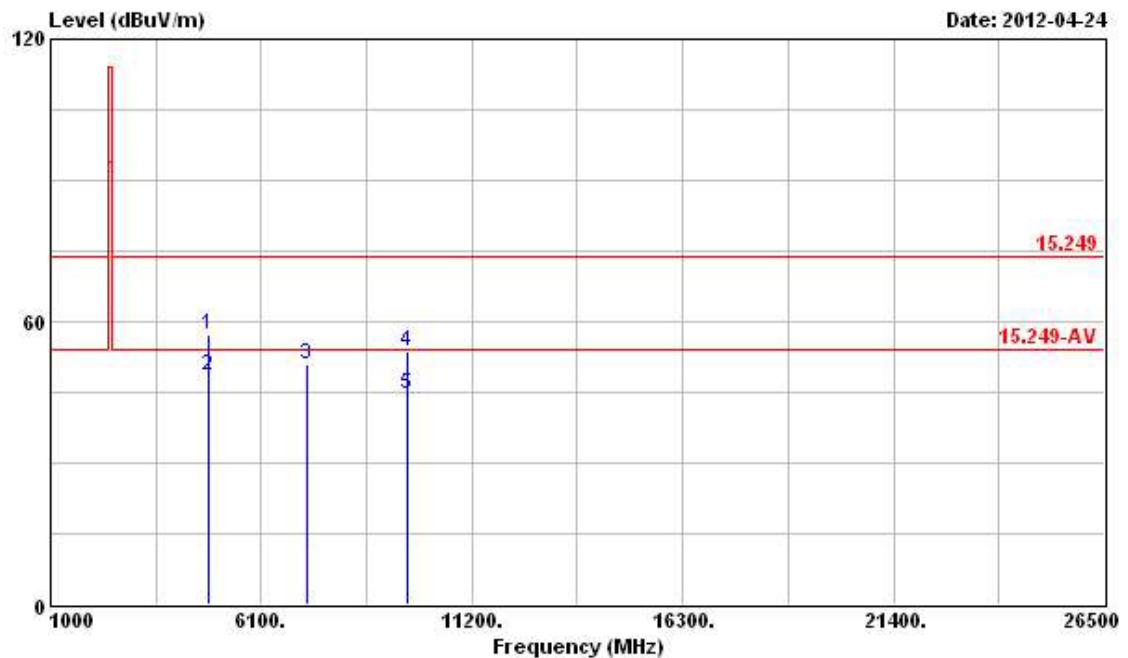
**Vertical**

Freq	Level	Over Limit	Limit	Read		Antenna	Cable		Preamp	Remark	Ant Pos	Table Pos
				Line	Level		Factor	dB	dB			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m						cm	deg
1 4815.000	57.24	-16.76	74.00	52.35	35.11	4.58	34.80	Peak			---	---
2 4815.000	48.36	-5.64	54.00	43.47	35.11	4.58	34.80	Average			---	---
3 @ 7222.500	50.80	-3.20	54.00	43.36	36.89	5.63	35.08	PK			---	---
4 9630.000	53.74	-20.26	74.00	44.30	38.57	6.34	35.47	Peak			---	---
5 9630.000	44.64	-9.36	54.00	35.20	38.57	6.34	35.47	Average			---	---

Final Test Date	Apr. 24, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	2440 MHz

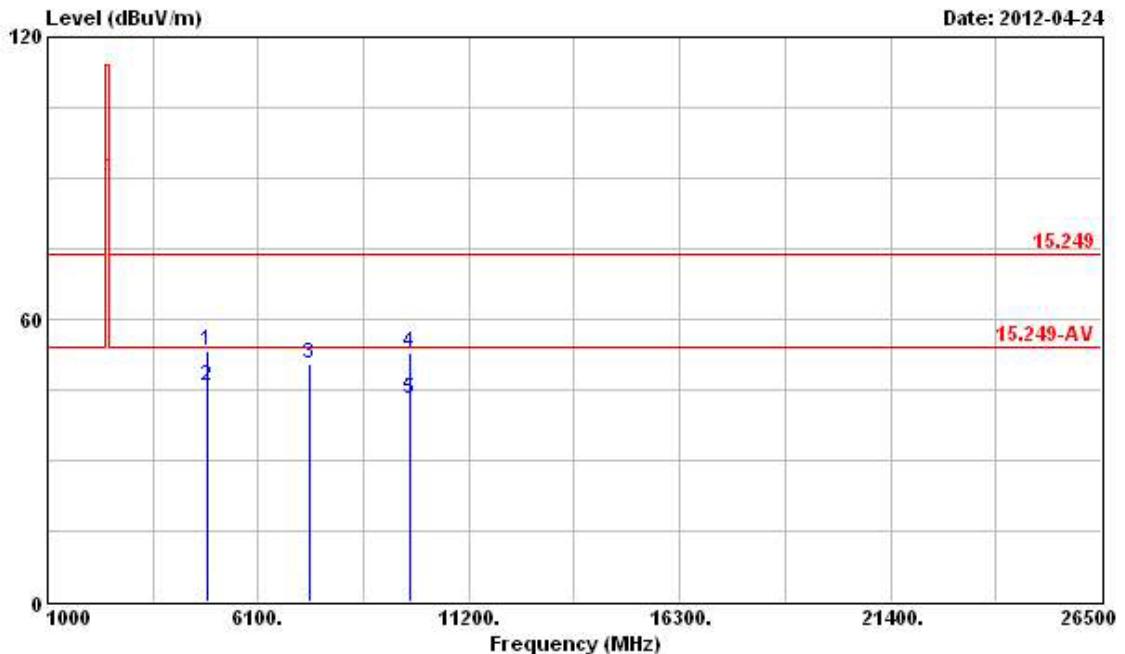
**Horizontal**

Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				dB	dBuV/m						
1 4880.000	53.43	-20.57	74.00	47.77	35.83	4.61	34.78	Peak	---	---	
2 4880.000	45.88	-8.12	54.00	40.22	35.83	4.61	34.78	Average	---	---	
3 @ 7320.000	50.71	-3.29	54.00	42.30	37.87	5.64	35.10	PK	---	---	
4 9760.000	53.04	-20.96	74.00	42.65	39.51	6.36	35.48	Peak	---	---	
5 9760.000	43.07	-10.93	54.00	32.68	39.51	6.36	35.48	Average	---	---	

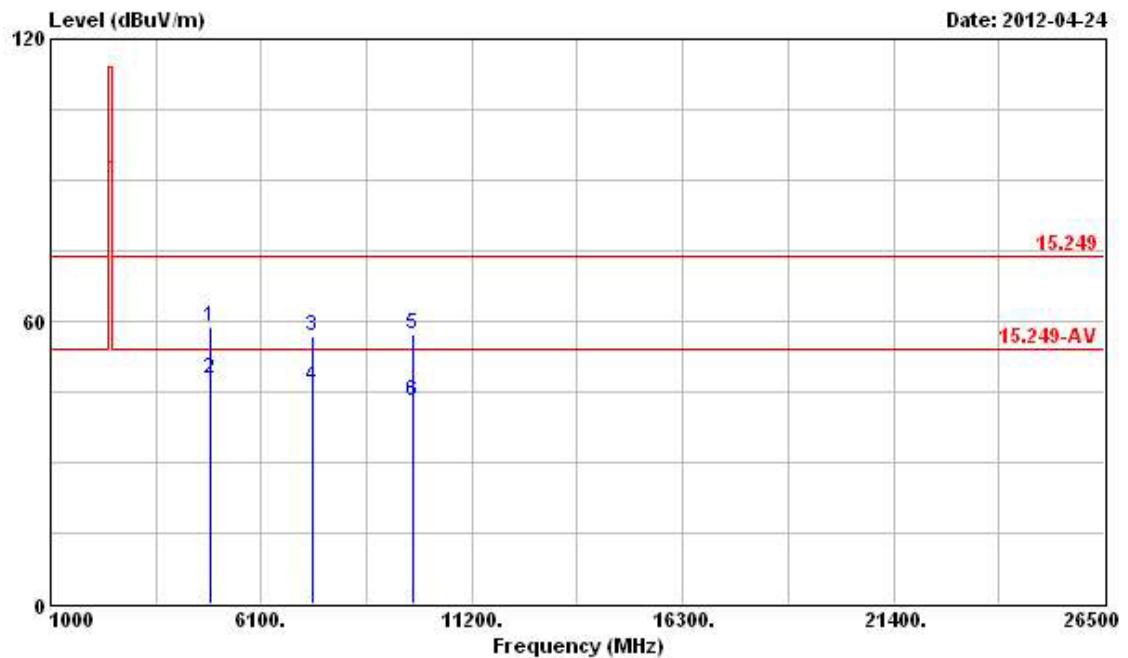
**Vertical**

Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Line	Antenna			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4880.000	58.76	-15.24	74.00	53.75	35.18	4.61	34.78	Peak	---
2 4880.000	47.81	-6.19	54.00	42.80	35.18	4.61	34.78	Average	---
3 7320.000	56.65	-17.35	74.00	49.18	36.93	5.64	35.10	Peak	---
4 7320.000	46.10	-7.90	54.00	38.63	36.93	5.64	35.10	Average	---
5 9760.000	57.15	-16.85	74.00	47.56	38.71	6.36	35.48	Peak	---
6 9760.000	43.07	-10.93	54.00	33.48	38.71	6.36	35.48	Average	---

Final Test Date	Apr. 24, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	2470 MHz

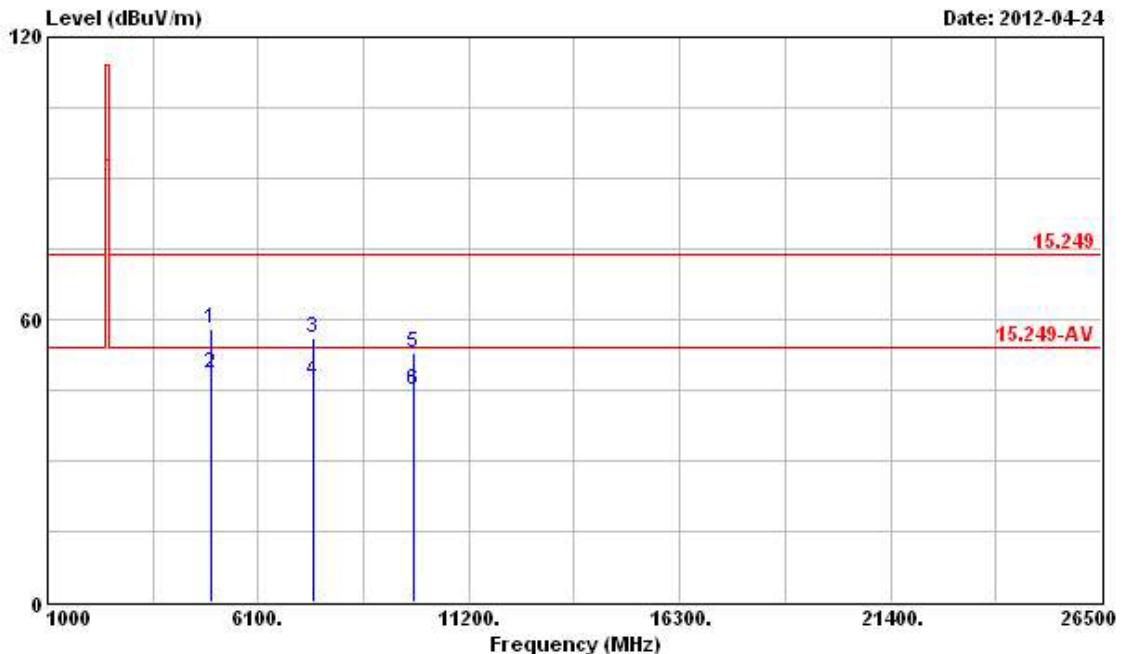**Horizontal**

Freq	Level	Over Limit	Limit Line	Antenna		Cable		Preamp Factor	Remark	Ant Pos	Table Pos
				Level	Factor	dB	dBuV/m				
1	4940.000	58.00	-16.00	74.00	52.15	35.93	4.68	34.76	Peak	---	---
2	4940.000	48.75	-5.25	54.00	42.90	35.93	4.68	34.76	Average	---	---
3	7410.000	55.94	-18.06	74.00	47.53	37.88	5.65	35.12	Peak	---	---
4	7410.000	46.83	-7.17	54.00	38.42	37.88	5.65	35.12	Average	---	---
5	9880.000	53.09	-20.91	74.00	42.54	39.66	6.38	35.49	Peak	---	---
6	9880.000	44.81	-9.19	54.00	34.26	39.66	6.38	35.49	Average	---	---

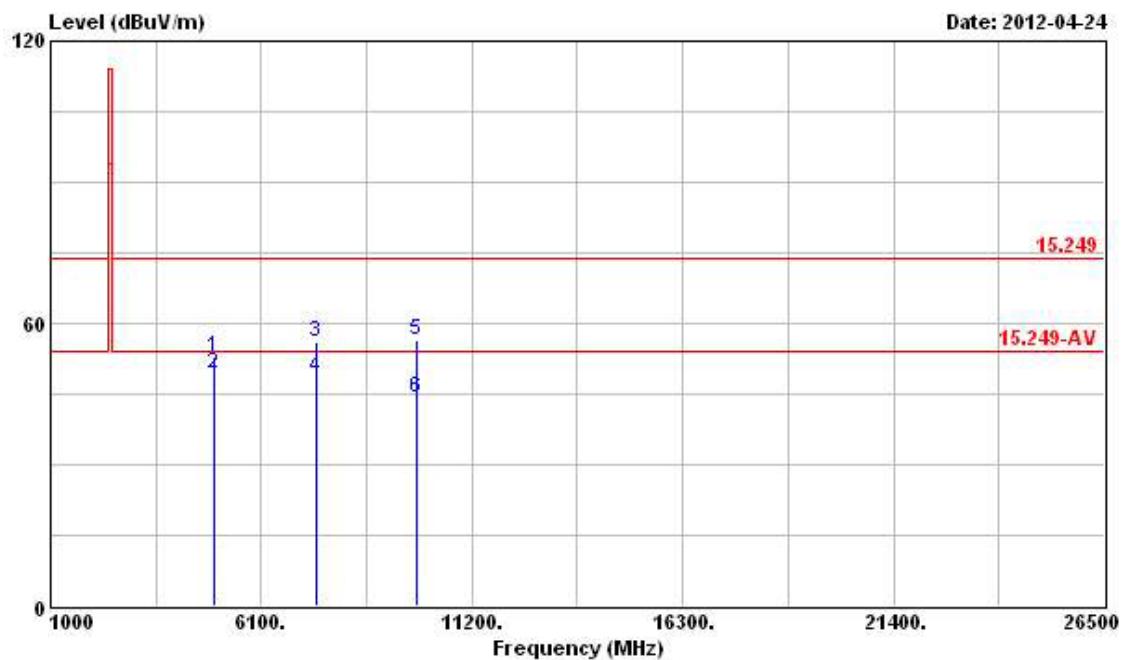*Vertical*

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Cable	Loss			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 4940.000	52.72	-21.28	74.00	47.55	35.25	4.68	34.76	Peak	---	---
2 4940.000	49.44	-4.56	54.00	44.27	35.25	4.68	34.76	Average	---	---
3 7410.000	56.02	-17.98	74.00	48.52	36.97	5.65	35.12	Peak	---	---
4 7410.000	48.44	-5.56	54.00	40.94	36.97	5.65	35.12	Average	---	---
5 9880.000	56.34	-17.66	74.00	46.59	38.86	6.38	35.49	Peak	---	---
6 9880.000	44.13	-9.87	54.00	34.38	38.86	6.38	35.49	Average	---	---

### 3.5. Band Edge Emissions Measurement

#### 3.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

#### 3.5.3. Test Procedures

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.2.4.

#### 3.5.5. Test Deviation

There is no deviation with the original standard.

#### 3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.5.7. Test Result of Band Edge

Final Test Date	Apr. 24, 2012	Test Site No.	03CH02-HY
Temperature	24.4°C	Humidity	60%
Test Engineer	Hsiao	Configurations	2407.5 MHz, 2470MHz

## 2407.5 MHz

Freq	Level	Over Limit	Line	ReadAntenna		Cable Preamp			Ant Pos	Table Pos
				Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2388.850	61.13	-12.87	74.00	26.32	31.79	3.02	0.00 Peak	---	---
2	2400.000	67.32	-6.68	74.00	32.51	31.79	3.02	0.00 Peak	---	---
1	2311.140	47.65	-6.35	54.00	13.25	31.44	2.96	0.00 Average	---	---
2	2400.000	47.67	-6.33	54.00	12.86	31.79	3.02	0.00 Average	---	---

## 2470 MHz

Freq	Level	Over Limit	Line	ReadAntenna		Cable Preamp			Ant Pos	Table Pos
				Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
2	2485.370	62.50	-11.50	74.00	27.29	32.13	3.08	0.00 Peak	---	---
2	2485.940	48.33	-5.67	54.00	13.12	32.13	3.08	0.00 Average	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### **3.6. Antenna Requirements**

#### **3.6.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.6.2. Antenna Connector Construction**

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

#### 4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz – 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9 kHz ~ 30 MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9 KHz ~ 40 GHz	Feb. 21, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 03, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20~100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10 MHz ~ 40 GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300 MHz ~ 40 GHz	Jun. 16, 2011	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300 MHz ~ 40 GHz	Jun. 20, 2011	Conducted (TH01-HY)
RF Cable-1m	Jye Bao	RG142	CB034-1m	20 MHz ~ 7 GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-2m	Jye Bao	RG142	CB035-2m	20 MHz ~ 1 GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: calibration interval of instruments listed above is two year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2011	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 25, 2011	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1 Hz ~ 26.5GHz	Jul. 25, 2011	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

**5. TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-111208

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 08, 2011

P1, total 24 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix