


ANNEX D: MEASURING RESULTS OF 99%-BANDWIDTH

1 TEST RESULTS

1.1 METHOD OF MEASUREMENT (99 % BANDWIDTH)

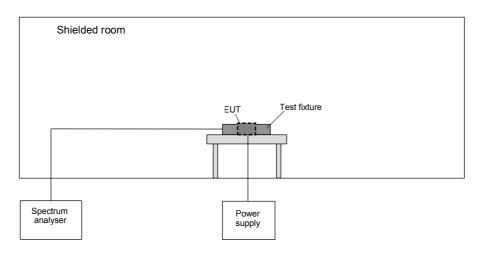

The following procedure will be used for the occupied bandwidth measurement:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

Test Engineer: Raimund Blask Report Number: F103191E3 page 1 of 3
Date of issue: 22 November 2010 Order Number: 103191




ANNEX D: MEASURING RESULTS OF 99%-BANDWIDTH

1.2 TEST RESULTS (99 % BANDWIDTH)

Ambient temperature:	20 °C	R	elative humidity:	30 %
----------------------	-------	---	-------------------	------

Power supply: During this test the EUT was powered with the internal 1.4 V-Battery.

Test record: The test was carried out while transmitting a continuous audio stream.

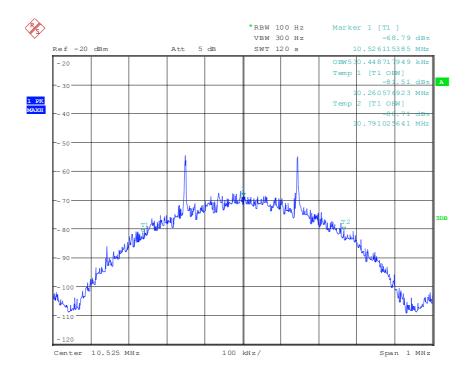

103191 obw.wmf: Occupied bandwidth

FL	Fυ	BW (F _U - F _L)	
10.260576 MHz	10.791025 MHz	530.449 kHz	
Measurement uncertainty		< 1*10 ⁻⁷	



ANNEX D: MEASURING RESULTS OF 99%-BANDWIDTH

31, 58, 59

Test Engineer: Raimund Blask Report Number: F103191E3 page 3 of 3
Date of issue: 22 November 2010 Order Number: 103191