

Königswinkel 10
32825 Blomberg
Germany
Phone: +49 (0) 52 35 95 00-0
Fax: +49 (0) 52 35 95 00-10

Test Report

Report Number: F113324E3

Applicant:

Audifon GmbH & Co KG

Manufacturer:

Audifon GmbH & Co KG

Equipment under Test (EUT):

multistreamer

Laboratory (CAB) accredited by
Deutsche Gesellschaft für Akkreditierung mbH
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. DGA-PL-105/99-22,
FCC Test site registration number 90877 and
Industry Canada Test site registration IC3469A-1

REFERENCES

- [1] **ANSI C63.4-2009** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (August 2011)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**
- [4] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 3 (December 2010)** General Requirements and Information for the Certification of Radio Apparatus
- [6] **Publication Number 913591 (March 2007)** Measurement of radiated emissions at the edge of the band for a Part 15 RF Device

TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:

Manuel BASTERT

Name



16 March 2012

Signature

Date

Authorized reviewer:

Bernd STEINER

Name



16 March 2012

Signature

Date

RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:

	Page
1 IDENTIFICATION.....	4
1.1 Applicant	4
1.2 Manufacturer.....	4
1.3 Test laboratory	4
1.4 EUT (Equipment Under Test)	5
1.5 Technical data of equipment.....	5
1.6 Dates	6
2 OPERATIONAL STATES.....	7
3 ADDITIONAL INFORMATION	8
4 OVERVIEW	9
5 TEST RESULTS.....	10
5.1 20 dB bandwidth	10
5.1.1 Method of measurement (20 dB bandwidth)	10
5.1.2 Test results (20 dB bandwidth).....	11
5.2 Carrier frequency separation	13
5.2.1 Method of measurement (carrier frequency separation)	13
5.2.2 Test results (carrier frequency separation).....	14
5.3 Number of hopping frequencies.....	16
5.3.1 Method of measurement (number of hopping frequencies)	16
5.3.2 Test results (number of hopping frequencies)	17
5.4 Dwell time.....	18
5.4.1 Method of measurement (dwell time)	18
5.4.2 Test results (dwell time).....	19
5.5 Maximum peak output power.....	22
5.5.1 Method of measurement (maximum peak output power)	22
5.5.2 Test results (maximum peak output power, radiated).....	23
5.6 Band-edge compliance	25
5.6.1 Method of measurement (band-edge compliance (radiated))	25
5.6.2 Test results (Bluetooth part)	26
5.6.3 Test results (Colocation of Bluetooth and 10.57 MHz link)	30
5.7 Radiated emissions.....	31
5.7.1 Method of measurement (radiated emissions)	31
5.7.2 Test results (radiated emissions of the Bluetooth part)	36
5.7.2.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)	36
5.7.2.2 Preliminary radiated emission measurement (1 GHz to 25 GHz)	39
5.7.2.3 Final radiated emission measurement (1 GHz to 25 GHz).....	47
5.7.3 Test results (radiated emissions of colocation of Bluetooth and 10.57 MHz link)	49
5.7.3.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)	49
5.7.3.2 Final radiated emission test (9 kHz to 1 GHz)	52
5.7.3.3 Preliminary radiated emission measurement (1 GHz to 25 GHz)	55
5.7.3.4 Final radiated emission measurement (1 GHz to 25 GHz).....	58
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	59
7 REPORT HISTORY	60
8 LIST OF ANNEXES.....	60

1 IDENTIFICATION

1.1 Applicant

Name:	Audifon GmbH & Co. KG
Address:	Am Dännekamp 15
	51469 Bergisch-Gladbach
Country:	Germany
Name for contact purposes:	Mr. Stephan TEDERS
Phone:	+49 (0) 2202-92638-14
Fax:	+49 (0) 2202-92638-29
Mail address:	stephan.teders@audifon.com

1.2 Manufacturer

Name:	Audifon GmbH & Co. KG
Address:	Am Dännekamp 15
	51469 Bergisch-Gladbach
Country:	Germany
Name for contact purposes:	Mr. Stephan TEDERS
Phone:	+49 (0) 2202-92638-14
Fax:	+49 (0) 2202-92638-29
Mail address:	stephan.teders@audifon.com

1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

Accredited by DGA Deutsche Gesellschaft für Akkreditierung mbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1.

1.4 EUT (Equipment Under Test)

Equipment under test: *	Bluetooth / Hearing aid audio streamer
Model name: *	multistreamer
Brand name: *	Audifon GmbH & Co KG
Article number: *	none
FCC ID:	YU2-MS1
IC:	9284A-MS1
Serial number:	Engineering sample
Hardware version:	0096G011
Software version:	SW 03.08

1.5 Technical data of equipment

Bluetooth part

Fulfils Bluetooth specification: *	V. 2.1 with EDR		
Antenna type: *	SMD antenna		
Antenna gain: *	0 dBi		
Rated output power: *	0.0 dBm (50 Ω)		
Antenna connector: *	None (SMA connector temporary installed for conducted tests)		
Power supply: *	$U_{\text{nom}} = 3.0 \text{ V}_{\text{DC}}$	$U_{\text{min}} = -$	$U_{\text{max}} = -$
	Two type AAA batteries		
Type of modulation: *	FHSS (GFSK, $\pi/4$ -DQPSK, 8DPSK)		
Operating frequency range: *	2402 MHz to 2480 MHz		
Number of channels: *	79		

10.57 MHz transceiver part

Antenna type: *	Integral H-field antenna and external loop antenna (1 m)		
Duty cycle class: *	Up to 100%		
Rated transmitter field strength: *	$\leq -13.5 \text{ dB}\mu\text{A/m}$ @ 3 m distance		
Channel spacing: *	-		
Alignment range: *	10.57 MHz		
Switching range: *	10.57MHz		
Modulation: *	FSK		
Bit rate of transmitter: *	298 kBit/s		
Power supply: *	$U_{\text{nom}} = 3.0 \text{ V}_{\text{DC}}$	$U_{\text{min}} = -$	$U_{\text{max}} = -$
	Two type AAA batteries		

*: Declared by the applicant.

The following external I/O cables were used:

None.

1.6 Dates

Date of receipt of test sample:	07 October 2011
Start of test:	02 December 2011
End of test:	29 February 2012

2 OPERATIONAL STATES

The EUT is a transceiver allowing connecting a hearing aid via a 10.57 MHz link with a Bluetooth device supporting Advanced Audio Distribution Profile (A2DP) or Hands Free Profile (HFP). For the tests two modified samples and an unmodified sample were used. One with the internal antenna and one with a temporary antenna connector installed instead of the internal antenna. For coexistence tests the unmodified sample was used in combination with a hearing aid eox S and an A2DP capable cell phone Blackberry 8800. The modified samples could be set into a test mode using a temporary USB interface and a laptop computer.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 339 byte and with a pattern type DH5 was used. During all tests a power setting of 50 was used.

Because the EUT was not able to hop only on the highest, mid and lowest operating frequency it was tested on these frequencies separately.

The spurious emission measurement was carried out as radiated spurious emissions with the integrated antenna. The receiver spurious radiation measurement was carried out in the same manner. During the tests the test sample was battery powered with 3 V_{DC} using two type AAA batteries.


The operation mode was adjusted with the help of a configuration-software installed on a laptop computer. It was connected to the EUT via the temporary USB interface.

For the colocation tests the EUT was set up to its usually function with enabled Bluetooth and 10.57 MHz link. A mobile phone was connected via Bluetooth to the EUT and a 1 kHz sine audio file was played. At a connected hearing aid using the 10.57 MHz link the 1 kHz tone could be heard.


The following operation modes were used during the tests:

Operation mode	Description of the operation mode	Modulation	Data rate / Mbps
1	Continuous transmitting on 2402 MHz	GFSK	1
1a		$\pi/4$ -DQPSK	2
1b		8DPSK	3
2	Continuous transmitting on 2441 MHz	GFSK	1
2a		$\pi/4$ -DQPSK	2
2b		8DPSK	3
3	Continuous transmitting on 2480 MHz	GFSK	1
3a		$\pi/4$ -DQPSK	2
3b		8DPSK	3
4	Transmitter hopping on all channels	GFSK	1
4a		$\pi/4$ -DQPSK	2
4b		8DPSK	3
5	Normal hopping in coexistence with 10.57 MHz link	8DPSK	3

Set up 1 (Bluetooth test mode)

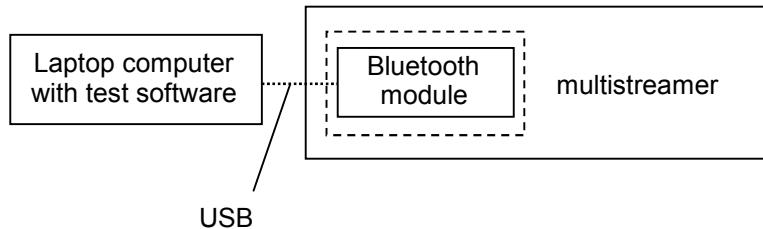

Set up 2 (Colocation test mode)

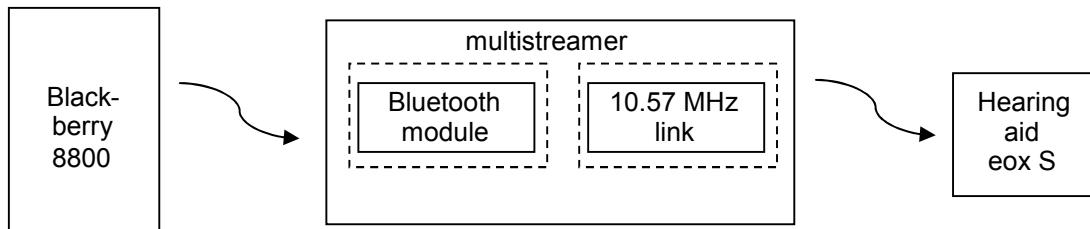

Preliminary tests were performed in different data rates and different orthogonal directions (if applicable), to find worst-case configuration and position. The data rate shown in the table below shows the found worst-case rate with respect to specific test item. The following table shows a list of the test modes used for the results, documented in this report. The radiated emission measurement was carried out in the orthogonal direction that emits the highest spurious emission levels.

Test items	Operation mode
20 dB bandwidth	1b, 2b, 3b
Carrier frequency separation	1b, 2b, 3b
Number of hopping channels	4
Dwell time	2, 2a, 2b
Maximum peak output power	1, 2, 3
Band edge compliance (radiated)	1, 3, 4, 5
Radiated emissions (transmitter)	1, 2, 3, 5

3 ADDITIONAL INFORMATION

To pass the radiated emission measurement in colocation of active Bluetooth and 10.57 MHz link the EUT had to be modified:

A ferrite core type Steward HFA100049-0A2 was installed to the outer 10.57 MHz loop antenna with two turns. See also Annex A for further information.

Ancillary equipment used to perform the measurements:

- Mobile Phone RIM Blackberry 8800
- Hearing aid Audifon eox S

4 OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 8 [4] or RSS-Gen, Issue 3 [5]	Status	Referpage
20 dB bandwidth	General	15.247 (a) (1)	A8.1 (a) [4]	Passed	10 et seq.
Carrier frequency separation	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	13 et seq.
Number of hopping channels	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (c) [4]	Passed	16 et seq.
Dwell time	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	18 et seq.
Maximum peak output power	2400.0 - 2483.5	15.247 (b) (1)	A8.4 (2) [4]	Passed	22 et seq.
Band edge compliance	2400.0 - 2483.5	15.247 (d)	A8.5 [4]	Passed	25 et seq.
Radiated emissions (transmitter)	0.009 - 25,000	15.205 (a) 15.209 (a)	A8.5 [4] 2.5 [4]	Passed	31 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.2 [5]	Not applicable *	

* Not applicable, because of battery supply

5 TEST RESULTS

5.1 20 dB bandwidth

5.1.1 Method of measurement (20 dB bandwidth)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual hopping channel.
- Resolution bandwidth: $\geq 1\%$ of the 20 dB bandwidth.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.


Test set-up:




5.1.2 Test results (20 dB bandwidth)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113324_79.wmf: 20 dB bandwidth at the lower end of the assigned frequency band:

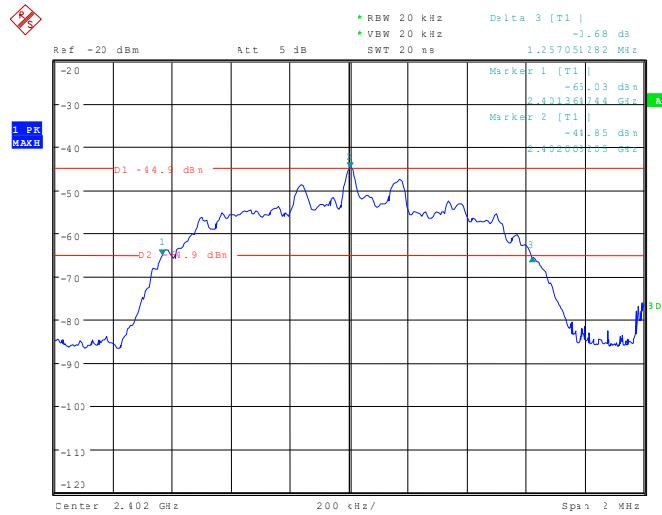

113324_80.wmf: 20 dB bandwidth at the middle of the assigned frequency band:

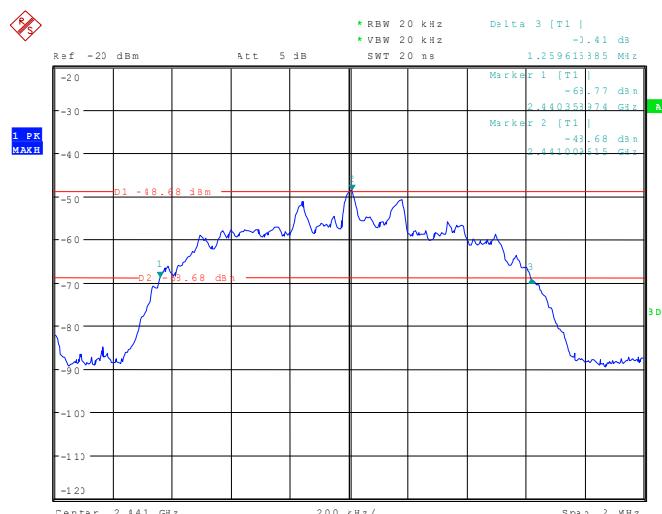

113324_81.wmf: 20 dB bandwidth at the upper end of the assigned frequency band:

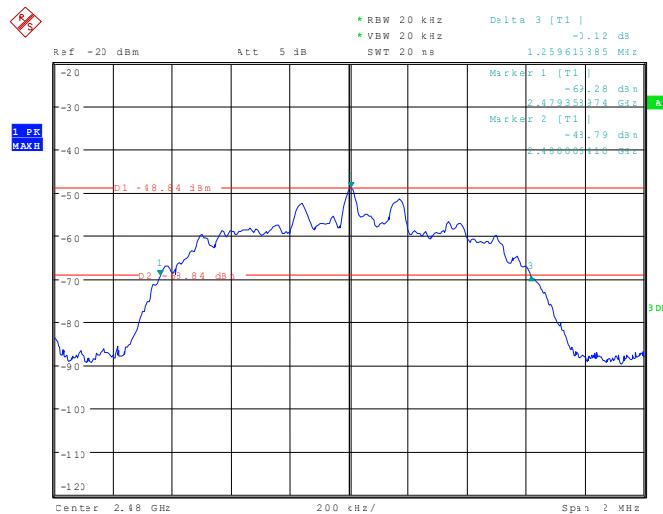

Only the plots of the worst case measurements are shown.

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
Operation mode 1, 2, 3 (GFSK)		
0	2402	823.718
39	2441	833.333
78	2480	833.333
Operation mode 1b, 2b, 3b (8DPSK)		
0	2402	1257.051
39	2441	1259.615
78	2480	1259.615
Measurement uncertainty		+0.66 dB / -0.72 dB

TEST EQUIPMENT USED FOR THE TEST:

30

5.2 Carrier frequency separation

5.2.1 Method of measurement (carrier frequency separation)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.


Test set-up:

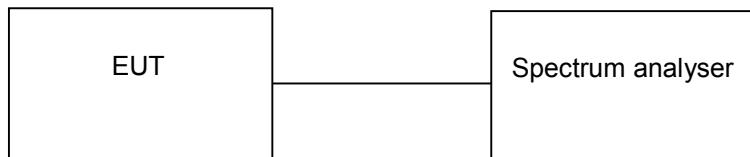


5.2.2 Test results (carrier frequency separation)


Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

113324_85.wmf: Channel separation at the lower end of the assigned frequency band:

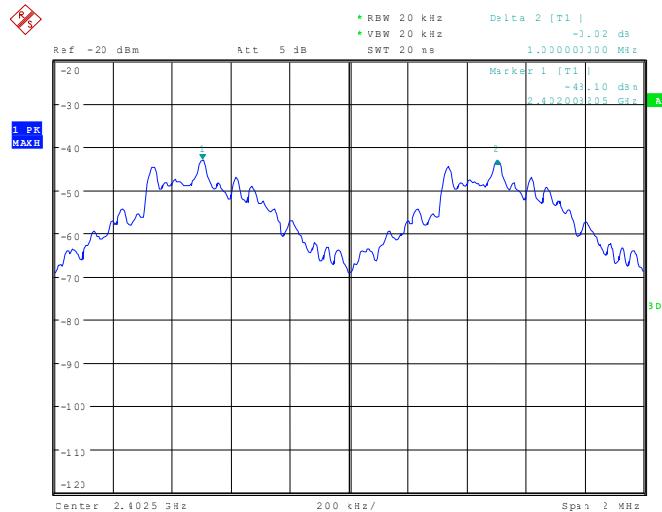

113324_86.wmf: Channel separation at the middle of the assigned frequency band:

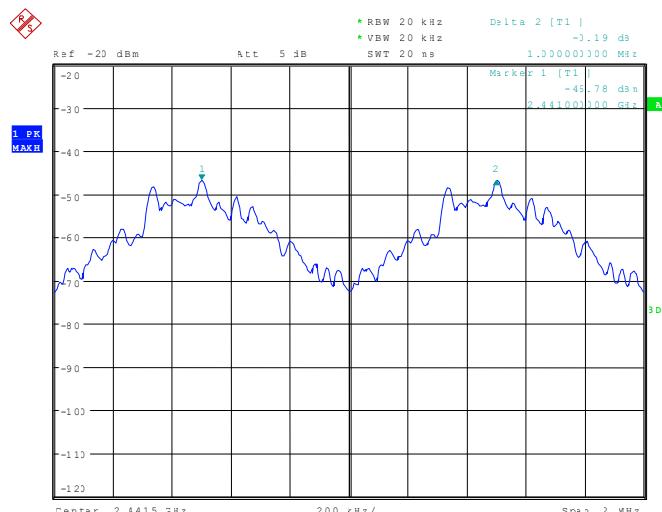

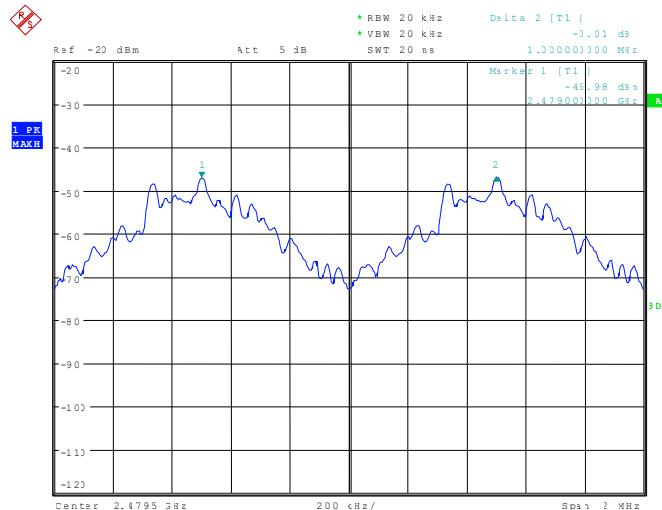113324_42.wmf: Channel separation at the upper end of the assigned frequency band:


Channel number	Channel frequency [MHz]	Channel separation [kHz]	Minimum limit [kHz] 25 kHz or $\frac{2}{3}$ of the 20 dB bandwidth
Operation mode 4			
0	2402	1000.000	838.034 ($\frac{2}{3}$ of the 20 dB bandwidth)
39	2441	1000.000	839.743 ($\frac{2}{3}$ of the 20 dB bandwidth)
78	2480	1000.000	839.743 ($\frac{2}{3}$ of the 20 dB bandwidth)
Measurement uncertainty			$<10^{-7}$

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

30

5.3 Number of hopping frequencies

5.3.1 Method of measurement (number of hopping frequencies)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.


Test set-up:

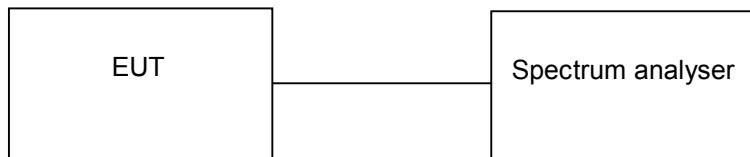

5.3.2 Test results (number of hopping frequencies)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

113324_88.wmf: Number of hopping channels:

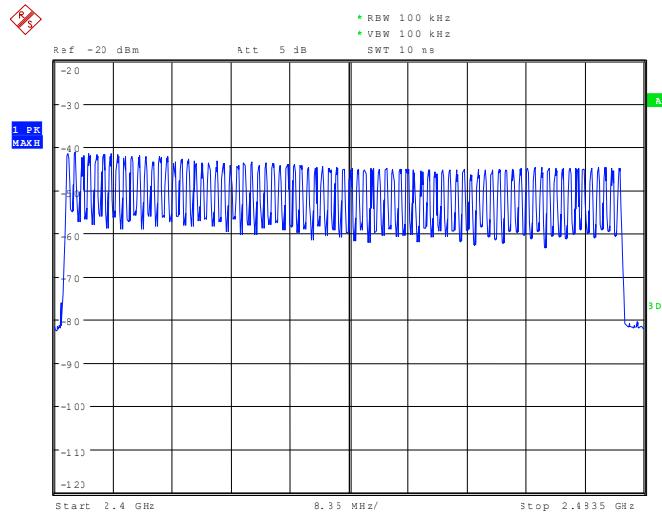

Number of hopping channels	Limit
79	At least 15

TEST EQUIPMENT USED FOR THE TEST:

30

5.4 Dwell time

5.4.1 Method of measurement (dwell time)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:


- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.


Test set-up:

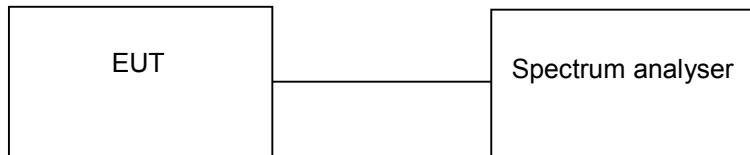


5.4.2 Test results (dwell time)


Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

113324_40.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2 (DH1)):

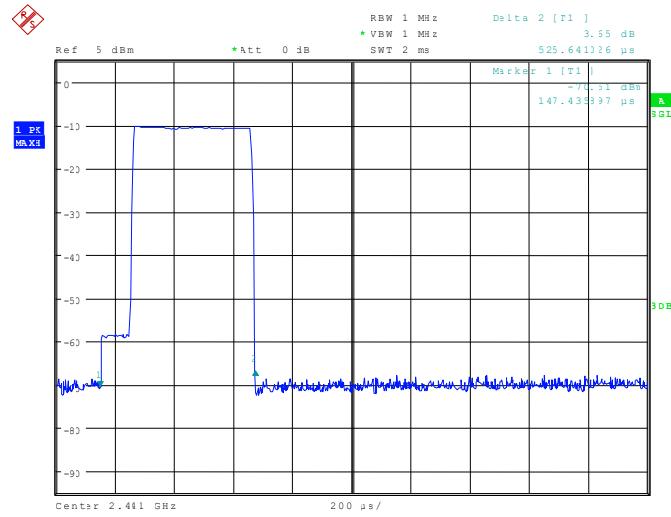

113324_41.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2 (DH3)):

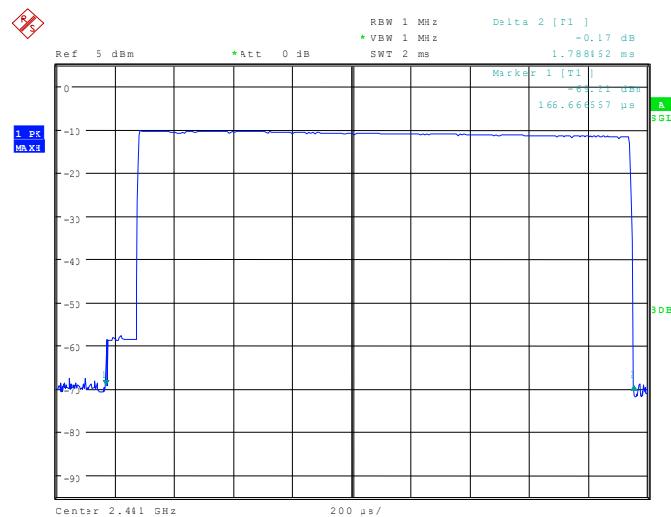

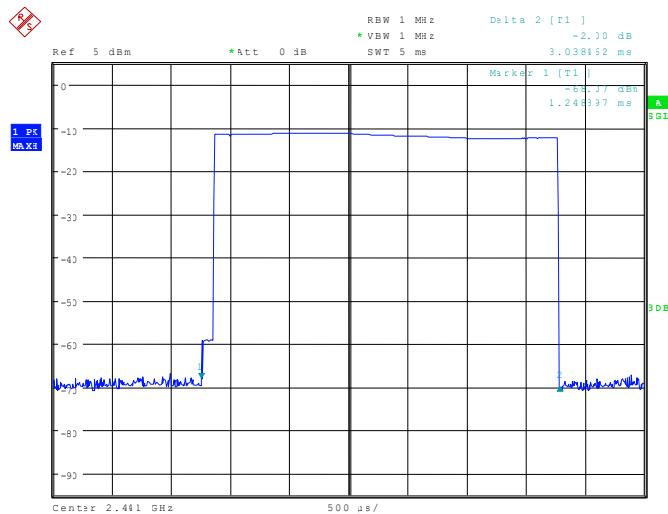113324_42.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2 (DH5)):


The dwell time is calculated with the following formula:

Dwell time = $t_{pulse} \times n_{hops} / \text{number of hopping channels} \times 31.6$ (equal to $0.4 \text{ s} \times \text{number of hopping channels}$)

Where:

t_{pulse} is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],
 n_{hops} is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625 μs .

With the used hopping mode (DH1) a packet need 1 timeslot for transmitting and the next timeslot for receiving. So the system makes in worst case 800 hops per second in transmit mode ($n_{hops} = 800 \text{ 1/s}$).

With the used hopping mode (DH3) a packet need 3 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 400 hops per second in transmit mode ($n_{hops} = 400 \text{ 1/s}$).

With the used hopping mode (DH5, 2DH5 and 3DH5) a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 267 hops per second in transmit mode ($n_{hops} = 267 \text{ 1/s}$).

Operation mode 2 (DH 1)				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	525.64	168.45	400
Operation mode 2a (DH 3)				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	1788.46	286.57	400
Operation mode 2b (DH 5)				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3038.46	324.98	400
Measurement uncertainty			$<10^{-7}$	

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

30

5.5 Maximum peak output power

5.5.1 Method of measurement (maximum peak output power)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.


Test set-up:

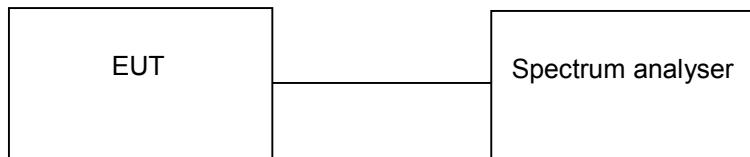


5.5.2 Test results (maximum peak output power, radiated)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113324_76-1.wmf: Maximum peak output power at the lower end of the assigned frequency band (operation mode 1):

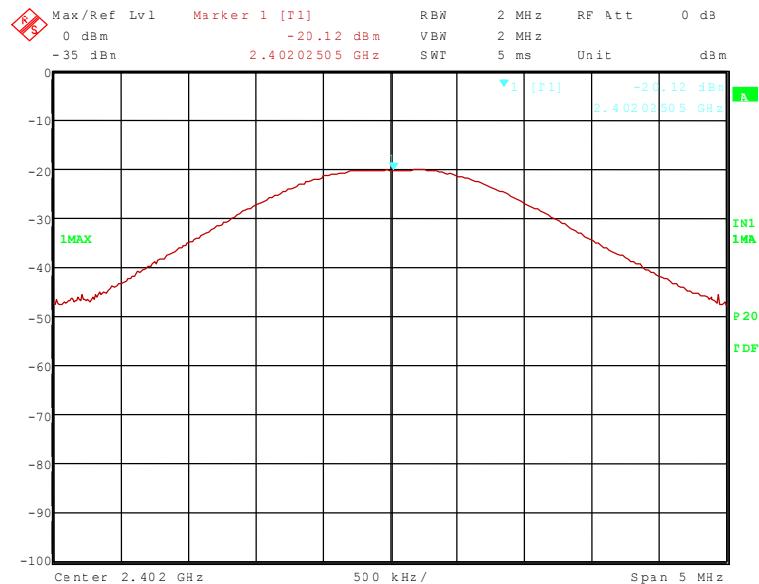

113324_77.wmf: Maximum peak output power at the middle of the assigned frequency band (operation mode 2):

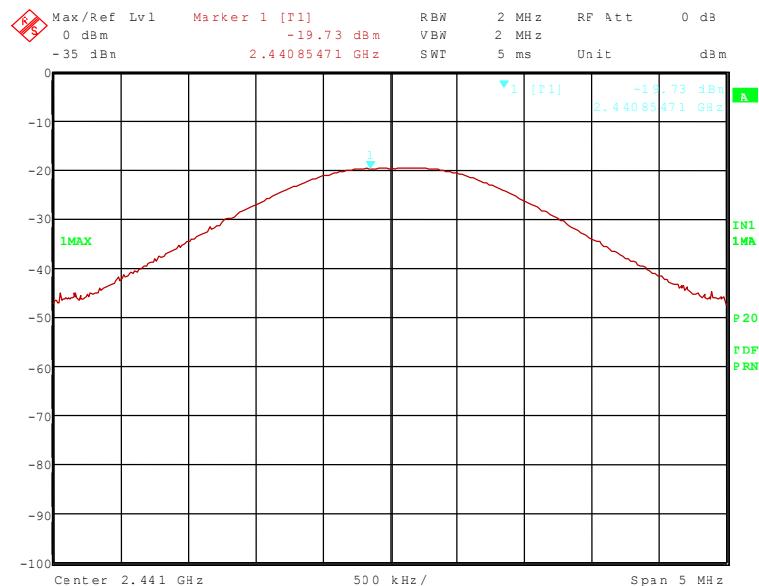

113324_78-1.wmf: Maximum peak output power at the upper end of the assigned frequency band (operation mode 3):

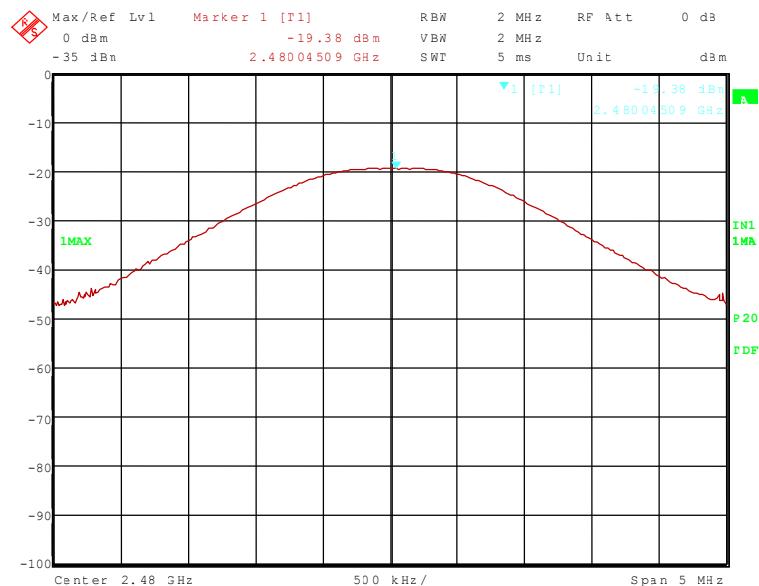

Operation mode	Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain [dBi]	Peak power limit [dBm]
1			-20.1		
1a	0	2402	-20.8	2.0	30.0
1b			-20.3		
2			-19.7		
2a	39	2441	-20.4	2.0	30.0
2b			-21.5		
3			-19.4		
3a	78	2480	-19.5	2.0	30.0
3b			-19.5		
Measurement uncertainty				+0.66 dB / -0.72 dB	

These values represent the worst case operation mode.

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 43, 44

5.6 Band-edge compliance

5.6.1 Method of measurement (band-edge compliance (radiated))

The same test set-up as used for the final radiated emission measurement shall be used (refer also subclause 5.2.1 of this test report). The measurements shall be carried out with using a resolution bandwidth of 100 kHz.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.


After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. This frequency shall be measured with the EMI receiver as described in subclause 5.2.1 of this test report, but 100 kHz resolution bandwidth shall be used.

The measurement will be performed at the upper end of the assigned frequency band and with hopping on and off.


5.6.2 Test results (Bluetooth part)



Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

113324_72.wmf: Radiated band-edge compliance, lower band edge, hopping off:

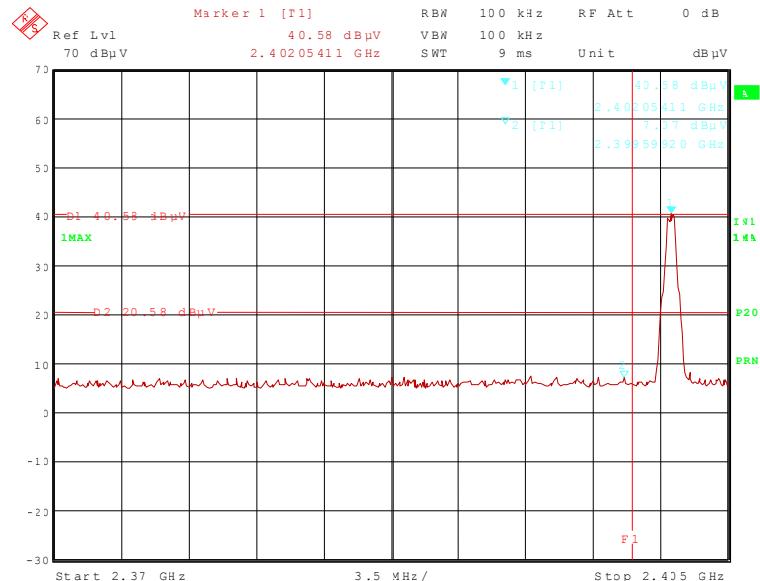

113324_73.wmf: Radiated band-edge compliance, lower band edge, hopping on:

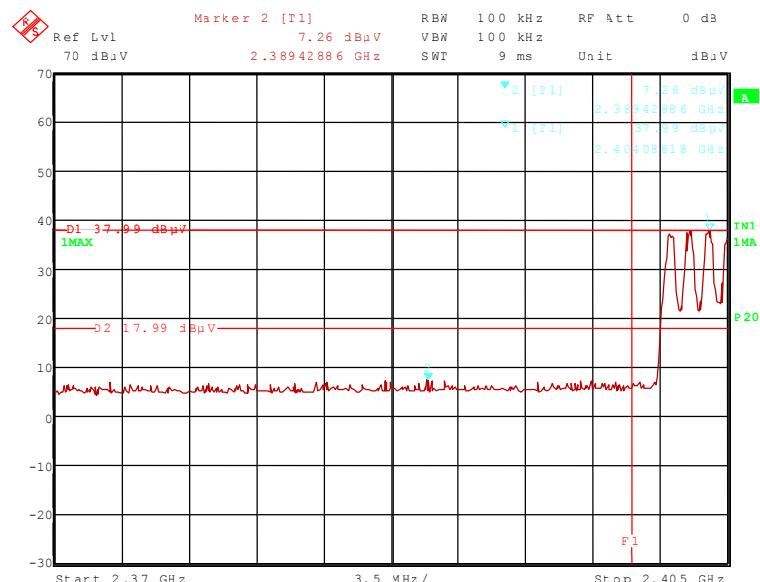

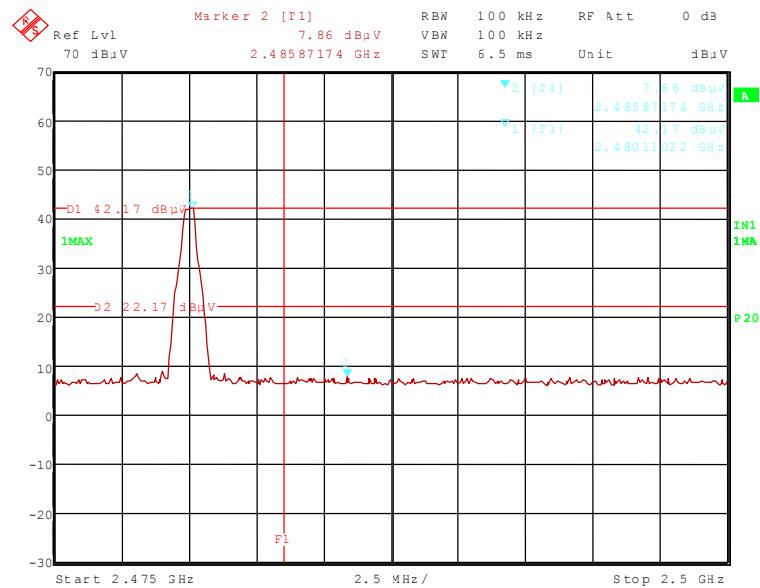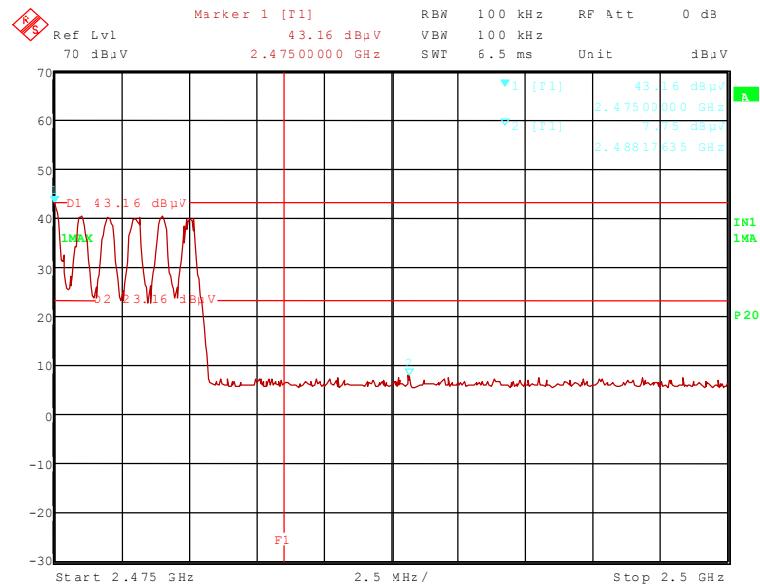113324_74.wmf: Radiated band-edge compliance, upper band edge, hopping off:

113324_75.wmf: Radiated band-edge compliance, upper band edge, hopping on:


The plots on the page before are showing the radiated band-edge compliance for the upper band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (d). The frequency line 1 (F1) shows the edge of the assigned frequency.

Band-edge compliance (lower band edge. hopping disabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	72.0	-	-	40.0	28.3	0.0	3.7	150	Hor.	-
2.39959	38.9	74.0	35.1	6.9	28.3	0.0	3.7	150	Hor.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	38.4	-	-	6.4	28.3	0.0	3.7	150	Vert.	-
2.39959	26.2	54.0	27.8	-5.8	28.3	0.0	3.7	150	Hor.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (lower band edge. hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.404	69.6	-	-	37.6	28.3	0.0	3.7	150	Vert.	-
2389.42	38.3	74.0	35.7	6.3	28.3	0.0	3.7	150	Hor.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.404	35.2	-	-	3.2	28.3	0.0	3.7	150	Vert.	-
2389.42	25.9	54.0	28.1	-6.1	28.3	0.0	3.7	150	Hor.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge, hopping disabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	69.5	-	-	37.2	28.5	0.0	3.8	150	Hor.	-
2.48572	39.1	74.0	34.9	6.8	28.5	0.0	3.8	150	Hor.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	49.1	-	-	16.8	28.5	0.0	3.8	150	Hor.	-
2.48572	26.6	54.0	27.4	-5.7	28.5	0.0	3.8	150	Hor.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge, hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.475	73.8	-	-	41.5	28.5	0.0	3.8	150	Hor.	-
2.48818	39.4	74.0	34.6	7.1	28.5	0.0	3.8	150	Hor.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.475	45.9	-	-	13.6	28.5	0.0	3.8	150	Hor.	-
2.48818	26.6	54.0	27.4	-5.7	28.5	0.0	3.8	150	Hor.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Test result: Passed


TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 43, 44


5.6.3 Test results (Colocation of Bluetooth and 10.57 MHz link)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

113324_91.wmf: Radiated band-edge compliance, colocation, lower band edge, operation mode 5:

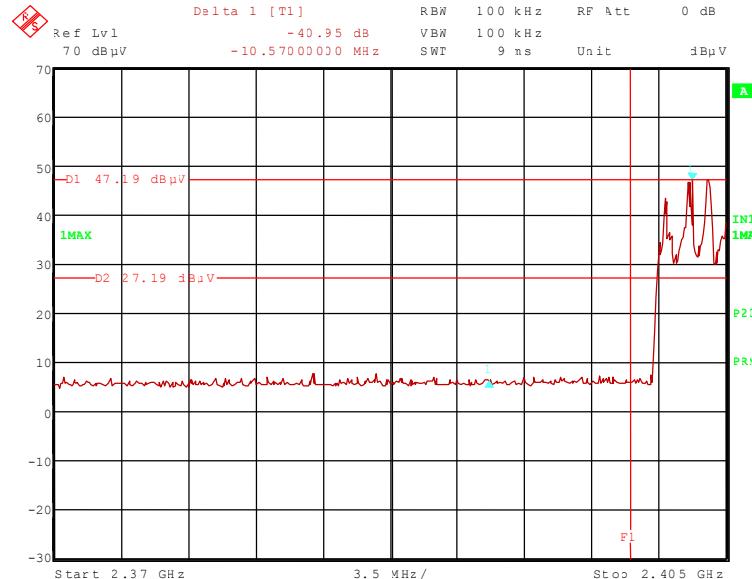

113324_92.wmf: Radiated band-edge compliance, colocation, upper band edge, operation mode 5:

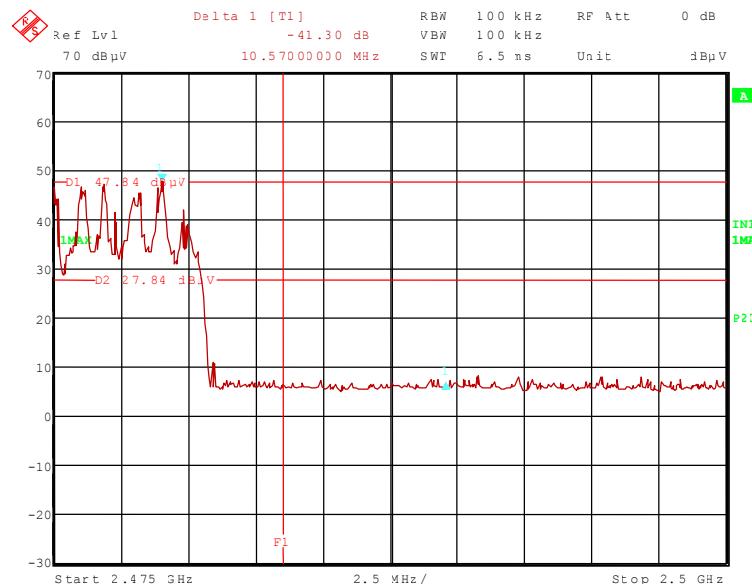

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 43, 44

5.7 Radiated emissions

5.7.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle of the assigned frequency band.


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The setup of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

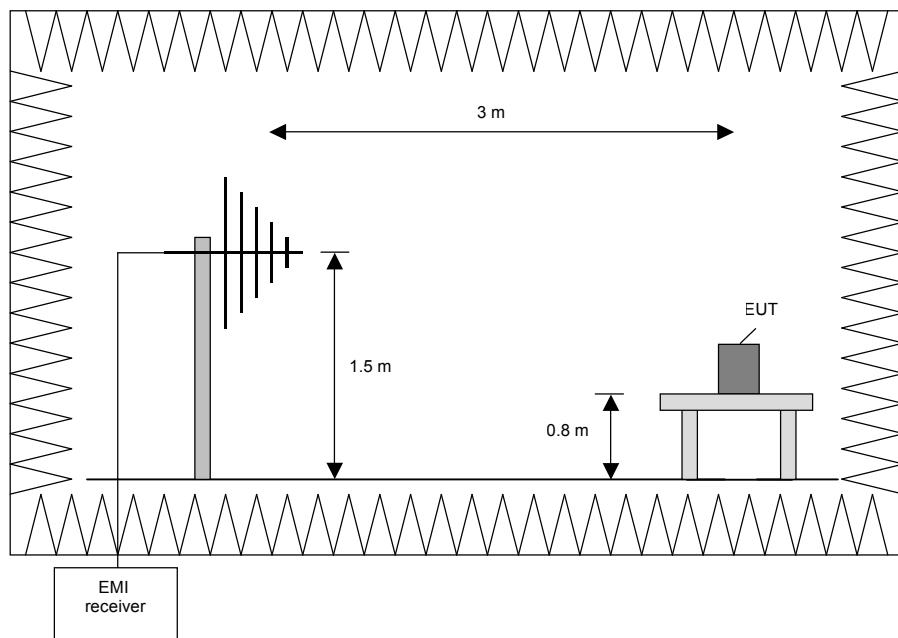

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

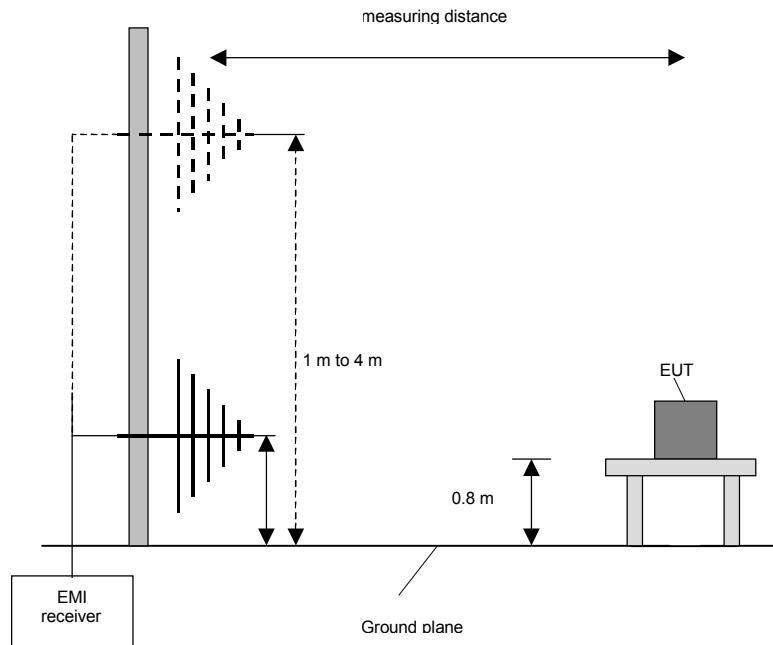

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 110 GHz)


This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The setup of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and then the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz
40 GHz to 60 GHz	100 kHz
50 GHz to 75 GHz	100 kHz
75 GHz to 110 GHz	100 kHz

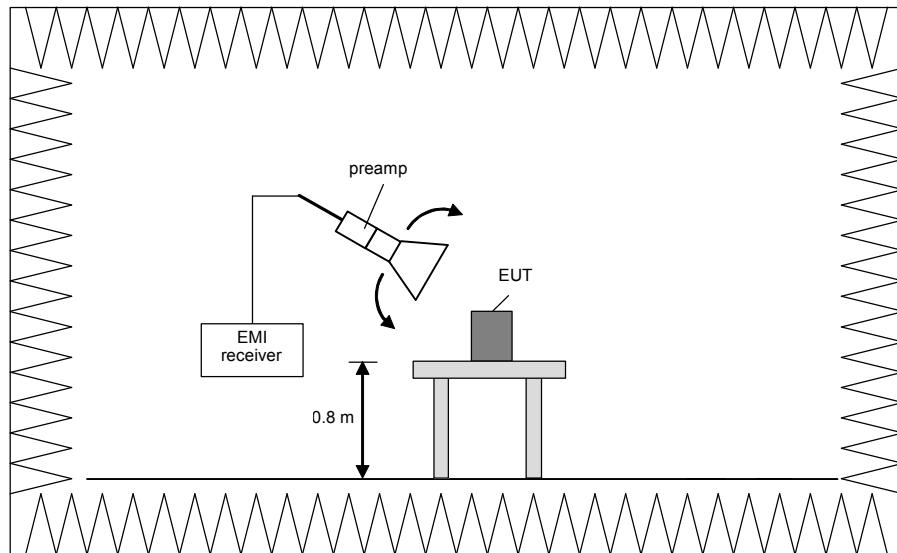


Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

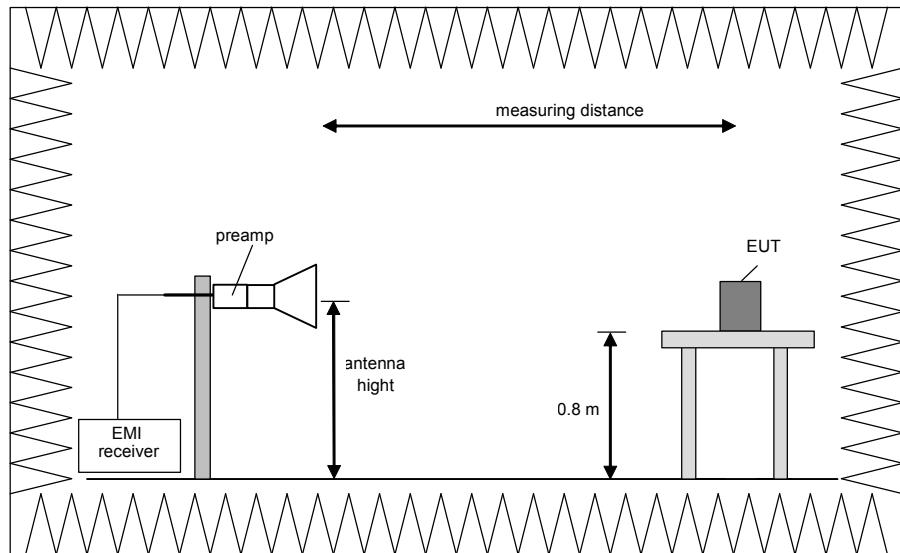

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

5.7.2 Test results (radiated emissions of the Bluetooth part)

5.7.2.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	33 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.



Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was battery supplied with 3.0 V_{DC}.

113324_17.wmf: Spurious emissions from 9 kHz to 150 kHz (operation mode 2):

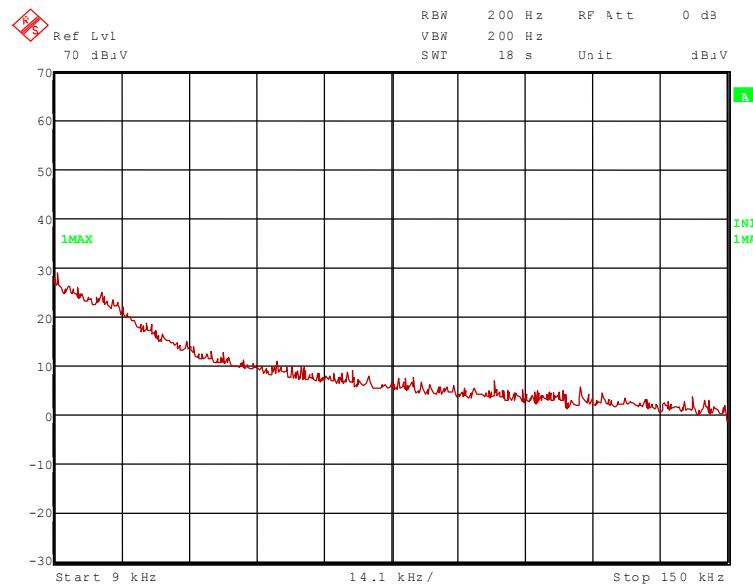


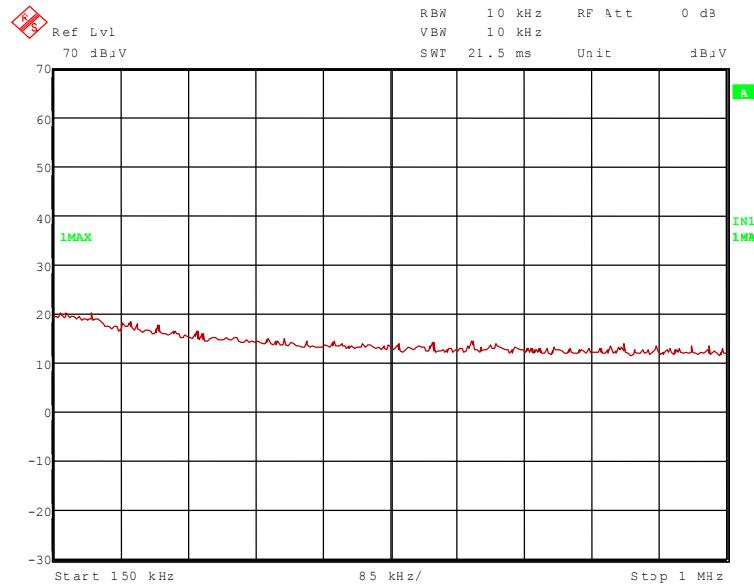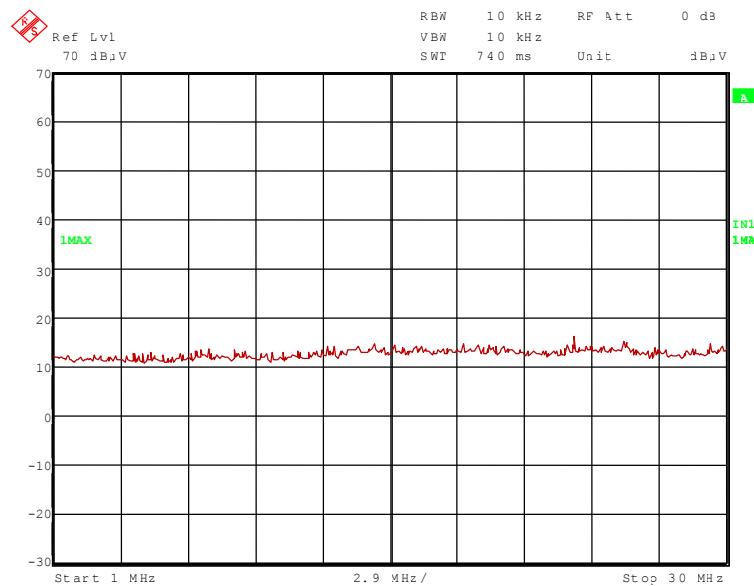113324_18.wmf: Spurious emissions from 150 kHz to 1 MHz (operation mode 2):

113324_19.wmf: Spurious emissions from 1 MHz to 30 MHz (operation mode 2):


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test inside this frequency range, so no measurements were carried out on the outdoor test site.

TEST EQUIPMENT USED FOR THE TEST:

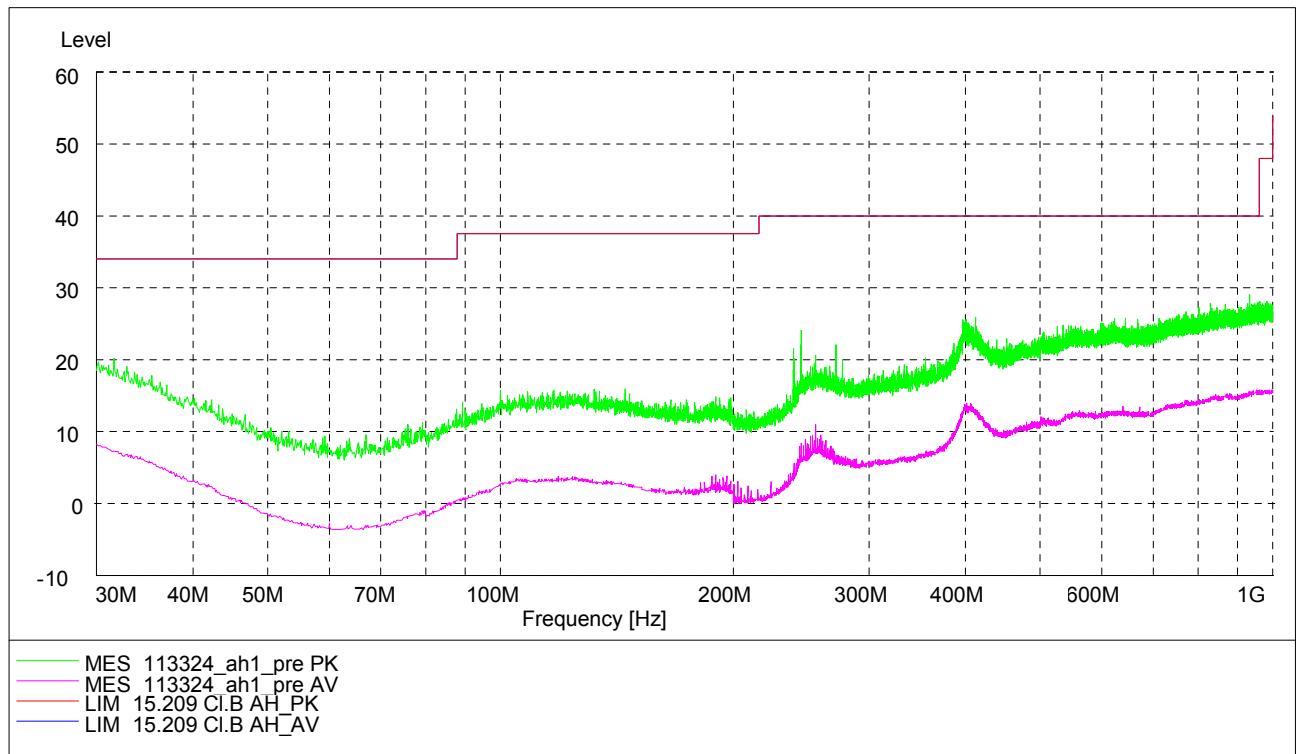29, 31 – 35, 45, 55

Spurious emissions from 30 MHz to 1000 MHz (operation mode 2):


In this case it was not necessary to carry out subsequent measurements because at no frequency was a value above the Qualify limit curve during the preliminary measurements.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 45, 35

5.7.2.2 Preliminary radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.


Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.


Supply voltage: During all measurements the EUT was battery supplied with 3.0 V_{DC}.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)


113324_35.wmf: Spurious emissions from 1 GHz to 4 GHz:

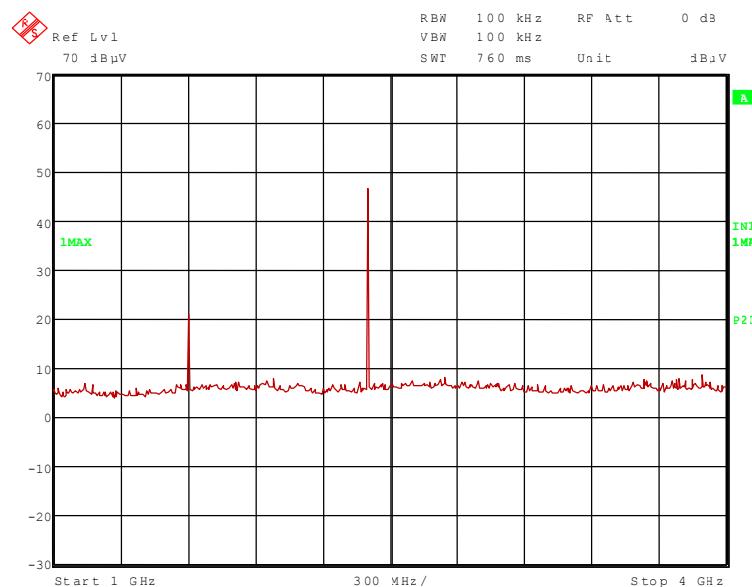


113324_36.wmf: Spurious emissions from 4 GHz to 12 GHz:

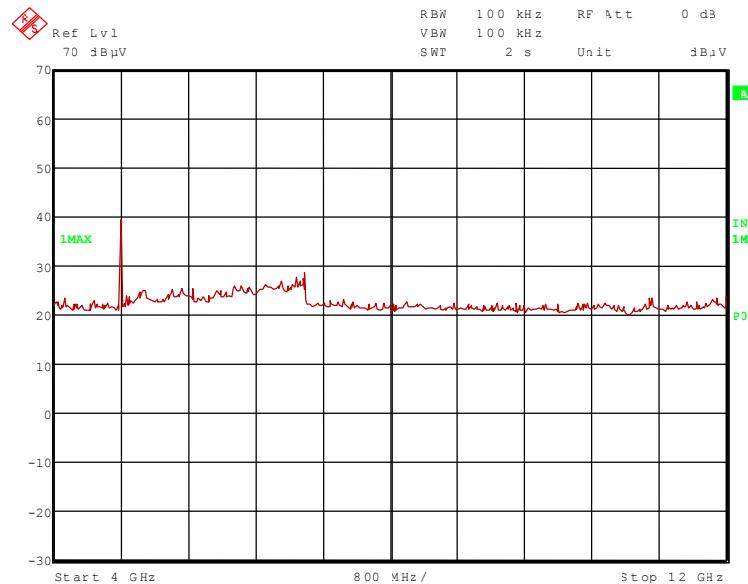

113324_27.wmf: Spurious emissions from 12 GHz to 18 GHz:

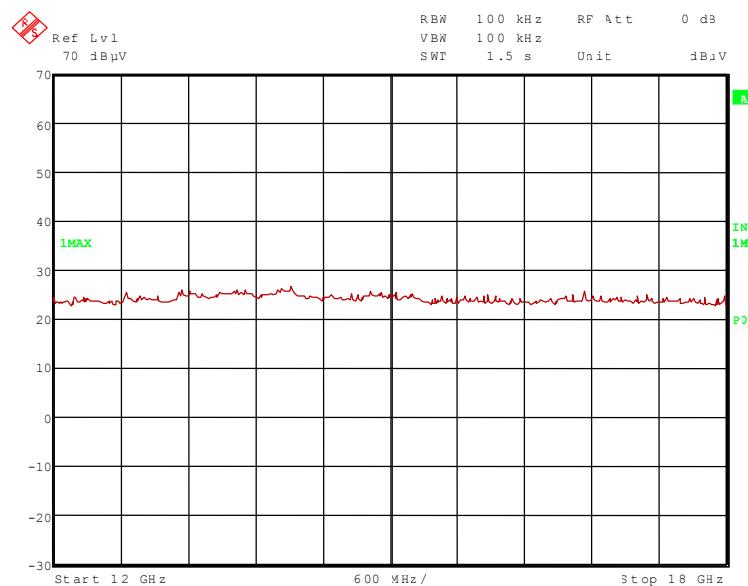

113324_28.wmf: Spurious emissions from 18 GHz to 25 GHz:

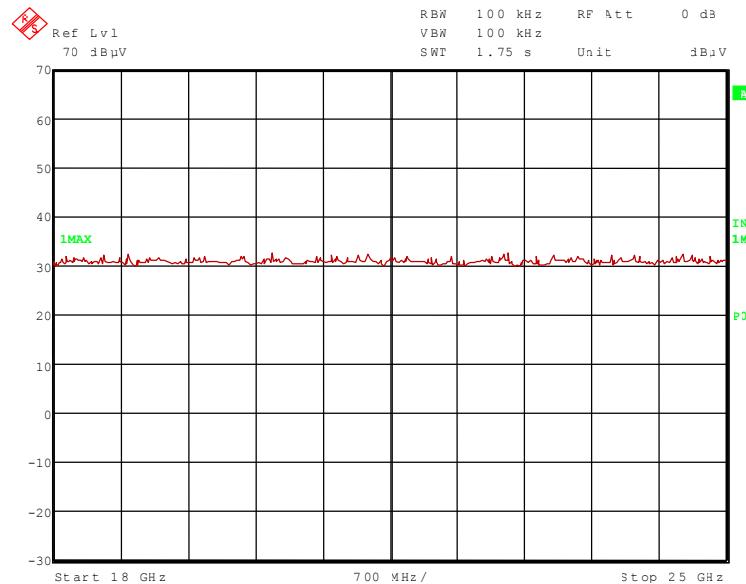

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.804 GHz.


The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.402 GHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.



Transmitter operates on the middle of the assigned frequency band (operation mode 2)

113324_34.wmf: Spurious emissions from 1 GHz to 4 GHz:

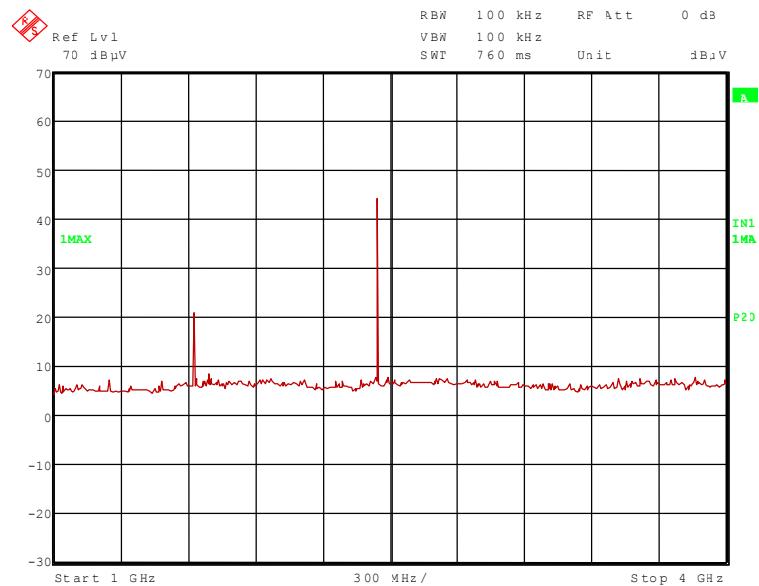

113324_37.wmf: Spurious emissions from 4 GHz to 12 GHz:

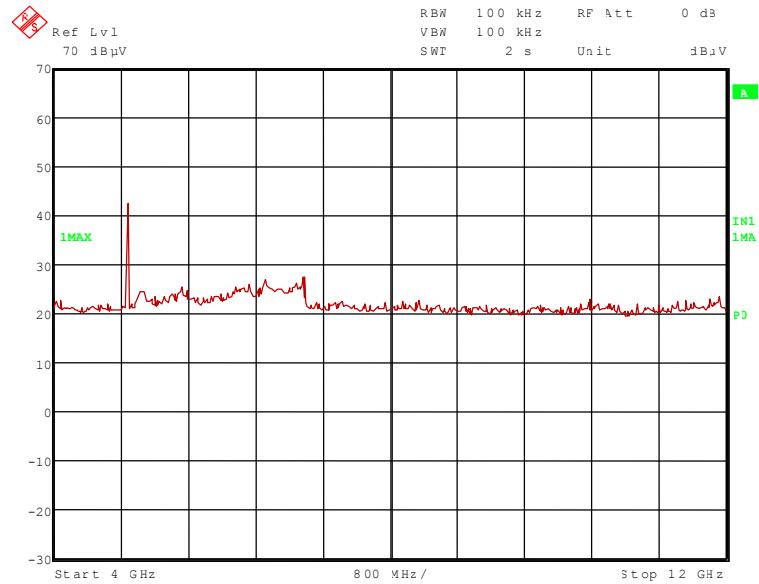

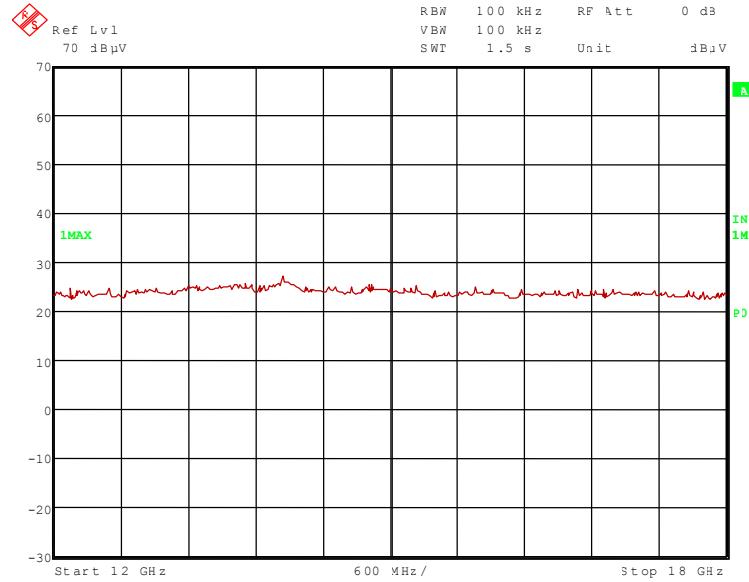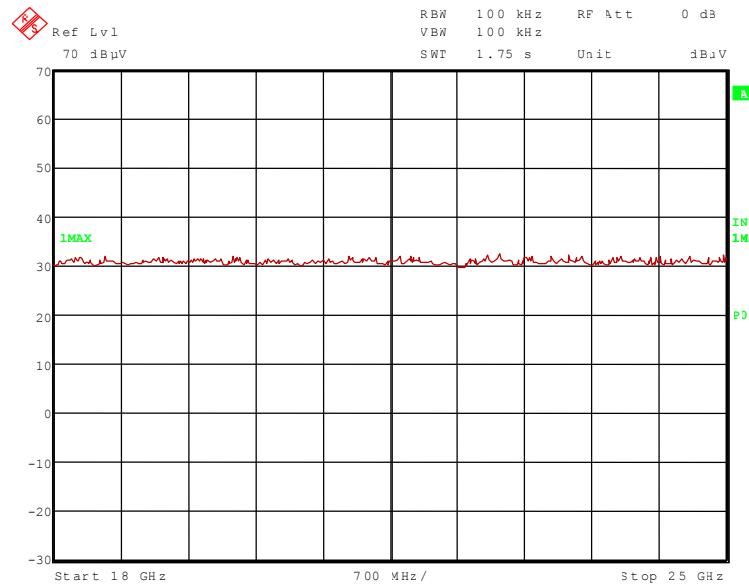113324_30.wmf: Spurious emissions from 12 GHz to 18 GHz:

113324_29.wmf: Spurious emissions from 18 GHz to 25 GHz:


The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.882 GHz.


The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.441 GHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.

Transmitter operates on the upper end of the assigned frequency (operation mode 3)


113324_33.wmf: Spurious emissions from 1 GHz to 4 GHz:

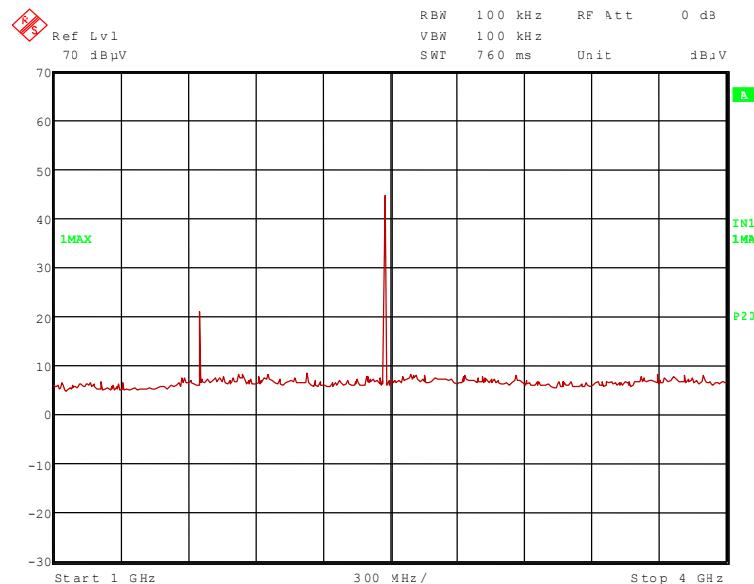


113324_38.wmf: Spurious emissions from 4 GHz to 12 GHz:

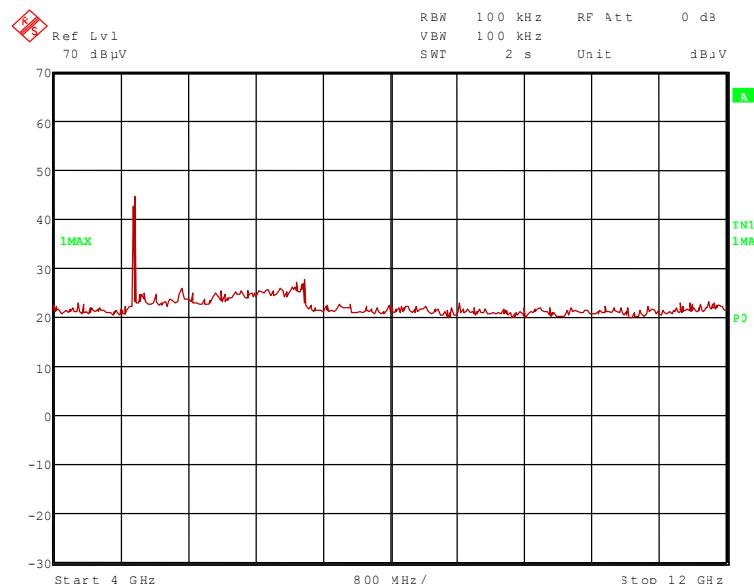

113324_31.wmf: Spurious emissions from 12 GHz to 18 GHz:

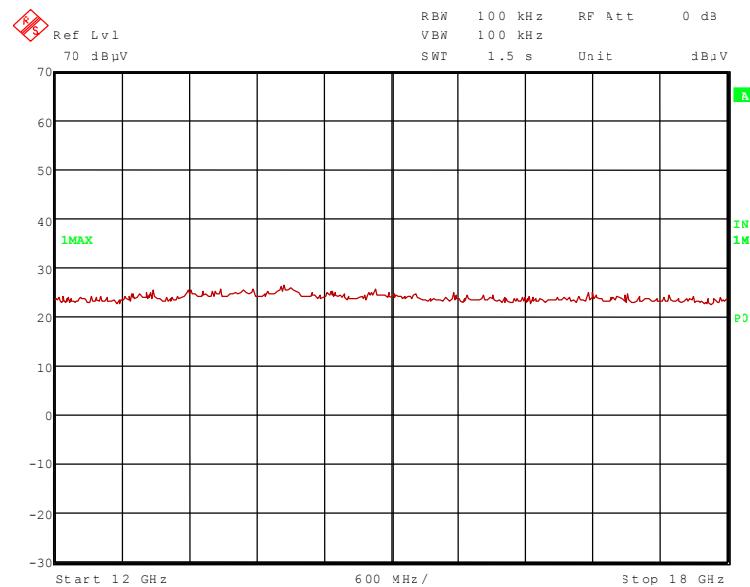

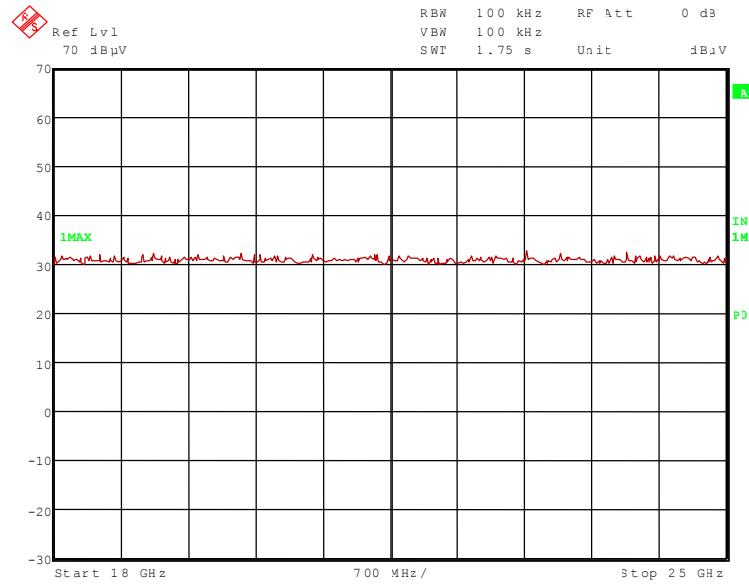113324_32.wmf: Spurious emissions from 18 GHz to 25 GHz:


The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.960 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.480 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 37, 39, 43, 44, 46, 49 – 51, 72

5.7.2.3 Final radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was battery supplied with 3.0 V_{DC}.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	87.7	-	-	55.7	28.3	0.0	3.7	150	Vert.	-
4.804	55.2	74.0	18.8	43.0	32.6	25.7	5.3	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	77.1	-	-	45.1	28.3	0.0	3.7	150	Vert.	-
4.804	42.2	54.0	11.8	30.0	32.6	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2.441	90.0			57.9	28.4	0.0	3.7	150	Vert.	-
4.882	54.0	74.0	20.0	41.6	32.8	25.7	5.3	150	Vert.	Yes
Measurement uncertainty									+2.2 dB / -3.6 dB	

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.441	79.5	-	-	47.4	28.4	0.0	3.7	150	Vert.	-
4.882	40.4	54.0	13.6	28.0	32.8	25.7	5.3	150	Hor.	Yes
Measurement uncertainty									+2.2 dB / -3.6 dB	

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	89.1	-	-	56.8	28.5	0.0	3.8	150	Vert.	-
4.960	51.1	74.0	22.9	38.5	32.9	25.6	5.3	150	Vert.	Yes
Measurement uncertainty									+2.2 dB / -3.6 dB	

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	78.6	-	-	46.3	28.5	0.0	3.8	150	Vert.	-
4.960	35.9	54.0	18.1	23.3	32.9	25.6	5.3	150	Hor.	Yes
Measurement uncertainty									+2.2 dB / -3.6 dB	

Test result: Passed


TEST EQUIPMENT USED FOR THE TEST:
29, 31 – 34, 36, 37, 39, 43, 44, 46, 49 - 51, 72

5.7.3 Test results (radiated emissions of colocation of Bluetooth and 10.57 MHz link)


5.7.3.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)



Ambient temperature	20 °C	Relative humidity	33 %
---------------------	-------	-------------------	------

113324_65.wmf: Spurious emissions from 9 kHz to 150 kHz:

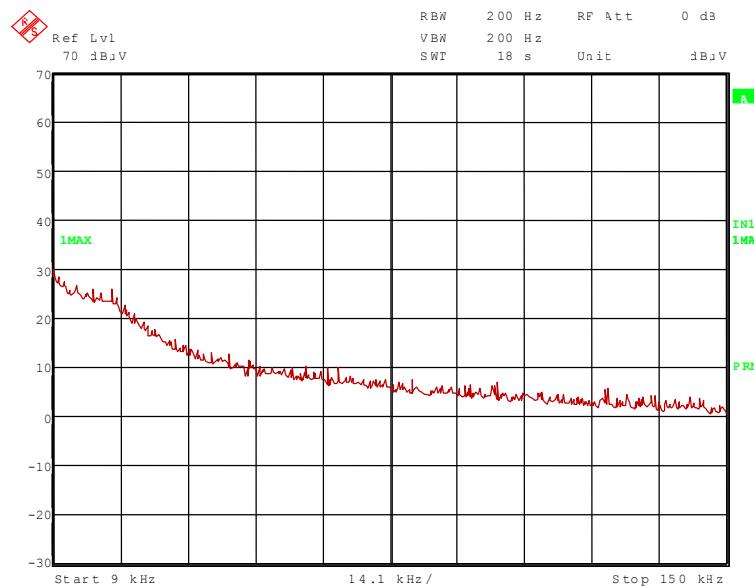

113324_66.wmf: Spurious emissions from 150 kHz to 1 MHz

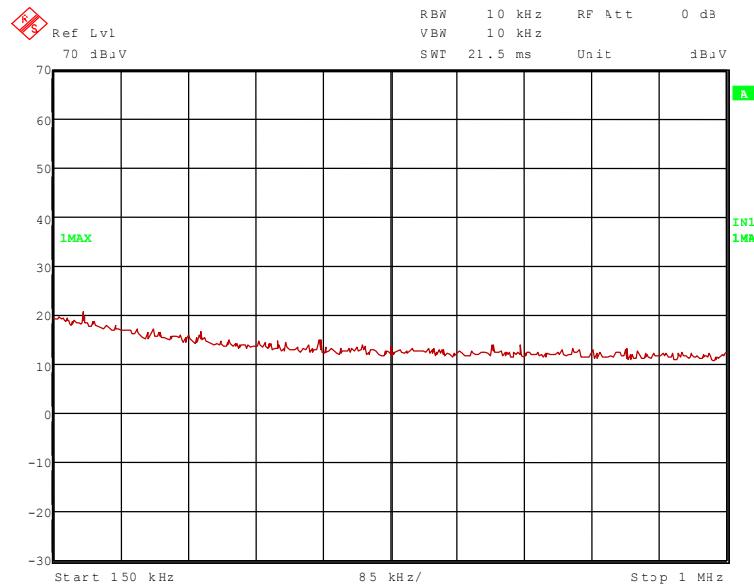


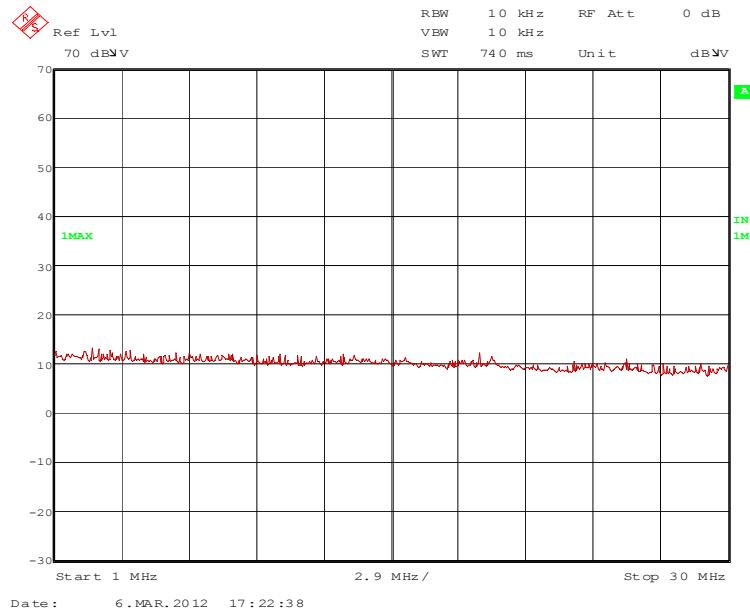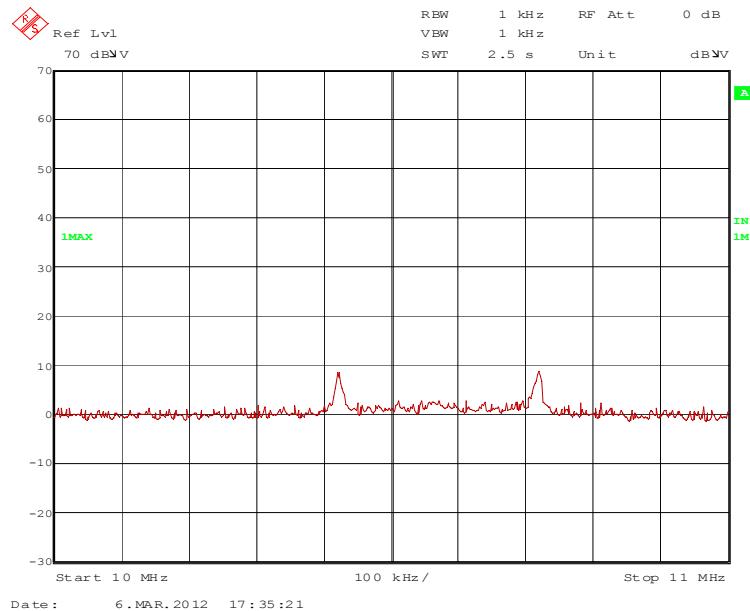113324_67.wmf: Spurious emissions from 1 MHz to 30 MHz

113324_68.wmf: Spurious emissions from 10 MHz to 11 MHz


The centre frequency of the transmitter was found at 10.57 MHz. It had to be measured on the outdoor test site. The results are shown in clause 5.7.3.2.

TEST EQUIPMENT USED FOR THE TEST:

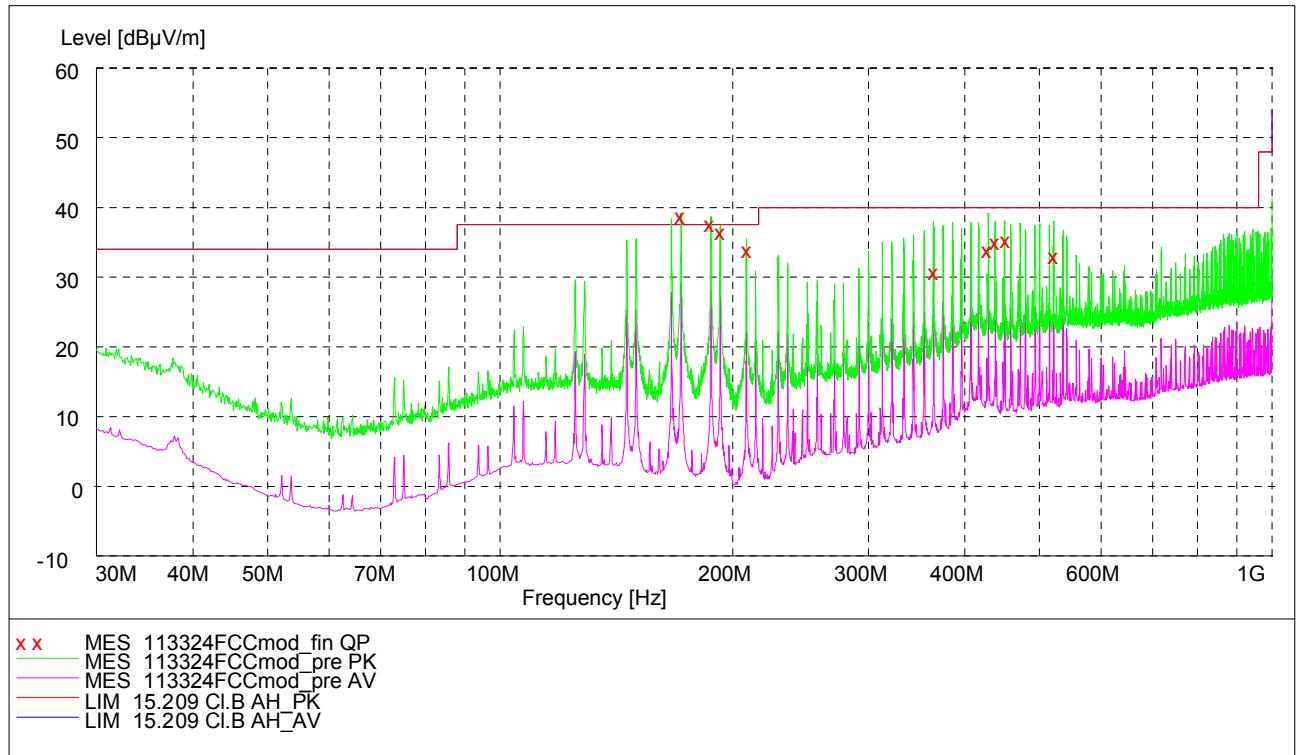29, 31 – 34, 45, 55

Spurious emissions from 30 MHz to 1000 MHz


Result measured with the quasipeak detector (marked by an x):

Frequency MHz	Level dB μ V/m	Transducer dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
171.492000	39.30	10.0	37.5	-1.8	150.0	180.00	HORIZONTAL
187.548000	38.30	9.8	37.5	-0.7	150.0	176.00	HORIZONTAL
192.876000	37.10	9.7	37.5	0.4	150.0	179.00	HORIZONTAL
208.332000	34.20	9.5	37.5	3.3	150.0	172.00	HORIZONTAL
364.444000	31.40	16.0	40.0	8.6	150.0	135.00	HORIZONTAL
428.656000	34.40	18.0	40.0	5.6	150.0	177.00	HORIZONTAL
437.560000	35.50	17.9	40.0	4.5	150.0	45.00	HORIZONTAL
450.232000	35.70	18.0	40.0	4.3	150.0	51.00	HORIZONTAL
521.128000	33.70	19.1	40.0	6.3	150.0	45.00	HORIZONTAL

In this case it was necessary to carry out subsequent measurements on the open area test site. The results are shown in the following clause 5.7.3.2.

TEST EQUIPMENT USED FOR THE TEST:

20, 29, 31 – 35, 45

5.7.3.2 Final radiated emission test (9 kHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	40 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was battery supplied with 3.0 V_{DC}.

Frequency	Measured transmitter field strength at 3 m	Extrapolated field strength to 30 m
10.57 MHz	38 dB μ V/m (79.43 μ V/m)	-2 dB μ V/m (0.79 μ V/m)
Measurement uncertainty	+2.2 dB / -3.6 dB	

Limit:
30 μ V/m @ 30 m extrapolated with 40 dB/Dec. according to 15.31 (f)(2)

Test result: Passed.

TEST EQUIPMENT USED FOR THE TEST:
55, 73

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.


Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was battery supplied with 3.0 V_{DC}.

Test results: The test results were calculated with the following formula:

Result [dB μ V/m] = reading [dB μ V] + cable loss [dB] + antenna factor [dB/m]

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

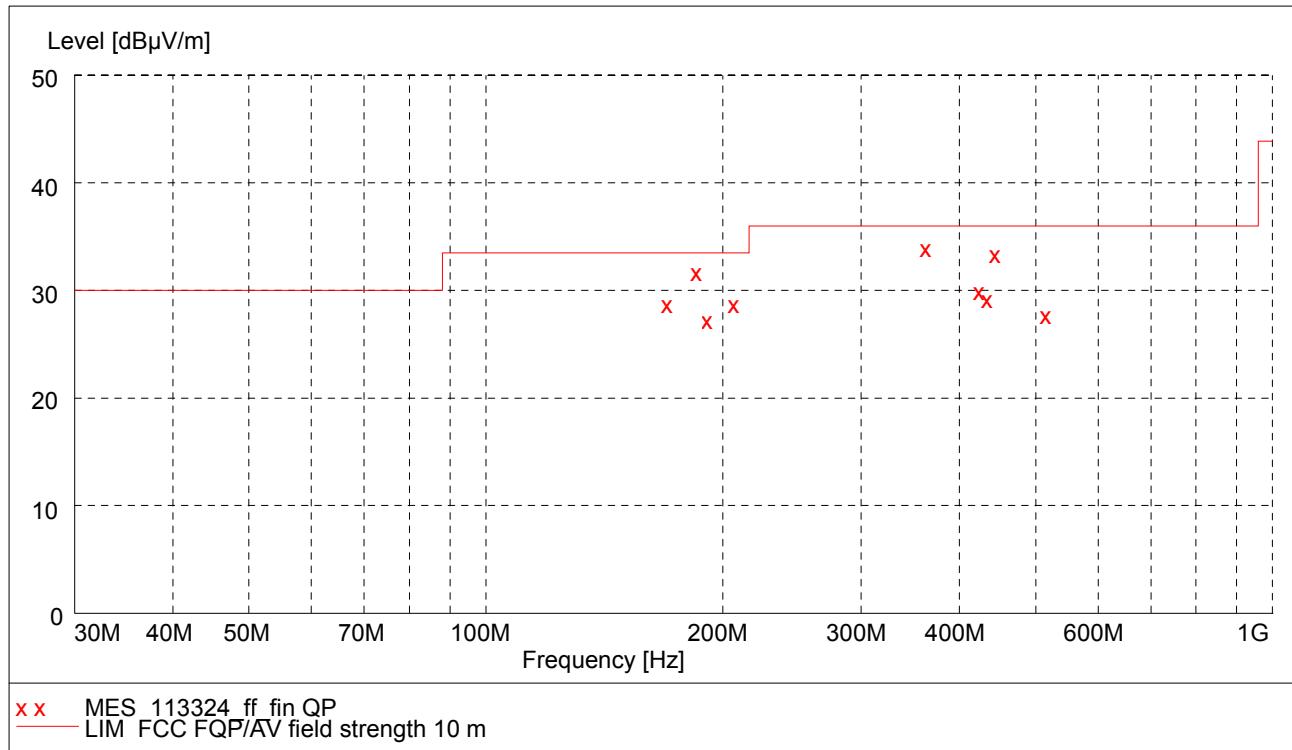

Result measured with the quasipeak detector (marked by an x):

Frequency MHz	Level dB μ V/m	Transducer dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
171.492000	29.00	12.9	33.5	4.5	347.0	2.00	HORIZONTAL
187.548000	31.90	11.9	33.5	1.6	375.0	21.00	HORIZONTAL
192.876000	27.60	11.8	33.5	5.9	350.0	46.00	HORIZONTAL
208.332000	29.00	12.0	33.5	4.5	400.0	10.00	HORIZONTAL
364.444000	34.10	18.3	36.0	1.9	155.0	175.00	HORIZONTAL
428.656000	30.30	20.5	36.0	5.7	275.0	16.00	HORIZONTAL
437.560000	29.50	20.6	36.0	6.5	278.0	16.00	HORIZONTAL
450.232000	33.80	21.0	36.0	2.2	146.0	45.00	HORIZONTAL
521.128000	28.00	22.3	36.0	8.0	155.0	181.00	HORIZONTAL

Test result: Passed.

TEST EQUIPMENT USED FOR THE TEST:

14 - 20

5.7.3.3 Preliminary radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.


Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.


Supply voltage: During all measurements the EUT was supplied with 3.0 V_{DC}.

Continuous audio streaming via Bluetooth and 10.57 MHz link to hearing aid (operation mode 5)


113324_90.wmf: Spurious emissions from 1 GHz to 4 GHz

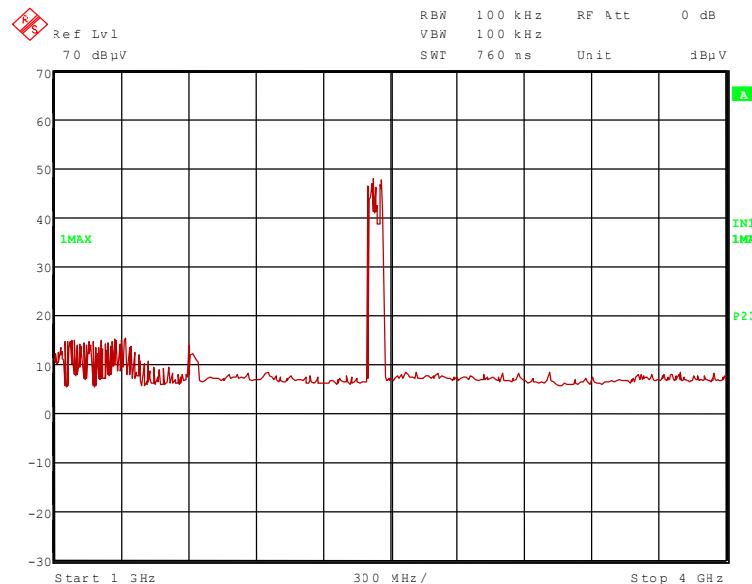


113324_64.wmf: Spurious emissions from 4 GHz to 12 GHz:

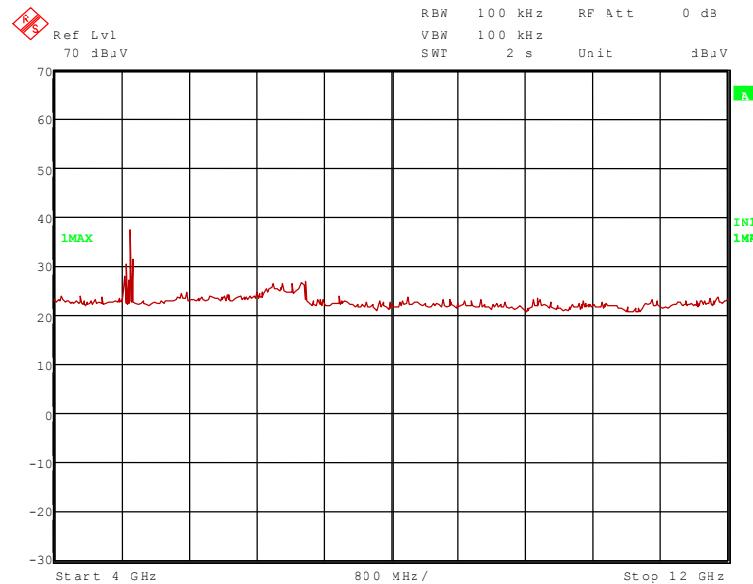

113324_70.wmf: Spurious emissions from 12 GHz to 18 GHz:

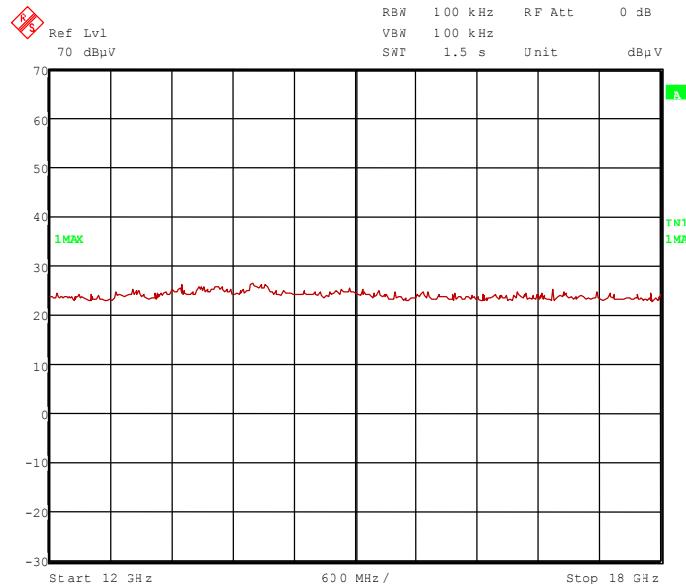

113324_71.wmf: Spurious emissions from 18 GHz to 25 GHz:

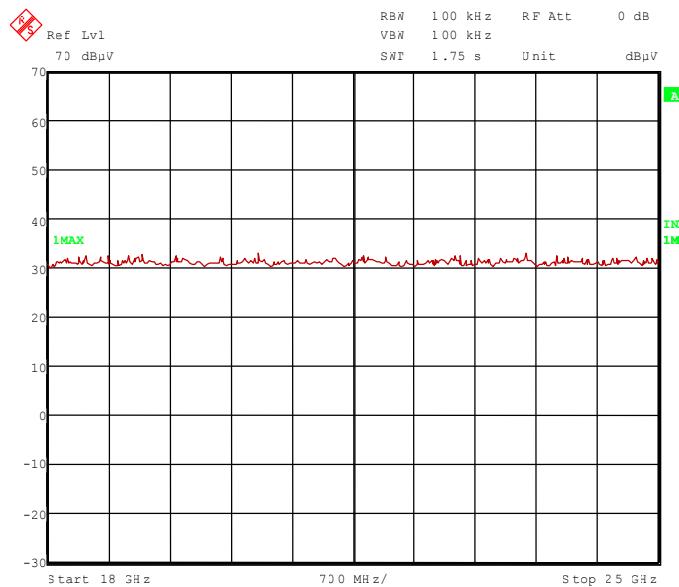

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 37, 39, 43, 44, 46, 49 - 51, 72

5.7.3.4 Final radiated emission measurement (1 GHz to 25 GHz)

The peaks around 2.4 GHz are caused by the Bluetooth operation, for detailed measurement results please refer to clause 5.7.2.

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3.0 V_{DC}.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Colocation of Bluetooth and 10.57 MHz link (operation mode 5)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.425*	81.1	-	-	49.0	28.4	0.0	3.7	150	Vert.	-
1.08277	43.4	74.0	30.6	16.6	24.4	0.0	2.4	150	Hor.	Yes
1.13607	42.8	74.0	31.2	15.7	24.6	0.0	2.5	150	Hor.	Yes
1.28196	43.5	74.0	30.5	15.8	25.0	0.0	2.7	150	Hor.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

* Fundamental of Bluetooth

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.425*	73.1	-	-	41.0	28.4	0.0	3.7	150	Vert.	-
1.08277	30.0	54.0	24.0	3.2	24.4	0.0	2.4	150	Hor.	Yes
1.13607	29.9	54.0	24.1	2.8	24.6	0.0	2.5	150	Hor.	Yes
1.28196	29.6	54.0	24.4	1.9	25.0	0.0	2.7	150	Hor.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

* Fundamental of Bluetooth

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:
29, 31 – 34, 36, 37, 39, 43, 44, 46, 49 - 51, 72

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	03/15/2010	03/2012
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 D	Chase	25761	480894	08/09/2011	09/2013
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
30	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	04/15/2010	04/2012
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	03/17/2010	03/2012
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	04/21/2011	04/2013
36	Antenna	3115	EMCO	9609-4918	480183	11/09/2011	11/2013
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294	Six month verification (system cal.)	
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297	Six month verification (system cal.)	
43	RF-cable No. 3	RTK 081	Rosenberger	-	481330	Weekly verification (system cal.)	
44	RF-cable No. 40	RTK 081	Rosenberger	-	480670	Weekly verification (system cal.)	
45	RF-cable No. 36	RTK 081	Rosenberger	-	410571	Weekly verification (system cal.)	
46	RF-cable 1 m	KPS-1533-400-KPS	Insulated Wire	-	480301	Six month verification (system cal.)	
49	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
50	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343	Six month verification (system cal.)	
51	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342	Six month verification (system cal.)	
55	Antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	03/10/2010	03/2012
72	4 GHz High Pass Filter	WHKX4.0/18 G-8SS	Wainwright Instruments	1	480587	Weekly verification (system cal.)	
73	Measuring receiver	ESPC	Rohde & Schwarz	843756/006	480150	02/09/2012	02/2014

7 REPORT HISTORY

Report Number	Date	Comment
F113324E3	16 March 2012	Document created

8 LIST OF ANNEXES

ANNEX A	TEST SETUP PHOTOS	8 pages
113324_09.jpg	Test set-up fully anechoic chamber	
113324_10.jpg	Test set-up fully anechoic chamber	
113324_08.jpg	Test set-up fully anechoic chamber	
113324_13.jpg	Test set-up fully anechoic chamber	
113324_12.jpg	Test set-up fully anechoic chamber	
113324_11.jpg	Test set-up fully anechoic chamber	
113324_32.jpg	Test set-up open area test site	
113324_33.jpg	Test set-up outdoor test site	
ANNEX B	EXTERNAL PHOTOS	5 pages
113324_34.jpg	multistreamer (with connected loop antenna), 3D view	
113324_35.jpg	multistreamer, 3D view 1	
113324_36.jpg	multistreamer, 3D view 2	
113324_41.jpg	multistreamer, battery cover removed, label	
113324_40.jpg	multistreamer, ferrite core at loop antenna, detail view	
ANNEX C	INTERNAL PHOTOS	4 pages
113324_38.jpg	multistreamer, PCB top view	
113324_37.jpg	multistreamer, PCB top view	
113324_39.jpg	multistreamer, detail view to Bluetooth module	
113324_31.jpg	multistreamer, internal view with temporary antenna and USB connectors	