


EUT – Front View

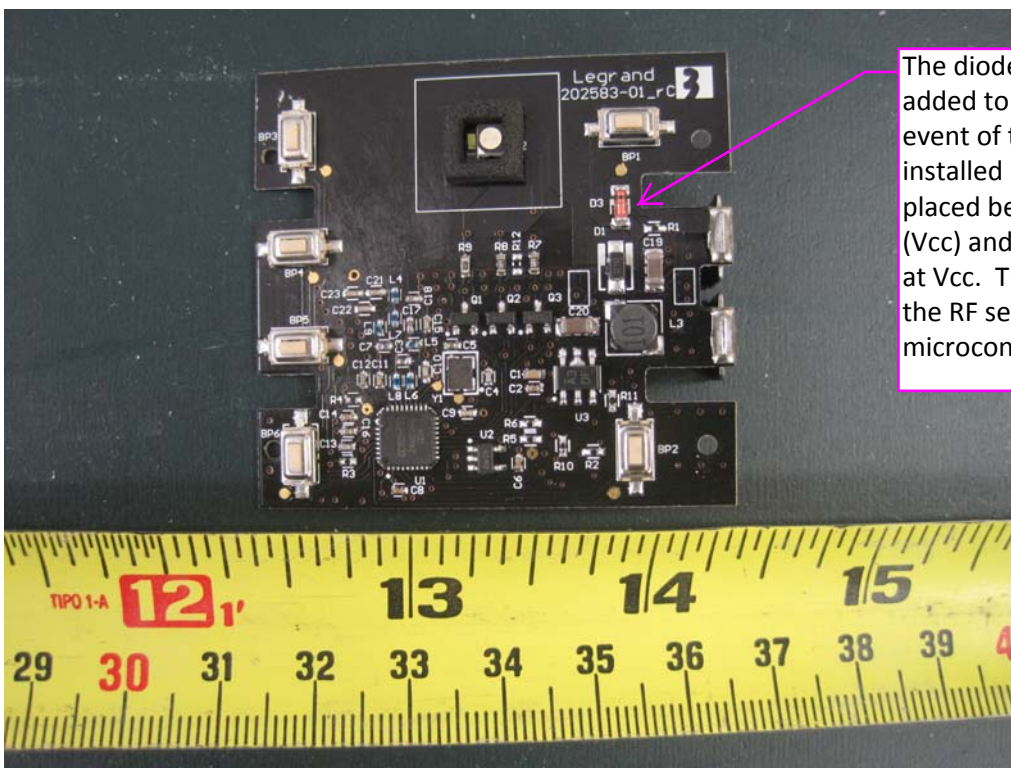

The diode pointed out here was added to protect the circuit in the event of the batteries being installed backwards. The diode is placed between battery voltage (Vcc) and ground with it's cathode at Vcc. There were no changes to the RF section or the microcontroller circuitry

EUT – Back View