



SK TECH CO., LTD.

Page 1 of 30

# TEST REPORT

|  |  |                         |                 |
|--|--|-------------------------|-----------------|
| <b>Test Report No.:</b>                                | <b>SKTRFC-101012-012</b>   |                         |                 |
| <b>Applicant:</b>                                      | <b>Tritech Technology AB</b>   |                         |                 |
| <b>Applicant Address:</b>                              | Box 1094, SE-172 22 Sundbyberg, Sweden   |                         |                 |
| <b>Manufacturer:</b>                                   | <b>Tritech Technology AB</b>   |                         |                 |
| <b>Manufacturer Address:</b>                           | Box 1094, SE-172 22 Sundbyberg, Sweden   |                         |                 |
| <b>Device Under Test:</b>                              | <b>TriBee USB</b>  |                         |                 |
| <b>FCC ID:</b><br><b>IC:</b>                           | <b>YVB-200300</b><br><b>9276A-200300</b>   | <b>Model Name:</b>      | <b>200300</b>   |
| <b>Brand/Trade Name:</b>                               | <b>TriBee</b>  |                         |                 |
| <b>Receipt No.:</b>                                    | <b>SKTEU10-1082</b>  | <b>Date of receipt:</b> | October 5, 2010 |
| <b>Date of Issue:</b>                                  | October 12, 2010   |                         |                 |
| <b>Location of Testing:</b>                            | <b>SK TECH CO., LTD.</b><br>#820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea |                         |                 |
| <b>Test Procedure:</b>                                 | <b>ANSI C63.4-2003</b>   |                         |                 |
| <b>Test Specification:</b>                             | <b>47CFR, FCC Part 15 Rules,<br/>RSS-210 Issue 7 (June 2007)</b>                                       |                         |                 |
| <b>FCC Equipment Class:<br/>IC Equipment Category:</b> | <b>DTS - Part 15 Digital Transmission System<br/>RSS-210 Issue 7 – Category I Equipment, Annex 8</b>   |                         |                 |
| <b>Test Result:</b>                                    | The above-mentioned device has been tested and passed.   |                         |                 |

Tested &amp; Reported by: Jungtae Kim

Approved by: Jongsoo Yoon

October 12, 2010

Signature

Date

October 12, 2010

Signature

Date

|                       |  |
|-----------------------|--|
| <b>Other Aspects:</b> | -  |
| <b>Abbreviations:</b> | · OK, Pass = passed · Fail = failed · N/A = not applicable |



- This test report is not permitted to copy partly and entirely without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of submitted samples of the above mentioned.

**>> CONTENTS <<**

|   |    |
|---|----|
| <b>1. GENERAL</b>   | 4  |
| <b>2. TEST SITE</b>   | 4  |
| 2.1 Location  | 4  |
| 2.2 List of Test and Measurement Instruments                        | 5  |
| 2.3 Test Date   | 5  |
| 2.4 Test Environment  | 5  |
| <b>3. DESCRIPTION OF THE EQUIPMENT UNDER TEST</b>                   | 6  |
| 3.1 Rating and Physical Characteristics                             | 6  |
| 3.2 Equipment Modifications   | 6  |
| 3.3 Submitted Documents   | 6  |
| <b>4. MEASUREMENT CONDITIONS</b>                                    | 7  |
| 4.1 Description of test configuration                               | 7  |
| 4.2 List of Peripherals   | 7  |
| 4.3 Type of Used Cables   | 7  |
| 4.4 Uncertainty   | 7  |
| <b>5. TEST AND MEASUREMENTS</b>                                     | 8  |
| <b>5.1 ANTENNA REQUIREMENT</b>                                      | 8  |
| 5.1.1 Regulation  | 8  |
| 5.1.2 Result  | 8  |
| <b>5.2 6dB BANDWIDTH</b>  | 9  |
| 5.2.1 Regulation  | 9  |
| 5.2.2 Test Procedure  | 9  |
| 5.2.3 Test Results  | 9  |
| Table 1: Measured values of the 6dB Bandwidth                       | 9  |
| Figure 1: Plot of the 6dB Bandwidth                                 | 10 |
| Figure 2: Plot of the Occupied Bandwidth (99%)                      | 10 |
| <b>5.3 MAXIMUM PEAK OUTPUT POWER</b>                                | 11 |
| 5.3.1 Regulation  | 11 |
| 5.3.2 Test Procedure  | 11 |
| 5.3.3 Test Results  | 11 |
| Table 2: Measured values of the Maximum Peak Conducted Output Power | 11 |
| Figure 3: Plot of the Maximum Peak Conducted Output Power           | 12 |



|  |           |
|--|-----------|
| <b>5.4 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS</b>                  | <b>13</b> |
| 5.4.1 Regulation   | 13        |
| 5.4.2 Test Procedure   | 13        |
| 5.4.3 Test Results   | 15        |
| Table 3: Measured values of the field strength of spurious emission (Radiated) | 15        |
| Figure 4: Plot of the Band Edge (Conducted)                                    | 18        |
| Figure 5: Plot of the Band Edge (Radiated)                                     | 19        |
| Figure 6: Plot of the Spurious RF conducted emission                           | 20        |
| Figure 7: Emission plot for the preliminary radiated measurements              | 21        |
| <b>5.5 PEAK POWER SPECTRAL DENSITY</b>   | <b>23</b> |
| 5.5.1 Regulation   | 23        |
| 5.5.2 Test Procedure   | 23        |
| 5.5.3 Test Results   | 23        |
| Table 4: Measured values of the Peak Power Spectral Density                    | 23        |
| Figure 8: Plot of the Peak Power Spectral Density                              | 24        |
| <b>5.6 AC POWER LINE CONDUCTED EMISSIONS</b>                                   | <b>25</b> |
| 5.6.1 Regulation   | 25        |
| 5.6.2 Test Procedure   | 25        |
| 5.6.3 Test Results   | 26        |
| Table 5: Measured values of the AC Power Line Conducted Emissions              | 26        |
| Figure 9: Plot of the AC Power Line Conducted Emissions                        | 27        |
| <b>5.7 Receiver Spurious Emissions</b>   | <b>28</b> |
| 5.1.1 Regulation   | 28        |
| 5.2.2 Test Results   | 28        |
| Table 6: Receiver Spurious Emissions (Radiated)                                | 28        |
| <b>5.8 RF EXPOSURE</b>   | <b>30</b> |
| 5.8.1 Regulation   | 30        |
| 5.8.2 RF Exposure Compliance Issue   | 30        |



## 1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247 for Digital Transmission System and RSS-210 Issue 7 – Category I Equipment, Annex 8. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## 2. TEST SITE

SK TECH Co., Ltd.

### 2.1 Location

820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea

(FCC Registered Test Site Number: 90752)

(OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 5429A)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body (CAB) for CAB's Designation Number: KR0007 by FCC, is accredited by NVLAP for NVLAP Lab. Code: 200220-0.



## 2.2 List of Test and Measurement Instruments

| No. | Description                          | Manufacturer  | Model No.     | Serial No.  | Calibrated until | Used                                |
|-----|--------------------------------------|---------------|---------------|-------------|------------------|-------------------------------------|
| 1   | Spectrum Analyzer                    | Agilent       | E4405B        | US40520856  | 2011.05          |                                     |
| 2   | EMC Spectrum Analyzer                | Agilent       | E7405A        | US40240203  | 2011.03          |                                     |
| 3   | EMI Test Receiver                    | Rohde&Schwarz | ESIB40        | 100277      | 2011.03          | <input checked="" type="checkbox"/> |
| 4   | EMI Test Receiver                    | Rohde&Schwarz | ESHS10        | 862970/019  | 2011.07          | <input checked="" type="checkbox"/> |
| 5   | Artificial Mains Network             | Rohde&Schwarz | ESH3-Z5       | 836679/018  | 2011.07          | <input checked="" type="checkbox"/> |
| 6   | Pre-amplifier                        | HP            | 8447F         | 3113A05153  | 2011.07          | <input checked="" type="checkbox"/> |
| 7   | Pre-amplifier                        | MITEQ         | AFS44         | 1116321     | 2010.12          |                                     |
| 8   | Pre-amplifier                        | MITEQ         | AFS44         | 1116322     | 2011.07          | <input checked="" type="checkbox"/> |
| 9   | Power Meter                          | Agilent       | E4417A        | MY45100426  | 2011.07          | <input checked="" type="checkbox"/> |
| 10  | Power Meter                          | Agilent       | E4418B        | US39402176  | 2011.07          |                                     |
| 11  | Power Sensor                         | Agilent       | E9327A        | MY44420696  | 2011.07          | <input checked="" type="checkbox"/> |
| 12  | Power Sensor                         | Agilent       | 8482A         | MY41094094  | 2011.07          |                                     |
| 13  | Attenuator (10dB)                    | HP            | 8491B         | 38067       | 2011.07          | <input checked="" type="checkbox"/> |
| 14  | Attenuator (20dB)                    | Weinschel     | 44            | AH6967      | 2011.07          |                                     |
| 15  | High Pass Filter                     | Wainwright    | WHKX3.0/18G   | 8           | 2011.07          | <input checked="" type="checkbox"/> |
| 16  | VHF Precision Dipole Antenna (TX/RX) | Schwarzbeck   | VHAP          | 1014 / 1015 | 2011.05          |                                     |
| 17  | UHF Precision Dipole Antenna (TX/RX) | Schwarzbeck   | UHAP          | 989 / 990   | 2011.05          |                                     |
| 18  | Loop Antenna                         | Schwarzbeck   | HFH2-Z2       | 863048/019  | 2010.11          | <input checked="" type="checkbox"/> |
| 19  | TRILOG Broadband Antenna             | Schwarzbeck   | VULB9168      | 230         | 2011.07          | <input checked="" type="checkbox"/> |
| 20  | TRILOG Broadband Antenna             | Schwarzbeck   | VULB9168      | 189         | 2011.05          |                                     |
| 21  | Horn Antenna                         | AH Systems    | SAS-200/571   | 304         | N/A              |                                     |
| 22  | Horn Antenna                         | EMCO          | 3115          | 00040723    | 2011.04          | <input checked="" type="checkbox"/> |
| 23  | Horn Antenna                         | EMCO          | 3115          | 00056768    | 2010.09          |                                     |
| 24  | Horn Antenna                         | Schwarzbeck   | BBHA9170      | BBHA9170318 | 2013.09          | <input checked="" type="checkbox"/> |
| 25  | Vector Signal Generator              | Agilent       | E4438C        | MY42080359  | 2011.08          |                                     |
| 26  | PSG analog signal generator          | Agilent       | E8257D-520    | MY45141255  | 2011.07          |                                     |
| 27  | DC Power Supply                      | HP            | 6633A         | 3448A032223 | 2011.08          | <input checked="" type="checkbox"/> |
| 28  | DC Power Supply                      | HP            | 6268B         | 2542A-07856 | 2011.07          |                                     |
| 29  | Hygro/Thermo Graph                   | SATO          | PC-5000TRH-II | -           | 2011.07          | <input checked="" type="checkbox"/> |

## 2.3 Test Date

Date of Test: October 7, 2010 ~ October 11, 2010

## 2.4 Test Environment

See each test item's description.



### 3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

#### 3.1 Rating and Physical Characteristics

|                           |   |
|---------------------------|---|
| Power source              | DC 5.0 V (USB interface)                                  |
| Local Oscillator or X-Tal | X-Tal: 16 MHz (RF Module), 12 MHz (USB digital interface) |
| Transmit Frequency        | 2405 MHz ~ 2480 MHz (IEEE 802.15.4)                       |
| Antenna Type              | Integral (chip antenna, Declared PEAK Gain: 0.5 dBi)      |
| Type of Modulation        | DSSS modulation (O-QPSK)                                  |
| RF Output power           | Under 0 dBm (declared by the applicant)                   |
| External Ports **         | USB interface   |

\*\* The test report for compliance with FCC Part 15B as a digital device was issued with other test report number.

#### 3.2 Equipment Modifications

The seven test samples (EUT) were provided; the each EUT was modified (programmed) to facilitate the measurements. The six TX samples were used for the Conducted/Radiated measurements; those were in continuous transmitting at the lowest, middle and highest operating frequency when the EUT was powered. The one RX sample was used for radiated measurements; this was in continuous receiving at the middle operating frequency when the EUT was powered.

#### 3.3 Submitted Documents

Block diagram

Schematic diagram

Antenna Specification

Part List


User manual



## 4. MEASUREMENT CONDITIONS

### 4.1 Description of test configuration

The measurements were taken in continuous transmitting/receiving mode provided by the applicant. The Notebook PC was used for the measurements of the AC power line conducted emissions.

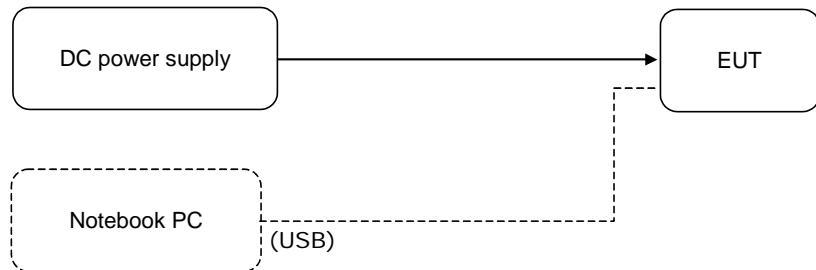

[ System Block Diagram of Test Configuration ]

### 4.2 List of Peripherals

| Equipment Type               | Manufacturer | Model      | S/N                      |
|------------------------------|--------------|------------|--------------------------|
| Notebook PC                  | DELL         | INSPIRON   | 14791079949              |
| Adaptor<br>(for Notebook PC) | DELL         | LA65NS0-00 | CN-0MG532-70166-6BT-004G |

### 4.3 Type of Used Cables

| # | START       |          | END         |           | CABLE     |          |
|---|-------------|----------|-------------|-----------|-----------|----------|
|   | NAME        | I/O PORT | NAME        | I/O PORT  | LENGTH(m) | SHIELDED |
| 1 | EUT         | USB      | Notebook PC | USB       | -         | -        |
| 2 | Notebook PC | DC Input | Adaptor     | DC Output | 2.0       | NO       |
| 3 | Adaptor     | AC Input | AC mains    | -         | 0.8       | NO       |

### 4.4 Uncertainty

| Measurement Item      | Combined Standard Uncertainty<br>$U_c$ | Expanded Uncertainty<br>$U = k \times U_c (k = 1.96)$ |
|-----------------------|--|---|
| Conducted RF power    | $\pm 0.71$ dB                          | $\pm 1.40$ dB   |
| Radiated disturbance  | $\pm 2.30$ dB                          | $\pm 4.51$ dB   |
| Conducted disturbance | $\pm 1.96$ dB                          | $\pm 3.84$ dB   |



## 5. TEST AND MEASUREMENTS

### Summary of Test Results

| Requirement  | CFR 47 Section                  | RSS Standards                   | Report Section | Test Result |
|--|---------------------------------|---------------------------------|----------------|-------------|
| Antenna Requirement                                | 15.203, 15.247(b)(4)            | RSS-Gen, 7.1.4                  | 5.1            | PASS        |
| 6dB Bandwidth                                      | 15.247(a)(2)                    | RSS-210, A8.2(a)                | 5.2            | PASS        |
| Maximum Peak Output Power                          | 15.247(b)(3), (4)               | RSS-210, A8.4(4)                | 5.3            | PASS        |
| Spurious Emission, Band Edge, and Restricted bands | 15.247(d), 15.205(a), 15.209(a) | RSS-210, A8.5 Table 1, 2, and 3 | 5.4            | PASS        |
| Peak Power Spectral Density                        | 15.247(e)                       | RSS-210, A8.2(b)                | 5.5            | PASS        |
| Conducted Emissions                                | 15.207(a)                       | RSS-Gen, 7.2.2                  | 5.6            | PASS        |
| Receiver Spurious emissions                        | -                               | RSS-Gen, 7.2.3                  | 5.7            | PASS        |
| RF Exposure  | 15.247(i), 1.1307(b)(1)         | RSS-Gen, 5.5 RSS-102, 2.5       | 5.8            | PASS        |

## 5.1 ANTENNA REQUIREMENT

### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.1.2 Result:

**PASS**

The transmitter has the integral chip antenna. The directional gain of the antenna is 0.5 dBi.



## 5.2 6 dB BANDWIDTH

### 5.2.1 Regulation

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

### 5.2.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Set the spectrum analyzer as follows:
  - RBW = 100 kHz, VBW  $\geq$  RBW
  - Span  $\gg$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
3. Mark the peak frequency and -6dB (upper and lower) frequency.
4. Set the RBW to as close to 1% of the selected span as is possible without being below 1%.
5. Set the DETECTOR to sample where practical. [REMARK: the function of the PEAK HOLD was used]
6. Measure the 99% occupied bandwidth.
7. Repeat until all the rest channels are investigated.

### 5.2.3 Test Results:

PASS

**Table 1: Measured values of the 6dB Bandwidth**


| Operating frequency | Occupied Bandwidth (99%) | 6dB Bandwidth | Limit          |
|---------------------|--------------------------|---------------|----------------|
| 2405 MHz            | 2.28 MHz                 | 1.61 MHz      | $\geq$ 500 kHz |
| 2440 MHz            | 2.28 MHz                 | 1.61 MHz      | $\geq$ 500 kHz |
| 2480 MHz            | 2.28 MHz                 | 1.64 MHz      | $\geq$ 500 kHz |




SK TECH CO., LTD.

Page 10 of 30


**Figure 1. Plot of the 6dB Bandwidth**  
Lowest Channel (2405 MHz)

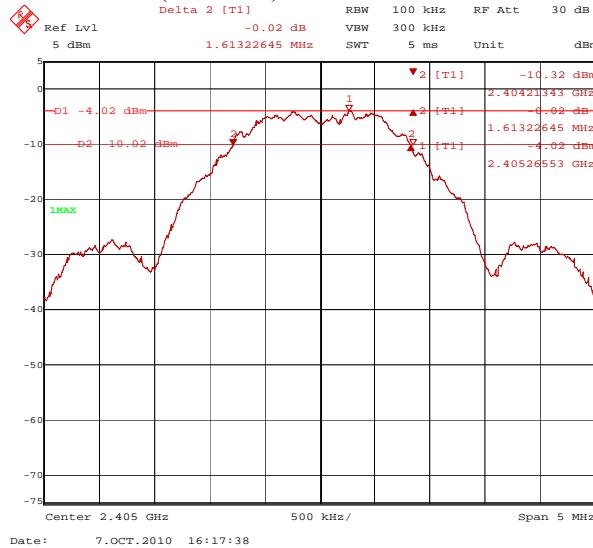


Middle Channel (2440 MHz)

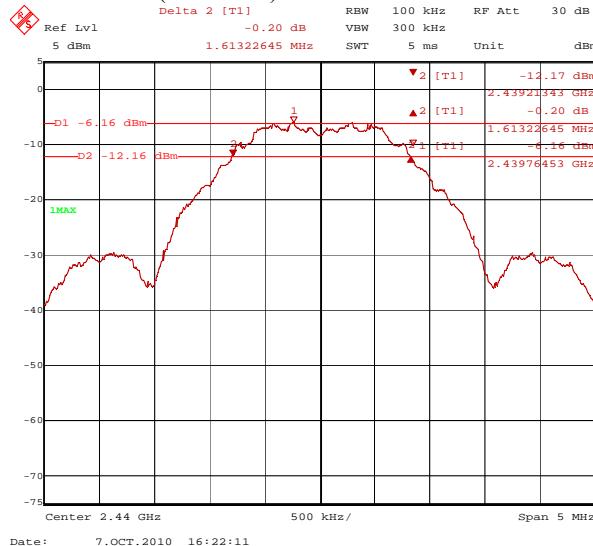


Highest Channel (2480 MHz)

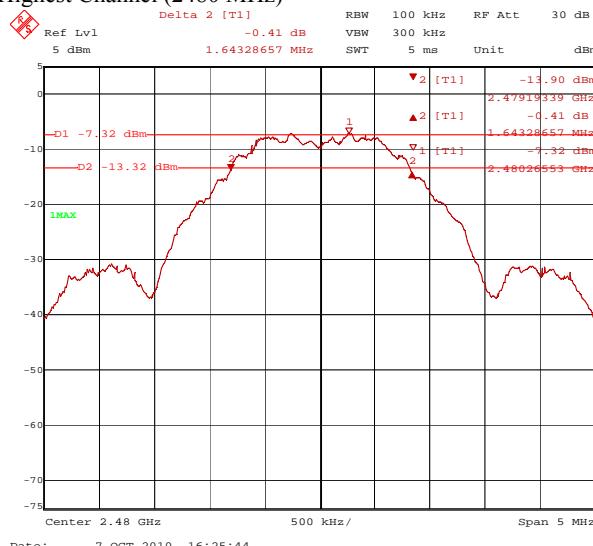


**Figure 2. Plot of the Occupied Bandwidth (99%)**  
Lowest Channel (2405 MHz)

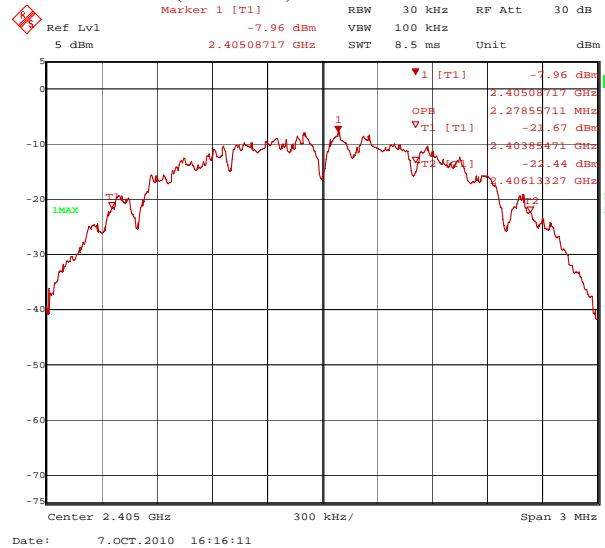

Middle Channel (2440 MHz)

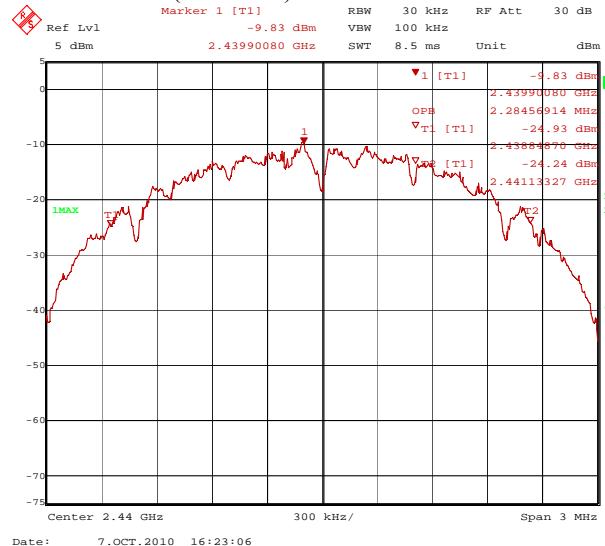

Highest Channel (2480 MHz)

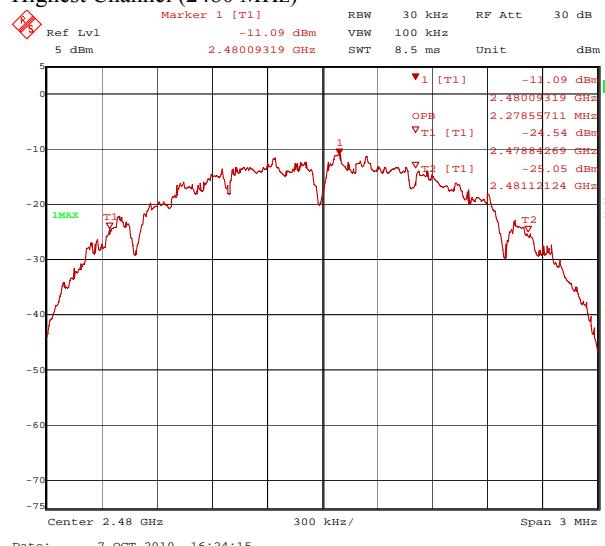



## 5.3 MAXIMUM PEAK OUTPUT POWER

### 5.3.1 Regulation

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via SPI interface and make sure the spectrum analyzer is operated in its linear range.
3. Set the spectrum analyzer as follows:

Span = approximately 5 times the 20 dB bandwidth, centered channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
5. Repeat above procedures until all frequencies measured were complete.

### 5.3.3 Test Results:

PASS

**Table 2: Measured values of the Maximum Peak Conducted Output Power**

| Operating frequency | PEAK POWER |       | Limit |
|---------------------|------------|-------|-------|
|                     | [dBm]      | [mW]  |       |
| 2405 MHz            | -1.32      | 0.738 | 1 W   |
| 2440 MHz            | -3.10      | 0.490 | 1 W   |
| 2480 MHz            | -4.38      | 0.365 | 1 W   |


*NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.*


**SK TECH CO., LTD.**


Page 12 of 30

**Figure 3. Plot of the Maximum Peak Conducted Output Power**


Lowest Channel (2405 MHz)

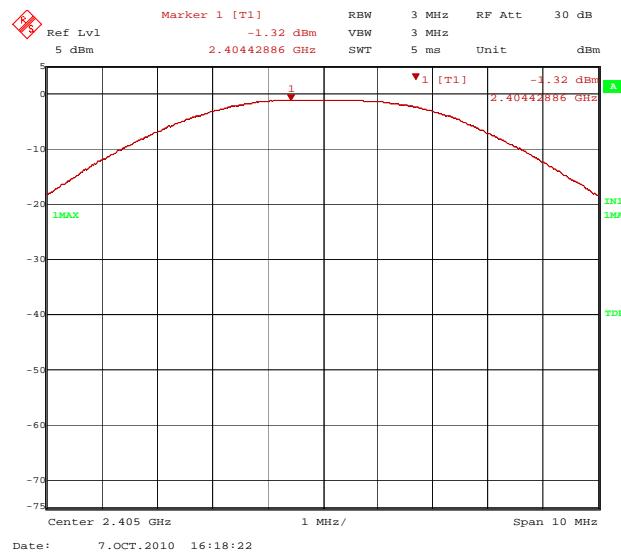

Middle Channel (2440 MHz)

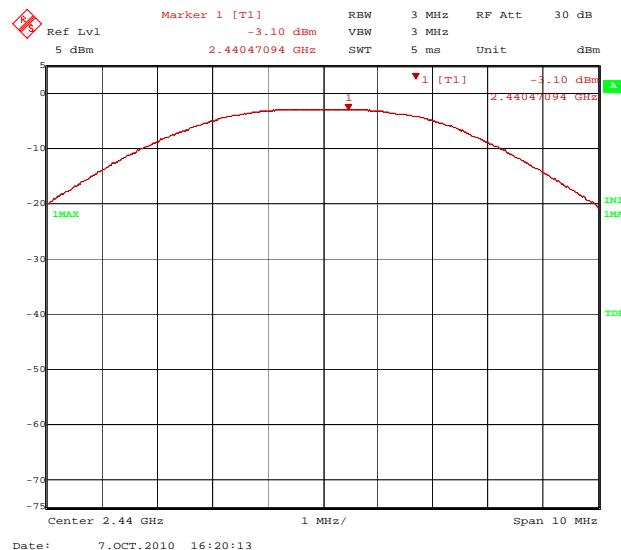

Highest Channel (2480 MHz)

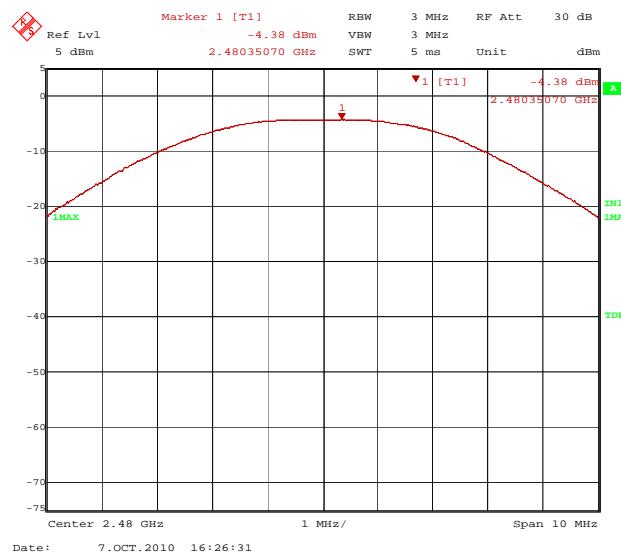



## 5.4 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

### 5.4.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency (MHz) | Field strength ( $\mu$ V/m @ 3m) | Field strength (dB $\mu$ V/m @ 3m) |
|-----------------|----------------------------------|------------------------------------|
| 30–88           | 100                              | 40.0                               |
| 88–216          | 150                              | 43.5                               |
| 216–960         | 200                              | 46.0                               |
| Above 960       | 500                              | 54.0                               |

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

\*\* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

### 5.4.2 Test Procedure

#### 1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 3 meter distance for below 30 MHz.
2. The EUT was placed on the top of the 0.8-meter height, 1  $\times$  1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 10 MHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4  $\times$  4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.



### 5.4.3 Test Results:

PASS

Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 4 and 5. Spurious RF conducted emissions were shown in the Figure 6.

**Emission plot for the preliminary radiated measurements were shown in the Figure 7.**

*NOTE 1: for conducted measurement, we took the insertion loss of the cable loss into consideration within the measuring instrument. And for radiated measurement, the results were calibrated to the field strength within the measuring instrument; Table 3 contains the correction factors at the operating frequencies such as antenna factor, cable loss, etc.*

*NOTE 2: The preliminary radiated measurements were performed in the anechoic chamber in order to find the frequency, which falls in the restricted bands as defined in Section 15.205, and the results for the final measurements were indicated in the Table 3.*

**Table 3: Measured values of the Field strength of spurious emission (Radiated)**

## BELOW 1 GHz

| Frequency | Receiver Bandwidth | Pol.  | Antenna Height | Turn Table | Reading  | Amp Gain | ATT  | AF        | CL   | Actual     | Limit      | Margin |
|-----------|--------------------|-------|----------------|------------|----------|----------|------|-----------|------|------------|------------|--------|
| [MHz]     | [kHz]              | [V/H] | [m]            | [degree]   | [dB(μV)] | [dB]     | [dB] | [dB(1/m)] | [dB] | [dB(μV/m)] | [dB(μV/m)] | [dB]   |

### Average/Peak/Quasi-peak data, emissions below 30 MHz

### ***No Spurious Radiated Emissions Found***

## Quasi-peak data, emissions below 1000 MHz

$$\text{Margin (dB)} = \text{Limit} - \text{Actual}$$

Margin (dB) = Limit - Actual  
[Actual = Reading - Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPE),  $\Delta E/CL$  =  $\Delta$  antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

| Frequency<br>[MHz]                            | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Antenna<br>Height<br>[m] | Turn<br>Table<br>[degree] | Reading<br>[dB(μV)] | Amp<br>Gain<br>[dB] | ATT<br>[dB] | AF<br>[dB(1/m)] | CL<br>[dB] | Actual<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|---|--------------------------------|---------------|--------------------------|---------------------------|---------------------|---------------------|-------------|-----------------|------------|----------------------|---------------------|----------------|
| <b>AVERAGE data, emissions above 1000 MHz</b> |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
| 2405.0  | 1000                           | V             | 1.10                     | 301                       | 94.28               | 48.18               | 10.09       | 27.96           | 5.01       | 89.16                | Not Applicable      |                |
| 2405.0  | 1000                           | H             | 2.46                     | 221                       | 86.14               | 48.18               | 10.09       | 27.96           | 5.01       | 81.02                |                     |                |
| 2358.0  | 1000                           | V             | 1.10                     | 301                       | -                   | 48.18               | 10.09       | 27.96           | 5.01       | 37.58                | 54.00               | 16.42          |
| 2357.2  | 1000                           | H             | 2.46                     | 221                       | -                   | 48.18               | 10.09       | 27.96           | 5.01       | 37.19                | 54.00               | 16.81          |
| 4809.0  | 1000                           | V             | 1.57                     | 166                       | 57.13               | 48.26               | 1.18        | 32.76           | 7.36       | 50.17                | 54.00               | 3.83**         |
| 4809.0  | 1000                           | H             | 1.55                     | 302                       | 57.26               | 48.26               | 1.18        | 32.76           | 7.36       | 50.30                | 54.00               | 3.70**         |
| 4811.0  | 1000                           | V             | 1.57                     | 166                       | 56.49               | 48.26               | 1.18        | 32.76           | 7.36       | 49.53                | 54.00               | 4.47**         |
| 4811.0  | 1000                           | H             | 1.55                     | 302                       | 57.38               | 48.26               | 1.18        | 32.76           | 7.36       | 50.42                | 54.00               | 3.58**         |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
| 2440.0  | 1000                           | V             | 1.08                     | 301                       | 94.19               | 48.18               | 10.09       | 27.96           | 5.01       | 89.07                | Not Applicable      |                |
| 2440.0  | 1000                           | H             | 2.59                     | 230                       | 87.53               | 48.18               | 10.09       | 27.96           | 5.01       | 82.41                |                     |                |
| 4879.0  | 1000                           | V             | 1.42                     | 148                       | 55.78               | 48.28               | 1.18        | 32.77           | 7.47       | 48.92                | 54.00               | 5.08           |
| 4879.0  | 1000                           | H             | 1.54                     | 273                       | 55.32               | 48.28               | 1.18        | 32.77           | 7.47       | 48.46                | 54.00               | 5.54           |
| 4881.0  | 1000                           | V             | 1.42                     | 148                       | 56.33               | 48.28               | 1.18        | 32.77           | 7.47       | 49.47                | 54.00               | 4.53           |
| 4881.0  | 1000                           | H             | 1.54                     | 273                       | 55.69               | 48.28               | 1.18        | 32.77           | 7.47       | 48.83                | 54.00               | 5.17           |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
| 2480.0  | 1000                           | V             | 1.04                     | 306                       | 94.07               | 48.20               | 10.09       | 28.29           | 5.10       | 89.35                | Not Applicable      |                |
| 2480.0  | 1000                           | H             | 2.26                     | 232                       | 86.53               | 48.20               | 10.09       | 28.29           | 5.10       | 81.81                |                     |                |
| 2483.6  | 1000                           | V             | 1.04                     | 306                       | -                   | 48.20               | 10.09       | 28.29           | 5.10       | 50.36                | 54.00               | 3.64**         |
| 2483.6  | 1000                           | H             | 2.26                     | 232                       | -                   | 48.20               | 10.09       | 28.29           | 5.10       | 45.31                | 54.00               | 8.69           |
| 4959.0  | 1000                           | V             | 1.44                     | 155                       | 50.43               | 48.30               | 1.18        | 32.78           | 7.57       | 43.66                | 54.00               | 10.34          |
| 4959.0  | 1000                           | H             | 1.48                     | 313                       | 48.53               | 48.30               | 1.18        | 32.78           | 7.57       | 41.76                | 54.00               | 12.24          |
| 4961.0  | 1000                           | V             | 1.44                     | 155                       | 50.86               | 48.30               | 1.18        | 32.78           | 7.57       | 44.09                | 54.00               | 9.91           |
| 4961.0  | 1000                           | H             | 1.48                     | 313                       | 48.94               | 48.30               | 1.18        | 32.78           | 7.57       | 42.17                | 54.00               | 11.83          |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |
|   |                                |               |                          |                           |                     |                     |             |                 |            |                      |                     |                |

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\*\*: The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

| Frequency                                  | Receiver Bandwidth | Pol.  | Antenna Height | Turn Table | Reading  | Amp Gain | ATT   | AF      | CL   | Actual     | Limit          | Margin |
|--|--------------------|-------|----------------|------------|----------|----------|-------|---------|------|------------|----------------|--------|
| [MHz]                                      | [kHz]              | [V/H] | [m]            | [degree]   | [dB(μV)] | [dB]     | [dB]  | dB(1/m) | [dB] | [dB(μV/m)] | [dB(μV/m)]     | [dB]   |
| <b>PEAK data, emissions above 1000 MHz</b> |                    |       |                |            |          |          |       |         |      |            |                |        |
| 2405.0                                     | 1000               | V     | 1.10           | 301        | 100.22   | 48.18    | 10.09 | 27.96   | 5.01 | 95.10      | Not Applicable |        |
| 2405.0                                     | 1000               | H     | 2.46           | 221        | 91.69    | 48.18    | 10.09 | 27.96   | 5.01 | 86.57      |                |        |
| 2358.0                                     | 1000               | V     | 1.10           | 301        | -        | 48.18    | 10.09 | 27.96   | 5.01 | 53.71      | 74.00          | 20.29  |
| 2357.2                                     | 1000               | H     | 2.46           | 221        | -        | 48.18    | 10.09 | 27.96   | 5.01 | 52.20      | 74.00          | 21.80  |
| 4809.0                                     | 1000               | V     | 1.57           | 166        | 65.02    | 48.26    | 1.18  | 32.76   | 7.36 | 58.06      | 74.00          | 15.94  |
| 4809.0                                     | 1000               | H     | 1.55           | 302        | 65.79    | 48.26    | 1.18  | 32.76   | 7.36 | 58.83      | 74.00          | 15.17  |
| 4811.0                                     | 1000               | V     | 1.57           | 166        | 64.27    | 48.26    | 1.18  | 32.76   | 7.36 | 57.31      | 74.00          | 16.69  |
| 4811.0                                     | 1000               | H     | 1.55           | 302        | 65.53    | 48.26    | 1.18  | 32.76   | 7.36 | 58.57      | 74.00          | 15.43  |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |
| 2440.0                                     | 1000               | V     | 1.08           | 301        | 100.02   | 48.18    | 10.09 | 27.96   | 5.01 | 94.90      | Not Applicable |        |
| 2440.0                                     | 1000               | H     | 2.59           | 230        | 93.11    | 48.18    | 10.09 | 27.96   | 5.01 | 87.99      |                |        |
| 4879.0                                     | 1000               | V     | 1.42           | 148        | 63.48    | 48.28    | 1.18  | 32.77   | 7.47 | 56.62      | 74.00          | 17.38  |
| 4879.0                                     | 1000               | H     | 1.54           | 273        | 63.34    | 48.28    | 1.18  | 32.77   | 7.47 | 56.48      | 74.00          | 17.52  |
| 4881.0                                     | 1000               | V     | 1.42           | 148        | 64.01    | 48.28    | 1.18  | 32.77   | 7.47 | 57.15      | 74.00          | 16.85  |
| 4881.0                                     | 1000               | H     | 1.54           | 273        | 63.75    | 48.28    | 1.18  | 32.77   | 7.47 | 56.89      | 74.00          | 17.11  |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |
| 2480.0                                     | 1000               | V     | 1.04           | 306        | 99.71    | 48.20    | 10.09 | 28.29   | 5.10 | 94.99      | Not Applicable |        |
| 2480.0                                     | 1000               | H     | 2.26           | 232        | 92.13    | 48.20    | 10.09 | 28.29   | 5.10 | 87.41      |                |        |
| 2483.6                                     | 1000               | V     | 1.04           | 306        | -        | 48.20    | 10.09 | 28.29   | 5.10 | 62.06      | 74.00          | 11.94  |
| 2483.6                                     | 1000               | H     | 2.26           | 232        | -        | 48.20    | 10.09 | 28.29   | 5.10 | 57.44      | 74.00          | 16.56  |
| 4959.0                                     | 1000               | V     | 1.44           | 155        | 60.41    | 48.30    | 1.18  | 32.78   | 7.57 | 53.64      | 74.00          | 20.36  |
| 4959.0                                     | 1000               | H     | 1.48           | 313        | 58.60    | 48.30    | 1.18  | 32.78   | 7.57 | 51.83      | 74.00          | 22.17  |
| 4961.0                                     | 1000               | V     | 1.44           | 155        | 60.80    | 48.30    | 1.18  | 32.78   | 7.57 | 54.03      | 74.00          | 19.97  |
| 4961.0                                     | 1000               | H     | 1.48           | 313        | 58.86    | 48.30    | 1.18  | 32.78   | 7.57 | 52.09      | 74.00          | 21.91  |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |
|  |                    |       |                |            |          |          |       |         |      |            |                |        |

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.




SK TECH CO., LTD.


Page 18 of 30

### Figure 4. Plot of the Band Edge (Conducted)

Lowest Channel (2405 MHz)

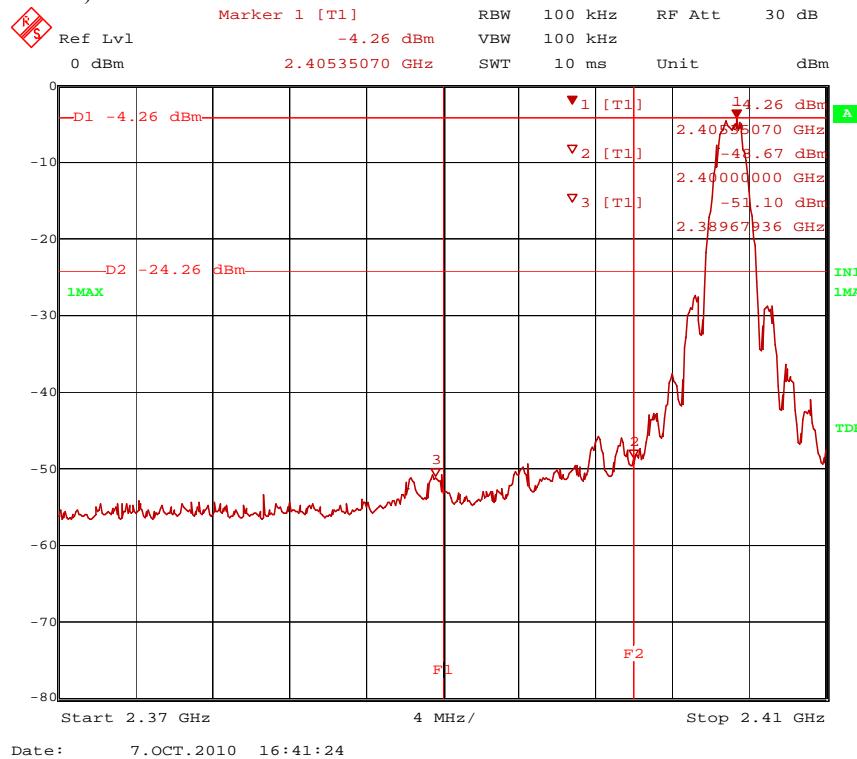

Highest Channel (2480 MHz)

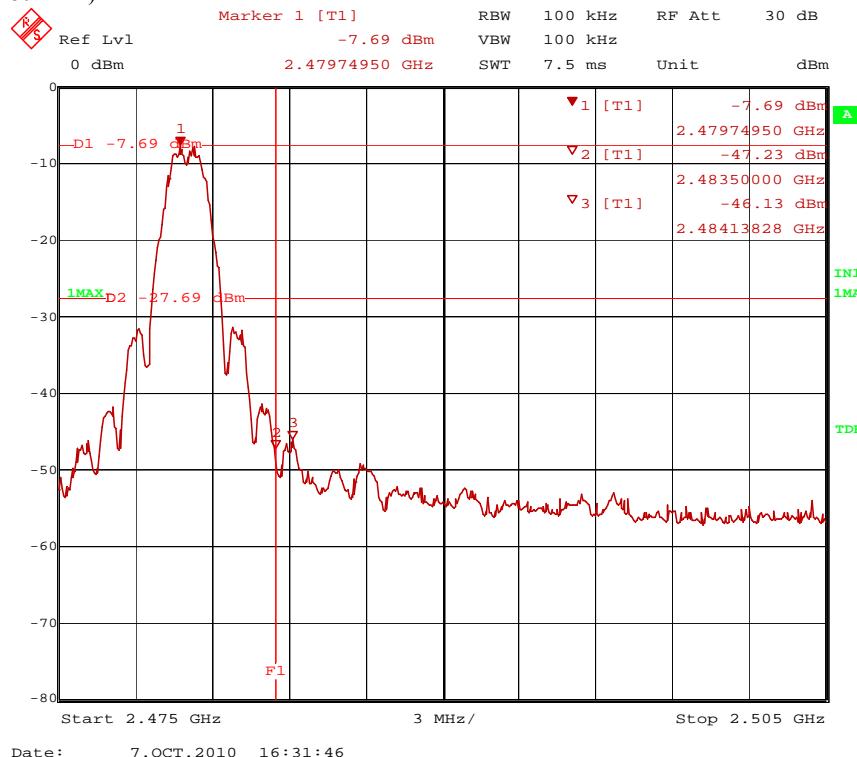




**Figure 5. Plot of the Band Edge (Radiated)**


Lowest Channel (2405 MHz)

Vertical

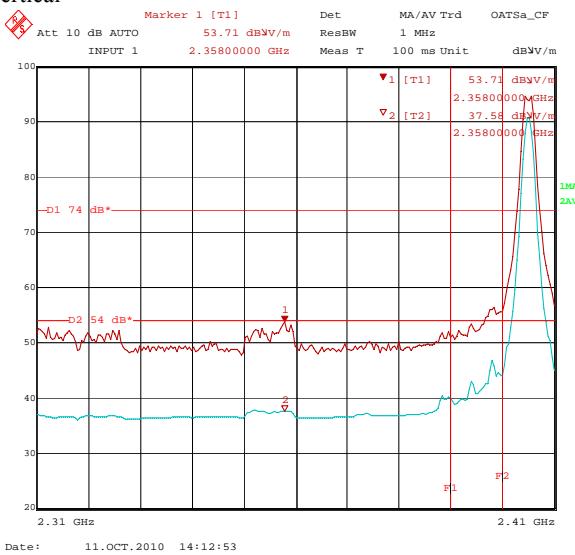


Highest Channel (2480 MHz)

Vertical

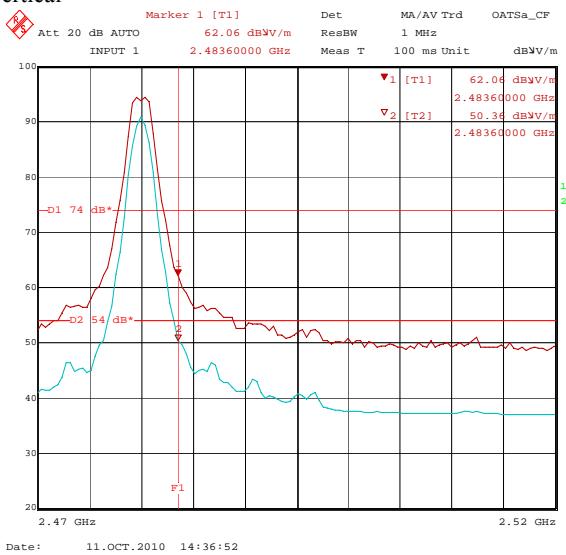


Lowest Channel (2405 MHz)

Horizontal

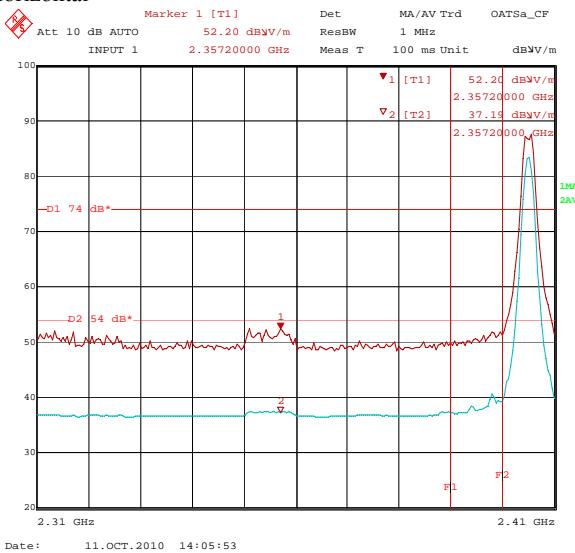

Highest Channel (2480 MHz)

Horizontal

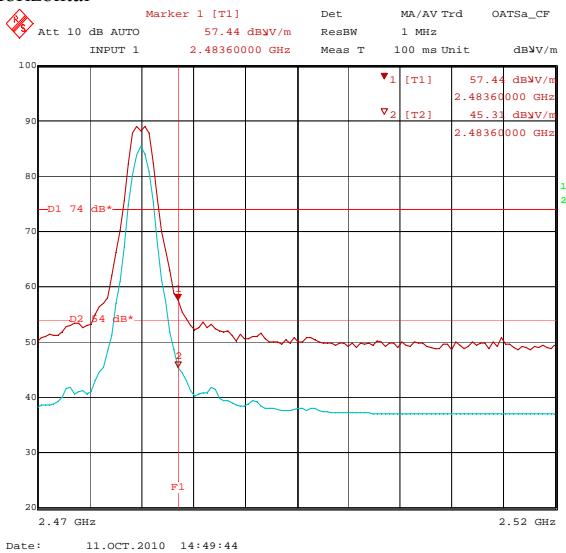




SK TECH CO., LTD.


Page 20 of 30

Figure 6. Spurious RF conducted emissions


Lowest Channel(2405 MHz): 30 MHz ~ 7 GHz

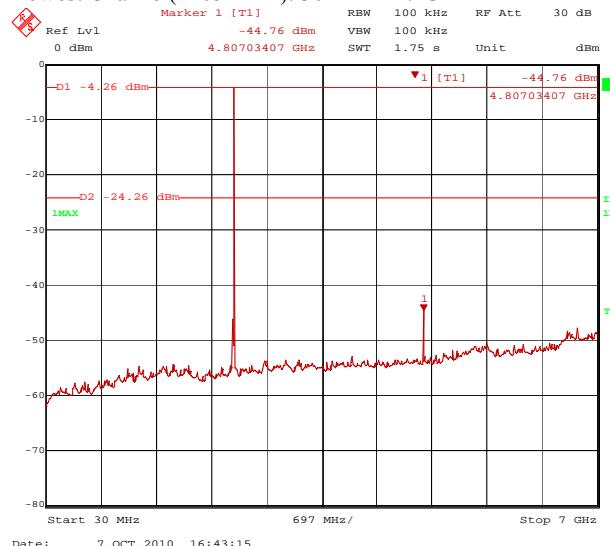


Lowest Channel (2405 MHz): 7 GHz ~ 25 GHz

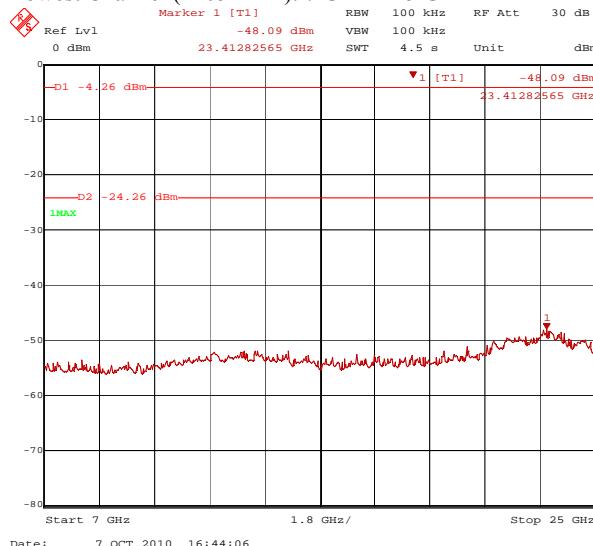


Middle Channel (2440 MHz): 30 MHz ~ 7 GHz

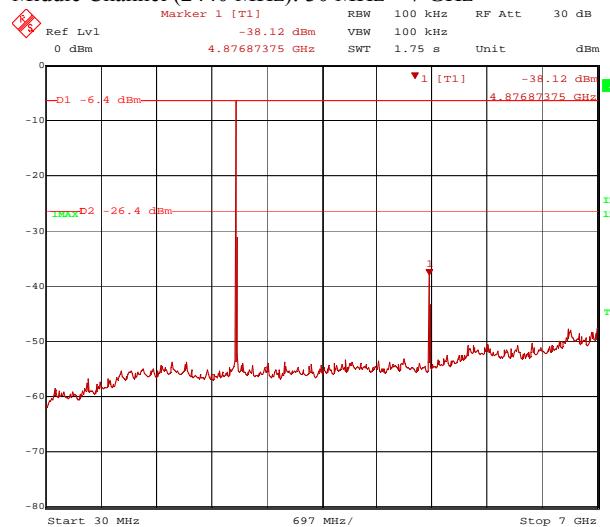


Middle Channel (2440 MHz): 7 GHz ~ 25 GHz

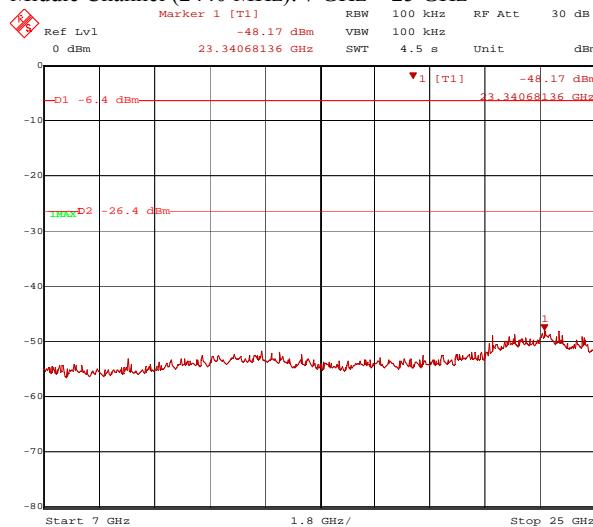

Highest Channel(2480 MHz): 30 MHz ~ 7 GHz

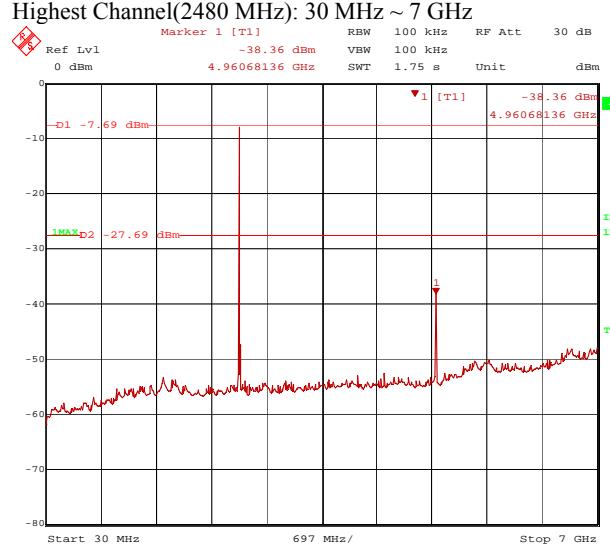

Highest Channel(2480 MHz): 7 GHz ~ 25 GHz

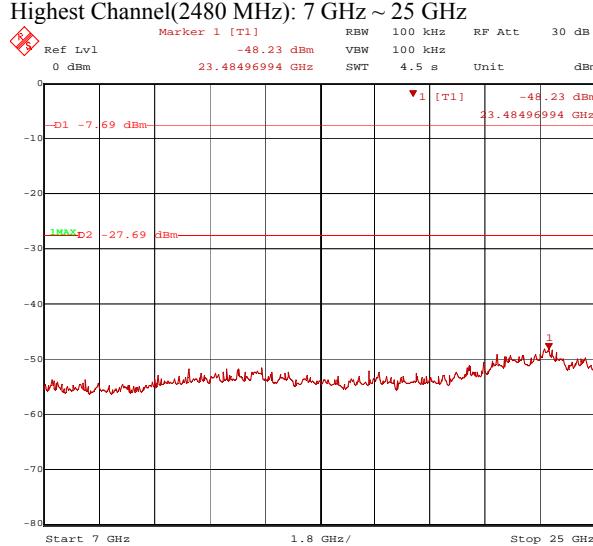




SK TECH CO., LTD.


Page 21 of 30

### Figure 7. Emission plot for the preliminary radiated measurements


Operating at 2405 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

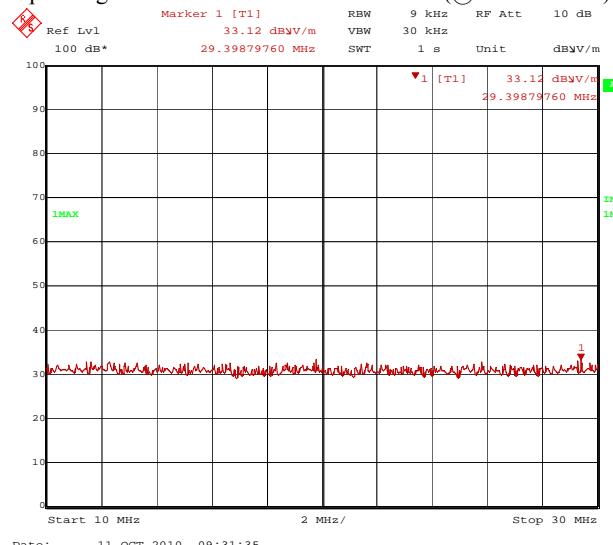


Operating at 2480 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

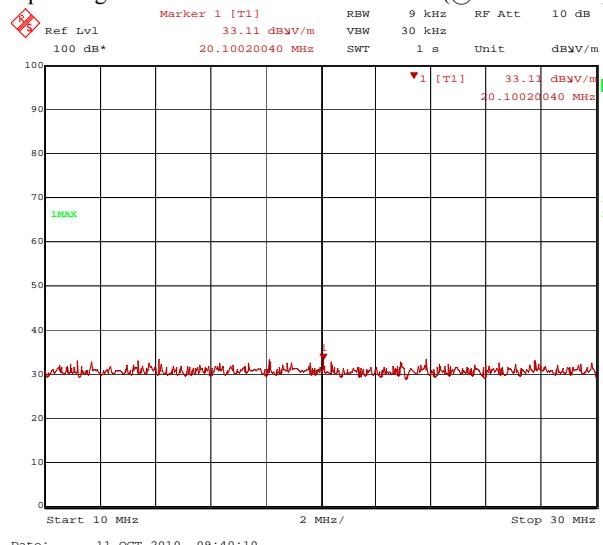


Operating at 2405 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

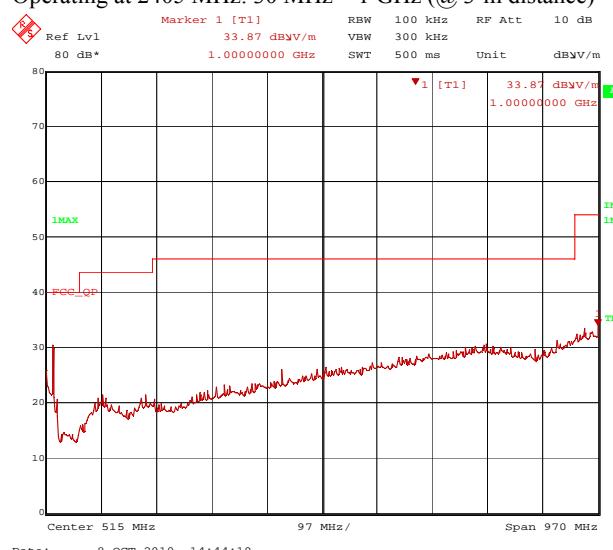


Operating at 2480 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

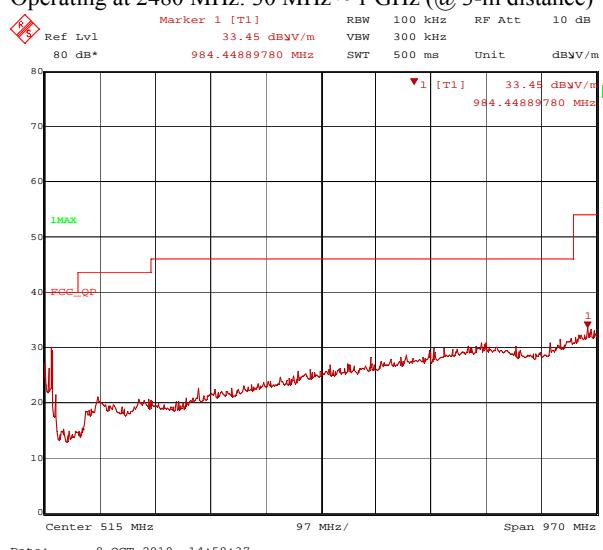

Operating at 2405 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

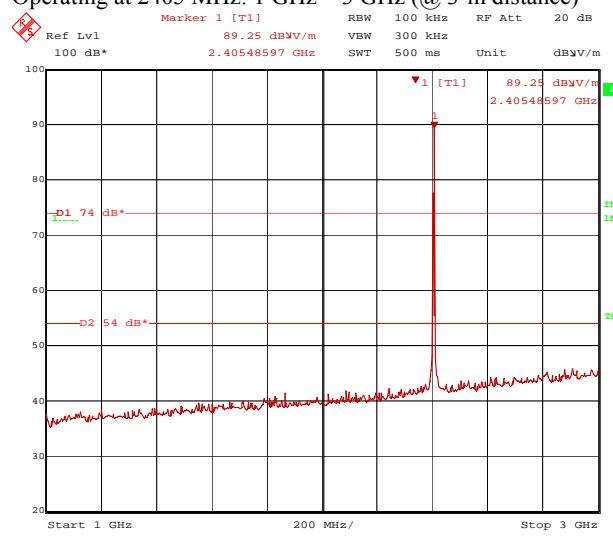

Operating at 2480 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

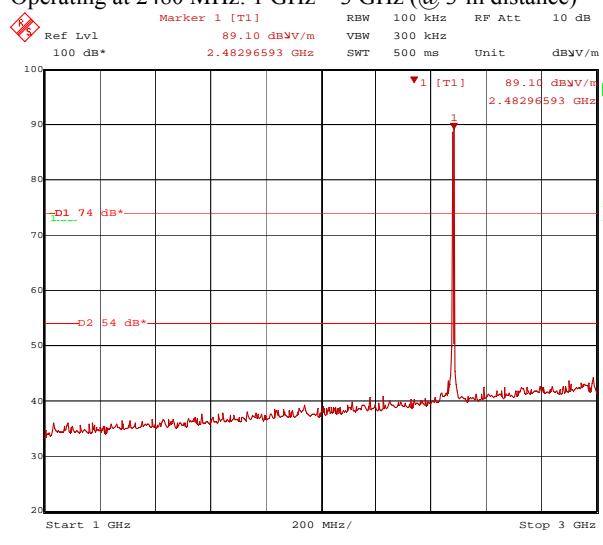




SK TECH CO., LTD.


Page 22 of 30

### Figure 7. Emission plot for the preliminary radiated measurements


Operating at 2405 MHz: 3 GHz ~ 7 GHz (@ 3-m distance)

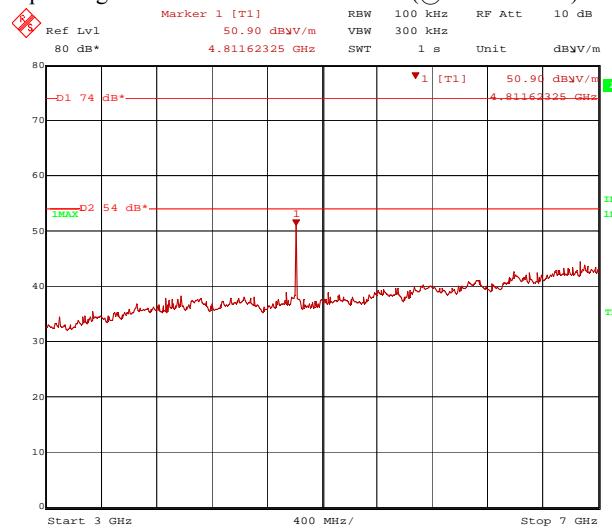


Operating at 2480 MHz: 3 GHz ~ 7 GHz (@ 3-m distance)

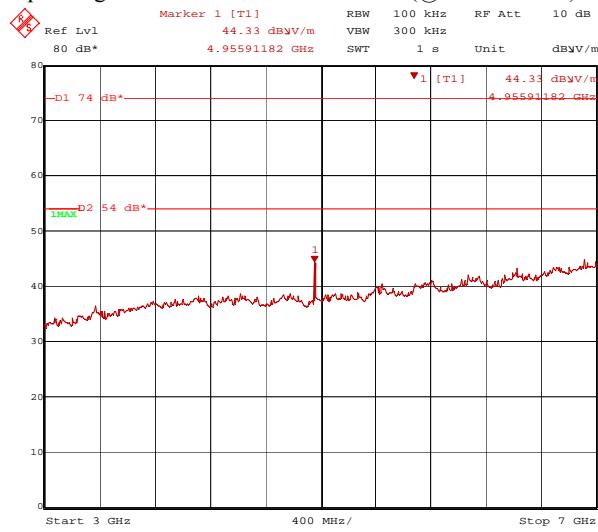

Operating at 2405 MHz: 7 GHz ~ 15 GHz (@ 1-m distance)

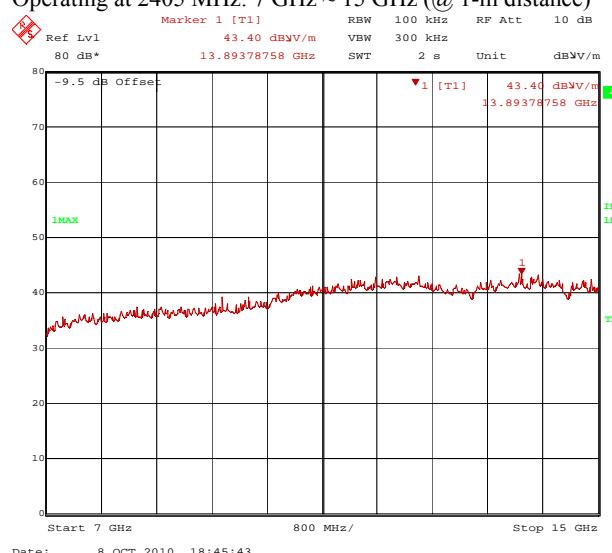


Operating at 2480 MHz: 7 GHz ~ 15 GHz (@ 1-m distance)

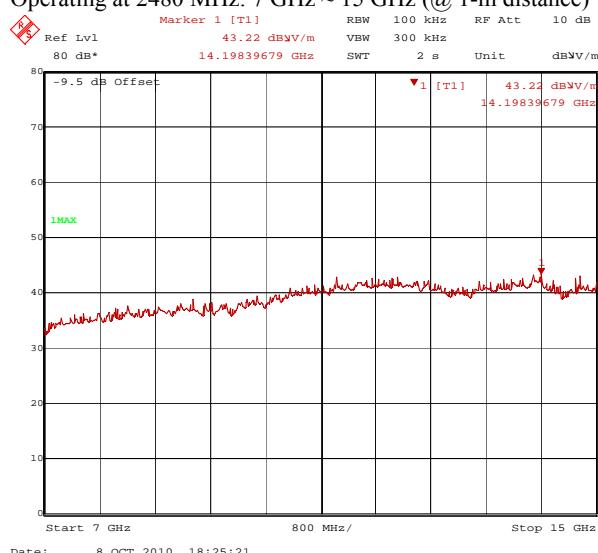

Operating at 2405 MHz: 15 GHz ~ 25 GHz (@ 1-m distance)



Operating at 2480 MHz: 15 GHz ~ 25 GHz (@ 1-m distance)

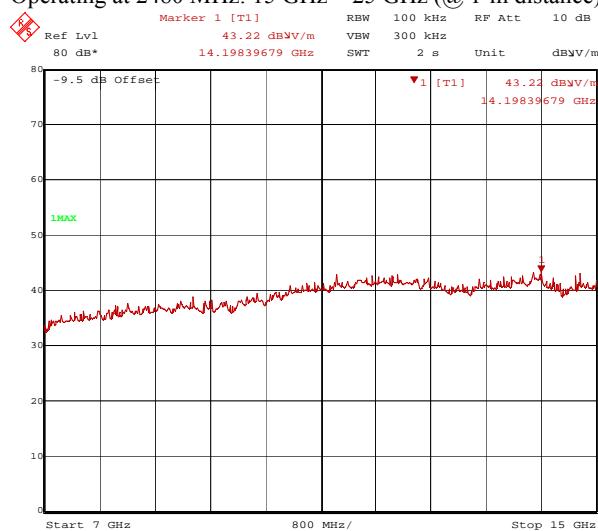



## 5.5 PEAK POWER SPECTRAL DENSITY

### 5.5.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.5.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and locate and zoom in on emission peak(s) within the passband.
4. Set the spectrum analyzer as follows:
  - RBW = 3 kHz, VBW  $\geq$  RBW
  - Span = 1.5 MHz
  - Sweep = 500 seconds
  - Detector function = peak
  - Trace = max hold
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.

### 5.5.3 Test Results:

**PASS**

**Table 4: Measured values of the Peak Power Spectral Density (Conducted)**


| Operating frequency | Measured Value (PPSD) | Limit   |
|---------------------|-----------------------|---------|
| 2405 MHz            | -16.86 dBm            | 8.0 dBm |
| 2440 MHz            | -17.54 dBm            | 8.0 dBm |
| 2480 MHz            | -19.53 dBm            | 8.0 dBm |

*NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.*




### Figure 8. Plot of the Peak Power Spectral Density


Lowest Channel (2405 MHz)

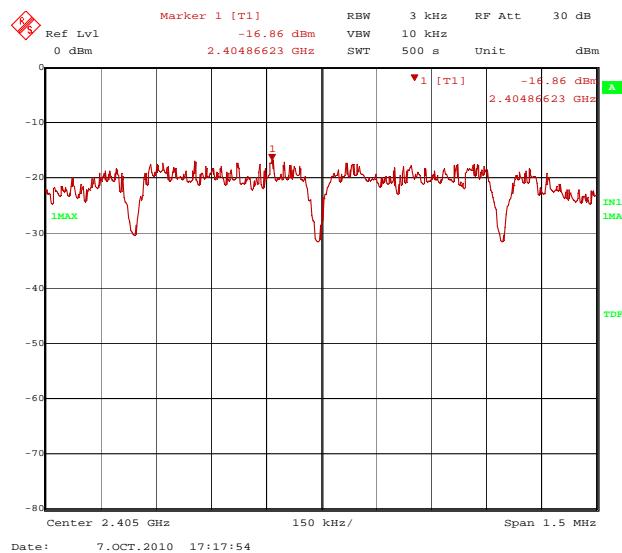

Middle Channel (2440 MHz)

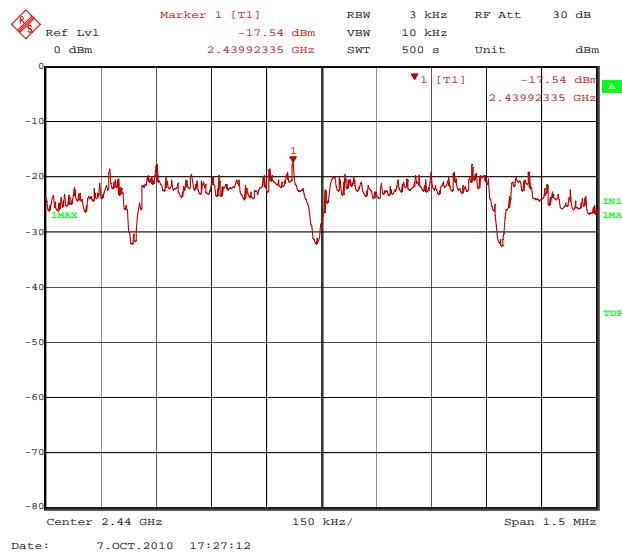

Highest Channel (2480 MHz)

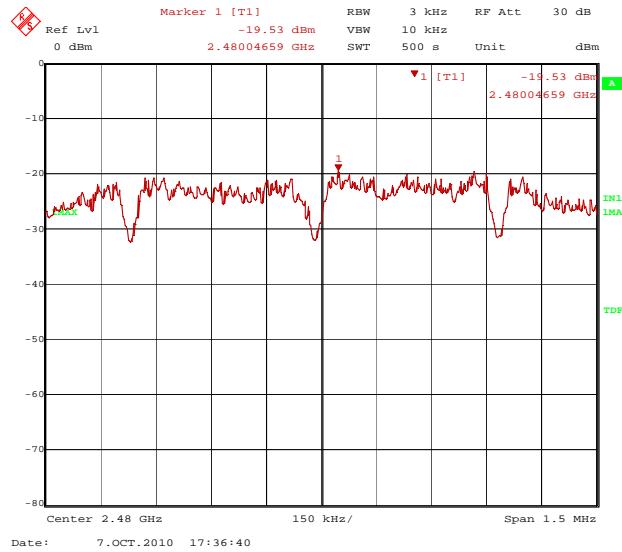



## 5.6 AC POWER LINE CONDUCTED EMISSIONS

### 5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15 – 0.5                  | 66 to 56 *                   | 56 to 46 * |
| 0.5 – 5                     | 56                           | 46         |
| 5 – 30                      | 60                           | 50         |

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

### 5.6.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.



## 5.6.3 Test Results:

PASS

**Table 5: Measured values of the AC Power Line Conducted Emissions**  
Transmitting at 2440 MHz

| Frequency<br>[MHz]     | Reading<br>[dB $\mu$ V] | L / N | CF<br>[dB] | CL<br>[dB] | Actual<br>[dB $\mu$ V] | Limit<br>[dB $\mu$ V] | Margin<br>[dB] |
|------------------------|-------------------------|-------|------------|------------|------------------------|-----------------------|----------------|
| <b>QUASI-PEAK DATA</b> |                         |       |            |            |                        |                       |                |
| 0.1750                 | 51.34                   | L     | 0.14       | 0.02       | 51.50                  | 64.72                 | 13.22          |
| 0.2350                 | 42.48                   | L     | 0.13       | 0.02       | 42.63                  | 62.27                 | 19.64          |
| 0.2900                 | 40.77                   | L     | 0.13       | 0.02       | 40.92                  | 60.52                 | 19.60          |
| 0.3500                 | 35.04                   | N     | 0.12       | 0.02       | 35.18                  | 58.96                 | 23.78          |
| 1.5350                 | 27.89                   | L     | 0.15       | 0.07       | 28.11                  | 56.00                 | 27.89          |
| 1.7550                 | 33.85                   | N     | 0.15       | 0.07       | 34.07                  | 56.00                 | 21.93          |
| 1.8100                 | 33.93                   | N     | 0.15       | 0.07       | 34.15                  | 56.00                 | 21.85          |
| 23.1300                | 26.79                   | N     | 0.66       | 0.30       | 27.75                  | 60.00                 | 32.25          |
|                        |                         |       |            |            |                        |                       |                |
|                        |                         |       |            |            |                        |                       |                |
|                        |                         |       |            |            |                        |                       |                |
| <b>AVERAGE DATA</b>    |                         |       |            |            |                        |                       |                |
| 0.1750                 | 36.49                   | L     | 0.14       | 0.02       | 36.65                  | 54.72                 | 18.07          |
| 0.2350                 | 30.27                   | L     | 0.13       | 0.02       | 30.42                  | 52.27                 | 21.85          |
| 0.2900                 | 29.08                   | L     | 0.13       | 0.02       | 29.23                  | 50.52                 | 21.29          |
| 0.3500                 | 27.06                   | N     | 0.12       | 0.02       | 27.20                  | 48.96                 | 21.76          |
| 1.5350                 | 20.85                   | L     | 0.15       | 0.07       | 21.07                  | 46.00                 | 24.93          |
| 1.7550                 | 25.22                   | N     | 0.15       | 0.07       | 25.44                  | 46.00                 | 20.56          |
| 1.8100                 | 26.00                   | N     | 0.15       | 0.07       | 26.22                  | 46.00                 | 19.78          |
| 23.1300                | 24.24                   | N     | 0.66       | 0.30       | 25.20                  | 50.00                 | 24.80          |
|                        |                         |       |            |            |                        |                       |                |
|                        |                         |       |            |            |                        |                       |                |
|                        |                         |       |            |            |                        |                       |                |

Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]



L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.

**SK TECH CO., LTD.**

Page 27 of 30

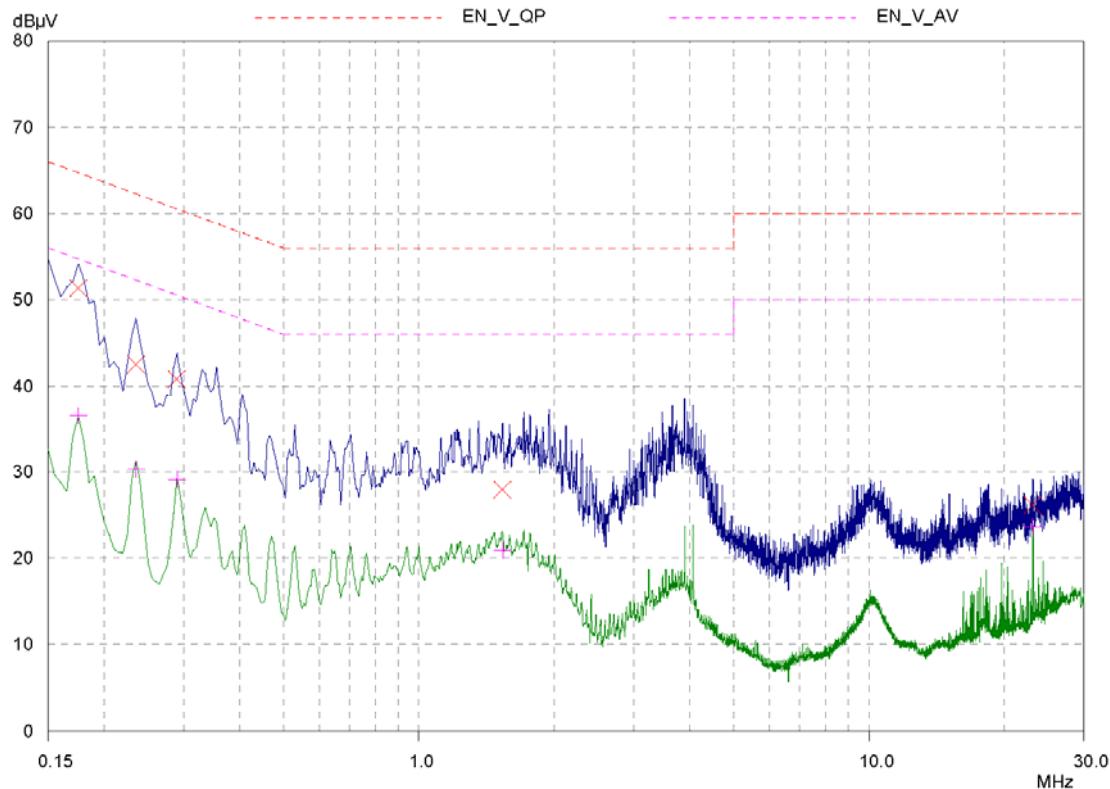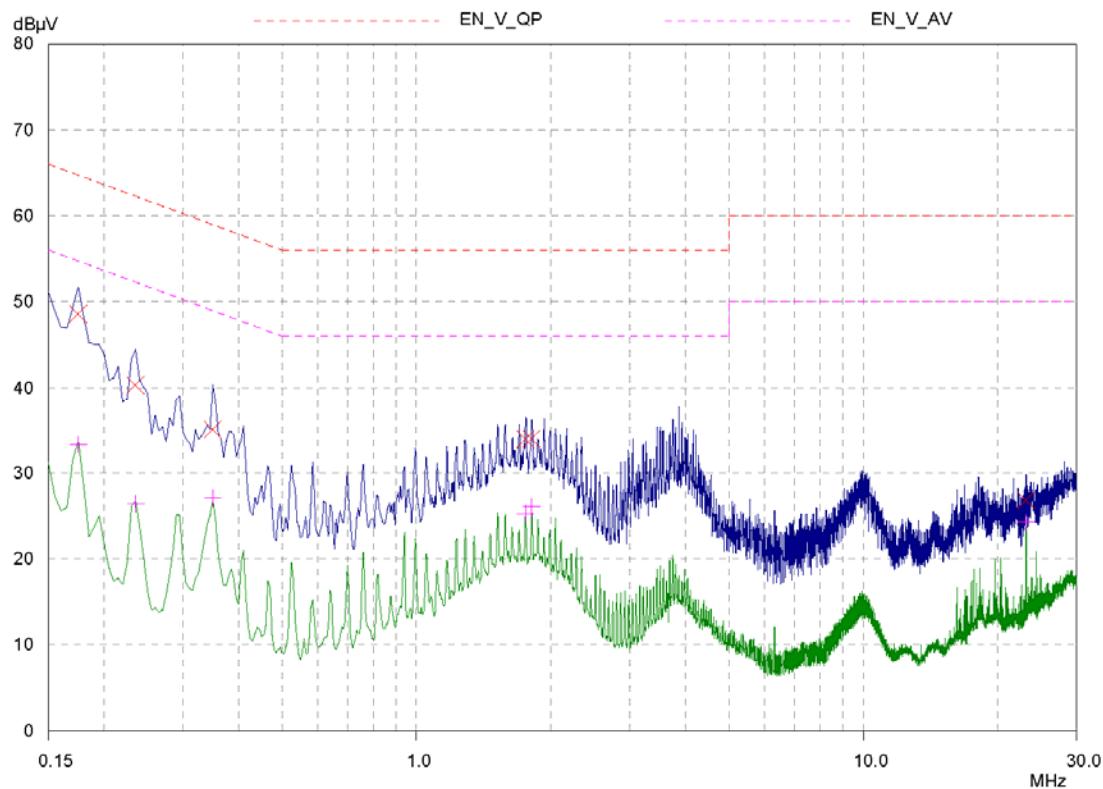**Figure 9. Plot of the AC Power Line Conducted Emissions****Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**



## 5.7 RECEIVER SPURIOUS EMISSIONS

### 5.7.1 Regulation

According to RSS-Gen 7.2.3, the following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

Table 1. Spurious Emission Limit for Receivers

| Frequency (MHz) | Field strength ( $\mu$ V/m @ 3m) | Field strength (dB $\mu$ V/m @ 3m) |
|-----------------|----------------------------------|------------------------------------|
| 30–88           | 100                              | 40.0                               |
| 88–216          | 150                              | 43.5                               |
| 216–960         | 200                              | 46.0                               |
| Above 960       | 500                              | 54.0                               |

\* Use quasi-peak below 1000 MHz and averaging meter above 1000 MHz.

### 5.7.2 Test Results:

PASS

Table 6: Receiver spurious emission (Radiated)

#### BELOW 1 GHz

| Frequency | Receiver Bandwidth | Pol.  | Antenna Height | Turn Table | Reading        | Amp Gain | ATT  | AF        | CL   | Actual           | Limit            | Margin |
|-----------|--------------------|-------|----------------|------------|----------------|----------|------|-----------|------|------------------|------------------|--------|
| [MHz]     | [kHz]              | [V/H] | [m]            | [degree]   | [dB( $\mu$ V)] | [dB]     | [dB] | [dB(1/m)] | [dB] | [dB( $\mu$ V/m)] | [dB( $\mu$ V/m)] | [dB]   |

#### Average/Peak/Quasi-peak data, emissions below 30 MHz

|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
| <i>No spurious emissions found</i> |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |  |  |  |  |  |  |  |  |  |  |  |

#### Quasi-peak data, emissions below 1000 MHz

|       |     |   |      |     |       |       |   |       |      |       |       |      |
|-------|-----|---|------|-----|-------|-------|---|-------|------|-------|-------|------|
| 30.72 | 120 | V | 1.54 | 210 | 45.88 | 28.48 | - | 12.32 | 0.76 | 30.48 | 40.00 | 9.52 |
| 30.72 | 120 | H | 1.20 | 21  | 46.72 | 28.48 | - | 12.32 | 0.76 | 31.32 | 40.00 | 8.68 |
| 41.66 | 120 | V | 1.63 | 157 | 47.52 | 28.46 | - | 12.52 | 0.82 | 32.40 | 40.00 | 7.60 |
| 41.66 | 120 | H | 1.34 | 100 | 46.25 | 28.46 | - | 12.52 | 0.82 | 31.13 | 40.00 | 8.87 |
|       |     |   |      |     |       |       |   |       |      |       |       |      |
|       |     |   |      |     |       |       |   |       |      |       |       |      |
|       |     |   |      |     |       |       |   |       |      |       |       |      |
|       |     |   |      |     |       |       |   |       |      |       |       |      |

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss



## SK TECH CO., LTD.

Page 29 of 30

**Table 6: Receiver spurious emission (Radiated) (continued)**

## ABOVE 1 GHz

| Frequency | Receiver Bandwidth | Pol.  | Antenna Height | Turn Table | Reading  | Amp Gain | ATT  | AF        | CL   | Actual     | Limit      | Margin |
|-----------|--------------------|-------|----------------|------------|----------|----------|------|-----------|------|------------|------------|--------|
| [MHz]     | [kHz]              | [V/H] | [m]            | [degree]   | [dB(μV)] | [dB]     | [dB] | [dB(1/m)] | [dB] | [dB(μV/m)] | [dB(μV/m)] | [dB]   |

### AVERAGE data, emission above 1 GHz

*No spurious emissions found*

## PEAK data, emission above 1 GHz

*No spurious emissions found*

**Margin (dB) = Limit – Actual**

[Actual = Reading -Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization  
2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPP), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.



## 5.8 RF Exposure

### 5.8.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

| Frequency Range                                     | Electric Field Strength [V/m] | Magnetic Field Strength [A/m] | Power Density [mW/cm <sup>2</sup> ] | Averaging Time [minute] |
|---|-------------------------------|-------------------------------|-------------------------------------|-------------------------|
| Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                         |
| 0.3 ~ 1.34  | 614                           | 1.63                          | *(100)                              | 30                      |
| 1.34 ~ 30   | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                      |
| 30 ~ 300  | 27.5                          | 0.073                         | 0.2                                 | 30                      |
| 300 ~ 1500  | /                             | /                             | f/1500                              | 30                      |
| 1500 ~ 15000  | /                             | /                             | <u>1.0</u>                          | <u>30</u>               |

f = frequency in MHz,

\* = Plane-wave equivalent power density

### MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm<sup>2</sup>]

P = power input to antenna [mW]

$$(\Rightarrow R = \sqrt{PG/4\pi S})$$

G = power gain of the antenna in the direction of interest  
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

| EUT: Maximum peak output power = 0.738 [mW] (= -1.32 dBm) & Antenna gain = 1.122 (= 0.5 [dBi]) |  |
|--|--|
| 100 mW, at 20 cm from an antenna 6 [dBi]   | $S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$ |
| 0.738 mW, at 20 cm from the antenna 0.5 [dBi]  | $S = PG/4\pi R^2 = 0.0002 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$   |
| 0.738 mW, at 2.5 cm from the antenna 0.5 [dBi]   | $S = PG/4\pi R^2 = 0.0105 \text{ [mW/cm}^2\text{]}$  |

### 5.8.2 RF Exposure Compliance Issue

July 02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f<sub>GHZ</sub> ≈ 25) mW, d < 2.5 cm, (120/f<sub>GHZ</sub> ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f<sub>GHZ</sub> ≈ 370) mW, d < 20 cm], where f<sub>GHZ</sub>: 2.44, d: distance to a person's body

The users manual for end users must include the following information in a prominent location "To comply with RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."