

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666  
Fax: +86 (0) 21 6191 5655  
Tino.Pan@sgs.com

Report No.: SHEMO10080104806  
Page 1 of 47

## **TEST REPORT**

**Application No. :** SHEMO10080104806

**Applicant:** Celsius X VI II

**FCC ID:** YVQ2N1

**Operating Frequency :** 2.402GHz to 2.480GHz

**Equipment Under Test (EUT):**

**EUT Name:** 2N1

**Brand Name:** Celsius X VI II

**Model No:** 2N1

**Marketing Name:** LeDIX

**Standards:** FCC PART 15 Subpart C

**Date of Receipt:** Aug 16, 2010

**Date of Test:** Aug 16, 2010 to Nov. 13, 2010

**Date of Issue:** Nov. 16, 2010

<b>Test Result :</b>	PASS *
----------------------	--------

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 2 of this report for further detail.



Tino Pan  
E&E Section Manager  
SGS-CSTC(Shanghai) Co., Ltd.



Jim Xu  
Project Engineer  
SGS-CSTC(Shanghai) Co., Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## 2 Test Summary

Test items	FCC Rules	Result
Occupied Bandwidth	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	Section 15.247(a)(1)	PASS
Hopping Channel Number	Section 15.247(a)(1)(iii)	PASS
Dwell Time	Section 15.247(a)(1)(iii)	PASS
Maximum Peak Output Power	Section 15.247(b)(1)	PASS
Conducted Emission	Section 15.207	PASS
Conducted Spurious Emission (30MHz to 25GHz)	Section 15.209 &15.247(d)	PASS
Radiated Spurious Emission (30MHz to 25GHz)	Section 15.209 &15.247(d)	PASS
Band Edges Measurement	Section 15.247 (d) &15.205	PASS
Radiated Emissions (9kHz-30MHz)	Section 15.209	PASS

### **3 Contents**

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DESCRIPTION OF SUPPORT UNITS.....	4
4.4 STANDARDS APPLICABLE FOR TESTING .....	5
4.5 TEST LOCATION .....	5
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.7 TEST FACILITY .....	6
<b>5 EQUIPMENTS USED DURING TEST.....</b>	<b>8</b>
<b>6 TEST RESULTS .....</b>	<b>10</b>
6.1 E.U.T. TEST CONDITIONS.....	10
6.2 CONDUCTED EMISSIONS AT MAINS TERMINALS.....	10
6.3 OCCUPIED BANDWIDTH.....	14
6.4 CARRIER FREQUENCIES SEPARATED .....	17
6.5 HOPPING CHANNEL NUMBER .....	20
6.6 DWELL TIME .....	21
6.7 MAXIMUM PEAK OUTPUT POWER .....	24
6.8 RF EXPOSURE COMPLIANCE REQUIREMENT .....	27
6.8.1 <i>Standard requirement</i> .....	27
6.8.2 <i>EUT RF Exposure</i> .....	27
6.9 CONDUCTED SPURIOUS EMISSIONS .....	28
6.10 RADIATED SPURIOUS EMISSIONS .....	32
6.10.1 <i>Radiated Emissions which fall in the restricted bands</i> .....	40
6.11 BAND EDGES REQUIREMENT.....	43
6.12 RADIATED EMISSIONS (9KHZ-30MHz).....	45

## 4 General Information

### 4.1 Client Information

Applicant: Celsius X VI II  
Address of Applicant: Paris Innovation République - Celsius X VI II  
18, rue du Faubourg du Temple  
75011 Paris - FRANCE  
Manufacturer: Celsius X VI II  
Address of Manufacturer: Paris Innovation République - Celsius X VI II  
18, rue du Faubourg du Temple  
75011 Paris - FRANCE

### 4.2 General Description of E.U.T.

EUT Name:	2N1
Brand Name:	Celsius X VI II
Model No:	2N1
Marketing Name:	LeDIX
FCC ID:	YVQ2N1
Number of Channels	79 Channels
Channel Separation	1 MHz
Type of Modulation	FHSS (Frequency Hopping Spread Spectrum)
Dwell time	Per channel is less than 0.4s.
Antenna Type	integral/dedicated
Battery Information:	Celsius battery DC 3.7V, Reference: PI00200001AA
Adapter information:	Model: FS5GU, Reference: PI00200005AA (Input :100-240V~ 50-60 Hz, 75mA, Output : 5.0 VDC, 600mA)
IMEI:	358751030001594, 358751012300040
Hardware Version:	V0x
Software Version:	EA, V19

### 4.3 Description of Support Units

None.

#### **4.4 Standards Applicable for Testing**

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15 Subpart C, ANSI C63.4:2003.

#### **4.5 Test Location**

All the tests except for *radiated emission(9kHz to 30MHz)* were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

The *radiated emission(9kHz to 30MHz)* test was performed at:

SIMT EMC Laboratory

No.716 Yinshan Road, Shanghai, P.R.China

#### **4.6 Other Information Requested by the Customer**

None.

## **4.7 Test Facility**

### SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2011-07-29.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2012-03-17.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2011-09-29.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3172 and C-3514 respectively. Date of Registration: 2009-11-30. Date of Expiry: 2012-03-17.

**SIMT EMC Laboratory**

The test facility is recognized, certified, or accredited by the following organizations:

**● NVLAP – Lab Code: 200632-0**

SIMT EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200632-0. Effective through December 31, 2010.

**● CNAL – LAB Code: L0134**

SIMT EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.

**● FCC – Registration No.: 142171**

SIMT EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 142171, December 9, 2002. With the above and NVLAP, SIMT is an authorized test laboratory for the DoC process.

## 5 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2010-6-4	2011-6-3
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2010-6-4	2011-6-3
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2010-4-11	2011-4-10
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2010-6-4	2011-6-3
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2009-10-9	2010-10-8
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2003P	--	2009-10-15	2010-10-14
7	CLAMP METER	FLUKE	316	86080010	2010-04-27	2011-04-26
8	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2009-10-15	2010-10-14
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2010-6-18	2011-6-17
10	DC power	KIKUSUI	PMC35-3	NF100260	2010-1-16	2011-1-15
11	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2010-5-8	2011-5-7
12	Power meter	Rohde & Schwarz	NRP	101641	2010-5-5	2011-5-4
13	CBT	Rohde & Schwarz	10082	EMC0070	2009-12-23	2010-12-22
14	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2010-6-4	2011-6-3
15	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2010-4-11	2011-4-10
16	Broadband Horn ANTENNA	SCHWARZBECK	BBHA9170	9170-373	2010-6-4	2011-6-3

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 9 of 47

17	SAC	Fronkonia	NA	NA	2010-06-04	2011-06-03
18	EMI TEST RECEIVER	R&S	ESI 26	838786/011	2009-12-25	2010-12-24
19	Loop Field Strength Measuring System	SCHWARZBECK	FMIB 1516	/	2009-12-01	2010-11-30

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## **6 Test Results**

### **6.1 E.U.T. test conditions**

Power supply:	AC adapter or battery inside.
Requirements:	15.31(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.
Type of antenna:	integral/dedicated
Operating Environment:	
Temperature:	20.0 -25.0 °C
Humidity:	38-52% RH
Atmospheric Pressure:	992 -1010 mbar

### **6.2 Conducted Emissions at Mains Terminals**


Test Requirement:	FCC Part 15.207
Test Method:	ANSI C63.4
Test Date:	Sep 27, 2010
Frequency Range:	150KHz to 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit
EUT Operation:	Test the EUT in Bluetooth mode connected with adapter

An initial pre-scan was performed on the live and neutral lines with peak detector.  
Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Test Setup:

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 11 of 47

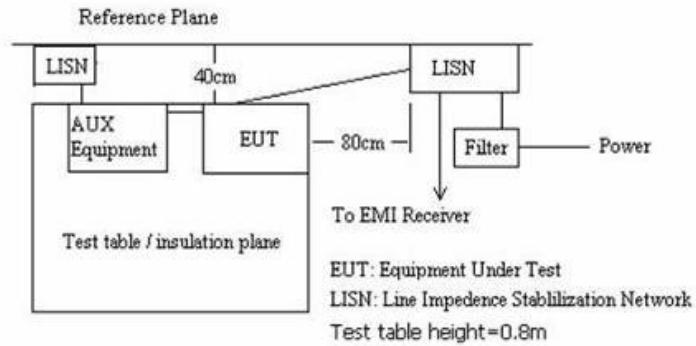

Live line:

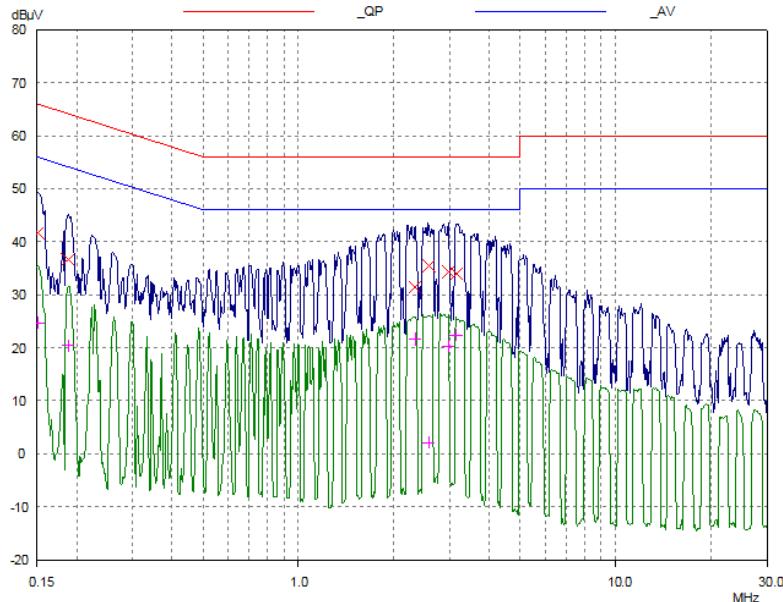

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 12 of 47

**Final Measurement Results**

Frequency MHz	QP Level dB $\mu$ V	QP Limit dB $\mu$ V	QP Delta dB
------------------	------------------------	------------------------	----------------

0.1512	41.68	65.93	24.25
0.18749	36.60	64.15	27.55
2.32548	31.49	56.00	24.51
2.57929	35.41	56.00	20.59
2.97708	34.33	56.00	21.67
3.14785	34.01	56.00	21.99

Frequency MHz	AV Level dB $\mu$ V	AV Limit dB $\mu$ V	AV Delta dB
------------------	------------------------	------------------------	----------------


0.1512	24.69	55.93	31.24
0.18749	20.46	54.15	33.69
2.32548	21.60	46.00	24.40
2.57929	2.05	46.00	43.95
2.97708	20.27	46.00	25.73
3.14785	22.36	46.00	23.64

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 13 of 47

Neutral line:

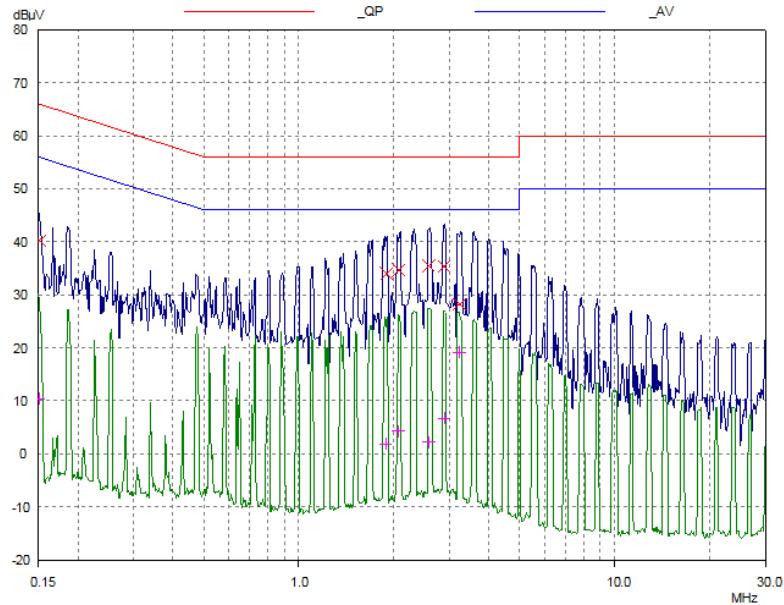

**Final Measurement Results**

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
0.1512	40.22	65.93	25.71
1.89034	34.01	56.00	21.99
2.0635	34.67	56.00	21.33
2.57929	35.55	56.00	20.45
2.88369	35.29	56.00	20.71
3.224	28.21	56.00	27.79

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
0.1512	10.36	55.93	45.57
1.89034	1.82	46.00	44.18
2.0635	4.23	46.00	41.77
2.57929	2.19	46.00	43.81
2.88369	6.66	46.00	39.34
3.224	19.21	46.00	26.79

### **6.3 Occupied Bandwidth**

Test Requirement: FCC Part 15 C  
Test Method: Based on FCC Part15 C Section 15.247  
Test Date: Sep 08, 2010  
Test Status: Test in fixing operating frequency at lowest, Middle, highest channel.  
Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centered on the hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20dB bandwidth. VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB points.

#### **Test result:**

Normal mode:


Test Channel	Bandwidth(kHz)
Low	735.00
Middle	735.00
High	745.00

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**


ReportNo.: SHEMO10080104806  
Page: 15 of 47

Result plot as follows:

Lowest Channel:

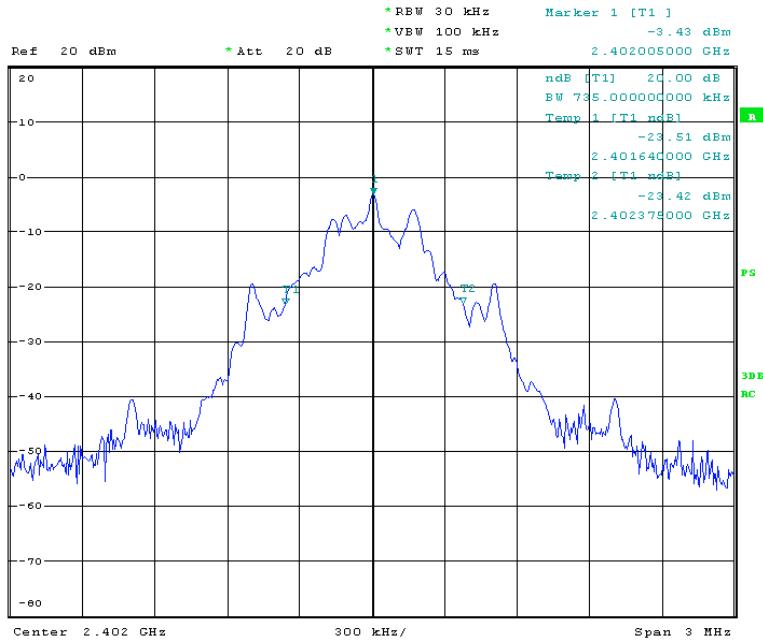

Middle Channel:

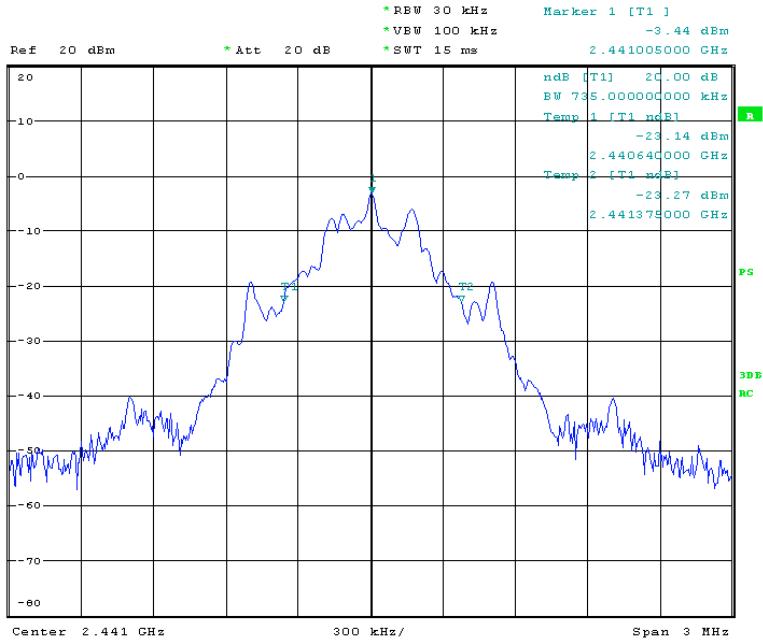


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 16 of 47

Highest Channel:

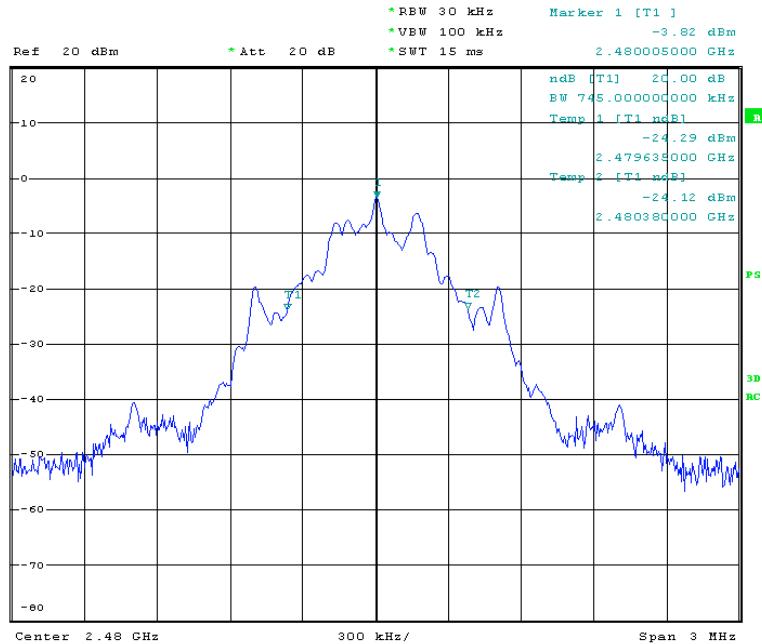

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

#### **6.4 Carrier Frequencies Separated**

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247

Test Date: Sep 08, 2010

Test requirements: Regulation 15.247(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Status: Test in hopping operating mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span (set 100 kHz). VBW  $\geq$  RBW, Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max,hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


Test result:

Test Channel	Carrier Frequencies Separated	PASS/FAIL
Lower Channels (channel 0 and channel 1)	1.0000MHz	PASS
Middle Channels (channel 39 and channel 40)	1.0000MHz	PASS
Upper Channels (channel 77 and channel 78)	1.0000MHz	PASS


**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 18 of 47

Low Channels:

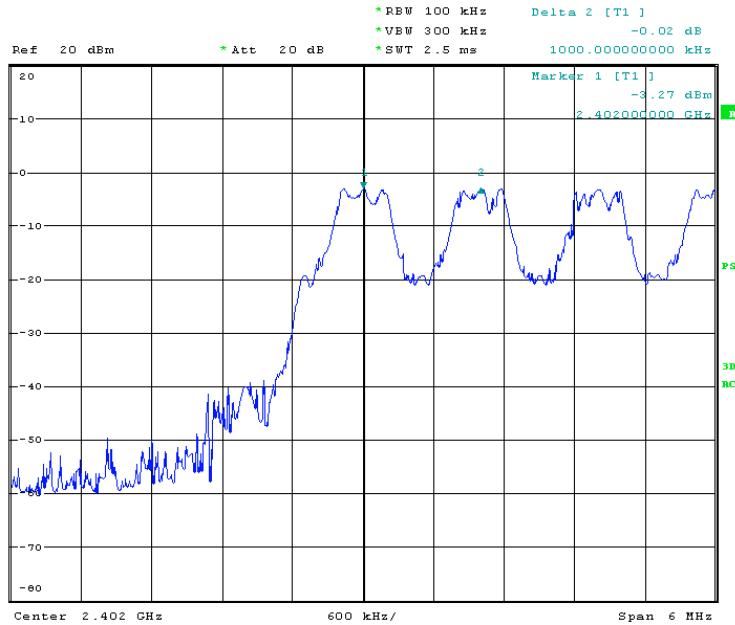

Middle Channels:

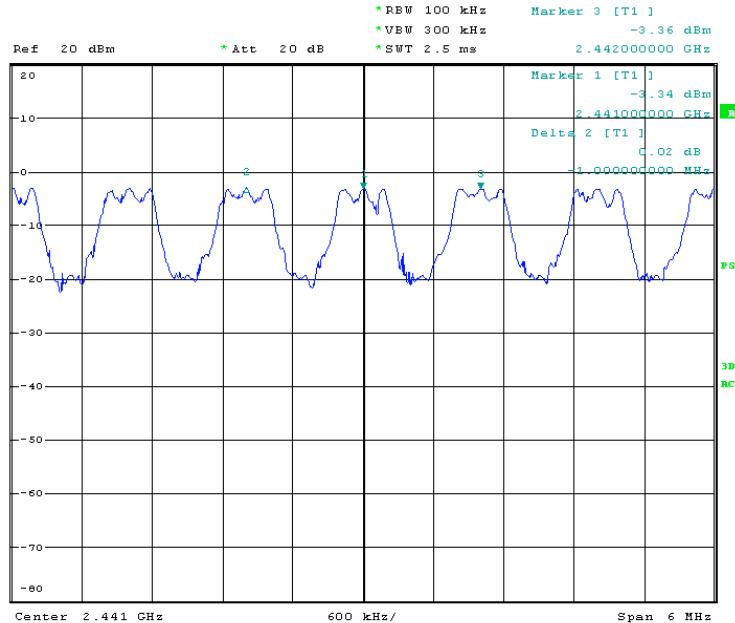


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 19 of 47

High Channels:

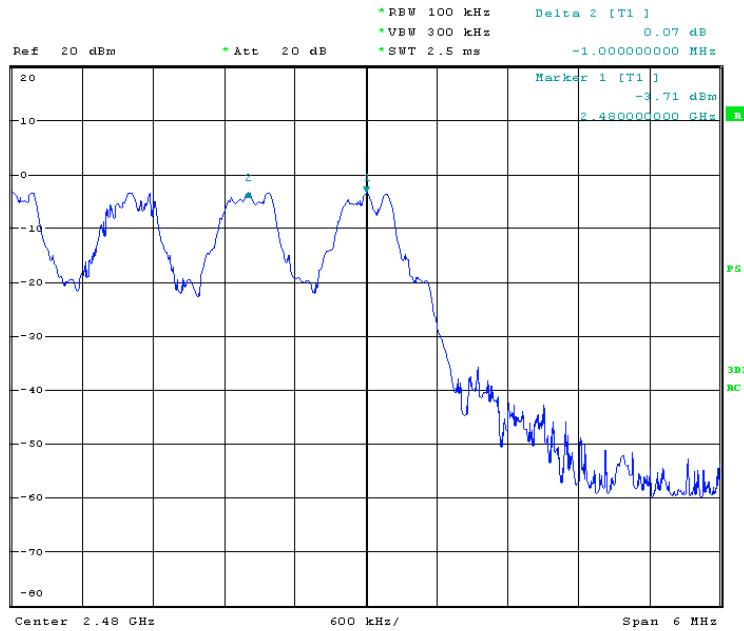

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## 6.5 Hopping Channel Number

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 C Section 15.247

Test Date: Sep 08, 2010


Requirements: Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Status: Test in hopping operating mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

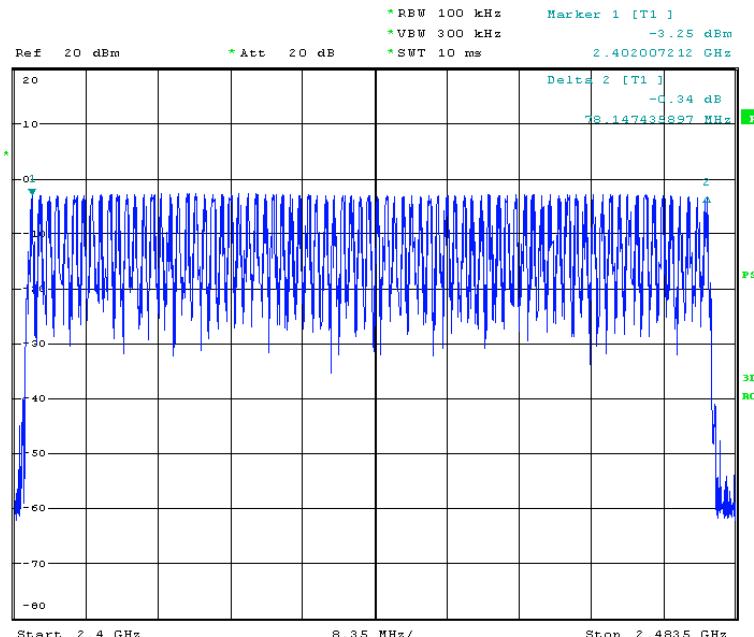

## **6.6 Dwell Time**

Test Requirement:	FCC Part 15 C
Test Method:	Based on FCC Part15 C Section 15.247
Test Date:	Sep 08, 2010
Test requirements:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Status:	Test in fixed channel operating mode.
Test Procedure:	<ol style="list-style-type: none"><li>1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.</li><li>2.Set spectrum analyzer span = 0. centered on a hopping channel;</li><li>3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;</li><li>4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.</li></ol>
Test Result:	Dwell time = Pulse width x (Hopping rate / Number of channels) x Period
Normal mode:	The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s
	<ol style="list-style-type: none"><li>1. Channel 0: 2.402GHz time slot = <math>2.9279 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312 \text{ ms}</math></li><li>2. Channel 39: 2.441GHz time slot = <math>2.9279 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312 \text{ ms}</math></li><li>3. Channel 78: 2.480GHz time slot = <math>2.9343 \text{ (ms)} * (1600/(6*79)) * 31.6 = 313 \text{ ms}</math></li></ol>


The results are not greater than 0.4 seconds.

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**


ReportNo.: SHEMO10080104806  
Page: 22 of 47

Please refer the graph as below:

Lowest channel (2.402 GHz):

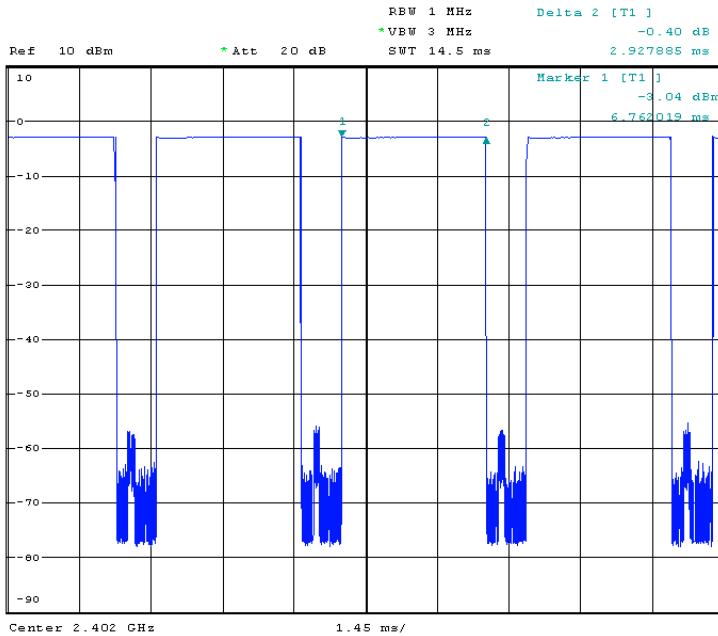

Middle Channel (2.441GHz)

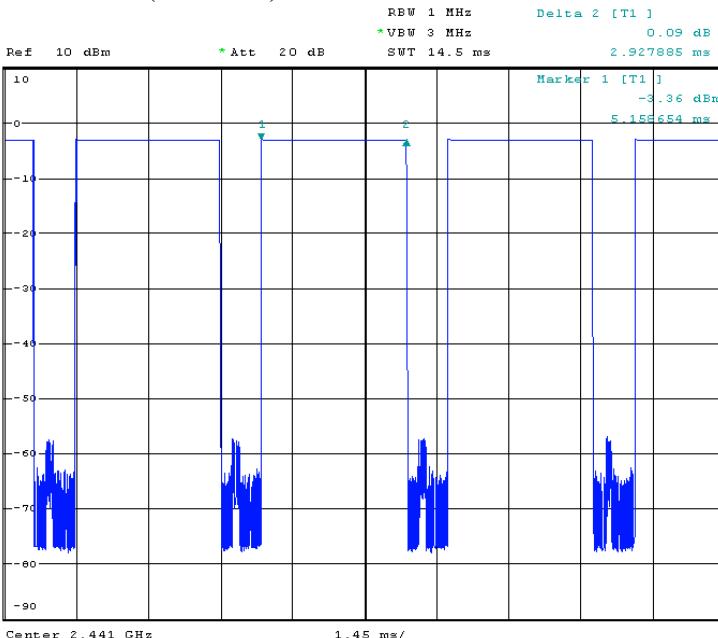


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 23 of 47


**Highest Channel (2.480GHz)**

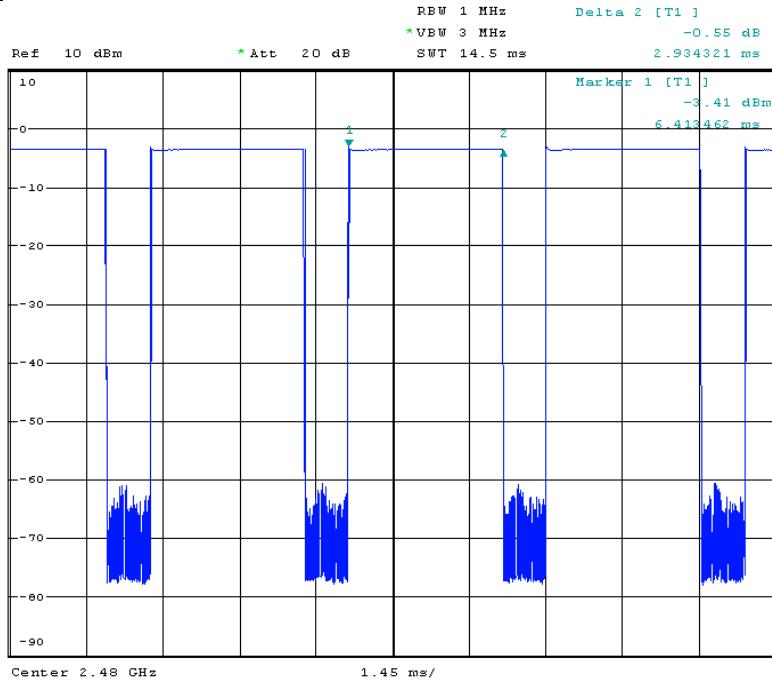

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## 6.7 Maximum Peak Output Power

Test Requirement: FCC Part 15.247  
 Test Method: Base on ANSI 63.4.  
 Test Date: Sep 28, 2010  
 Test Limit: Regulation 15.247 (b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.  
 Refer to the result "Hopping channel number" of this document. The 1 watt (30.0dBm) limit applies.  
 Test mode: Test in fixing frequency transmitting mode.  
 Test Configuration:

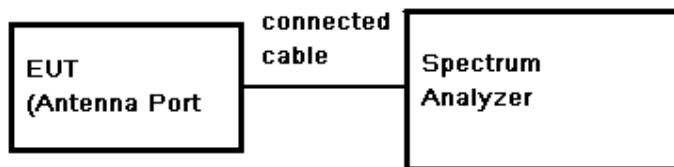

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1 MHz. VBW  $\geq$  RBW MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### Test Result:


Test Channel	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Attenuation (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2.402	-2.99	0.5	5.8	3.29	30.0	26.71
Middle	2.441	-3.01	0.5	5.9	3.39	30.0	26.61
High	2.480	-3.37	0.5	5.9	3.03	30.0	26.97

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**


ReportNo.: SHEMO10080104806  
Page: 25 of 47

Test result plot as follows:

Low Channel:

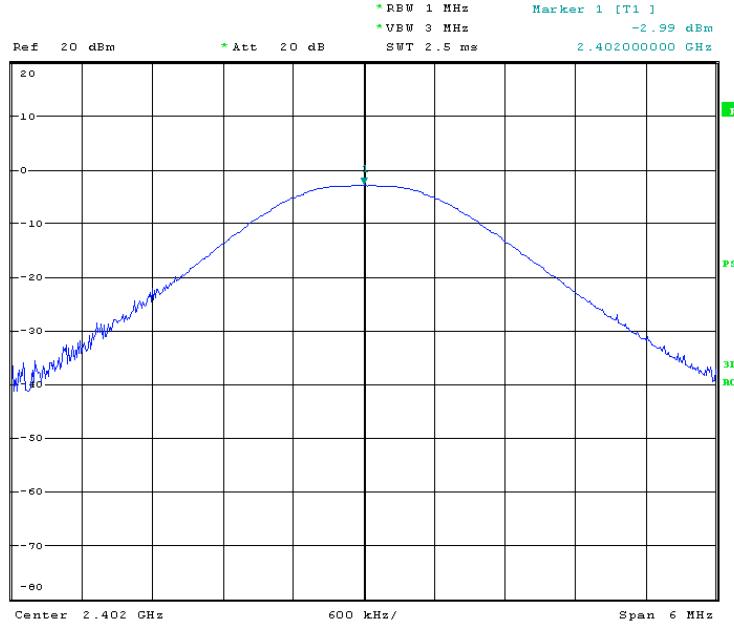

Middle Channel:

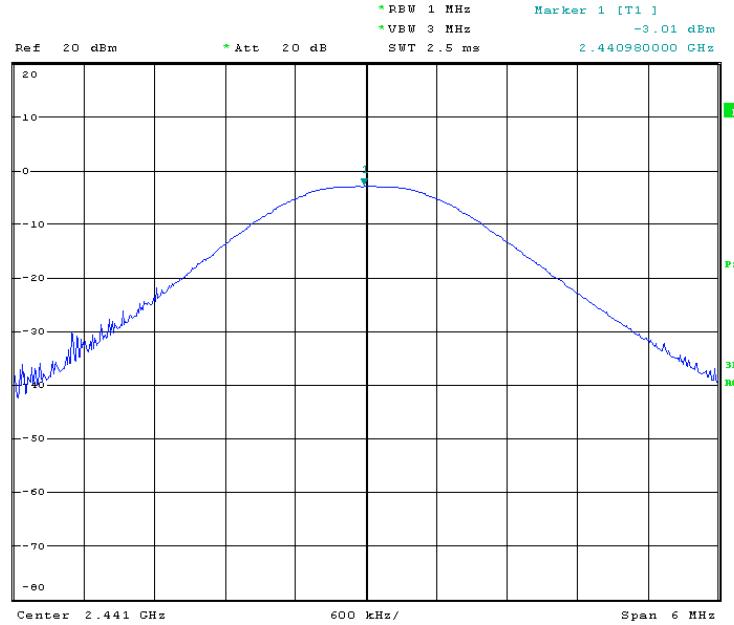


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 26 of 47

High Channel:

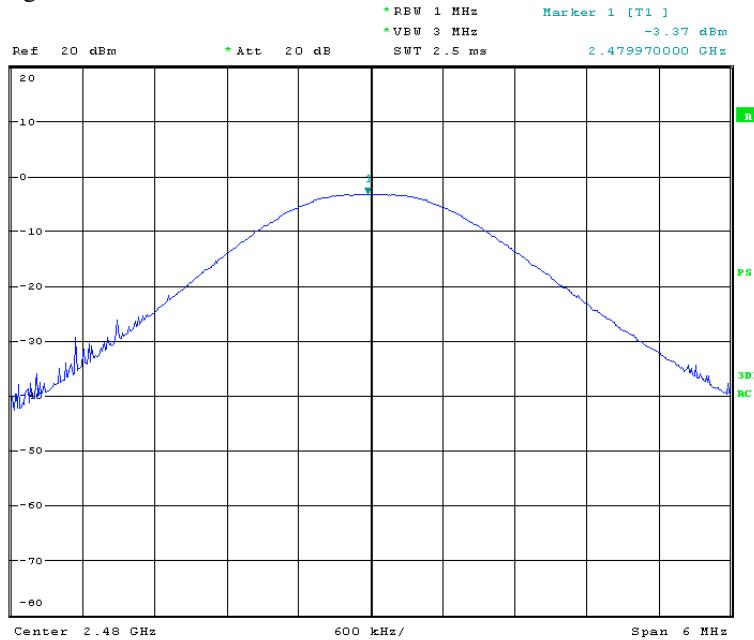

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## **6.8 RF Exposure Compliance Requirement**

### **6.8.1 Standard requirement**

15.247(b)(4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section. if transmitting antennas of directional gain greater than 6 dBi are used. the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1). (b)(2). and (b)(3) of this section. as appropriate. by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TCB Exclusion List (7 July 2002)

<b>Exposure category</b>	<b>low threshold</b>	<b>high threshold</b>
general population	(60/fGHz) mW. d < 2.5 cm (120/fGHz) mW. d $\geq$ 2.5 cm	(900/fGHz) mW. d < 20 cm
occupational	(375/fGHz) mW. d < 2.5 cm (900/fGHz) mW. d $\geq$ 2.5 cm	(2250/fGHz) mW. d < 20 cm

### **6.8.2 EUT RF Exposure**

The Max Conducted Peak Output Power is 3.39dBm;  
And the max antenna gain is -7.68 dBi in the actual used.

According to the formula. calculate the EIRP test result:

$$\text{EIRP} = 3.39 + (-7.68) = -4.29 \text{ dBm} \text{ (1)}$$

SAR requirement:


$$S = 60 / f(\text{GHz}) = 60 / 2.4 = 25 \text{ mW} = 14.0 \text{ dBm} \text{ (2)};$$

$$\text{ (1)} < \text{ (2)}.$$

So the SAR report is not required.

## **6.9 Conducted Spurious Emissions**

Test Requirement: FCC Part 15.247  
Test Method: Based on FCC Part15 C Section 15.247&15.209:  
Test Date: Sep 28, 2010  
Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.  
Test Status: Test the low, Middle, high channel transmitting mode.  
Test Configuration:

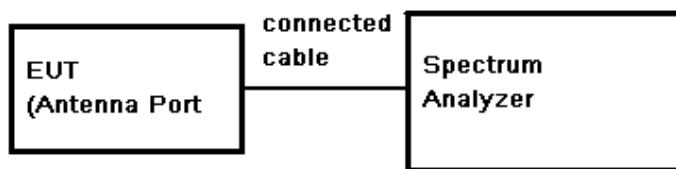


### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 29 of 47


Low Channel:

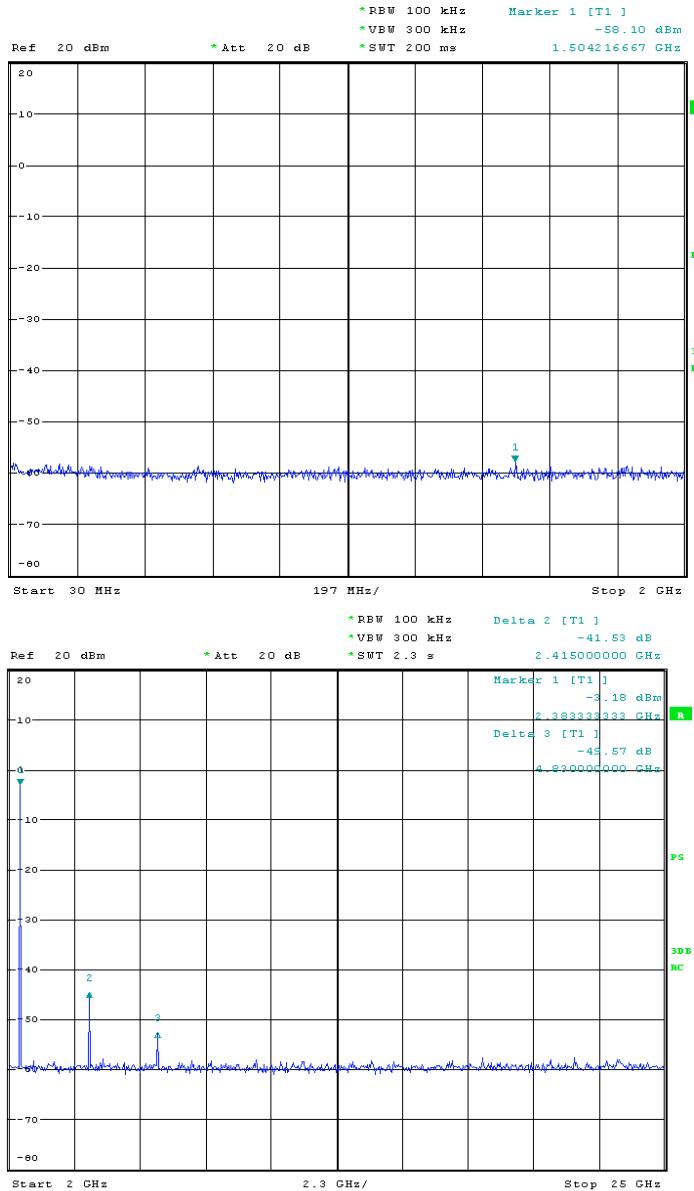

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 30 of 47


Middle Channel:

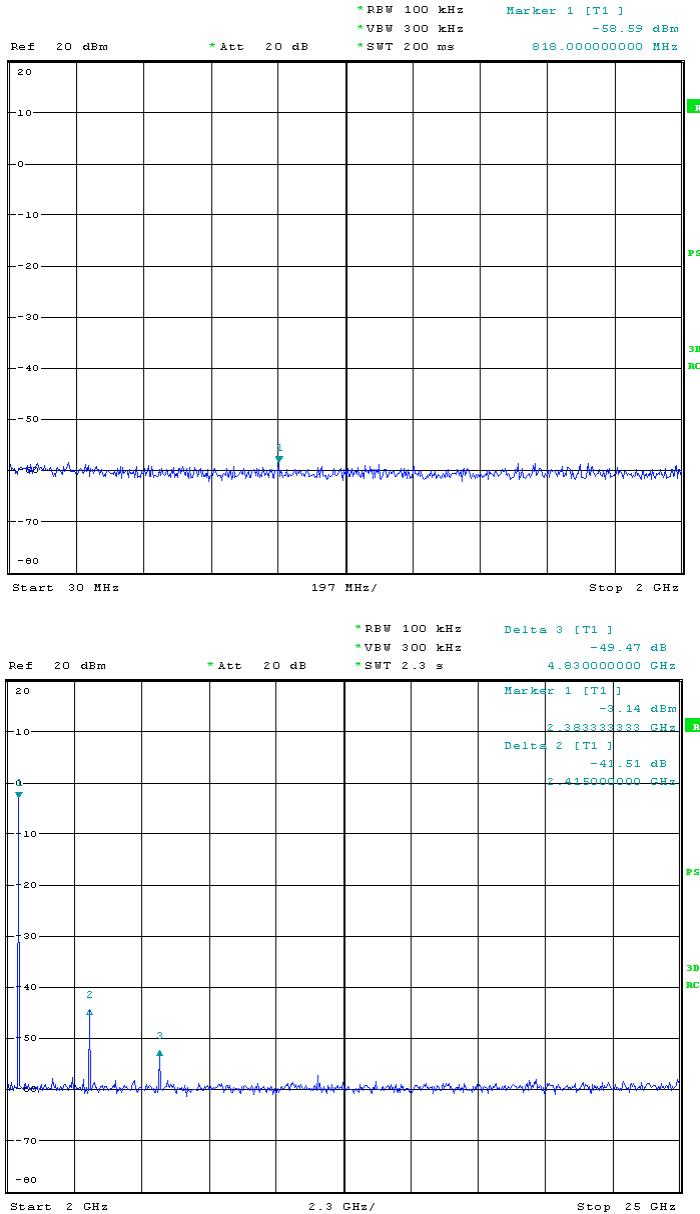

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 31 of 47

High Channel:

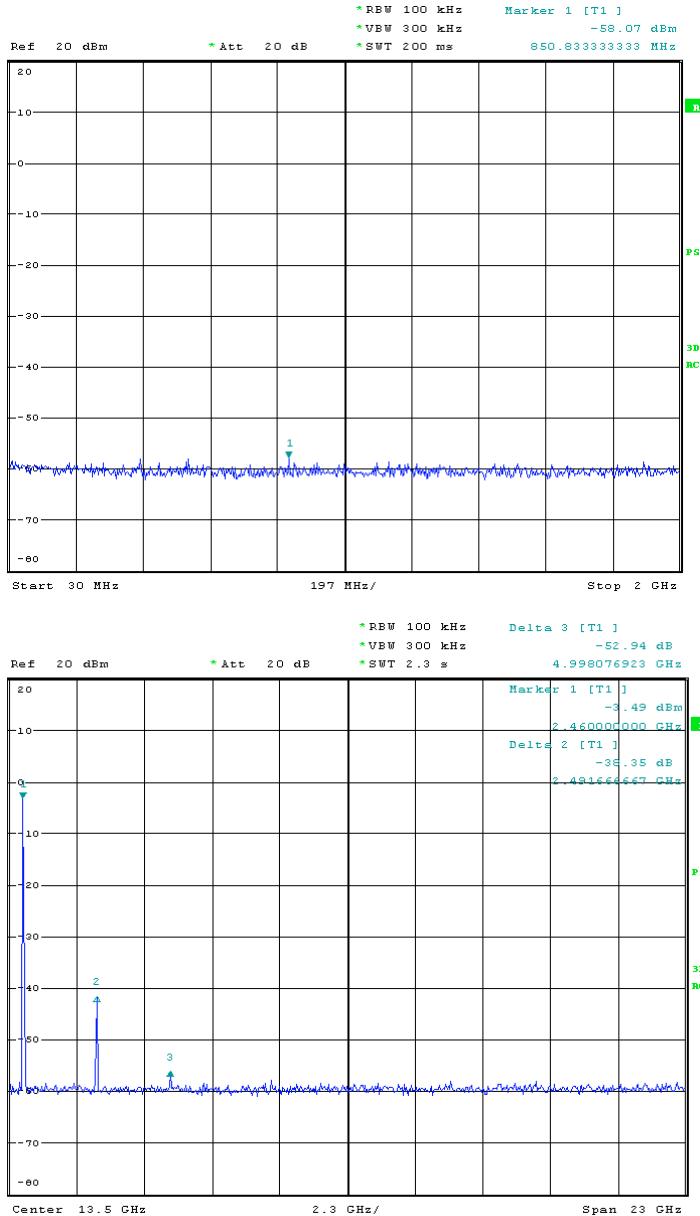


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


## **6.10 Radiated Spurious Emissions**

Test Requirement:	FCC 15.247(d) & 15.209
Test Method:	ANSI C63.4 section 8 & 13
Test Date:	Sep 28, 2010 to Sep 29, 2010
Test Status:	Test low channel, Middle, high channel transmitting mode; Receiver mode
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
	Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz).
	For PK value: RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold
	For AV value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function = peak Trace = max hold
	Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz  43.5 dB $\mu$ V/m between 88MHz & 216MHz  46.0 dB $\mu$ V/m between 216MHz & 960MHz  54.0 dB $\mu$ V/m above 960MHz
15.247(d) limit:	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that  Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration:

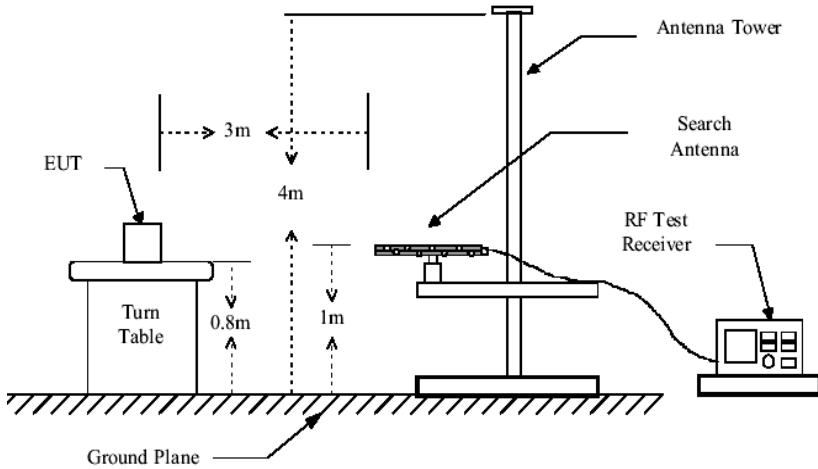

Below 1GHz radiated emissions test configuration

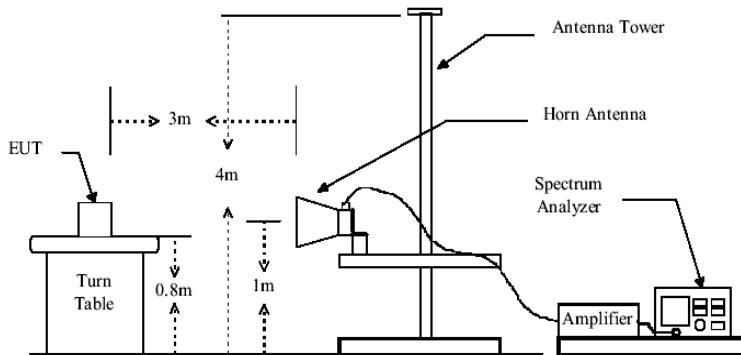

Above 1GHz radiated emissions test configuration

**Test Procedure:** The procedure used was ANSI Standard C63.4-2001. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Pre-test were performed for there spatial orthogonal(X, Y, Z), the worst test data (X orthogonal)was submitted.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
 Page: 34 of 47

Transmitter mode:

Test in Channel Low in transmitting status- Vertical polarization

**30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement**

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.0	14.2	0.18	24.6	25.58	15.36	40.0
200.0	10.9	0.25	24.5	27.50	14.15	43.5
830.0	22.8	0.42	24.0	28.51	27.73	46.0

**1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement**

**Peak Measurement**

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	47.8	36.9	74.0
7206.00	36.0	1.7	0.8	43.1	45.6	41.0	74.0
9608.00	37.8	2.2	0.9	43.9	47.5	44.5	74.0

**Average Measurement**

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	37.6	26.7	54.0
7206.00	36.0	1.7	0.8	43.1	35.7	31.1	54.0
9608.00	37.8	2.2	0.9	43.9	37.2	34.2	54.0

Remark: No other radiation has been found.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
 Page: 35 of 47

Test in Channel Low in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions,Quasi-Peak Measurement:

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.18	24.6	25.65	15.43	40.0
200.00	10.9	0.25	24.5	27.67	14.32	43.5
830.00	22.8	0.42	24.0	28.59	27.81	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	46.0	35.1	74.0
7206.00	36.0	1.7	0.8	43.1	44.7	40.1	74.0
9608.00	37.8	2.2	0.9	43.9	46.0	43.0	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	35.9	25.0	54.0
7206.00	36.0	1.7	0.8	43.1	35.4	30.8	54.0
9608.00	37.8	2.2	0.9	43.9	36.8	33.8	54.0

Remark: No other radiation has been found.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 36 of 47

Test in Channel Middle in transmitting status- Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.18	24.6	25.77	15.55	40.0
200.00	10.9	0.25	24.5	27.73	14.38	43.5
830.00	22.8	0.42	24.0	28.55	27.77	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	47.2	36.3	74.0
7323.00	36.2	1.8	0.6	43.1	45.5	40.9	74.0
9764.00	38.1	2.3	0.9	43.9	46.3	43.3	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	36.9	26.0	54.0
7323.00	36.2	1.8	0.6	43.1	35.7	31.1	54.0
9764.00	38.1	2.3	0.9	43.9	36.5	33.5	54.0

Remark: No other radiation has been found.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 37 of 47

Test in Channel Middle in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.1	24.6	25.88	15.66	40.0
200.00	10.9	0.2	24.5	27.67	14.32	43.5
830.00	22.8	0.4	24.0	28.44	27.66	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	45.7	34.8	74.0
7323.00	36.2	1.8	0.6	43.1	45.2	40.6	74.0
9764.00	38.1	2.3	0.9	43.9	44.8	41.8	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	36.0	25.1	54.0
7323.00	36.2	1.8	0.6	43.1	35.3	30.7	54.0
9764.00	38.1	2.3	0.9	43.9	35.3	32.3	54.0

Remark: No other radiation has been found.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
 Page: 38 of 47

Test in Channel High in transmitting status- Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.2	24.6	25.65	15.43	40.0
200.00	10.9	0.3	24.5	28.00	14.65	43.5
830.00	22.8	0.4	24.0	28.32	27.54	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	46.5	35.6	74.0
7440.00	36.4	2.0	0.7	43.2	46.0	41.4	74.0
9920.00	38.3	2.6	1.0	44.1	45.3	42.3	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	37.3	26.4	54.0
7440.00	36.4	2.0	0.7	43.2	35.0	30.4	54.0
9920.00	38.3	2.6	1.0	44.1	35.0	32.0	54.0

Remark: No other radiation has been found.

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 39 of 47

Test in Channel High in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.2	24.6	25.97	15.75	40.0
200.00	10.9	0.3	24.5	27.97	14.62	43.5
830.00	22.8	0.4	24.0	28.75	27.97	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	45.5	34.6	74.0
7440.00	36.4	2.0	0.7	43.2	44.5	39.9	74.0
9920.00	38.3	2.6	1.0	44.1	44.0	41.0	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	35.3	24.4	54.0
7440.00	36.4	2.0	0.7	43.2	35.1	39.5	54.0
9920.00	38.3	2.6	1.0	44.1	34.4	31.4	54.0

Remark: No other radiation has been found.

### **6.10.1 Radiated Emissions which fall in the restricted bands**

Test Requirement:

Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method:

Base on ANSI 63.4

Test Date:

Sep 29, 2010

Measurement Distance:

3m (Semi-Anechoic Chamber)

Limit:

40.0 dB $\mu$ V/m between 30MHz & 88MHz;  
43.5 dB $\mu$ V/m between 88MHz & 216MHz;  
46.0 dB $\mu$ V/m between 216MHz & 960MHz;  
54.0 dB $\mu$ V/m above 960MHz.

Detector:

For PK value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW  $\geq$  RBW; Sweep = auto  
Detector function = peak  
Trace = max hold  
For AV value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW = 10Hz; Sweep = auto  
Detector function = peak  
Trace = max hold

**SGS-CSTC Standards**  
**Technical Services**  
**(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 41 of 47

Test Result:

Low Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)
2390.000	27.88	1.1	0.5	42.4
2483.500	28.74	1.2	0.6	42.6

Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
43.15	34.39	30.23	21.47
44.25	34.6	32.19	22.54

Middle Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)
2390.000	27.88	1.1	0.5	42.4
2483.500	28.74	1.2	0.6	42.6

Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
43.84	34.38	30.92	21.46
43.59	34.13	31.53	22.07

High Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)
2390.000	27.88	1.1	0.5	42.4
2483.500	28.74	1.2	0.6	42.6

Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 42 of 47

43.81	34.23	30.89	21.31
43.17	33.10	31.11	21.04

Remark: No any other emission which fall in restricted bands can be detected and be reported.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

## **6.11 Band Edges Requirement**

Test Requirement:	FCC Part 15 C
Test Method:	Based on ANSI 63.4
	Operation within the band 2400 – 2483.5 MHz
Test Date:	Sep 28, 2010
Requirements:	Section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Method of Measurement:	Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

The graph as below. represents the emissions take for this device.


**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 44 of 47

Low Channel:

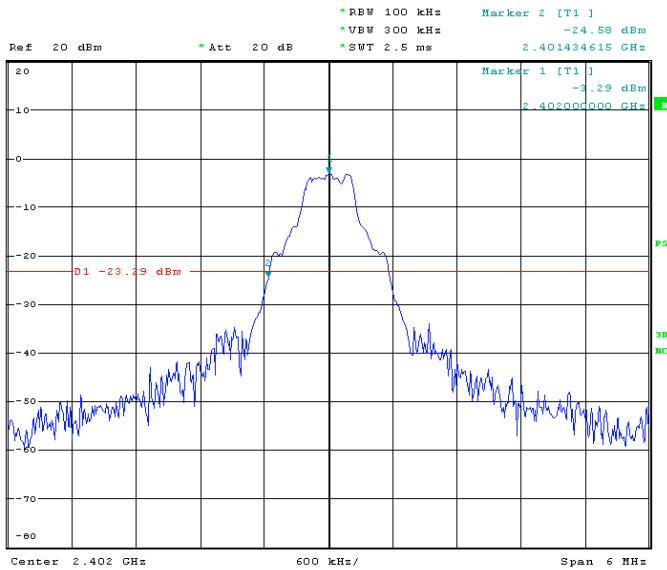

High Channel:

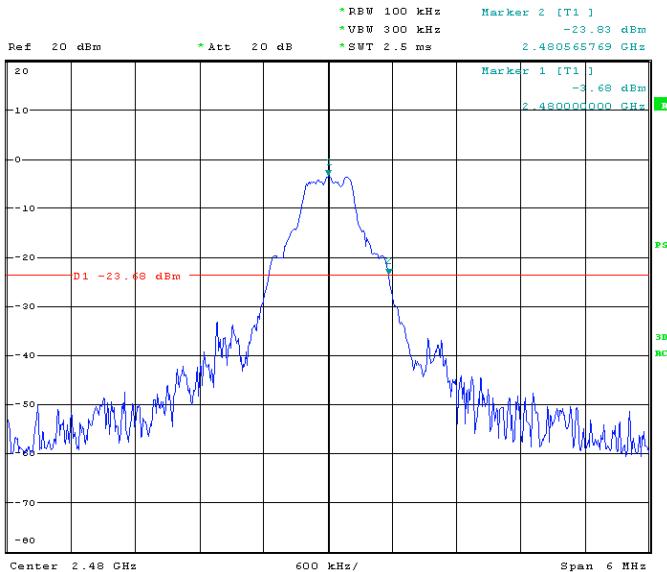

## **6.12 Radiated Emissions (9kHz-30MHz)**

Test Requirement: Section 15.209

Test Method: ANSI C63.4

Test Date: Nov. 13, 2010

Test site: Measurement Distance: 10m

15.209 Limit:	Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
	0.009 - 0.490	2400/F(kHz)	300
	0.490 - 1.705	24000/F(kHz)	30
	1.705 - 30.0	30	30


Note: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Test data as below.

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 46 of 47

Polarisation: X direction:

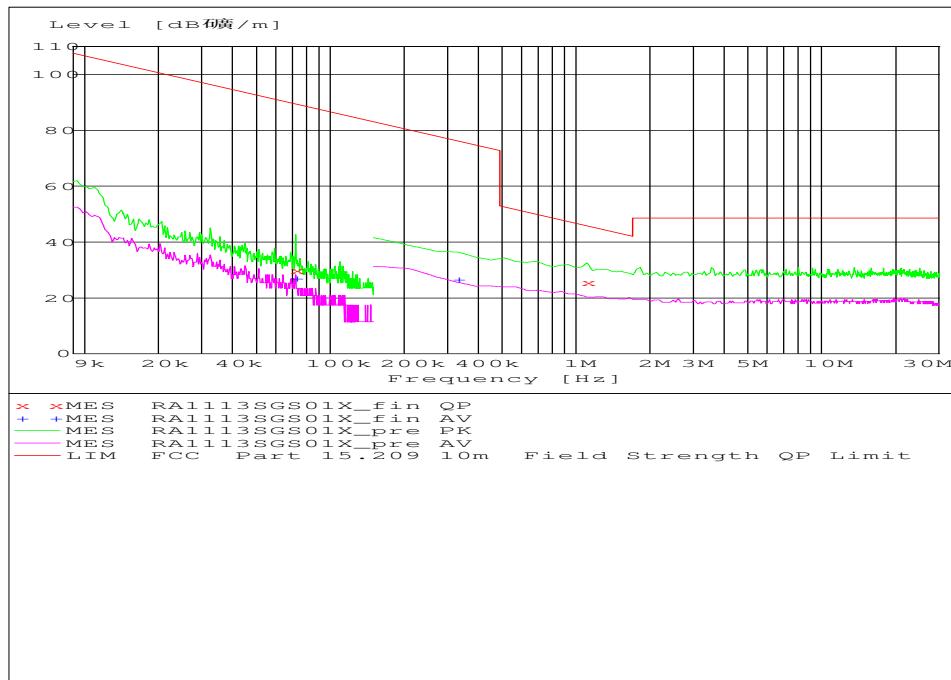

Freq. (MHz)	QP Reading Level (dB $\mu$ V)	Cable Loss (dB)	Antenna Factor (dB/m)	QP (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
0.072295	9.58	0.03	20.1	29.71	89.5	59.79
1.107114	5.03	0.50	20.0	25.53	45.8	20.27


Note: QP = Reading Level + Cable Loss + Antenna Factor

Margin = Limit - QP

**SGS-CSTC Standards  
Technical Services  
(Shanghai)Co., Ltd.**

ReportNo.: SHEMO10080104806  
Page: 47 of 47

Polarisation: Y direction:

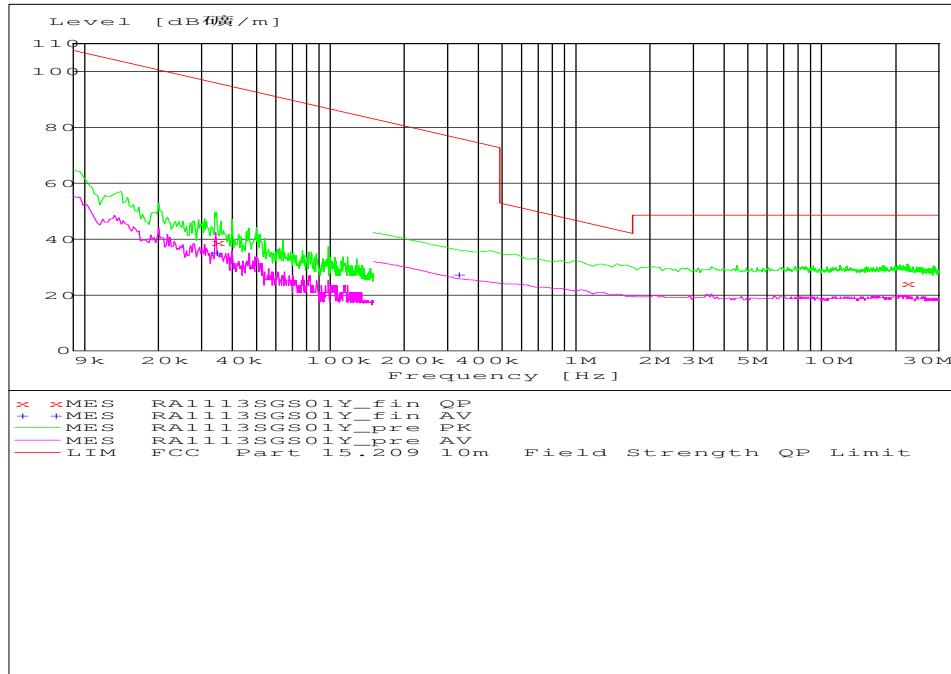

Freq. (MHz)	QP Reading Level (dB $\mu$ V)	Cable Loss (dB)	Antenna Factor (dB/m)	QP (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
0.034431	18.94	0.05	19.85	38.84	96.0	57.16
22.163627	3.38	0.52	20.2	24.10	48.6	24.5

Note: QP = Reading Level + Cable Loss + Antenna Factor

Margin = Limit - QP

*End of Report*