

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1410083-E301

Page 1 of 25

FCC REPORT

Applicant: Shenzhen Firstview Electronic Co. Ltd.

Address of Applicant: 3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main

Road, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 7 inch Tablet PC

Model No.: VTA0701, VTA0701E, M720-A

FCC ID: YW5VTA0701

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2013

Date of sample receipt: October 31, 2014

Date of Test: October 31, 2014 To November 6, 2014

Date of report issued: November 6, 2014

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1410083-E301 Page 2 of 25

2 Version

Version No.	Date	Description
00	November 6, 2014	Original

Prepared By:	Jason	Date:	November 6, 2014
	Project Engineer		
Check By:	Canyo	Date:	November 6, 2014
	Reviewer		



Report No.: EBO1410083-E301 Page 3 of 25

3 Contents

			Page
1	COV	ER PAGE	1
2	VER	RSION	2
_			
3	CON	NTENTS	3
4	TES	T SUMMARY	4
5	GEN	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5 5.6	TEST FACILITY TEST LOCATION	
	5.6 5.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
_			
6	TES	ST INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	10
	7.1	ANTENNA REQUIREMENT:	10
	7.2	CONDUCTED EMISSIONS	11
	7.3	RADIATED EMISSION METHOD	
	7.3.	· · · · · · · · · · · · · · · · · · ·	
	7.3.2	-1	
	7.3.3	5	
	7.4	20DB OCCUPY BANDWIDTH	
8	TES	ST SETUP PHOTO	24
9	EUT	CONSTRUCTIONAL DETAILS	25



Report No.: EBO1410083-E301

Page 4 of 25

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable.



Report No.: EBO1410083-E301 Page 5 of 25

5 General Information

5.1 Client Information

Applicant:	Shenzhen Firstview Electronic Co. Ltd.
Address of Applicant:	3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main Road, Baoan
	District, Shenzhen, China
Manufacturer:	Shenzhen Firstview Electronic Co., Ltd.
Address of Manufacturer:	F3-6, Block B, Huafeng 1st Technology Zone, Baoan Main Road, Baoan
	District, Shenzhen, P.R.China

5.2 General Description of EUT

Product Name:	7 inch Tablet PC	
Model No.:	VTA0701, VTA0701E, M720-A	
Test Model No.:	VTA0701	
Operation Frequency:	2402MHz~2480MHz	
Channel numbers:	79	
Channel separation:	1MHz	
Modulation type:	GFSK, Pi/4QPSK, 8DPSK	
Antenna Type:	Integral Antenna	
Antenna gain:	3.5dBi (declare by Applicant)	
Power supply:	Adapter:	
	Model:K-E30501500U1	
	Input:100-240V~,50/60Hz, 0.35A max	
	Output: 5V, 1500mA	
	Or	
	DC 3.7V Li-ion Battery	



Report No.: EBO1410083-E301 Page 6 of 25

Operation I	Operation Frequency each of channel								
Channel Frequency Channel Frequency Channel Frequency Channel									
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz		
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz		
						:			
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz		
20	2421MHz	40	2441MHz	60	2461MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



Report No.: EBO1410083-E301

Page 7 of 25

5.3 Test mode

Transmitting mode Turn off the WiFi and keep the Bluetooth in continuously transmitting mode

Remark: 1.During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2. Worst case GFSK modulation

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	Х	Υ	Z
Field Strength(dBuV/m)	97.22	100.17	96.83

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":

Y axis (see the test setup photo)

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

5.7 Other Information Requested by the Customer

None.



Report No.: EBO1410083-E301

Page 8 of 25

6 Test Instruments list

Rad	Radiated Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2013	Mar. 28 2015			
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A			
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 5, 2013	Dec. 4 2014			
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 01 2014	June 30 2015			
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 01 2014	June 30 2015			
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	July 01 2014	June 30 2015			
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015			
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2014	Mar. 27 2015			
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2014	Mar. 27 2015			
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2014	Mar. 27 2015			
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2014	Mar. 27 2015			
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 01 2014	June 30 2015			
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 01 2014	June 30 2015			
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	July 01 2014	June 30 2015			
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2014	Mar. 27 2015			

Con	Conducted Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2015			
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015			
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015			
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015			
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015			
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015			
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			



Report No.: EBO1410083-E301

Page 9 of 25

Gen	General used equipment:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	Barometer	ChangChun	DYM3	GTS257	July 01 2014	June 30 2015			



Report No.: EBO1410083-E301

Page 10 of 25

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The antenna is Integral antenna, the best case gain of the antenna is 3.5dBi





Report No.: EBO1410083-E301

Page 11 of 25

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	•							
Test Method:	ANSI C63.4:2003								
Test Frequency Range:	150KHz to 30MHz								
Class / Severity:	Class B								
Receiver setup:	RBW=9KHz, VBW=30KHz, St	weep time=auto							
Limit:	Francisco (MALL)	Limit (c	dBuV)						
	Frequency range (MHz)	Quasi-peak	Average						
	0.15-0.5	66 to 56*	56 to 46*						
	0.5-5	56	46						
	5-30	60	50						
	* Decreases with the logarithm of the frequency.								
Test setup:	Reference Plane		-						
	AUX Filter AC power Equipment E.U.T Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m								
Test procedure:	 The E.U.T and simulators a line impedance stabilization 50ohm/50uH coupling impedance. The peripheral devices are LISN that provides a 50ohm termination. (Please refer to photographs). 	n network (L.I.S.N.). The edance for the measuri also connected to the m/50uH coupling imped	nis provides a ng equipment. main power through a dance with 50ohm						
	3. Both sides of A.C. line are interference. In order to find positions of equipment and according to ANSI C63.4: 2	d the maximum emission of the interface cab	on, the relative bles must be changed						
Test Instruments:	Refer to section 6.0 for details	3							
Test mode:	Refer to section 5.3 for details	3							
Test results:	Pass								


Measurement data:



Report No.: EBO1410083-E301

Page 12 of 25



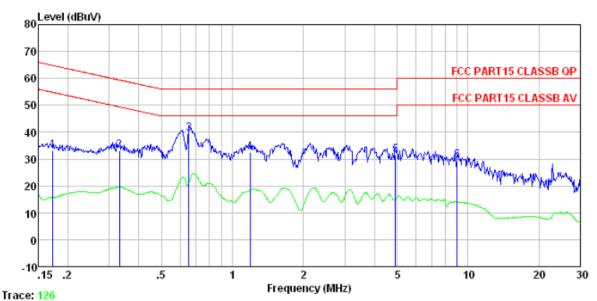

Condition

: FCC PART15 CLASSB QP LISN-2013 LINE


conai		Read Level	Cable		Limit	Over		
	MHz	dBu₹	dB	dBuV	-dBuV	dB		
1 2 3 4 5 6	1.191 4.926		0.10 0.13 0.13 0.15	33. 23 39. 36 32. 53 31. 63	56.00 56.00 56.00	-26.17 -16.64 -23.47 -24.37	QP QP QP QP	



Report No.: EBO1410083-E301

Page 13 of 25



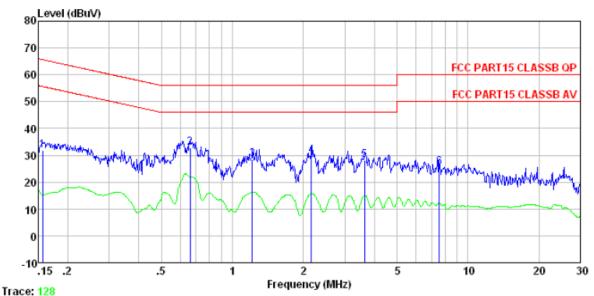

Condition

: FCC PART15 CLASSB QP LISN-2013 NEUTRAL

	Freq		Loss		Limit		Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1		31.75		31.94			-
2 3		32. 79 28. 23	0.13 0.13	32. 99 28. 44			
4		29.48		29. 72 28. 20			
6		27. 91 25. 18		25. 55			

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1410083-E301

Page 14 of 25

7.3 Radiated Emission Method

7.3 Radia	.3 Radiated Emission Method									
Test Re	equirement:	FCC Part15 C S	Section 15.20	9						
Test Me	ethod:	ANSI C63.4:200	03							
Test Fre	equency Range:	30MHz to 25GH	łz							
Test site	e:	Measurement D	Distance: 3m							
Receive	er setup:	Frequency	Detector	RBW	VBW	Remark				
		30MHz- 1GHz	Quasi-pea	k 120KHz	300KHz	Quasi-peak Value				
		Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Above IGHZ	Peak	1MHz	10Hz	Average Value				
Limit:		Freque	ency	Limit (dBu\	//m @3m)	Remark				
(Field st	trength of the	2400MHz-24	183.5MHz	94.0		Average Value				
fundam	ental signal)			114.	00	Peak Value				
Limit:		Frequency Limit (dBuV/m @3m) Remark								
(Spurio	us Emissions)	30MHz-8		40.0		Quasi-peak Value				
` .	,	88MHz-2		43.		Quasi-peak Value				
		216MHz-9 960MHz-		46.0		Quasi-peak Value Quasi-peak Value				
				54.00 54.00		Average Value				
		Above 1	GHz	74.0		Peak Value				
Limit: (band e	edge)	harmonics, shal fundamental or	II be attenuat to the genera	ed by at least al radiated em	50 dB belov	bands, except for w the level of the in Section 15.209,				
Test set	tup:	fundamental or to the general radiated emission limits in Section 15.209 whichever is the lesser attenuation. Below 1GHz Antenna Tower Search Antenna RF Test Receiver Ground Plane Above 1GHz								



Report No.: EBO1410083-E301 Page 15 of 25

	Antenna Tower Horn Antenna Spectrum Analyzer Turn Table Amplifier
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna
	tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:



Report No.: EBO1410083-E301

Page 16 of 25

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	93.78	27.58	5.39	30.18	96.57	114.00	-17.43	Vertical
2402.00	91.37	27.58	5.39	30.18	94.16	114.00	-19.84	Horizontal
2441.00	97.25	27.55	5.43	30.06	100.17	114.00	-13.83	Vertical
2441.00	94.26	27.55	5.43	30.06	97.18	114.00	-16.82	Horizontal
2480.00	95.39	27.52	5.47	29.93	98.45	114.00	-15.55	Vertical
2480.00	92.44	27.52	5.47	29.93	95.50	114.00	-18.50	Horizontal

Average value:

		1						
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	82.55	27.58	5.39	30.18	85.34	94.00	-8.66	Vertical
2402.00	80.17	27.58	5.39	30.18	82.96	94.00	-11.04	Horizontal
2441.00	86.35	27.55	5.43	30.06	89.27	94.00	-4.73	Vertical
2441.00	83.50	27.55	5.43	30.06	86.42	94.00	-7.58	Horizontal
2480.00	84.20	27.52	5.47	29.93	87.26	94.00	-6.74	Vertical
2480.00	81.40	27.52	5.47	29.93	84.46	94.00	-9.54	Horizontal



Report No.: EBO1410083-E301

Page 17 of 25

7.3.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
34.16	39.74	14.31	0.60	32.06	22.59	40.00	-17.41	Vertical
51.30	38.59	15.19	0.78	31.96	22.60	40.00	-17.40	Vertical
107.89	37.52	14.44	1.26	31.80	21.42	43.50	-22.08	Vertical
217.54	43.34	13.10	1.95	32.15	26.24	46.00	-19.76	Vertical
406.09	37.49	17.18	2.88	31.87	25.68	46.00	-20.32	Vertical
758.04	37.24	21.53	4.31	31.27	31.81	46.00	-14.19	Vertical
39.44	37.46	15.44	0.65	32.06	21.49	40.00	-18.51	Horizontal
85.90	40.50	12.60	1.08	31.74	22.44	40.00	-17.56	Horizontal
173.21	45.38	11.16	1.70	32.06	26.18	43.50	-17.32	Horizontal
228.49	45.68	13.57	2.01	32.15	29.11	46.00	-16.89	Horizontal
517.25	37.42	18.94	3.38	31.46	28.28	46.00	-17.72	Horizontal
790.62	37.43	21.96	4.42	31.31	32.50	46.00	-13.50	Horizontal



Report No.: EBO1410083-E301

Page 18 of 25

■ Above 1GHz

Test channel: Lowest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.41	31.78	8.60	32.09	49.70	74.00	-24.30	Vertical
7206.00	31.23	36.15	11.65	32.00	47.03	74.00	-26.97	Vertical
9608.00	30.94	37.95	14.14	31.62	51.41	74.00	-22.59	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	44.51	31.78	8.60	32.09	52.80	74.00	-21.20	Horizontal
7206.00	32.91	36.15	11.65	32.00	48.71	74.00	-25.29	Horizontal
9608.00	30.28	37.95	14.14	31.62	50.75	74.00	-23.25	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	30.39	31.78	8.60	32.09	38.68	54.00	-15.32	Vertical
7206.00	20.02	36.15	11.65	32.00	35.82	54.00	-18.18	Vertical
9608.00	19.16	37.95	14.14	31.62	39.63	54.00	-14.37	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	33.52	31.78	8.60	32.09	41.81	54.00	-12.19	Horizontal
7206.00	22.14	36.15	11.65	32.00	37.94	54.00	-16.06	Horizontal
9608.00	18.81	37.95	14.14	31.62	39.28	54.00	-14.72	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1410083-E301

Page 19 of 25

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	44.44	31.85	8.67	32.12	52.84	74.00	-21.16	Vertical
7323.00	33.25	36.37	11.72	31.89	49.45	74.00	-24.55	Vertical
9764.00	32.73	38.35	14.25	31.62	53.71	74.00	-20.29	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	48.16	31.85	8.67	32.12	56.56	74.00	-17.44	Horizontal
7323.00	35.19	36.37	11.72	31.89	51.39	74.00	-22.61	Horizontal
9764.00	32.35	38.35	14.25	31.62	53.33	74.00	-20.67	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	32.87	31.85	8.67	32.12	41.27	54.00	-12.73	Vertical
7323.00	21.71	36.37	11.72	31.89	37.91	54.00	-16.09	Vertical
9764.00	20.65	38.35	14.25	31.62	41.63	54.00	-12.37	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	36.34	31.85	8.67	32.12	44.74	54.00	-9.26	Horizontal
7323.00	24.02	36.37	11.72	31.89	40.22	54.00	-13.78	Horizontal
9764.00	20.56	38.35	14.25	31.62	41.54	54.00	-12.46	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. "*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1410083-E301

Page 20 of 25

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.93	31.93	8.73	32.16	51.43	74.00	-22.57	Vertical
7440.00	32.25	36.59	11.79	31.78	48.85	74.00	-25.15	Vertical
9920.00	31.84	38.81	14.38	31.88	53.15	74.00	-20.85	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	46.35	31.93	8.73	32.16	54.85	74.00	-19.15	Horizontal
7440.00	34.06	36.59	11.79	31.78	50.66	74.00	-23.34	Horizontal
9920.00	31.32	38.81	14.38	31.88	52.63	74.00	-21.37	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	31.73	31.93	8.73	32.16	40.23	54.00	-13.77	Vertical
7440.00	20.93	36.59	11.79	31.78	37.53	54.00	-16.47	Vertical
9920.00	19.96	38.81	14.38	31.88	41.27	54.00	-12.73	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	35.05	31.93	8.73	32.16	43.55	54.00	-10.45	Horizontal
7440.00	23.16	36.59	11.79	31.78	39.76	54.00	-14.24	Horizontal
9920.00	19.76	38.81	14.38	31.88	41.07	54.00	-12.93	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. "*", means this data is the too weak instrument of signal is unable to test.



Lowest channel

Report No.: EBO1410083-E301

Over

Limit

(dB)

-12.11

-14.54

-10.63

-14.34

Polarization

Horizontal

Horizontal

Vertical

Vertical

Limit Line

(dBuV/m)

54.00

54.00

54.00

54.00

Page 21 of 25

7.3.3 Bandedge emissions

Test channel:

All of the restriction bands were tested, and only the data of worst case was exhibited.

rest channe	lest channel.							
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	46.14	27.59	5.38	30.18	48.93	74.00	-25.07	Horizontal
2400.00	58.40	27.58	5.39	30.18	61.19	74.00	-12.81	Horizontal
2390.00	47.00	27.59	5.38	30.18	49.79	74.00	-24.21	Vertical
2400.00	60.78	27.58	5.39	30.18	63.57	74.00	-10.43	Vertical
Average va	lue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.95	27.59	5.38	30.18	38.74	54.00	-15.26	Horizontal
2400.00	41.38	27.58	5.39	30.18	44.17	54.00	-9.83	Horizontal
2390.00	36.13	27.59	5.38	30.18	38.92	54.00	-15.08	Vertical
2400.00	43.40	27.58	5.39	30.18	46.19	54.00	-7.81	Vertical
Test channe	Test channel: Highest channel							
Peak value:		1	1	1	1			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.63	27.53	5.47	29.93	51.70	74.00	-22.30	Horizontal
2500.00	47.18	27.55	5.49	29.93	50.29	74.00	-23.71	Horizontal
2483.50	50.02	27.53	5.47	29.93	53.09	74.00	-20.91	Vertical
2500.00	48.49	27.55	5.49	29.93	51.60	74.00	-22.40	Vertical
Average va	lue:							
			<u> </u>					

Preamp

Factor

(dB)

29.93

29.93

29.93

29.93

Level

(dBuV/m)

41.89

39.46

43.37

39.66

2500.00 Remark:

Frequency

(MHz)

2483.50

2500.00

2483.50

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

Cable

Loss

(dB)

5.47

5.49

5.47

5.49

Antenna

Factor

(dB/m)

27.53

27.55

27.53

27.55

Read

Level

(dBuV)

38.82

36.35

40.30


36.55



Report No.: EBO1410083-E301

Page 22 of 25

7.4 20dB Occupy Bandwidth

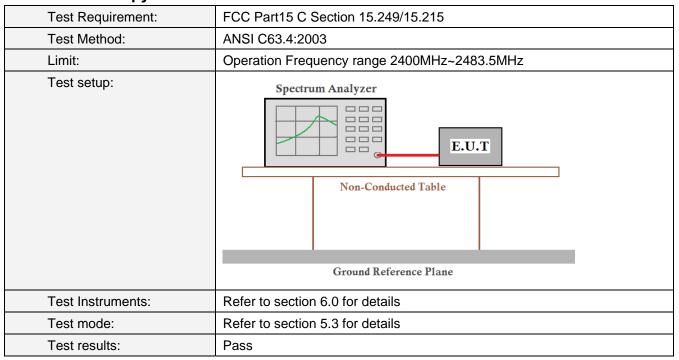

Measurement Data


Worst case GFSK modulation

Test channel	20dB bandwidth(kHz)	Result
Lowest	834.988	Pass
Middle	833.108	Pass
Highest	831.447	Pass


Test plot as follows:




Report No.: EBO1410083-E301 Page 23 of 25



Lowest channel



Middle channel



Highest channel




Report No.: EBO1410083-E301

Page 24 of 25

8 Test Setup Photo

Radiated Emission

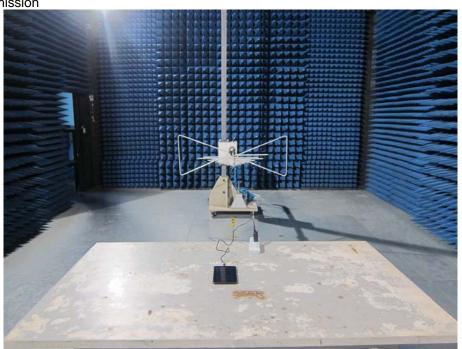





Report No.: EBO1410083-E301

Page 25 of 25

Conducted Emission



9 EUT Constructional Details

Reference to the test report No. EBO1410083-E300

-----End-----