FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2009 TEST REPORT

For

AIO Panel

Trade Name: CareFusion

Issued for

CareFusion Inc.

10020 Pacific Mesa Blvd., San Diego, California 92121, United States

Issued by

Compliance Certification Services Inc. Hsinchu Lab.

NO. 989-1 Wen Shan Rd., Shang Shan Village, Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

> TEL: +886-3-5921698 FAX: +886-3-5921108

http://www.ccsrf.com E-Mail : service@ccsrf.com Issued Date: May 16, 2014



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

Report No.: T140416L05-RP1-1

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	04/25/2014	Initial Issue	All Page 89	Gloria Chang
01	05/16/2014	Added Keypart List	P.6	Gloria Chang

TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7-8
4. TEST METHODOLOGY	9
5. FACILITIES AND ACCREDITATION	9
5.1 FACILITIES	9
5.2 ACCREDITATIONS	9
5.3 MEASUREMENT UNCERTAINTY	10
6. SETUP OF EQUIPMENT UNDER TEST	11-12
7. FCC PART 15.247 REQUIREMENTS	13
7.1 20dB BANDWIDTH FOR HOPPING	13-18
7.2 MAXIMUM PEAK OUTPUT POWER	19-20
7.3 AVERAGE POWER	21-22
7.4 HOPPING CHANNEL SEPARATION	23-28
7.5 NUMBER OF HOPPING FREQUENCY USED	29-31
7.6 DWELL TIME ON EACH CHANNEL	32-46
7.7 CONDUCTED SPURIOUS EMISSION	47-54
7.8 RADIATED EMISSION	55-77
7.9 CONDUCTED EMISSION	78-82
APPENDIX I MAXIMUM PERMISSIBLE EXPOSURE	83-84
APPENDIX II SETUP PHOTOS	85-89

1. TEST REPORT CERTIFICATION

Applicant : CareFusion Inc.

Address : 10020 Pacific Mesa Blvd., San Diego, California 92121,

United States

Equipment Under Test: AIO Panel

(where "X" may be any alphanumeric character, "-" or blank)

Trade Name : CareFusion

Tested Date : March 25 ~ April 25, 2014

APPLICABLE STANDARD				
Standard	Test Result			
FCC Part 15 Subpart C AND ANSI C63.4:2009	PASS			

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu

Sr. Engineer

Reviewed by:

Gundam Lin Sr. Engineer

2. EUT DESCRIPTION

Product Name	AIO Panel	
Model Number	DMS-SA1300-A1E; DMS-SA13XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	
Identify Number	T140416L05	
Received Date	March 25, 2014	
Frequency Range	2402MHz to 2480MHz f = 2402 + nMHz, n = 0,78	
Transmit Power	6.47 dBm (0.0044W)	
Channel Spacing	1MHz	
Channel Number	79 Channels	
Transmit Data Rate	GFSK (1Mbps), π/4-DQPSK (2Mbps), 8-DPSK (3Mbps)	
Type of Modulation	Frequency Hopping Spread Spectrum	
Antenna Type	PIFA Antenna x 1, Antenna 2 (Chain 2 / Aux), Antenna Gain : 2.0dBi	
Power Rating	12-24Vdc	
Test Voltage	120Vac, 60Hz	
I/O Port	Control Port × 1(For Docking)	

The difference of the series model

Model Number	Difference
DMS-SA1300-A1E	For marketing purpose only.
DMS-SA13XXXXXXXXXXXXXXXX	2. where "X" may be any alphanumeric character, " - " or blank

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. For more details, please refer to the User's manual of the EUT.
- 3. The model DMS-SA1300-A1E was considered the main model for testing.
- 4. This submittal(s) (test report) is intended for FCC ID: YWX-SA13AIO2 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Keypart List:

Item	Description	Model	Manufacturer	Туре
1	Mother Board	DMS-SA13	Advantech	
2	CPU	Atom D2550	INTEL	1.86GHz
3	Touch Donal	105-H-1508	AVCT	
3	Touch Panel	GFF-150C2	GETAC	
4	LCD Display	G150XGE	Innolux	1024X768
5	DRAM	DDR3 1066/1333/1666MHz 2GB, 4G	Transcend	
6	Wireless & BT Module	AW-NB087HLE	Azurewave	
7	HDD	WD160AAJS (160GB)	WD	SATA

3. DESCRIPTION OF TEST MODES

The EUT (AIO Panel) had been tested under operating condition.

Bluetooth: Chain 2 / Aux(Antenna 2) transmit/receive.



There are three channels have been tested as following:

Channel	Frequency (MHz)	
Low	2402	
Middle	2441	
High	2480	

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	Normal Operating / Elevation of 75° / DMS-SA1300-A1E (AVCT / 105-H-1508)
2	Normal Operating / Elevation of 115° / DMS-SA1300-A1E (AVCT / 105-H-1508)
3	Normal Operating / Elevation of 75° / DMS-SA1300-A1E (GETAC / GFF-150C2)
4	Normal Operating / Elevation of 115° / DMS-SA1300-A1E (GETAC / GFF-150C2)

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode					
	Radiated Emission	Below 1 GHz	Normal Operating / Elevation of 75° / DMS-SA1300-A1E (AVCT / 105-H-1508)		
			Normal Operating / Elevation of 115°/ DMS-SA1300-A1E (AVCT / 105-H-1508)		
			Normal Operating / Elevation of 75° / DMS-SA1300-A1E (GETAC / GFF-150C2)		
Emission			Normal Operating / Elevation of 115°/ DMS-SA1300-A1E (GETAC / GFF-150C2)		
		Above 1GHz	Normal Operating / Elevation of 75° / DMS-SA1300-A1E (AVCT / 105-H-1508)		
			Normal Operating / Elevation of 115°/ DMS-SA1300-A1E (AVCT / 105-H-1508)		
Demonto Theor	Conducted Emission		Normal Operating / Elevation of 115° / DMS-SA1300-A1E (AVCT / 105-H-1508)		

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

Bandedge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, High FHSS		GFSK	DH5
Low, High	FHSS	8-DPSK	3-DH5

Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	ested Channel Modulation Technology		Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village, Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada INDUSTRY CANADA

Japan VCCI

Taiwan BSMI

USA FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, http:///www.ccsrf.com

5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 30 to 1000 MHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 1 to 18GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 26 to 40 GHz	+/- 3.82
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	Notebook PC	HP	ProBook 4421s	CNF03242PJ
2	Notebook PC	HP	ProBook 4421s	CNF03242PM
3	Notebook PC	IBM (Lenovo)	ThinkPad T61 7663-AS6	L3F3864
4	Notebook PC	DELL	Latitude D610 PP01L	CN-0XD762-48643-637- 1743
5	Draft 11n Wireless 4-Port Gigabit Broadband Router	SMC	SMCWGBR14S-N	U193600496
6	Keyboard	HP	KU-0316	35563-AB1
7	Mouse	HP	M-UAE96	265986-011
8	Headphones	i-Acon	CW-010M.V	
9	Docking			
10	USB Load x 6			

No.	Product	Manufacturer	Model No.	Power Input	Power Output
1	Power Adapter	SINPRO	MPU63-106	100-240Vac, 47-63Hz, 1.62-072A	15Vdc, 4.2A

No.	Signal cable description
1	Non-shielded RJ-45 cable, 10m x 2
2	Shielded USB cable, 2m × 6

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

RF Mode:

- 1. Setup all computers like the setup diagram.
- 2. Run BT RF Tool
- 3. Select the following settings.
- 4. TX Mode:

TX mode (GFSK)

LO Freq: 2402, 2441, 2480

Power: 10
DataRate: 1M
Continue TX

TX mode (8-DPSK)

LO Freq: 2402, 2441, 2480

Power: 10
DataRate: 3M
Continue TX

- 5. All of the functions are under run.
- 6. Start test.

Normal Mode:

- 1. EUT & peripherals setup diagram is shown in appendix setup photos.
- 2. Power on all equipments.
- 3. EUT link to wireless router.
- 4. Notebook PC ping EUT IP through LAN connected by RJ-45 cable.
- 5. Notebook PC ping EUT IP through LAN connected by RJ-45 cable.
- 6. Notebook PC link EUT through BT.
- 7. Notebook PC link wireless router ping EUT IP through wireless LAN.
- 8. EUT and laptop connection transfer rate appears as 1Gbps.
- 9. USB port link keyboard mouse and USB dongle × 6.
- 10. All of the functions are under run.
- 11. EUT Run 'BurnIN'.
- 12. Start test.

7. FCC PART 15.247 REQUIREMENTS

7.1 20dB BANDWIDTH FOR HOPPING

LIMITS

Limit: N/A

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- 1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
- 2. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW \geq 1% of the 20 dB bandwidth.
- 4. $VBW \ge RBW$.
- 5. Sweep = auto.

TEST RESULTS


Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
Low	2402	0.960	N/A
Middle	2441	0.960	N/A
High	2480	0.960	N/A

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
Low	2402	1.500	N/A
Middle	2441	1.500	N/A
High	2480	1.482	N/A


20dB BANDWIDTH

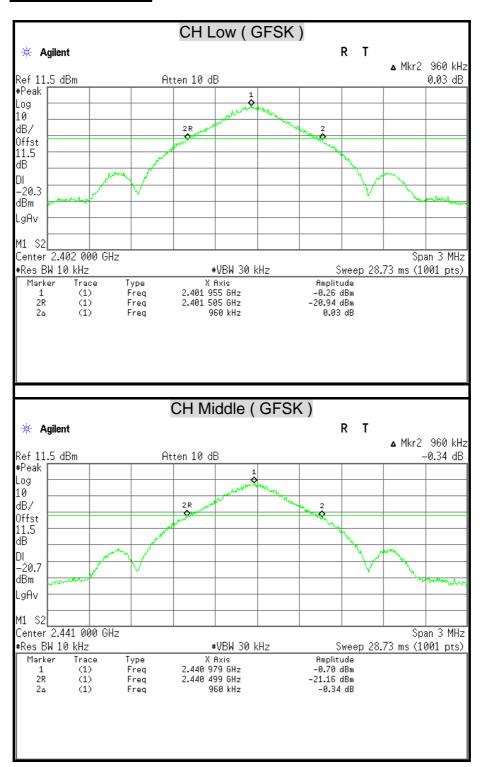


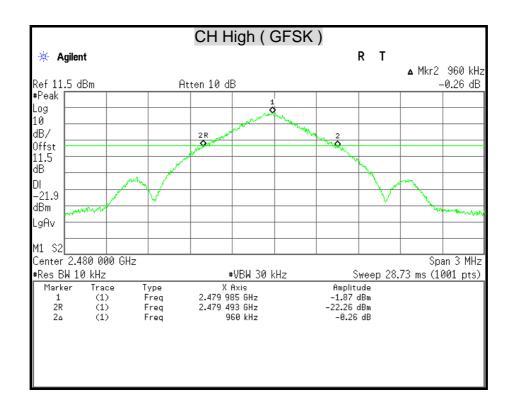

FCC ID: YWX-SA13AIO2

Report No.: T140416L05-RP1-1

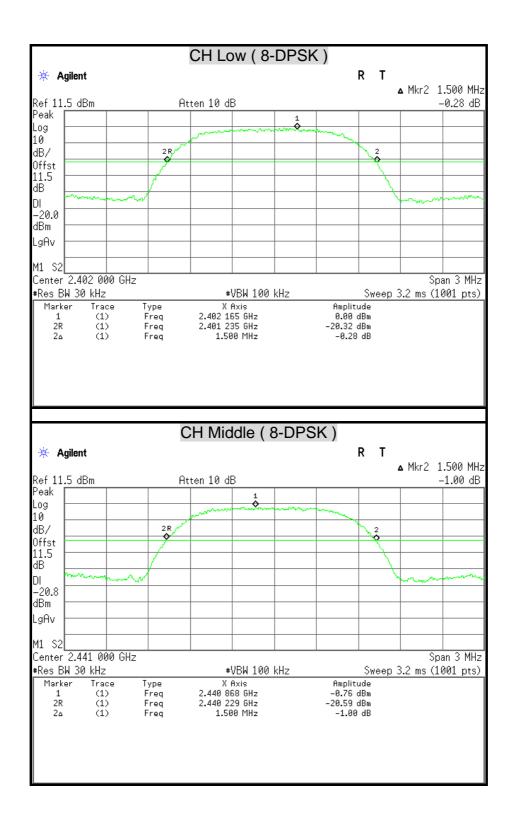

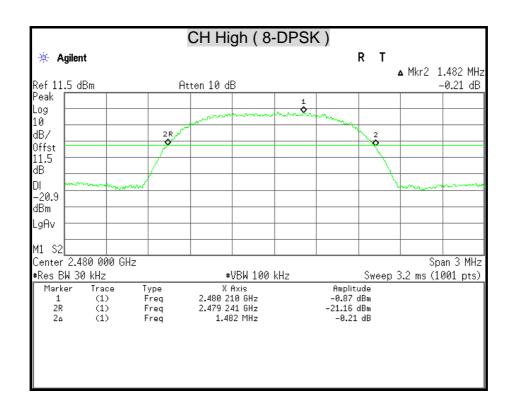

7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS


§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/06/2014
Power Sensor	Anritsu	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

TEST RESULTS

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel	Peak l	Power	Peak Pov	wer Limit	Popult
Channel	Frequency (MHz)	(dBm)	(W)	(dBm)	(W)	Result
Low	2402	4.40	0.0028	20.97	0.125	PASS
Middle	2441	3.26	0.0021	20.97	0.125	PASS
High	2480	2.00	0.0016	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK .CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel	Peak l	Power	Peak Pov	wer Limit	Result
Channel	Frequency (MHz)	(dBm)	(W)	(dBm)	(W)	Result
Low	2402	6.47	0.0044	20.97	0.125	PASS
Middle	2441	5.70	0.0037	20.97	0.125	PASS
High	2480	4.71	0.0030	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

7.3 AVERAGE POWER

LIMITS


None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	ANRITSU	ML2495A	1149001	12/06/2014
Power Sensor	ANRITSU	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the average power detection.

TEST RESULTS

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	3.68
Middle	2441	2.62
High	2480	1.49

Remark: The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK ,CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	3.86
Middle	2441	2.94
High	2480	1.95

Remark: The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

7.4 HOPPING CHANNEL SEPARATION

LIMITS


§15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 3. By using the MaxHold function record the separation of adjacent channels.
- 4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
- 5. Span = wide enough to capture the peaks of two adjacent channels.
- 6. Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span.
- 7. Video (or Average) Bandwidth (VBW) ≥ RBW.
- 8. Sweep = auto.
- 9. Repeat above procedures until all frequencies measured were complete.

TEST RESULTS

Refer to section 7.1, 20dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.


Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)


Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth	Result
Low	2402	1000	640	25 kHz	PASS
Middle	2441	1000	640	25 kHz	PASS
High	2480	1000	640	25 kHz	PASS

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth	Result
Low	2402	1000	1000	25 kHz	PASS
Middle	2441	1000	1000	25 kHz	PASS
High	2480	1000	988	25 kHz	PASS

HOPPING CHANNEL SEPARATION

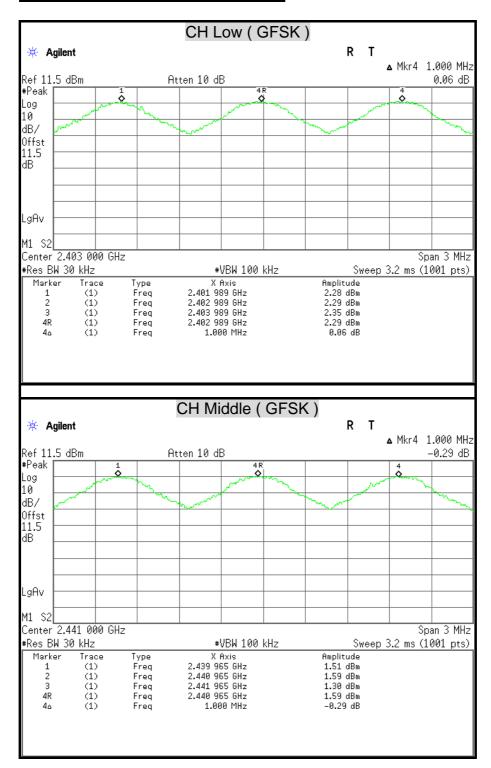


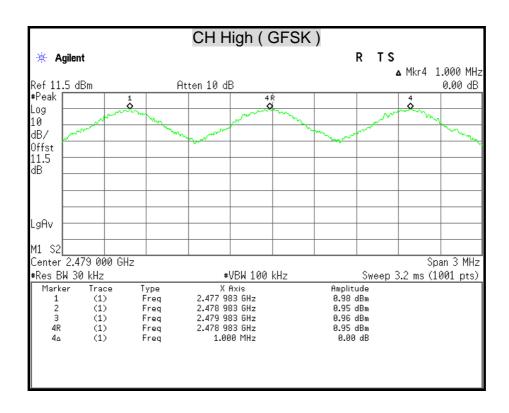

FCC ID: YWX-SA13AIO2

Report No.: T140416L05-RP1-1

CH Low (8-DPSK) R T 🔆 Agilent ▲ Mkr4 1.000 MHz Ref 11.5 dBm Atten 10 dB 0.01 dB #Peak Log 10 dB/ Offst 11.5 dΒ LgAv Center 2.403 000 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (1001 pts) X Axis 2.402 000 GHz Amplitude 0.24 dBm Marker Trace Туре (1) Freq 0.23 dBm 0.24 dBm 2.403 000 GHz 2.404 000 GHz 2 (1) Freq (1) Freq 4R (1) 2.403 000 GHz 0.23 dBm Freq (1) 1.000 MHz 0.01 dB CH Middle (8-DPSK) R T 🗰 Agilent ▲ Mkr4 1.000 MHz Ref 11.5 dBm Atten 10 dB 0.20 dB #Peak 4 R Log 10 dB/ Offst 11.5 dΒ LgAv Center 2.441 000 GHz Span 3 MHz Sweep 3.2 ms (1001 pts) #Res BW 30 kHz #VBW 100 kHz X Axis 2.439 922 GHz 2.440 922 GHz 2.441 922 GHz Amplitude Marker Trace Type Freq -1.62 dBm -1.79 dBm -1.59 dBm (1) 2 (1) Freq (1) Frea 4R (1) Freq 2.440 922 GHz -1.79 dBm (1) 1.000 MHz 0.20 dB

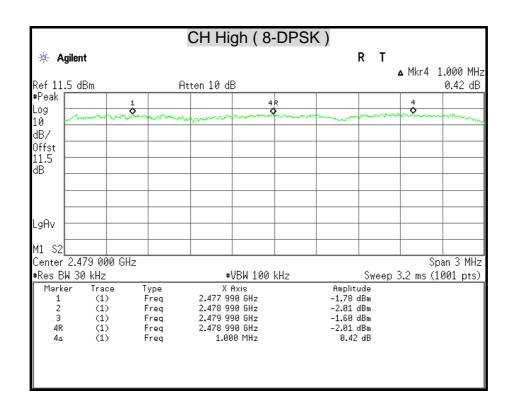

7.5 NUMBER OF HOPPING FREQUENCY USED

LIMITS

§15.247(a)(1)(iii) For frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

TEST EQUIPMENT

Name of Equipment Manufacturer		Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE


- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3. Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 4. Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
- 5. Span = the frequency band of operation.
- 6. RBW \geq 1% of the span.
- 7. $VBW \ge RBW$.
- 8. Sweep = auto.
- 9. Repeat above procedures until all frequencies measured were complete.

TEST RESULTS


Refer to the attached plot.

There are 79 hopping frequencies in a hopping sequence.

NUMBER OF HOPPING FREQUENCY USED

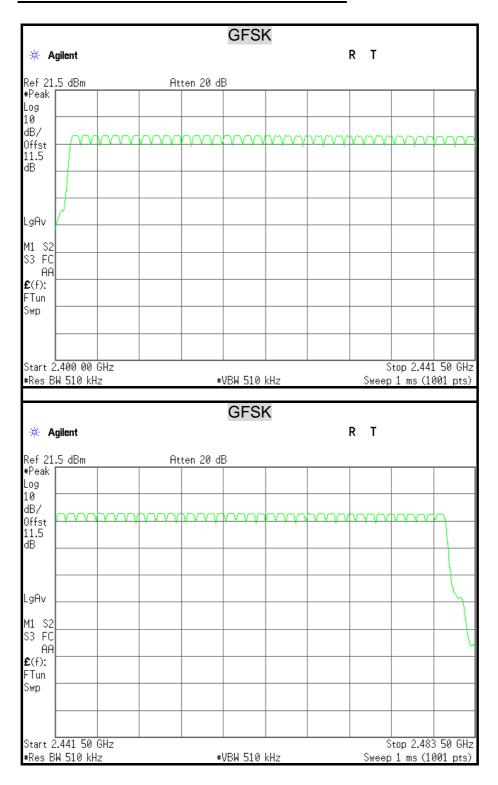

Report No.: T140416L05-RP1-1

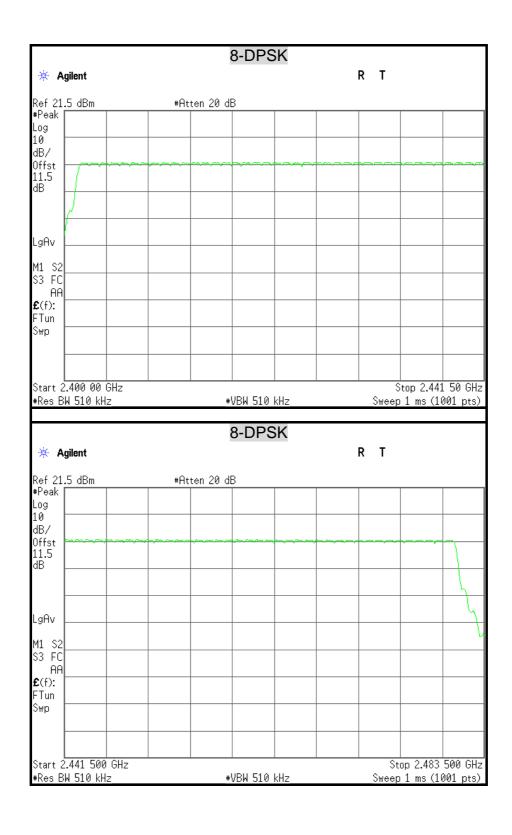

7.6 DWELL TIME ON EACH CHANNEL

LIMITS

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

TEST EQUIPMENT

Name of Equipment Manufacturer		Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode.
- 4. RBW = 1 MHz.
- 5. VBW \geq RBW.
- 6. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 7. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- 8. Repeat above procedures until all frequencies measured were complete.
- 9. The EUT has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second. The longer the payload is, the slower the hopping rate is.

TEST RESULTS

Time of occupancy on the TX channel in 31.6sec = time domain slot length \times hop rate \div number of hop per channel \times 31.6

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Modulation Type: GFSK

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
	2402	DH1	0.383	122.56	400	PASS
Low	2402	DH3	1.650	264.00	400	PASS
	2402	DH5	2.883	307.52	400	PASS
	2441	DH1	0.383	122.56	400	PASS
Middle	2441	DH3	1.650	264.00	400	PASS
	2441	DH5	2.883	307.52	400	PASS
	2480	DH1	0.383	122.56	400	PASS
High	2480	DH3	1.650	264.00	400	PASS
	2480	DH5	2.883	307.52	400	PASS

Remark:

Ch Low

DH1: 0.383 ms × (1600÷2) ÷ 79 × 31.6 = 122.56 (ms)

DH3: $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$

DH5: $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$

Ch Middle

DH1: $0.383 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.56 \text{ (ms)}$

DH3: $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$

DH5: $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$

Ch High

DH1: $0.383 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.56 \text{ (ms)}$

DH3: $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$

DH5: $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$

Modulation Type: 8-DPSK

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
	2402	DH1	0.383	122.56	400	PASS
Low	2402	DH3	1.650	264.00	400	PASS
	2402	DH5	2.883	307.52	400	PASS
	2441	DH1	0.383	122.56	400	PASS
Middle	2441	DH3	1.650	264.00	400	PASS
	2441	DH5	2.883	307.52	400	PASS
	2480	DH1	0.383	122.56	400	PASS
High	2480	DH3	1.650	264.00	400	PASS
	2480	DH5	2.883	307.52	400	PASS

Remark:


Ch Low


DH1 : $0.383 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.56 \text{ (ms)}$ DH3 : $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5 : $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$ Ch Middle

DH1: $0.383 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.56 \text{ (ms)}$ DH3: $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$ Ch High

DH1: $0.383 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 122.56 \text{ (ms)}$ DH3: $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.883 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 307.52 \text{ (ms)}$

DWELL TIME ON EACH PAYLOAD

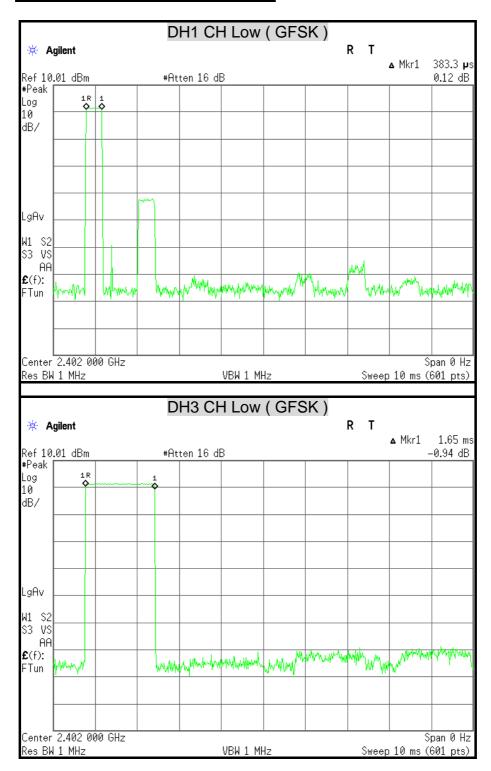

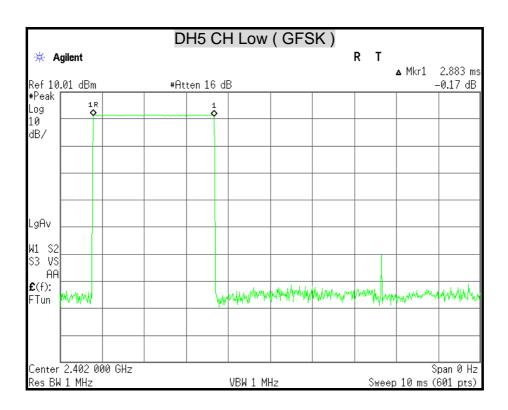

Report No.: T140416L05-RP1-1

Span 0 Hz


Sweep 10 ms (601 pts)


DH1 CH Middle (GFSK) R T * Agilent Δ Mkr1 383.3 **µ**s Ref 10.01 dBm #Atten 16 dB 0.55 dB 1R 1 Log 10 dB/ LgAv W1 S2 S3 VS AΑ **£**(f): HAMMAN FTun Start 2.441 000 GHz Stop 2.441 000 GHz Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts) DH3 CH Middle (GFSK) 🔅 Agilent R T Δ Mkr1 1.65 ms Ref 10.01 dBm #Atten 16 dB -0.59 dB #Peak Log 10 dB/ LgAv S3 VS Hyprogeneralisable punkaddhaydaandh AΑ **£**(f): WWWW MANN FTun


VBW 1 MHz

Center 2.441 000 GHz

Res BW 1 MHz

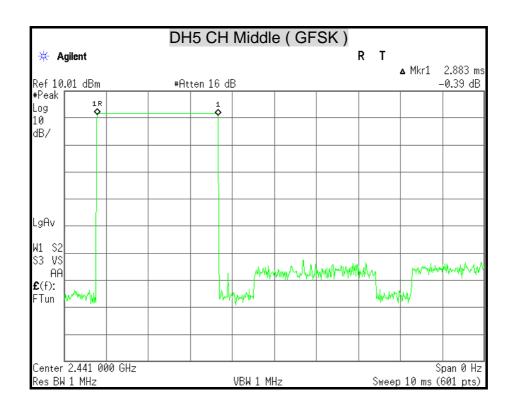

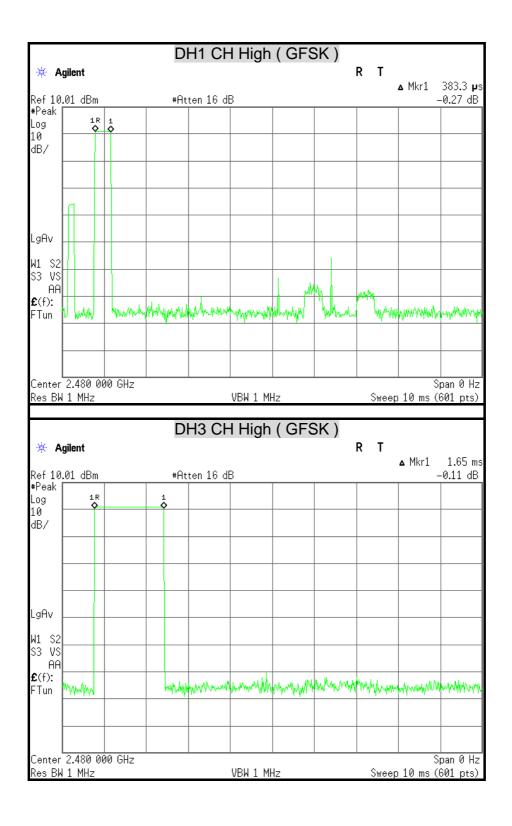

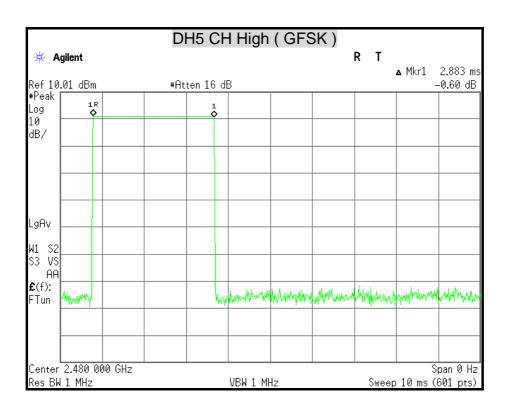

£(f):

FTun

White

Center 2.402 000 GHz

Res BW 1 MHz

FCC ID : YWX-SA13AIO2


Report No.: T140416L05-RP1-1


Span 0 Hz


Sweep 10 ms (601 pts)


DH1 CH Low (8-DPSK) R T * Agilent Δ Mkr1 383.3 μs Ref 10.01 dBm #Atten 16 dB -0.43 dB Log 10 dB/ LgAv W1 S2 S3 VS AΑ **£**(f): FTun Start 2.402 000 GHz Stop 2.402 000 GHz Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts) DH3 CH Low (8-DPSK) 🔅 Agilent R T Δ Mkr1 1.65 ms Ref 10.01 dBm #Atten 16 dB -0.83 dB #Peak Log 10 dB/ LgAv S3 VS AΑ


VBW 1 MHz

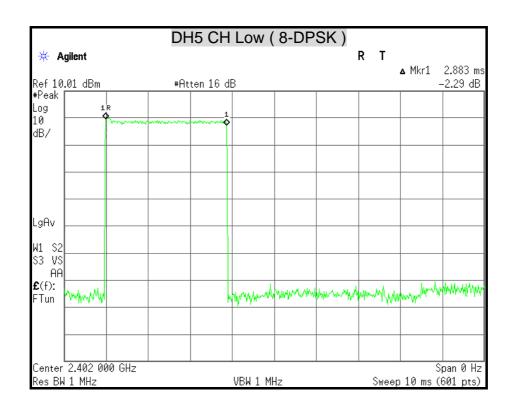

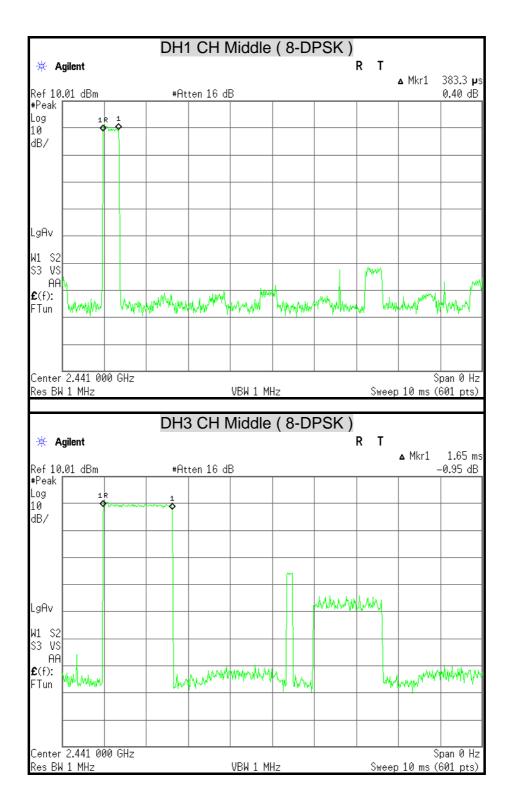

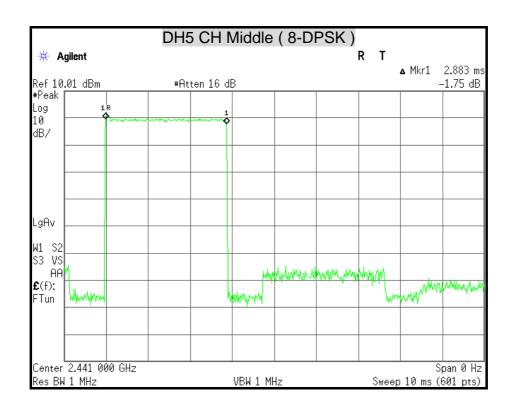

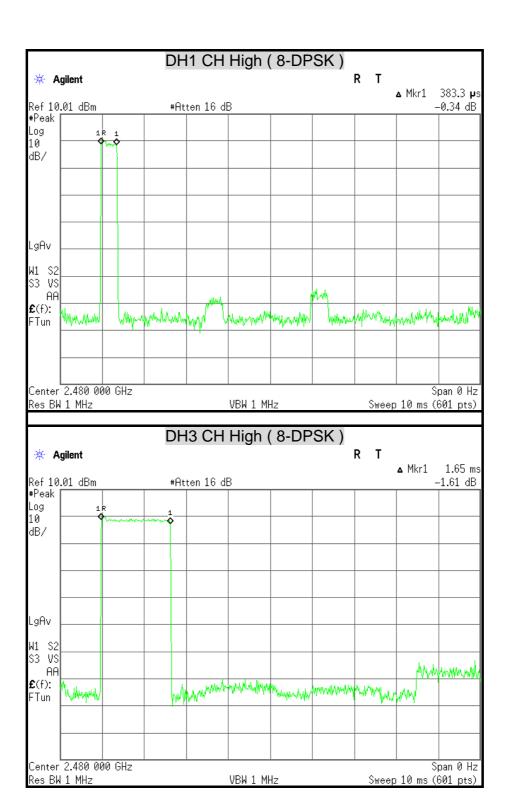

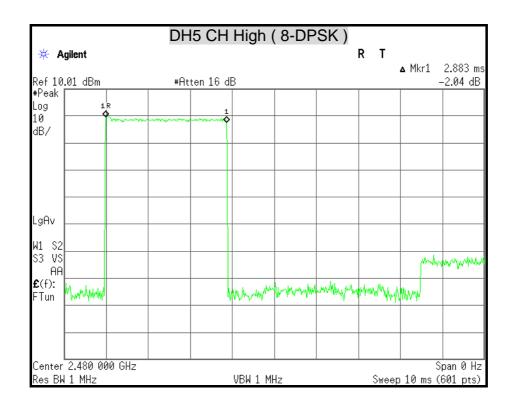

7.7 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP




TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


TEST RESULTS


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

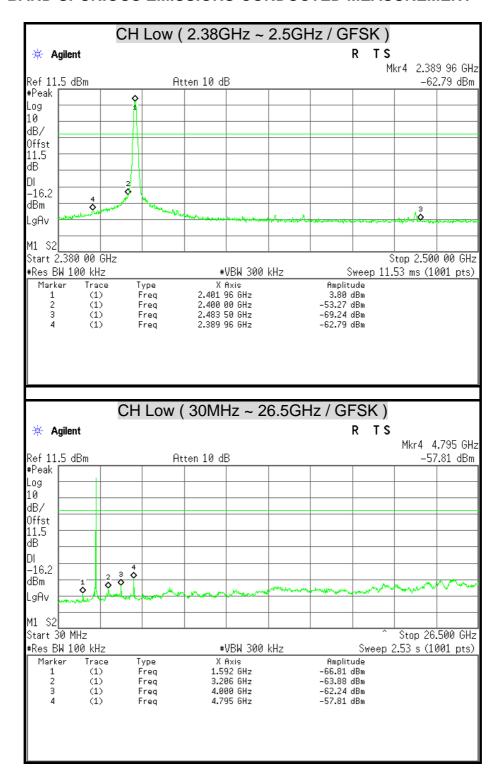

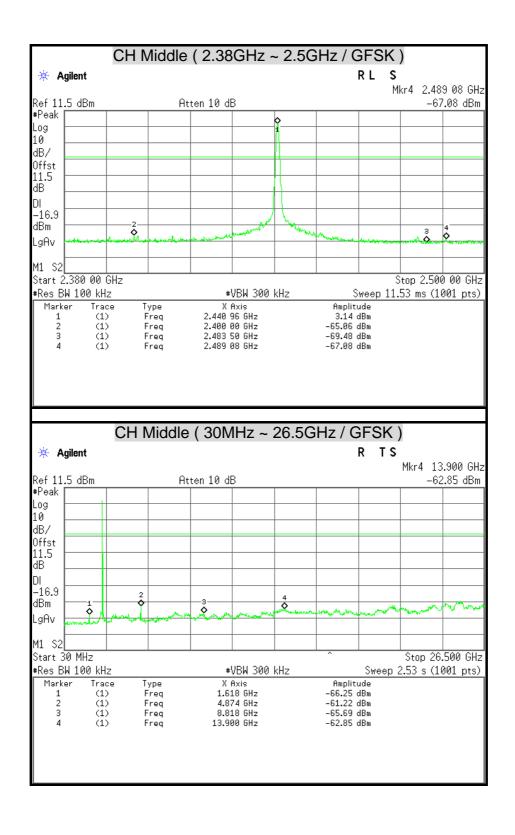

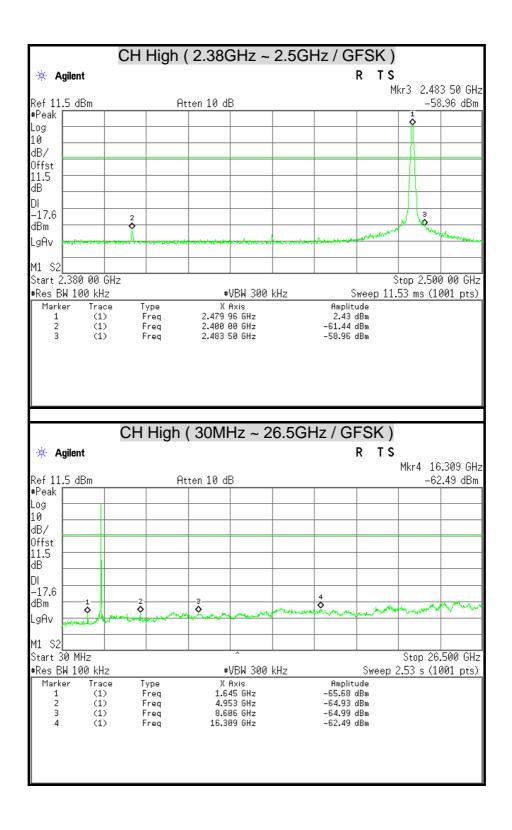

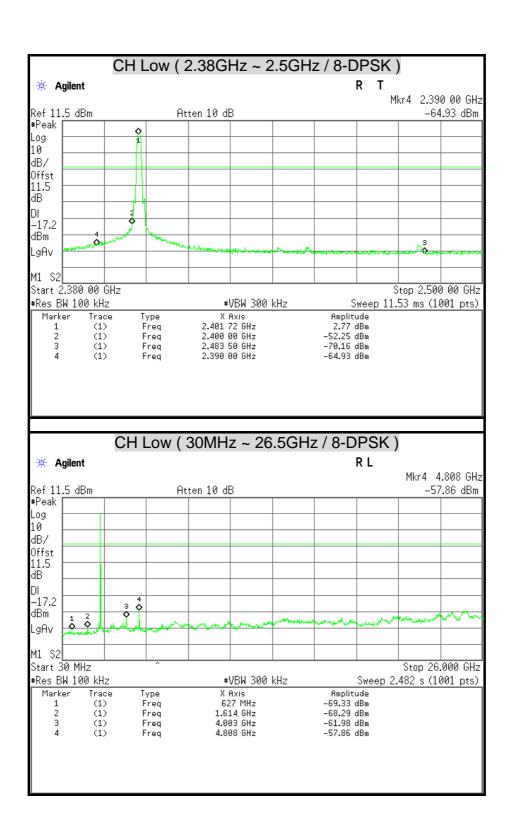


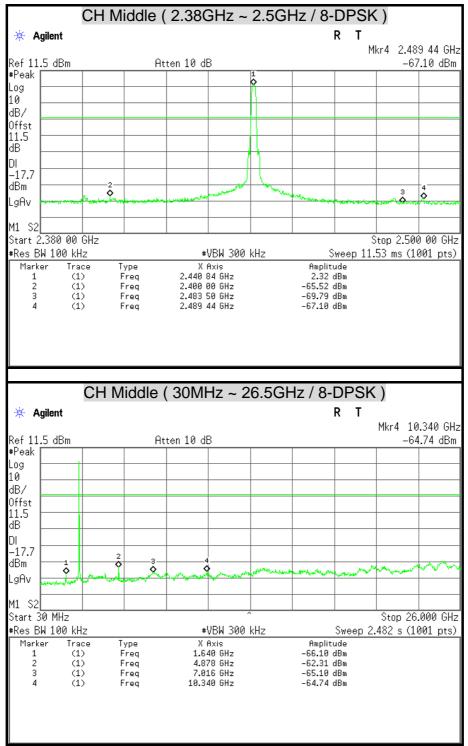

Report No.: T140416L05-RP1-1

CH High (2.38GHz ~ 2.5GHz / 8-DPSK) Agilent Mkr3 2.483 50 GHz Ref 11.5 dBm Atten 10 dB -59.32 dBm #Peak Log 10 dB/ Offst 11.5 dΒ DΙ -18.4dBm LgAv Start 2.380 00 GHz Stop 2.500 00 GHz #Res BW 100 kHz **#VBW** 300 kHz Sweep 11.53 ms (1001 pts) X Axis 2.480 08 GHz Type Freq Amplitude 1.84 dBm Marker Trace (1) (1) 2.400 00 GHz -62.26 dBm 2.483 50 GHz -59.32 dBm (1) Freq CH High (30MHz ~ 26.5GHz / 8-DPSK) R T 🔆 Agilent Mkr4 8.600 GHz Ref 11.5 dBm Atten 10 dB -65.63 dBm #Peak Log 10 dB/ Offst 11.5 dΒ DΙ -18.4 dBm Ŷ LgAv M1 S2 Start 30 MHz Stop 26.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (1001 pts) Marker Trace X Axis Amplitude Туре 1.666 GHz 4.964 GHz Freq -65.04 dBm Freq (1) -63.51 dBm (1) 7.042 GHz -64.46 dBm Freq (1) 8.600 GHz -65.63 dBm

CONDUCTED MEASUREMENT HOPPING BAND EDGES

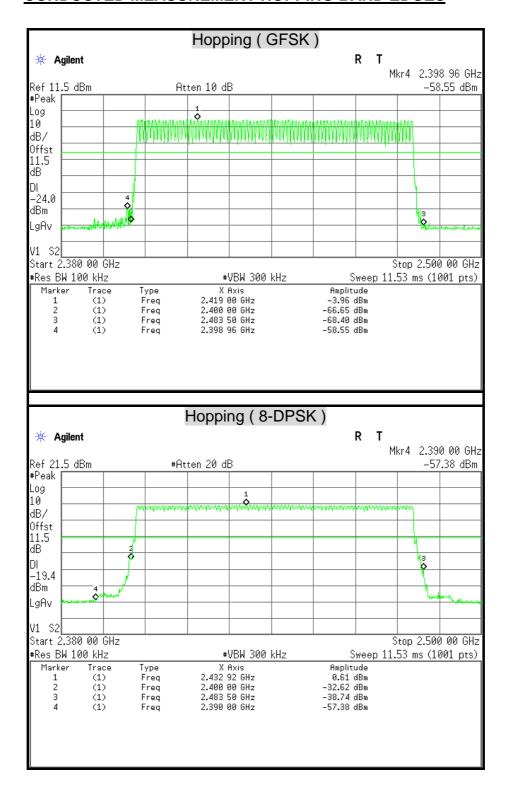

7.8 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown is Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

^{1. 1} Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

^{2. 2} Above 38.6

(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_A

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100221	04/29/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-249	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Pre-Amplifier	Agilent	8449B	3008A01471	07/16/2014
Pre-Amplifier	HP	8447F	2944A03748	07/16/2014
Band Reject Notch Filter	Micro-Tronics	BRM05702-01	009	N.C.R

Remark: 1. Each piece of equipment is scheduled for calibration once a year.

2. N.C.R = No Calibration Request.

Radiated Emission / 966Chamber_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2015
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/05/2014
Horn Antenna	COM-POWER	AH-840	03077	12/18/2014
Pre-Amplifier	Agilent	8447D	2944A10052	07/16/2014
Pre-Amplifier	Agilent	8449B	3008A01916	07/16/2014
LOOP Antenna	EMCO	6502	8905-2356	08/20/2014
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.

2. N.C.R = No Calibration Request.

TEST SETUP


The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

9kHz ~ 30MHz

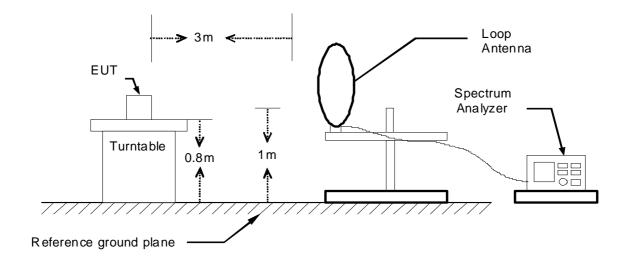


Report No.: T140416L05-RP1-1

30MHz ~ 1GHz

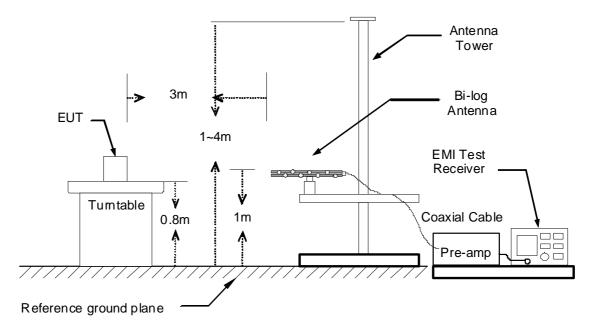

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

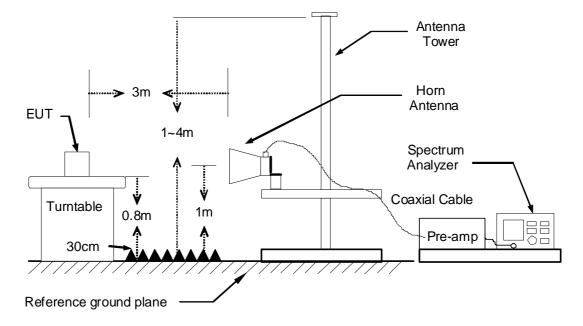

TEST PROCEDURE

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
- 3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

TEST RESULTS

Below 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	AIO Panel	Test By	Alan Wu
Test Model	DMS-SA1300-A1E (AVCT / 105-H-1508)	Test Date	2014/03/25
Test Mode	Normal Operating / Elevation of 75°	Temp. & Humidity	24°C, 50%

	ç	966 Chambei	r_A at 3Mete	r / Horizonta	ıl	
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
76.56	46.91	-14.04	32.87	40.00	-7.13	Peak
400.54	39.35	-6.33	33.02	46.00	-12.98	Peak
530.52	44.00	-3.37	40.62	46.00	-5.38	Peak
676.02	39.87	-0.75	39.13	46.00	-6.87	Peak
716.76	37.60	0.15	37.75	46.00	-8.25	QP
757.50	39.44	1.22	40.66	46.00	-5.34	Peak
825.40	36.51	1.82	38.33	46.00	-7.67	Peak
		966 Chambe	er_A at 3Met	ter / Vertical		
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
35.82	44.88	-10.74	34.14	40.00	-5.86	Peak
346.22	43.61	-7.71	35.90	46.00	-10.10	Peak
404.42	43.00	-6.21	36.79	46.00	-9.21	Peak
532.46	42.80	-3.33	39.47	46.00	-6.53	QP
695.42	42.12	-0.44	41.68	46.00	-4.32	QP
891.36	36.28	3.21	39.49	46.00	-6.51	Peak

Remark:

- 1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- 2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) PreAmp.Gain (dB)
- 4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

Product Name	AIO Panel	Test By	Alan Wu
Test Model	DMS-SA1300-A1E (AVCT / 105-H-1508)	Test Date	2014/03/25
Test Mode	Normal Operating / Elevation of 115°	Temp. & Humidity	24°C, 50%

	966 Chamber_A at 3Meter / Horizontal						
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark	
76.56	46.62	-14.04	32.58	40.00	-7.42	Peak	
251.16	45.39	-10.70	34.69	46.00	-11.31	Peak	
322.94	42.65	-8.33	34.32	46.00	-11.68	Peak	
532.46	41.50	-3.33	38.16	46.00	-7.84	Peak	
722.58	33.10	0.33	33.43	46.00	-12.57	QP	
740.04	41.00	0.88	41.88	46.00	-4.12	Peak	
914.64	33.10	3.65	36.75	46.00	-9.25	Peak	
		966 Chambe	er_A at 3Met	ter / Vertical			
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark	
30.00	46.20	-11.27	34.93	40.00	-5.07	Peak	
394.72	46.83	-6.48	40.35	46.00	-5.65	Peak	
532.46	41.30	-3.33	37.97	46.00	-8.03	QP	
714.82	37.90	0.09	37.99	46.00	-8.01	QP	
862.26	33.80	2.53	36.33	46.00	-9.67	QP	
918.52	35.53	3.71	39.24	46.00	-6.76	Peak	

Remark[.]

- 1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- 2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) PreAmp.Gain (dB)
- 4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

Product Name	AIO Panel	Test By	Alan Wu
Test Model	DMS-SA1300-A1E (GETAC / GFF-150C2)	Test Date	2014/04/23
Test Mode	Normal Operating / Elevation of 75°	Temp. & Humidity	24°C, 52%

	966 Chamber_B at 3Meter / Horizontal					
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
30.00	40.00	-15.45	24.55	40.00	-15.45	QP
77.53	53.30	-18.09	35.21	40.00	-4.79	Peak
129.91	52.06	-15.03	37.03	43.50	-6.47	Peak
531.49	46.21	-7.71	38.50	46.00	-7.50	Peak
590.66	47.25	-6.18	41.08	46.00	-4.92	Peak
649.83	47.02	-5.72	41.30	46.00	-4.70	Peak
800.18	37.50	-3.09	34.41	46.00	-11.59	QP
		966 Chamb	er_B at 3Met	er / Vertical		
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
30.00	47.70	-15.45	32.25	40.00	-7.75	QP
38.73	48.70	-14.61	34.09	40.00	-5.91	QP
129.91	49.62	-15.03	34.59	43.50	-8.91	Peak
398.60	51.21	-9.96	41.25	46.00	-4.75	Peak

Remark:

533.43

773.02

940.83

48.21

45.14

39.40

- 1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- 2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

40.53

41.79

38.70

46.00

46.00

46.00

-5.47

-4.21

-7.30

Peak

Peak

Peak

- 3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) PreAmp.Gain (dB)
- 4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

-7.68

-3.35

-0.70

Product Name	AIO Panel	Test By	Alan Wu
Test Model	DMS-SA1300-A1E (GETAC / GFF-150C2)	Test Date	2014/04/23
Test Mode	Normal Operating / Elevation of 115°	Temp. & Humidity	24°C, 52%

Report No.: T140416L05-RP1-1

966 Chamber B at 3Meter / Horizontal									
	9		r_B at 3Mete	r / Horizonta	l	,			
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark			
30.00	39.30	-15.45	23.85	40.00	-16.15	QP			
77.53	51.96	-18.09	33.87	40.00	-6.13	Peak			
129.91	49.89	-15.03	34.86	43.50	-8.64	Peak			
215.27	48.69	-15.62	33.07	43.50	-10.43	Peak			
334.58	46.50	-11.20	35.30	46.00	-10.70	Peak			
406.36	43.54	-9.79	33.75	46.00	-12.25	Peak			
630.43	46.46	-5.79	40.67	46.00	-5.33	Peak			
799.21	41.60	-3.10	38.50	46.00	-7.50	QP			
956.35	39.29	-0.48	38.82	46.00	-7.18	Peak			
		966 Chamb	er_B at 3Met	ter / Vertical					
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark			
30.00	47.20	-15.45	31.75	40.00	-8.25	QP			
38.73	50.40	-14.61	35.79	40.00	-4.21	QP			
399.57	50.62	-9.94	40.69	46.00	-5.31	Peak			
590.66	47.47	-6.18	41.30	46.00	-4.70	Peak			
796.30	40.80	-3.13	37.67	46.00	-8.33	QP			
941.80	41.98	-0.69	41.29	46.00	-4.71	Peak			

Remark:

- 1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- 2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) PreAmp.Gain (dB)
- 4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

Above 1 GHz

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	GFSK TX / CH Low	Temp. & Humidity	20°C, 58%

		96	6 Chambe	er_B at 3N	Meter / Ho	rizontal			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1016.00	54.07		-2.88	51.19		74.00	54.00	-2.81	Peak
1180.00	57.90	47.68	-2.89	55.01	44.79	74.00	54.00	-9.21	AVG
1372.00	51.15		-2.89	48.25		74.00	54.00	-5.75	Peak
1482.00	55.51		-2.90	52.61		74.00	54.00	-1.39	Peak
3000.00	58.18	41.38	4.08	62.26	45.46	74.00	54.00	-8.54	AVG
4440.00	42.60		7.22	49.83		74.00	54.00	-4.17	Peak
4815.00	38.59		8.06	46.65		74.00	54.00	-7.35	Peak
6135.00	39.59		11.20	50.78		74.00	54.00	-3.22	Peak
		9	66 Cham	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1096.00	54.42		-2.88	51.54		74.00	54.00	-2.46	Peak
1226.00	52.82		-2.89	49.93		74.00	54.00	-4.07	Peak
1398.00	50.97		-2.90	48.07		74.00	54.00	-5.93	Peak
1578.00	57.43	44.72	-2.16	55.27	42.56	74.00	54.00	-11.44	AVG
3000.00	55.83	40.81	4.08	59.91	44.89	74.00	54.00	-9.11	AVG
3210.00	43.88		4.25	48.13		74.00	54.00	-5.87	Peak

Remark:

4815.00

5865.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

8.06

10.40

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

48.11

50.67

74.00

74.00

54.00

54.00

-5.89

-3.33

Peak

Peak

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

40.05

40.27

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	GFSK TX / CH Middle	Temp. & Humidity	20°C, 58%

Report No.: T140416L05-RP1-1

	966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark	
1018.00	52.70		-2.88	49.82		74.00	54.00	-4.18	Peak	
1178.00	57.84	47.89	-2.89	54.95	45.00	74.00	54.00	-9.00	AVG	
1478.00	54.63		-2.90	51.73		74.00	54.00	-2.27	Peak	
1600.00	50.87		-1.96	48.91		74.00	54.00	-5.09	Peak	
3000.00	58.08	41.31	4.08	62.16	45.39	74.00	54.00	-8.61	AVG	
3210.00	42.77		4.25	47.02		74.00	54.00	-6.98	Peak	
4830.00	39.04		8.09	47.13		74.00	54.00	-6.87	Peak	
5910.00	39.71		10.53	50.24		74.00	54.00	-3.76	Peak	
		9	66 Chaml	per Bat 3	Meter / V	ertical				

		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1112.00	54.01		-2.88	51.13		74.00	54.00	-2.87	Peak
1284.00	53.30		-2.89	50.41		74.00	54.00	-3.59	Peak
1576.00	57.09	44.93	-2.18	54.91	42.75	74.00	54.00	-11.25	AVG
1728.00	50.97		-0.75	50.22		74.00	54.00	-3.78	Peak
3000.00	56.71	40.33	4.08	60.79	44.41	74.00	54.00	-9.59	AVG
3210.00	43.91		4.25	48.16		74.00	54.00	-5.84	Peak
4920.00	39.98		8.28	48.25		74.00	54.00	-5.75	Peak
6585.00	39.36		12.25	51.60		74.00	54.00	-2.40	Peak

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.
- 3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

Margin = Result - Limit

 $Remark\ Peak = Result(PK) - Limit(AV)$



Report No.: T140416L05-RP1-1

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	GFSK TX / CH High	Temp. & Humidity	20°C, 58%

		96	6 Chambe	er_B at 3N	Meter / Ho	rizontal			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1018.00	53.33		-2.88	50.45		74.00	54.00	-3.55	Peak
1178.00	57.89	47.73	-2.89	55.00	44.84	74.00	54.00	-9.16	AVG
1480.00	55.67		-2.90	52.77		74.00	54.00	-1.23	Peak
1622.00	51.52		-1.75	49.77		74.00	54.00	-4.23	Peak
3000.00	57.53	41.79	4.08	61.61	45.87	74.00	54.00	-8.13	AVG
4380.00	41.62		7.04	48.65		74.00	54.00	-5.35	Peak
4905.00	39.46		8.24	47.70		74.00	54.00	-6.30	Peak
6645.00	39.47		12.23	51.70		74.00	54.00	-2.30	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1096.00	55.23		-2.88	52.34		74.00	54.00	-1.66	Peak
1286.00	52.00		-2.89	49.11		74.00	54.00	-4.89	Peak
1494.00	53.17		-2.90	50.27		74.00	54.00	-3.73	Peak
1572.00	56.84	44.95	-2.22	54.62	42.73	74.00	54.00	-11.27	AVG
3000.00	56.77	40.33	4.08	60.85	44.41	74.00	54.00	-9.59	AVG

Remark:

3210.00

4950.00

6495.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

4.25

8.34

12.26

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

48.06

47.87

50.85

74.00

74.00

74.00

54.00

54.00

54.00

-5.94

-6.13

-3.15

Peak

Peak

Peak

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

43.81

39.53

38.60

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Compliance Certification Services Inc.

FCC ID: YWX-SA13AIO2 Report No.: T140416L05-RP1-1

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	8-DPSK TX / CH Low	Temp. & Humidity	20°C, 58%

		96	6 Chambe	er_B at 3N	Meter / Ho	rizontal				
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark	
1156.00	58.13	47.36	-2.89	55.24	44.47	74.00	54.00	-9.53	AVG	
1506.00	53.70		-2.84	50.86		74.00	54.00	-3.14	Peak	
1700.00	48.86		-1.01	47.85		74.00	54.00	-6.15	Peak	
1986.00	44.90		1.69	46.59		74.00	54.00	-7.41	Peak	
3000.00	57.54	40.88	4.08	61.62	44.96	74.00	54.00	-9.04	AVG	
3210.00	42.64		4.25	46.89		74.00	54.00	-7.11	Peak	
4935.00	39.91		8.31	48.22		74.00	54.00	-5.78	Peak	
6540.00	39.00		12.26	51.26		74.00	54.00	-2.74	Peak	
		9	66 Chaml	per_B at 3	3Meter / V	ertical				

		9	66 Chaml	per_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1112.00	57.37	44.18	-2.88	54.49	41.30	74.00	54.00	-12.70	AVG
1258.00	52.21		-2.89	49.32		74.00	54.00	-4.68	Peak
1570.00	54.44		-2.24	52.20		74.00	54.00	-1.80	Peak
1948.00	45.00		1.33	46.33		74.00	54.00	-7.67	Peak
3000.00	56.29	39.24	4.08	60.37	43.32	74.00	54.00	-10.68	AVG
3210.00	43.53		4.25	47.78		74.00	54.00	-6.22	Peak
4815.00	39.35		8.06	47.40		74.00	54.00	-6.60	Peak
6465.00	38.60		12.17	50.76		74.00	54.00	-3.24	Peak

Remark

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

Margin = Result - Limit

 $Remark\ Peak = Result(PK) - Limit(AV)$

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	8-DPSK TX / CH Middle	Temp. & Humidity	20°C, 58%

Report No.: T140416L05-RP1-1

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1176.00	58.06	47.52	-2.89	55.17	44.63	74.00	54.00	-9.37	AVG
1332.00	50.98		-2.89	48.09		74.00	54.00	-5.91	Peak
1476.00	55.24		-2.90	52.34		74.00	54.00	-1.66	Peak
1726.00	49.96		-0.77	49.19		74.00	54.00	-4.81	Peak
3000.00	57.33	42.00	4.08	61.41	46.08	74.00	54.00	-7.92	AVG
3210.00	44.17		4.25	48.42		74.00	54.00	-5.58	Peak
4905.00	39.55		8.24	47.79		74.00	54.00	-6.21	Peak
5955.00	39.10		10.67	49.77		74.00	54.00	-4.23	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1098.00	54.11		-2.88	51.22		74.00	54.00	-2.78	Peak
1284.00	52.86		-2.89	49.97		74.00	54.00	-4.03	Peak
1570.00	57.53	45.11	-2.24	55.29	42.87	74.00	54.00	-11.13	AVG
3000.00	56.21	40.23	4.08	60.29	44.31	74.00	54.00	-9.69	AVG
3210.00	42.92		4.25	47.17		74.00	54.00	-6.83	Peak

Remark

4935.00

6525.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

8.31

12.26

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

74.00

74.00

54.00

54.00

-5.79

-3.02

Peak

Peak

48.21

50.98

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

39.90

38.72

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Compliance Certification Services Inc.

FCC ID: YWX-SA13AIO2 Report No.: T140416L05-RP1-1

74.00

74.00

74.00

74.00

44.53

54.00

54.00

54.00

54.00

-9.47

-5.32

-6.26

-2.57

AVG

Peak

Peak

Peak

Product Name	AIO Panel	Test By	Rueyyan Lin
Test Model	DMS-SA1300-A1E	Test Date	2014/04/02
Test Mode	8-DPSK TX / CH High	Temp. & Humidity	20°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1178.00	57.58	47.64	-2.89	54.69	44.75	74.00	54.00	-9.25	AVG
1332.00	50.64		-2.89	47.75		74.00	54.00	-6.25	Peak
1478.00	55.28		-2.90	52.39		74.00	54.00	-1.61	Peak
1726.00	49.00		-0.77	48.24		74.00	54.00	-5.76	Peak
3000.00	57.01	41.88	4.08	61.09	45.96	74.00	54.00	-8.04	AVG
3885.00	42.75		5.54	48.29		74.00	54.00	-5.71	Peak
4920.00	39.38		8.28	47.66		74.00	54.00	-6.34	Peak
5970.00	39.69		10.71	50.40		74.00	54.00	-3.60	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1094.00	54.39		-2.88	51.51		74.00	54.00	-2.49	Peak
1288.00	52.02		-2.89	49.13		74.00	54.00	-4.87	Peak
1416.00	50.64		-2.90	47.74		74.00	54.00	-6.26	Peak
1566.00	57.06	45.03	-2.28	54.78	42.75	74.00	54.00	-11.25	AVG

Remark:

3000.00

3210.00

4845.00

6915.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

4.08

4.25

8.12

12.15

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

60.19

48.68

47.74

51.43

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

56.11

44.42

39.62


39.28


40.45


Margin = Result - Limit


 $Remark\ Peak = Result(PK) - Limit(AV)$


Restricted Band Edges

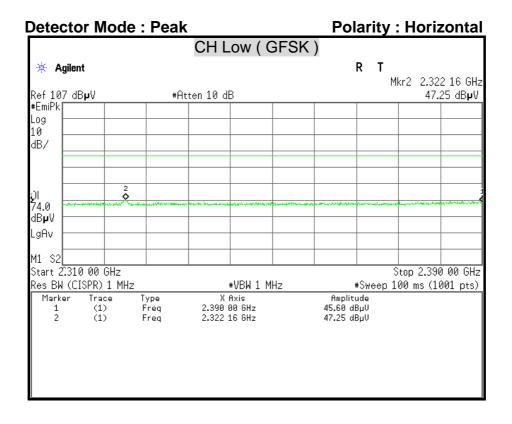


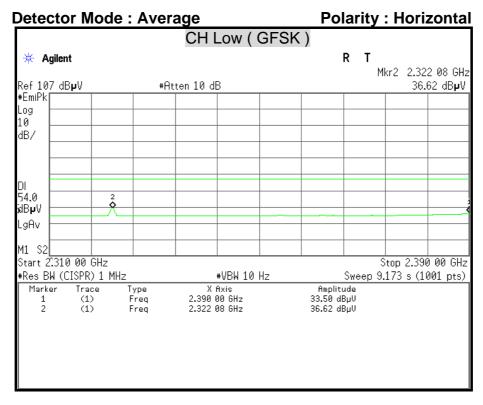


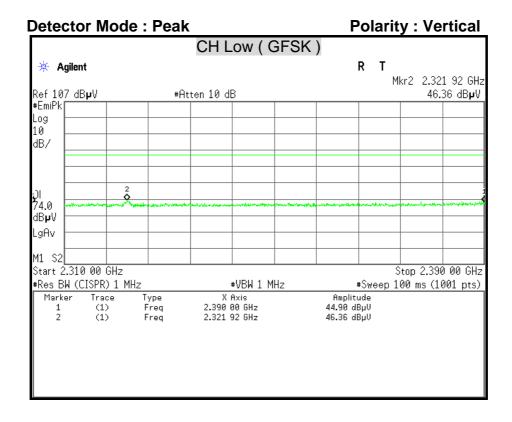


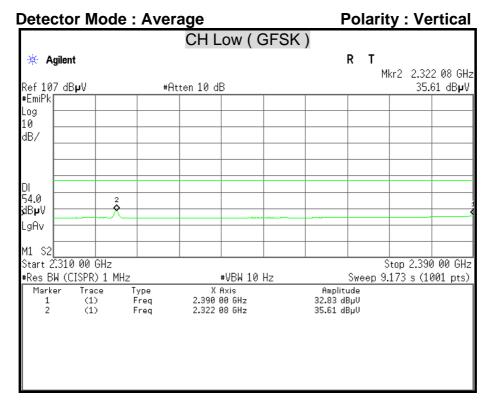


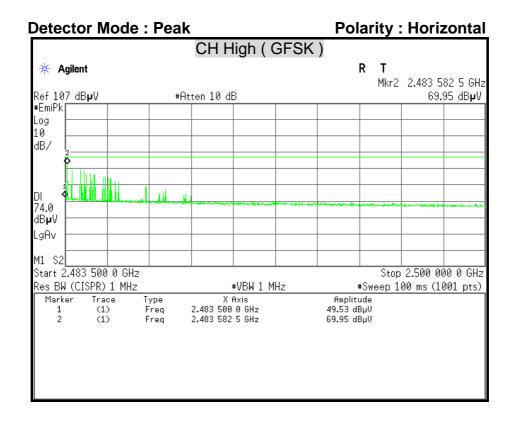


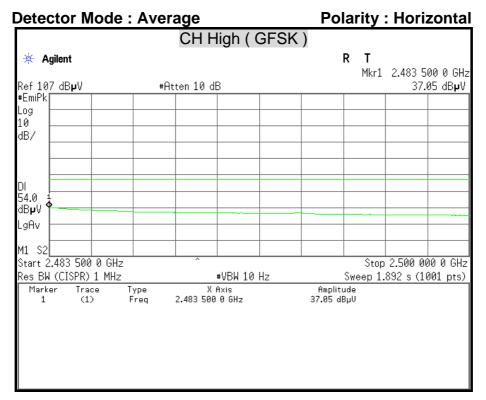


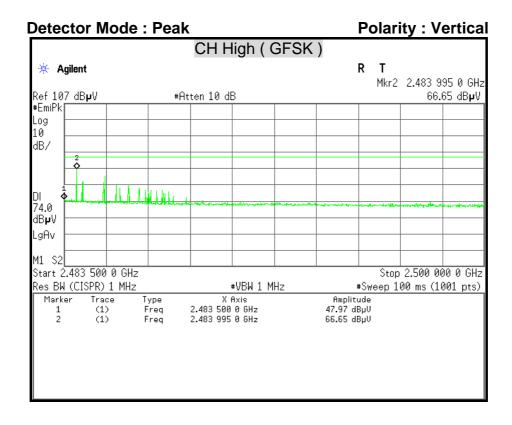


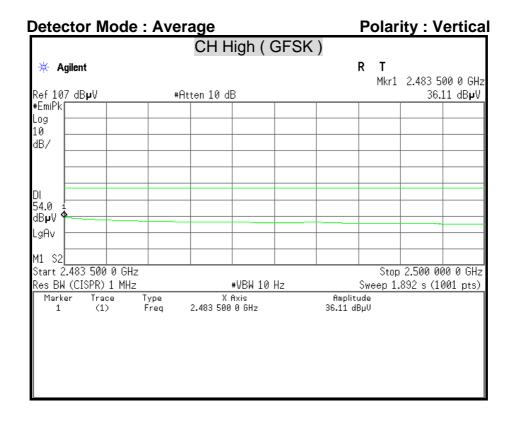


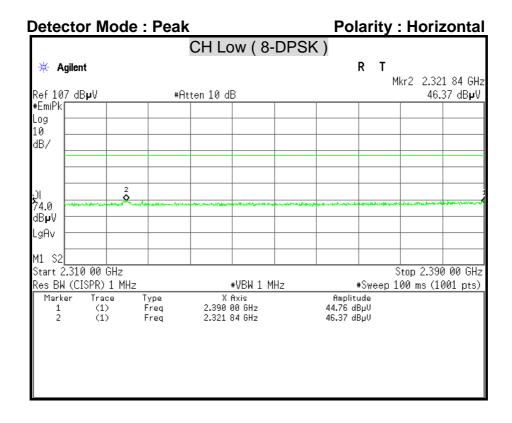


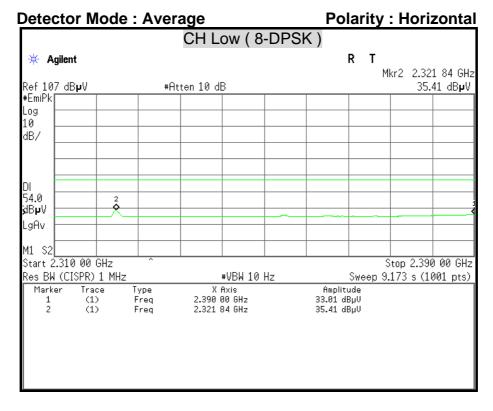


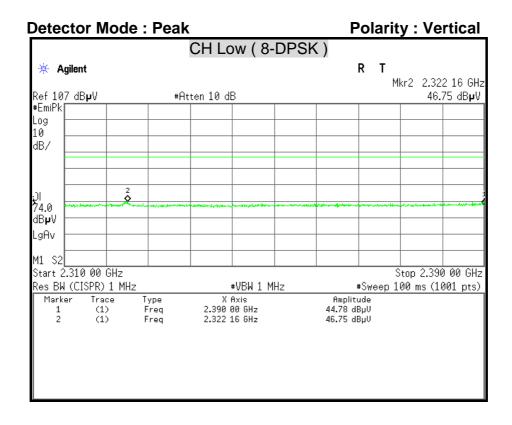


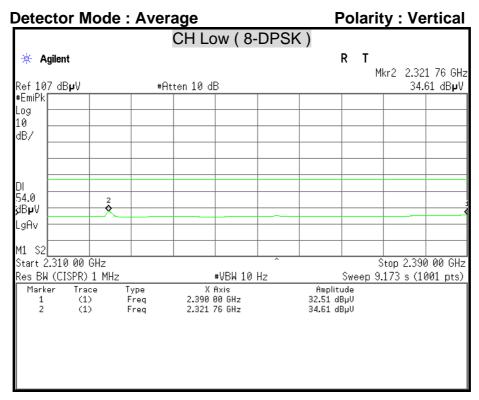

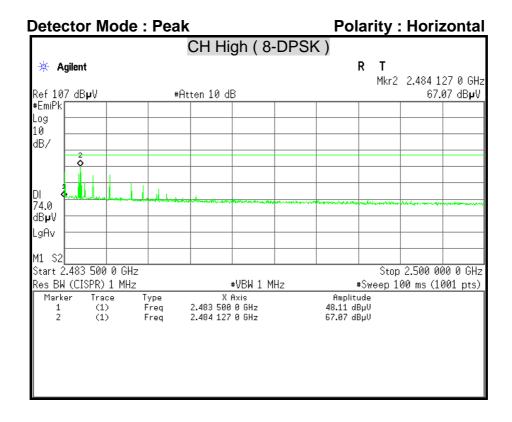

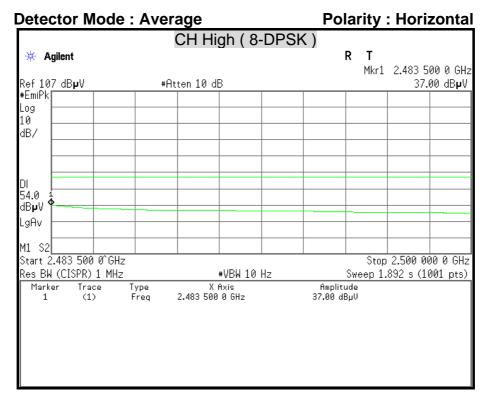

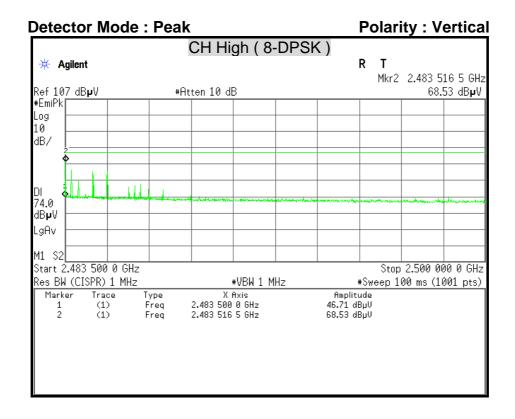

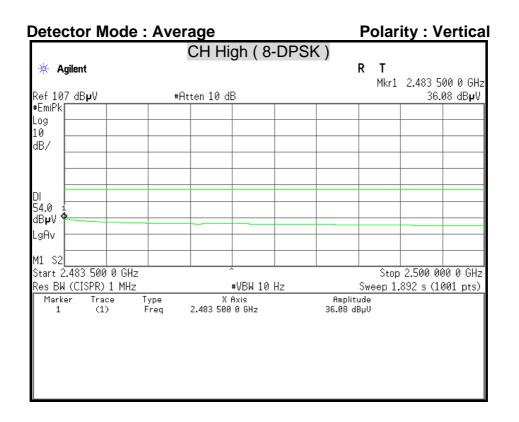

7.9 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range	Conducted Limit (dBµv)			
(MHz)	Quasi-peak	Average		
0.15 - 0.50	66 to 56	56 to 46		
0.50 - 5.00	56	46		
5.00 - 30.0	60	50		


TEST EQUIPMENT


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/11/2014
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/10/2015
EMI Receiver	ROHDE & SCHWARZ	ESHS 30	838550/003	11/07/2014
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100117	07/01/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Report No.: T140416L05-RP1-1

TEST SETUP

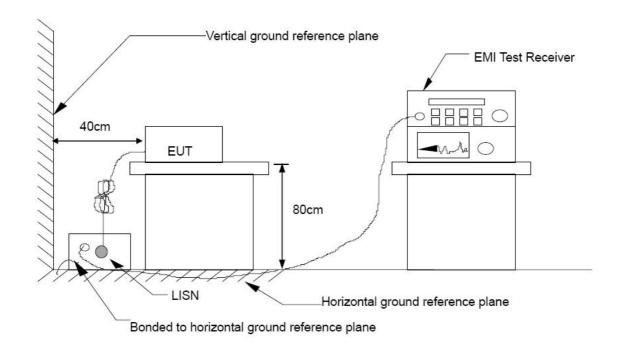

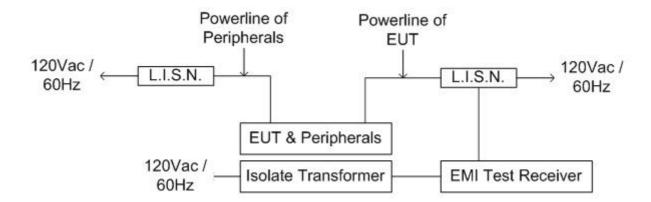

TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009.

The test procedure is performed in a $4m \times 3m \times 2.4m$ (L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) \times 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.


The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

TEST RESULTS

Product Name	AIO Panel	Test By	Alan Wu	
Test Model	DMS-SA1300-A1E (AVCT / 105-H-1508)	Test Date	2014/03/25	
Test Mode	Normal Operating / Elevation of 75°	Temp. & Humidity	22°C, 57%	

LINE

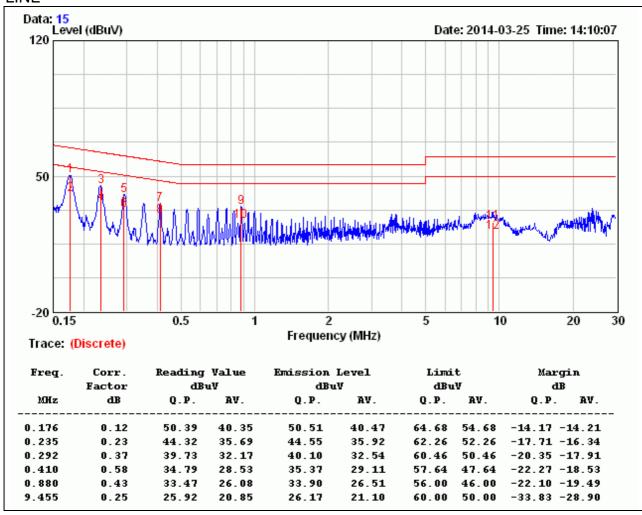


Remark:

- 1. Correction Factor = Insertion loss + Cable loss
- 2. Emission level = Reading Value + Correction factor
- 3. Margin value = Emission level Limit value

Product Name AIO Panel		Test By	Alan Wu	
Test Model	DMS-SA1300-A1E (AVCT / 105-H-1508)	Test Date	2014/03/25	
Test Mode	Normal Operating / Elevation of 75°	Temp. & Humidity	22°C, 57%	

NEUTRAL

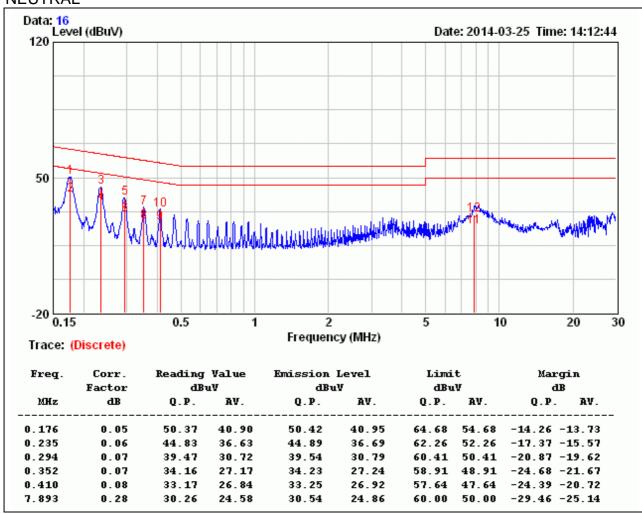

Remark:

- 1. Correction Factor = Insertion loss + Cable loss
- 2. Emission level = Reading Value + Correction factor
- 3. Margin value = Emission level Limit value