

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 subpart C, §15.225 and
RSS-210 issue 10 Annex B section B.6

FOR:

Essence Security International Ltd.
Tag Reader with Keypad
Model: ES700TRKPD-ES-M02
FCC ID: YXG-ES700TRKPD
IC: 11061A- ES700TRKPD

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes.....	3
3	Manufacturer information.....	3
4	Test details	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transceiver characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	In band radiated emissions	7
7.2	Out of band radiated emissions.....	10
7.3	Frequency stability test	14
7.4	Occupied bandwidth test.....	16
7.5	Antenna requirements	18
8	APPENDIX A Test equipment and ancillaries used for tests.....	19
9	APPENDIX B Test equipment correction factors.....	20
10	APPENDIX C Measurement uncertainties	22
11	APPENDIX D Test laboratory description	23
12	APPENDIX E Specification references	24
13	APPENDIX F Abbreviations and acronyms.....	25

1 Applicant information

Client name: Essence Security International Ltd.
Address: 12 Abba Eban Avenue, Ackerstein Towers Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 7324 47735
Fax: +972 9772 9962
E-mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

2 Equipment under test attributes

Product name: Tag Reader with Keypad
Product type: Transceiver
Model(s): ES700TRKPD-ES-M02
Serial number: 3319093700002221
Hardware version: 3.E
Software release: 1.5.3
Receipt date 28-Aug-19

3 Manufacturer information

Manufacturer name: Essence Security International Ltd.
Address: 12 Abba Eban Avenue, Ackerstein Towers Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 7324 47735
Fax: +972 9772 9962
E-Mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

4 Test details

Project ID: 33716
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 02-Sep-19
Test completed: 06-Nov-19
Test specification(s): FCC CFR 47 PART 15 subpart C, §15.225 class B
RSS-210 issue 10 Annex B section B.6

5 Tests summary


Test

Transmitter characteristics

FCC Sections 15.225(a) (b) (c) / RSS-210, Section B.6(a), (b), (c), In band radiated emissions	Pass
FCC Sections 15.225(d) / RSS-210, Section B.6(d), Out of band radiated emissions	Pass
FCC Section 15.225(e) / RSS-210, Section B.6, Frequency stability	Pass
FCC Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission	Not required
FCC Section 15.215(c) / RSS-Gen, Section 6.6, Occupied bandwidth	Pass
FCC Section 15.203/ RSS-Gen, Section 8.3, Antenna requirements	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. I. Zilberstein, test engineer, EMC & Radio	02-Sep-19 – 06-Nov-19	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	03-May-20	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	26-Aug-20	


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT , ES700TRKPD-ES-M02 is an encrypted, wireless, access control RFID tag reader (13.56MHz) with a keypad and 5-button design to provides system activation controls and status indications.
The EUT is Grade 2 Class II, works on 916.5MHz with RFID on 13.56MHz.

6.2 Test configuration

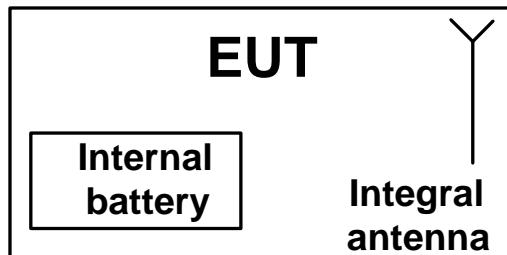

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transceiver characteristics

Type of equipment							
X	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Assigned frequency ranges		13.553 – 13.567 MHz					
Operating frequencies		13.56 MHz					
Is transmitter output power variable?		X	No				
		Yes		continuous variable			
				stepped variable with stepsize	dB		
				minimum RF power	dBm		
				maximum RF power	dBm		
Antenna connection							
unique coupling	standard connector	X	integral	with temporary RF connector			
		X		without temporary RF connector			
Type of modulation		AM					
Modulating test signal		ID code					
Transmitter power source							
X	Battery	Nominal rated voltage	6VDC	Battery type	4 x 1.5VDC Alkaline		
Common power source for transmitter and receiver			X	yes	No		



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification:		Sections 15.225(a) (b) (c) / RSS-210, Section B.6(a), (b), (c), In band radiated emissions		
Test procedure:		ANSI C63.10 sections 6.5		
Test mode:		Compliance		
Date(s):		28-Oct-19 - 06-Nov-19		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 6 VDC	
Remarks:				

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 In band radiated emissions

7.1.1 General

This test was performed to measure field strength of fundamental emission and modulation products from the EUT within the assigned band. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Radiated emission limits

Frequency, MHz	Field strength at 30 m distance*		Field strength at 3 m distance*	
	µV/m	dB(µV/m)	µV/m	dB(µV/m)**
13.110 – 13.410	106	40.5	10600	80.5
13.410 – 13.553	334	50.5	33400	90.5
13.553 – 13.567	15848	84.0	1584800	124.0
13.567 – 13.710	334	50.5	33400	90.5
13.710 – 14.010	106	40.5	10600	80.5

*- The limit is provided in quasi peak values.

**- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.


7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.

Figure 7.1.1 Setup for in band radiated emission measurements

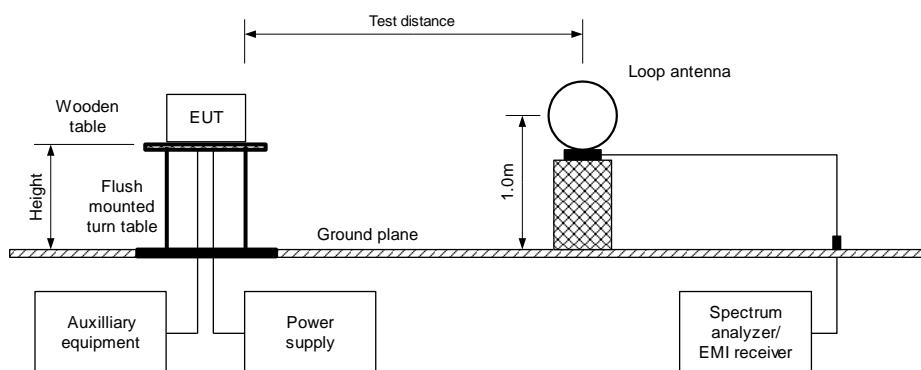



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Sections 15.225(a) (b) (c) / RSS-210, Section B.6(a), (b), (c), In band radiated emissions	
Test procedure:	ANSI C63.10 sections 6.5
Test mode:	Compliance
Date(s):	28-Oct-19 - 06-Nov-19
Temperature: 24 °C	Relative Humidity: 48 %
Air Pressure: 1012 hPa	Power: 6 VDC
Remarks:	

Table 7.1.2 In band radiated emission test results

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical)
MODULATION:	AM
MODULATING SIGNAL:	ID code
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	13.110 – 14.010 MHz
RESOLUTION BANDWIDTH:	9.0 kHz
VIDEO BANDWIDTH:	30.0 kHz

Carrier frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Azimuth**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*			
Unom							
13.562250	46.12	42.98	124.0	81.02	Y	90	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4355	HL 3903	HL 5406	HL 446				
---------	---------	---------	--------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification:	Sections 15.225(a) (b) (c) / RSS-210, Section B.6(a), (b), (c), In band radiated emissions		
Test procedure:	ANSI C63.10 sections 6.5		
Test mode:	Compliance		
Date(s):	28-Oct-19 - 06-Nov-19	Verdict:	PASS
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 6 VDC
Remarks:			

Plot 7.1.1 In band radiated emission test results

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak hold

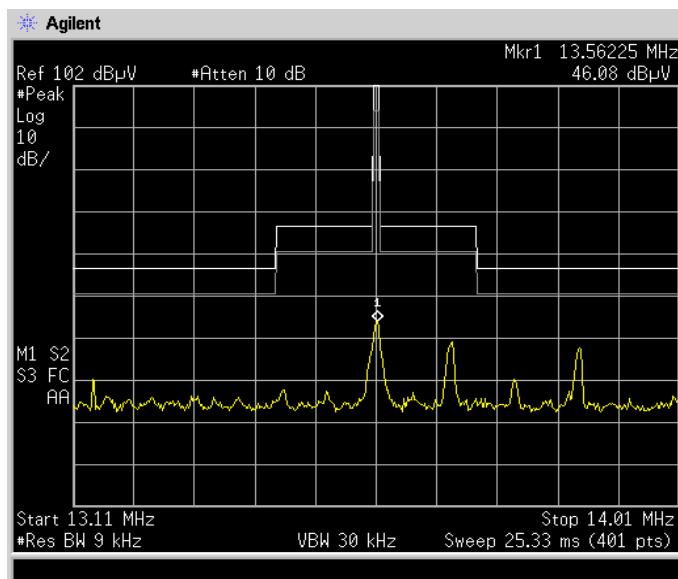



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Sections 15.225(d) / RSS-210, Section B.6(d), Out of band radiated emissions			
Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4			
Test mode: Compliance			Verdict: PASS
Date(s): 27-Oct-19			
Temperature: 24 °C	Relative Humidity: 41 %	Air Pressure: 1012 hPa	Power: 6 VDC
Remarks:			

7.2 Out of band radiated emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated emission limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705	NA	73.8 – 63.0**	NA
1.705 – 30.0*		69.5**	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	

*- The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

**- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

***- The limit decreases linearly with the logarithm of frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Sections 15.225(d) / RSS-210, Section B.6(d), Out of band radiated emissions			
Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Oct-19			
Temperature: 24 °C	Relative Humidity: 41 %	Air Pressure: 1012 hPa	Power: 6 VDC
Remarks:			

Figure 7.2.1 Radiated emissions below 30 MHz test set up


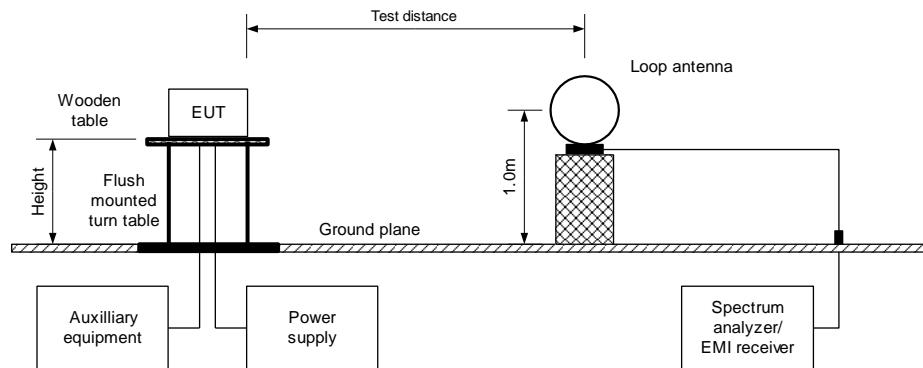


Figure 7.2.2 Radiated emissions above 30 MHz test set up



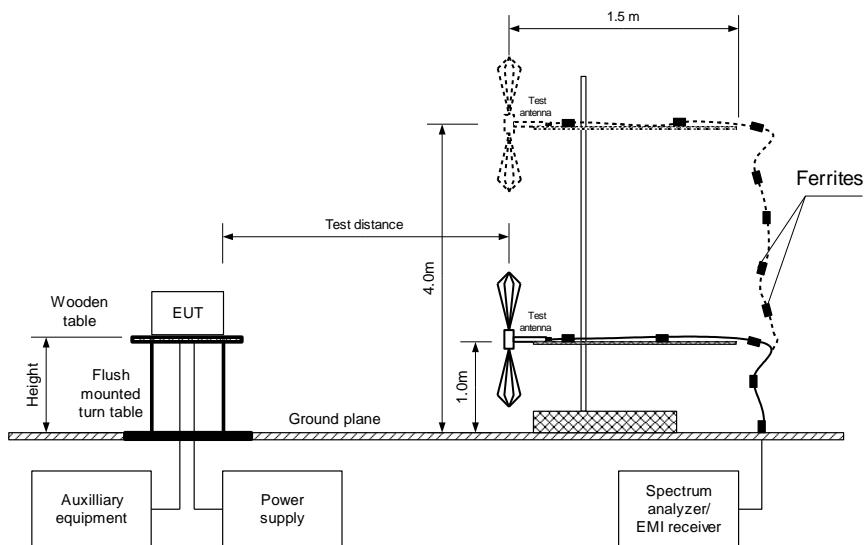

HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification:		Sections 15.225(d) / RSS-210, Section B.6(d), Out of band radiated emissions		
Test procedure:		ANSI C63.4, Sections 5.3 and 13.1.4		
Test mode:	Compliance		Verdict:	PASS
Date(s):	27-Oct-19			
Temperature: 24 °C	Relative Humidity: 41 %	Air Pressure: 1012 hPa	Power: 6 VDC	
Remarks:				

Table 7.2.2 Out of band radiated emissions test results

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical)
MODULATION:	AM
MODULATING SIGNAL:	ID code
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
1.38	52.00	49.36	64.81	15.45	V	1.0	-132	Pass
1.46	50.41	49.20	64.34	15.14	V	1.0	89	
3.15	53.57	49.32	69.50	20.18	V	1.0	58	
871.10	35.54	35.60	46.00	10.40	H	4.0	21	
934.70	36.28	36.24	46.00	9.76	V	1.2	-95	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4360	HL 3903	HL 5406	HL 5288					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Sections 15.225(d) / RSS-210, Section B.6(d), Out of band radiated emissions			
Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 27-Oct-19			
Temperature: 24 °C	Relative Humidity: 41 %	Air Pressure: 1012 hPa	Power: 6 VDC
Remarks:			


Plot 7.2.1 Radiated emission measurements from 9 kHz to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
DETECTOR: Peak hold

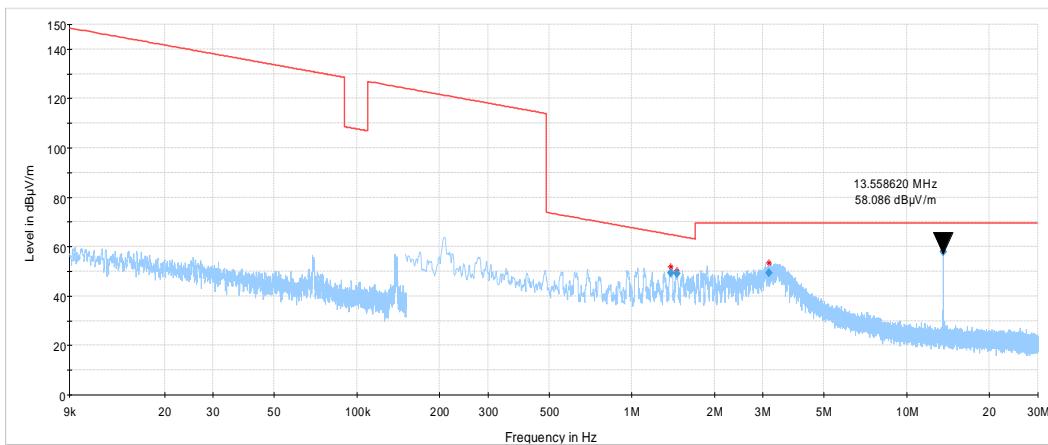

Plot 7.2.2 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
DETECTOR: Peak hold

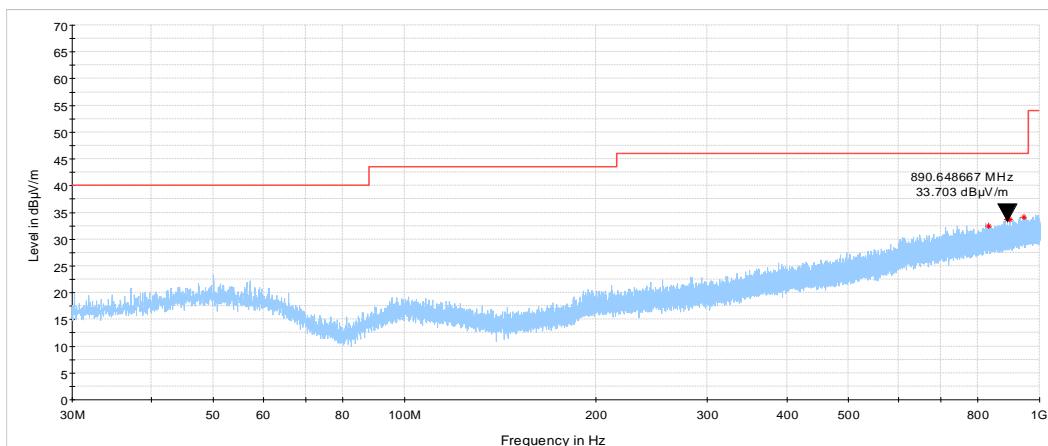



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Section 15.225(e) / RSS-210, Section B.6, Frequency stability			
Test procedure: ANSI C63.10, Section 6.8			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Oct-19			
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 6 VDC
Remarks:			

7.3 Frequency stability test

7.3.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.3.1. The test results are provided in Table 7.3.2.


Table 7.3.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement	
	%	Hz
13.553.0 – 13.567.0	± 0.01 %	1356

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT power was turned off. Temperature within test chamber was set to the required one and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.3.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then after 2, 5 and 10 minutes. The EUT was powered off.
- 7.3.2.4 The above procedure was repeated at the rest of the test temperatures and voltages as provided in Table 7.3.2.
- 7.3.2.5 Frequency displacement was calculated and compared with the limit as provided in Table 7.3.2.

Figure 7.3.1 Frequency stability test setup

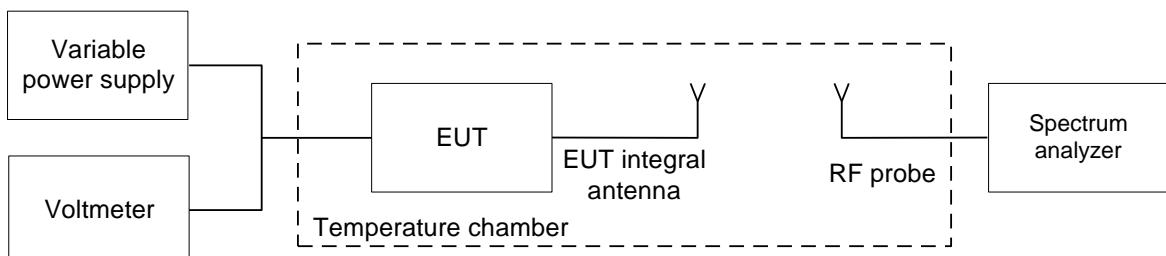



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Section 15.225(e) / RSS-210, Section B.6, Frequency stability			
Test procedure:	ANSI C63.10, Section 6.8		
Test mode:	Compliance		
Date(s):	30-Oct-19		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 6 VDC
Remarks:			

Table 7.3.2 Frequency stability test results

OPERATING FREQUENCY: 13.560 MHz
 NOMINAL POWER VOLTAGE: 6V
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Counter
 RESOLUTION BANDWIDTH: 10Hz
 VIDEO BANDWIDTH: 3KHz
 MODULATION: Unmodulated

Temperature, °C	Voltage, V	Frequency, MHz				Max frequency drift, Hz		Limit, Hz	Margin, Hz	Verdict
		Start up	2 nd min	5 th min	10 th min	Positive	Negative			
-10	nominal	13.560090	13.560089	13.560089	13.560089	90	0	1356	-1266	Pass
20	nominal	13.560029	13.560030	*13.560030	13560031	31	0		-1325	
20	nominal -15%	13.560020	13.560020	13.560022	13.560024	24	0		-1332	
50	nominal	13.559975	13.559973	13.559972	13.559970	0	10		-1346	

** - Margin = Maximum frequency drift – Specification limit

Reference numbers of test equipment used

HL 2909	HL 493	HL 1791					
---------	--------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification:	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth		
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance		
Date(s):	02-Sep-19		
Temperature: 23.7 °C	Relative Humidity: 53 %	Air Pressure: 1006 hPa	Power: 6 VDC
Remarks:			

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.3.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
13.110 – 13.410	
13.410 – 13.553	
13.553 – 13.567	20.0
13.567 – 13.710	
13.710 – 14.010	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.4.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.
- 7.4.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.4.1 Occupied bandwidth test setup





HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth					
Test procedure: ANSI C63.10 section 6.9.2					
Test mode: Compliance				Verdict:	PASS
Date(s): 02-Sep-19					
Temperature: 23.7 °C	Relative Humidity: 53 %	Air Pressure: 1006 hPa		Power: 6 VDC	
Remarks:					

Table 7.4.2 Occupied bandwidth test results


ASSIGNED FREQUENCY BAND 13.553 – 13.567 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 300 Hz
 VIDEO BANDWIDTH: 3 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: AM

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	13.55771	0.010	NA	13.55770	13.553	Pass
High	13.56249	NA	0.090	13.56258	13.567	Pass

Reference numbers of test equipment used

HL 2909	HL 4136	HL 3433	HL 1809				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

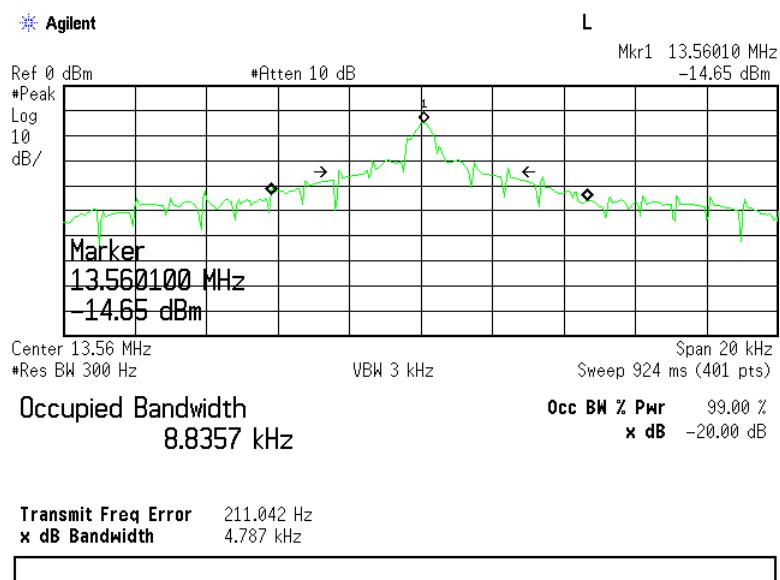Plot 7.4.1 Occupied bandwidth test result



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance			Verdict: PASS
Date(s): 10-Sep-19			
Temperature: 24.2 °C	Relative Humidity: 48 %	Air Pressure: 1009 hPa	Power: 6 VDC
Remarks:			

7.5 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	Comply

Photograph 7.5.1 Antenna assembly

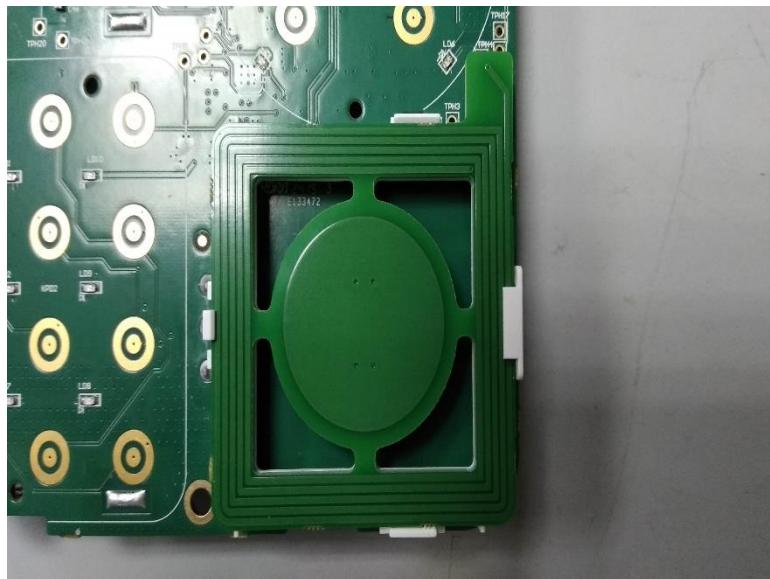



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-19	24-Feb-20
0493	Temperature Chamber -45...175 deg C	Thermotron	S-1.2 Mini-Max	14016	19-Jun-19	19-Jun-20
1791	Laboratory DC Power Supply, Dual Tracking Output	RACOM	PS-404	8800692	10-Nov-19	10-Nov-20
1809	HygroThermometer, Min/Max Memory	Delta TRAK	13301	NA	11-Aug-19	11-Aug-20
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	04-Apr-19	04-Apr-20
3433	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT-SMSM+	25679	15-Apr-19	15-Apr-20
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-19	07-Apr-20
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 137	24-Apr-19	24-Apr-20
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	04-Aug-19	04-Aug-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	31-Dec-18	31-Dec-19
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5406	RF cable, 18 GHz, N-N, 4.5 m	Huber-Suhner	SF118A/1 1N(x2)	500001/11 8A	11-Aug-19	11-Aug-20



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225
Date of Issue: 26-Aug-20

9 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225

Date of Issue: 26-Aug-20

10 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225
Date of Issue: 26-Aug-20

11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225
Date of Issue: 26-Aug-20

12 APPENDIX E

Specification references

FCC 47CFR part 15: 2019

Radio Frequency Devices

ANSI C63.10: 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-210 Issue 10: 2019

Licence- Exempt Radio Apparatus: Category I Equipment

RSS-Gen Issue 5: 2019

General Requirements and Information for the Certification of Radiocommunication Equipment



HERMON LABORATORIES

Report ID: ESIRAD_FCC.33716_FCC15.225
Date of Issue: 26-Aug-20

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT