


Produkte
 Products

Prüfbericht - Nr.: 19660243 001		Seite 1 von 16			
<i>Test Report No.:</i>					
Auftraggeber: HANDHELD GROUP AB <i>Client:</i> Kinnegatan 17 A 531 33 Lidköping Sweden Tel: +46 (0) 510-54 71 70		<i>Page 1 of 16</i>			
Gegenstand der Prüfung: Rugged 7" Tablet <i>Test item:</i>					
Bezeichnung: <i>Identification:</i>	118207	Serien-Nr.: <i>Serial No.</i>			
Wareneingangs-Nr.: <i>Receipt No.:</i>	1803156247	Eingangsdatum: 20.07.2016 <i>Date of receipt:</i>			
Prüfort: <i>Testing location:</i>	Refer Page 4 of 16 for test facilities				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15: Subpart C & RSS 210 Issue 9 ANSI C63.10-2013				
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). The test items passed the test specification(s).				
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (India) Pvt. Ltd. 82/A, 3rd Main, West Wing, Electronic City Phase 1 Hosur Road, Bangalore – 560 100. India FCC Registration No.: 176555 & IC OATS Reg. Number.: 3466E				
geprüft / tested by:		kontrolliert / reviewed by:			
10.11.2016	Girish Kumar G Engineer		14.11.2016	Saibaba Siddapur Assistant Manager	
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other Aspects:		FCC ID: YY3-118207 & IC: 11695A-118207			
Abkürzungen: P(pass) = entspricht Prüfgrundlage F(all) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			Abbreviations: P(pass) = passed F(all) = failed N/A = not applicable N/T = not tested		
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>					

TÜV Rheinland India Pvt. Ltd. 82/A, 3rd Main, West Wing Electronic City Phase 1, Hosur Road, Bangalore-560100, India
 Tel.: +9180 6723 3500 • Fax: +9180 6723 3542 • Web: www.tuv.com

Test Result Summary

Test Item	Clause		Result
	FCC	IC	
Occupied Bandwidth & 20dB Bandwidth	FCC 15.215(c)	RSS-Gen Issue 4 6.6	Pass
Frequency Tolerance	FCC 15.225(e)	RSS 210 Issue 9, B.6	Pass
Radiated Emissions & Field Strength of Fundamental Emissions	FCC15.225(a)(b)(c)(d) /15.209	RSS 210 Issue 9, B 6.0 & RSS-Gen Issue 4,Section 8.9/8.10	Pass
Conducted Emissions on A.C Power Lines	FCC Part 15.207	RSS-Gen Issue 4 section 8.8	Pass

Content

List of Test and Measurement Instruments.....	4
General Product Information	5
Product Function and Intended Use.....	5
Ratings and System Details.....	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software	6
Test Modes – Data Rates and Modulations	6
Test Methodology	7
Radiated Emission Test	8
Conducted Emission Test on A.C. mains line	9
Test Results	10
Occupied Bandwidth & 20dB Bandwidth.....	10
Frequency Tolerance.....	11
Radiated Emissions and Field Strength of Fundamental Emission.....	12
Conducted Emission Test on A.C. Power Line.....	14

Appendix 1: Test Setup Photo

Appendix 2: EUT External Photo

Appendix 3: EUT Internal Photo

Appendix 4: FCC Label and Label Location

Appendix 5: Block Diagram

Appendix 6: Specification of EUT

Appendix 7: Schematic Diagrams

Appendix 8: Bill of Material

Appendix 9: User Manual

Appendix 10: SAR Report

List of Test and Measurement Instruments

Equipment	Manufacturer	Model Name	Serial Number	Calibration Due Date	Periodicity
EMI Test Receiver	Rohde & Schwarz	ESU 40	100288	23.11.2016	Yearly
Broadband Antenna	Frankonia	ALX-4000	ALX-4000-806	20.01.2017	Yearly
Active Loop Antenna	Frankonia	LAX-10	LAX-10-800	22.12.2016	Yearly
Anechoic Chamber	Frankonia	-	-		-
EMI Test Receiver	Rohde & Schwarz	ESR7	101133	19.11.2016	Yearly
Two Line V-Network (LISN)	Rohde & Schwarz	ENV216	100022	03.02.2017	Yearly
Spectrum Analyzer	Agilent Technologies	E4407B	US41192772	23.04.2017	Yearly
Environmental Chamber	Envisys	EM80-40H	ET/022/14-15	09.06.2017	Yearly

Testing Facilities

TUV Rheinland (India) Private Limited
108 , Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100.

General Product Information

Product Function and Intended Use

The Algiz RT7 is a rugged tablet, designed for use by field personnel in demanding conditions. It integrates best-in-class connectivity with efficient computing and multimedia features. The tablet runs Android Lollipop (5.1.1) operating system, and comes pre-installed with many Google applications, including Google Play.

Ratings and System Details

Operating Frequency Range	13.56MHz
No. of channel	1
Number of antenna	One
Modulation	ASK
Antenna Type	Sticker type NFC antenna along with EMI Ferrite Sheet.
Supply Voltage to Module	Internal Battery Pack -> 3.7- 4.2 VDC & Adaptor 5VDC to EUT
Environmental conditions	Storage Temperature -> -40°C to +70 °C Operating Temperature-> -20°C to 50°C in a humidity up to 95% noncondensing

Test Conditions: Supply Voltage: 3.7- 4.2 VDC & Adaptor 5VDC to EUT

Environmental conditions:

Temperature: +24.6 ° C RH: 56%

www.tuv.com

Test Set-up and Operation Mode

Principle of Configuration Selection

Continuous transmission was enabled NFC 13.56MHz channel.

Test Operation and Test Software

Enabled NFC feature & kept the card near to NFC antenna of tablet, This enabled continuous NFC communication on the EUT for the tests in this report.

Special Accessories and Auxiliary Equipment

- None

Countermeasures to achieve EMC Compliance

-Testing was conducted with the Power adaptor (Adaptor image attached in external photos) cable connected to the AC mains & a ferrite bead was used on the USB cable which is connected to the adaptor (accessory). The ferrite was strapped closer to the DUT during testing. Refer appendix 1 for test setup photos. Ferrite no. 742 711 12 & 742 717 33 (make: Wurth Electronics).

Test Modes – Data Rates and Modulations

For Radiated spurious emissions, the tests were performed for low, mid, high channel and only worst case results are reported in this report.

Operational description

Whether you're collecting data, crunching numbers or viewing graphics, the Algiz RT7's powerful Qualcomm quad-core processor provides reliable, uninterrupted work performance.

And the Algiz RT7 doesn't just run Android flawlessly — its capacitive touchscreen also enhances the Android experience with five-point multi-touch capability, 600-nit high-brightness sunlight readability and chemically strengthened glass.

Yet the Algiz RT7 also meets stringent MIL-STD-810G military standards for withstanding extreme temperatures, drops and vibrations, and its IP65 rating means it's waterproof and fully protected against sand and dust.

Note: Product Rugged 7" Tablet has multiple protocols. All the supported wireless protocols and their respective test report numbers are mentioned in the below table.

Radio Protocol	Report Number
Bluetooth	19660241 001
Wi-Fi (IEEE 802.11bgn)	19660240 001
BLE	19660242 001
GSM	19660244 001
W-CDMA	19660245 001
LTE	19660246 001

Test Methodology


Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10 - 2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for the frequency range from 9 kHz to 30MHz & 30MHz to 1GHz and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1m and 4m for 30MHz -1GHz & height of the measuring antennas was scanned for 30MHz -1GHz with the center of the measurement loop set at 1 m above ground, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations for 30MHz to 1GHz frequency range. The measurement below 30MHz was performed by loop antenna.


The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded.

Test Setup Configuration

Frequency Range 9 kHz -30 MHz

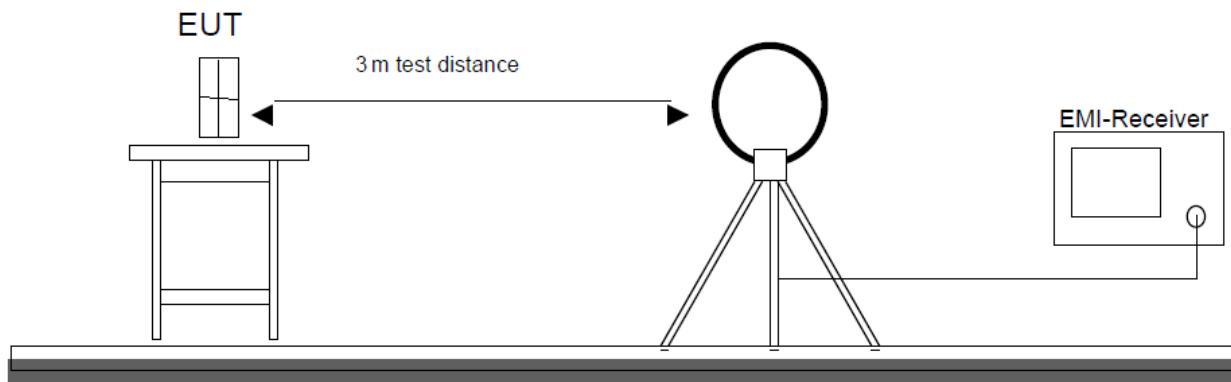


Frequency Range 30MHz -1GHz

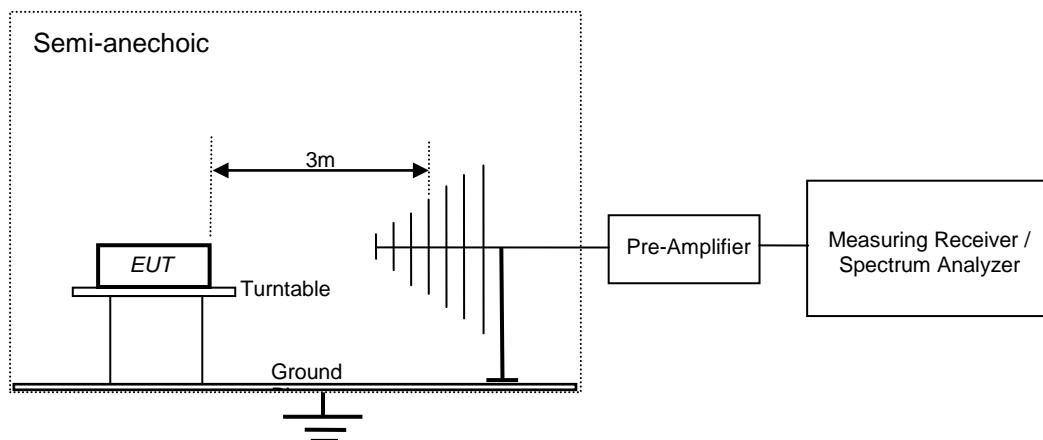

Conducted Emission Test on A.C. mains line

The equipment under test (EUT) was placed on a wooden table 80cm above the ground plane, the LISN was placed 80cm away from the EUT. The test was performed in accordance with ANSI C63.10 - 2013, with the following: an initial measurement was performed in peak and average detection mode on the live and neutral lines. The pre-scan was performed by peak detection on both live and neutral conductors. Any emissions recorded within 20dB of the relevant limit line were re-measured using quasi-peak and average detections, the 6 worst cases were recorded in the table of results.

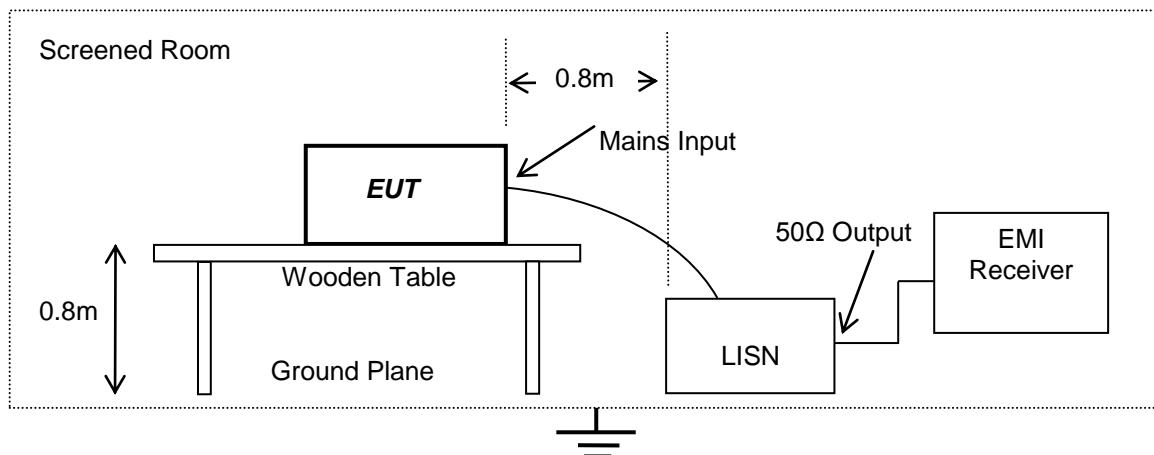

Test Results


Occupied Bandwidth & 20dB Bandwidth

Result

Pass


Test Specification FCC 15.215C & RSS-Gen Issue 4 6.6
 Measurement Bandwidth (RBW) 30 kHz

Test Method:

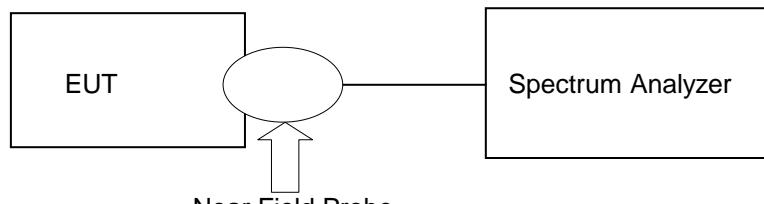


Test Result:

Channel Frequency (MHz)	Occupied Bandwidth (Hz)
13.56	61.48

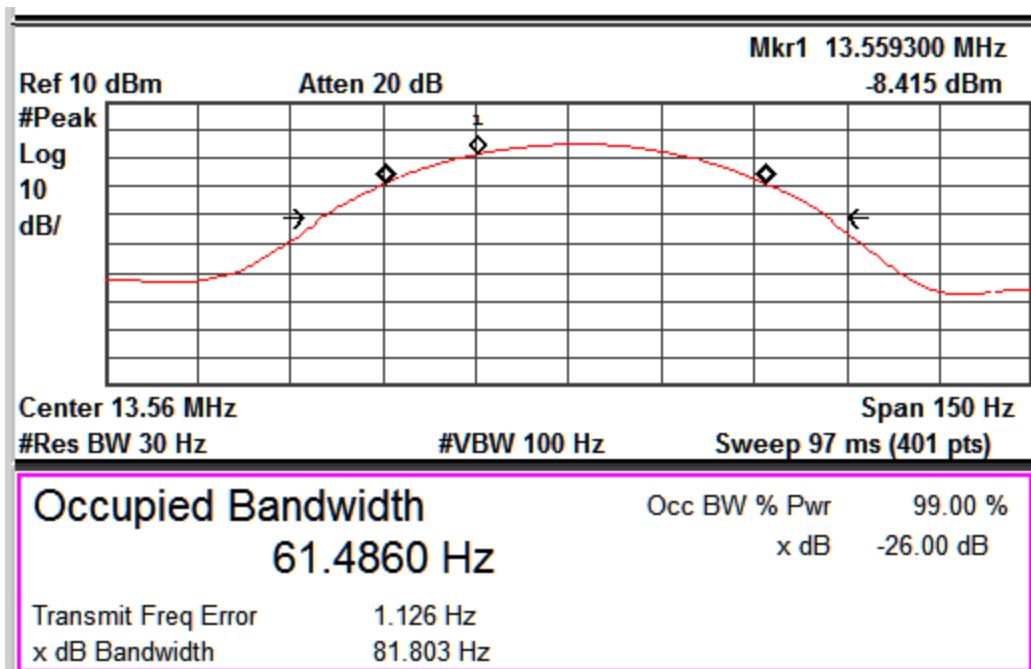

Frequency Tolerance
Result
Pass

Test Specification FCC 15.225(e) & RSS 210 Issue 9, B.6
 Limit $\pm 0.01\%$

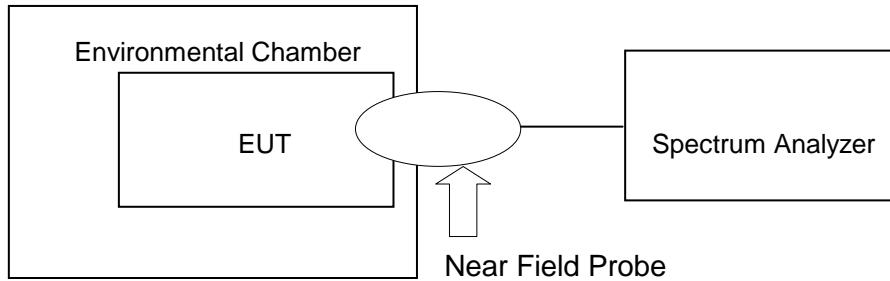Test Method:

Test Result:

Power Supply (V)	Environment Temperature (°C)	Channel Frequency Fc (MHz)	Measured Frequency Fm (MHz)	Deviation Fc~Fm (Hz)	Deviation Fc~Fm (%)	Limit (%)
3.9	50	13.56	13.559250	75	-0.005	± 0.01
3.9	40	13.56	13.559250	75	-0.005	± 0.01
3.9	30	13.56	13.559250	75	-0.005	± 0.01
3.9	20	13.56	13.559250	75	-0.005	± 0.01
3.9	10	13.56	13.559250	75	-0.005	± 0.01
3.9	0	13.56	13.559250	75	-0.005	± 0.01
3.9	-10	13.56	13.559250	75	-0.005	± 0.01
3.9	-20	13.56	13.559250	75	-0.005	± 0.01
3.9	-30	13.56	13.559250	75	-0.005	± 0.01
3.7	20	13.56	13.559250	75	-0.005	± 0.01
3.9	20	13.56	13.559250	75	-0.005	± 0.01
4.2	20	13.56	13.559250	75	-0.005	± 0.01

Radiated Emissions and Field Strength of Fundamental Emission Result**Pass**

Test Specification	FCC15.225(a)(b)(c)(d) & 15.209 & RSS 210 Issue 9, B 6.0 & RSS-Gen Issue 4,Section 8.9/8.10
Test Method	ANSI C63.10-2013
Measurement Location	Semi Anechoic Chamber
Measuring Distance	3m
Detection	QP for frequency below 1GHz, Average for frequency above 1GHz
Requirement	As per the limits mentioned in the bellow table

Radiated Emission Limit:

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 88.50 – 53.80, 53.80 – 43.00 and 49.5dB μ V/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test results:

For Frequency Range 9kHz – 30MHz

No emissions found in this frequency range.

Fundamental Emission measured Values.

Channel Frequency (MHz)	Polarization	Frequency (MHz)	Measured Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
13.56	Parallel	13.56	49.97	124	-74.03
		13.14	25.98	80.50	-54.52
		13.47	27.53	90.47	-62.94
		13.69	25.92	90.47	-64.55
		13.83	25.43	80.50	-55.07
	Perpendicular	13.56	48.33	124	-75.67
		13.35	25.93	80.50	-54.57
		13.47	25.73	90.47	-64.74
		13.63	28.60	90.47	-61.87
		13.85	26.80	80.50	-53.70

For Frequency Range 30MHz – 1GHz

Test Performed on both Battery Mode & Power Adaptor Mode, only worst case test results are reported for the 1GB RAM Variant

Polarization	Frequency (MHz)	Emission (dBm)	Limit (dB μ V/m)	Margin (dB)
Vertical	31.87	25.39	40.00	-14.61
	211.30	30.53	43.50	-12.97
Horizontal	32.66	22.06	40.00	-17.94
	211.06	39.85	43.50	-03.65
	217.35	38.62	46.00	-07.38

Test Performed on both Battery Mode & Power Adaptor Mode, only worst case test results are reported for the 2GB RAM Variant

Polarization	Frequency (MHz)	Emission (dBm)	Limit (dB μ V/m)	Margin (dB)
Vertical	30.64	26.89	40.0	-13.11
	209.73	32.19	43.5	-11.31
Horizontal	35.62	25.81	40.0	-14.19
	210.82	40.67	43.5	-02.83
	216.01	39.27	46.0	-06.73

www.tuv.com

Conducted Emission Test on A.C. Power Line

Result


Pass

Test Specification : FCC Part 15.207 & RSS-Gen Issue 4 section 8.8
Test Method : ANSI C63.10-2013
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 120VAC,60Hz

Conducted Emission Limit:

Frequency of Emission (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V/m)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with the logarithm of the frequency

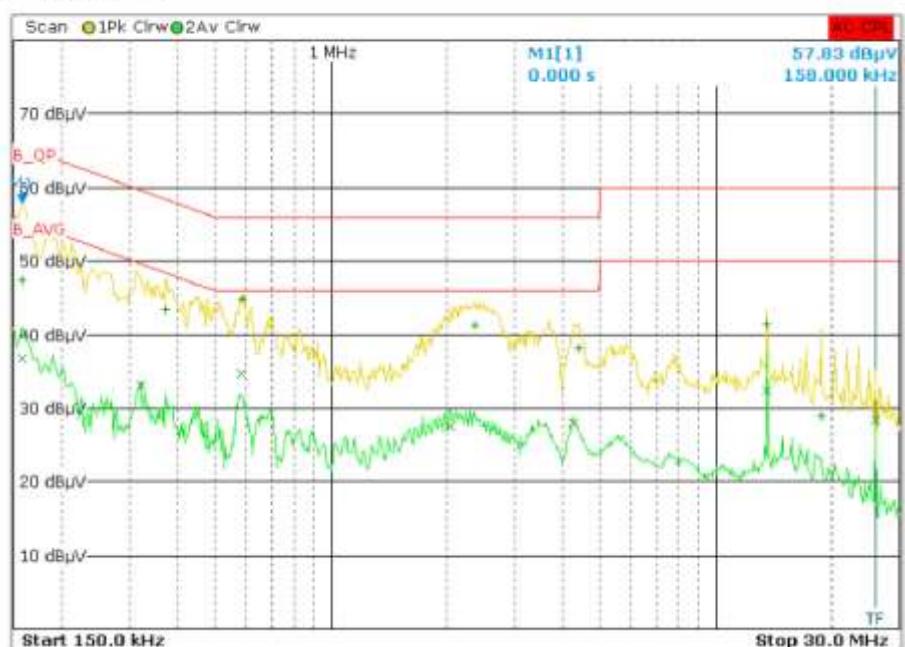Test Results:
Scan Diagram

Final Results

Meas Time	1.0 s				
Margin	6.0 dB				
Peaks	25				
Trace					
Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	584.000000000 kHz	44.72		Quasi Peak	-11.28
2	582.000000000 kHz	34.60		Average	-11.40
1	2.370000000 MHz	41.32		Quasi Peak	-14.68
1	374.000000000 kHz	43.36		Quasi Peak	-15.05
2	322.000000000 kHz	33.19		Average	-16.47
2	13.558000000 MHz	32.44		Average	-17.56
1	4.406000000 MHz	38.24		Quasi Peak	-17.76
2	4.270000000 MHz	28.08		Average	-17.92
1	158.000000000 kHz	47.36		Quasi Peak	-18.21
2	2.038000000 MHz	27.56		Average	-18.44
1	13.558000000 MHz	41.48		Quasi Peak	-18.52
2	158.000000000 kHz	36.74		Average	-18.83
2	26.002000000 MHz	28.45		Average	-21.55
1	18.762000000 MHz	28.95		Quasi Peak	-31.05

Mode: Line

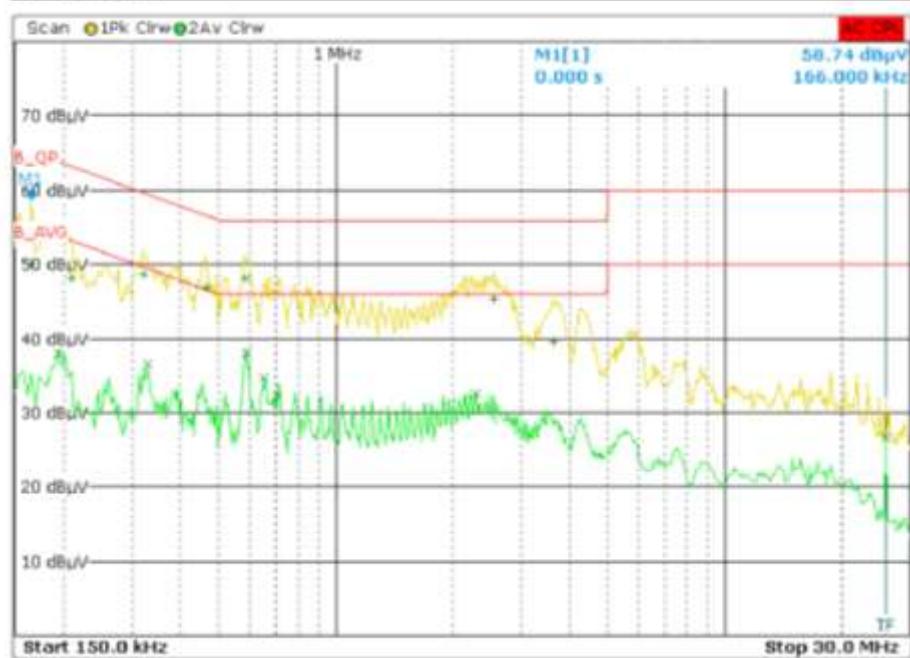Scan Diagram



Final Results

Meas Time	1.0 s					
Margin	6.0 dB					
Peaks	25					
Trace						
Trace	Frequency	Level (dB μ V)	Phase	Detector	Delta	Limit/dB
1	582.000000000 kHz	48.09		Quasi Peak		-7.91
2	586.000000000 kHz	37.92		Average		-8.08
1	466.000000000 kHz	46.93		Quasi Peak		-9.65
1	2.542000000 MHz	45.38		Quasi Peak		-10.62
1	322.000000000 kHz	48.55		Quasi Peak		-11.11
2	654.000000000 kHz	34.62		Average		-11.38
2	330.000000000 kHz	36.59		Average		-12.86
2	2.282000000 MHz	32.58		Average		-13.42
2	706.000000000 kHz	32.20		Average		-13.80
1	210.000000000 kHz	48.12		Quasi Peak		-15.09
1	166.000000000 kHz	49.96		Quasi Peak		-15.20
2	194.000000000 kHz	38.08		Average		-15.78
1	3.630000000 MHz	39.48		Quasi Peak		-16.52
2	26.002000000 MHz	26.62		Average		-23.38

Mode: Neutral

*** END OF TEST REPORT ***