

# FCC and ISED Test Report

Manufacturer: SRT Marine Technology Limited  
DSC/VHF Radio, Model: X-100



In accordance with FCC 47 CFR Part 80, FCC 47 CFR Part 2, ISED RSS-182 and ISED RSS-GEN

Prepared for: SRT Marine Technology Limited  
Wireless House  
Westfield Ind Est.  
Midsomer Norton  
Bath  
BA3 4BS  
United Kingdom

FCC ID: YYG-4310002      IC: 9384A-4310002B

## COMMERCIAL-IN-CONFIDENCE

Document 75955807-16 Issue 01

### SIGNATURE

A handwritten signature of Simon Bennett in black ink.

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Simon Bennett	Technical Director (Lab Ops)	Authorised Signatory	18 June 2025

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Joshua Peploe-Williams	18 June 2025	A handwritten signature of Joshua Peploe-Williams in black ink.

### EXECUTIVE SUMMARY / ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on the test pages. A sample of this product was tested to demonstrate limited compliance with FCC 47 CFR Part 80 (2024), FCC 47 CFR Part 2 (2023), ISED RSS-182 Issue 6 (2021-06) and ISED RSS-GEN Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3. The sample tested was found to comply with the requirements defined in the applied rules.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

TÜV SÜD  
is a trading name of TUV SUD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TUV SUD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Customer Supplied Form .....	4
1.5	Product Information .....	7
1.6	Deviations from the Standard.....	7
1.7	EUT Modification Record .....	7
1.8	Test Location.....	7
<b>2</b>	<b>Test Details .....</b>	<b>8</b>
2.1	Bandwidths .....	8
2.2	Transmitter Frequency Tolerances .....	12
2.3	Spurious Emissions at Antenna Terminals .....	15
2.4	Radiated Spurious Emissions .....	24
2.5	Modulation Requirements .....	33
2.6	Transmitter Power .....	38
2.7	Suppression of Interference Aboard Ships .....	41
<b>3</b>	<b>Photographs .....</b>	<b>47</b>
<b>4</b>	<b>Measurement Uncertainty .....</b>	<b>48</b>



## 1 Report Summary

### 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
01	First version	18-Jun-2025

**Table 1**

### 1.2 Introduction

Applicant	SRT Marine Technology Limited
Manufacturer	SRT Marine Technology Limited
Model Number(s)	X-100
Serial Number(s)	230587, 4310002011630003 and 4310002011730002
Hardware Version(s)	1.0
Software Version(s)	220200.01.00.00/20400.01.00.00
Number of Samples Tested	3
Test Specification/Issue/Date	FCC 47 CFR Part 80 (2024), FCC 47 CFR Part 2 (2023), ISED RSS-182 Issue 6 (2021-06) and ISED RSS-GEN Issue 5 (04-2018) + A2 (02-2021)
Order Number	POR102834
Date	09-June-2022
Date of Receipt of EUT	14-April-2023
Start of Test	15-May-2025
Finish of Test	28-May-2025
Name of Engineer(s)	Joshua Peploe-Williams
Related Document(s)	ANSI C63.26 (2015) KDB 971168

### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 80, FCC 47 CFR Part 2 and ISED RSS-182 and ISED RSS-GEN is shown below.

Section	Specification Clause				Test Description	Result	Comments/Base Standard
	Part 80	Part 2	RSS 182	RSS GEN			
Configuration and Mode: VHF - Voice Config Mode							
2.1	80.205	2.1049	5.2	6.7	Bandwidths	Pass	ANSI C63.26 (2015)
2.2	80.209	2.1055	5.5	6.11	Transmitter Frequency Tolerances	Pass	
2.3	80.211	2.1051	5.9	6.13	Spurious Emissions at Antenna Terminals	Pass	ANSI C63.26 (2015)
2.4	80.211	2.1051	5.9	6.13	Radiated Spurious Emissions	Pass	ANSI C63.26 (2015)
2.5	80.213	2.1047	5.4	N/A	Modulation Requirements	Pass	
2.6	80.215	2.1046	5.6	6.12	Transmitter Power	Pass	ANSI C63.26 (2015)
2.7	80.217(b)	N/A	N/A	N/A	Suppression of Interference Aboard Ships	Pass	

**Table 2**



## 1.4 Customer Supplied Form

### Equipment Description

Technical Description: <i>(Please provide a brief description of the intended use of the equipment including the technologies the product supports)</i>		Class D DSC/VHF radio equipped with a class B transceiver and Digital Selective Calling (DSC) capabilities.				
Manufacturer:		Em-trak Marine Electronics				
Model:		X100				
Part Number:		431-0002				
Hardware Version:		1.0				
Software Version:		220200.00.08.12, 220400.00.08.09				
FCC ID of the product under test – <a href="#">see guidance here</a>				YYG-4310002		
IC ID of the product under test – <a href="#">see guidance here</a>				9384A-4310002B		
Device Category	Mobile <input checked="" type="checkbox"/>	Portable <input type="checkbox"/>		Fixed <input type="checkbox"/>		
Equipment is fitted with an Audio Low Pass Filter				Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	

### Intentional Radiators

Technology	Radio-telephone	DSC	AIS	WiFi	Bluetooth	
Frequency Range (MHz to MHz)	156.050 to 157.425	156.525	156.025 to 162.025	2412 to 2462	2402 to 2480	
Conducted Declared Output Power (dBm)	42.5	42.5	37	19.5	9	
Antenna Gain (dBi)	3	3	3	2.33	2.33	
Supported Bandwidth(s) (MHz) (e.g. 1 MHz, 20 MHz, 40 MHz)	0.025	0.025	0.025	20 to 40	0.9	
Modulation Scheme(s) (e.g. GFSK, QPSK etc)	FM	AFSK	GMSK	DSSS, OFDM	GFSK	
ITU Emission Designator ( <a href="#">see guidance here</a> ) (not mandatory for Part 15 devices)	16K0F3E	16K0G1D	16K0G1B	-	-	
Bottom Frequency (MHz)	156.050	156.525	156.025	2412	2402	
Middle Frequency (MHz)	156.725	156.525	159.025	2437	2441	
Top Frequency (MHz)	157.425	156.525	162.025	2462	2480	



### Un-intentional Radiators

Highest frequency generated or used in the device or on which the device operates or tunes	2480 MHz
Lowest frequency generated or used in the device or on which the device operates or tunes	19.2 MHz
Class A Digital Device (Use in commercial, industrial or business environment) <input checked="" type="checkbox"/>	
Class B Digital Device (Use in residential environment only) <input type="checkbox"/>	

### AC Power Source

AC supply frequency:		Hz
Voltage		V
Max current:		A
Single Phase <input checked="" type="checkbox"/>	Three Phase <input type="checkbox"/>	

### DC Power Source

Nominal voltage:	12	V
Extreme upper voltage:	31.2	V
Extreme lower voltage:	9.6	V
Max current:	6	A

### Battery Power Source

Voltage:		V
End-point voltage:		V (Point at which the battery will terminate)
Alkaline <input type="checkbox"/> Leclanche <input type="checkbox"/> Lithium <input type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Lead Acid* <input type="checkbox"/> * (Vehicle regulated)		
Other <input type="checkbox"/>	Please detail:	

### Charging

Can the EUT transmit whilst being charged	Yes <input type="checkbox"/>	No <input type="checkbox"/>
---	------------------------------	-----------------------------

### Temperature

Minimum temperature:	-25	°C
Maximum temperature:	55	°C



### Cable Loss

Adapter Cable Loss (Conducted sample)		dB
--	--	----

### Antenna Characteristics

Antenna connector <input checked="" type="checkbox"/>			State impedance	50	Ohm
Temporary antenna connector <input type="checkbox"/>			State impedance		Ohm
Integral antenna <input type="checkbox"/>	Type:		Gain		dBi
External antenna <input checked="" type="checkbox"/>	Type:	VHF Vertical Omni	Gain	3	dBi
For external antenna only: Standard Antenna Jack <input checked="" type="checkbox"/> If yes, describe how user is prohibited from changing antenna (if not professionally installed): It is specified in the User Instructions to only fit a 3dBi antenna.					
Equipment is only ever professionally installed <input type="checkbox"/>					
Non-standard Antenna Jack <input type="checkbox"/>					
All part 15 applications will need to show how the antenna gain was derived either from a manufacturer data sheet or a measurement. Where the gain of the antenna is inherently accounted for as a result of the measurement, such as field strength measurements on a part 15.249 or 15.231 device, so the gain does not necessarily need to be verified. However, enough information regarding the construction of the antenna shall be provided. Such information maybe photographs, length of wire antenna etc.					

### Ancillaries (if applicable)

Manufacturer:		Part Number:	
Model:		Country of Origin:	

I hereby declare that the information supplied is correct and complete.

Name: Shannon Parsons  
Position held: Compliance Technician  
Date: 17 April 2025

## 1.5 Product Information

### 1.5.1 Technical Description

X-100 VHF Radio with Class D DSC and AIS Class B SOTDMA

## 1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

## 1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT		Modification Fitted By	Date Modification Fitted
DSC/VHF Radio, Model: X-100, Serial Number: 4310002011730002				
0	As supplied by the customer		Not Applicable	Not Applicable
DSC/VHF Radio, Model: X-100, Serial Number: 230587				
8	Software update to v 00.08.12		Manufacturer	29-January-2025
DSC/VHF Radio, Model: X-100, Serial Number: 4310002011630003				
0	As supplied by the customer		Not Applicable	Not Applicable

**Table 3**

## 1.8 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: VHF - Voice Config Mode		
Bandwidths	Joshua Peploe-Williams	UKAS
Transmitter Frequency Tolerances	Joshua Peploe-Williams	UKAS
Spurious Emissions at Antenna Terminals	Joshua Peploe-Williams	UKAS
Radiated Spurious Emissions	Joshua Peploe-Williams	UKAS
Modulation Requirements	Joshua Peploe-Williams	UKAS
Transmitter Power	Joshua Peploe-Williams	UKAS
Suppression of Interference Aboard Ships	Joshua Peploe-Williams	UKAS

**Table 4**

Laboratory Address: TÜV SÜD, Octagon House,  
Concorde Way, Fareham, Hampshire,  
PO15 5RL, United Kingdom



## 2 Test Details

### 2.1 Bandwidths

#### 2.1.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.205  
FCC 47 CFR Part 2, Clause 2.1049  
ISED RSS-182, Clause 5.2  
ISED RSS-GEN, Clause 6.7

#### 2.1.2 Equipment Under Test and Modification State

X-100, S/N: 4310002011630003 - Modification State 0

#### 2.1.3 Date of Test

22-May-2025

#### 2.1.4 Test Method

##### VHF - Voice Config Mode

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 80.205, Part 2.1049, ISED RSS-GEN Clause 6.6 and ANSI C63.26-2015, Subclause 5.4.3.

The EUT was transmitting on full power, while being FM modulated using an audio analyser. The audio analyser input a 2500 Hz tone at an amplitude of 3.79 dBV to modulate the signal. To measure the bandwidth, the occupied bandwidth mode on the spectrum analyser was used. The bandwidth was averaged over 50 sweeps on both the top and bottom channel.

Spectrum analyser settings:

Span - 50 kHz

RBW - 470 Hz

VBW - 4.7 KHz

Sweep time - auto

Sweeps - 50

The plots on the following pages show the resultant display from the Spectrum Analyser.

#### 2.1.5 Environmental Conditions


Ambient Temperature	21.2 °C
Relative Humidity	36.8 %

## 2.1.6 Test Results

### VHF - Voice Config Mode

99% Occupied Bandwidth (kHz)	
156.050 MHz	157.425 MHz
15.028	15.031

**Table 5 - Occupied Bandwidth Results**

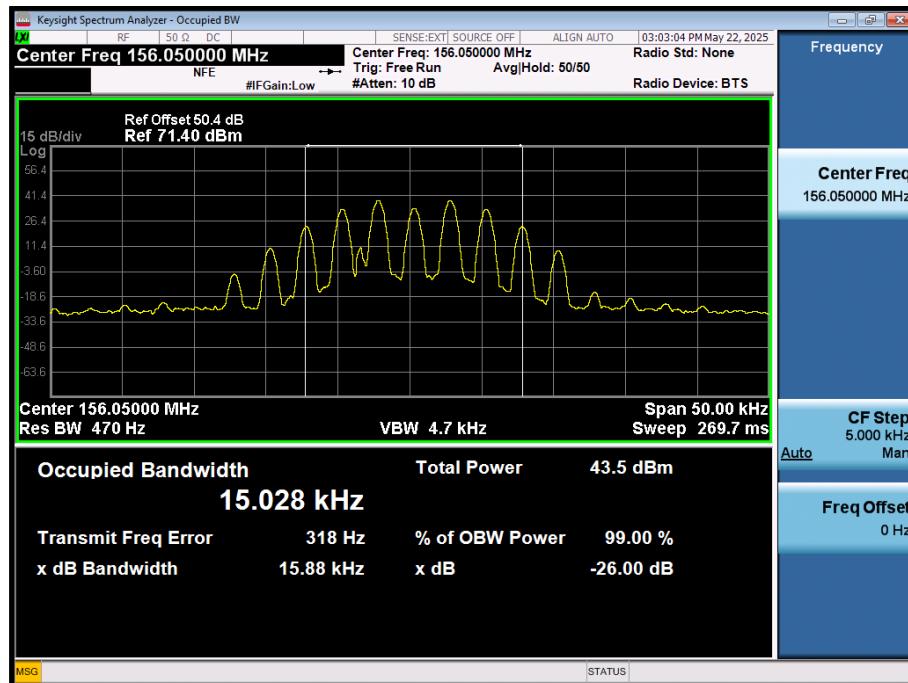

**Figure 1 - 156.050 MHz Occupied Bandwidth**

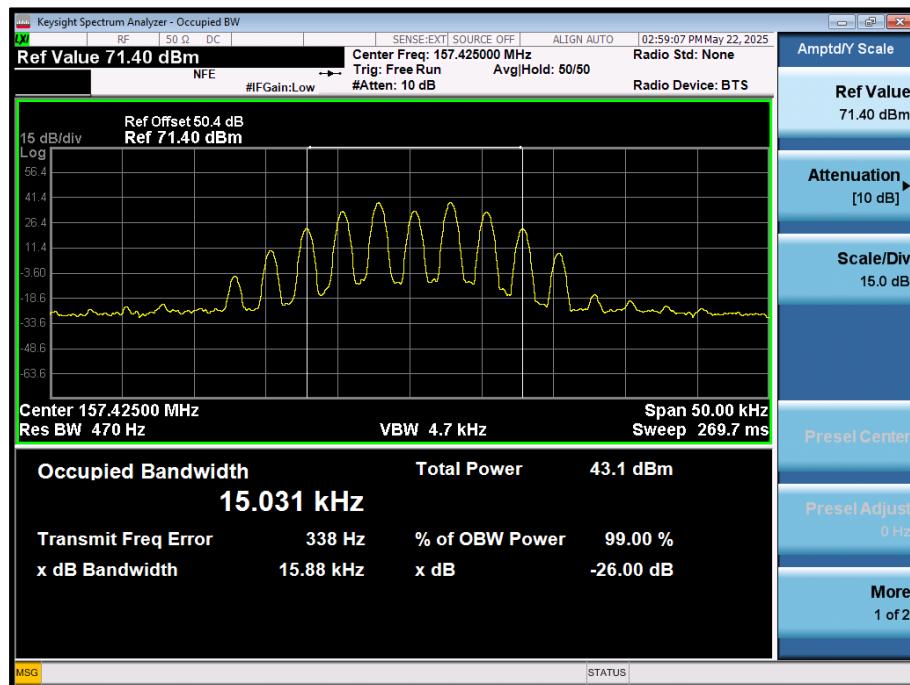


Figure 2 - 157.425 MHz Occupied Bandwidth

FCC 47 CFR Part 80, Limit Clause 80.205

20 kHz

ISED RSS-182, Limit Clause 5.4

16 kHz

## 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11 and RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Modulation Analyser	Hewlett Packard	8901B	45	12	03-Sep-2025
True RMS Multimeter	Fluke	79 Series III	411	12	09-Jan-2026
Sensor	Hewlett Packard	11722A	493	12	04-Sep-2025
Audio Analyser	Hewlett Packard	8903B	576	12	04-Feb-2026
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Mar-2026
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	17-Mar-2026
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	06-May-2026
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU
Attenuator 30dB 100W	Weinschel	48-30-43-LIM	5135	12	05-Feb-2026

**Table 6**

TU - Traceability Unscheduled



## 2.2 Transmitter Frequency Tolerances

### 2.2.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.209  
FCC 47 CFR Part 2, Clause 2.1055  
ISED RSS-182, Clause 5.5  
ISED RSS-GEN, Clause 6.11.

### 2.2.2 Equipment Under Test and Modification State

X-100, S/N: 230587 - Modification State 8

### 2.2.3 Date of Test

15-May-2025

### 2.2.4 Test Method

#### VHF - Voice Config Mode

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 80.209 (a) and FCC CFR 47 Part 2.1055 (a) (2), (d) (1).

The EUT was set to transmit on maximum power with an unmodulated carrier on bottom and top channels. The EUT was connected to a Spectrum Analyser using an external 10 MHz frequency reference. The difference between the frequency of the fundamental and the frequency of the assigned channel in accordance with the manufacturer's documentation was recorded, this was done using a single marker method on the analyser. In accordance with 2.1055, the temperature was varied from -20°C to +50° in 10° steps. At both minimum and maximum voltage extremes the frequency error was measured at nominal temperature.

The settings on the Spectrum analyser were as follows:

RBW - 100 Hz  
VBW - 300 Hz  
Span - 25 kHz  
Sweep points - 100001  
Sweep time - Auto  
Trace - Max Hold  
Detector - Peak

### 2.2.5 Environmental Conditions

Ambient Temperature	21.0 °C
Relative Humidity	38.4 %



## 2.2.6 Test Results

### VHF - Voice Config Mode

Voltage	Frequency Error (ppm)	
	156.050 MHz	157.425 MHz
10.2 V DC	0.918	1.475
13.8 V DC	1.004	1.642

**Table 7 - Frequency Stability Under Voltage Variations**

Temperature	Frequency Error (ppm)	
	156.050 MHz	157.425 MHz
-20 °C	3.472	3.497
-10 °C	2.957	2.881
0 °C	1.858	2.125
10 °C	1.059	0.751
20 °C	0.135	0.086
30 °C	1.169	1.496
40 °C	2.110	2.044
50 °C	2.558	2.573

**Table 8 - Frequency Stability Under Temperature Variations**

### FCC 47 CFR Part 80, Limit Clause 80.209

± 10 ppm.

### ISED RSS-182, Limit Clause 5.5

Coast Station: ±10.0 ppm for transmitter power less than 3 W.

±5.0 ppm for transmitter power between 3 W and 50 W.

Ship Station: ±10 ppm.



## 2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	75 Mk3	455	12	09-Jan-2026
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
Meter & T/C	R.S Components	Meter 615-8206 & Type K T/C	3612	12	25-Sep-2025
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	06-May-2026
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	O/P Mon
Attenuator 30dB 100W	Weinschel	48-30-43-LIM	5135	12	05-Feb-2026
Climatic Chamber	Weiss Technik	TempEvent T/180/40/3	5894	-	O/P Mon
GPSDR Frequency standard	Orolia	SecureSync 2402-053	6339	6	18-Sep-2025

**Table 9**

O/P Mon – Output Monitored using calibrated equipment



## 2.3 Spurious Emissions at Antenna Terminals

### 2.3.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.211  
FCC 47 CFR Part 2, Clause 2.1051  
ISED RSS-182, Clause 5.9  
ISED RSS-GEN Clause 6.13.

### 2.3.2 Equipment Under Test and Modification State

X-100, S/N: 4310002011630003 - Modification State 0

### 2.3.3 Date of Test

21-May-2025 to 05-June-2025

### 2.3.4 Test Method

#### VHF - Voice Config Mode

For emissions where the frequency is removed less than 250% of the authorized bandwidth measurements were performed conducted as follows:

The EUT was connected to a spectrum analyser via a cable and attenuator. The path loss between the EUT and analyser was calibrated using a network analyser and entered in to the spectrum analyser as a reference level offset. The reference level for the mask was established with an RBW approximately 2 or 3 times the emission bandwidth. The RBW was then reduced to at least 1% of the emission bandwidth, with a VBW of 3 times RBW. The mask as per FCC CFR 47 Part 80.211 (f) was applied.

For emissions where the frequency is removed more than 250% of the authorized bandwidth measurements were performed both conducted and radiated as follows:

Conducted: A network analyser was used to measure the path loss and the worst case was entered as a reference level offset into the spectrum analyser. The EUT was connected to a spectrum analyser via an attenuator, filter and cable. Between 9 kHz and 300 MHz, 50 dB of external attenuation was used to protect the equipment. Between 300 MHz and 2 GHz a 300 MHz high pass filter was used. The spectrum analyser was configured with an RBW of 100 kHz below 1 GHz and 1 MHz for frequencies greater than 1 GHz with the trace set to max hold using a peak detector.

As required by FCC CFR 47 part 2.1051, the EUT was modulated by an audio tone. The audio tone input was at a frequency of 2500 Hz with an amplitude of 3.79 dBV.

### 2.3.5 Environmental Conditions

Ambient Temperature	21.2 °C, 20.7 °C, 20.6 °C
Relative Humidity	40.1 %, 40.9 %, 42.5 %



## 2.3.6 Test Results

### VHF - Voice Config Mode

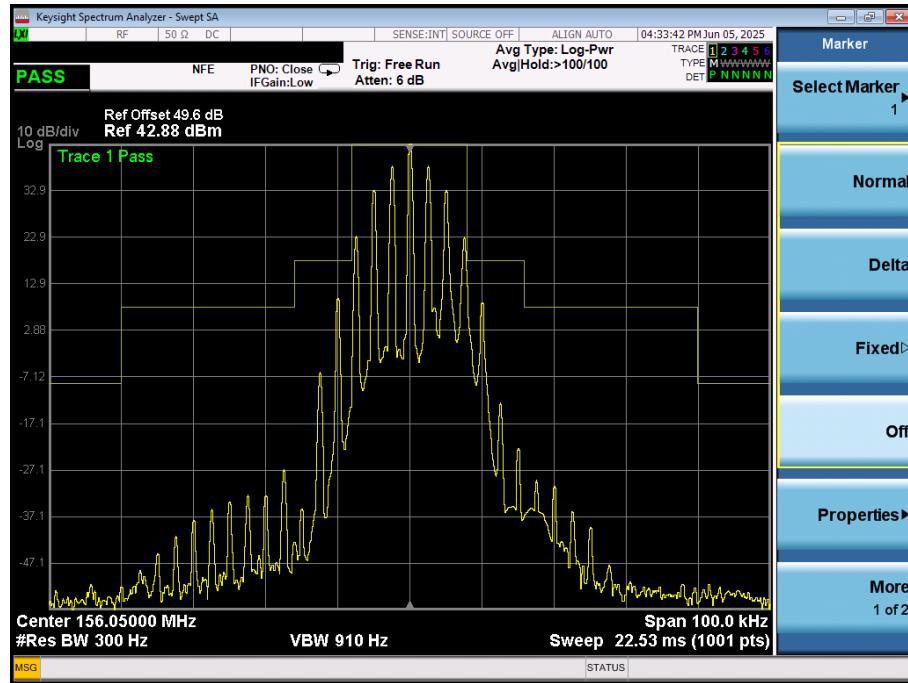


Figure 3 - 156.050 MHz - Transmitter Spectrum Mask

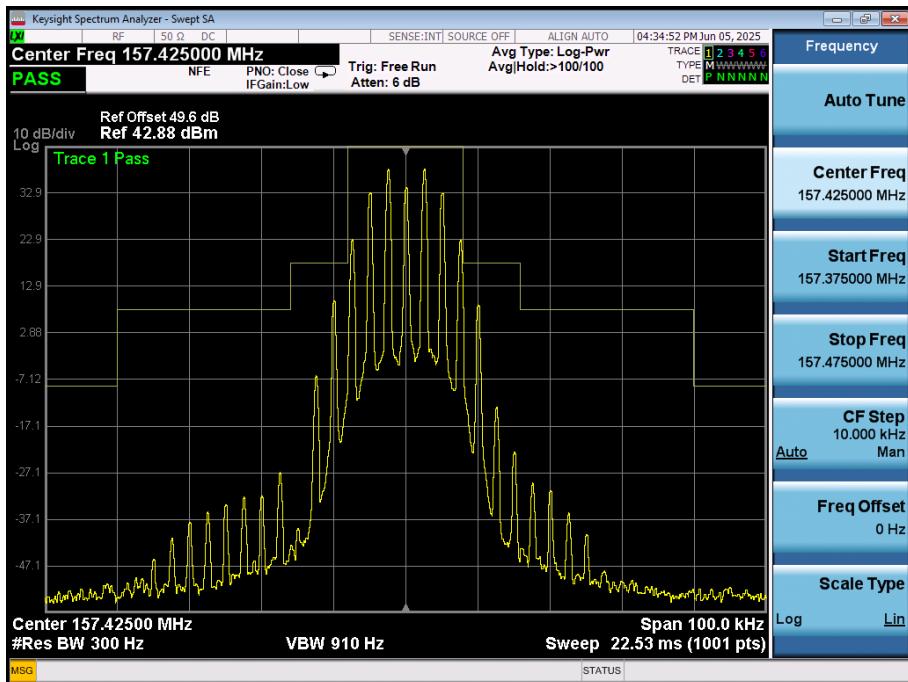


Figure 4 - 157.425 MHz - Transmitter Spectrum Mask

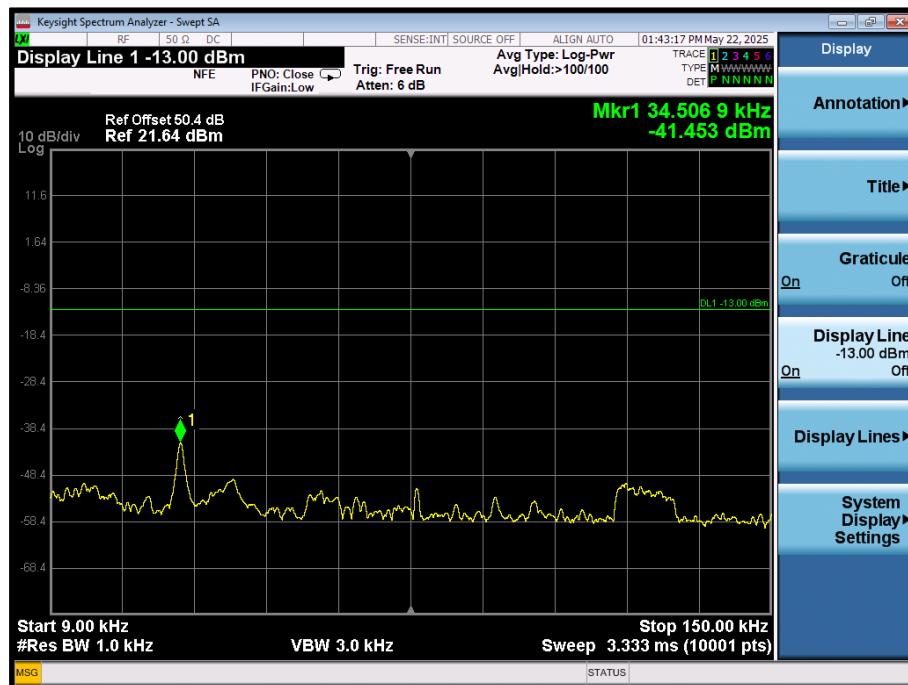


Figure 5 - 156.050 MHz - 9 kHz to 150 kHz

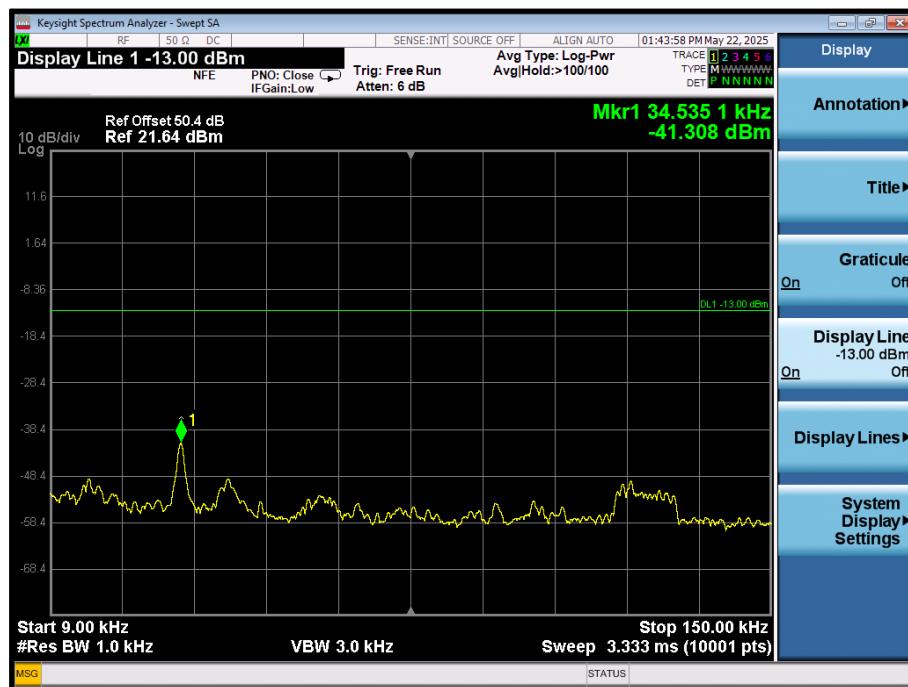


Figure 6 - 157.425 MHz - 9 kHz to 150 kHz

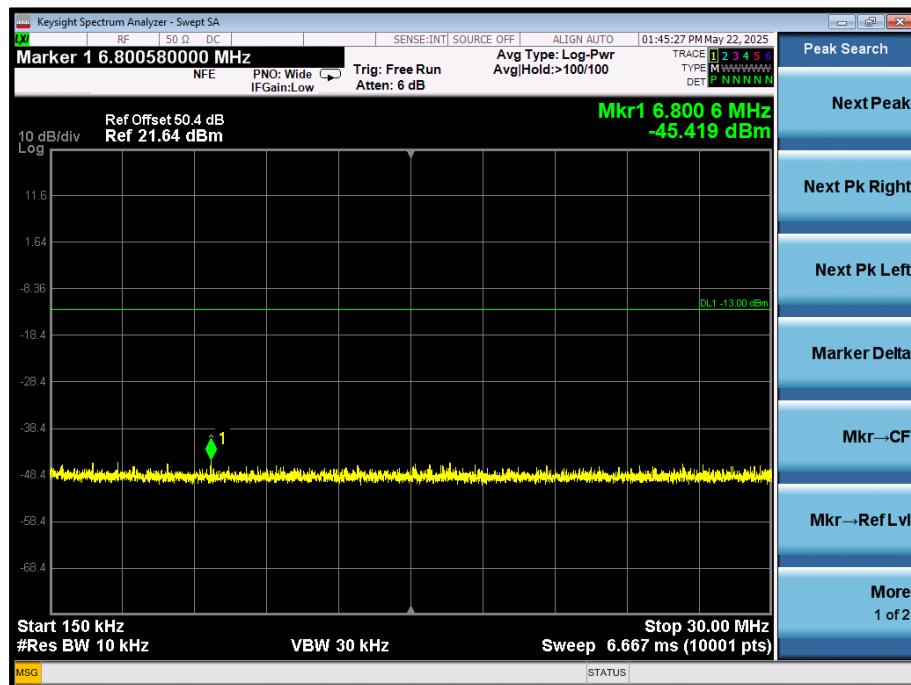


Figure 7 - 156.050 MHz - 150 kHz to 30 MHz

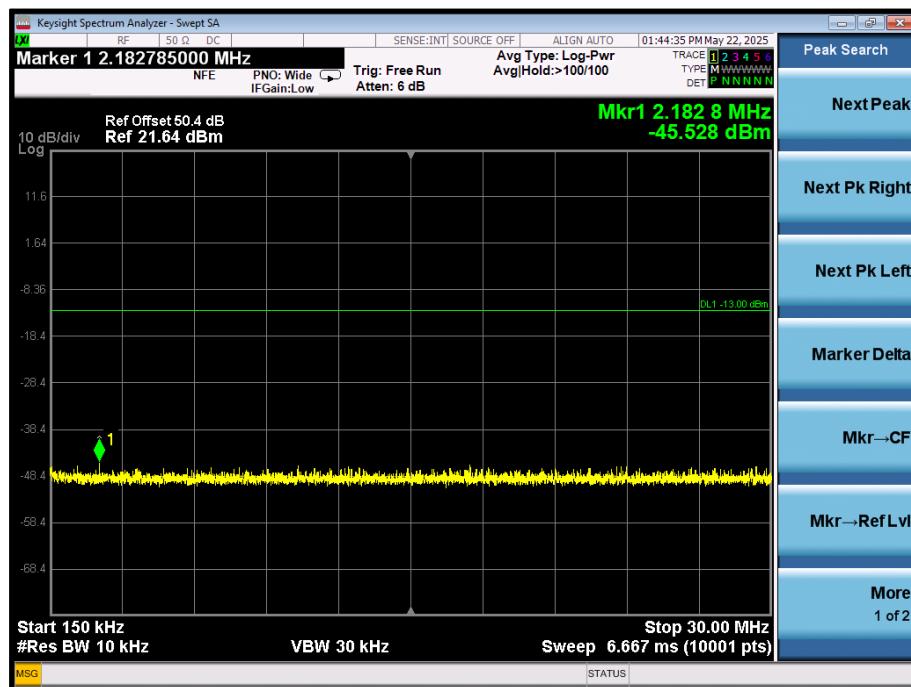


Figure 8 - 157.425 MHz - 150 kHz to 30 MHz

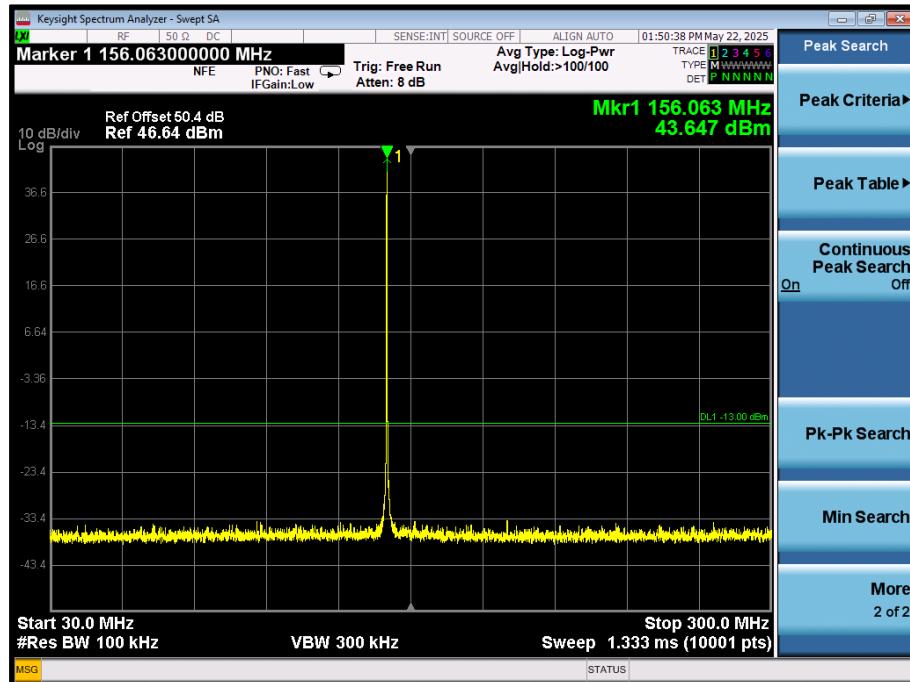


Figure 9 - 156.050 MHz - 30 MHz to 300 MHz

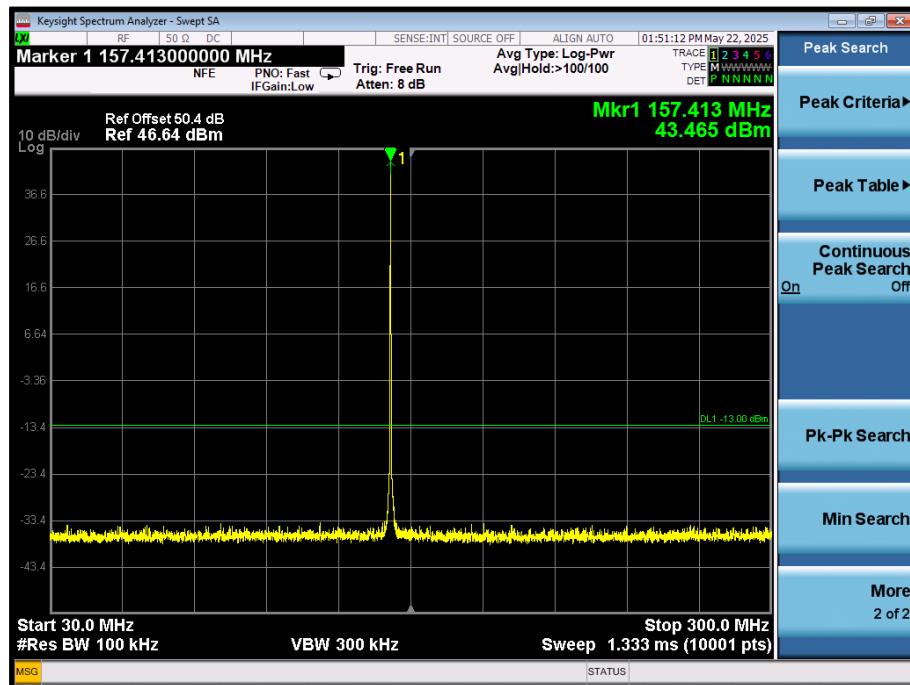


Figure 10 - 157.425 MHz - 30 MHz to 300 MHz

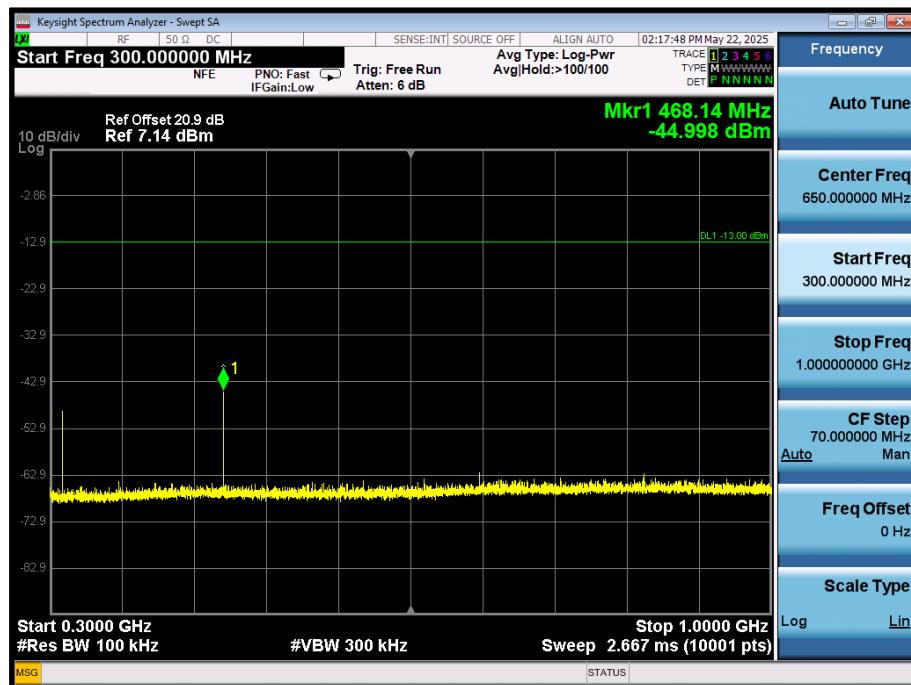


Figure 11 - 156.050 MHz - 300 MHz to 1 GHz

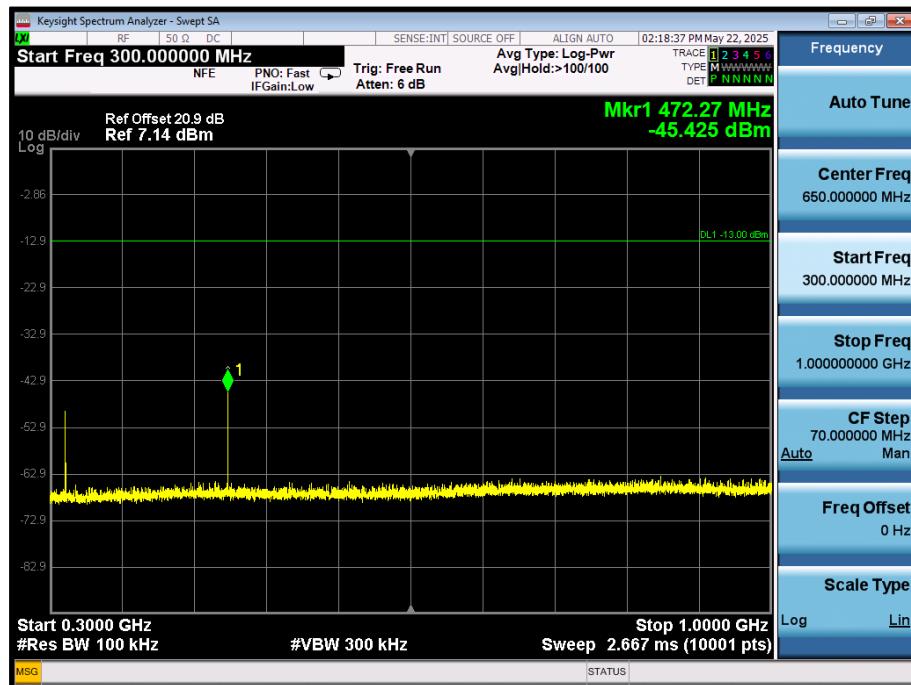


Figure 12 - 157.425 MHz - 300 MHz to 1 GHz

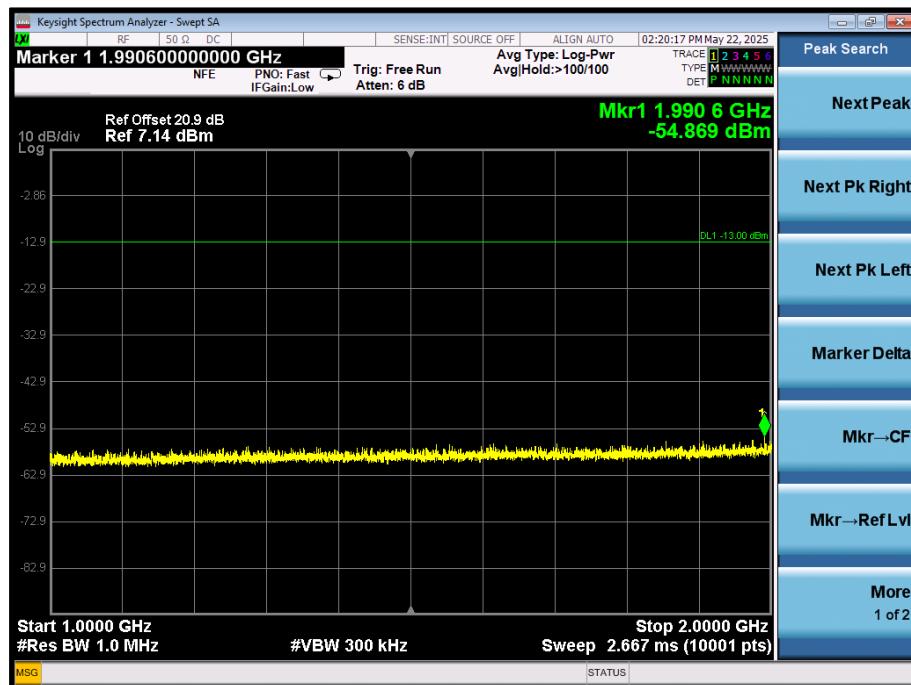


Figure 13 - 156.050 MHz - 1 GHz to 2 GHz

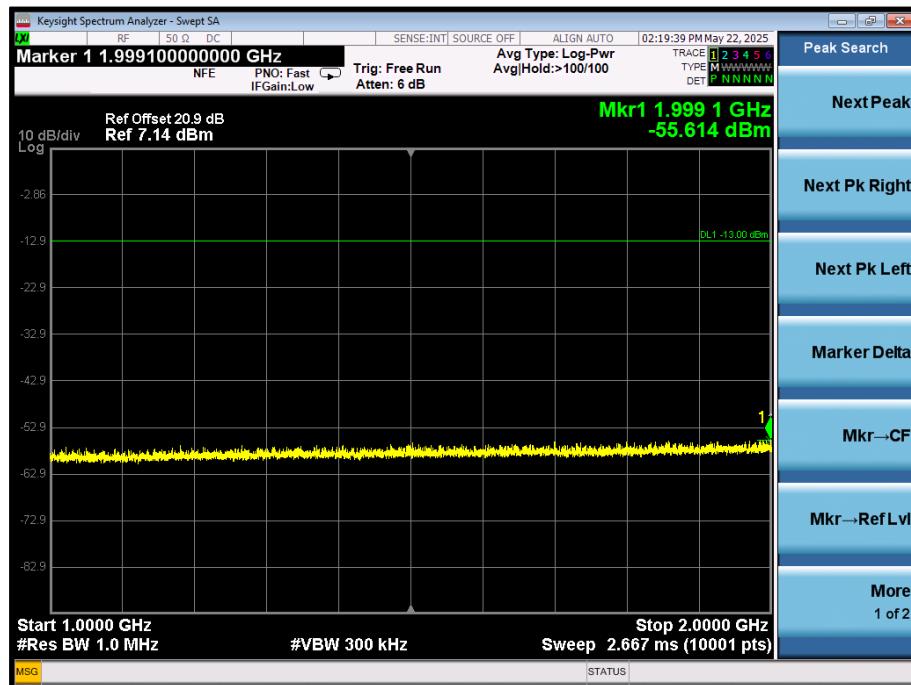


Figure 14 - 157.425 MHz - 1 GHz to 2 GHz



FCC 47 CFR Part 80, Limit Clause 80.211

Within 250% of the Authorised Bandwidth:

On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;

On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB

More than 250% of the Authorised Bandwidth:

On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10\log_{10}$  (mean power in watts) dB.

ISED RSS-182, Limit Clause 5.9.1

On any frequency removed from the carrier frequency by more than 50%, but not more than 100% of the authorized bandwidth: at least 25 dB, measured with a bandwidth of 300 Hz.

On any frequency removed from the carrier frequency by more than 100%, but not more than 250% of the authorized bandwidth: at least 35 dB, measured with a bandwidth of 300 Hz.

On any frequency removed from the carrier frequency by more than 250% of the authorized bandwidth: at least  $43 + 10 \log_{10} p(\text{watts})$  dB, measured with a bandwidth of 30 kHz.



### 2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Modulation Analyser	Hewlett Packard	8901B	45	12	03-Sep-2025
Multimeter	Fluke	75 Mk3	455	12	09-Jan-2026
Sensor	Hewlett Packard	11722A	493	12	04-Sep-2025
Audio Analyser	Hewlett Packard	8903B	576	12	04-Feb-2026
High Pass Filter	Mini-Circuits	NHP-300	1640	12	28-May-2025
Power Supply	Iso-tech	IPS 2010	2439	12	O/P Mon
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Mar-2026
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	17-Mar-2026
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	06-May-2026
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU
Attenuator 30dB 100W	Weinschel	48-30-43-LIM	5135	12	05-Feb-2026

**Table 10**

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



## 2.4 Radiated Spurious Emissions

### 2.4.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.211  
FCC 47 CFR Part 2, Clause 2.1051  
ISED RSS-182, Clause 5.9  
ISED RSS GEN, Clause 6.13.

### 2.4.2 Equipment Under Test and Modification State

X-100, S/N: 4310002011630003 - Modification State 0

### 2.4.3 Date of Test

27-May-2025

### 2.4.4 Test Method

#### VHF - Voice Config Mode

A preliminary profile of the Radiated Spurious Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

The EUT was powered using a DC power supply at 12 V.

The fundamental was modulated using an audio analyser. It was modulated by a 2500 Hz tone with an amplitude of 3.79 dBV.

Testing was performed in accordance with ANSI C63.26, Clause 5.5.

Prescans and final measurements were performed using the direct field strength method. Field strength measurements were performed and then converted to Equivalent Power Measurements in accordance with ANSI C63.26, Clause 5.2.7 equation c)

Example calculation:

$E (\text{dBuV/m}) + 20\log(d) - 104.8 = \text{EIRP (dBm)}$  where (d) is the measurement distance.

$82.2 (\text{dBuV/m}) + 20\log(3) - 104.8 = \text{EIRP (dBm)}$

$-13.0 = \text{EIRP (dBm)}$

#### 2.4.5 Example Test Setup Diagram

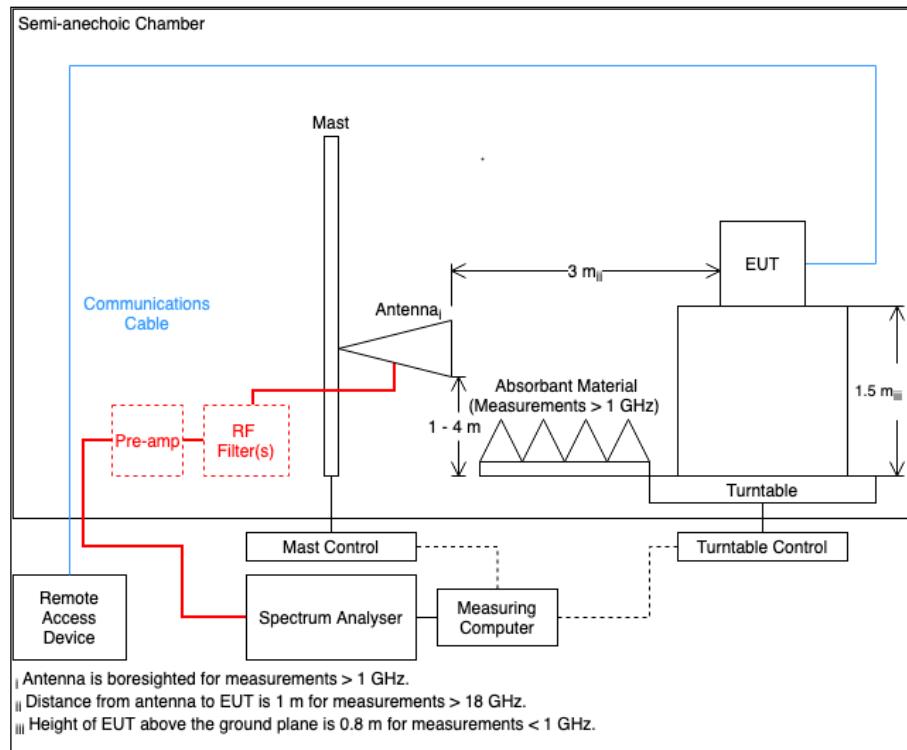


Figure 15

#### 2.4.6 Environmental Conditions

Ambient Temperature 20.2 °C  
Relative Humidity 41.2 %


## 2.4.7 Test Results

### VHF - Voice Config Mode


Frequency (MHz)	Level (dBm)
*	

**Table 11 - 156.050 MHz - Emissions Results**


\*No emissions were detected within 10 dB of the limit.

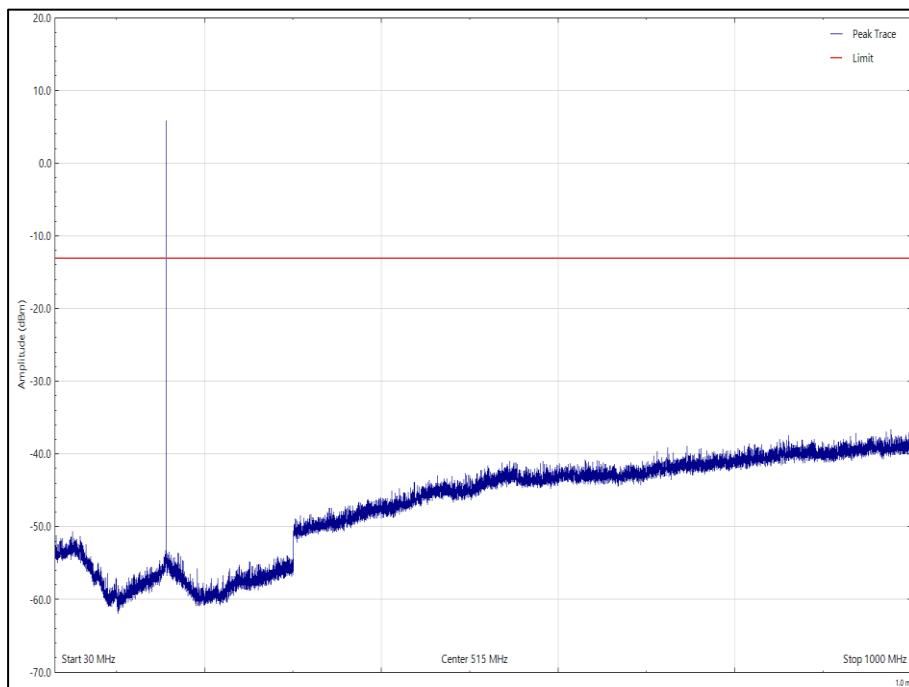


**Figure 16 - 156.050 MHz - 30 MHz to 1 GHz, Horizontal Polarisation**

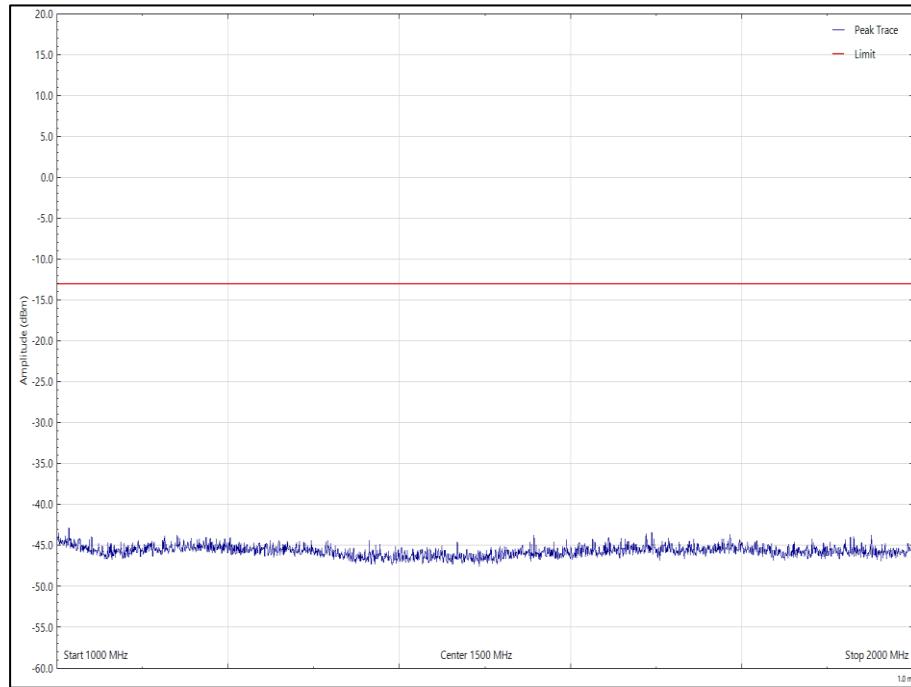

**Figure 17 - 156.050 MHz - 1 GHz to 2 GHz, Horizontal Polarisation**

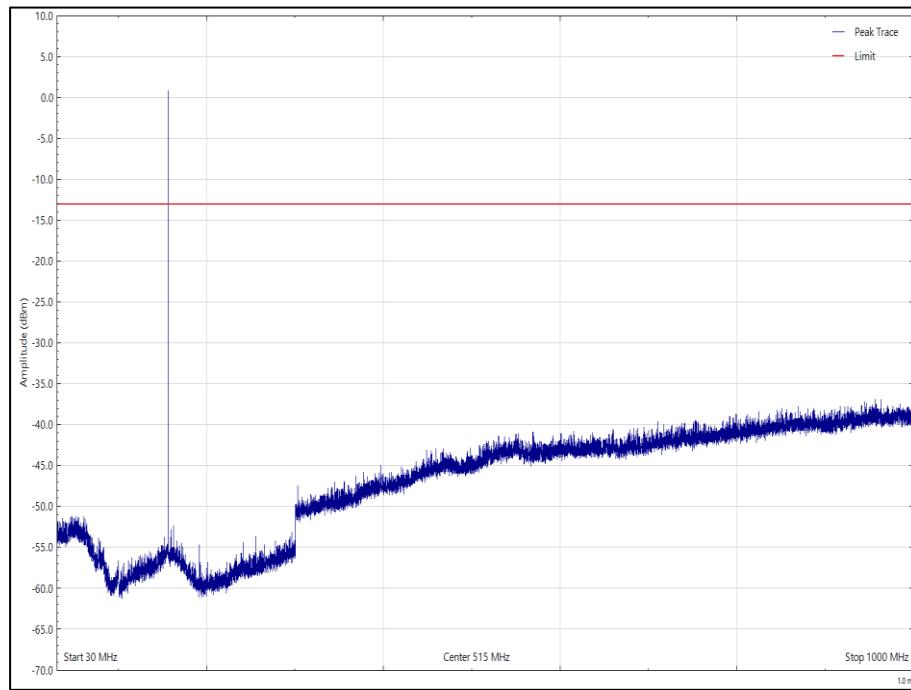

**Figure 18 - 156.050 MHz - 30 MHz to 1 GHz, Vertical Polarisation**

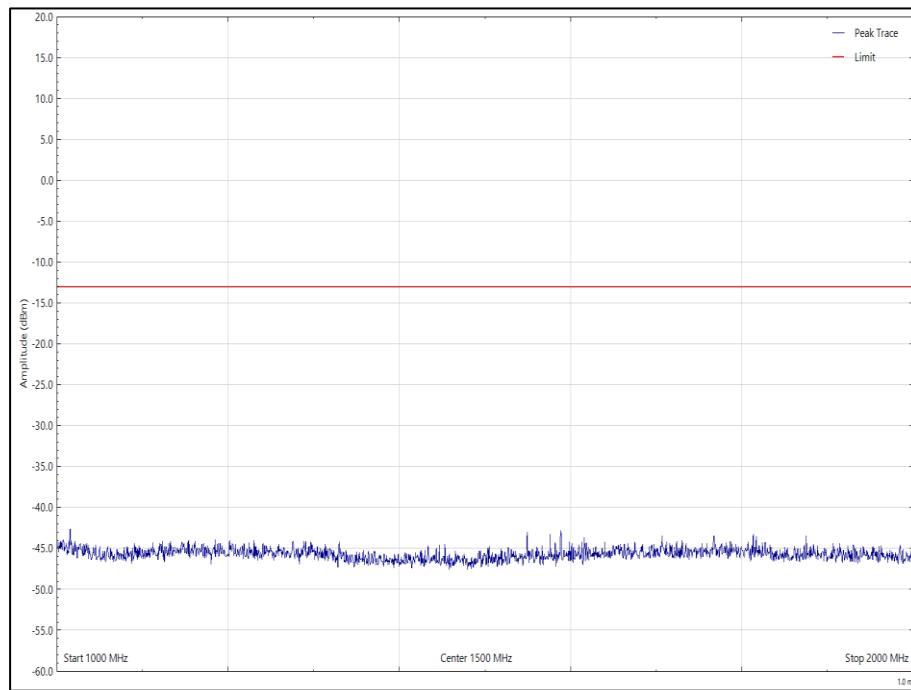


**Figure 19 - 156.050 MHz - 1 GHz to 2 GHz, Vertical Polarisation**


Frequency (MHz)	Level (dBm)
*	

**Table 12 - 157.425 MHz - Emissions Results**


\*No emissions were detected within 10 dB of the limit.

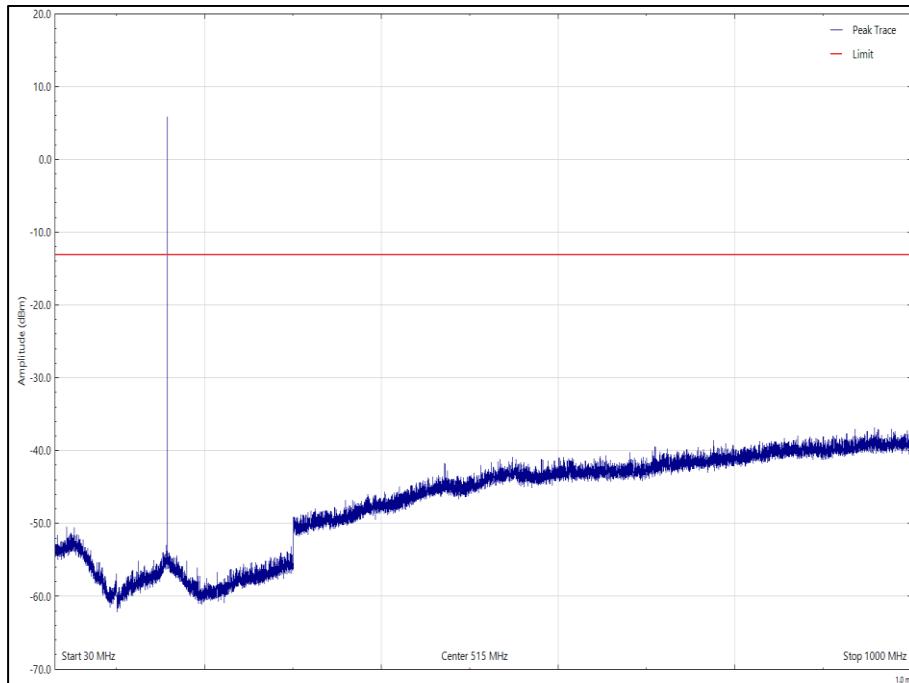


**Figure 20 - 157.425 MHz - 30 MHz to 1 GHz, Horizontal Polarisation**

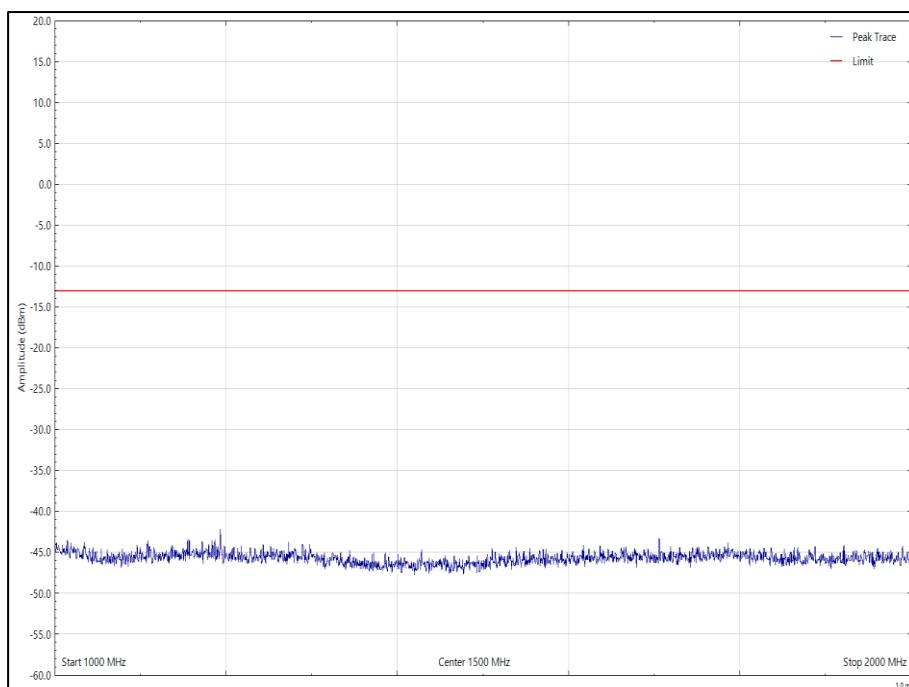

**Figure 21 - 157.425 MHz - 1 GHz to 2 GHz, Horizontal Polarisation**

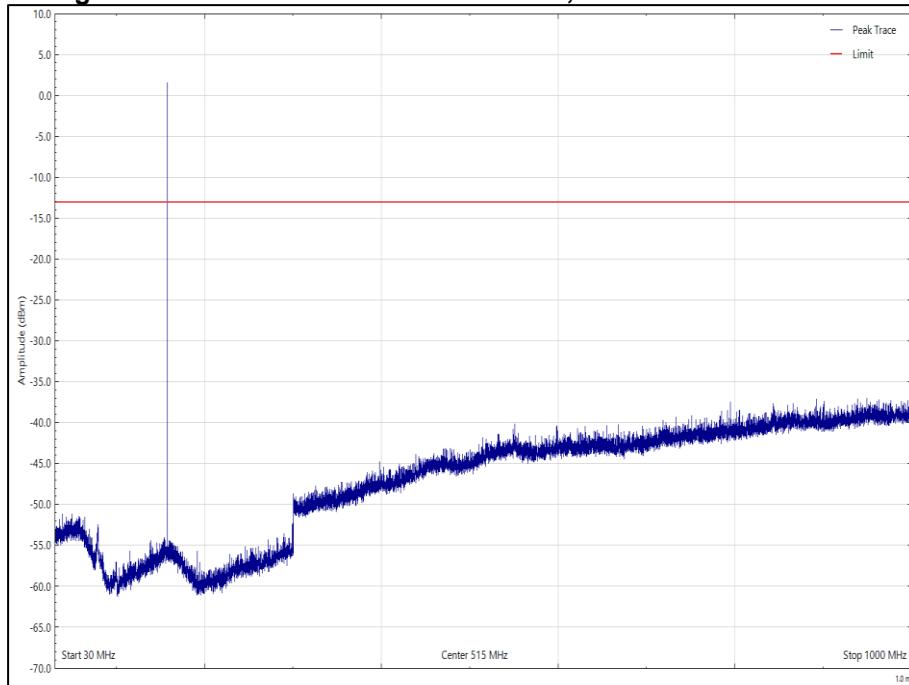

**Figure 22 - 157.425 MHz - 30 MHz to 1 GHz, Vertical Polarisation**

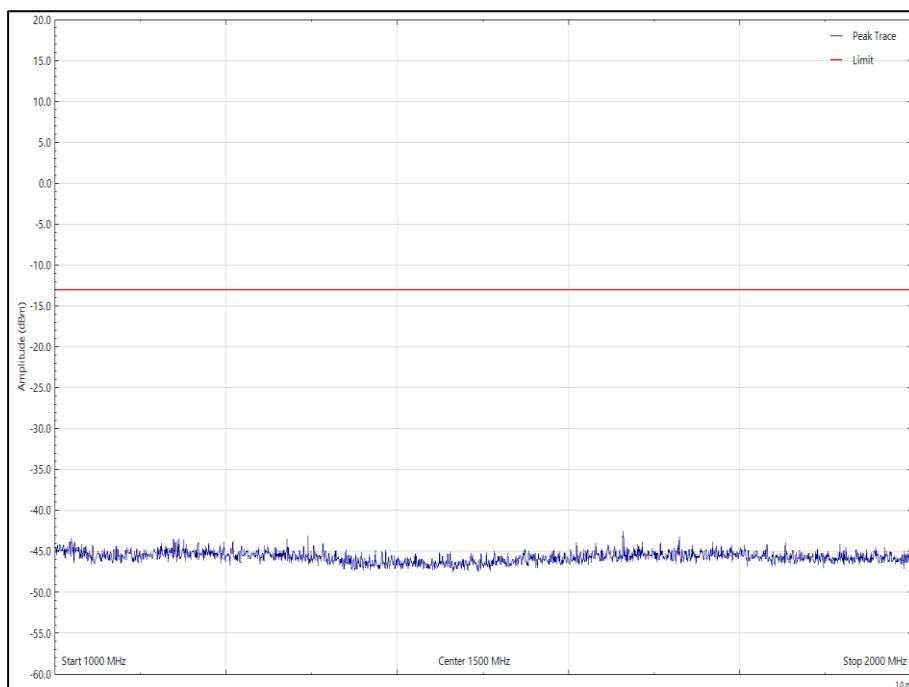

**Figure 23 - 157.425 MHz - 1 GHz to 2 GHz, Vertical Polarisation**



FCC 47 CFR Part 80, Limit Clause 80.211

More than 250% of the Authorised Bandwidth:

On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus  $10\log_{10}$  (mean power in watts) dB.

ISED RSS-182, Limit Clause 5.9.1

On any frequency removed from the carrier frequency by more than 250% of the authorized bandwidth: at least  $43 + 10 \log_{10} p(\text{watts})$  dB, measured with a bandwidth of 30 kHz.



#### 2.4.8 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Termination 50ohm/50W	Bird	8085	389	12	15-Jul-2025
Audio Analyser	Hewlett Packard	8903B	576	12	04-Feb-2026
3m Semi-Anechoic Chamber	Rainford	RF Chamber 5	1545	36	23-Apr-2027
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
High Pass Filter	Mini-Circuits	NHP-300	1640	12	28-May-2025
Hygrometer	Rotronic	Hygropalm 0	3028	12	12-Aug-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
True RMS Multimeter	Fluke	179	4007	12	10-Dec-2025
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	4848	12	14-Jul-2025
4dB Attenuator	Pasternack	PE7047-4	4935	12	31-Jul-2025
Quad Power Supply	Rohde & Schwarz	HMP4040	4955	-	O/P Mon
Emissions Software	TUV SUD	EmX V3.5.2	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	26-Jul-2025
2m Coaxial Cable Assy	Junkosha	MWX221-02000AMSAMS/A	6357	12	13-May-2026
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6635	24	13-Jun-2025
Cable (N-Type to N-Type, 8 m)	Scott Cables	SCB800-A-NMNM-08.00M	6719	6	06-Jun-2025

**Table 13**

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment



## 2.5 Modulation Requirements

### 2.5.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.213  
FCC 47 CFR Part 2, Clause 2.1047  
ISED RSS-182, Clause 5.4

### 2.5.2 Equipment Under Test and Modification State

X-100, S/N: 4310002011630003 - Modification State 0

### 2.5.3 Date of Test

22-May-2025

### 2.5.4 Test Method

#### VHF - Voice Config Mode

This test was carried out in accordance with FCC CFR 47 Part 80.213 and Part 2.1047 (a), (b) & (c).

The EUT was connected to a modulation analyser via a sensor, cable and attenuator. The EUT was configured to transmit at maximum power on the middle channel. The audio input was initially set at a level of 500 mV, as this was the level the maximum FM deviation was found at 2.5 kHz. The audio frequency was then varied between 100 Hz and 5 kHz to show the audio response in the non-saturated region. At AF of 100 Hz, 1 kHz 2 kHz and 5 kHz the AF power was increased until a maximum of 2V to show the EUT's capability to limit the level of modulation for different input signal levels and frequencies. The results are shown on the graph below.

### 2.5.5 Environmental Conditions

Ambient Temperature	20.1 °C
Relative Humidity	39.7 %

## 2.5.6 Test Results

### VHF - Voice Config Mode

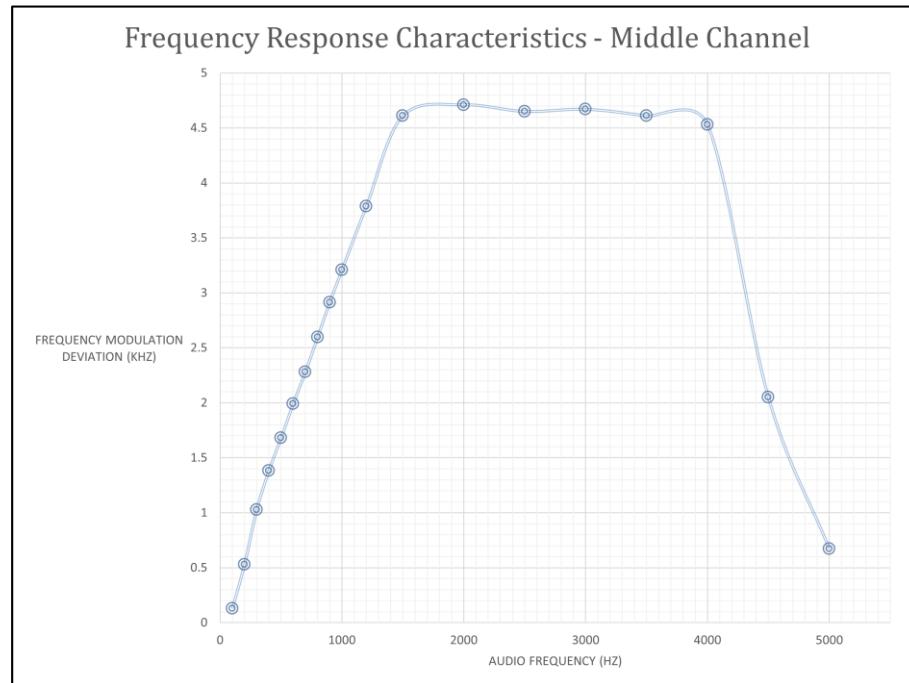


Figure 24 Modulation Requirement - Frequency Response

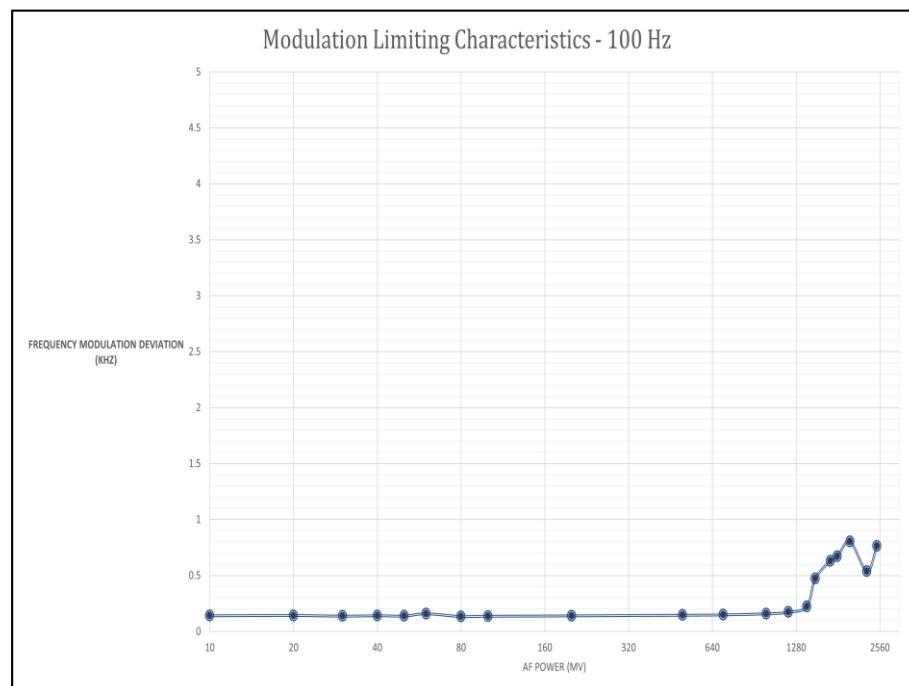


Figure 25 Modulation Limiting Capability - 100 Hz AF

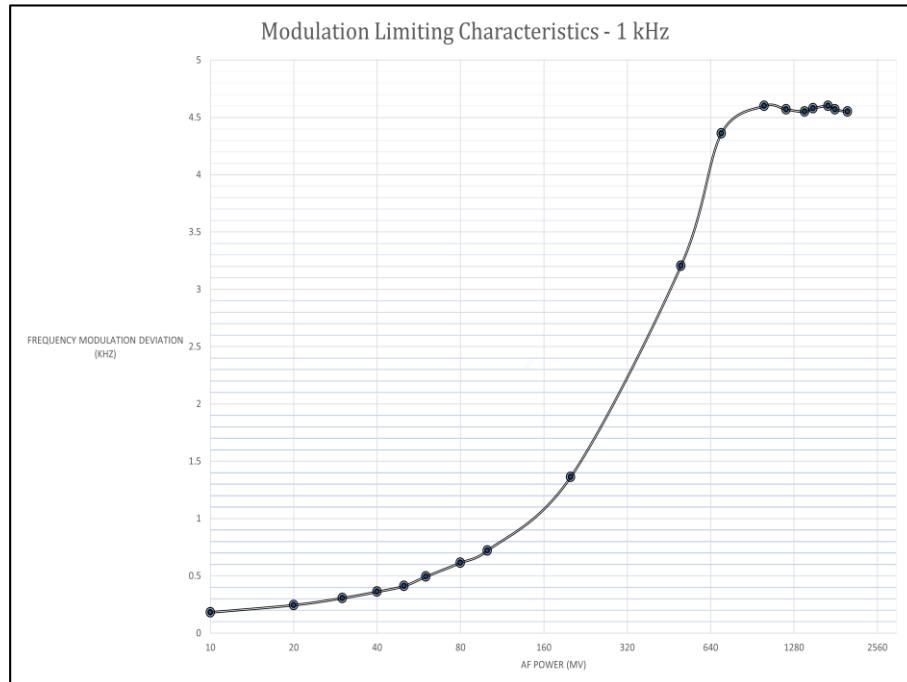


Figure 26 Modulation Limiting Capability - 1 kHz AF


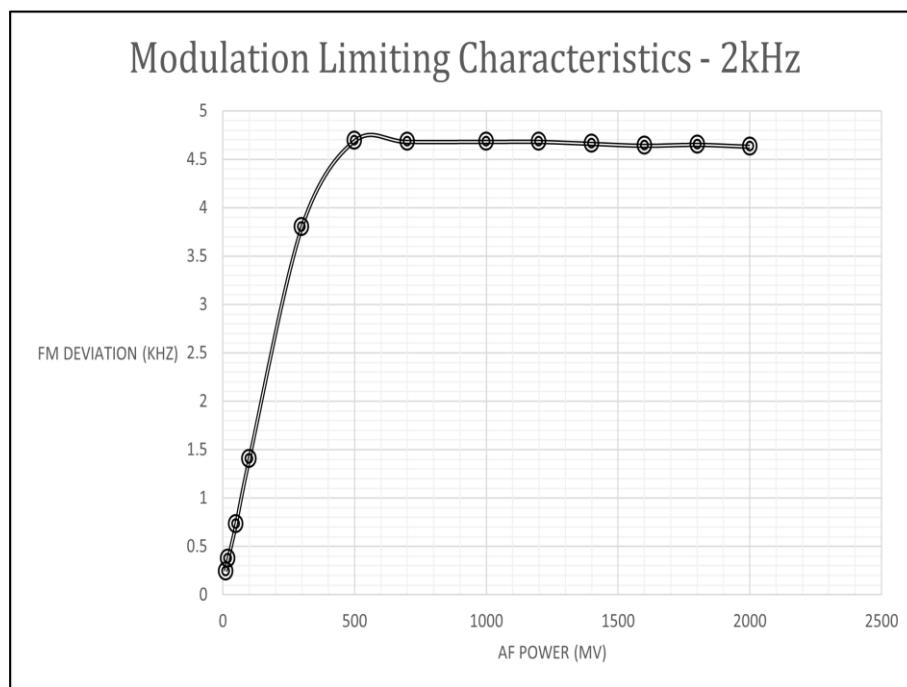


Figure 27 Modulation Limiting Capability - 2 kHz AF

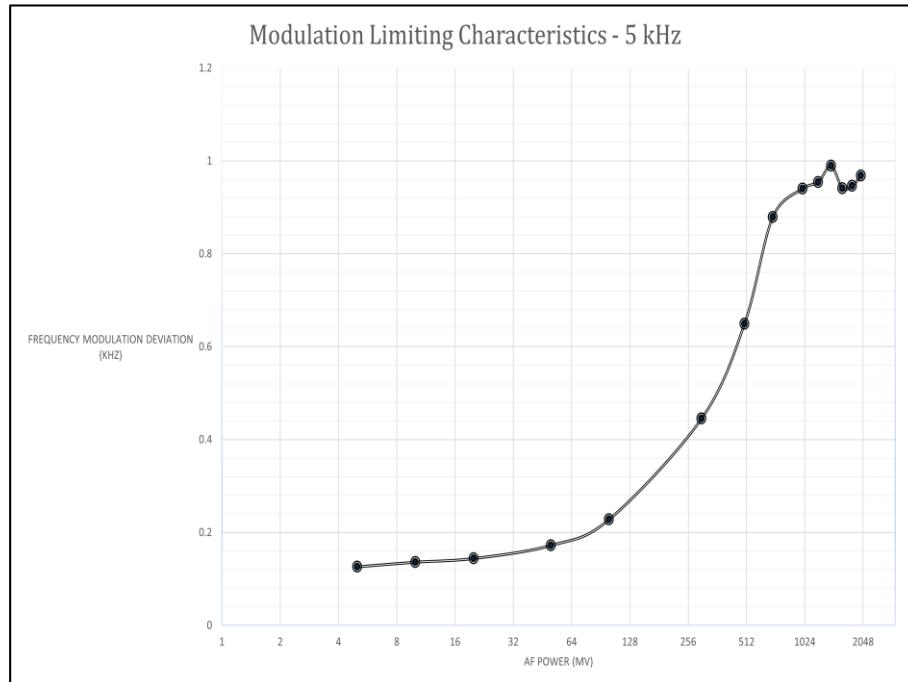

**Figure 28 Modulation Limiting Capability - 5 kHz AF**

FCC 47 CFR Part 80, Limit Clause 80.213

Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent.

FCC 47 CFR Part 2, Limit Clause 2.1047

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.



## 2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Modulation Analyser	Hewlett Packard	8901B	45	12	03-Sep-2025
Multimeter	Fluke	75 Mk3	455	12	09-Jan-2026
Sensor	Hewlett Packard	11722A	493	12	04-Sep-2025
Audio Analyser	Hewlett Packard	8903B	576	12	04-Feb-2026
Power Supply	Iso-tech	IPS 2010	2439	12	O/P Mon
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Mar-2026
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	17-Mar-2026
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	06-May-2026
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU
Attenuator 30dB 100W	Weinschel	48-30-43-LIM	5135	12	05-Feb-2026

**Table 14**

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



## 2.6 Transmitter Power

### 2.6.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.215  
FCC 47 CFR Part 2, Clause 2.1046  
ISED RSS-182, Clause 5.6  
ISED RSS-GEN, Clause 6.12.

### 2.6.2 Equipment Under Test and Modification State

X-100, S/N: 230587 - Modification State 8

### 2.6.3 Date of Test

28-May-2025

### 2.6.4 Test Method

VHF - Voice Config Mode

This test was performed in accordance with ANSI C63.26, clause 5.2.3.2.

### 2.6.5 Environmental Conditions

Ambient Temperature 21.2 °C  
Relative Humidity 41.7 %

### 2.6.6 Test Results

VHF - Voice Config Mode

Power Setting	156.050 MHz		157.425 MHz	
	Result (dBm)	Result (W)	Result (dBm)	Result (W)
High	43.47	22.23	43.34	21.58
Low	29.91	0.98	29.77	0.95

**Table 15 - Transmitter Power**



FCC 47 CFR Part 80, Limit Clause 80.215 (e)

Ship station frequencies above 27500 kHz. The maximum power must not exceed the values listed below:

1. Ships Stations: 156 to 162 MHz - 25 W
2. Marine Utility Stations and Handheld Portable Transmitters: 156 to 162 MHz - 10 W

ISED RSS-182, Limit Clause 5.6

The output power for equipment certified under RSS-182 shall not exceed the limits specified in the table below:

Radio Equipment Type	Maximum Power
Coast Station	50 W
Ship Stations	25 W
Shipborne hand-held portable transmitter	6 W

**Table 16 - Power Limits Table (RSS-182)**

Ship station transmitters shall have power control features implemented to reduce the carrier power to 1 W or less for use at short ranges, except for DSC equipment operating on the 156.525 MHz (channel 70) frequency, for which the power reduction facility is optional.

Survival two-way radiotelephones should have a minimum equivalent isotropically radiated power (e.i.r.p.) of 0.25 W.



## 2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	75 Mk3	455	12	09-Jan-2026
Power Supply	Iso-tech	IPS 2010	2439	12	O/P Mon
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
Network analyser	Rhode & Schwarz	ZVA-40	3548	12	17-Mar-2026
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	18-Nov-2025
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	18-Nov-2025
Calibration unit	Rhode & Schwarz	ZV-Z54	4368	12	17-Mar-2026
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
Attenuator 30dB 100W	Weinschel	48-30-43-LIM	5135	12	05-Feb-2026

**Table 17**  
O/P Mon – Output Monitored using calibrated equipment



## 2.7 Suppression of Interference Aboard Ships

### 2.7.1 Specification Reference

FCC 47 CFR Part 80, Clause 80.217(b)

### 2.7.2 Equipment Under Test and Modification State

X-100, S/N: 230587 - Modification State 8

### 2.7.3 Date of Test

21-May-2025

### 2.7.4 Test Method

#### VHF - Voice Config Mode

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 80.217 (b) and KDB 971168.

A network analyser was used to measure the path loss and the worst case was entered as a reference level offset in to the spectrum analyser for each frequency range of interest. The EUT was connected to a spectrum analyser via a cable and attenuator. The EUT was configured in a receive only state. The spectrum analyser settings were configured with an RBW of 100 kHz below 1 GHz and 1 MHz for frequencies greater than 1 GHz using a VBW of 3 times the RBW. The trace set to max hold using a peak detector and the plots recorded as shown.

### 2.7.5 Environmental Conditions

Ambient Temperature 21.1 °C  
Relative Humidity 48.4 %

### 2.7.6 Test Results

#### VHF

EUT Receive Frequency (MHz)	Frequency of Interfering Emissions	Maximum Power delivered to Artificial Antenna (dBm)	Maximum Power delivered to Artificial Antenna (µW)
156.05 MHz	9 kHz to 150 kHz	-66.44	0.000226986
156.05 MHz	150 kHz to 30 MHz	-75.32	0.0000293765
156.05 MHz	30 MHz to 1 GHz	-60.92	0.000809096
156.05 MHz	1 GHz to 2 GHz	-53.23	0.004753352
162.025 MHz	9 kHz to 150 kHz	-66.63	0.00021727
162.025 MHz	150 kHz to 30 MHz	-73.93	0.0000404576
162.025 MHz	30 MHz to 1 GHz	-59.98	0.001004616
162.025 MHz	1 GHz to 2 GHz	-53.53	0.004436086

Table 18 - Receive Mode Spurious Emissions Results

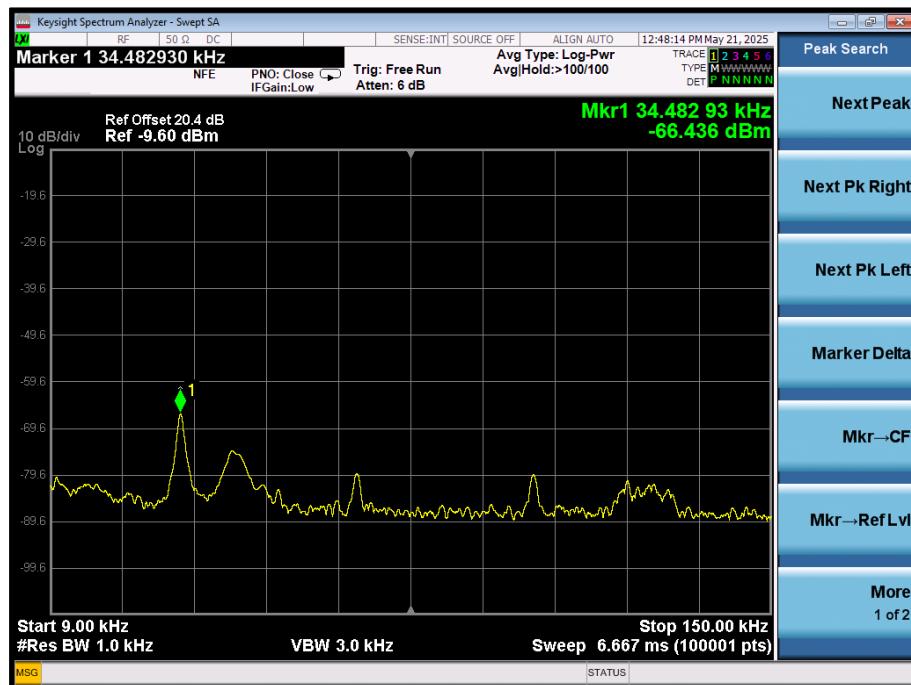


Figure 29 - (156.05 MHz) 9 kHz to 150 kHz

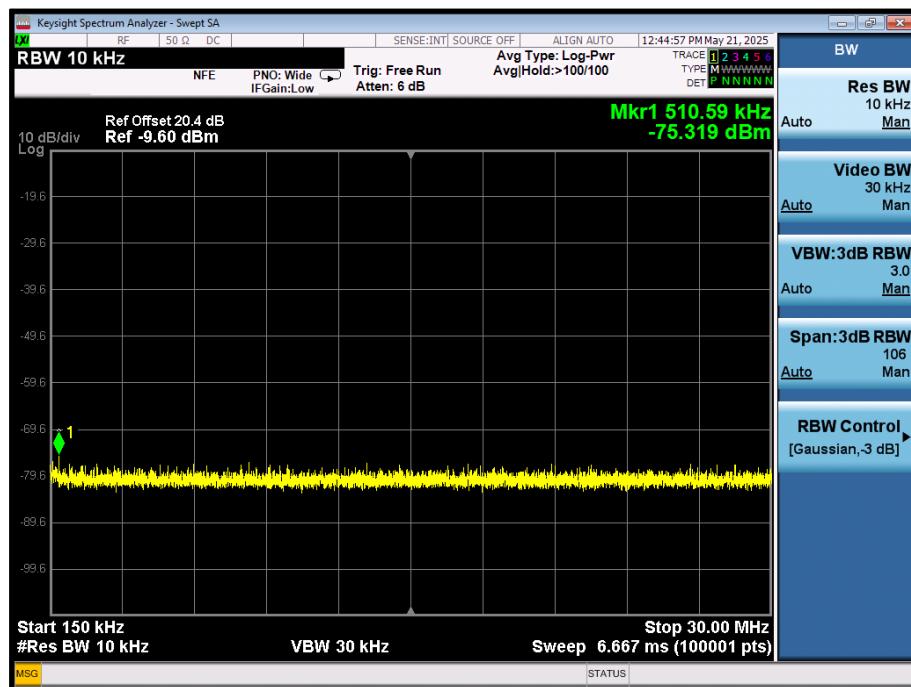


Figure 30 - (156.05 MHz) 150 kHz to 30 MHz

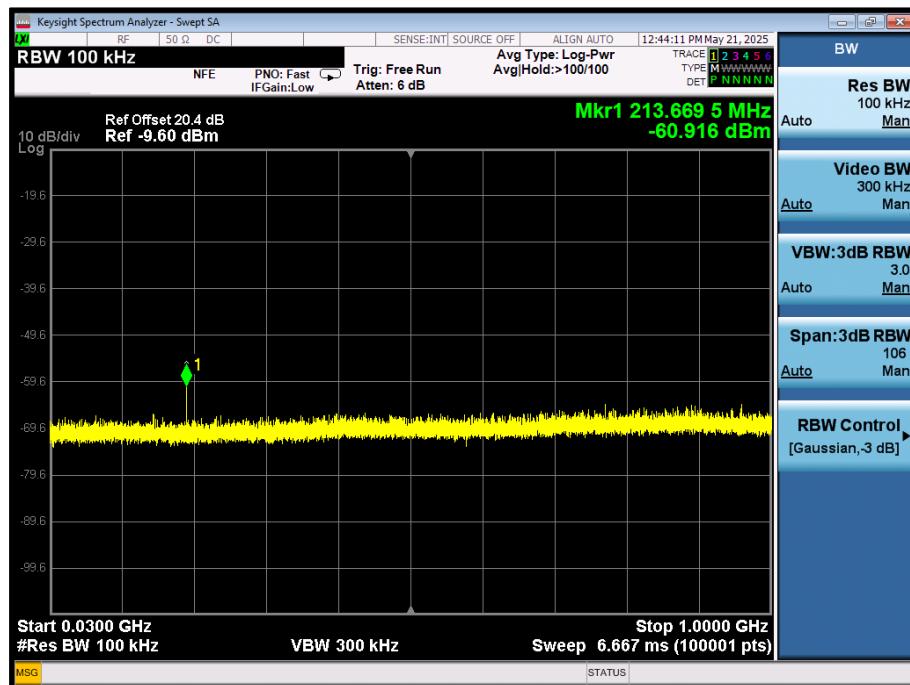


Figure 31 - (156.05 MHz) 30 MHz to 1 GHz

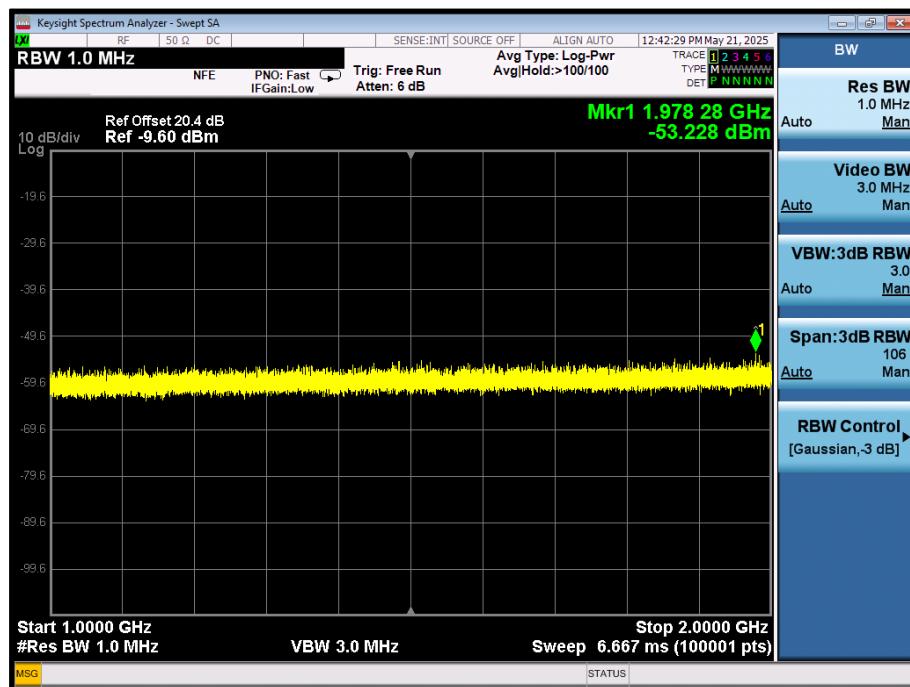


Figure 32 - (156.05 MHz) 1 GHz to 2 GHz

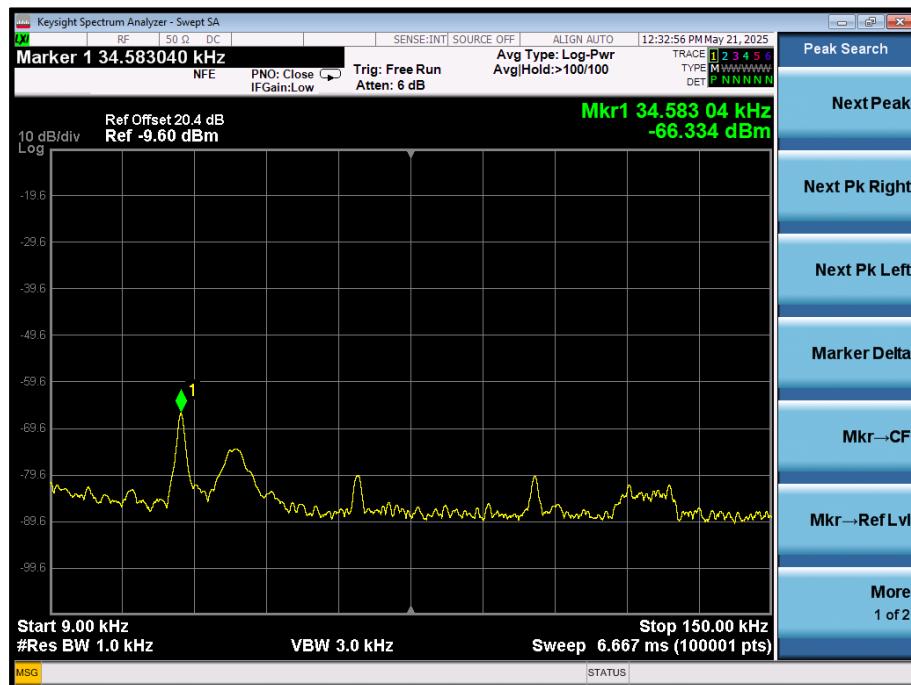


Figure 33 - (162.025 MHz) 9 kHz to 150 kHz

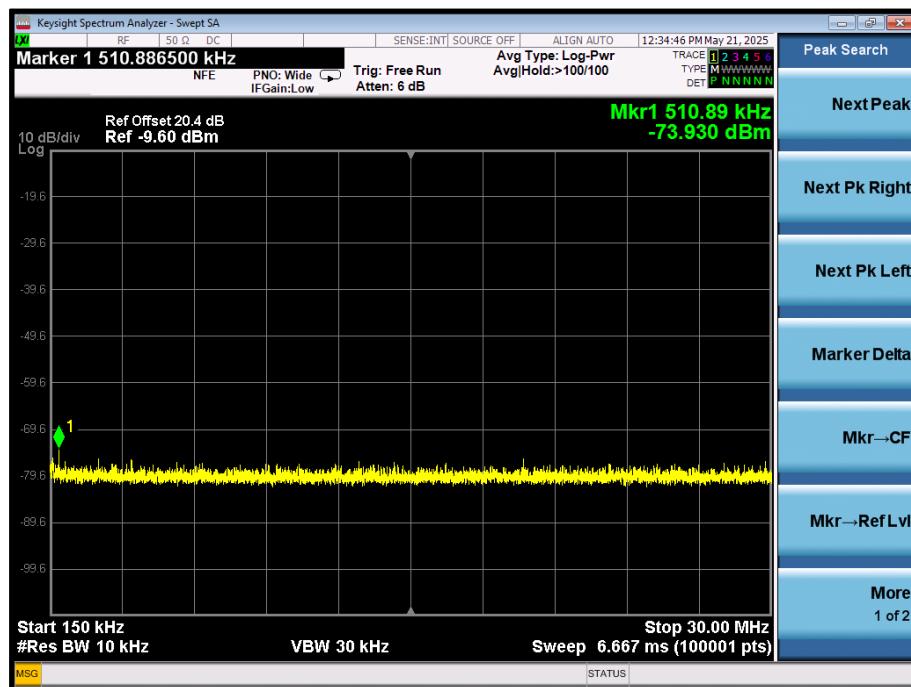


Figure 34 - (162.025 MHz) 150 kHz to 30 MHz

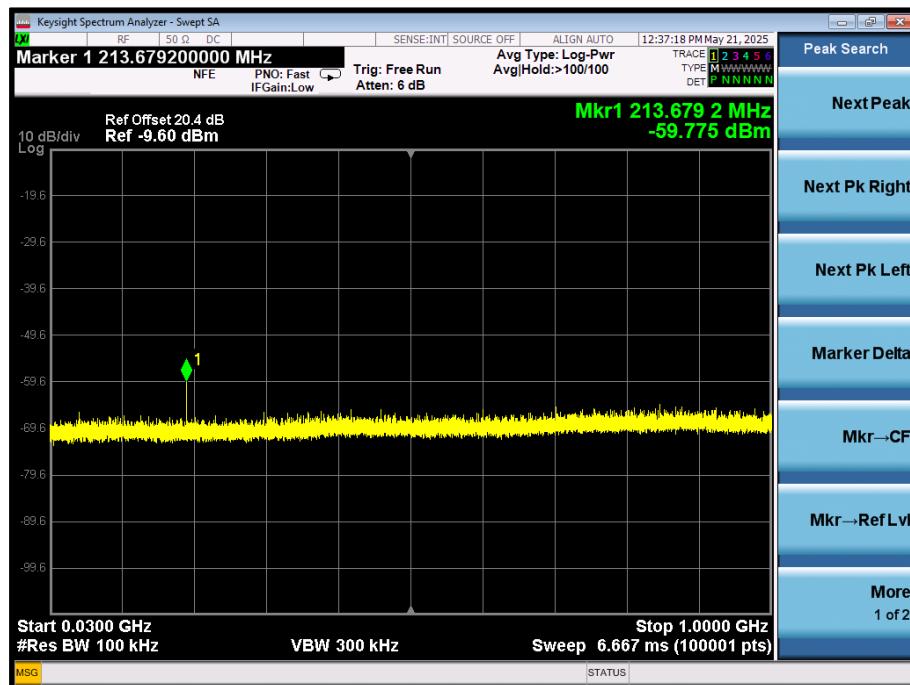


Figure 35 - (162.025 MHz) 30 MHz to 1 GHz

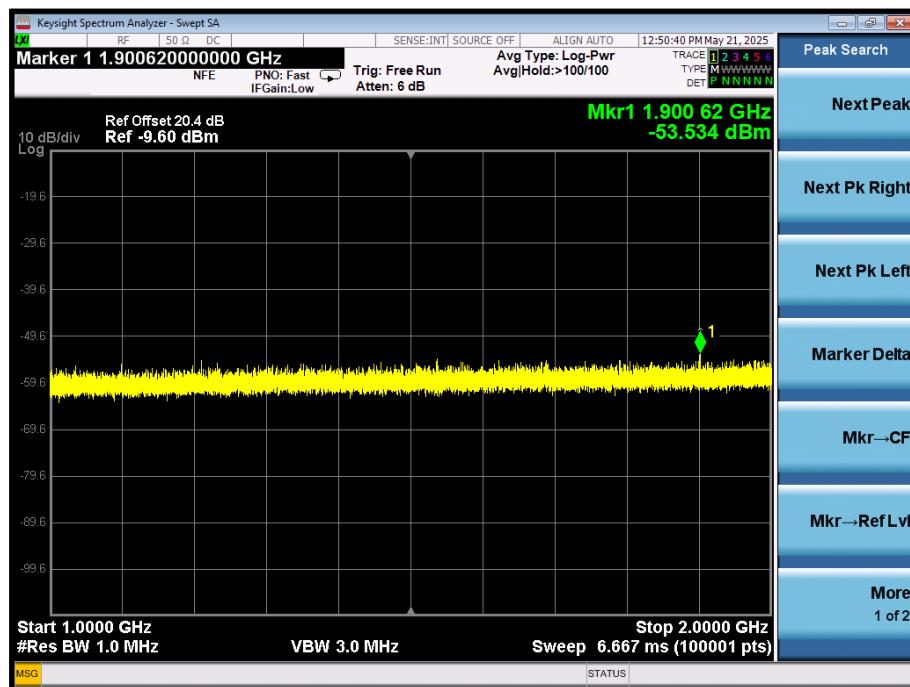


Figure 36 - (162.025 MHz) 1 GHz to 2 GHz



FCC 47 CFR Part 80, Limit Clause 80.217 (b)

The EUT shall deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:

Frequency of interfering emissions	Power to artificial antenna in $\mu$ W	Power to artificial antenna in dBm
Below 30 MHz	400	-4.0
30 to 100 MHz	4,000	6.0
100 to 300 MHz	40,000	16.0
Over 300 MHz	400,000	26.0

**Table 19**

**2.7.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	75 Mk3	455	12	09-Jan-2026
Power Supply	Iso-tech	IPS 2010	2439	12	O/P Mon
Hygrometer	Rotronic	I-1000	2891	12	02-Dec-2025
Attenuator (20 dB, 150 W)	Narda	769-20	3367	12	02-Sep-2025
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Mar-2026
2m N(m) - N(m) RF Cable	Rhophase	NPS-2303-2000-NPS	3604	12	19-Feb-2026
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	17-Mar-2026
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	01-Feb-2026
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	06-May-2026

**Table 20**

O/P Mon – Output Monitored using calibrated equipment

### 3 Photographs

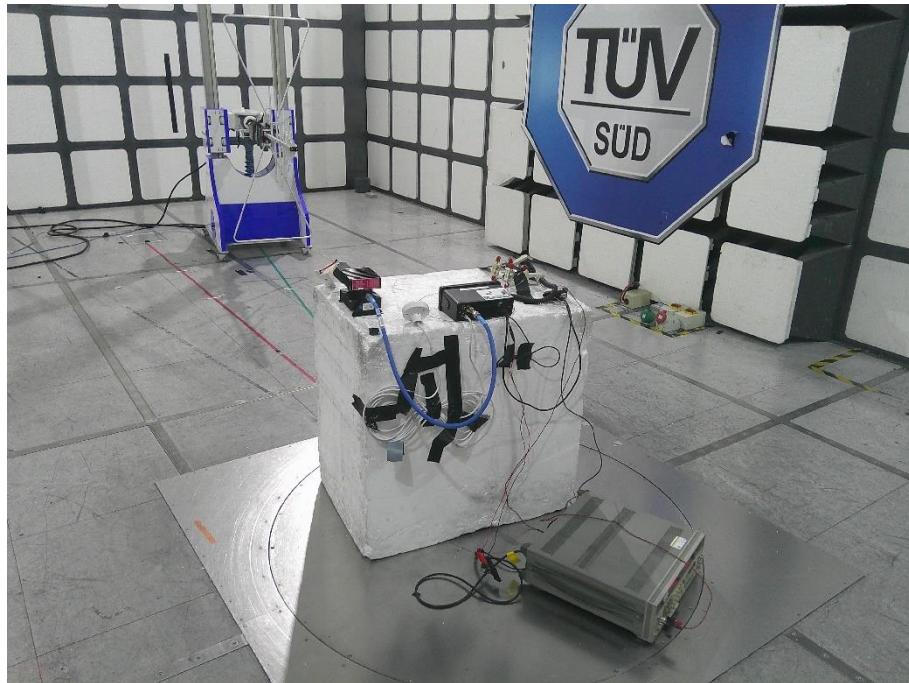


Figure 37 – Test Setup 30 MHz to 1 GHz



Figure 38 – Test Setup 1 GHz to 2 GHz

## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Bandwidths	$\pm 58.05$ Hz
Transmitter Frequency Tolerances	$\pm 11$ Hz
Spurious Emissions at Antenna Terminals	$\pm 3.45$ dB
Radiated Spurious Emissions	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 18 GHz: $\pm 6.3$ dB
Modulation Requirements	-
Transmitter Power	$\pm 3.2$ dB
Suppression of Interference Aboard Ships	$\pm 3.45$ dB
Requirements for Selective Calling Equipment	-

**Table 21**

### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.