


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	19°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	2.4G + 5G

Horizontal

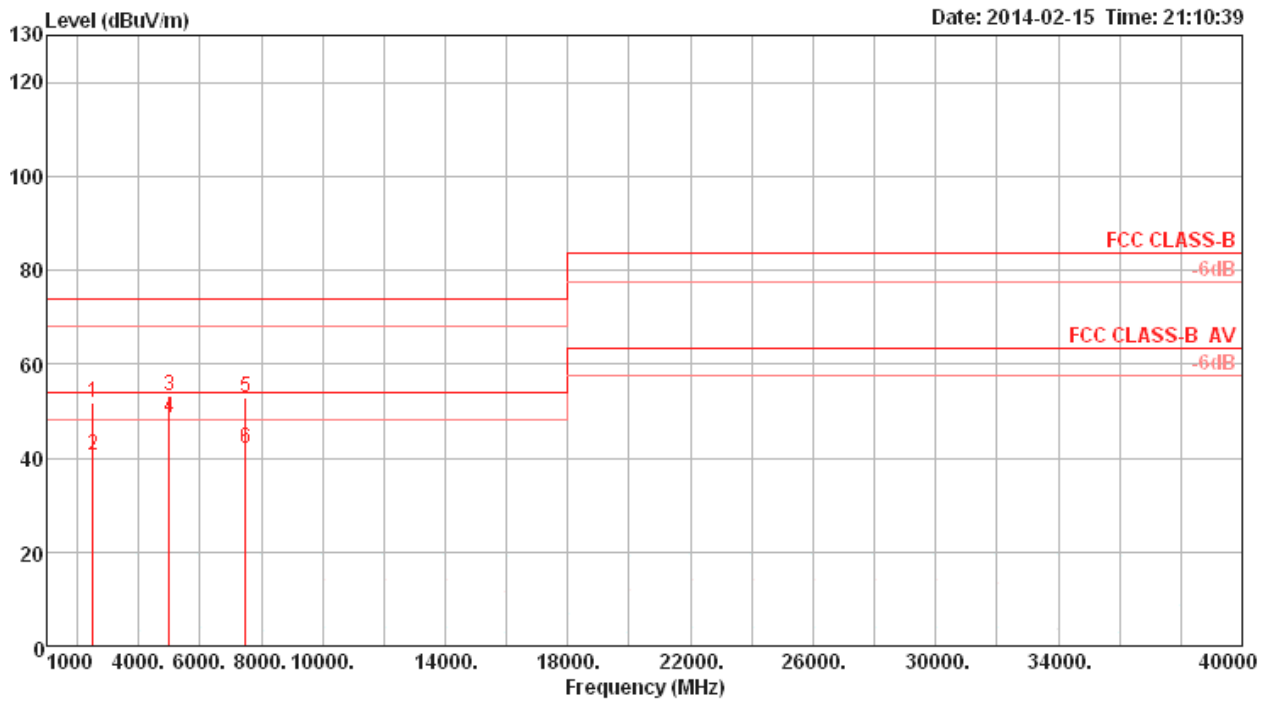

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2499.50	51.69	74.00	-22.31	54.22	4.17	28.30	35.00	Peak	130	238	HORIZONTAL
2	2499.98	40.41	54.00	-13.59	42.94	4.17	28.30	35.00	Average	130	238	HORIZONTAL
3	4999.76	53.35	74.00	-20.65	48.82	6.03	33.70	35.20	Peak	158	322	HORIZONTAL
4	4999.92	48.49	54.00	-5.51	43.96	6.03	33.70	35.20	Average	158	322	HORIZONTAL
5	7499.77	52.79	74.00	-21.21	44.26	7.23	36.80	35.50	Peak	107	208	HORIZONTAL
6	7499.94	41.87	54.00	-12.13	33.34	7.23	36.80	35.50	Average	107	208	HORIZONTAL

Vertical

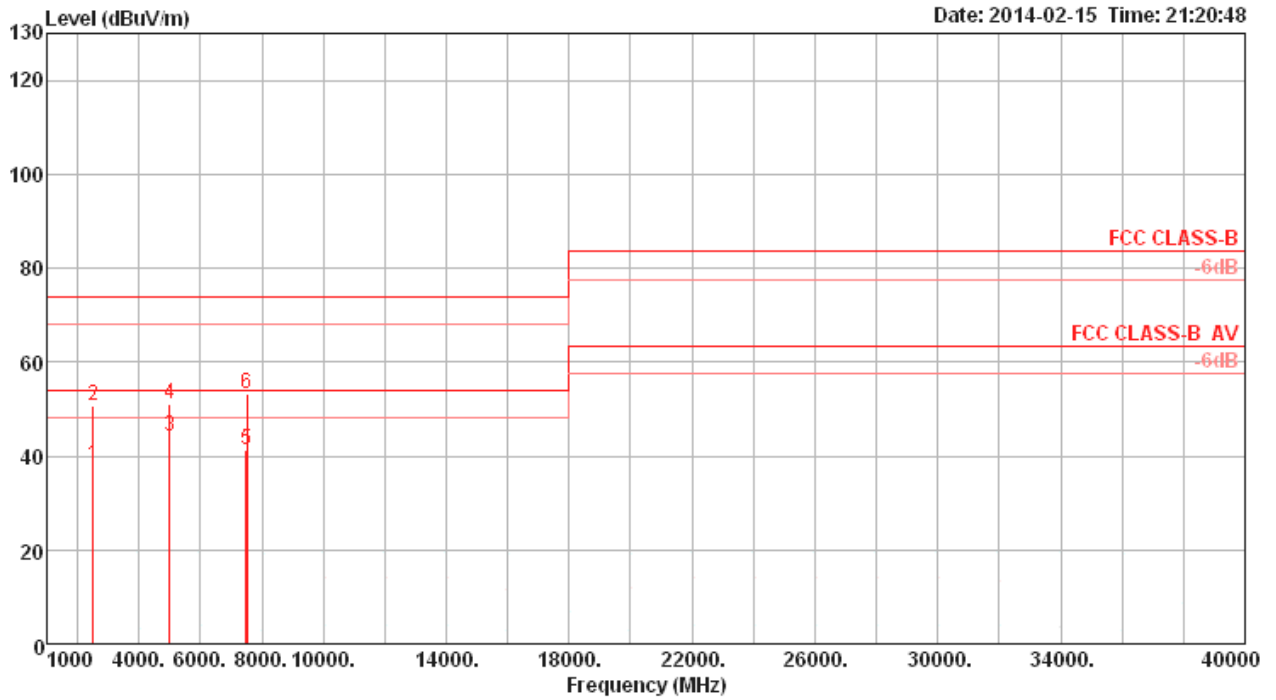

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2500.04	37.94	54.00	-16.06	40.47	4.17	28.30	35.00	Average	100	201	VERTICAL
2	2500.11	50.68	74.00	-23.32	53.21	4.17	28.30	35.00	Peak	100	201	VERTICAL
3	4999.94	44.13	54.00	-9.87	39.60	6.03	33.70	35.20	Average	114	50	VERTICAL
4	5000.04	50.99	74.00	-23.01	46.46	6.03	33.70	35.20	Peak	114	50	VERTICAL
5	7499.94	41.15	54.00	-12.85	32.62	7.23	36.80	35.50	Average	100	285	VERTICAL
6	7500.44	53.10	74.00	-20.90	44.57	7.23	36.80	35.50	Peak	100	285	VERTICAL