

FCC TEST REPORT

REPORT NO.: RF991116C19

MODEL NO.: HW0302W

FCC ID: YZM-HW0302W

RECEIVED: Nov. 16, 2010

TESTED: Nov. 18 ~ Nov. 19, 2010

ISSUED: Nov. 23, 2010

APPLICANT: Aibelive Co., Ltd

ADDRESS: 3F., No. 71, Jhou-zih St., Neu-hu District, Taipei

City 114, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services

(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou

Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product, certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.







Table of Contents

1.	CERTIFICATION	3
2.	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3.	GENERAL INFORMATION	
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	8
4.	TEST TYPES AND RESULTS	
4.1	RADIATED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	.10
4.1.3	TEST PROCEDURES	. 11
4.1.4	DEVIATION FROM TEST STANDARD	
4.1.5	TEST SETUP	.12
4.1.6	EUT OPERATING CONDITIONS	.12
4.1.7	TEST RESULTS	_
4.2	BAND EDGES MEASUREMENT	.18
4.2.1	LIMITS OF BAND EDGES MEASUREMENT	
4.2.2	TEST INSTRUMENTS	.18
4.2.3	TEST PROCEDURE	.18
4.2.4	DEVIATION FROM TEST STANDARD	.18
4.2.5	EUT OPERATING CONDITION	.18
4.2.6	TEST RESULTS	
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	
6.	INFORMATION ON THE TESTING LABORATORIES	.22
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	
	TO THE EUT BY THE LAB	.23



1. CERTIFICATION

PRODUCT: AlWI joystick 2nd generation

MODEL NO.: HW0302W

BRAND: AIWI

APPLICANT: Aibelive Co., Ltd

TESTED: Nov. 18 ~ Nov. 19, 2010

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.249)

ANSI C63.4-2003

The above equipment (model: HW0302W) have been tested by Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

, **DATE** : ___ Nov. 23, 2010 PREPARED BY

TECHNICAL

ACCEPTANCE : Long Chen / Senior Engineer , DATE : Nov. 23, 2010

Long Chen / Senior Engineer

APPROVED BY



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)					
STANDARD PARAGRAPH TEST TYPE RESULT REMARK					
15.207	Conducted Emission Test	NA	Power supply is 3Vdc from batteries.		
Radiated Emission Test 15.209 Band Edge Measurement 15.249 Limit: 50dB less than the peak value of 15.249 (d) fundamental frequency or meet radiated emission limit in section 15.209		PASS	Meet the requirement of limit. Minimum passing margin is -2.2dB at 2398.00MHz.		

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
	30MHz ~ 200MHz	2.93 dB
Radiated emissions	200MHz ~1000MHz	2.95 dB
Radiated emissions	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	AIWI joystick 2nd generation
MODEL NO.	HW0302W
FCC ID	YZM-HW0302W
POWER SUPPLY	3Vdc
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
ANTENNA TYPE	PCB antenna
DATA CABLE	NA
I/O PORT	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

1. A set of the EUT include joystick and dongle. This report covers joystick only. The dongle is covered in another test report which report no.: RF991116C19-1.

MODEL	FCC ID	REPORT NO.	DESCRIPTION
HW0302W	YZM-HW0302W	RF991116C19	For Joystick
HW0303W	YZM-HW0303W	RF991116C19-1	For Dongle

2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.




3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2402	28	2429	55	2456
2	2403	29	2430	56	2457
3	2404	30	2431	57	2458
4	2405	31	2432	58	2459
5	2406	32	2433	59	2460
6	2407	33	2434	60	2461
7	2408	34	2435	61	2462
8	2409	35	2436	62	2463
9	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453	79	2480
26	2427	53	2454		
27	2428	54	2455		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

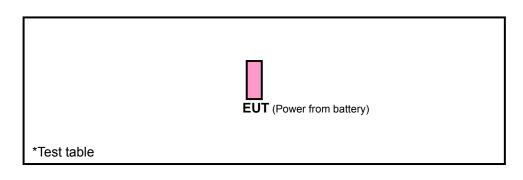



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE		APPLICA	ABLE TO		DESCRIPTION
MODE	RE≥1G	RE<1G	PLC	ВМ	<u> </u>
-	\checkmark	\checkmark	NOTE	√	-

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

BM: Bandedge Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (ABOVE 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
1 ~ 79	1, 40, 79	GFSK	Х

RADIATED EMISSION TEST (BELOW 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
1 ~ 79	1	GFSK	Х

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1 ~ 79	1, 79	GFSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	25deg. C, 66%RH, 1008 hPa	120Vac, 60Hz	Frank Wang
RE<1G	25deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Frank Wang
ВМ	25deg. C, 66%RH, 1008 hPa	120Vac, 60Hz	Frank Wang



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.249) ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, 15.249 as following:

15.209 Limit				
Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)		
0.009 ~ 0.490	2400/F(kHz)	300		
0.490 ~ 1.705	24000/F(kHz)	30		
1.705 ~ 30.0	30	30		
30 ~ 88	100	3		
88 ~ 216	150	3		
216 ~ 960	200	3		
Above 960	500	3		
15.249 Limit				
Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)		
902 ~ 928 MHz	50	500		
2400 ~ 2483.5 MHz	50	500		
5725 ~ 5875 MHz	50	500		
24 ~ 24.25 GHz	250	2500		

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 21, 2009	Dec. 20, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Jul. 09, 2010	Jul. 08, 2011
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2010	Apr. 29, 2011
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-209	Aug. 02, 2010	Aug. 01, 2011
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8449B	3008A01910	Sep. 09, 2010	Sep. 08, 2011
Preamplifier Agilent	8447D	2944A10638	Dec. 21, 2009	Dec. 20, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 14, 2010	May 13, 2011
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 20, 2010	Aug. 19, 2011
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower &Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 2. The test was performed in HwaYa Chamber 9.
 - 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 - 4. The FCC Site Registration No. is 460141.
 - 5. The IC Site Registration No. is IC 7450F-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

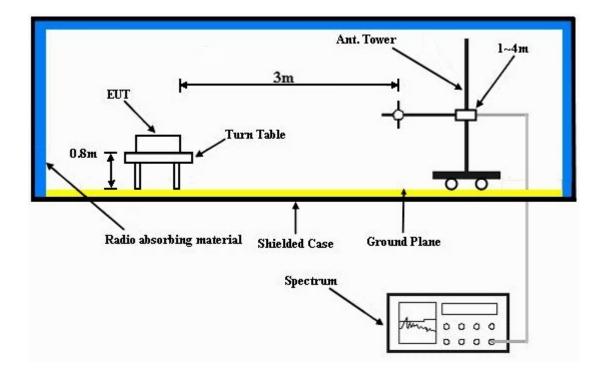

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmitting condition.



4.1.7 TEST RESULTS

ABOVE 1GHz DATA

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	NNEL Channel 1		1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
	25deg. C, 66%RH 1008 hPa	TESTED BY	Frank Wang	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	2390.00	61.8 PK	74.0	-12.2	1.27 H	242	31.30	30.50		
2	2390.00	26.1 AV	54.0	-27.9	1.27 H	242	-4.40	30.50		
3	2398.00	71.8 PK	74.0	-2.2	1.27 H	242	41.20	30.60		
4	2398.00	26.4 AV	54.0	-27.6	1.27 H	242	-4.20	30.60		
5	2400.00	58.8 PK	74.0	-15.2	1.27 H	242	28.20	30.60		
6	2400.00	12.8 AV	54.0	-41.2	1.27 H	242	-17.80	30.60		
7	*2402.00	97.6 PK	114.0	-16.4	1.27 H	242	67.00	30.60		
8	*2402.00	51.6 AV	94.0	-42.4	1.27 H	242	21.00	30.60		
9	4804.00	52.0 PK	74.0	-22.0	1.03 H	172	15.50	36.50		
10	4804.00	6.0 AV	54.0	-48.0	1.03 H	172	-30.50	36.50		
	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
		ANTENNA	A POLARITY	<u>/ & TEST DI</u>	<u>STANCE: V</u>	<u>ERTICAL A</u>	T 3 M			
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	/ & TEST DI	STANCE: V ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
NO.	FREQ. (MHz) 2390.00	EMISSION LEVEL	LIMIT		ANTENNA	TABLE ANGLE	RAW VALUE	FACTOR		
	,	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m)		
1	2390.00	EMISSION LEVEL (dBuV/m) 54.7 PK	LIMIT (dBuV/m)	MARGIN (dB) -19.3	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m) 30.50		
1 2	2390.00 2390.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV	LIMIT (dBuV/m) 74.0 54.0	MARGIN (dB) -19.3 -28.3	ANTENNA HEIGHT (m) 1.95 V 1.95 V	TABLE ANGLE (Degree) 9	RAW VALUE (dBuV) 24.20 -4.80	FACTOR (dB/m) 30.50 30.50		
1 2 3	2390.00 2390.00 2398.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV 64.4 PK	LIMIT (dBuV/m) 74.0 54.0 74.0	-19.3 -28.3 -9.6	ANTENNA HEIGHT (m) 1.95 V 1.95 V 1.95 V	TABLE ANGLE (Degree) 9 9	RAW VALUE (dBuV) 24.20 -4.80 33.80	FACTOR (dB/m) 30.50 30.50 30.60		
1 2 3 4	2390.00 2390.00 2398.00 2398.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV 64.4 PK 26.2 AV	LIMIT (dBuV/m) 74.0 54.0 74.0 54.0	-19.3 -28.3 -9.6 -27.8	ANTENNA HEIGHT (m) 1.95 V 1.95 V 1.95 V	TABLE ANGLE (Degree) 9 9 9	24.20 -4.80 33.80 -4.40	FACTOR (dB/m) 30.50 30.50 30.60 30.60		
1 2 3 4 5	2390.00 2390.00 2398.00 2398.00 2400.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV 64.4 PK 26.2 AV 60.6 PK	LIMIT (dBuV/m) 74.0 54.0 74.0 54.0 74.0	-19.3 -28.3 -9.6 -27.8 -13.4	ANTENNA HEIGHT (m) 1.95 V 1.95 V 1.95 V 1.95 V	TABLE ANGLE (Degree) 9 9 9 9	24.20 -4.80 33.80 -4.40 30.00	FACTOR (dB/m) 30.50 30.50 30.60 30.60 30.60		
1 2 3 4 5	2390.00 2390.00 2398.00 2398.00 2400.00 2400.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV 64.4 PK 26.2 AV 60.6 PK 14.6 AV	LIMIT (dBuV/m) 74.0 54.0 74.0 54.0 74.0 54.0	-19.3 -28.3 -9.6 -27.8 -13.4 -39.4	ANTENNA HEIGHT (m) 1.95 V 1.95 V 1.95 V 1.95 V 1.95 V 1.95 V	TABLE ANGLE (Degree) 9 9 9 9 9	24.20 -4.80 33.80 -4.40 30.00 -16.00	FACTOR (dB/m) 30.50 30.50 30.60 30.60 30.60 30.60		
1 2 3 4 5 6	2390.00 2390.00 2398.00 2398.00 2400.00 2400.00 *2402.00	EMISSION LEVEL (dBuV/m) 54.7 PK 25.7 AV 64.4 PK 26.2 AV 60.6 PK 14.6 AV 90.0 PK	LIMIT (dBuV/m) 74.0 54.0 74.0 54.0 74.0 54.0 114.0	-19.3 -28.3 -9.6 -27.8 -13.4 -39.4 -24.0	ANTENNA HEIGHT (m) 1.95 V 1.95 V 1.95 V 1.95 V 1.95 V 1.95 V 1.95 V	TABLE ANGLE (Degree) 9 9 9 9 9 9 9	24.20 -4.80 33.80 -4.40 30.00 -16.00 59.40	FACTOR (dB/m) 30.50 30.50 30.60 30.60 30.60 30.60 30.60		

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency
- 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula: 20 log (Duty cycle) = 20 log (0.5 ms / 100 ms) = -46.0dB

Please see page 16 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL Channel 40		FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
	25deg. C, 66%RH 1008 hPa	TESTED BY	Frank Wang	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2441.00	97.1 PK	114.0	-16.9	1.04 H	223	66.40	30.70	
2	*2441.00	51.1 AV	94.0	-42.9	1.04 H	223	20.40	30.70	
3	4882.00	50.9 PK	74.0	-23.1	1.00 H	340	14.20	36.70	
4	4882.00	4.9 AV	54.0	-49.1	1.00 H	340	-31.80	36.70	
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M		
NO. FREQ. (MHz) EMISSION LIMIT (dBuV/m) MARGIN (dB) HEIGHT (m) TABLE ANTENNA ANGLE (dBuV)									
NO.	FREQ. (MHz)	LEVEL		MARGIN (dB)		ANGLE		CORRECTION FACTOR (dB/m)	
NO.	FREQ. (MHz) *2441.00	LEVEL		MARGIN (dB) -23.8		ANGLE		FACTOR	
	. ,	LEVEL (dBuV/m)	(dBuV/m)	Ì	HEIGHT (m)	ANGLE (Degree)	(dBuV)	FACTOR (dB/m)	
1	*2441.00	LEVEL (dBuV/m) 90.2 PK	(dBuV/m)	-23.8	HEIGHT (m) 1.97 V	ANGLE (Degree)	(dBuV) 59.50	FACTOR (dB/m) 30.70	

- **REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - 3. The other emission levels were very low against the limit.
 - 4. Margin value = Emission level Limit value.
 - 5. " * " : Fundamental frequency
 - 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula: 20 log (Duty cycle) = 20 log (0.5 ms / 100 ms) = -46.0dB

Please see page 16 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL Channel 79		FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
	25deg. C, 66%RH 1008 hPa	TESTED BY	Frank Wang	


	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2480.00	96.7 PK	114.0	-17.3	1.03 H	223	65.80	30.90		
2	*2480.00	50.7 AV	94.0	-43.3	1.03 H	223	19.80	30.90		
3	2483.50	58.9 PK	74.0	-15.1	1.03 H	223	28.00	30.90		
4	2483.50	12.9 AV	54.0	-41.1	1.03 H	223	-18.00	30.90		
5	2485.50	67.1 PK	74.0	-6.9	1.00 H	223	36.20	30.90		
6	2485.50	26.4 AV	54.0	-27.6	1.00 H	223	-4.50	30.90		
7	4960.00	49.4 PK	74.0	-24.6	1.00 H	349	12.50	36.90		
8	4960.00	3.4 AV	54.0	-50.6	1.00 H	349	-33.50	36.90		
		ANTENNA	A POLARIT	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO.		EMISSION				TABLE		CORRECTION		
NO.	FREQ. (MHz)	LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m)		
1	*2480.00			MARGIN (dB) -24.5		ANGLE		FACTOR		
	` ,	(dBuV/m)	(dBuV/m)	- (")	HEIGHT (m)	ANGLE (Degree)	(dBuV)	FACTOR (dB/m)		
1	*2480.00	(dBuV/m) 89.5 PK	(dBuV/m)	-24.5	HEIGHT (m) 1.90 V	ANGLE (Degree)	(dBuV) 58.60	FACTOR (dB/m) 30.90		
1 2	*2480.00 *2480.00	(dBuV/m) 89.5 PK 43.5 AV	(dBuV/m) 114.0 94.0	-24.5 -50.5	1.90 V 1.90 V	ANGLE (Degree) 174	(dBuV) 58.60 12.60	FACTOR (dB/m) 30.90 30.90		
1 2 3	*2480.00 *2480.00 2483.50	(dBuV/m) 89.5 PK 43.5 AV 57.0 PK	(dBuV/m) 114.0 94.0 74.0	-24.5 -50.5 -17.0	1.90 V 1.90 V 1.90 V	ANGLE (Degree) 174 174	(dBuV) 58.60 12.60 26.10	FACTOR (dB/m) 30.90 30.90 30.90		
1 2 3 4	*2480.00 *2480.00 2483.50 2483.50	(dBuV/m) 89.5 PK 43.5 AV 57.0 PK 11.0 AV	(dBuV/m) 114.0 94.0 74.0 54.0	-24.5 -50.5 -17.0 -43.0	1.90 V 1.90 V 1.90 V 1.90 V 1.90 V	ANGLE (Degree) 174 174 174 174	(dBuV) 58.60 12.60 26.10 -19.90	FACTOR (dB/m) 30.90 30.90 30.90 30.90		
1 2 3 4 5	*2480.00 *2480.00 2483.50 2483.50 2485.50	(dBuV/m) 89.5 PK 43.5 AV 57.0 PK 11.0 AV 59.9 PK	(dBuV/m) 114.0 94.0 74.0 54.0 74.0	-24.5 -50.5 -17.0 -43.0 -14.1	1.90 V 1.90 V 1.90 V 1.90 V 1.90 V 1.90 V	ANGLE (Degree) 174 174 174 174 174	(dBuV) 58.60 12.60 26.10 -19.90 29.00	FACTOR (dB/m) 30.90 30.90 30.90 30.90 30.90		


REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency
- 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula: 20 log (Duty cycle) = 20 log (0.5 ms / 100 ms) = -46.0dB

Please see page 16 for plotted duty.



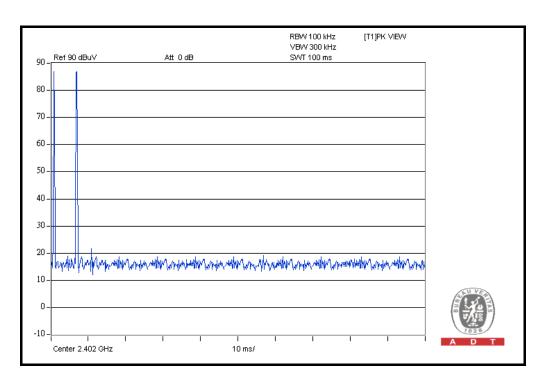

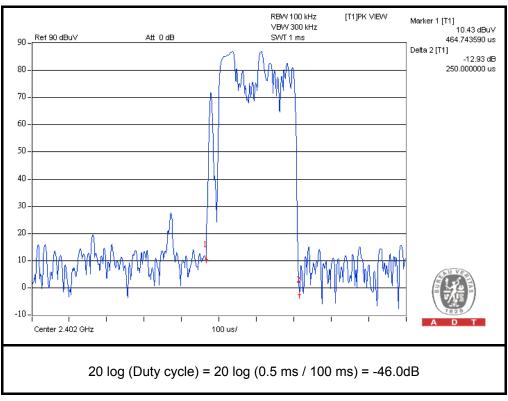



BELOW 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL Channel 1		FREQUENCY RANGE	Below 1000MHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak	
	26deg. C, 65%RH 1008 hPa	TESTED BY	Frank Wang	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	90.17	11.9 QP	43.5	-31.6	2.00 H	238	2.60	9.30		
2	323.49	14.7 QP	46.0	-31.3	2.00 H	289	0.40	14.30		
3	514.03	25.4 QP	46.0	-20.6	1.50 H	259	5.70	19.70		
4	698.74	29.2 QP	46.0	-16.8	1.00 H	205	6.40	22.80		
5	815.39	25.8 QP	46.0	-20.2	1.50 H	316	0.30	25.50		
6	933.99	25.9 QP	46.0	-20.1	1.25 H	7	-0.50	26.40		
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO. FREQ. (MHz) LEVEL MARGIN (dB) ANGLE					RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)				
1	30.00	27.9 QP	40.0	-12.1	1.00 V	13	15.60	12.30		
^	90.17	4= 0.00	40.5	05.0	4.05.17	007	0.00	9.30		
2	90.17	17.6 QP	43.5	-25.9	1.25 V	337	8.30	9.30		
3	191.28	17.6 QP 16.9 QP	43.5	-25.9 -26.6	1.25 V 1.25 V	1	8.30 5.60	11.30		
					-					
3	191.28	16.9 QP	43.5	-26.6	1.25 V	1	5.60	11.30		

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



4.2 BAND EDGES MEASUREMENT

4.2.1 LIMITS OF BAND EDGES MEASUREMENT

Below –50dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 17, 2010	Jul. 16, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.


4.2.5 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest and highest channel frequencies individually.




4.2.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 50dB offset below D1. It shows compliance with the requirement in part 15.249 (d).

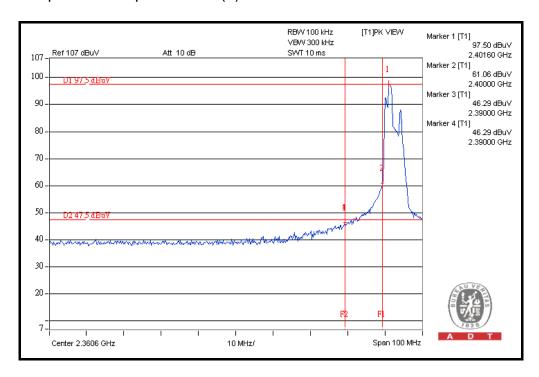

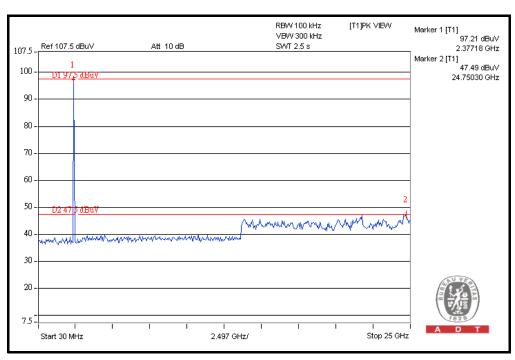



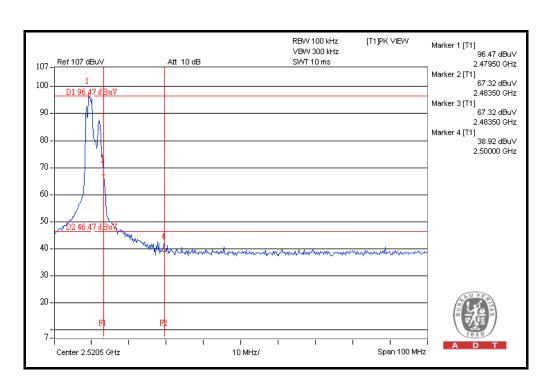

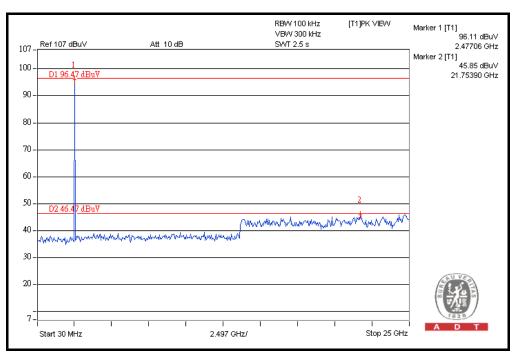



5. PHOTOGRAPHS OF THE TEST CONFIGURATION Please refer to the attached file (Test Setup Photo).

21 Report No.: RF991116C19 Report Format Version 3.0.1



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

<u>www.adt.com.tw/index.5/phtml</u>. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF Lab:

Tel: 886-2-26052180 Tel: 886-3-5935343 Fax: 886-2-26051924 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---