

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-256-RWD-035
Reception No. : 2505001660
Applicant : LG Innotek Co., Ltd.
Address : 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, South Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Type of Equipment : 4PPoE-BLE WLAN Bridge
FCC ID. : YZP-ETPPDRPP01
Model Name : ETPPDRPP01
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 42 pages (including this page)
Date of Incoming : May 07, 2025
Date of issue : June 25, 2025

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.



Tested by
 Si-eon Lee / Senior Project Engineer
 ONETECH Corp.



Reviewed by
 Tae-Ho, Kim / Chief Engineer
 ONETECH Corp.



Approved by
 Jae-Ho, Lee / Director
 ONETECH Corp.

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	17
4. EUT MODIFICATIONS.....	17
5. SYSTEM TEST CONFIGURATION	18
5.1 JUSTIFICATION.....	18
5.2 PERIPHERAL EQUIPMENT	18
5.3 MODE OF OPERATION DURING THE TEST	19
5.4 CONFIGURATION OF TEST SYSTEM.....	20
5.5 ANTENNA REQUIREMENT	20
6. MEASUREMENT UNCERTAINTY	20
7. PRELIMINARY TEST	21
7.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	21
7.2 GENERAL RADIATED EMISSIONS TESTS	21
8. MINIMUM 20 dB BANDWIDTH.....	22
8.1 OPERATING ENVIRONMENT	22
8.2 TEST SET-UP	22
8.3 TEST DATE	22
8.4 TEST DATA FOR 1 MBPS	22
8.5 TEST DATA FOR 2 MBPS	22
8.6 TEST DATA FOR 3 MBPS	22
9. HOPPING FREQUENCY SEPARATION.....	23
9.1 OPERATING ENVIRONMENT	23
9.2 TEST SET-UP	23

9.3 TEST DATE	23
9.4 TEST DATA FOR 1 MBPS	23
9.5 TEST DATA FOR 2 MBPS	23
9.6 TEST DATA FOR 3 MBPS	23
10. NUMBER OF HOPPING CHANNELS	24
10.1 OPERATING ENVIRONMENT	24
10.2 TEST SET-UP	24
10.3 TEST DATE	24
10.4 TEST DATA FOR 1 MBPS	24
10.5 TEST DATA FOR 2 MBPS	24
10.6 TEST DATA FOR 3 MBPS	24
11. TIME OF OCCUPANCY	25
11.1 OPERATING ENVIRONMENT	25
11.2 TEST SET-UP	25
11.3 TEST DATE	25
11.4 TEST DATA FOR 1 MBPS	25
11.5 TEST DATA FOR 2 MBPS	26
11.6 TEST DATA FOR 3 MBPS	26
12. MAXIMUM PEAK OUTPUT POWER	27
12.1 OPERATING ENVIRONMENT	27
12.2 TEST SET-UP	27
12.3 TEST DATE	27
12.4 TEST DATA FOR 1 MBPS	28
12.5 TEST DATA FOR 2 MBPS	28
12.6 TEST DATA FOR 3 MBPS	28
13. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND	29
13.1 OPERATING ENVIRONMENT	29
13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	29
13.3 TEST SET-UP FOR RADIATED MEASUREMENT	29
13.4 TEST DATE	29
13.5 TEST DATA FOR CONDUCTED EMISSION	29
13.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	30
13.6.1 Radiated Emission which fall in the Restricted Band	30
13.6.2 Spurious & Harmonic Radiated Emission above 1 GHz	33
14. RADIATED EMISSION TEST	36
14.1 OPERATING ENVIRONMENT	36

14.2 TEST SET-UP	36
14.3 TEST DATE	36
14.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	37
14.4.1 Test data for Bluetooth Mode	37
14.5 Test data for Below 30 MHz	38
13.6 TEST DATA FOR ABOVE 1 GHz	38
15. CONDUCTED EMISSION TEST.....	39
15.1 OPERATING ENVIRONMENT	39
15.2 TEST SET-UP	39
15.3 TEST DATE	39
15.4 TEST DATA FOR BLUETOOTH	40
16. LIST OF TEST EQUIPMENT	42

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-256-RWD-035	June 25, 2025	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, South Korea
 Contact Person : Jeong Inchang / Senior Research Engineer
 Telephone No. : +82-62-950-332
 FCC ID : YZP-ETPPDRPP01
 Model Name : ETPPDRPP01
 Brand Name : -
 Serial Number : N/A
 Date : June 25, 2025

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, 4PPoE-BLE WLAN Bridge
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

-. Lab Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model ETPPDRPP01 (referred to as the EUT in this report) is a 4PPoE-BLE WLAN Bridge.

The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	4PPoE-BLE WLAN Bridge	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))
	WLAN 5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	WLAN 5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	WLAN 5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
		GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	125 kbps	7.69 dBm
		500 kbps	7.90 dBm
		1 Mbps	7.69 dBm
		2 Mbps	7.77 dBm
	Bluetooth	1 Mbps	8.14 dBm
		2 Mbps	10.44 dBm
		3 Mbps	10.59 dBm
	WLAN 2.4 GHz	SISO_Antenna 0	20.95 dBm(802.11b) 19.16 dBm(802.11g) 19.13 dBm(802.11n_HT20) 17.11 dBm(802.11n_HT40)
		SISO_Antenna 1	20.72 dBm(802.11b) 19.20 dBm(802.11g) 19.01 dBm(802.11n_HT20) 17.13 dBm(802.11n_HT40)
		MIMO_Antenna 0	14.82 dBm(802.11n_HT20) 11.45 dBm(802.11n_HT40)
		MIMO_Antenna 1	14.83 dBm(802.11n_HT20) 11.44 dBm(802.11n_HT40)
		MIMO_Multiple Antenna	14.82 dBm(802.11n_HT20) 11.45 dBm(802.11n_HT40)

RF OUTPUT POWER	WLAN 5 150 MHz ~ 5 250 MHz Band	SISO_Antenna 0	15.81 dBm(802.11a) 15.98 dBm(802.11n_HT20) 15.32 dBm(802.11n_HT40) 15.34 dBm(802.11ac_VHT20) 15.28 dBm(802.11ac_VHT40) 11.65 dBm(802.11ac_VHT80)
		SISO_Antenna 1	15.97 dBm(802.11a) 15.54 dBm(802.11n_HT20) 15.31 dBm(802.11n_HT40) 15.26 dBm(802.11ac_VHT20) 15.73 dBm(802.11ac_VHT40) 11.66 dBm(802.11ac_VHT80)
		MIMO_Antenna 0	11.82 dBm(802.11n_HT20) 11.05 dBm(802.11n_HT40) 11.84 dBm(802.11ac_VHT20) 11.51 dBm(802.11ac_VHT40) 8.26 dBm(802.11ac_VHT80)
		MIMO_Antenna 1	11.58 dBm(802.11n_HT20) 11.02 dBm(802.11n_HT40) 11.42 dBm(802.11ac_VHT20) 11.33 dBm(802.11ac_VHT40) 8.18 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna	14.71 dBm(802.11n_HT20) 14.05 dBm(802.11n_HT40) 14.64 dBm(802.11ac_VHT20) 14.38 dBm(802.11ac_VHT40) 11.23 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 250 MHz ~ 5 350 MHz Band	SISO_Antenna 0	16.66 dBm(802.11a) 16.92 dBm(802.11n_HT20) 15.80 dBm(802.11n_HT40) 16.38 dBm(802.11ac_VHT20) 15.68 dBm(802.11ac_VHT40) 12.34 dBm(802.11ac_VHT80)
		SISO_Antenna 1	16.24 dBm(802.11a) 15.95 dBm(802.11n_HT20) 15.47 dBm(802.11n_HT40) 15.61 dBm(802.11ac_VHT20) 15.93 dBm(802.11ac_VHT40) 11.92 dBm(802.11ac_VHT80)
		MIMO_Antenna 0	12.38 dBm(802.11n_HT20) 12.08 dBm(802.11n_HT40) 12.17 dBm(802.11ac_VHT20) 12.13 dBm(802.11ac_VHT40) 8.77 dBm(802.11ac_VHT80)
		MIMO_Antenna 1	11.48 dBm(802.11n_HT20) 11.25 dBm(802.11n_HT40) 11.38 dBm(802.11ac_VHT20) 11.54 dBm(802.11ac_VHT40) 8.41 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna	14.96 dBm(802.11n_HT20) 14.70 dBm(802.11n_HT40) 14.80 dBm(802.11ac_VHT20) 14.82 dBm(802.11ac_VHT40) 11.60 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 470 MHz ~ 5 725 MHz Band	SISO_Antenna 0	18.09 dBm(802.11a) 18.14 dBm(802.11n_HT20) 18.83 dBm(802.11n_HT40) 17.64 dBm(802.11ac_VHT20) 18.66 dBm(802.11ac_VHT40) 14.32 dBm(802.11ac_VHT80)
		SISO_Antenna 0_Straddle	14.82 dBm(802.11a) 14.41 dBm(802.11n_HT20) 15.98 dBm(802.11n_HT40) 14.52 dBm(802.11ac_VHT20) 16.09 dBm(802.11ac_VHT40) 14.58 dBm(802.11ac_VHT80)
		SISO_Antenna 1	17.08 dBm(802.11a) 16.91 dBm(802.11n_HT20) 16.73 dBm(802.11n_HT40) 16.49 dBm(802.11ac_VHT20) 16.92 dBm(802.11ac_VHT40) 13.83 dBm(802.11ac_VHT80)
		SISO_Antenna 1_Straddle	13.35 dBm(802.11a) 12.91 dBm(802.11n_HT20) 14.16 dBm(802.11n_HT40) 13.08 dBm(802.11ac_VHT20) 13.99 dBm(802.11ac_VHT40) 12.46 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 470 MHz ~ 5 725 MHz Band	MIMO_Antenna 0	13.47 dBm(802.11n_HT20) 14.25 dBm(802.11n_HT40) 13.24 dBm(802.11ac_VHT20) 14.48 dBm(802.11ac_VHT40) 9.87 dBm(802.11ac_VHT80)
		MIMO_Antenna 0_Straddle	8.06 dBm(802.11n_HT20) 9.56 dBm(802.11n_HT40) 8.43 dBm(802.11ac_VHT20) 9.75 dBm(802.11ac_VHT40) 10.11 dBm(802.11ac_VHT80)
		MIMO_Antenna 1	12.51 dBm(802.11n_HT20) 12.51 dBm(802.11n_HT40) 12.48 dBm(802.11ac_VHT20) 12.57 dBm(802.11ac_VHT40) 9.33 dBm(802.11ac_VHT80)
		MIMO_Antenna 1_Straddle	7.02 dBm(802.11n_HT20) 8.14 dBm(802.11n_HT40) 6.91 dBm(802.11ac_VHT20) 8.15 dBm(802.11ac_VHT40) 7.99 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna	15.76 dBm(802.11n_HT20) 16.48 dBm(802.11n_HT40) 15.49 dBm(802.11ac_VHT20) 16.64 dBm(802.11ac_VHT40) 12.62 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna _Straddle	10.58 dBm(802.11n_HT20) 11.92 dBm(802.11n_HT40) 10.75 dBm(802.11ac_VHT20) 12.03 dBm(802.11ac_VHT40) 12.19 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 725 MHz ~ 5 850 MHz Band	SISO_Antenna 0	18.61 dBm(802.11a) 18.61 dBm(802.11n_HT20) 18.44 dBm(802.11n_HT40) 18.26 dBm(802.11ac_VHT20) 18.35 dBm(802.11ac_VHT40) 17.68 dBm(802.11ac_VHT80)
		SISO_Antenna 0_Straddle	8.54 dBm(802.11a) 8.71 dBm(802.11n_HT20) 4.90 dBm(802.11n_HT40) 8.78 dBm(802.11ac_VHT20) 4.86 dBm(802.11ac_VHT40) -0.89 dBm(802.11ac_VHT80)
		SISO_Antenna 1	18.71 dBm(802.11a) 18.48 dBm(802.11n_HT20) 18.19 dBm(802.11n_HT40) 18.14 dBm(802.11ac_VHT20) 18.42 dBm(802.11ac_VHT40) 17.41 dBm(802.11ac_VHT80)
		SISO_Antenna 1_Straddle	7.35 dBm(802.11a) 7.46 dBm(802.11n_HT20) 3.30 dBm(802.11n_HT40) 7.60 dBm(802.11ac_VHT20) 3.27 dBm(802.11ac_VHT40) -2.68 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 725 MHz ~ 5 850 MHz Band	MIMO_Antenna 0	13.98 dBm(802.11n_HT20) 13.79 dBm(802.11n_HT40) 13.91 dBm(802.11ac_VHT20) 13.87 dBm(802.11ac_VHT40) 13.33 dBm(802.11ac_VHT80)
		MIMO_Antenna 0_Straddle	2.38 dBm(802.11n_HT20) -1.57 dBm(802.11n_HT40) 2.70 dBm(802.11ac_VHT20) -1.43 dBm(802.11ac_VHT40) -5.40 dBm(802.11ac_VHT80)
		MIMO_Antenna 1	14.07 dBm(802.11n_HT20) 13.76 dBm(802.11n_HT40) 13.91 dBm(802.11ac_VHT20) 13.84 dBm(802.11ac_VHT40) 13.10 dBm(802.11ac_VHT80)
		MIMO_Antenna 1_Straddle	1.63 dBm(802.11n_HT20) -2.48 dBm(802.11n_HT40) 1.53 dBm(802.11ac_VHT20) -2.49 dBm(802.11ac_VHT40) -7.20 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna	16.90 dBm(802.11n_HT20) 16.78 dBm(802.11n_HT40) 16.83 dBm(802.11ac_VHT20) 16.86 dBm(802.11ac_VHT40) 16.23 dBm(802.11ac_VHT80)
		MIMO_Multiple Antenna _Straddle	5.03 dBm(802.11n_HT20) 1.01 dBm(802.11n_HT40) 5.16 dBm(802.11ac_VHT20) 1.08 dBm(802.11ac_VHT40) -3.20 dBm(802.11ac_VHT80)

ANTENNA TYPE	PCB Antenna, Dipole Antenna		
ANTENNA GAIN	Bluetooth LE	0.15 dBi	
	Bluetooth	0.15 dBi	
	WLAN 2.4 GHz	Antenna 1	0.87 dBi
		Antenna 2	3.12 dBi
		Multiple Antenna	5.15 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 1	0.22 dBi
		Antenna 2	3.90 dBi
		Multiple Antenna	5.45 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 1	-0.09 dBi
		Antenna 2	3.90 dBi
		Multiple Antenna	5.36 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 1	1.56 dBi
		Antenna 2	3.92 dBi
		Multiple Antenna	5.91 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 1	1.39 dBi
		Antenna 2	3.85 dBi
		Multiple Antenna	5.80 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. Current Diplexer and SMPS components will be co-located with equivalent parts from other Vendors.

-. The following lists consist of the added model and their differences.

Division	DiPlexer		SMPS	
	Basic	Dualization of parts	Basic	Dualization of parts
P/N	DP1608-A2455DTA0	RFDIP1606LE1319W9K	SHP2401LE	SN00952DG
Vendor	ACX	Walsin	Sungho	Mass-Power

Model Name	Differences	Tested
ETPPDRPP01	Basic: Diplexer (Basic), SMPS (Basic)	☒
	Option 1: Diplexer (Dualization of parts), SMPS (Basic)	☒
	Option 2: Diplexer (Basic), SMPS (Dualization of parts)	☐
	Option 1: Diplexer (Dualization of parts), SMPS (Dualization of parts)	☐

Note: 1. Since the applicant has commissioned the basic model and Option1 testing, this test report only guarantees the contents for the units for which the testing has been completed.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	N/A	N/A
SMPS Board	SUNGHO ELECTRONIC	SHP2401LE	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
ETPPDRPP01	LG Innotek Co., Ltd.	4PPoE-BLE WLAN Bridge (EUT)	
15s-fq1008TU	HP	Notebook PC	EUT
TPN-CA14	CHICONY POWER TECHNOLOGY(Chongqing) CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
39	2 441
78	2 480

-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.884	0.845	77.34	1.12
Bluetooth [2 Mbps]	2.886	0.848	77.29	1.12
Bluetooth [3 Mbps]	2.890	0.846	77.36	1.12

Note – Duty Cycle : $(\text{Tx On Time} / (\text{Tx On Time} + \text{Tx Off Time})) * 100$

Correction Factor : $10 * \text{Log}(1 / (\text{Duty Cycle} / 100))$

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The EUT's antenna is a permanently attached Dipole antenna and PCB antenna, not designed for user replacement

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10: 2020.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Output Power	0.90
Conducted Spurious Emission < 26.5 GHz	1.40
Power Spectral Density	1.22
Line Conducted Disturbance (150 kHz ~ 30 MHz)	2.00
Radiated Disturbance (9 kHz ~ 30 MHz)	3.28
Radiated Disturbance (30 MHz ~ 1 GHz)	4.42
Radiated Disturbance (1 GHz ~ 18 GHz)	5.12
Radiated Disturbance (18 GHz ~ 40 GHz)	5.55

7. PRELIMINARY TEST

7.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


8. MINIMUM 20 dB BANDWIDTH

8.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 20 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

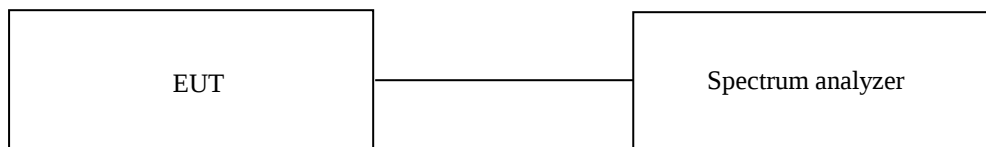

8.3 Test Date

May 07, 2025 ~ June 05, 2025

8.4 Test data for 1 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	939.01
Middle	2 441.00	939.01
High	2 480.00	943.87

8.5 Test data for 2 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 308.67
Middle	2 441.00	1 308.67
High	2 480.00	1 308.67

8.6 Test data for 3 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 258.75
Middle	2 441.00	1 263.62
High	2 480.00	1 263.87

9. HOPPING FREQUENCY SEPARATION

9.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.



9.3 Test Date

May 07, 2025 ~ June 05, 2025

9.4 Test data for 1 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1168.80	626.01	Separated by a minimum of 626.01 kHz

9.5 Test data for 2 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
990.13	872.45	Separated by a minimum of 872.45 kHz

9.6 Test data for 3 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1002.50	842.41	Separated by a minimum of 842.41 kHz

10. NUMBER OF HOPPING CHANNELS

10.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.



10.3 Test Date

May 07, 2025 ~ June 05, 2025

10.4 Test data for 1 Mbps

-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

10.5 Test data for 2 Mbps

-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

10.6 Test data for 3 Mbps

-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64


11. TIME OF OCCUPANCY

11.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

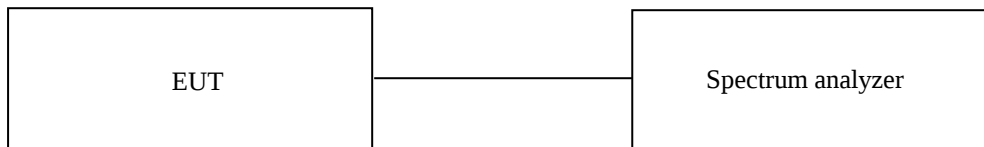

11.3 Test Date

May 07, 2025 ~ June 05, 2025

11.4 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.38	10.13	31.60	122.04	400.00	PASS
DH3	1.64	5.06	31.60	261.73	400.00	
DH5	2.89	3.38	31.60	308.14	400.00	

Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time

11.5 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.39	10.13	31.60	124.04	400.00	PASS
DH3	1.64	5.06	31.60	262.23	400.00	
DH5	2.89	3.38	31.60	308.41	400.00	

Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time

11.6 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.39	10.13	31.60	123.84	400.00	PASS
DH3	1.64	5.06	31.60	261.83	400.00	
DH5	2.89	3.38	31.60	308.61	400.00	

Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time

12. MAXIMUM PEAK OUTPUT POWER

12.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

12.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.



12.3 Test Date

May 07, 2025 ~ June 05, 2025

12.4 Test data for 1 Mbps

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	7.75	21.00	13.25
MIDDLE	2 441.00	8.14	21.00	12.86
HIGH	2 480.00	7.90	21.00	13.10

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

12.5 Test data for 2 Mbps

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	9.63	21.00	11.37
MIDDLE	2 441.00	10.44	21.00	10.56
HIGH	2 480.00	10.10	21.00	10.90

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

12.6 Test data for 3 Mbps

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.49	21.00	10.51
MIDDLE	2 441.00	10.59	21.00	10.41
HIGH	2 480.00	10.55	21.00	10.45

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


13. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

13.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

13.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

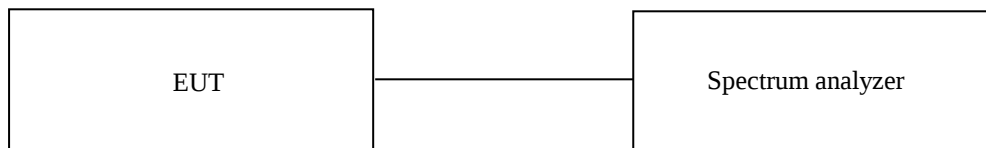

13.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

13.4 Test Date

May 07, 2025 ~ June 05, 2025

13.5 Test data for conducted emission

For Test data for conducted emission, please refer to the Annex.

13.6 Test data for Transmitting mode radiated emission

13.6.1 Radiated Emission which fall in the Restricted Band

13.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.34 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 354.80	59.24	Peak	H	27.68	5.06	41.74	10.28	-	60.52	74.00	13.48
2 386.42	41.03	Average	H	27.55	5.06	41.74	10.28	1.12	43.30	54.00	10.70
2 355.72	55.77	Peak	V	27.68	5.06	41.74	10.28	-	57.05	74.00	16.95
2 354.35	41.21	Average	V	27.68	5.06	41.74	10.28	1.12	43.61	54.00	10.39
Test Data for High Channel											
2 483.51	68.14	Peak	H	27.40	4.75	41.73	10.28	-	68.84	74.00	5.16
2 484.29	44.39	Average	H	27.40	4.75	41.73	10.28	1.12	46.21	54.00	7.79
2 487.46	59.05	Peak	V	27.40	4.75	41.73	10.28	-	59.75	74.00	14.25
2 483.51	41.67	Average	V	27.40	4.75	41.73	10.28	1.12	43.49	54.00	10.51

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{ATT} + \text{Duty Factor}$$

13.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.29 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 358.48	63.18	Peak	H	27.67	5.06	41.74	10.28	-	64.45	74.00	9.55
2 359.40	42.06	Average	H	27.66	5.06	41.74	10.28	1.12	44.44	54.00	9.56
2 356.18	58.31	Peak	V	27.68	5.06	41.74	10.28	-	59.59	74.00	14.41
2 354.07	41.05	Average	V	27.68	5.06	41.74	10.28	1.12	43.45	54.00	10.55
Test Data for High Channel											
2 483.51	68.64	Peak	H	27.40	4.75	41.73	10.28	-	69.34	74.00	4.66
2 483.71	44.48	Average	H	27.40	4.75	41.73	10.28	1.12	46.30	54.00	7.70
2 483.67	59.16	Peak	V	27.40	4.75	41.73	10.28	-	59.86	74.00	14.14
2 483.57	41.63	Average	V	27.40	4.75	41.73	10.28	1.12	43.45	54.00	10.55

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{ATT} + \text{Duty Factor}$$

13.6.1.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.36 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 355.36	64.14	Peak	H	27.68	5.06	41.74	10.28	-	65.42	74.00	8.58
2 359.13	41.71	Average	H	27.66	5.06	41.74	10.28	1.12	44.09	54.00	9.91
2 355.72	58.35	Peak	V	27.68	5.06	41.74	10.28	-	59.63	74.00	14.37
2 389.73	40.76	Average	V	27.54	5.06	41.74	10.28	1.12	43.02	54.00	10.98
Test Data for High Channel											
2 483.99	67.83	Peak	H	27.40	4.75	41.73	10.28	-	68.53	74.00	5.47
2 483.63	43.86	Average	H	27.40	4.75	41.73	10.28	1.12	45.68	54.00	8.32
2 483.81	60.16	Peak	V	27.40	4.75	41.73	10.28	-	60.86	74.00	13.14
2 483.57	41.27	Average	V	27.40	4.75	41.73	10.28	1.12	43.09	54.00	10.91

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{ATT} + \text{Duty Factor}$$

13.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

13.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.34 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.78	51.80	Peak	H	31.20	7.15	41.29	-	48.86	74.00	25.14
4 803.88	43.14	Average	H	31.20	7.15	41.29	1.12	41.32	54.00	12.68
4 804.63	52.45	Peak	V	31.20	7.15	41.29	-	49.51	74.00	24.49
4 804.17	38.35	Average	V	31.20	7.15	41.29	1.12	36.53	54.00	17.47
Test Data for Middle Channel										
4 882.09	51.82	Peak	H	31.26	7.21	41.27	-	49.02	74.00	24.98
4 881.92	43.55	Average	H	31.26	7.21	41.27	1.12	41.87	54.00	12.13
4 883.10	51.67	Peak	V	31.27	7.21	41.27	-	48.88	74.00	25.12
4 881.86	37.79	Average	V	31.26	7.21	41.27	1.12	36.11	54.00	17.89
Test Data for High Channel										
4 958.85	50.21	Peak	H	31.54	7.30	41.25	-	47.80	74.00	26.20
4 959.79	38.85	Average	H	31.54	7.30	41.25	1.12	37.56	54.00	16.44
4 960.36	50.04	Peak	V	31.54	7.30	41.25	-	47.63	74.00	26.37
4 959.92	39.49	Average	V	31.54	7.30	41.25	1.12	38.20	54.00	15.80

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total Level (dBμV/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

13.6.2.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.29 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 803.90	51.86	Peak	H	31.20	7.15	41.29	-	48.92	74.00	25.08
4 803.77	41.63	Average	H	31.20	7.15	41.29	1.12	39.81	54.00	14.19
4 804.51	50.33	Peak	V	31.20	7.15	41.29	-	47.39	74.00	26.61
4 804.12	39.67	Average	V	31.20	7.15	41.29	1.12	37.85	54.00	16.15
Test Data for Middle Channel										
4 882.17	52.99	Peak	H	31.26	7.21	41.27	-	50.19	74.00	23.81
4 881.98	44.25	Average	H	31.26	7.21	41.27	1.12	42.57	54.00	11.43
4 882.78	54.38	Peak	V	31.27	7.21	41.27	-	51.59	74.00	22.41
4 882.00	41.10	Average	V	31.26	7.21	41.27	1.12	39.42	54.00	14.58
Test Data for High Channel										
4 960.46	51.01	Peak	H	31.54	7.30	41.25	-	48.60	74.00	25.40
4 959.93	41.58	Average	H	31.54	7.30	41.25	1.12	40.29	54.00	13.71
4 959.83	50.38	Peak	V	31.54	7.30	41.25	-	47.97	74.00	26.03
4 959.88	39.35	Average	V	31.54	7.30	41.25	1.12	38.06	54.00	15.94

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – AMP Gain + Duty Factor

13.6.2.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.36 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.09	51.20	Peak	H	31.20	7.15	41.29	-	48.26	74.00	25.74
4 803.90	42.64	Average	H	31.20	7.15	41.29	1.12	40.82	54.00	13.18
4 804.24	51.51	Peak	V	31.20	7.15	41.29	-	48.57	74.00	25.43
4 803.87	41.88	Average	V	31.20	7.15	41.29	1.12	40.06	54.00	13.94
Test Data for Middle Channel										
4 882.99	50.81	Peak	H	31.27	7.21	41.27	-	48.02	74.00	25.98
4 881.80	39.34	Average	H	31.26	7.21	41.27	1.12	37.66	54.00	16.34
4 882.94	51.49	Peak	V	31.27	7.21	41.27	-	48.70	74.00	25.30
4 882.73	37.61	Average	V	31.27	7.21	41.27	1.12	35.94	54.00	18.06
Test Data for High Channel										
4 959.61	51.93	Peak	H	31.54	7.30	41.25	-	49.52	74.00	24.48
4 960.09	42.90	Average	H	31.54	7.30	41.25	1.12	41.61	54.00	12.39
4 960.02	51.23	Peak	V	31.54	7.30	41.25	-	48.82	74.00	25.18
4 959.91	40.94	Average	V	31.54	7.30	41.25	1.12	39.65	54.00	14.35

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – AMP Gain + Duty Factor

14. RADIATED EMISSION TEST

14.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

14.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


14.3 Test Date

May 07, 2025 ~ June 05, 2025

14.4 Test data for 30 MHz ~ 1 000 MHz

14.4.1 Test data for Bluetooth Mode

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

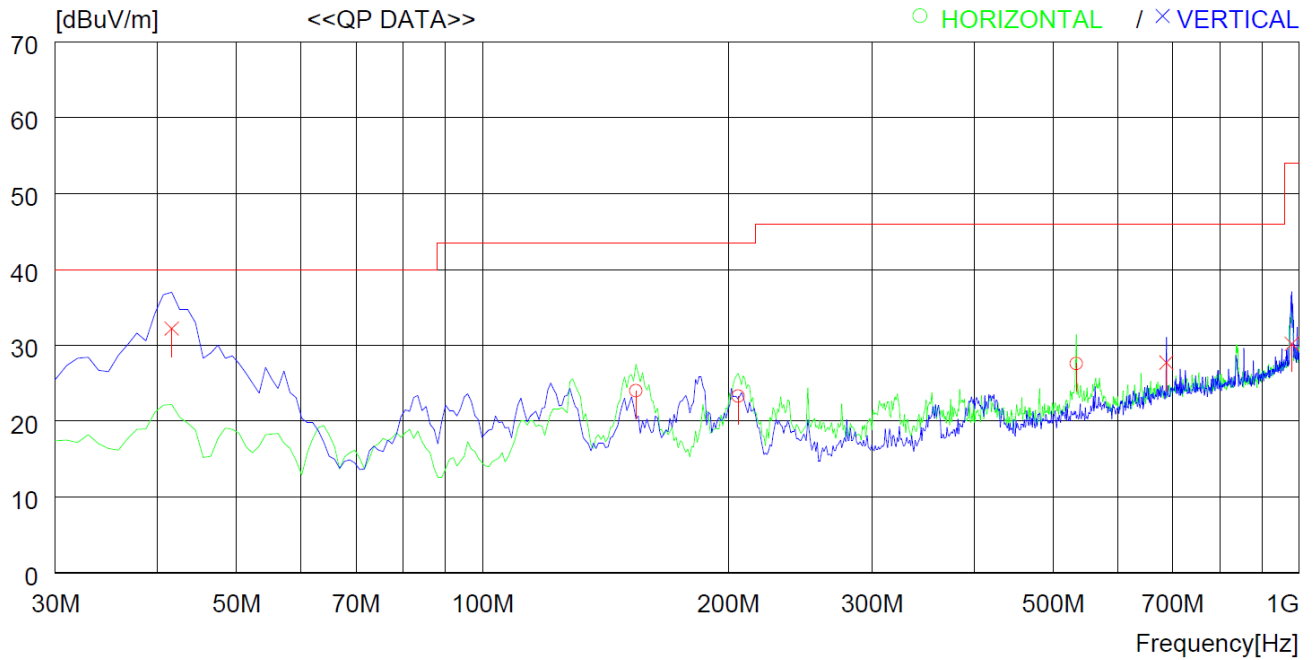

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	154.160	36.2	18.3	1.6	32.1	24.0	43.5	19.5	200	98
2	205.570	37.8	15.8	1.8	32.1	23.3	43.5	20.2	200	91
3	533.430	33.5	23.5	3.0	32.4	27.6	46.0	18.4	100	309
----- Vertical -----										
4	41.640	47.2	16.3	0.8	32.1	32.2	40.0	7.8	100	0
5	687.655	31.4	25.4	3.4	32.5	27.7	46.0	18.3	100	0
6	979.617	27.1	29.8	4.1	30.8	30.2	54.0	23.8	100	195

14.5 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.6 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

15. CONDUCTED EMISSION TEST

15.1 Operating environment

Temperature : 22 °C
Relative humidity : 41 % R.H.

15.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

15.3 Test Date


May 07, 2025 ~ June 05, 2025

15.4 Test data for Bluetooth

- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15 MHz ~ 30 MHz
- . Tested Line : HOT LINE

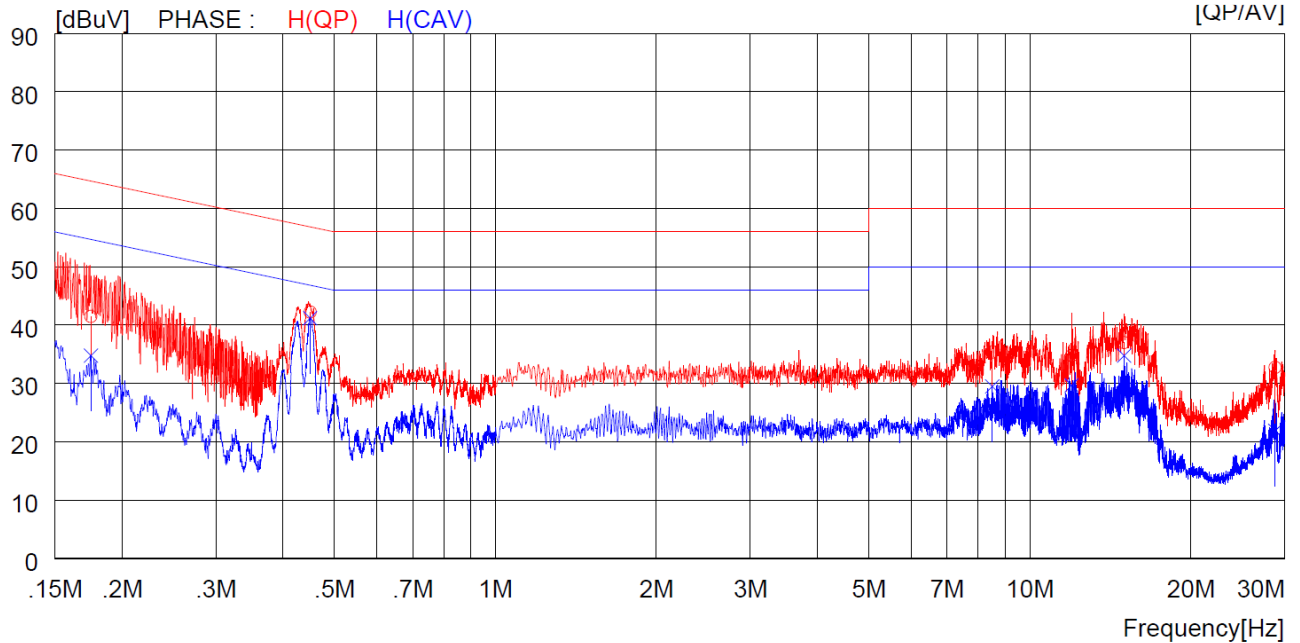

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV		
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]		
1	0.17500	31.4	----	10.1	41.5	----	64.7	----	23.2	----	H(QP)	
2	0.45000	32.1	----	10.1	42.2	----	56.9	----	14.7	----	H(QP)	
3	8.50500	24.9	----	10.5	35.4	----	60.0	----	24.6	----	H(QP)	
4	11.97000	24.1	----	10.7	34.8	----	60.0	----	25.2	----	H(QP)	
5	15.01000	26.1	----	10.9	37.0	----	60.0	----	23.0	----	H(QP)	
6	28.77000	21.2	----	11.5	32.7	----	60.0	----	27.3	----	H(QP)	
7	0.17500	----	24.7	10.1	----	34.8	----	54.7	----	19.9	H(CAV)	
8	0.45000	----	31.1	10.1	----	41.2	----	46.9	----	5.7	H(CAV)	
9	8.50500	----	19.0	10.5	----	29.5	----	50.0	----	20.5	H(CAV)	
10	11.97000	----	19.0	10.7	----	29.7	----	50.0	----	20.3	H(CAV)	
11	15.01000	----	23.9	10.9	----	34.8	----	50.0	----	15.2	H(CAV)	
12	28.77000	----	10.4	11.5	----	21.9	----	50.0	----	28.1	H(CAV)	

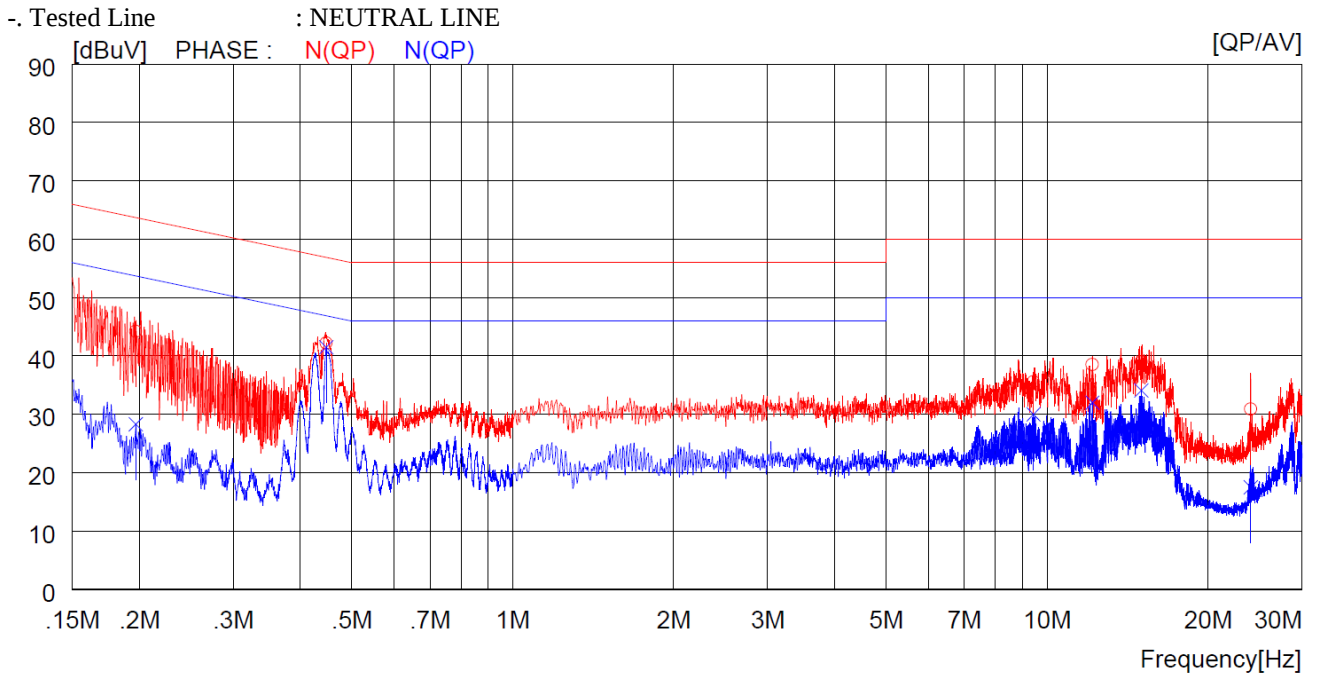

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV		
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]		
1	0.19700	34.1	----	10.1	44.2	----	63.7	----	19.5	----	N(QP)	
2	0.44800	32.1	----	10.1	42.2	----	56.9	----	14.7	----	N(QP)	
3	9.43000	25.1	----	10.5	35.6	----	60.0	----	24.4	----	N(QP)	
4	12.16000	27.8	----	10.7	38.5	----	60.0	----	21.5	----	N(QP)	
5	15.01000	28.1	----	10.9	39.0	----	60.0	----	21.0	----	N(QP)	
6	24.06000	19.5	----	11.4	30.9	----	60.0	----	29.1	----	N(QP)	
7	0.19700	----	18.2	10.1	----	28.3	----	53.7	----	25.4	N(CAV)	
8	0.44800	----	31.4	10.1	----	41.5	----	46.9	----	5.4	N(CAV)	
9	9.43000	----	19.5	10.5	----	30.0	----	50.0	----	20.0	N(CAV)	
10	12.16000	----	21.3	10.7	----	32.0	----	50.0	----	18.0	N(CAV)	
11	15.01000	----	23.2	10.9	----	34.1	----	50.0	----	15.9	N(CAV)	
12	24.06000	----	6.1	11.4	----	17.5	----	50.0	----	32.5	N(CAV)	

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

16. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSVA40	Rohde & Schwarz	Signal Analyzer	101598	Jan. 03, 2025 (1Y)
ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 05, 2025 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2024 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 04, 2024 (1Y)
SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Jan. 15, 2025 (1Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
MA-4640-XPET	Innco System	Antenna Master	MA4640/652/43100318/P	N/A
CO3000	Innco System	Controller	1026/40960617/P	N/A
FMZB 1519-60D	Schwarzbeck	Loop Antenna	00113	Jan. 07, 2025 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 09, 2024 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jun. 17, 2024 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 04, 2025 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 13, 2025 (1Y)
QFA1802-26-6-S	Qualwave	6dB Attenuator	225335	Jan. 14, 2025 (1Y)
E3632A	Agilent	DC POWER SUPPLY	MY50370016	Jan. 13, 2025 (1Y)
NRP-Z91	Rohde & Schwarz	Wideband Power Sensor	103780	Jul. 04, 2024 (1Y)
NRP-Z81	Rohde & Schwarz	Wideband Power Sensor	104811	Jan. 15, 2025 (1Y)
ESCI	Rohde & Schwarz	EMI TEST RECEIVER	101012	Sep. 26, 2024 (1Y)
NSLK8128	Schwarzbeck	AMN	8128216	Mar. 12, 2025 (1Y)
ESH3-Z2	Rohde & Schwarz	PULSE LIMITER	100655	Mar. 12, 2025 (1Y)