FCC TEST REPORT FOR 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

Digital Media Player Model No.: DMP582T

Prepared for : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD. Address : 6F, Bldg. A, 10moons Technology Park, No.6 Hechang Road,

Zhongkai High-tech Zone, Huizhou, P.R.China

Prepared By : Anbotek Compliance Laboratory Limited

Address : 1/F, 1/Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan

District, Shenzhen, 518054, China

Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : 201203809F

Date of Test : Mar. 23~Apr. 23, 2012

Date of Report : Apr. 24, 2012

TABLE OF CONTENTS

Description

Page **Test Report Verification** 1. GENERAL INFORMATION4 1.5. Test Summary 6 2. POWER LINE CONDUCTED MEASUREMENT7 2.6. Test Procedure 8 3. RADIATED EMISSION MEASUREMENT......15 4. PHOTOGRAPH.......24 4.2. Photo of Radiated Emission Test

APPENDIX I (Photos of EUT) (4 Pages)

TEST REPORT VERIFICATION

10MOONS TECHNOLOGY DEVELOPMENT CO., LTD. **Applicant** 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD. Manufacturer **EUT** Digital Media Player DMP582T Model No. Rating 12V==, 24W, 2A Trade Mark N.A. Measurement Procedure Used: FCC Rules and Regulations Part 15 Subpart B 2010 & FCC / ANSI C63.4-2009 The device described above is tested by Anbotek Compliance Laboratory Lim ited To determine the maximum emission levels em anating from the device. The m emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Lim ited Is assum ed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report applies to above tested sam ple only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited Date of Test: Mar. 23~Apr. 23, 2012 Prepared by: (Engineer / Andy Chen) Reviewer: (Project Manager / Jerry Du) Approved & Authorized Signer: Menny. Jung

(Manager / Henry Yang)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Digital Media Player

Model Number : DMP582T

Test Power Supply : 120V~, 60Hz for Adapter

Switching Adapter : Input: 100~240V~, 50/60Hz

Output: 12V==, 2.0A

UL, FCC

Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO.,

LTD.

Address : 6F, Bldg. A, 10moons Technology Park, No.6 Hechang

Road, Zhongkai High-tech Zone, Huizhou, P.R.China

Manufacturer : 10MOONS TECHNOLOGY DEVELOPMENT CO.,

LTD.

Address : 6F, Bldg. A, 10moons Technology Park, No.6 Hechang

Road, Zhongkai High-tech Zone, Huizhou, P.R.China

Date of Sample received: Mar. 23, 2012

Date of Test : Mar. 23~Apr. 23, 2012

1.2. Auxiliary Equipment Used during Test

PC Manufacturer: IBM

M/N: 2373 S/N: 2373

RATING: 16V==-, 4.5A

CE, FCC

MOUSE : Manufacturer: DELL

M/N: M-UARDEL7

S/N: N/A

CE, FCC: DOC

Earphone : Manufacturer: Ouyun

M/N: OH601 S/N: N/A

CE, FCC: DOC

SD card Manufacturer: Kingston

M/N: SD4/4GBFE

S/N: N/A

CE, FCC: DOC

USB Cable : 0.5m, SHIELD

Monitor Lenovo

MODEL NO.: X61 S/N: L3-L3729 08/03

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed w ith the (FCC) Federal Com munications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is m aintained in our files. Registration 8058A-1, August 30, 2010

Test Location

All Emissions tests were performed

Anbotek Compliance Laboratory Limited. at 1/F, 1/Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3 dB

Conduction Uncertainty : Uc = 3.4dB

1.5. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions.

Table 1: Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Power Line Conducted Emission Test (150KHz To 30MHz)	\checkmark
FCC Part 15 Subpart B	Radiated Emission Test	$\sqrt{}$
	(30MHz To 1000MHz)	

- $\sqrt{}$ Indicates that the test is applicable
- x Indicates that the test is not applicable

2. POWER LINE CONDUCTED MEASUREMENT


2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Apr. 25, 2012	1 Year
2.	Two-Line	Rohde & Schwarz	ENV216	10055	Apr. 25, 2012	1 Year
	V-network					
3.	RF Switching	Compliance	RSU-M2	38303	Apr. 25, 2012	1 Year
	Unit	Direction				
4.	EMI Test	ES-K1	N/A	N/A	N/A N/A	_
	Software					

2.2. Block Diagram of Test Setup


- 2.2.1. Block diagram of connection between the EUT and simulators
 - 2.1.1.1. Hard Disk Playing Mode, constant audio/video stream (max. resolutions)

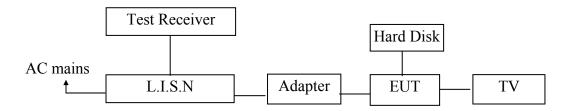

2.1.1.2. USB Playing Mode, constant audio/video stream (max. resolutions)

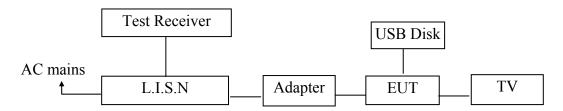

2.1.1.3. Connect to PC Mode, constant audio/video stream (max. resolutions)

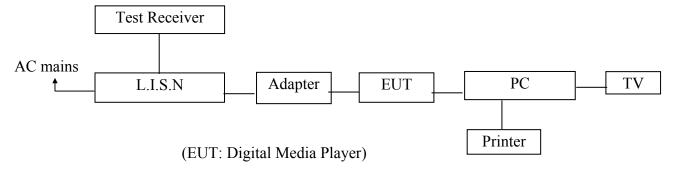

2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Subpart B Class B)

Frequency	Limits $dB(\mu V)$				
MHz	Quasi-peak Level	Average Level			
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*			
0.50 ~ 5.00	56	46			
5.00 ~ 30.00	60	50			

Notes: 1. *Decreasing linearly with logarithm of frequency.

2.3.1. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Digital Media Player

Model Number : DMP582T

Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 500hm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

The test curves are shown in the following pages.

EUT: Digital Media Player M/N: DMP582T

Operating Condition: Hard Disk Playing
Test Site: 1# Shielded Room

Operator: Andy Chen


Test Specification: 120V~, 60Hz for Adapter

Comment: Live Line

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

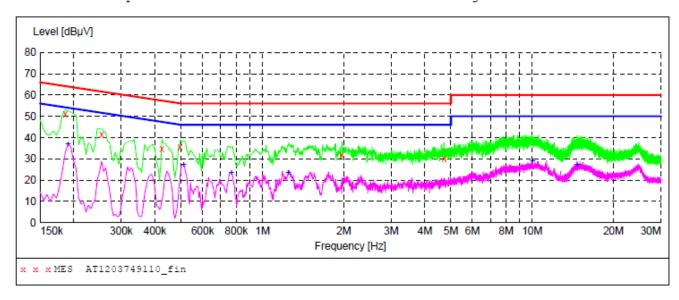

MEASUREMENT RESULT: "AT1203749110_fin"

3	3/26/2012 7:1	L3PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.186000	51.20	10.1	64	13.0	QP	L1	GND
	0.253500	41.40	10.1	62	20.2	QP	L1	GND
	0.424500	34.60	10.1	57	22.8	QP	L1	GND
	0.496500	35.40	10.1	56	20.7	QP	L1	GND
	1.972000	31.80	10.3	56	24.2	QP	L1	GND
	4.708000	30.20	10.5	56	25.8	QP	L1	GND

MEASUREMENT RESULT: "AT1203749110 fin2"

3/26/2012 Frequenc MH	y Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.19050	0 36.80	10.1	54	17.2	AV	L1	GND
0.51000	0 27.00	10.1	46	19.0	AV	ь1	GND
0.76650	0 23.40	10.1	46	22.6	AV	L1	GND
1.24750	0 23.30	10.2	46	22.7	AV	L1	GND
10.02700	0 28.90	10.6	50	21.1	AV	L1	GND
14.65750	0 27.00	10.7	50	23.0	AV	L1	GND

EUT: Digital Media Player M/N: DMP582T

Operating Condition: Hard Disk Playing
Test Site: 1# Shielded Room

Operator: Andy Chen


Test Specification: 120V~, 60Hz for Adapter

Comment: Neutral Line

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

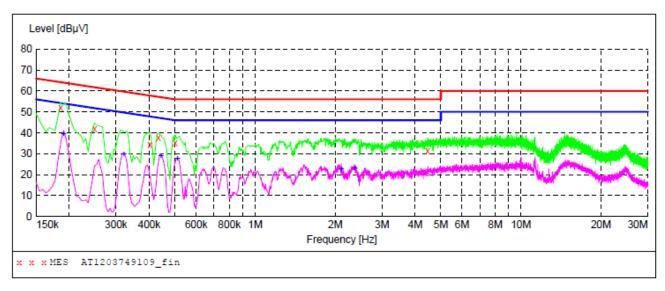

MEASUREMENT RESULT: "AT1203749109_fin"

3/26/2012 7	:10PM						
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	51.90	10.1	64	12.3	QP	N	GND
0.249000	41.90	10.1	62	19.9	QP	N	GND
0.402000	34.50	10.1	58	23.3	QP	N	GND
0.433500	37.90	10.1	57	19.3	QP	N	GND
0.501000	35.00	10.1	56	21.0	QP	N	GND
4.451500	31.60	10.5	56	24.4	QP	N	GND

MEASUREMENT RESULT: "AT1203749109_fin2"

3/26/2012 7:1 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	39.30	10.1	54	14.7	AV	N	GND
0.321000	29.90	10.1	50	19.8	AV	N	GND
0.442500	28.90	10.1	47	18.1	AV	N	GND
0.510000	27.40	10.1	46	18.6	AV	N	GND
2.107000	22.70	10.3	46	23.3	AV	N	GND
2.368000	22.80	10.3	46	23.2	AV	N	GND

EUT: Digital Media Player M/N: DMP582T

Operating Condition: USB Playing
Test Site: 1# Shielded Room

Operator: Andy Chen


Test Specification: 120V~, 60Hz for Adapter

Comment: Live Line

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

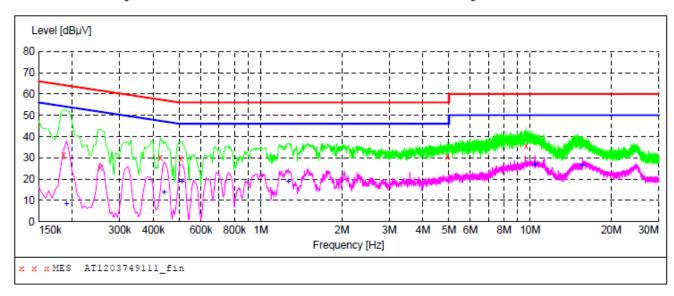

MEASUREMENT RESULT: "AT1203749111_fin"

3,	/26/2012 7:1							
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.186000	31.20	10.1	64	33.0	QP	L1	GND
	0.253500	25.30	10.1	62	36.3	QP	L1	GND
	0.424500	30.30	10.1	57	27.1	QP	L1	GND
	0.505500	29.50	10.1	56	26.5	QP	L1	GND
	4.928500	30.70	10.5	56	25.3	QP	L1	GND
	9.658000	35.70	10.6	60	24.3	QP	L1	GND

MEASUREMENT RESULT: "AT1203749111_fin2"

3/26/2012 7:1 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	8.40	10.1	54	45.6	AV	L1	GND
0.438000	13.90	10.1	47	33.2	AV	L1	GND
0.510000	18.70	10.1	46	27.3	AV	L1	GND
1.265500	18.70	10.2	46	27.3	AV	L1	GND
10.427500	26.90	10.6	50	23.1	AV	ь1	GND
15.652000	26.20	10.7	50	23.8	AV	L1	GND

EUT: Digital Media Player M/N: DMP582T

Operating Condition: USB Playing
Test Site: 1# Shielded Room

Operator: Andy Chen


Test Specification: 120V~, 60Hz for Adapter

Comment: Neutral Line

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

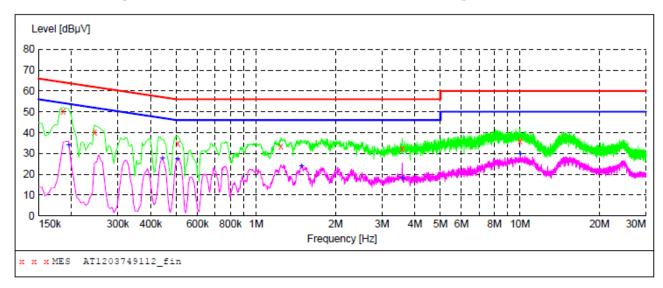

MEASUREMENT RESULT: "AT1203749112 fin"

3/26/2012 7:1 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	50.40	10.1	64	13.8	QP	N	GND
0.244500	40.40	10.1	62	21.5	QP	N	GND
0.505500	34.60	10.1	56	21.4	QP	N	GND
1.243000	33.60	10.2	56	22.4	QP	N	GND
3.578500	32.30	10.4	56	23.7	QP	N	GND
10.018000	36.00	10.6	60	24.0	QP	N	GND

MEASUREMENT RESULT: "AT1203749112 fin2"

3/26/2012 7	:19PM						
Frequency			Limit	_	Detector	Line	PE
MHz	dBµ∇	dB	dΒμ∇	dB			
0 105000	22.00	10 1	ΕA	20.0	3.77		CNID
0.195000		10.1	54	20.0		N	GND
0.442500	27.40	10.1	47	19.6	AV	N	GND
0.505500	27.20	10.1	46	18.8	AV	N	GND
1.486000	23.80	10.3	46	22.2	AV	N	GND
3.578500	18.00	10.4	46	28.0	AV	N	GND
10.022500	29.70	10.6	50	20.3	AV	N	GND

EUT: Digital Media Player M/N: DMP582T

Operating Condition: Connect to PC
Test Site: 1# Shielded Room

Operator: Andy Chen


Test Specification: 120V~, 60Hz for Adapter

Comment: Live Line

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

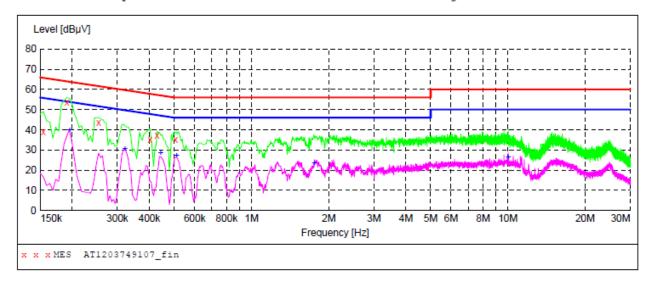

MEASUREMENT RESULT: "AT1203749107_fin"

3,	/26/2012 7:0	1PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.154500	38.90	10.1	66	26.9	QP	L1	GND
	0.190500	53.60	10.1	64	10.4	QP	L1	GND
	0.253500	43.40	10.1	62	18.2	QP	L1	GND
	0.402000	35.20	10.1	58	22.6	QP	L1	GND
	0.429000	37.30	10.1	57	20.0	QP	L1	GND
	0.505500	35.30	10.1	56	20.7	QP	ь1	GND

MEASUREMENT RESULT: "AT1203749107_fin2"

3/26/2012	7:01PM						
Frequen Mi	cy Level Hz dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.1950	00 39.70	10.1	54	14.1	AV	L1	GND
0.3210	00 30.60	10.1	50	19.1	AV	L1	GND
0.4425	00 28.30	10.1	47	18.7	AV	L1	GND
0.5100	00 27.00	10.1	46	19.0	AV	L1	GND
1.7605	00 23.40	10.3	46	22.6	AV	L1	GND
10.0360	00 26.40	10.6	50	23.6	AV	L1	GND

EUT: Digital Media Player M/N: DMP582T

Connect to PC Operating Condition: Test Site: 1# Shielded Room


Operator: Andy Chen

Test Specification: 120V~, 60Hz for Adapter

Comment: **Neutral Line**

Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"
Short Description: 150K-30M Disturbance Voltages

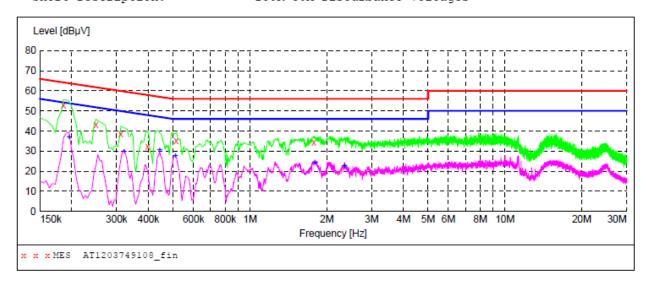

MEASUREMENT RESULT: "AT1203749108_fin"

3/26/2012 7	:04PM						
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	52.90	10.1	64	11.3	QP	N	GND
0.249000	43.30	10.1	62	18.5	QP	N	GND
0.312000	38.60	10.1	60	21.3	QP	N	GND
0.397500	32.40	10.1	58	25.5	QP	N	GND
0.514500	35.20	10.1	56	20.8	QP	N	GND
1.778500	34.50	10.3	56	21.5	QP	N	GND

MEASUREMENT RESULT: "AT1203749108 fin2"

3,	/26/2012 7:0 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.195000	36.70	10.1	54	17.1	AV	N	GND
	0.321000	29.60	10.1	50	20.1	AV	N	GND
	0.442500	30.50	10.1	47	16.5	AV	N	GND
	0.510000	27.60	10.1	46	18.4	AV	N	GND
	1.796500	24.40	10.3	46	21.6	AV	N	GND
	2.350000	22.60	10.3	46	23.4	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber


Item	Equipment Manufacturer		Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI 100627		Apr. 25, 2012	1 Year
2.	Bilog Broadband	Broadband Schwarzbeck		100015	Apr. 25, 2012	1 Year
	Antenna					
3.	RF Switching Unit	Compliance	RSU-M2	38303	Apr. 25, 2012	1 Year
		Direction				
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A

3.2. Block Diagram of Test Setup


- 3.2.1. Block diagram of connection between the EUT and simulators
- 3.1.1.1. Hard Disk Playing Mode

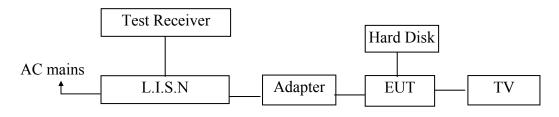

3.1.1.2. USB Playing Mode

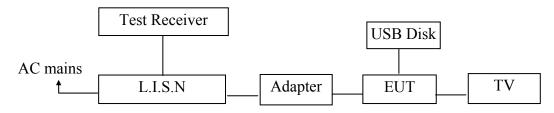


3.1.1.3. Connect to PC Mode

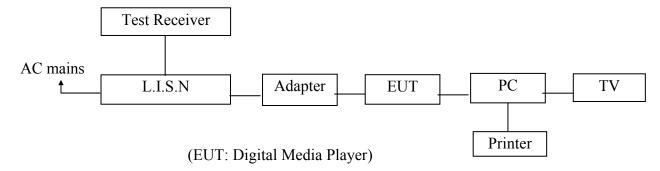

3.2.2. Anechoic Chamber Test Setup Diagram

ANTENNA TOWER

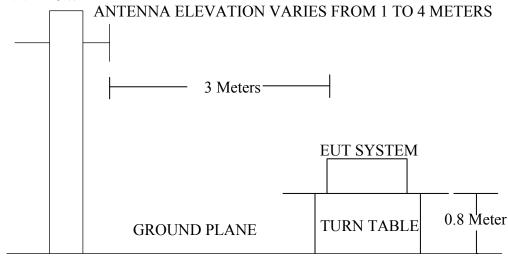

(EUT: Digital Photo Frame)

3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT			
MHz	Meters	μV/m	dB(μV)/m		
30~88	3	100	40.0		
88~216	3	150	43.5		
216~960	3	200	46.0		
960~1000	3	500	54.0		

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m

- (2) The sm aller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : Digital Media Player

Model Number : DMP582T

Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown in Section 3.2.
- 3.5.2. Let the EUT work and measure it.

3.6. Test Procedure

EUT and its sim ulators are placed on a turn table, which is 0.8 m eter high above ground. The turn table can rotate 360 degrees to determ ine the position of the

maximum emission level. EUT is set 3.0 m eters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be m oved up and down between 1.0 m eter and 4 m eters to find out the m aximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESCI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test is tested in chamber and all the test results are listed in Section 3.7.

3.7. Radiated Emission Measurement Results

PASS.

The test curves are shown in the following pages.



1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

Polarziation:

Date:

Time:

Test By:

Power Source:

Horizontal

15:36:05

3m


Andy Chen

120V~, 60Hz 2012/04/22

Job No.: AT1203749F Standard: (RE)FCC PART15 B _3m

Test item: Radiation Test
Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
EUT: Digital Media Player

Model: DMP582T Distance:

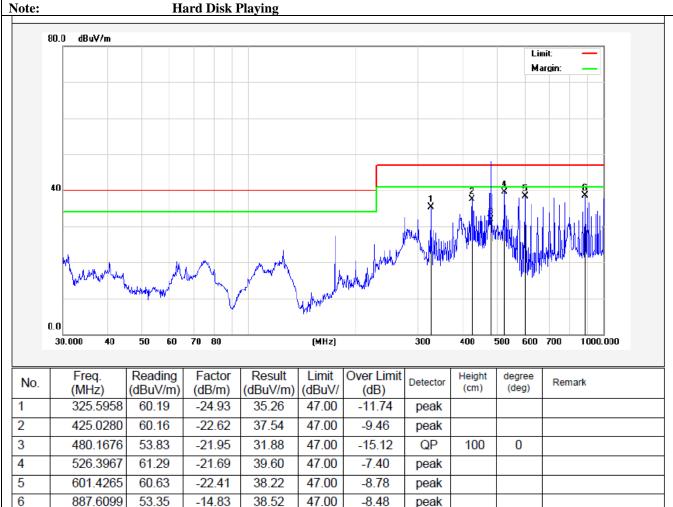



1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

AT1203749F Job No.: **Polarziation:** Vertical Standard: (RE)FCC PART15 B _3m **Power Source:** 120V~, 60Hz 2012/04/22 Test item: **Radiation Test** Date: 15:42:28 24.3(C)/55%RH Time: **EUT:** Digital Media Player Test By: **Andy Chen**





1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

Job No.: AT1203749F **Polarziation:** Horizontal Standard: (RE)FCC PART15 B _3m **Power Source:** 120V~, 60Hz 2012/04/22 Test item: **Radiation Test** Date: 24.3(C)/55%RH 15:48:02 Temp.(C)/Hum.(%RH): Time: **EUT:** Digital Media Player Test By: **Andy Chen** Model: **DMP582T Distance:** 3m

Note: USB Playing

887.6099

6

53.35


-14.83

38.52

47.00

-8.48

peak

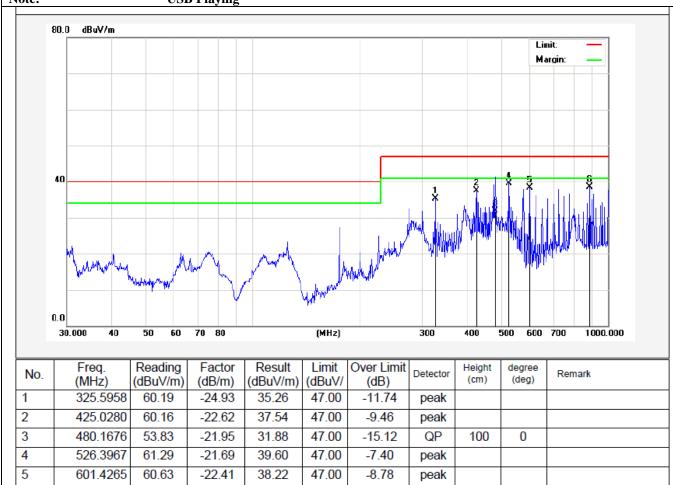




1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

Job No.: AT1203749F **Polarziation:** Vertical Standard: (RE)FCC PART15 B _3m **Power Source:** 120V~, 60Hz Test item: 2012/04/22 **Radiation Test** Date: 15:53:40 Time: Temp.(C)/Hum.(%RH): 24.3(C)/55%RH **EUT:** Digital Media Player Test By: **Andy Chen**

Model: **DMP582T Distance:** 3m

Note: **USB Playing**

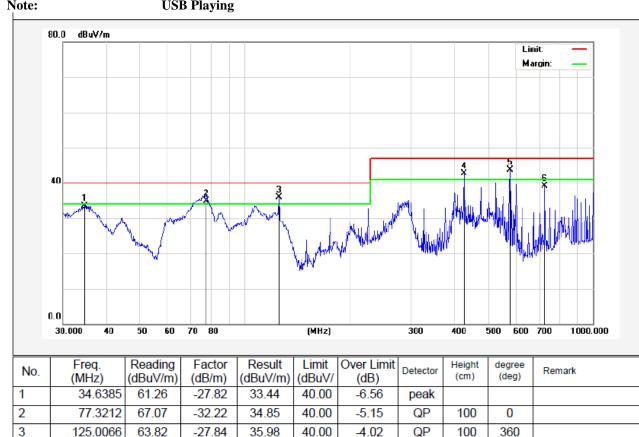

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.6385	61.26	-27.82	33.44	40.00	-6.56	peak			
2	77.3212	67.07	-32.22	34.85	40.00	-5.15	QP	100	0	
3	125.0066	63.82	-27.84	35.98	40.00	-4.02	QP	100	360	
4	425.0280	64.27	-21.54	42.73	47.00	-4.27	QP	100	0	
5	576.6443	64.41	-20.69	43.72	47.00	-3.28	QP	100	360	
6	726.8052	56.67	-17.50	39.17	47.00	-7.83	peak			




1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

Job No.: AT1203749F **Polarziation:** Horizontal Standard: (RE)FCC PART15 B _3m **Power Source:** 120V~, 60Hz 2012/04/22 Test item: **Radiation Test** Date: Temp.(C)/Hum.(%RH): 24.3(C)/55%RH Time: 15:58:18 **EUT:** Digital Media Player Test By: **Andy Chen** Model: **DMP582T Distance:** 3m

Note: Connect to PC

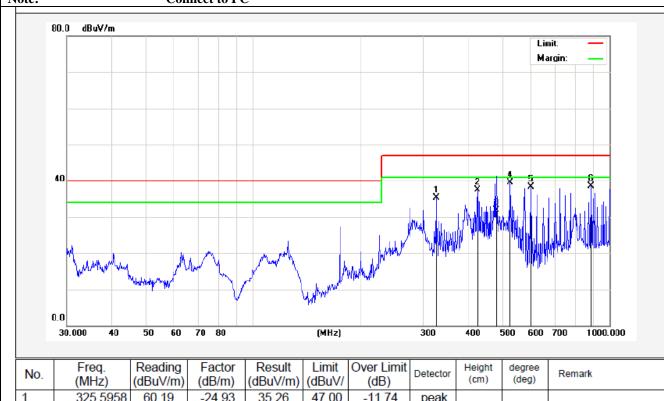

No	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)		Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	325.5958	60.19	-24.93	35.26	47.00	-11.74	peak			
2	425.0280	60.16	-22.62	37.54	47.00	-9.46	peak			
3	480.1676	53.83	-21.95	31.88	47.00	-15.12	QP	100	0	
4	526.3967	61.29	-21.69	39.60	47.00	-7.40	peak			
5	601.4265	60.63	-22.41	38.22	47.00	-8.78	peak			
6	887.6099	53.35	-14.83	38.52	47.00	-8.48	peak			



1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771 Fax: (86)755-26014772 Http://www.anbotek.com

AT1203749F Job No.: **Polarziation:** Vertical Standard: (RE)FCC PART15 B _3m **Power Source:** 120V~, 60Hz 2012/04/22 Test item: Date: **Radiation Test** 16:02:42 24.3(C)/55%RH Time: Temp.(C)/Hum.(%RH): **EUT:** Digital Media Player Test By: **Andy Chen**

