



Willow Run Test Labs, LLC
 8501 Beck Road, Building 2227
 Belleville, Michigan 48111 USA
 Tel: (734) 252 9785
 Fax: (734) 926 9785
 e-mail: info@wrtest.com

Testing of
Electromagnetic Emissions
 per

USA: CFR Title 47, Part 15.247
Canada: RSS-210 and RSS-GEN

are herein reported for


Perceptron, Inc.
BK8000-TX

Test Report No.: 20111215-01r1
 Copyright © 2012


Applicant/Provider:
 Perceptron, Inc.

47827 Halyard Drive, Plymouth Michigan 48170-2461 USA
 Phone: +1 (734) 414-4607, Fax: +1 (734) 414-4607
 Contact Person: Jeff Schober; jschober@perceptron.com


Measured by:


 Dr. Joseph Brunett, EMC-002790-NE

Report Approved by:


 Dr. Joseph Brunett, EMC-002790-NE

Report by:


 Dr. Joseph Brunett, EMC-002790-NE

Report Date of Issue:

February 2, 2012

Results of equipment under test (EUT) testing completed before February 2, 2012 are as follows.

Emissions The transmitter fundamental emission meets the regulatory limit(s) by no less than 30.1 dB. Transmit chain spurious harmonic emissions comply by no less than 7.4 dB. Radiated spurious emissions associated with the receive chain of this device meet the regulatory limit(s) by no less than 4.4 dB. Unintentional spurious emissions from digital circuitry comply with the radiated emission limit(s) by more than 4.2 dB. AC Power Line conducted emissions comply by more than 1.2 dB.

Contents

| | |
|---|----------|
| 1 Test Specifications, General Procedures, and Location | 4 |
| 1.1 Test Specification and General Procedures | 4 |
| 1.2 Test Location and Equipment Used | 5 |
| 2 Configuration and Identification of the Equipment Under Test | 6 |
| 2.1 Description and Declarations | 6 |
| 2.1.1 EUT Configuration | 6 |
| 2.1.2 Modes of Operation | 6 |
| 2.1.3 Variants | 6 |
| 2.1.4 Test Samples | 7 |
| 2.1.5 Functional Exerciser | 7 |
| 2.1.6 Modifications Made | 7 |
| 2.1.7 Production Intent | 8 |
| 2.1.8 Declared Exemptions and Additional Product Notes | 8 |
| 3 Emissions | 9 |
| 3.1 General Test Procedures | 9 |
| 3.1.1 Radiated Test Setup and Procedures | 9 |
| 3.1.2 Conducted Test Setup and Procedures | 11 |
| 3.1.3 Power Supply Variation | 11 |
| 3.1.4 Thermal Variation | 11 |
| 3.2 Intentional Emissions | 13 |
| 3.2.1 Fundamental Emission Bandwidth | 13 |
| 3.2.2 Effective Isotropic Radiated Power | 14 |
| 3.2.3 Power Spectral Density | 16 |
| 3.3 Unintentional Emissions | 17 |
| 3.3.1 Transmit Chain Spurious Emissions | 17 |
| 3.3.2 Radiated Receiver Spurious | 19 |
| 3.3.3 Radiated Digital Spurious | 20 |
| 3.3.4 Conducted Emissions Test Results - AC Power Port(s) | 21 |

List of Tables

| | |
|--|----|
| 1 Willow Run Test Labs, LLC Equipment List. | 5 |
| 2 EUT Declarations. | 7 |
| 3 Intentional Emission Bandwidth. | 13 |
| 4 Effective Isotropic Radiated Power Results. | 14 |
| 5 Power Spectral Density Results. | 16 |
| 6 Transmit Chain Spurious Emissions. | 17 |
| 6 Transmit Chain Spurious Emissions. | 18 |
| 7 Receiver Chain Spurious Emissions \geq 30 MHz. | 19 |
| 8 Radiated Digital Spurious Emissions. | 20 |
| 9 AC Mains Power Conducted Emissions Results. | 21 |

List of Figures

| | |
|---|----|
| 1 Photographs of the EUT. | 6 |
| 2 EUT Test Configuration Diagram. | 7 |
| 3 Radiated Emissions Diagram of the EUT. | 9 |
| 4 Radiated Emissions Test Setup Photograph(s). | 10 |
| 5 Conducted Emissions Setup Diagram of the EUT. | 11 |
| 6 Conducted Emissions Test Setup Photograph(s). | 12 |

| | | |
|---|---|----|
| 7 | Intentional Emission Bandwidth. | 13 |
| 8 | Effective Isotropic Radiated Power Example Plots. | 15 |
| 9 | Power Spectral Density Plots. | 16 |

1 Test Specifications, General Procedures, and Location

1.1 Test Specification and General Procedures

The ultimate goal of Perceptron, Inc. is to demonstrate that the EUT complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Perceptron, Inc. BK8000-TX for compliance to:

| Country/Region | Rules or Directive | Referenced Section(s) |
|---|--|---------------------------|
| United States | Code of Federal Regulations | CFR Title 47, Part 15.247 |
| Canada | Industry Canada | RSS-210 and RSS-GEN |
| In association with the rules and directives outlined above, the following specifications and procedures are followed herein. | | |
| ANSI C63.4-2003 | "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" | |
| FCC KDB 558074 | "Measurement of Digital Transmission Systems Operating under Section 15.247" | |
| FCC KDB 913591 | "Measurement of radiated emissions at the edge of the band for a Part 15 RF Device" | |
| Industry Canada | "The Measurement of Occupied Bandwidth" | |

1.2 Test Location and Equipment Used

Test Location The EUT was fully tested at **Willow Run Test Labs, LLC**, 8501 Beck Road, Building 2227, Belleville, Michigan 48111 USA. The **Open Area Test Site (OATS)** description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with Industry Canada, Ottawa, ON (File Ref. No: IC 8719A-1).

Test Equipment Pertinent test equipment used for measurements at this facility is listed in Table 1. The quality system employed at Willow Run Test Labs, LLC has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 1: Willow Run Test Labs, LLC Equipment List.

| Description | Manufacturer/Model | SN | Quality Number | Last Cal By / Date Due |
|--|--------------------|------------|--------------------|--------------------------|
| Antennas | | | | |
| Shielded Loop (9 kHz - 50 MHz) | EMCO/6502 | 2855 | UMLOOP1 | UMRL / July-2012 |
| Dipole Set (20 MHz - 1000 MHz) | EMCO/3121C | 9504-1121 | DIPEMC001 | Liberty Labs / Sept-2012 |
| Bicone (20 MHz - 250 MHz) | JEF | 1 | BICJEF001 | UMRL / July-2012 |
| Bicone (200 MHz - 1000 MHz) | JEF | 1 | SBICJEF001 | UMRL / July-2012 |
| Log-Periodic Array (200 MHz - 1000 MHz) | JEF/Isbell | 1 | LOGJEF001 | UMRL / July-2012 |
| Ridge-Horn Antenna | Univ. of Michigan | 5 | UMHORN005 | UMRL / July-2012 |
| L-Band | JEF | | HRNL001 | JEF / July-2012* |
| LS-Band Horns | JEF/NRL | 001, 002 | HRN15001, HRN15002 | JEF / July-2012* |
| S-Band Horns | Scientific-Atlanta | 1854 | HRNSB001 | JEF / July-2012* |
| C-Band | JEF/NRL | 1 | HRNC001 | JEF / July-2012* |
| XN-Band Horns | JEF/NRL | 001, 002 | HRNXN001, HRNXN002 | JEF / July-2012* |
| X-Band Horns | JEF/NRL | 001, 002 | HRNXB001, HRNXB002 | JEF / July-2012* |
| Ku-Band Horns | JEF/NRL | 001, 002 | HRNKU001, HRNKU002 | JEF / July-2012* |
| Ka-Band Horns | JEF/NRL | 001, 002 | HRNKA001, HRNKA002 | JEF / July-2012* |
| Receiver's / Spectrum Analyzers | | | | |
| Spectrum Analyzer | HP/8593E | 3649A02722 | HP8593E001 | DTI / Sept-2012 |
| Signal Generators | | | | |
| Tracking Generator | HP/8593E | 3649A02722 | HP8593E001 | DTI / Sept-2012 |
| Line Impedance Stabilization Networks | | | | |
| LISN | EMCO | 9304-2081 | LISNEM001 | JEF / Jan-2012 |

* Verification Only - Standard Gain Horn Antennas

2 Configuration and Identification of the Equipment Under Test

2.1 Description and Declarations

The EUT is a 2.4 GHz Digital Spread Spectrum commercial video transmitter with camera snake. The equipment under test (EUT) is approximately 13 x 7 x 4 cm (without camera) in dimension, and is depicted in Figure 1. It is powered by a 3.7 VDC internal rechargeable battery. This device is envisioned to be a commercial digitized video transmitter used in conjunction with the BK8000-RX commercial video receiver to aid in the inspection of combustion engines, braking systems, etc... Table 2 outlines provider declared EUT specifications.



Figure 1: Photographs of the EUT.

2.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

2.1.2 Modes of Operation

In normal use there is only a single mode of operation as an DSS video transmitter at fixed data rate, as tested. For testing, the radio was placed into the maximum possible (continuous) data rate and maximum power setting using custom software provided by the radio manufacturer.

2.1.3 Variants

There is only a single variant of the EUT, as tested.

Table 2: EUT Declarations.

| General Declarations | | | |
|----------------------|-----------------------|---------------------|--|
| Equipment Type: | DSS Video Transmitter | Country of Origin: | US |
| Nominal Supply: | 3.7 VDC | Oper. Temp Range: | -20° C to +55° C |
| Frequency Range: | 2412-2472 MHz | Antenna Dimension: | Integral |
| Antenna Type: | Chip | Antenna Gain: | 0 dBi (declared) |
| Number of Channels: | 4 | Channel Spacing: | 20 MHz |
| Alignment Range: | N/A | Type of Modulation: | OFDM |
| United States | | | |
| FCC ID Number: | Z34-BK8000-TX | Classification: | DSS |
| Canada | | | |
| IC Number: | 9935A-BK8000TX | Classification: | Spread Spectrum Device, Digital Device |

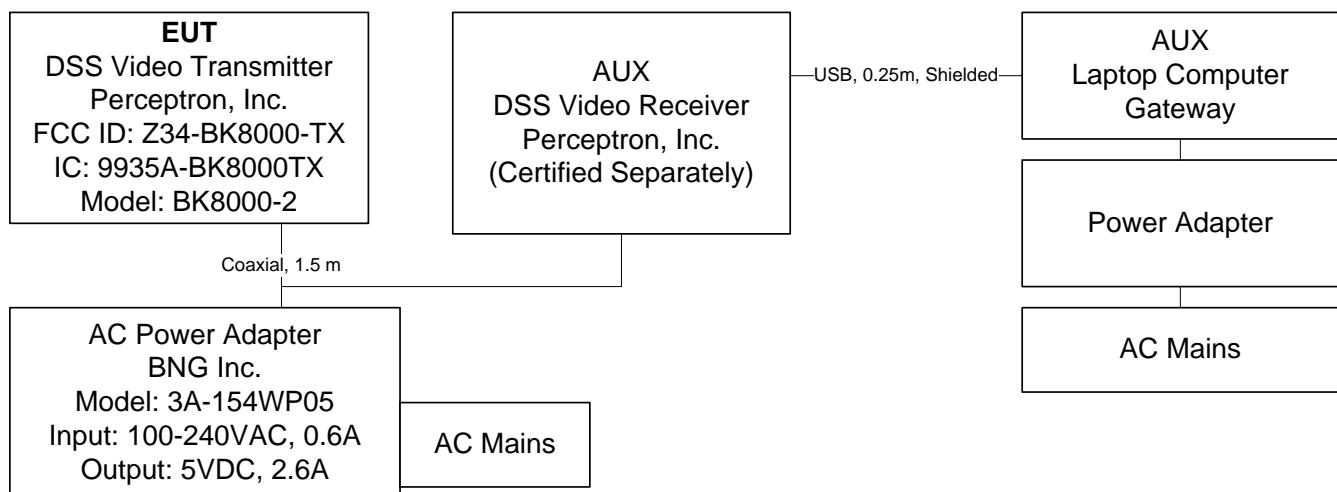


Figure 2: EUT Test Configuration Diagram.

2.1.4 Test Samples

The testing laboratory was supplied with one normal operating BK8000-RX and BK8000-TX (certified separately) pair, and one pair of the same units with custom software used to force the DSS radio into continuous transmit mode on low, middle, and high channels across the 2400-2483.5 MHz band at maximum possible data rate. (Note that the EUT does not employ a range of data rates or port configurations typically permitted by the 802.11n radio chipset employed. It utilizes only a single-stream fixed data rate (as tested). Radio parameters cannot be adjusted by the end user.)

2.1.5 Functional Exerciser

Not Applicable.

2.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory. The continuous transmit mode sample was modified by the manufacturer after testing to confirm conducted power output level at the radio.

2.1.7 Production Intent

The EUT appears to a production ready sample.

2.1.8 Declared Exemptions and Additional Product Notes

The EUT employs only a single-stream fixed data rate communication on 4 user selectable channels (2412 MHz, 2432 MHz, 2452 MHz, and 2472 MHz). The radio parameters cannot be adjusted by the end user and the EUT communicates only with its associated BK8000-RX receiver.

In addition, this is an expensive product sold through distribution channels via the Snap-on franchisee network, which consists of trucks that serve the automotive repair industry. As such is subject to digital emissions regulation as a Class A commercial product. The manufacturer states that it will not be sold for use by the general public.

Please also note, the EUT does not employ an antenna connector and all emissions compliance is demonstrated via measurement of radiated emissions. However, due to the low power level observed in radiated emissions at the fundamental, the EUT was modified after testing was complete to directly measure the radio output power. This conducted measurement is included in this test report.

3 Emissions

3.1 General Test Procedures

3.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first evaluated in our shielded fully anechoic chamber. Spectrum and modulation characteristics of all emissions are recorded, and emissions above 1 GHz are fully characterized. The anechoic chamber contains a set-up similar to that of our outdoor 3-meter site, with a turntable and antenna mast. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.2 are employed. After indoor pre-scans, emission measurements up to 1 GHz are made on our outdoor 3-meter Open Area Test Site (OATS). If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 / CISPR 22 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3.

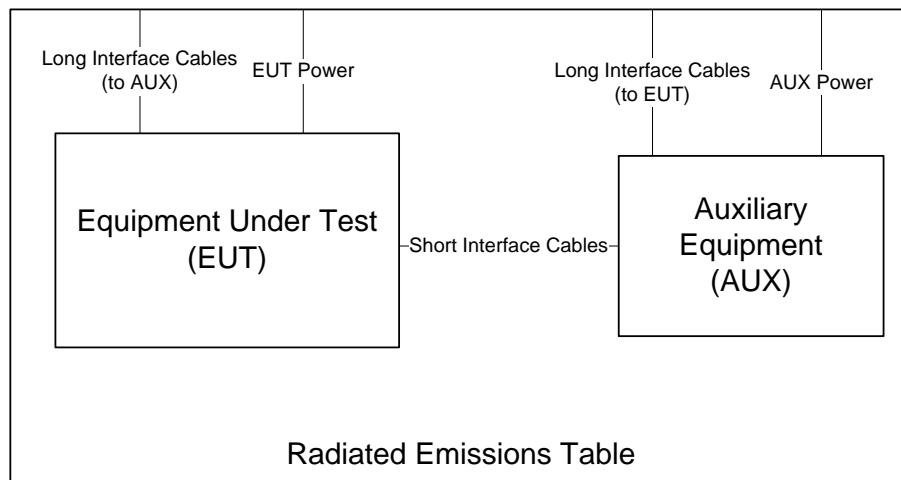


Figure 3: Radiated Emissions Diagram of the EUT.

All intentionally radiating elements are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Photographs of the test setup employed are depicted in Figure 4.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used as the test antenna. It is placed at a 1 meter receive height and appropriate low frequency magnetic field extrapolation to the regulatory limit distance is employed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dB μ V/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is compute, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.



Figure 4: Radiated Emissions Test Setup Photograph(s).

3.1.2 Conducted Test Setup and Procedures

AC Port Conducted Spurious For this device, AC power line conducted emissions are measured in our screen room. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 / CISPR 22 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 5. Conducted

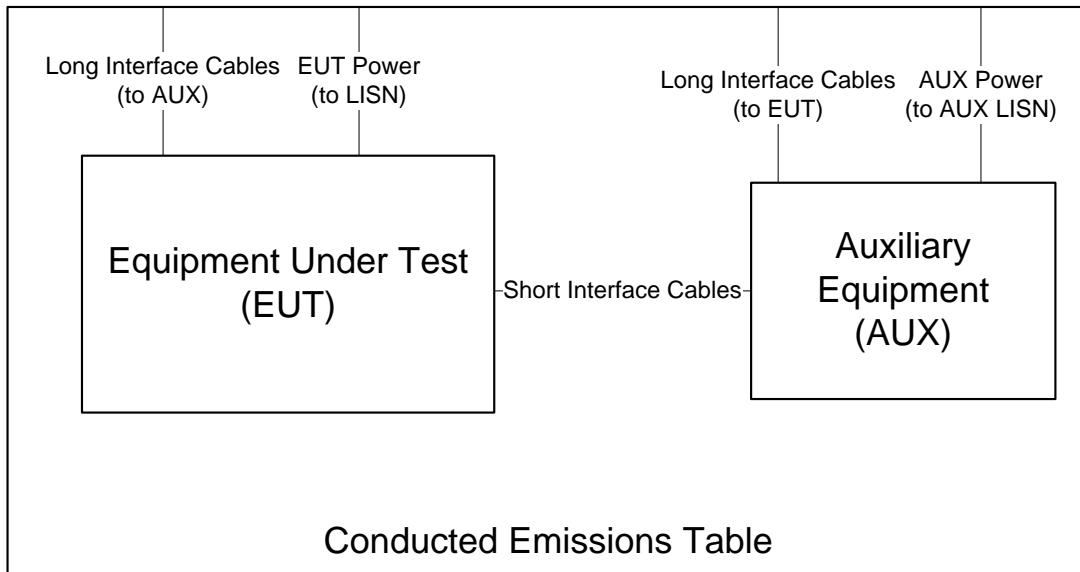


Figure 5: Conducted Emissions Setup Diagram of the EUT.

emissions are measured and recorded for each AC mains power source over the spectrum 0.15 MHz to 30 MHz for both the ungrounded (HI/PHASE) and grounded (LO/GRND) conductors with the EUT placed in its highest current draw operating mode(s). The test receiver is set to peak-hold mode in order to record the peak emissions throughout the course of functional operation. Only if an emission exceeds or is near the limit are quasi-peak and average detection applied. Photographs of the test setup employed are depicted in Figure 6.

Battery Power Conducted Spurious The EUT is not subject to power line conducted emissions measurements when it is powered solely by its internal battery.

3.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case of this EUT, measurements of the worst-case radiated emissions are performed with the supply voltage varied by no less than 85% and 115% of the nominal rated value for devices connecting to AC power mains.

In the case the EUT is designed for operation from a lead-acid battery power source, the extreme test voltages are evaluated between 90% and 130% of the nominal battery voltage declared by the manufacturer. For float charge applications using gel-cell type batteries, extreme test voltages are evaluated between 85% and 115% of the nominal battery voltage declared. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

3.1.4 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report. The provider has declared that the EUT is designed for operation over the temperature range -20° C to $+55^{\circ}\text{ C}$. Before any temperature measurements are made, the equipment is allowed to

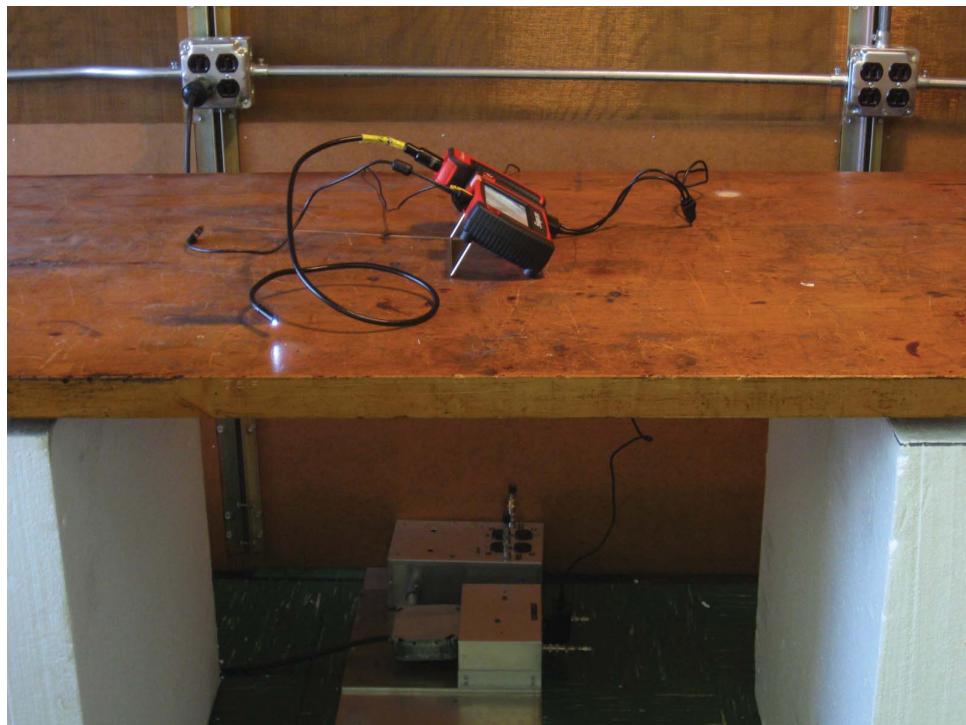


Figure 6: Conducted Emissions Test Setup Photograph(s).

reach a thermal balance in the test chamber, temperature and humidity are recorded, and thermal balance is verified via a thermocouple based probe.

3.2 Intentional Emissions

3.2.1 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 1.1. The 6 dB bandwidth and 26 dB EBW are measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 3. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 7.

Table 3: Intentional Emission Bandwidth.

| Frequency Range | Detector | IF Bandwidth | Video Bandwidth | Test Date: | 17-Oct-11 |
|-----------------|----------|--------------|-------------------|----------------|----------------|
| $f > 1000$ MHz | Pk | 30 kHz | $> 3 \times$ IFBW | Test Engineer: | Joseph Brunett |

EUT Mode: BK8000RX Cont. Tx.

| FCC/IC | | | | | | |
|----------|------------|---------|-----------------|---------------|-----------------|---------------------|
| Mode | Data Rate | Channel | Frequency (MHz) | 6 dB BW (MHz) | 26 dB EBW (MHz) | IC 99% PWR BW (MHz) |
| Cont. Tx | Continuous | 1 | 2412.0 | 16.65 | 19.65 | 16.88 |
| | | 2 | 2432.0 | 16.73 | 19.50 | 16.73 |
| | | 4 | 2472.0 | 16.73 | 19.65 | 16.95 |

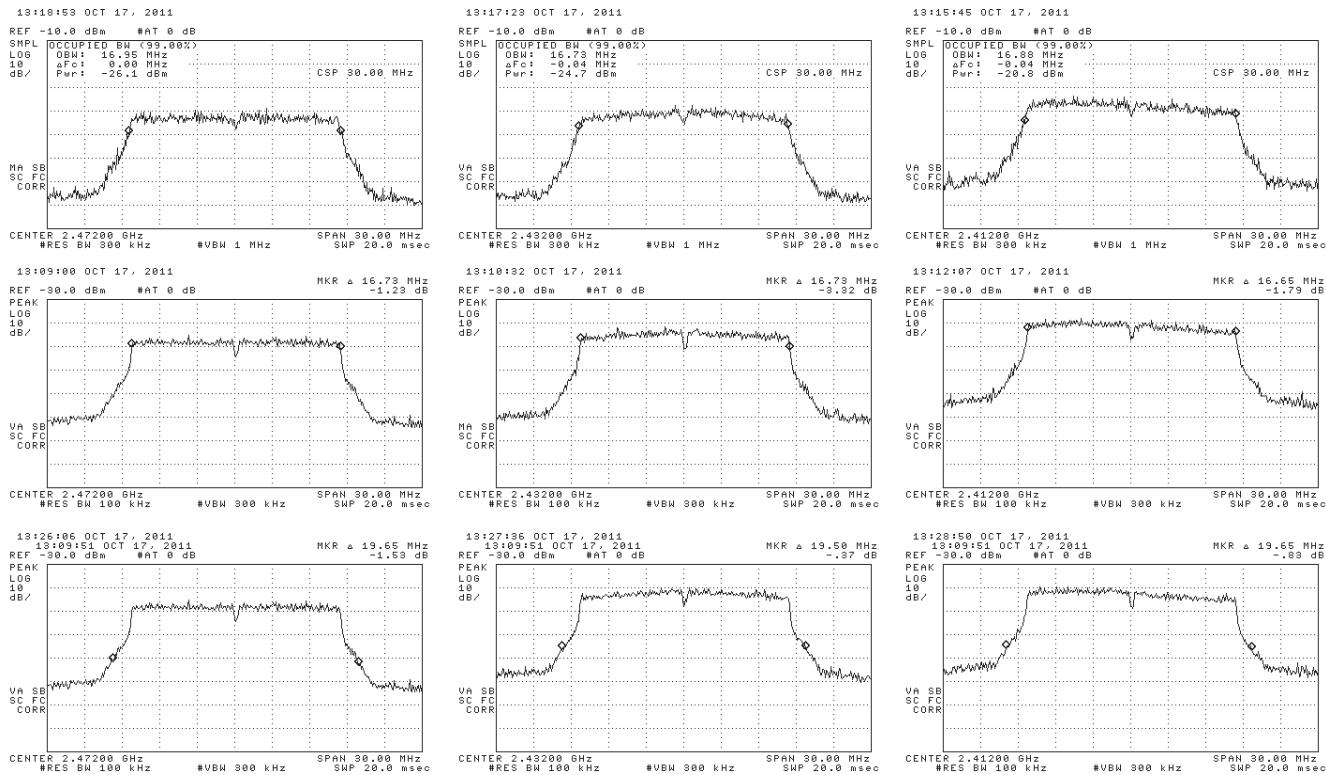


Figure 7: Intentional Emission Bandwidth.

3.2.2 Effective Isotropic Radiated Power

The EUT's radiated power is computed from field strength measurements made at 3 meters from the EUT. Since the emission bandwidth of this EUT is greater than the maximum test receiver bandwidth available, the FCCs DTS measurement procedures are employed in determining output power. The test receiver is set in linear mode, sample or peak detected (as depicted in the example plots provided). After data is collected, the scale is returned to log mode so that power is properly computed by the receiver's integration routine across no less than the 26 dB EBW. The results of this testing are summarized in Table 4. Plots showing how these measurements were made are depicted in Figure 8.

Table 4: Effective Isotropic Radiated Power Results.

| Frequency Range | Det | IF Bandwidth | Video Bandwidth | Test Date: | 9-Nov-11 |
|----------------------------------|--------|--------------|-----------------|----------------|--------------------|
| 25 MHz \leq f \leq 1 000 MHz | Pk/QPk | 120 kHz | 300 kHz | Test Engineer: | Joseph Brunett |
| f > 1 000 MHz | Pk/Avg | 1 MHz | 3 MHz/10kHz | EUT Mode: | BK8000TX Cont. Tx. |

| FCC/IC | | | | | | | | | | | |
|-----------|---------|--------------|-------------------|--------------|--------------|----------|----------|------------------|--------------|----------------------|-------------------|
| Mode | Channel | Freq. MHz | Ant. Used | Ant. Pol. | Pr ** dBm | Ka dB | Kg dB | EIRP (Pk) dBm | Pout* dBm | Calc. Ant Gain dB | EIRP Limit dBm |
| Cont. Tx. | 1 | 2412.0 | Horn LS | H/V | -29.9 | 16.8 | -1.2 | - 0.1 | 14.5 | -14.6 | 30.0 |
| | 2 | 2432.0 | Horn LS | H/V | -31.3 | 16.8 | -1.2 | - 1.5 | 13.6 | -15.0 | 30.0 |
| | 4 | 2472.0 | Horn LS | H/V | -32.9 | 16.8 | -1.2 | - 3.0 | 13.2 | -16.2 | 30.0 |
| Mode | Channel | Freq. MHz | Supply Voltage | Ant. Pol. | Pr ** dBm | Ka dB | Kg dB | EIRP (Pk) dBm | | | |
| Cont. Tx. | 2 | 2432.0 | 4.1 | H/V | -31.3 | 16.8 | -1.2 | - 1.5 | | | |
| | | 2432.0 | 3.9 | H/V | -31.3 | 16.8 | -1.2 | - 1.5 | | | |
| | | 2432.0 | 3.7 | H/V | -31.2 | 16.8 | -1.2 | - 1.4 | | | |
| | | 2432.0 | 3.5 | H/V | -31.2 | 16.8 | -1.2 | - 1.4 | | | |
| | | 2432.0 | 3.3 | H/V | -31.3 | 16.8 | -1.2 | - 1.5 | | | |

* Measured conducted from radio port via modified device.

** Measured radiated at 3 meter distance following Option 2, Method 1 of the FCC's DTS measurement procedures.

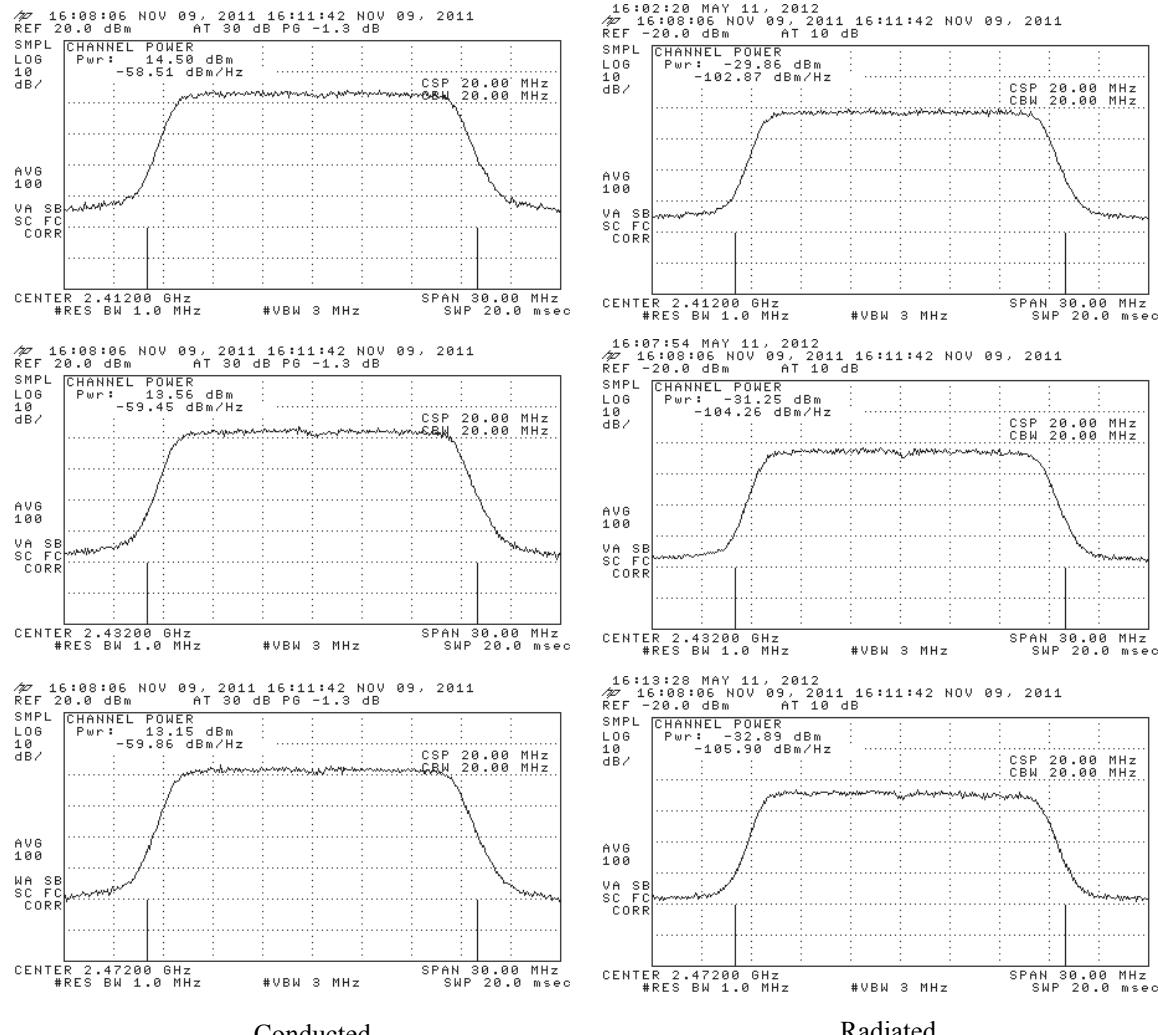


Figure 8: Effective Isotropic Radiated Power Example Plots.

3.2.3 Power Spectral Density

For this test, field strength emissions are made at 3 meters with the EUT oriented for maximum emission. The spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density in field strength is measured in the prescribed receiver bandwidth. A sweep time of 100 seconds is maintained to ensure peak signals are captured in each frequency bin. The results of this testing are summarized in Table 5. Plots showing how these measurements were made are depicted in Figure 9.

Table 5: Power Spectral Density Results.

| Frequency Range | Detector | IF Bandwidth | Video Bandwidth | Test Date: | 5-Dec-11 |
|-----------------|----------|--------------|-----------------|----------------|----------------|
| 2405-2480 MHz | Pk | 3 kHz | 300 kHz | Test Engineer: | Joseph Brunett |

EUT Mode: Cont. Tx.

| FCC/IC | | | | | | | | |
|----------------|---------|-----------------|-----------|--------------------|---------|-------|-----------------------|--------------------|
| Mode | Channel | Frequency (MHz) | Ant. Used | Pr @ 3m (dBm/3kHz) | Ka dB/m | Kg dB | EIRP / PSD (dBm/3kHz) | Line Spacing (kHz) |
| Continuous Tx. | 1 | 2412.0 | Horn LS | -55.5 | 21.4 | -1.2 | -21.10 | 9.7 |
| | 2 | 2432.0 | Horn LS | -54.6 | 21.5 | -1.2 | -20.10 | 10.0 |
| | 4 | 2472.0 | Horn LS | -54.5 | 21.7 | -1.2 | -19.80 | 11.5 |

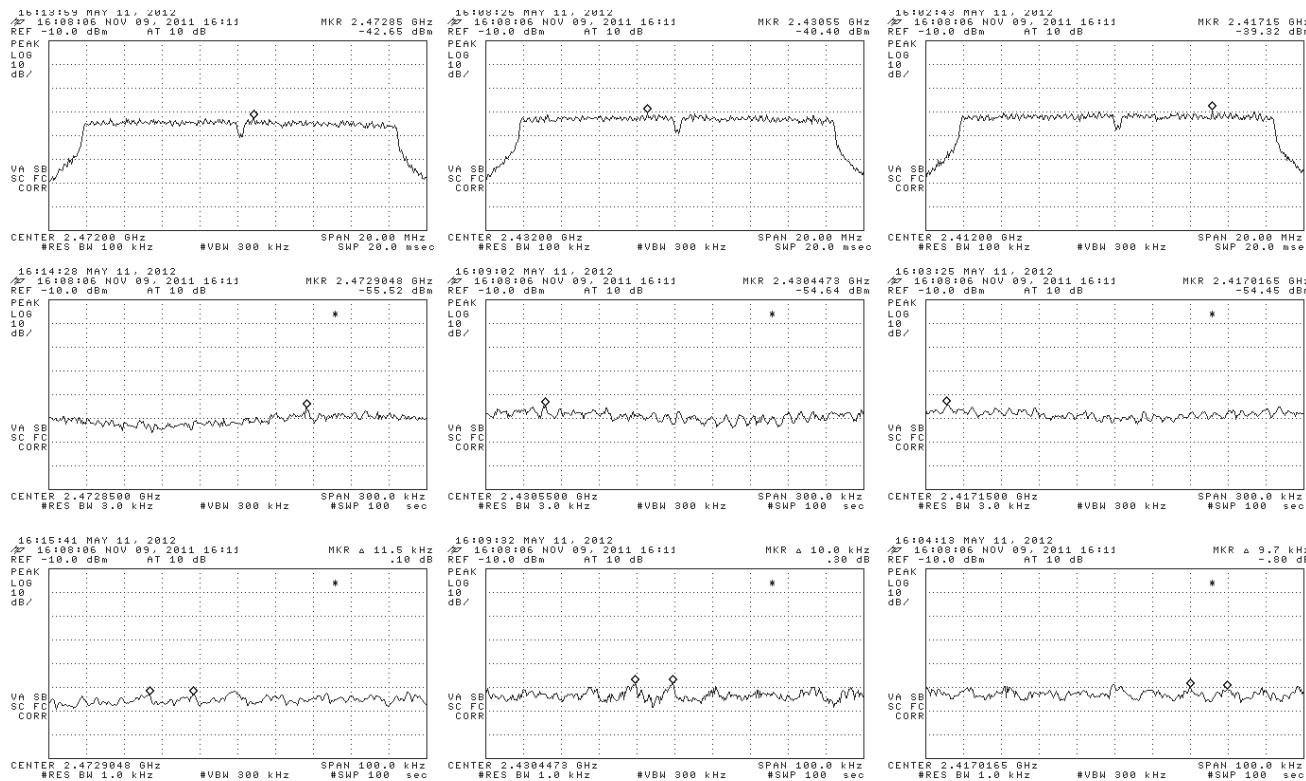


Figure 9: Power Spectral Density Plots.

3.3 Unintentional Emissions

3.3.1 Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 6. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 6(a): Transmit Chain Spurious Emissions.

| Frequency Range | Det | IF Bandwidth | Video Bandwidth | | | | Test Date: | 12-Oct-10 | | | | |
|----------------------------------|---|--------------|-----------------|-------------|---------------|---------|----------------|-----------------------|----------------------|-------------------------|------------|------------------------------|
| 25 MHz \leq f \leq 1 000 MHz | Pk/QPk | 120 kHz | 300 kHz | | | | Test Engineer: | Joseph Brunett | | | | |
| f > 1 000 MHz | Pk/Avg | 1 MHz | 3 MHz/10kHz | | | | EUT Mode: | Continous Tx CH 1,2,4 | | | | |
| Tx Spurious Emissions | | | | | | | | | FCC/IC | | | |
| # | Freq. MHz | Ant. Used | Ant. Pol. | Pr (Pk) dBm | Pr (Avg)* dBm | Ka dB/m | Kg dB | E3(Pk) dB μ V/m | E3(Avg) dB μ V/m | E3 Avg Lim dB μ V/m | Pass dB | Comments |
| 1 | Fundamental Restricted Band Edge (Low Side) | | | | | | | | | | | |
| 2 | 2412.0 | Horn LS | H/V | -28.6 | -38.2 | 16.8 | -1.2 | 96.3 | 86.8 | | | CH 1, 2412 MHz; max all |
| 3 | 2390.0 | Horn LS | H/V | -69.0 | -78.6 | 16.7 | -1.2 | 55.9 | 46.3 | 54.0 | 7.7 | CH 1, 2412 MHz; ** See Below |
| 4 | 2390.0 | Horn LS | H/V | -72.1 | -87.2 | 16.7 | -1.2 | 52.8 | 37.7 | 54.0 | 16.3 | CH2, 2432 MHz; max all |
| 5 | 2390.0 | Horn LS | H/V | -73.5 | -87.5 | 16.7 | -1.2 | 51.4 | 37.4 | 54.0 | 16.6 | CH4, 2472 MHz; max all |
| 6 | Fundamental Restricted Band Edge (High Side) | | | | | | | | | | | |
| 7 | 2483.5 | Horn LS | H/V | -73.9 | -87.7 | 16.9 | -1.2 | 51.2 | 37.4 | 54.0 | 16.6 | CH 1, 2412 MHz; max all |
| 8 | 2483.5 | Horn LS | H/V | -75.1 | -87.5 | 16.9 | -1.2 | 50.0 | 37.6 | 54.0 | 16.4 | CH2, 2432 MHz; max all |
| 9 | 2472.0 | Horn LS | H/V | -32.4 | -41.7 | 16.8 | -1.2 | 92.7 | 83.3 | | | CH4, 2472 MHz; max all |
| 10 | 2483.5 | Horn LS | H/V | -69.1 | -78.4 | 16.9 | -1.2 | 56.0 | 46.6 | 54.0 | 7.4 | CH4, 2472 MHz; ** See Below |
| 11 | | | | | | | | | | | | |
| 12 | Harmonic Emissions | | | | | | | | | | | |
| 13 | 4824.0 | Horn C | H/V | -69.4 | -78.7 | 24.6 | 21.1 | 41.1 | 31.8 | 54.0 | 22.2 | Low, Max all |
| 14 | 4874.0 | Horn C | H/V | -66.7 | -76.0 | 24.6 | 20.9 | 44.0 | 34.7 | 54.0 | 19.3 | Mid, Max all |
| 15 | 4944.0 | Horn C | H/V | -72.8 | -82.1 | 24.6 | 20.7 | 38.1 | 28.8 | 54.0 | 25.2 | High, Max all |
| 16 | 7236.0 | Horn XN | H/V | -75.7 | -85.0 | 25.1 | 21.7 | 34.7 | 25.4 | 54.0 | 28.6 | Low, Max all |
| 17 | 7311.0 | Horn XN | H/V | -79.6 | -88.9 | 25.2 | 21.9 | 30.7 | 21.4 | 54.0 | 32.6 | Mid, Max all |
| 18 | 7416.0 | Horn XN | H/V | -79.1 | -88.4 | 25.3 | 22.1 | 31.1 | 21.8 | 54.0 | 32.2 | High, Max all |
| 19 | 9648.0 | Horn X | H/V | -78.8 | -88.1 | 27.8 | 18.0 | 38.0 | 28.7 | 54.0 | 25.3 | Low, Max all |
| 20 | 9748.0 | Horn X | H/V | -78.7 | -88.0 | 27.9 | 17.9 | 38.3 | 29.0 | 54.0 | 25.0 | Mid, Max all |
| 21 | 9888.0 | Horn X | H/V | -79.2 | -88.5 | 28.0 | 17.9 | 37.9 | 28.6 | 54.0 | 25.4 | High, Max all |
| 22 | 12060.0 | Horn X | H/V | -75.3 | -84.6 | 31.8 | 16.9 | 46.6 | 37.3 | 54.0 | 16.7 | Low, noise; max all |
| 23 | 12185.0 | Horn X | H/V | -74.8 | -84.1 | 31.8 | 16.6 | 47.4 | 38.1 | 54.0 | 15.9 | Mid, noise; max all |
| 24 | 12360.0 | Horn X | H/V | -75.6 | -84.9 | 31.9 | 16.3 | 47.0 | 37.7 | 54.0 | 16.3 | High, noise; max all |
| 25 | 14472.0 | Horn Ku | H/V | -72.1 | -81.4 | 33.2 | 20.7 | 47.3 | 38.0 | 54.0 | 16.0 | Low, noise; max all |
| 26 | 14622.0 | Horn Ku | H/V | -72.5 | -81.8 | 33.3 | 20.9 | 46.9 | 37.6 | 54.0 | 16.4 | Mid, noise; max all |
| 27 | 14832.0 | Horn Ku | H/V | -72.9 | -82.2 | 33.4 | 21.1 | 46.4 | 37.1 | 54.0 | 16.9 | High, noise; max all |
| 28 | 16884.0 | Horn Ku | H/V | -71.0 | -80.3 | 34.7 | 21.9 | 48.7 | 39.4 | 54.0 | 14.6 | Low, noise; max all |
| 29 | 17059.0 | Horn Ku | H/V | -72.6 | -81.9 | 34.8 | 22.0 | 47.2 | 37.9 | 54.0 | 16.1 | Mid, noise; max all |
| 30 | 17304.0 | Horn Ku | H/V | -73.5 | -82.8 | 34.9 | 22.1 | 46.3 | 37.0 | 54.0 | 17.0 | High, noise; max all |
| 31 | 19296.0 | Horn K | H/V | -60.9 | -70.2 | 32.2 | 32.0 | 46.3 | 37.0 | 54.0 | 17.0 | Low, noise; max all |
| 32 | 19496.0 | Horn K | H/V | -59.9 | -69.2 | 32.3 | 32.0 | 47.4 | 38.1 | 54.0 | 15.9 | Mid, noise; max all |
| 33 | 19776.0 | Horn K | H/V | -60.1 | -69.4 | 32.3 | 32.0 | 47.2 | 37.9 | 54.0 | 16.1 | High, noise; max all |
| 34 | 21708.0 | Horn K | H/V | -57.6 | -66.9 | 32.7 | 32.0 | 50.1 | 40.8 | 54.0 | 13.2 | Low, noise; max all |
| 35 | 21933.0 | Horn K | H/V | -57.1 | -66.4 | 32.7 | 32.0 | 50.6 | 41.3 | 54.0 | 12.7 | Mid, noise; max all |
| 36 | 22248.0 | Horn K | H/V | -56.9 | -66.2 | 32.8 | 32.0 | 50.9 | 41.6 | 54.0 | 12.4 | High, noise; max all |
| 37 | 24120.0 | Horn K | H/V | -54.3 | -63.6 | 33.2 | 32.0 | 53.9 | 44.6 | 54.0 | 9.4 | Low, noise; max all |
| 38 | 24370.0 | Horn K | H/V | -54.1 | -63.4 | 33.2 | 32.0 | 54.1 | 44.8 | 54.0 | 9.2 | Mid, noise; max all |
| 39 | 24720.0 | Horn K | H/V | -55.3 | -64.6 | 33.3 | 32.0 | 53.0 | 43.7 | 54.0 | 10.3 | High, noise; max all |

*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

** Avg. meas. via "delta method", with intentional emission meas. in a 1MHz IFBW followed by band-edge delta in a 30kHz IFBW. Pk meas 1MHz IFBW, 3 MHz

Table 6(b): Transmit Chain Spurious Emissions.

| | | | | | |
|------------------------|------------|---------------------|------------------------|-----------------------|-----------------------|
| Frequency Range | Det | IF Bandwidth | Video Bandwidth | Test Date: | 17-Oct-10 |
| 25 MHz ≤ f ≤ 25 GHz | Pk | 100 kHz | 300 kHz | Test Engineer: | Joseph Brunett |
| | | | | EUT Mode: | Continous Tx CH 1,2,4 |

| Tx Out-of-Band Spurious Emissions (20 dB down confirmation) | | | | | | | | | | | | FCC/IC |
|--|--|-----------|-----------|--------------|--------------|---------|-------|---------------------|----------------------|--------------------------|-------------|--------------------------|
| # | Freq. MHz | Ant. Used | Ant. Pol. | Pr (Pk)* dBm | Pr (Avg) dBm | Ka dB/m | Kg dB | E3(Pk) dB μ V/m | E3(Avg) dB μ V/m | E3 Pk Lim** dB μ V/m | Pass dB | Comments |
| 1 Fundamental Emission | | | | | | | | | | | | |
| 2 | 2412.0 | Horn LS | H/V | -38.8 | | 16.8 | -1.2 | 86.2 | | | - | CH1, 2412 MHz |
| 3 | 2432.0 | Horn LS | H/V | -41.2 | | 16.8 | -1.2 | 83.8 | | | - | CH2, 2432 MHz |
| 4 | 2472.0 | Horn LS | H/V | -42.6 | | 16.8 | -1.2 | 82.4 | | | - | CH4, 2472 MHz |
| 5 | | | | | | | | | | | | |
| 6 Band Edges | | | | | | | | | | | | |
| 7 | 2400.0 | Horn LS | H/V | -71.4 | | 16.7 | -1.2 | 53.5 | | 66.2 | 12.6 | Worst-case, all channels |
| 8 | 2483.5 | Horn LS | H/V | -76.1 | | 16.9 | -1.2 | 49.0 | | 66.2 | 17.2 | Worst-case, all channels |
| 9 Harmonic Spurious Emissions | | | | | | | | | | | | |
| 10 | 4824.0 | Horn C | H/V | -59.1 | | 24.6 | 21.1 | 51.4 | | 66.2 | 14.8 | Low, Max all |
| 11 | 4874.0 | Horn C | H/V | -58.8 | | 24.6 | 20.9 | 51.9 | | 66.2 | 14.2 | Mid, Max all |
| 12 | 4944.0 | Horn C | H/V | -60.6 | | 24.6 | 20.7 | 50.3 | | 66.2 | 15.8 | High, Max all |
| 13 | 7236.0 | Horn XN | H/V | -68.3 | | 25.1 | 21.7 | 42.1 | | 66.2 | 24.0 | Low, Max all |
| 14 | 7311.0 | Horn XN | H/V | -71.8 | | 25.2 | 21.9 | 38.5 | | 66.2 | 27.7 | Mid, Max all |
| 15 | 7416.0 | Horn XN | H/V | -71.5 | | 25.3 | 22.1 | 38.7 | | 66.2 | 27.5 | High, Max all |
| 16 | 9648.0 | Horn X | H/V | -71.7 | | 27.8 | 18.0 | 45.1 | | 66.2 | 21.0 | Low, Max all |
| 17 | 9748.0 | Horn X | H/V | -70.6 | | 27.9 | 17.9 | 46.4 | | 66.2 | 19.8 | Mid, Max all |
| 18 | 9888.0 | Horn X | H/V | -72.3 | | 28.0 | 17.9 | 44.8 | | 66.2 | 21.4 | High, Max all |
| 19 | 12060.0 | Horn X | H/V | -72.5 | | 31.8 | 16.9 | 49.4 | | 66.2 | 16.8 | Low, noise; max all |
| 20 | 12185.0 | Horn X | H/V | -73.6 | | 31.8 | 16.6 | 48.6 | | 66.2 | 17.6 | Mid, noise; max all |
| 21 | 12360.0 | Horn X | H/V | -73.8 | | 31.9 | 16.3 | 48.8 | | 66.2 | 17.3 | High, noise; max all |
| 22 | 14472.0 | Horn Ku | H/V | -64.8 | | 33.2 | 20.7 | 54.6 | | 66.2 | 11.5 | Low, noise; max all |
| 23 | 14622.0 | Horn Ku | H/V | -65.1 | | 33.3 | 20.9 | 54.3 | | 66.2 | 11.9 | Mid, noise; max all |
| 24 | 14832.0 | Horn Ku | H/V | -65.3 | | 33.4 | 21.1 | 54.0 | | 66.2 | 12.2 | High, noise; max all |
| 25 | 16884.0 | Horn Ku | H/V | -71.7 | | 34.7 | 21.9 | 48.0 | | 66.2 | 18.1 | Low, noise; max all |
| 26 | 17059.0 | Horn Ku | H/V | -71.3 | | 34.8 | 22.0 | 48.5 | | 66.2 | 17.7 | Mid, noise; max all |
| 27 | 17304.0 | Horn Ku | H/V | -72.0 | | 34.9 | 22.1 | 47.8 | | 66.2 | 18.4 | High, noise; max all |
| 28 | 19296.0 | Horn K | H/V | -65.8 | | 32.2 | 32.0 | 41.4 | | 66.2 | 24.7 | Low, noise; max all |
| 29 | 19496.0 | Horn K | H/V | -66.4 | | 32.3 | 32.0 | 40.9 | | 66.2 | 25.3 | Mid, noise; max all |
| 30 | 19776.0 | Horn K | H/V | -65.4 | | 32.3 | 32.0 | 41.9 | | 66.2 | 24.2 | High, noise; max all |
| 31 | 21708.0 | Horn K | H/V | -64.9 | | 32.7 | 32.0 | 42.8 | | 66.2 | 23.4 | Low, noise; max all |
| 32 | 21933.0 | Horn K | H/V | -65.0 | | 32.7 | 32.0 | 42.7 | | 66.2 | 23.4 | Mid, noise; max all |
| 33 | 22248.0 | Horn K | H/V | -65.2 | | 32.8 | 32.0 | 42.6 | | 66.2 | 23.6 | High, noise; max all |
| 34 | 24120.0 | Horn K | H/V | -63.8 | | 33.2 | 32.0 | 44.4 | | 66.2 | 21.8 | Low, noise; max all |
| 35 | 24370.0 | Horn K | H/V | -63.2 | | 33.2 | 32.0 | 45.0 | | 66.2 | 21.1 | Mid, noise; max all |
| 36 | 24720.0 | Horn K | H/V | -63.8 | | 33.3 | 32.0 | 44.5 | | 66.2 | 21.6 | High, noise; max all |
| 37 | NOTE: No other spurious emissions observed, other than band edge and harmonic emissions. | | | | | | | | | | | |

*Pk detection in 100 kHz IFBW, as illustrate above to confirm all out of band spurious are > 20 dB down.

** Spurious Limit 20 dB down from maximum fundamental in-band emissions reported at top of this table.

3.3.2 Radiated Receiver Spurious

The results for the measurement of radiated receiver spurious emissions (emissions from the receiver chain, e.g. LO or VCO) at the nominal voltage and temperature are reported in Table 7. Receive chain emissions are measured to 5 times the highest receive chain frequency employed or 4 GHz, whichever is higher. If no emissions are detected, only those noise floor emissions at the LO/VCO frequency are reported.

Table 7: Receiver Chain Spurious Emissions \geq 30 MHz.

| Frequency Range | Det | IF Bandwidth | Video Bandwidth | Test Date: | 5-Dec-11 |
|----------------------------------|--------|--------------|-----------------|----------------|------------------------|
| 25 MHz \leq f \leq 1 000 MHz | Pk/QPk | 120 kHz | 300 kHz | Test Engineer: | Joseph Brunett |
| f > 1 000 MHz | Pk/Avg | 1 MHz | 3 MHz/10kHz | EUT Mode: | Receive Only - Standby |

| Receive Chain Spurious Emissions | | | | | | | | | | | | FCC/IC/CISPR | |
|----------------------------------|--|-----------|-----------|-------------|-------------------|------|------|---------------------|----------------------|---------------------------|-----------------------|--------------|----------------|
| # | Freq. MHz | Ant. Used | Ant. Pol. | Pr (Pk) dBm | Pr (QPk/Avg) dBm* | Ka | Kg | E3(Pk) dB μ V/m | E3(Avg) dB μ V/m | FCC/IC E3lin dB μ V/m | CE E3lim dB μ V/m | Pass dB | Comments |
| 1 | 2372.0 | Horn LS | H/V | -75.1 | | 16.7 | -1.2 | 49.8 | | 54.0 | | 4.2 | max all, noise |
| 2 | 2392.0 | Horn LS | H/V | -74.9 | | 16.7 | -1.2 | 50.0 | | 54.0 | | 4.0 | max all, noise |
| 3 | 2432.0 | Horn LS | H/V | -75.6 | | 16.8 | -1.2 | 49.4 | | 54.0 | | 4.6 | max all, noise |
| 4 | 2452.0 | Horn LS | H/V | -77.1 | | 16.8 | -1.2 | 47.9 | | 54.0 | | 6.1 | max all, noise |
| 5 | 2472.0 | Horn LS | H/V | -76.9 | | 16.8 | -1.2 | 48.1 | | 54.0 | | 5.9 | max all, noise |
| 6 | 2512.0 | Horn LS | H/V | -76.8 | | 16.9 | -1.2 | 48.3 | | 54.0 | | 5.7 | max all, noise |
| 7 | NOTE: VCO/LO is 40 MHz offset from Rx Channel. Low, Middle and High Channels tested. | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | |
| 12 | | | | | | | | | | | | | |
| 13 | | | | | | | | | | | | | |
| 14 | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | |
| 16 | | | | | | | | | | | | | |

*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

3.3.3 Radiated Digital Spurious

The results for the measurement of digital spurious emissions (emissions arising from digital circuitry) at the nominal voltage and temperature are provided in Table 8. Radiation from digital components has been measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

Table 8: Radiated Digital Spurious Emissions.

| Frequency Range | Det | IF Bandwidth | Video Bandwidth | Test Date: | 26-Sep-11 |
|-----------------------|--------|--------------|-----------------|-----------------|-------------------|
| 5 MHz ≤ f ≤ 1 000 MHz | Pk/QPk | 120 kHz | 300 kHz | Test Engineer: | Joseph Brunett |
| f > 1 000 MHz | Pk | 1 MHz | 3 MHz | EUT Mode: | BK8000RX+BK8000TX |
| f > 1 000 MHz | Avg | 1 MHz | 10kHz | Meas. Distance: | 3 meters |

| Digital Spurious Emissions | | | | | | | | | | | FCC/IC/CISPR A | | |
|----------------------------|-----------|-----------|-----------|-------------|-------------------|---------|-------|---------------------|--------------------------|---------------------------|-----------------------|------------|----------|
| # | Freq. MHz | Ant. Used | Ant. Pol. | Pr (Pk) dBm | Pr (QPk/Avg) dBm* | Ka dB/m | Kg dB | E3(Pk) dB μ V/m | E3(QPk/Avg) dB μ V/m | FCC/IC E3lim dB μ V/m | CE E3lim dB μ V/m | Pass dB | Comments |
| 1 | 60.0 | Bic | H | -58.7 | | 8.1 | 24.7 | 31.6 | | 49.5 | 50.5 | 17.9 | |
| 2 | 72.0 | Bic | H | -53.1 | | 7.6 | 24.6 | 36.9 | | 49.5 | 50.5 | 12.6 | |
| 3 | 72.0 | Bic | V | -63.0 | | 7.6 | 24.6 | 27.0 | | 49.5 | 50.5 | 22.5 | |
| 4 | 84.0 | Bic | H | -49.9 | | 7.7 | 24.4 | 40.4 | | 49.5 | 50.5 | 9.1 | |
| 5 | 84.0 | Bic | V | -62.9 | | 7.7 | 24.4 | 27.4 | | 49.5 | 50.5 | 22.1 | |
| 6 | 108.0 | Bic | H | -51.3 | | 9.0 | 24.1 | 40.6 | | 54.0 | 50.5 | 13.4 | |
| 7 | 109.4 | Bic | H | -58.1 | | 9.1 | 24.1 | 34.0 | | 54.0 | 50.5 | 20.0 | |
| 8 | 116.0 | Bic | H | -61.5 | | 9.6 | 24.0 | 31.2 | | 54.0 | 50.5 | 22.8 | |
| 9 | 120.4 | Bic | H | -47.7 | | 10.0 | 23.9 | 45.4 | | 54.0 | 50.5 | 8.6 | |
| 10 | 144.0 | Bic | H | -53.4 | | 12.0 | 23.6 | 42.0 | | 54.0 | 50.5 | 12.0 | |
| 11 | 144.0 | Bic | V | -63.4 | | 12.0 | 23.6 | 32.0 | | 54.0 | 50.5 | 22.0 | |
| 12 | 156.0 | Bic | H | -61.7 | | 12.9 | 23.4 | 34.7 | | 54.0 | 50.5 | 19.3 | |
| 13 | 162.5 | Bic | H | -49.0 | | 13.3 | 23.3 | 48.0 | | 54.0 | 50.5 | 6.0 | |
| 14 | 162.5 | Bic | V | -65.3 | | 13.3 | 23.3 | 31.7 | | 54.0 | 50.5 | 22.3 | |
| 15 | 180.0 | Bic | H | -60.9 | | 14.2 | 23.1 | 37.1 | | 54.0 | 50.5 | 16.9 | |
| 16 | 192.0 | Bic | H | -59.7 | | 14.5 | 23.0 | 38.9 | | 54.0 | 50.5 | 15.1 | |
| 17 | 204.0 | Bic | H | -65.4 | | 14.7 | 22.8 | 33.5 | | 54.0 | 50.5 | 20.5 | |
| 18 | 216.0 | Bic | H | -48.9 | -49.3 | 14.8 | 22.7 | 50.2 | 49.8 | 54.0 | 50.5 | 4.2 | |
| 19 | 216.0 | Bic | V | -57.9 | | 14.8 | 22.7 | 41.2 | | 54.0 | 50.5 | 12.8 | |
| 20 | 228.0 | Bic | H | -57.1 | | 14.7 | 22.5 | 42.1 | | 56.9 | 50.5 | 14.8 | |
| 21 | 228.0 | Bic | V | -67.3 | | 14.7 | 22.5 | 31.9 | | 56.9 | 50.5 | 25.0 | |
| 22 | 240.0 | Bic | H | -54.8 | | 14.7 | 22.4 | 44.5 | | 56.9 | 57.5 | 12.4 | |
| 23 | 240.0 | Bic | V | -68.8 | | 14.7 | 22.4 | 30.5 | | 56.9 | 57.5 | 26.4 | |
| 24 | 252.0 | SBic | H | -55.9 | | 15.7 | 22.2 | 44.6 | | 56.9 | 57.5 | 12.3 | |
| 25 | 288.0 | SBic | H | -55.9 | | 17.4 | 21.8 | 46.7 | | 56.9 | 57.5 | 10.2 | |
| 26 | 288.0 | SBic | V | -59.2 | | 17.4 | 21.8 | 43.4 | | 56.9 | 57.5 | 13.5 | |
| 27 | 324.0 | SBic | H | -65.7 | | 18.8 | 21.4 | 38.7 | | 56.9 | 57.5 | 18.2 | |
| 28 | 360.0 | SBic | H | -58.5 | | 20.0 | 21.0 | 47.5 | | 56.9 | 57.5 | 9.4 | |
| 29 | 360.0 | SBic | V | -65.0 | | 20.0 | 21.0 | 41.0 | | 56.9 | 57.5 | 15.9 | |
| 30 | 384.0 | SBic | H | -63.3 | | 20.7 | 20.7 | 43.7 | | 56.9 | 57.5 | 13.2 | |
| 31 | 384.0 | SBic | V | -64.9 | | 20.7 | 20.7 | 42.1 | | 56.9 | 57.5 | 14.8 | |
| 32 | 408.0 | SBic | H | -62.0 | | 21.3 | 20.5 | 45.9 | | 56.9 | 57.5 | 11.0 | |
| 33 | 432.0 | SBic | H | -58.4 | | 21.9 | 20.2 | 50.3 | | 56.9 | 57.5 | 6.6 | |
| 34 | 432.0 | SBic | V | -64.9 | | 21.9 | 20.2 | 43.8 | | 56.9 | 57.5 | 13.1 | |
| 35 | 480.0 | SBic | H | -63.1 | | 22.9 | 19.7 | 47.0 | | 56.9 | 57.5 | 9.9 | |
| 36 | 720.0 | SBic | H | -65.5 | | 26.2 | 17.7 | 50.0 | | 56.9 | 57.5 | 6.9 | |
| 37 | | | | | | | | | | | | | |

*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

3.3.4 Conducted Emissions Test Results - AC Power Port(s)

The results of emissions from the EUT's AC mains power port(s) are reported in Table 9.

Table 9: AC Mains Power Conducted Emissions Results.

| Frequency Range 150kHz ≤ f ≤ 30 MHz | Det Pk/QPk/Avg | IF Bandwidth 9 kHz | Video Bandwidth 30 kHz | Test Date: 23-Nov-11 |
|--|-------------------|-----------------------|---------------------------|----------------------------------|
| | | | | Test Engineer: Joseph Brunett |
| | | | | EUT Mode: Max Current Draw |

| FCC/IC/CISPR B | | | | | | | | | | | | | |
|----------------|--------------|--------------|-----------------------|-------|------------|-------------|---------------------|------|------|------------|-----------------------|------------|----------|
| # | Freq. MHz | Line Side | Peak Det., dB μ V | | | Pass dB* | QP Det., dB μ V | | | Pass dB | Ave. Det., dB μ V | Pass dB | Comments |
| | | | Vtest | Vlim* | 1.2 | | Vtest | Vlim | | | | | |
| 1 | 0.16 | Lo | 54.1 | 55.3 | 1.2 | | 65.3 | | | 55.3 | | | |
| 2 | 0.20 | Lo | 48.4 | 53.6 | 5.2 | | 63.6 | | | 53.6 | | | |
| 3 | 0.32 | Lo | 38.0 | 49.7 | 11.7 | | 59.8 | | | 49.7 | | | |
| 4 | 0.46 | Lo | 36.8 | 46.6 | 9.8 | | 56.7 | | | 46.6 | | | |
| 5 | 0.55 | Lo | 37.1 | 46.0 | 8.9 | | 56.0 | | | 46.0 | | | |
| 6 | 0.86 | Lo | 34.8 | 46.0 | 11.2 | | 56.0 | | | 46.0 | | | |
| 7 | 0.99 | Lo | 35.0 | 46.0 | 11.0 | | 56.0 | | | 46.0 | | | |
| 8 | 1.21 | Lo | 36.3 | 46.0 | 9.7 | | 56.0 | | | 46.0 | | | |
| 9 | 1.38 | Lo | 35.8 | 46.0 | 10.2 | | 56.0 | | | 46.0 | | | |
| 10 | 2.28 | Lo | 35.3 | 46.0 | 10.7 | | 56.0 | | | 46.0 | | | |
| 11 | 3.54 | Lo | 34.7 | 46.0 | 11.3 | | 56.0 | | | 46.0 | | | |
| 12 | 5.08 | Lo | 33.6 | 50.0 | 16.4 | | 60.0 | | | 50.0 | | | |
| 13 | 5.99 | Lo | 31.0 | 50.0 | 19.0 | | 60.0 | | | 50.0 | | | |
| 14 | 7.25 | Lo | 32.1 | 50.0 | 17.9 | | 60.0 | | | 50.0 | | | |
| 15 | 8.44 | Lo | 32.5 | 50.0 | 17.5 | | 60.0 | | | 50.0 | | | |
| 16 | 10.05 | Lo | 31.8 | 50.0 | 18.2 | | 60.0 | | | 50.0 | | | |
| 17 | 11.17 | Lo | 30.8 | 50.0 | 19.2 | | 60.0 | | | 50.0 | | | |
| 18 | 14.88 | Lo | 30.7 | 50.0 | 19.3 | | 60.0 | | | 50.0 | | | |
| 19 | 16.98 | Lo | 30.8 | 50.0 | 19.2 | | 60.0 | | | 50.0 | | | |
| 20 | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | |
| 23 | 0.15 | Hi | 60.0 | 56.0 | - 4.0 | 53.0 | 66.1 | 13.1 | 40.5 | 56.0 | 15.5 | | |
| 24 | 0.20 | Hi | 49.4 | 53.6 | 4.2 | | 63.6 | | | 53.6 | | | |
| 25 | 0.27 | Hi | 40.9 | 51.1 | 10.1 | | 61.1 | | | 51.1 | | | |
| 26 | 0.48 | Hi | 35.9 | 46.2 | 10.4 | | 56.3 | | | 46.2 | | | |
| 27 | 0.56 | Hi | 37.8 | 46.0 | 8.2 | | 56.0 | | | 46.0 | | | |
| 28 | 0.62 | Hi | 34.5 | 46.0 | 11.5 | | 56.0 | | | 46.0 | | | |
| 29 | 0.76 | Hi | 36.5 | 46.0 | 9.5 | | 56.0 | | | 46.0 | | | |
| 30 | 0.93 | Hi | 35.9 | 46.0 | 10.1 | | 56.0 | | | 46.0 | | | |
| 31 | 1.36 | Hi | 33.6 | 46.0 | 12.4 | | 56.0 | | | 46.0 | | | |
| 32 | 2.28 | Hi | 36.7 | 46.0 | 9.3 | | 56.0 | | | 46.0 | | | |
| 33 | 3.47 | Hi | 34.9 | 46.0 | 11.1 | | 56.0 | | | 46.0 | | | |
| 34 | 4.66 | Hi | 32.4 | 46.0 | 13.6 | | 56.0 | | | 46.0 | | | |
| 35 | 5.08 | Hi | 32.9 | 50.0 | 17.1 | | 60.0 | | | 50.0 | | | |
| 36 | 8.51 | Hi | 33.3 | 50.0 | 16.7 | | 60.0 | | | 50.0 | | | |
| 37 | 9.14 | Hi | 31.5 | 50.0 | 18.5 | | 60.0 | | | 50.0 | | | |
| 38 | 10.89 | Hi | 31.6 | 50.0 | 18.4 | | 60.0 | | | 50.0 | | | |
| 39 | 13.62 | Hi | 32.2 | 50.0 | 17.8 | | 60.0 | | | 50.0 | | | |
| 40 | 14.46 | Hi | 33.1 | 50.0 | 16.9 | | 60.0 | | | 50.0 | | | |
| 41 | 15.23 | Hi | 32.3 | 50.0 | 17.7 | | 60.0 | | | 50.0 | | | |
| 42 | | | | | | | | | | | | | |