### **G'FIVE INTERNATIONAL LIMITED**

#### **GSM MOBILE PHONE**

Model: N78 BT

Oct 24th 2011
Report No.: 11070025-SAR(FCC)
(This report supersedes NONE)



Modifications made to the product: None

This Test Report is Issued Under the Authority	of:
David Thang	Bu
David Zhang	Leslie Bai
Compliance Engineer	Director of Certification

This test report may be reproduced in full only.

All Test Data Presented in this report is only applicable to presented Test sample.



### **Laboratory Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to <u>testing</u> and <u>certification</u>, SIEMIC provides initial design reviews and <u>compliance</u> <u>management</u> through out a project. Our extensive experience with <u>China</u>, <u>Asia Pacific</u>, <u>North America</u>, <u>European</u>, <u>and international</u> compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the <u>global markets</u>.

**Accreditations for Conformity Assessment** 

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

#### **Accreditations for Product Certifications**

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB, NIST	EMC,RF,Safety,Telecom

This page has been left blank intentionally.

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 4 of 93 www.siemic.com

#### CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	6
2	TECHNICAL DETAILS	7
3	INTRODUCTION	8
4	SAR MEASUREMENT SETUP	9
5	ANSI/IEEE C95.1 – 1999 RF EXPOSURE LIMIT	19
6	SYSTEM AND LIQUID VALIDATION	20
7	TYPE A MEASUREMENT UNCERTAINTY	28
8	OUTPUT POWER VERIFICATION	30
9	SAR TEST RESULTS	32
ANN	EX A. TEST INSTRUMENT & METHOD	47
ANN	EX B CALIBRATION REPORTS	49
ANN	EX C SAR SYSTEM PHOTOGRAPHS	87
ANN	EX D SETUP PHOTOGRAPHS	88
ΔΝΝ	EX F. FIIT PHOTO	<b>Q1</b>

www.siemic.com

This page has been left blank intentionally.



### 1 Executive Summary & EUT information

The purpose of this test programmed was to demonstrate compliance of the G'FIVE INTERNATIONAL LIMITED Model: N78BT against the current Stipulated Standards. The Mobile Phone have demonstrated compliance with the C95.1, IEEE 1528, OET Bulletin 65 Supplement C, IEC62209-2, RSS-102 Issue 4 and Safety Code 6. The test has demonstrated that this unit complies with stipulated standards.

#### **EUT Information**

**EUT** . GSM MOBILE PHONE

Description

Model No : N78BT Serial No : N/A

Input Power : 3.6V-4.2VDC

Maximum

GSM850: 32.26dBm Avg. Burst Power (32.67 dBm Peak Output Power)
GSM1900: 28.30 dBm Avg. Burst Power (29.58 dBm Peak Output Power)

Output Power to Antenna GSM850: ERP 30.61 dBm GSM1900: EIRP 29.02 dBm

Max. SAR
Level(s)

Measured

0.632 W/Kg 1g Head Tissue (Cellular Band)
0.710 W/Kg 1g Body Tissue (Cellular Band)
0.325 W/Kg 1g Head Tissue (PCS Band)
0.377 W/Kg 1g Body Tissue (PCS Band)

Classification

Per Stipulated : Mobile Device , Class B

**Test Standard** 

**Co-located TX**: WWAN can transmit simultaneously with Bluetooth

Antenna

**Separation** : 0.7 cm - WWAN antenna-to-Bluetooth antenna **distances** 

Antenna

Type(s) : Internal Antenna

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 7 of 93 www.siemic.com

# **2 TECHNICAL DETAILS**

	Z <u>TECHNICAL DETAILS</u>
Purpose	Compliance testing of GSM Mobile Phone model N78BT with stipulated standard
Applicant / Client	G'FIVE INTERNATIONAL LIMITED Unit 1, 16/F, Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong
Manufacturer	Kingtech Telecom (Shenzhen) Co., Ltd Floor 3, Building A, No.3, Road 1 of Shangxue Dengxinkeng Industry Park, Bantian Street, Longgang District, Shenzhen City, PRC
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	11070025-SAR
Date EUT received	July 1 <sup>th</sup> 2011
Standard applied	See Page 9
Dates of test (from – to)	Oct 24 <sup>th</sup> 2011
No of Units:	1
Equipment Category:	PCE
Trade Name:	N/A
Model Name:	N78BT
RF Operating Frequency (ies)	GSM850 : 824.2 ~ 848.8 MHz(TX) / 869.2 ~ 893.8 MHz(RX) GSM1900 : 1850.2 ~ 1909.8 MHz(TX) / 1930.2 ~ 1989.8 MHz(RX) BT:2402~ 2480MHz(TX/RX)
Modulation:	GSM/GPRS : GMSK
FCC ID :	Bluetooth: GFSK Z3JN78BT
IC ID:	N/A

### 3 INTRODUCTION

#### Introduction

This measurement report shows compliance of the EUT with FCC OET Bulletin 65 Supplement C (Edition 01-01),IEC62209-2 & RSS 102 Issue 4.0.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], and ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], were employed.

#### **SAR Definition**

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (p).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma \mid E \mid^2}{\rho}$$

where:

 $\sigma$  = conductivity of the tissue (S/m)  $\rho$  = mass density of the tissue (kg/m3) E = rms electric field strength (V/m)


### 4 **SAR Measurement Setup**

#### **Dosimetric Assessment System**

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than  $\pm$  0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than ±10%. The spherical isotropy was evaluated with the procedure described in SAR starndard and found to be better than ±0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN62209-1.

### **Measurement System Diagram**

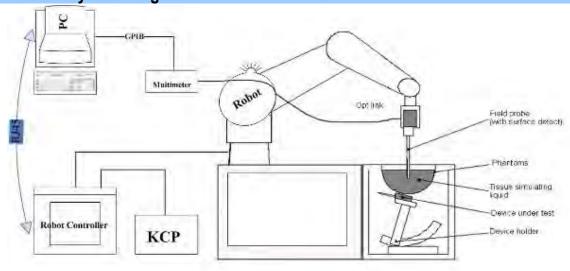

## The OPENSAR system for performing compliance tests consist of the following items:

- 1. A standard high precision 6-axis robot (KUKA) with controller and software.
- 2. KUKA Control Panel (KCP).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.

- 5. A computer operating Windows XP.
- 6. OPENSAR software.
- 7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- 8. The SAM phantom enabling testing left-hand right-hand and body usage.
- 9. The Position device for handheld EUT.
- 10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
- 11. System validation dipoles to validate the proper functioning of the system.

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 11 of 93 www.siemic.com

#### **EP100 Probe**





Construction Symmetrical design with triangular Core. Built-in shielding against static charges Calibration in air from 100 MHz to 2.5 GHz. In brain and muscle simulating tissue at frequencies from 800 to 6000 MHz (accuracy of 8%).

Frequency 100 MHz to 6 GHz;

Linearity; 0.25 dB (100 MHz to 6 GHz),

Directivity: 0.25 dB in brain tissue (rotation around probe axis) 0.5 dB in brain tissue (rotation normal probe axis)

Dynamic: 0.001W/kg to > 100W/kg;

Range Linearity: 0.25 dB

Surface: 0.2 mm repeatability in air and liquids

Dimensions Overall length: 330 mm

Tip length: 16 mm

Body diameter: 8 mm

Tip diameter: 2.6 mm

Distance from probe tip to dipole centers: <1.5 mm

Application General dosimetric up to 6 GHz

Compliance tests of mobile phones

Fast automatic scanning in arbitrary phantoms

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique, with printed resistive lines on ceramic substrates.

It is connected to the KRC box on the robot arm and provides an automatic detection of the phantom surface. The 3D file of the phantom is include in OpenSAR software. The Video Positioning System allow the system to take the automatic reference and to move the probe safely and accurately on the phantom.

#### **E-Field Probe Calibration Process**

Each probe is calibrated according to a dosimetric assessment procedure described in SAR standard with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 0.8 GHz, and in a waveguide above 0.8 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. E-field correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue.

#### **SAM Phantom**

The SAM Phantom SAM29 is constructed of a fiberglass shell ntegrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1, IEC62209-2.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2 0.2 mm Filling Volume: Approx. 25 liters

Dimensions (H x L x W): 810 x 1000 x 500 mm

Liquid is filled to at least 15mm from the bottom of Phantom.



Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 13 of 93 www.siemic.com

#### **Device Holder**

In combination with the Generic Twin Phantom V3.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [10]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

#### **Data Evaluation**

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe Parameters	- Sensitivity	Norm <sub>i</sub>
	- Conversion factor	ConvFi
	- Diode compression point Dcpi	
Device Parameter	- Frequency	f
	- Crest factor	cf
Media Parametrs	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where  $V_i$  = Compensated signal of channel i (i = x, y, z)

 $U_i$  = Input signal of channel i (i = x, y, z)

cf = Crest factor of exciting field (DASY parameter)

dcp<sub>i</sub> = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$ 

H-field probes:  $H_i = \sqrt{Vi} \cdot \frac{a_{n0} + a_{n1}f + a_{n2}f^2}{f}$ 

Where  $V_i$  = Compensated signal of channel i (i = x, y, z)

 $Norm_i$  = Sensor sensitivity of channel i (i = x, y, z)

μV/(V/m)2 for E0field Probes

ConvF= Sensitivity enhancement in solution

aii = Sensor sensitivity factors for H-field probes

f = Carrier frequency (GHz)

E<sub>i</sub> = Electric field strength of channel i in V/m

Hi = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_{x}^{2} + E_{x}^{2} + E_{x}^{2}}$$

The primary field data are used to calculate the derived field units.

 $SAR - E_{10}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$ 

where SAR = local specific absorption rate in mW/g

E<sub>tot</sub> = total field strength in V/m

σ = conductivity in [mho/m] or [siemens/m]

ρ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

 $P_{per} = \frac{E_{xx}^2}{3770}$  or  $P_{per} = H_{xx}^2 \cdot 37.7$ 

where Ppwe = Equivalent power density of a plane wave in mW/cm2

 $E_{tot}$  = total electric field strength in V/m  $H_{tot}$  = total magnetic field strength in A/m

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 15 of 93 www.siemic.cor

#### SAR Evaluation – Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

#### Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

#### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

#### Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

#### • Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

#### **SAR Evaluation – Peak SAR**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

#### Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

#### **Definition of Reference Points**

#### **Ear Reference Point**

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

#### **Device Reference Points**

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is than located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at it's top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].




Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

#### Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

- 2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
- 3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
- 5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

### Test Configuration - Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position":

- 1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
- 2. Rotate the device around the horizontal line by 15 degrees.
- 3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).

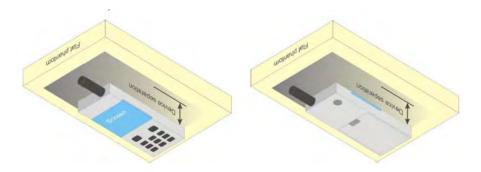


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

#### **Test Position – Body Worn Configurations**

**Body Worn Position** 

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm or holster surface and the flat phantom to 0 cm.



### **ANSI/IEEE C95.1 – 1999 RF Exposure Limit**

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

#### **Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

#### **Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits** 

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Brain	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>&</sup>lt;sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>&</sup>lt;sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

### 6 SYSTEM AND LIQUID VALIDATION

#### **System Validation**

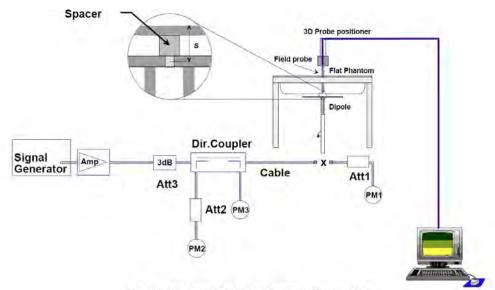


Fig 8.1 System Setup for System Evaluation

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- 4. Power Meter
- 5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

### Numerical reference SAR values (W/kg) for reference dipole and flat phantom

www.siemic.com

Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) <sup>a</sup>
300	3.0	2.0	4.4	2.1
450	4.9	3.3	7.2	3.2
835	9.5	6.2	4.1	4.9
900	10.8	6.9	16.4	5.4
1450	29.0	16.0	50.2	6.5
1800	38.1	19.8	69.5	6.8
1900	39.7	20.5	72.1	6.6
2000	41.1	21.1	74.6	6.5
2450	52.4	24.0	104.2	7.7
3000	63.8	25.7	140.2	9.5

#### Target and measurement SAR after Normalized

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Deviation (%)
Oct 24th,2011	835	head	9.5	9.2	-3.15
Oct 24th,2011	835	body	9.5	9.8	+3.15
Oct 24th,2011	1900	head	39.7	38.2	-3.77
Oct 24th,2011	1900	body	39.7	39.2	-1.25

### **Liquid Validation**

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

www.siemic.com

#### IEEE SCC-34/SC-2 P1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest xpected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	He	ad	Во	dy
MHz	εr	σ (S/m)	εr	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

**Note**:  $\varepsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sup>3</sup>

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 23 of 93 www.siemic.com

#### **Liquid Confirmation Result:**

Tempe	rature: 2	<u>2</u> °C	Relative humidity: <u>53</u> %			
Freq(MHz)			Target	Target Measured		Limit (%)
835	Head	Permittivity	41.5	41.578	(%) -0.19	5
		Conductivity	0.90	0.8980	-0.20	5
835	Body	Permittivity	55.2	55.096	0.19	5
		Conductivity	0.97	0.9740	-0.31	5
836.4	Head	Permittivity	41.5	41.588	0.21	5
		Conductivity	0.90	0.8987	0.14	5
836.4	Body	Permittivity	55.2	55.101	-0.17	5
		Conductivity	0.97	0.9752	0.53	5

Temper	ature: <u>22</u>	<u>2</u> °C	Relative humidity: <u>53</u> %			
	Fr	eq(MHz)	Target	Measured	Deviation (%)	Limit (%)
1900	Head	Permittivity	40.00	41.215	3.04	5
		Conductivity	1.4	1.386	-1.07	5
1900	Body	Permittivity	53.3	53.547	0.46	5
		Conductivity	1.52	1.533	0.79	5
1909.8	Head	Permittivity	40.00	41.230	3.07	5
		Conductivity	1.4	1.385	-1.071	5
1909.8	Body	Permittivity	53.3	53.547	0.46	5
		Conductivity	1.52	1.530	0.65	5

Note: The liquid validation was performed at Oct 24th, 2011.


### System Validation Plots


**Product Description: Mobile Phone** 

Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	835.000000 (Head)		
Relative permitivity (real part)	41.5780		
Conductivity (S/m)	0.8980		
Input power	10mW		
Crest factor	1.0		
Conversion Factor	6.04		
Variation (%)	-1.120000		
SAR 10g (W/Kg)	0.060		
SAR 1g (W/Kg)	0.092		





### SAR, Z Axis Scan (X = 0, Y = 0)

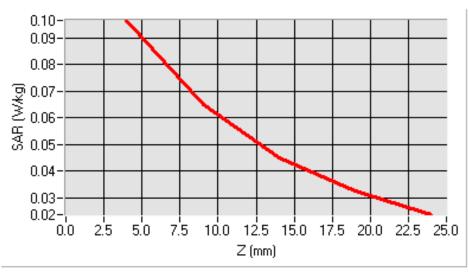



**Product Description: Mobile Phone** 

Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	835.000000 (Body)
Relative permitivity (real part)	55.096
Conductivity (S/m)	0.9740
Input power	10mW
Crest factor	1.0
Conversion Factor	6.21
Variation (%)	-1.630000
SAR 10g (W/Kg)	0.064
SAR 1g (W/Kg)	0.098







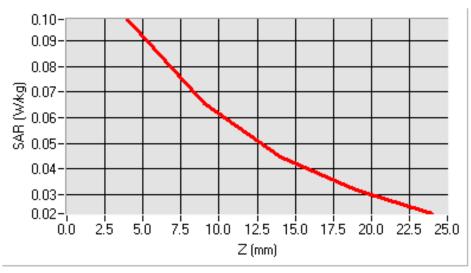



**Product Description: Mobile Phone** 

Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1900.000000(Head)
Relative permitivity (real part)	41.215
Conductivity (S/m)	1.386
Input power	10mW
Crest factor	1.0
Conversion Factor	6.18
Variation (%)	0.1200000
SAR 10g (W/Kg)	0.201
SAR 1g (W/Kg)	0.382







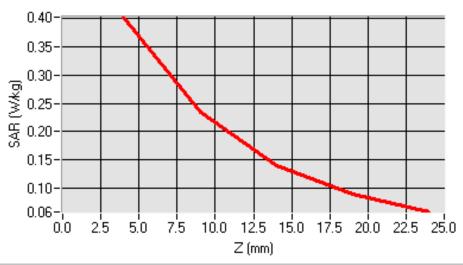



**Product Description: Mobile Phone** 

Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1900.000000(Body)
Relative permitivity (real part)	53.547
Conductivity (S/m)	1.533
Input power	10mW
Crest factor	1.0
Conversion Factor	6.38
Variation (%)	0.120
SAR 10g (W/Kg)	0.209
SAR 1g (W/Kg)	0.392







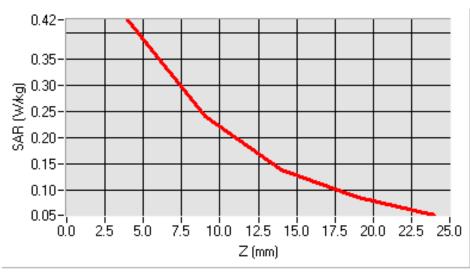

### 7 TYPE A MEASUREMENT UNCERTAINTY

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below:

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1 / √3	1 / √6	1 / √2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum-by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

### Uncertainty Budget of COMOSAR for frequency range 300 MHz to 6 GHz

Uncertainty Component	Tolerances %	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Uncertainty 1g(%)	Uncertainty 10g(%)
	,,			(-9)	(109)	.9(70)	109(10)
Measurement System Related	ł						
Probe Calibration	6	N	1	1	1	6	6
Axial Isotropy	3	R	$\sqrt{3}$	√ (1-Cp)	√ (1-Cp)	1.22474	1.22474
Hemispherical Isotropy	4	R	√3	√ Cp	√ Cp	1.63299	1.63299
Boundary Effect	1	R	√3	1	1	0.57735	0.57735
Linearity	5	R	$\sqrt{3}$	1	1	2.88675	2.88675
System Detection Limits	1	R	$\sqrt{3}$	1	1	0.57735	0.57735
Readout Electronics	0.5	N	1	1	1	0.5	0.5
Response Time	0.2	R	$\sqrt{3}$	1	1	0.11547	0.11547
Integration Time	2	R	$\sqrt{3}$	1	1	1.1547	1.1547
RF Ambient Conditions	3	R	$\sqrt{3}$	1	1	1.73205	1.73205
Probe Positioner Mechanical Tolerances	2	R	√3	1	1	1.1547	1.1547
Probe Positioning with respect to Phantom Shell	1	R	√3	1	1	0.57735	0.57735
Extrapolation, Interpolation and integration Algorithms for Max. SAR Evaluation.	1.5	R	√3	1	1	0.86603	0.86603
Test Sample Related							
Test Sample Positioning	1.5	N	1	1	1	1.5	1.5
Device Holder Uncertainty	5	N	1	1	1	5	5
Output Power Variation – SAR Drift measurement	3	R	√3	1	1	1.73205	1.73205
Phantom and Tissue Paramet	ers Related						
Phantom Uncertainty (Shape and thickness Tolerances)	4	R	$\sqrt{3}$	1	1	2.3094	2.394
Liquid Conductivity – deviation from target value	5	R	√3	0.64	0.43	1.84752	1.2413
Liquid Conductivity – Measurement Uncertainty	2.5	N	1	0.64	0.43	1.6	1.075
Liquid Permittivity – deviation from target value	3	R	√3	0.6	0.49	1.03923	0.8487
Liquid Permittivity – Measurement Uncertainty	2.5	N	1	0.6	0.49	1.5	1.225
			Combined	Standard U	Incortaints	9.66051 %	9.52428 %
Evnandad	Standard Uncort	ainty ( K=2 , con			nicertainty	18.9346 %	18.6676 %
⊏xpanded	Stantuaru Unicen	anny ( N-2 , CON	iluelice 957	0)		10.9340 %	10.0070 %

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 30 of 93 www.siemic.cor

### **8 OUTPUT POWER VERIFICATION**

#### **Test Condition:**

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The base station simulator was connected to the antenna terminal.

2 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

3 Environmental Conditions

Temperature 23°C
Relative Humidity 58%
Atmospheric Pressure 1019mbar

4 Test Date: Oct 24th 2011 Tested By: David Zhang

#### **Test Procedures:**

#### Mobile phone radio output power measurement

- 1. The transmitter output port was connected to base station emulator.
- 2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
- 3. Select lowest, middle, and highest channels for each band and different possible test mode.
- 4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

#### Other radio output power measurement

The output power was measured using power meter at low, mid, and hi channels.

#### **Test Configuration:**

EUT supports GSM mode and GPRS multislot class 12. The measurement was made under GSM voice call mode, and each possible different uplink configuration, including 1 UL slots, 2 UL slots, 3 and 4 UL slots

#### Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

**Remark:** Time slot duty cycle factor = 10 \* log (1 / Time Slot Duty Cycle)

Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB

#### Test Result:

#### **GSM Mode:**

Frequency Band	Channel No.	Frequency	Conducted Average Burst Power(dBm)	Duty Cycle Factor (dB)	Time Averaged Burst Power(dBm)
	Low(128)	824.2	32.20	9.03	23.17
GSM850	Mid(190)	836.4	32.26	9.03	23.23
	High(251)	848.8	32.20	9.03	23.17
	Low(512)	1850.2	28.30	9.03	19.27
GSM1900	Mid(661)	1880.0	28.34	9.03	19.31
	High(810)	1909.8	28.57	9.03	19.54

#### **GPRS Mode:**

For GSM/GPRS body SAR testing, the EUT was set in GPRS multi-class 12 with 2 uplink slots due to maximum source-base time-averaged output power as following table:

THAXIIII GOAL	Test Configuration: GPRS multislot, GMSK modulation,MCS4 coding scheme							
Frequency Band	Slot Config	Channel No.	Frequency (MHz)	Conducted Average Burst Power(dBm)	Duty Cycle Factor (dB)	Time Averaged Burst Power(dBm)		
		Low(128)	824.20	32.16	9.03	23.13		
	1 UL Slot	Mid(190)	836.40	32.22	9.03	23.19		
		High(251)	848.80	32.17	9.03	23.14		
CDDS950	2 UL Slot 3 UL Slot	Low(128)	824.20	31.36	6.02	25.34		
GFR3030		Mid(190)	836.40	31.47	6.02	25.45		
		High(251)	848.80	31.38	6.02	25.36		
		Mid(190)	836.40	27.69	4.26	23.43		
	4 UL Slot	Mid(190)	836.40	26.45	3.01	23.44		
		Low(512)	1850.20	28.29	9.03	19.26		
	1 UL Slot	Mid(661)	1880.00	28.32	9.03	19.28		
	1 UL 3101	High(810)	1909.80	28.54	9.03	19.51		
CDDC4000		Low(512)	1850.20	27.49	6.02	21.47		
GPK31900	GPRS1900 2 UL Slot	Mid(661)	1880.00	27.51	6.02	21.49		
		High(810)	1909.80	27.87	6.02	21.85		
	3 UL Slot	High(810)	1909.80	24.99	4.26	20.73		
	4 UL Slot	High(810)	1909.80	23.73	3.01	20.72		

#### **Bluetooth Measurement Result**

Channel No.	Frequency (MHz)	Conducted Average Burst Power(dBm)	Duty Cycle Factor (dB)	Time Averaged Burst Power(dBm)
0	2402	1.01	0	1.01
39	2441	1.17	0	1.17
78	2480	0.92	0	0.92

### 9 SAR TEST RESULTS

#### **Test Condition:**

SAR Measurement

The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.

Measurement Uncertainty: See page 26 for detail

3 Environmental Conditions Temperature 23°C

Relative Humidity 53% Atmospheric Pressure 1019mbar

4 Test Date : Oct 24th 2011 Tested By :David Zhang

#### **Test Procedures:**

- 1. Establish communication link between EUT and base station emulation by air link.
- 2. Consider the SAR test reduction per FCC KDB guide line. For GSM/GPRS/EGPRS, set EUT into highest output power channel with test mode which has the maximum source-based time-averaged burst power listed in power table. If the source-based time-average output power for each data mode of GPRS is lower than that in normal GSM mode, then testing under GPRS mode is not necessary.
- 3. Place the EUT in the selected test position. (Cheek, tilt or flat)
- 4. Perform SAR testing at highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
- 4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

SAR measurement system will proceed the following basic steps:

- 1. Initial power reference measurement
- 2. Area Scan
- 3. Zoom Scan
- 4. Power drift measurement

#### **Test Configuration:**

EUT was tested under GSM voice call mode for head SAR. Testing on GPRS was performed under 2 uplink slots mode body SAR because this mode has greater source-based time averaged power than other uplink slot mode.

Crest factor is 8 for GSM and GPRS multi-slot class 8, 4 for GPRS multi-slot class 12 with 2 UL slots.

Co-located SAR, according to KDB 447498 and KDB 648474, other reference document: KDB 941225

### **Test Result:**

#### **Left Head Side**

Test Configuration , Left Head , Touch /Tilt			Crest Factor : 8	3 [	Date of Measured : C	Oct 24th 2011
	T	I		CAD 40~	CAD 4a	1 ::4
Freq Band	Mode	Channel	Position	SAR 10g (W/kg)	SAR 1g (W/kg)	Limit (W/kg)
GSM850	Voice call	Mid	Cheek	0.422	0.602	1.6
GSM850	Voice call	Mid	Tilt(15°)	0.330	0.446	1.6
GSM1900	Voice call	High	Cheek	0.176	0.325	1.6
GSM1900	Voice call	High	Tilt(15°)	0.148	0.267	1.6

#### **Right Head Side**

Test Configuration , Right Head , Touch /Tilt			Crest Factor : 8	3	Date of Measured : 0	Oct 24th 2011
Freq Band	Mode	Channel	Position	SAR 10g (W/kg)	SAR 1g (W/kg)	Limit (W/kg)
GSM850	Voice call	Mid	Cheek	0.469	0.632	1.6
GSM850	Voice call	Mid	Tilt(15°)	0.328	0.430	1.6
GSM1900	Voice call	High	Cheek	0.152	0.311	1.6
GSM1900	Voice call	High	Tilt(15°)	0.156	0.295	1.6

#### Body Worn (Separation distance: 1.5cm)


Test Configuration , <b>Body</b>			Crest Factor : 4		Date of Measured : Oct 24th 2011	
Freq Band	Mode	Channel	Position	SAR 10g (W/kg)	SAR 1g(W/kg)	Limit (W/kg)
GPRS850	Voice call	Mid	LCD up	0.183	0.377	1.6
GPRS850	Voice call	Mid	LCD down	0.490	0.710	1.6
GPRS1900	Voice call	High	LCD up	0.083	0.136	1.6
GPRS1900	Voice call	High	LCD down	0.183	0.377	1.6

#### **Bluetooth Mode**

No stand-alone SAR testing for BT was required because of the low output power.1.31mW< Pref(12 mW)

#### KDB648474 & Simultaneous SAR Evaluation.


#### **Antenna Separation Information:**

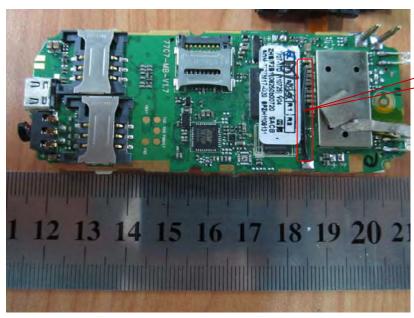

Bluetooth Antenna

> GSM Antenna

PCB Board view1

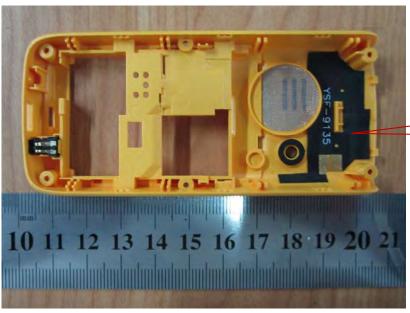

PCB Board view2

Test Case	TX Ant1	TX Ant2	The shortest distance between Ant & Ant2 (mm)
1	GSM	ВТ	7mm

Antenna Pair	Justification	Simultaneous SAR required ?
BT / WWAN	BT and GSM Antenna separation is 0.7cm, which is less than 2.5cm, and the maximum output power is 1.31mW< Pref(12 mW).But the maximum 1g SAR value is 0.710W/kg<1.2W/kg. So no stand-alone SAR for BT.	No

#### **SAR** measurement Plots

Test mode: GSM850, middle channel (Right Head Cheek)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000 (Right Head , Cheek)	
Relative permitivity (real part)	41.588	
Conductivity (S/m)	0.8987	
Crest factor	8.0	
Conversion Factor	6.04	
Variation (%)	0.020000	
SAR 10g (W/Kg)	0.469	
SAR 1g (W/Kg)	0.632	


#### **SURFACE SAR**

#### **VOLUME SAR**





### SAR, Z Axis Scan (X = -24, Y = -10)

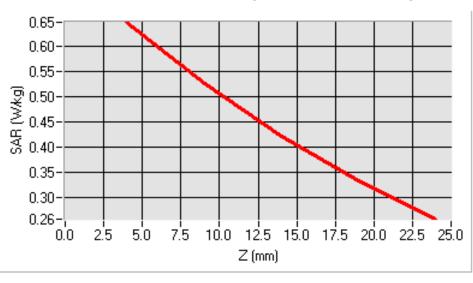



Test mode: GSM850, middle channel (Right Head Tilt)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000 (Right Head , Tilt)
Relative permitivity (real part)	41.588
Conductivity (S/m)	0.8987
Crest factor	8.0
Conversion Factor	6.04
Variation (%)	-2.010000
SAR 10g (W/Kg)	0.328
SAR 1g (W/Kg)	0.430


### **SURFACE SAR**

### **VOLUME SAR**





### SAR, Z Axis Scan (X = -18, Y = -9)

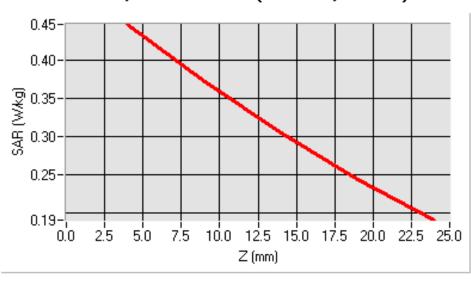



Test mode: GSM850, middle channel (Left Head Cheek)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000 (Left Head , Cheek)
Relative permitivity (real part)	41.588
Conductivity (S/m)	0.8987
Crest factor	8.0
Conversion Factor	6.04
Variation (%)	-0.500000
SAR 10g (W/Kg)	0.422
SAR 1g (W/Kg)	0.602


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -31, Y = -16)

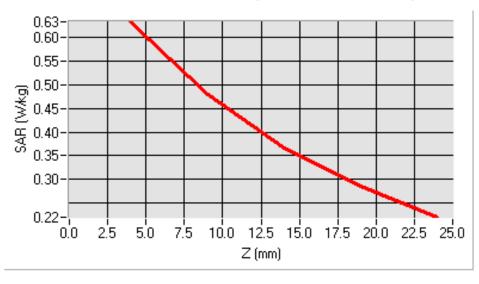



Test mode: GSM850, middle channel (Left Head Tilt)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000 (Left Head, Tilt)		
Relative permitivity (real part)	41.588		
Conductivity (S/m)	0.8987		
Crest factor	8.0		
Conversion Factor	6.04		
Variation (%)	-2.500000		
SAR 10g (W/Kg)	0.330		
SAR 1g (W/Kg)	0.446		


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -14, Y = -5)

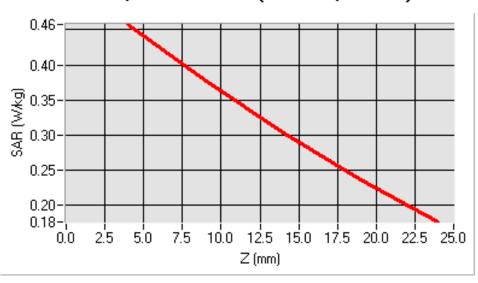



Test mode: GSM850, middle channel (Body-LCD UP)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000 (Body, LCD UP)
Relative permitivity (real part)	55.101
Conductivity (S/m)	0.9752
Crest factor	4.0
Conversion Factor	6.21
Variation (%)	-2.340000
SAR 10g (W/Kg)	0.183
SAR 1g (W/Kg)	0.377


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -8, Y = -24)

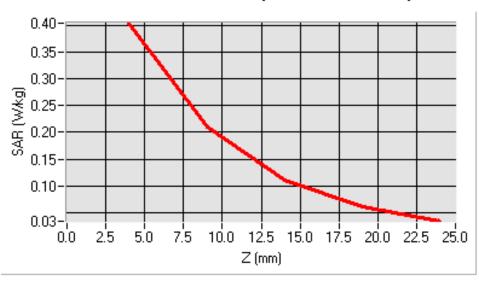



Test mode: GSM850, middle channel (Body-LCD DOWN)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	836.400000
	(Body, LCD DOWN)
Relative permitivity (real part)	55.101
Conductivity (S/m)	0.9752
Crest factor	4.0
Conversion Factor	6.21
Variation (%)	-1.010000
SAR 10g (W/Kg)	0.499
SAR 1g (W/Kg)	0.710


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = 1, Y = -18)

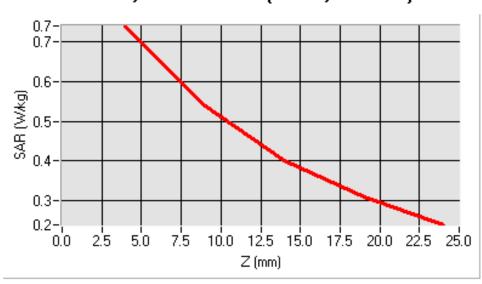



Test mode: GSM1900, High channel (Right Head Cheek)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1909.800000 (Right Head , Cheek)
Relative permitivity (real part)	41.230
Conductivity (S/m)	1.385
Crest factor	8.0
Conversion Factor	6.18
Variation (%)	-3.660000
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.311


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -14, Y = 5)

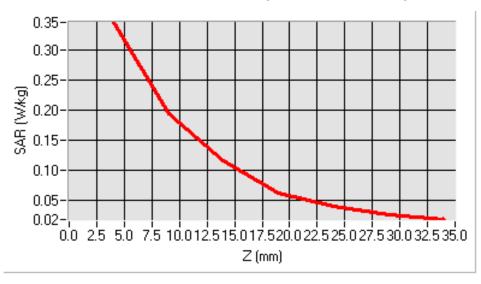



Test mode: GSM1900, High channel (Right Head Tilt)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1909.800000 (Right Head , Tilt)
Relative permitivity (real part)	41.230
Conductivity (S/m)	1.385
Crest factor	8.0
Conversion Factor	6.18
Variation (%)	1.780000
SAR 10g (W/Kg)	0.156
SAR 1g (W/Kg)	0.295


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -16, Y = -1)

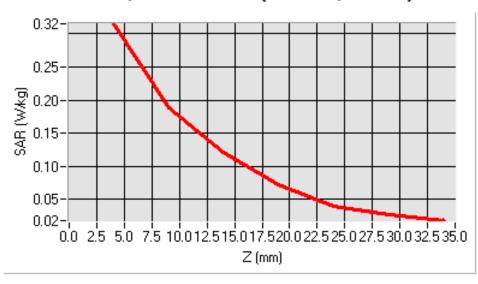



Test mode: GSM1900, High channel (Left Head Cheek)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1909.800000 (Left Head , Cheek)
Relative permitivity (real part)	41.230
Conductivity (S/m)	1.385
Crest factor	8.0
Conversion Factor	6.18
Variation (%)	-2.770000
SAR 10g (W/Kg)	0.176
SAR 1g (W/Kg)	0.325


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -9, Y = -9)

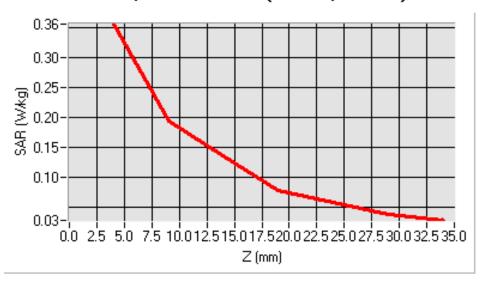



Test mode: GSM1900, High channel (Left Head Tilt)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1909.800000 (Left Head , Tilt)
Relative permitivity (real part)	41.230
Conductivity (S/m)	1.385
Crest factor	8.0
Conversion Factor	6.18
Variation (%)	1.760000
SAR 10g (W/Kg)	0.148
SAR 1g (W/Kg)	0.267


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -8, Y = -9)

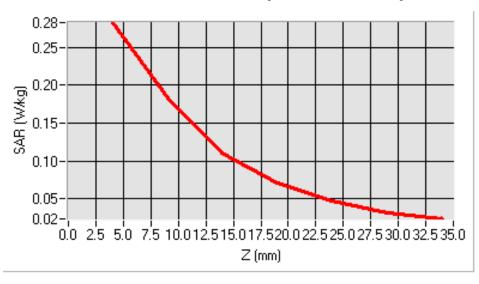



Test mode: GSM1900, High channel (Body LCD-UP)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequency (MHz)	1909.800000 (Body, LCD UP)
Relative permitivity (real part)	53.547
Conductivity (S/m)	1.530
Crest factor	4.0
Conversion Factor	6.38
Variation (%)	-1.490000
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.136


# **SURFACE SAR**

# **VOLUME SAR**





# SAR, Z Axis Scan (X = -7, Y = 41)

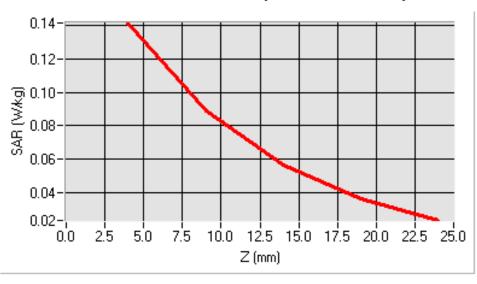



Test mode: GSM1900, High channel (Body LCD-DOWN)

**Product Description: Mobile Phone** 


Model: N78BT


Test Date: Oct 24th 2011

Frequencfy (MHz)	1909.800000 (Body, LCD DOWN)	
Relative permitivity (real part)	53.547	
Conductivity (S/m)	1.530	
Crest factor	4.0	
Conversion Factor	6.38	
Variation (%)	0.610000	
SAR 10g (W/Kg)	0.183	
SAR 1g (W/Kg)	0.377	


# **SURFACE SAR**

# VOLUME SAR





# SAR, Z Axis Scan (X = -8, Y = -24)

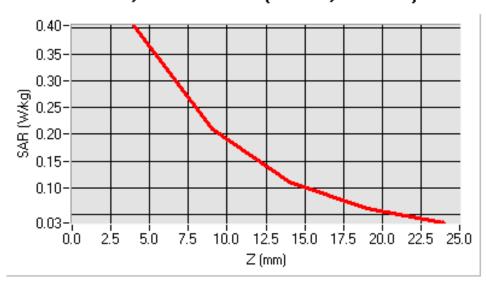

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 47 of 93 www.siemic.com

# **Annex A. TEST INSTRUMENT & METHOD**

# Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Due
PC	Compaq	PV 3.06GHz	375052-AA1	N/A
Signal Generator	Agilent	8665B-008	3744A10293	05/17/2012
MultiMeter	Keithley	MiltiMeter 2000	1259033	06/21/2012
S-Parameter Network Analyzer	Agilent	8753ES	US39173518	08/04/2012
Wireless Communication Test Set	R&S	CMU200	111078	07/22/2012
Power Meter	HP	437B	3038A03648	05/17/2012
E-field PROBE	SATIMO	SSE2	SN 18/11 EPG122	07/19/2012
DIPOLE 835	SATIMO	DIPOLE 835MHz	SN 18/11 DIPC 150	06/01/2012
DIPOLE 900	SATIMO	DIPOLE 900MHz	SN 18/11 DIPC 151	06/01/2012
DIPOLE 1800	SATIMO	DIPOLE 1800MHz	SN 18/11 DIPC 152	06/01/2012
DIPOLE 1900	SATIMO	DIPOLE 1900MHz	SN 18/11 DIPG 153	06/01/2012
DIPOLE 2000	SATIMO	DIPOLE 2000MHz	SN 18/11 DIPC 154	06/01/2012
DIPOLE 2450	SATIMO	DIPOLE 2450MHz	SN 18/11 DIPJ 155	06/01/2012
DIPOLE 3500	SATIMO	DIPOLE 3500MHz	SN 18/11 DIPC 156	06/01/2012
WaveGuide 5/6 GHz	SATIMO	Wave Guide 5/6GHz	SN 31/10 DIPWGA13	06/01/2012
COMOHAC E-Field Probe	SATIMO	EPH30	SN 24/11 EPH30	06/01/2012
COMOHAC H-Field Probe	SATIMO	HPH42	SN 43/10 HPH42	06/01/2012
COMOSAR Open Coaxial Probe	SATIMO	OCP43	SN 24/11 OCPG43	06/01/2012
T-Coil Probe	SATIMO	TCP21	SN 24/11 TCP21	06/01/2012
Communication Antenna	SATIMO	ANTA3	SN 20/11 ANTA 3	06/20/2012
Laptop POSITIONING DEVICE	SATIMO	LSH15	SN 24/11 LSH15	N/A
Mobile Phone POSITIONING DEVICE	SATIMO	MSH73	SN 24/11 MSH73	N/A
COMOHAC Broadband Dipole 800- 950	SATIMO	COMOHAC Broadband Dipole 800-950MHz	SN 24/11 DHA31	06/01/2012
COMOHAC Broadband Dipole 1700- 2000	SATIMO	COMOHAC Broadband Dipole 1700-2000MHz	SN 24/11 DHB32	06/01/2012
COMOHAC TELEPHONE MAGNETIC FIELD SIMULATOR	SATIMO	TMFS12	SN 24/11 TMFS12	06/01/2012
DUMMY PROBE	ANTENNESSA	DP41	SN 24/11DP41	N/A



Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 48 of 93 www.siemic.com

SAM PHANTOM	SATIMO	SAM87	SN 24/11 SAM87	N/A
Elliptic Phantom	SATIMO	ELLI20	SN 20/11ELLI20	N/A
PHANTOM TABLE	SATIMO	N/A	N/A	N/A
6 AXIS ROBOT	KUKA	KR5	949272	N/A
High Power Solid State Amplifier (80MHz~1000MHz)	Instruments for Industry	CMC150	M631-0408	N/A
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instruments for Industry	S41-25	M629-0408	N/A
Wave Tube Amplifier 4-8 GHz at 20Watt	Hughes Aircraft Company	1277H02F000	81	N/A

www.siemic.com

# **Annex B CALIBRATION REPORTS**

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 50 of 93 www.siemic.com



# COMOSAR E-Field Probe Calibration Report

Ref: ACR.200.1.11.SATU.A

# SIEMIC TESTING AND CERTIFICATION SERVICES

SUITE 311, BUILDING 1, SECTION 30 ,NO.2 KEFA ROAD, SCIENCE AND TECHNOLOGY PARK NAN SHAN DISTRICT, SHENZHEN 518057, GUANGDONG .P.R.C.

SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE SERIAL NO.: SN 18/11 EPG122

> Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



06/01/2011

#### Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 51 of 93 www.siemic.com



#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.200.1.11.SATU.A

	Name	Function	Date	Signature
Prepared by:	Jérôme LUC	Product Manager	7/19/2011	25
Checked by:	Jérôme LUC	Product Manager	7/19/2011	JS
Approved by:	Kim RUTKOWSKI	Quality Manager	7/19/2011	Hern Michingwish

	Customer Nume	
	SIEMIC Testing	
Distribution:	and Certification	
	Services	

Issue	Date	Modifications
A	7/19/2011	Initial release

| Serial# 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 52 of 93 | www.siemic.com



## COMOSA R E-FIELD PROBE CALIBRATION REPORT

Ref: ACR, 200.1.1 LSATU.A

#### TABLE OF CONTENTS

1	De	rice Under Test4	
2	Pro	duct Description4	
	2.1	General Information	2
3		asurement Method4	
	3.1	Linearity	2
	3.2	Sensitivity	- 4
	3.3	Lower Detection Limit	4
	3.4	Isotropy	
	3.5	Boundary Effect	
4	Me	asurement Uncertainty5	
5	Cal	ibration Measurement Results6	
	5.1	Sensitivity in air	- 6
	5.2	Linearity	7
	5.3	Sensitivity in liquid	7
	5.4	Isotropy	
6	Lis	of Equipment10	

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 53 of 93 www.siemic.com



#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR, 200.1.11, SATU.A.

#### 1 DEVICE UNDER TEST

Device Under Test			
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE		
Manufacturer	Satimo		
Model	SSE2		
Serial Number	SN 18/11 EPG122		
Product Condition (new / used)	new		
Frequency Range of Probe	0.7 GHz-6GHz		
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.189 MΩ		
	Dipole 2: R2=0.191 MΩ		
	Dipole 3: R3=0.184 MΩ		

A yearly calibration interval is recommended.

#### 2 PRODUCT DESCRIPTION

#### 2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 - Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2,5 mm
Distance between dipoles / probe extremity	1 mm

#### 3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

#### 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 54 of 93 www.siemic.com



#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR, 200, 1, 11, SATU, A

#### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

## 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

#### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis  $(0^{\circ}-180^{\circ})$  in  $15^{\circ}$  increments. At each step the probe is rotated about its axis  $(0^{\circ}-360^{\circ})$ .

#### 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

#### 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe	calibration in wave	guide			
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ĉi	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	√3	1	1.732%
Reflected power	3.00%	Rectangular	√3	1	1.732%
Liquid conductivity	5,00%	Rectangular	√3	1	2,887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2,309%
Field homogeneity	3,00%	Rectangular	$\sqrt{3}$	ŀ	1.732%
Field probe positioning	5,00%	Rectangular	$\sqrt{3}$	i	2.887%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 55 of 93 www.siemic.com



#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR. 200, 1, 11. SATU, A

Combined standard uncertainty		5,831%
Expanded uncertainty 95 % confidence level k = 2	4	11.662%

## 5 CALIBRATION MEASUREMENT RESULTS

	Calibration Parameters	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


## 5.1 SENSITIVITY IN AIR

	Normy dipole $2 (\mu V/(V/m)^2)$	
0.89	0.98	0.22

	DCP dipole 2	
(mV)	(mV)	(mV)
115	117	122

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{{E_1}^2 + {E_2}^2 + {E_3}^2}$$

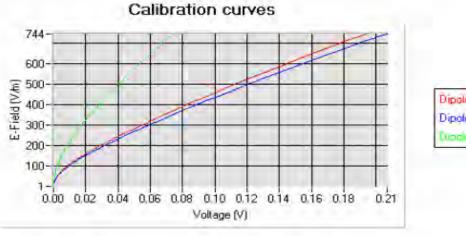

Dipole 1 Dipole 2 Dipole 3


Page: 6/10



#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR. 200.1.11, SATU.A

## 5.2 LINEARITY

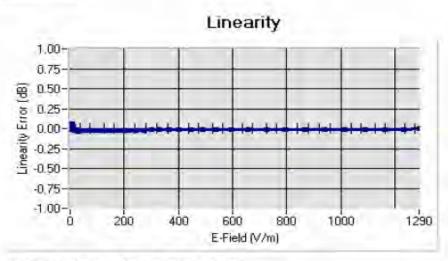

Linearity: I+/-1.47% (+/-0.06dB)

#### 5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvE
HL850	835	43.04	0.88	6.04
BL850	835	54,21	0.98	6.21
HL900	900	41.99	0.96	5.84
BL900	900	53,68	1.04	6.06
HL1800	1750	38,73	1.37	5.78
BL1800	1750	53,55	1.51	5.99
HL1900	1880	38,51	1.42	6.18
BL1900	1880	54.65	1.54	6.38
HL2000	1950	38,55	1.46	5.75
BL2000	1950	53,54	1.49	5.87
HL2450	2450	38.77	1.88	5.81
BL2450	2450	52,36	1.97	5.98
HL3500	3500	38.69	2.87	6.03
BL3500	3500	51.87	3.21	6.27
HL5200	5200	36,80	4.87	4.93
BL5200	5200	49.25	5.06	5.09
HL5500	5500	35.83	5.35	4.69
BL5500	5500	48.28	5.58	4.91
HL5800	5800	34,75	5.7.7	4.71
BL5800	5800	47.51	6.07	4.84

LOWER DETECTION LIMIT: 7mW/kg

 Serial#
 11070025-SAR

 Issue Date
 Oct 24th 2011

 Page
 57 of 93

 www.siemic.com




#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR. 200.1.11.SATU.

#### 5.4 ISOTROPY


## HL900 MHz

- Axial isotropy: 0.05 dB - Hemispherical isotropy: 0.07 dB



# HL1800 MHz

- Axial isotropy: 0.05 dB - Hemispherical isotropy: 0.08 dB



Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 58 of 93 www.siemic.com




#### COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR, 200.1.11.SATU.A

HL5500 MHz

- Axial isotropy: 0.09 dB - Hemispherical isotropy: 0.13 dB





## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR, 200.1.11.SATU.A

# 6 LIST OF EQUIPMENT

Equipment Summary Sheet						
Equipment Description	Manufacturer / Model	identification No.	Current Calibration Date	Next Calibration Date		
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated, No ca required.		
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.		
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013		
Reference Probe	Satimo	EP 94 SN 37/08	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Multimeter	Keithley 2000	1188656	11/2010	11/2013		
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	11/2010	11/2013		
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated, No cat required,		
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated, No cal required.		
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated, No cal required.		
Temperature / Humidity Sensor	Control Company	11-661-9	3/2010	3/2012		

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 60 of 93 www.siemic.com



# SAR Reference Dipole Calibration Report

Ref: ACR.158.4.11.SATU.A

# SIEMIC TESTING AND CERTIFICATION SERVICES

SUITE 311, BUILDING 1, SECTION 30 ,NO.2 KEFA ROAD, SCIENCE AND TECHNOLOGY PARK NAN SHAN DISTRICT, SHENZHEN 518057, GUANGDONG ,P.R.C.

# SATIMO COMOSAR REFERENCE DIPOLE

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



06/01/2011

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

| Serial# 11070025-SAR |
| Issue Date | Oct 24th 2011 |
| Page | 61 of 93 |
| www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR 158.4.11.5ATU.A

	Name	Function	Dute	Signature
Prepared by:	Jérôme LUC	Product Manager	6/7/2011	JS
Checked by:	Jérôme LUC	Product Manager	6/7/2011	JES
Approved by:	Kim RUTKOWSKI	Quality Manager	6/7/2011	them therthousted

	Customer Name
Distribution :	SIEMIC Testing and Certification Services

Issue	Dute	Modifications	
A	6/7/2011	Initial release	



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158.4.11.5ATU.A

## TABLE OF CONTENTS

1	Int	oduction4	
2	De	vice Under Test4	
3	Pro	duct Description4	
	3.1	General Information	4
4		asurement Method5	
	4.1	Return Loss Requirements	- 5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty5	
	5.1	Return Loss	5
	5.2	Dimension Measurement	_ 5
	5.3	Validation Measurement	5
6	Cal	ibration Measurement Results	
	6.1	Return Loss	6
	6.2	Mechanical Dimensions	6
7	Val	idation measurement7	
	7.1	Measurement Condition	7
	7.2	Head Liquid Measurement	,7
	7.3	Measurement Result	8
8	Lis	t of Equipment8	

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 63 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR, 158.4.11. SATULA.

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

Device Under Test		
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE	
Manufacturer	Satimo	
Model	SID835	
Serial Number	SN 18/11 DIPC150	
Product Condition (new / used)	new	

A yearly calibration interval is recommended.

#### 3 PRODUCT DESCRIPTION

## 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 64 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158,4,11.SATU,A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

#### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

## 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

## 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

# 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	16,19 %
10 g	15.86 %

Page: 5/9




#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref; ACR. 158,4,11.SATU,A

#### 6 CALIBRATION MEASUREMENT RESULTS

## 6.1 RETURN LOSS

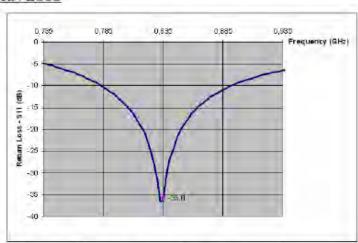

Frequency (MHz)	Return Loss (dB)	Requirement (dB)
835	-35.8	-20

## 6.2 MECHANICAL DIMENSIONS

Frequency MH2: L		m h mm		im	n d	
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		5.35 ±1 %.	
450	290.0 ±1 %.		166.7 ±1 %.		5.35 ±1 %.	
750	176.0 ±1 %.	-	100.0 ±1.%.		6.35 ±1 %.	
835	161.0 ±1 %.	PASS.	89.8 ±1 %.	PASS	3.6 ±1 %.	PASS
900	149.0 ±1 %.		83,3 ±1 %.		3.6 ±1%.	
1450	89.1 ±1 %.	-	51.7±1 %.		3.6 ±1%.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1.%		45.7±1%.		3.6 ±1 %.	
1750	75,2 ±1 %.	Ī	42.9 ±1 %.		3.6 ±1.%	
1800	72.0 ±1 %.		41.7±1%.		3.6 ±1.96.	
1900	68.0 ±1.%	-	39.5±1%.		3.5±1%.	
1950	66,3 ±1%.		38,5 ±1 %.		3.6 ±1.%,	
2000	54.5 ±1 %.		37.9 ±1 %.		3.6 ±1 %	
2100	61.0 ±1%.		35.7±1%.		3.6 ±1 %.	
2300	55.5 ±1%.	7	32.6 ±1 %.		3.6 ±1%,	
2450	51.5±1%.		30.4±1%.		3.6 ±1 %.	
2600	48.5 ±1.%		28.8 ±1 %.		3.6 ±1 %	
3000	41.5 ±1%.	7	25.0 ±1 %.		3.6 ±1%	
3500	37.0±1 %.		26.4±1 %.		3.6 ±1 %	
3700	34,7±1 %.		26.4±1 %.		3.6 ±1 %	-

Page: 6/9

| Serial# 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 66 of 93 | www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR, 158,4.11.SATU.A

#### 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 MEASUREMENT CONDITION

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps' : 43.0 sigma : 0.88
Distance between dipole center and liquid	15.0 mm
A rea scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

#### 7.2 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε,')		Conductiv	ity (a) 5/m
	required	measured	required	measured
300	A5.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %	1	0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	A1.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41,5 25 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4±5%	1	1.23 ±5 16	
1640	40,2±5%		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5.%	
1900	40,0 ±5 %	, -	1.40 ±5 %	
1950	40.0±5.%		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39,8±5%		1.49 ±5 %	
2300	39.5 ±5.%		1.67.±5%	
2450	39.2 ±5 %	-	1.80 ±5 %	
2600	39.0±5%		1.96 ±5 %	
3000	38.5 ±5.%	1	2.40.±5%	
3500	37.9 ±5 %	4-	2.91 ±5 %	

Page: 7/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 67 of 93 www.siemic.com




#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref; ACR, 158.4.11, SATU.A

#### 7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency MHz	I g SAR (W/kg/W)		10 g SAR	(W/kg/W)
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3,06	
750	8.49		5.55	
835	9.56	9.59 (0.96)	6,22	6.25 (0.62)
900	10.9		6.99	
1450	29		16	
1900	30.5		16,8	
1640	34,2		18.4	
1750	36.4		19,3	
1800	38.4		20,1	
1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21,1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4	1	24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

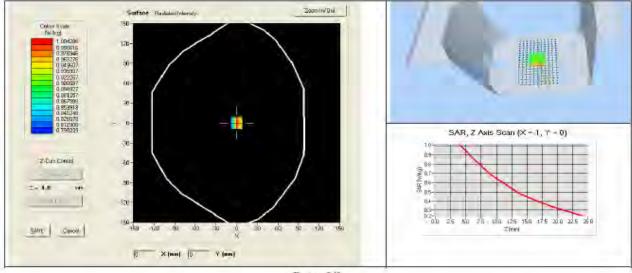

Page: 8/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 68 of 93 www.siemic.com



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR. 158.4.1 I. SATU, A

## 8 LIST OF EQUIPMENT

Equipment Summary Sheet					
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013	
Calipers	Carrera	GALIPER-01	12/2010	12/2013	
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to test. No cal required.	Characterized prior to test. No cal required,	
Multimeter	Keithley 2000	1188656	11/2010	11/2013	
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	11/2010	11/2013	
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Temperature and Humidity Sensor	Control Company	11-661-9	3/2010	3/2012	

| Serial# 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 69 of 93 | www.siemic.com



# SAR Reference Dipole Calibration Report

Ref: ACR.158.7.11.SATU.A

# SIEMIC TESTING AND CERTIFICATION SERVICES

SUITE 311, BUILDING 1, SECTION 30 ,NO.2 KEFA ROAD, SCIENCE AND TECHNOLOGY PARK NAN SHAN DISTRICT, SHENZHEN 518057, GUANGDONG .P.R.C.

# SATIMO COMOSAR REFERENCE DIPOLE

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



06/01/2011

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 70 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 158,7,11,5ATU,A

	Name	Function	Dute	Signature
Prepared by:	Jérôme LUC	Product Manager	6/7/2011	75
Checked by:	Jérôme LUC	Product Manager	6/7/2011	Jes
Approved by:	Kim RUTKOWSKI	Quality Manager	6/7/2011	them therethousted

	Customer Name
Distribution :	SIEMIC Testing and Certification Services

Issue	Dute	Modifications	
A	6/7/2011	Initial release	

| Serial# 11070025-SAR |
| Issue Date | Oct 24th 2011 |
| Page | 71 of 93 |
| www.siemic.com



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR 158.7.1 LSATULA

## TABLE OF CONTENTS

Ţ.		oduction4	
2	Des	rice Under Test4	
3		duct Description	
	3.1	General Information	4
4	Me	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty5	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement_	5
6	Cal	ibration Measurement Results	
	6.1	Return Loss	6
	6.2	Mechanical Dimensions	6
7	Val	idation measurement7	
	7.1	Measurement Condition	7
	7.2	Head Liquid Measurement	7
	7.3	Measurement Result	- 8
8	Lis	of Equipment	



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158.7.11.5ATU.A

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

#### 2 DEVICE UNDER TEST

Device Under Test		
Device Type	COMOSAR 1900 MHz REFERENCE DIPOLE	
Manufacturer	Satimo	
Model	SID1900	
Serial Number	SN 18/11 DIPG153	
Product Condition (new / used)	new	

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

## 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

| Serial# | 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 73 of 93 | www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158.7.11.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

#### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

#### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	16.19 %
10 g	15.86 %


Page: 5/9



Ref; ACR. 158,7,11.SATU,A

# 6 CALIBRATION MEASUREMENT RESULTS

# 6.1 RETURN LOSS

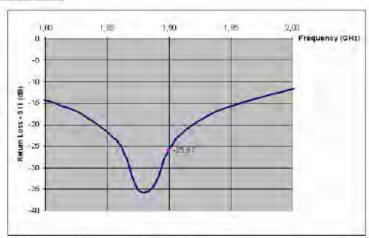

Frequency (MHz)	Return Loss (dB)	Requirement (dB)
1900	-25.9	-20

# 6.2 MECHANICAL DIMENSIONS

Frequency MHz	Ln	nm	h m	m	dr	nor
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1.%.		6,35 ±1 %.	
450	290:0 ±1 %.		166.7 ±1.%		5.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1.%		5,35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1%.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1%	
1450	89.1 ±1%.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1.%.		S0.0 ±1 %.		3,6 ±1%.	
1640	79.0 ±1 %.		45,7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0±1%.		41.7 ±1 %.		3.6 ±1%.	
1900	68.0 ±1 %.	PASS	39.5 ±1 %.	PASS	3.6 ±1 %.	PASS
1950	56.3 ±1.%.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1.16.		37.5 ±1.%.		3.6 ±1%.	
2100	61.0 ±1 %.		35,7 ±1 %.		3.6 ±1.%.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.	-	30.4±1.%.	-	3.6 ±1%.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1.%.	
3000	41.5±1%.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0±1 %.	-	26.4±136.		3.6 ±1%.	
3700	34.7±1 %.		26,4 ±1 %.		3.6 ±1 %,	

Page: 6/9



Ref. ACR. 158.7.1 LSATU.A.

#### 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

# 7.1 MEASUREMENT CONDITION

Software	OPENSAR V4
Phantom	SN 20/09 SAM7.1
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps' : 38:5 sigma : 1.42
Distance between dipole center and liquid	10.0 mm
A rea scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1900 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

#### 7.2 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative per	mittivity (ɛ,')	Conductivity (a) 5/m	
	required	measured	required	measured
300	45,3 ±5 %		0.87 ±5 %	
450	43.5±5%	-	D.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5±5%		0.90 ±5 %	
900	41.5±5%		0.97 ±5 %	
1450	40.5 ±5 %		1,20 ±5 %	
1500	40,4 ±5 %		1,23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1,37 ±5 %	
1800	40.0±5%		1.40 ±5 %	
1900	40.0±5%	PASS	1.40 ±5 %	PASS
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %	-	1.40.25%	
2100	39.8±5 %		1.49 ±5 %	
2300	39.5±5%		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0±5%		1,96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37,9±5 %	-	2.91 ±5 %	

Page: 7/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 76 of 93 www.siemic.com




#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR, 158.7.1 LSATU.A

# 7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency	1 g SAR	(W/kg/W)	10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85	1	1.94	
450	4,58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7	39.92 (3.99)	20.5	20.49 (2:05
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3	j.	24.6	
3000	63.8		25.7	
3500	67.1		25	

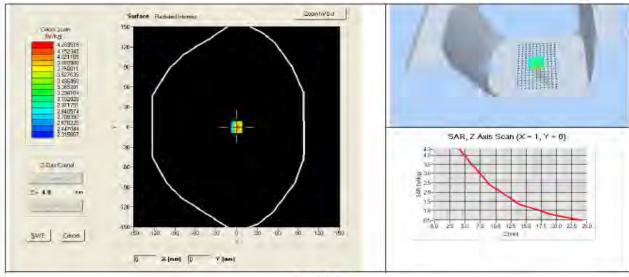

Page: 8/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 77 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158,7,1 LSATU, A

# 8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013
Calipers	Carrera	CALIPER-01	12/2010	12/2013
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Multimeter	Keithley 2000	1188656	11/2010	11/2013
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	11/2010	11/2013
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	3/2010	3/2012

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 78 of 93 www.siemic.com



# SAR Reference Dipole Calibration Report

Ref: ACR.158.9.11.SATU.A

# SIEMIC TESTING AND CERTIFICATION SERVICES

SUITE 311, BUILDING 1, SECTION 30 ,NO.2 KEFA ROAD, SCIENCE AND TECHNOLOGY PARK NAN SHAN DISTRICT, SHENZHEN 518057, GUANGDONG ,P.R.C.

# SATIMO COMOSAR REFERENCE DIPOLE

Calibrated at SATIMO US 2105 Barrett Park Dr. - Kennesaw, GA 30144



06/01/2011

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 79 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref ACR, 158.9.1 LSATULA

	Name	Function	Date	Signature
Prepared by:	Jérôme LUC	Product Manager	6/7/2011	Jes
Checked by:	Jérôme LUC	Product Manager	6/7/2011	75
Approved by:	Kim RUTKOWSKI	Quality Manager	6/7/2011	Min. Puthouste

	Customer Name
Distribution :	SIEMIC Testing and Certification Services

ions.	Date	Issue
	6/7/2011	A

| Serial# 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 80 of 93 | www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158.9.1 L.SATU.A

# TABLE OF CONTENTS

1 I	ntroduction	
2 D	Device Under Test	
3 P	Product Description	
3.1	General Information	
4 N	Measurement Method	
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5 A	Measurement Uncertainty	
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement_	5
6 C	Calibration Measurement Results	
6.1	Return Loss	6
6.2	Mechanical Dimensions	6
7 V	alidation measurement7	
7.1	Measurement Condition	7
7.2	Head Liquid Measurement	7
7.3	Measurement Result	8
8 L	ist of Equipment8	



Ref. ACR. 158.9.11. SATU.A.

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

### 2 DEVICE UNDER TEST

Device Under Test					
Device Type COMOSAR 2450 MHz REFERENCE DIPOLI					
Manufacturer	Satimo				
Model	SID2450				
Serial Number	SN 18/11 DIPJ155				
Product Condition (new / used)	new				

A yearly calibration interval is recommended.

### 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 82 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR, 158.9.11, SATU.A.

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

#### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Expanded Uncertainty on Return Lo		
0.1 dB		

#### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	16.19 %
10 g	15.86 %


Page: 5/9



Ref. ACR. 158.9.11.SATU, A

# 6. CALIBRATION MEASUREMENT RESULTS

# 6.1 RETURN LOSS

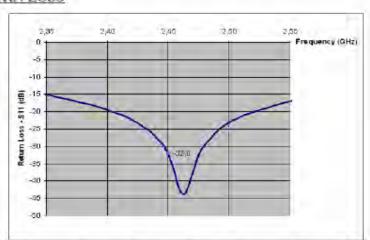

Frequency (MHz)	Return Loss (dB)	Requirement (dB)
2450	-32.00	-20

# 6.2 MECHANICAL DIMENSIONS

Frequency MHz	Lmm		h rora		d mm	
	required	measured	required	measured	required	measure
300	-420.0±1%.		250.0 ±1 %.		6.35 ±1.%.	
450.	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1%.	
750	176:0 ±1 %.		100:0 ±1.%.		5.35 ±1.%.	
835	161.0±1%.		89.8 ±1.%.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1:%		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7±1 %.		3.6 ±1 %	
1500	80.5 ±1 %.		50.0 ±1.%.		3.5±1%.	
1640	79.0 ±1 %.		45.7±1:%		3.6 ±1 %.	
1750	75,2 ±1 %.		42.9 ±1.%:		3.6±1%.	
1800	72.0 ±1 %.		41.7±1%		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1.%.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1.%.		3.6±1%.	
2000	64.5 ±1%.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %,		35.7±1%.		3.6 ±1 %.	
2300	55,5 ±1%.		32.6 ±1.%		3.6 ±1 %.	
2450	51.5 ±1%.	PASS	30.4±1 %.	PASS	3.6 ±1 %.	PASS
2600	48.5 ±1 %,		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1%.		25.0 ±1.%.		3.6±1%.	
3500	37.0±1 %		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7±1 %.		26.4±1%.		3.6 ±1 %.	

Page: 6/9



Ref. ACR. 158.9.11.SATU.A

### 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 MEASUREMENT CONDITION

Software	OPENSAR V4		
Phantom	SN 20/09 SAM71		
Probe	SN 18/11 EPG122		
Liquid	Head Liquid Values: eps' : 38,8 sigma : 1,88		
Distance between dipole center and liquid	10.0 mm		
Area scan resolution	dx=8mm/dy=8mm		
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm		
Frequency	2450 MHz		
Input power	20 dBm		
Liquid Temperature	21 °C		
Lab Temperature	21 °C		
Lab Humidity	45 %		

# 7.2 HEAD LIQUID MEASUREMENT

Frequency	Relative permittivity $(\varepsilon_{r}')$		Conductivity (a) S	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5%		0.97 ±5 %	
1450	40.5 ±5 %		1.20±5 %	
1500	40.4 ±5 %		1,23 ±5 %	
1640	40.2 ±5 %		1.31±5%	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0±5%		1.40 ±5 %	
2000	40.0±5%		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39,5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %	PASS	1.60 ±5 %	PA5S
2600	39.0 ±5 %		1.96±5%	
3000	38,5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2,91±5%	

Page: 7/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 85 of 93 www.siemic.com




# SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref; ACR. 158.9.11. SATU, A

# 7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency MHz	1 g 5AR (W/kg/W)		10 g SAR (W/kg/	
	required	measured	required	measured
300	2.85		1,94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6,99	
1,050	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36,4		19.3	
1800	38.4		20.1	
1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23,3	
2450	52.4	53.82 (5,38)	24	24.12 (2.41
2600	55.3		24.6	
3000	63.8		25.7	
3500	57.1		25.	

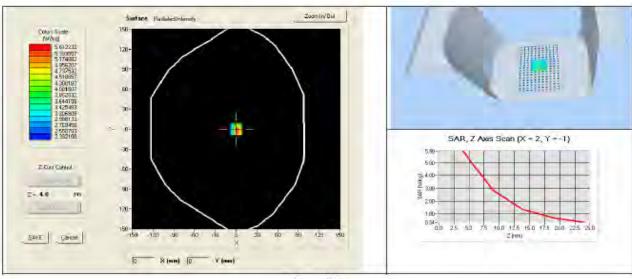

Page: 8/9

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 86 of 93 www.siemic.com



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR. 158,9,11.SATU,A

# 8 LIST OF EQUIPMENT

Equipment Summary Sheet						
Equipment Description	Manufacturer / Model	Identification No.	Corrent Calibration Date	Next Calibration Date		
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.		
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.		
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013		
Calipers	Carrera	CALIPER-01	12/2010	12/2013		
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Multimeter	Keithley 2000	1188656	11/2010	11/2013		
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	11/2010	11/2013		
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Temperature and Humidity Sensor	Control Company	11-661-9	3/2010	3/2012		

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 87 of 93 www.siemic.com

# Annex C SAR System PHOTOGRAPHS



Liquid depth ≥ 15cm




# Annex D SETUP PHOTOGRAPHS

# **Right Head Touch View**



**Right Head Tilt View** 

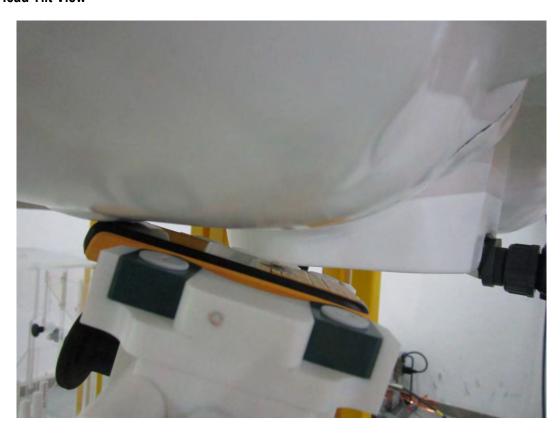


Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 89 of 93 www.siemic.com


# **Left Head Touch View**




# **Left Head Tilt View**

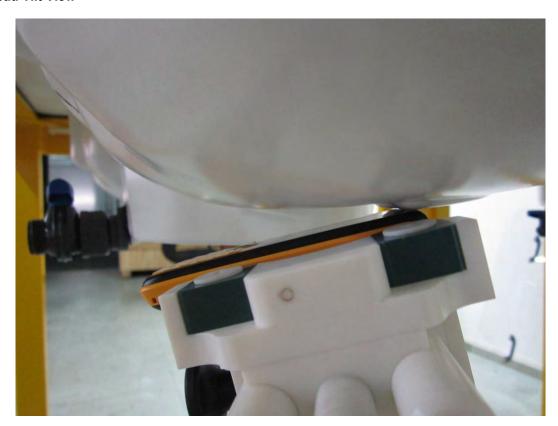

# **Body Setup Photo (LCD UP)**

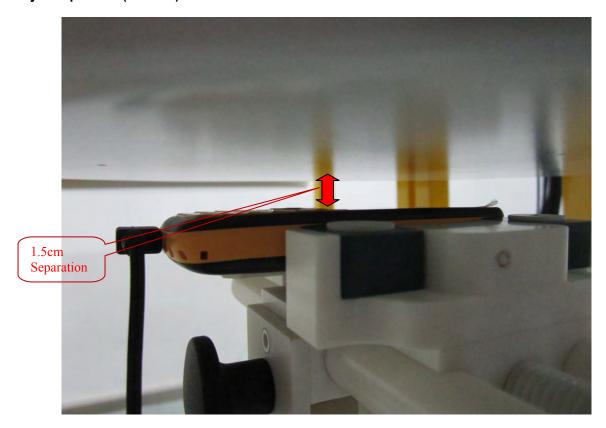

# **Body Setup Photo (LCD DOWN)**

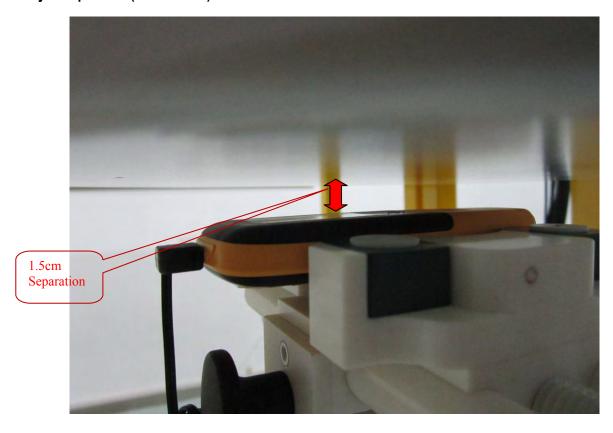

Serial# 11070025-SAR Issue Date Oct 24th 2011 Page 91 of 93 www.siemic.com

# **Annex E EUT PHOTO**

# **EUT-Front Side View**



**EUT-Back Side View** 



| Serial# 11070025-SAR | Issue Date | Oct 24th 2011 | Page | 92 of 93 | www.siemic.com

# **EUT-Battery Uncover View**



# **EUT-Bottom Side View**



# **EUT-Top Side View**

