FCC Test Report

Report No.: AGC00V121004-4F2A

FCC ID : Z3JQT600

PRODUCT DESIGNATION: GSM Mobile Phone

BRAND NAME : G'FIVE

MODEL NAME : QT600

CLIENT : G'FIVE INTERNATIONAL LIMITED

DATE OF ISSUE : Oct.31, 2012

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 50

VERIFICATION OF COMPLIANCE

Applicant	G'FIVE INTERNATIONAL LIMITED			
Applicant:	Unit 1, 16/F, Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong			
	Kingtech Telecom (Shenzhen) Co., Ltd.			
Manufacturer:	Floor 3, Building A, No.3, Road 1 of Shangxue Dengxinkeng Industry Park, Bantian Street, Longgang District, Shenzhen City, PRC			
Product Designation:	GSM Mobile Phone			
Brand name:	G'FIVE			
Test Model:	QT600			
FCC ID:	Z3JQT600			
Report Number:	AGC00V121004-4F2A			
Date of Test:	Oct.22, 2012 to Oct.29, 2012			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Bart Xie Oct.31, 2012

Reviewed By:

Forrest Lei Oct.31, 2012

Approved By:

Solger Zhang Oct.31, 2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 MEASUREMENT INSTRUMENTS	5
1.6 SPECIAL ACCESSORIES	5
1.7 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 GENERAL TECHNICAL REQUIREMENTS	6
2.4 CONFIGURATION OF EUT SYSTEM	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	7
5. OUTPUT POWER	8
5.1 CONDUCTED OUTPUT POWER	8
5.2 RADIATED OUTPUT POWER	10
6. SPURIOUS EMISSION	11
6.1 CONDUCTED SPURIOUS EMISSION	12
6.2 RADIATED SPURIOUS EMISSION	14
7. CONDUCTED EMISSION	17
7.1 MEASUREMENT METHOD	18
7.2 PROVISIONS APPLICABLE	18

7.3 MEASUREMENT RESULT	19
8. FREQUENCY STABILITY	21
8.1 MEASUREMENT METHOD	21
8.2 PROVISIONS APPLICABLE	21
8.3 MEASUREMENT RESULT	22
9. OCCUPIED BANDWIDTH	23
9.1 MEASUREMENT METHOD	24
9.2 PROVISIONS APPLICABLE	24
9.3 MEASUREMENT RESULT	24
10. EMISSION BANDWIDTH	25
10.1 MEASUREMENT METHOD	25
10.2 PROVISIONS APPLICABLE	25
10.3 MEASUREMENT RESULT	25
11. BAND EDGE	26
11.1 MEASUREMENT METHOD	26
11.2 PROVISIONS APPLICABLE	26
11.3 MEASUREMENT RESULT	26
APPENDIX I_TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	27
APPENDIX II_TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	35
APPENDIX III_TEST PLOTS FOR BAND EDGES	39
APPENDIX IV_PHOTOGRAPHS OF TEST SETUP	42
APPENDIX V PHOTOGRAPHS OF EUT	44

Page 4 of 50

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	GSM Mobile Phone			
Hardware Version:	C120_V1.02_PCB(111017)			
Software Version:	6252_11B_C120_JWT_ML_A_v15			
FCC ID:	Z3JQT600			
Frequency Bands:	☑GSM 850☑PCS 1900 (U.S. Bands)☑GSM 900☑DCS 1800 (Non-U.S. Bands)			
Antenna:	Integrated Antenna			
Antenna gain:	1.0dBi			
Battery parameter:	DC3.7V/1100 mAh			
Adapter Input:	AC100-240V, 50-60Hz,0.1A			
Adapter Output:	DC5.0V, 450mA			
Output Power:	30.64 dBm Maximum ERP measured for GSM 850 31.64 dBm Maximum Average Burst Power for GSM 850 28.48 dBm Maximum EIRP measured for GSM 1900 28.75 dBm Maximum Average Burst Power for GSM 1900			
Dual SIM Card:	The result for SIM1 is the worst case which was only recorded			
GPRS Class:	12			
Extreme Vol. Limits:	DC3.4 V to DC4.2 V (Nominal DC3.7 V)			
Extreme Temp. Tolerance:	-10°C to +50°C			
** Note: The High Voltage DC	4.2V and Low Voltage DC3.4V were declared by manufacturer, The			

^{**} Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The EUT could not operate normally with higher or lower voltage.

Other functions have been performed according to verification procedure except for MS function. SIM1 can't transmit with SIM2 simultaneously.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: Z3JQT600** filing to comply with the FCC Part 22H and 24E requirements.

Page 5 of 50

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2013.7.17
TEST RECEIVER	R&S	ESCI	A0304218	2013.7.17
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2013.7.17
COMMUNICATION TESTER	R&S	CMU200	A0304247	2013.7.17
TEST RECEIVER	ROHDE&SCHWARZ	ESCI	A0304230	2013.7.17
LISN	R&S	ESH3-Z5	A0304233	2013.7.17
CLIMATE CHAMBER	ALBATROSS			2013.7.17
Loop Antenna	A.H.	SAS-562B	SEL0097	2013.7.17
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2013.7.17
Horn Antenna	EM	EM-AH-10180	N/A	2013.7.17

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 6 of 50

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	lto	FCC Rules		
4	Output Dower	Conducted	22.042(a) / 24.222 (b)	
1	Output Power	Radiated	22.913(a) / 24.232 (b)	
2	Spurious	Conducted Spurious Emission	2.4054 / 22.047 / 24.229	
2	Emission	Radiated Spurious Emission	2.1051 / 22.917 / 24.238	
3	Mains Conducted I	Emission	15.107 / 15.207	
4	Frequency Stability	Frequency Stability		
5	Occupied Bandwidth		2.1049 (h)(i)	
6	Emission Bandwidth		22.917(b) / 24.238 (b)	
7	Band Edge		22.917(b) / 24.238 (b)	

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	GSM mobile phone	G'FIVE	FCC ID: Z3JQT600	EUT
2	Adapter	G'FIVE	DC5.0V / 450mA	Accessory
3	Battery	G'FIVE	DC3.7V/ 1100 mAh	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 7 of 50

3. SUMMARY OF TEST RESULTS

Item Number		Item Description	FCC Rules	Result	
1	Output	Conducted Output Power	22.913(a) / 24.232	Door	
1	Power	Radiated Output Power	(b)	Pass	
2	Spurious	Conducted Spurious Emission	2.1051 / 22.917 /	Pass	
2	Emission	Radiated Spurious Emission	24.238	Pass	
3	Mains Conducted Emission		15.107 / 15.207	Pass	
4	Frequency	Frequency Stability		Pass	
5	Occupied B	andwidth	2.1049 (h)(i)	Pass	
6	Emission Ba	and width	22.917(b) / 24.238	Door	
0	EIIIISSION D	andwidin	(b)	Pass	
7	Pand Edga		22.917(b) / 24.238	Poss	
/	Band Edge		(b)	Pass	

4. DESCRIPTION OF TEST MODES

During the testing, the EUT (Quad-band GSM / GPRS mobile phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

Note: GSM and GPRS modes have been tested during the test. The worst condition (GSM) be recorded in the test report if no other modes test data.

Page 8 of 50

5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

5.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHz					
Mode Power Step Nominal Peak Power Tolerance(c					
GSM 5		33 dBm (2W)	-1		
GPRS	3	33 dBm (2W)	-1		

Conducted Output Power Limits for PCS 1900 MHz					
Mode Power Step Nominal Peak Power Tolerance					
GSM	0	30 dBm (1W)	-1		
GPRS	3	30 dBm (1W)	-1		

5.1.3 MEASUREMENT RESULT

Test Result of Conducted Output Power for GSM 850 MHZ (SIM1)

rest Result of Conducted Output Fower for Gow 630 Militz (GIMT)							
Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	824.2	33	32.72	-0.28	31.64	-9	22.64
GSM(SIM1)	836.6	33	32.65	-0.35	31.54	-9	22.54
	848.8	33	32.62	-0.38	31.43	-9	22.43
GPRS850	824.2	33	32.53	-0.47	31.51	-9	22.51
(1 Slot)	836.6	33	32.47	-0.53	31.44	-9	22.44
	848.8	33	32.45	-0.55	31.39	-9	22.39
GPRS850	824.2	30	29.67	-0.33	28.62	-6	22.62
(2 Slot)	836.6	30	29.64	-0.36	28.55	-6	22.55
	848.8	30	29.62	-0.38	28.49	-6	22.49
GPRS850	824.2	28.23	27.57	-0.66	26.45	-4.26	22.19
(3 Slot)	836.6	28.23	27.54	-0.69	26.54	-4.26	22.28
	848.8	28.23	27.51	-0.72	26.58	-4.26	22.32
GPRS850	824.2	27	26.68	-0.32	25.52	-3	22.52
(4 Slot)	836.6	27	26.65	-0.35	25.53	-3	22.53
	848.8	27	26.61	-0.39	25.56	-3	22.56

Page 9 of 50

Test Result of Conducted Output Power for PCS 1900 MHZ (SIM1)

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.71	-0.29	28.75	-9	19.75
GSM(SIM1)	1880	30	29.67	-0.33	28.73	-9	19.73
	1909.8	30	29.64	-0.36	28.74	-9	19.74
GPRS1900	1850.2	30	29.65	-0.35	28.65	-9	19.65
(1 Slot)	1880	30	29.61	-0.39	28.74	-9	19.74
(1 3101)	1909.8	30	29.58	-0.42	28.73	-9	19.73
GPRS1900	1850.2	27	26.51	-0.49	25.71	-6	19.71
(2 Slot)	1880	27	26.49	-0.51	25.72	-6	19.72
(2 3101)	1909.8	27	26.47	-0.53	25.53	-6	19.53
CDDC1000	1850.2	25.23	25.17	-0.06	24.37	-4.26	20.11
GPRS1900	1880	25.23	25.14	-0.09	24.33	-4.26	20.07
(3 Slot)	1909.8	25.23	25.13	-0.1	24.34	-4.26	20.08
GPRS1900 (4 Slot)	1850.2	24	23.64	-0.36	22.54	-3	19.54
	1880	24	23.61	-0.39	22.59	-3	19.59
	1909.8	24	23.59	-0.41	22.64	-3	19.64

Test Result of Conducted Output Power for GSM 850 MHZ and PCS 1900 MHz(SIM 2)							
Mode	Maximum Conducted Power(dBm)	Average Burst Power(dBm)	Duty cycle Factor(dB)	Frame Power (dBm)			
GSM(SIM2) for GSM 850 MHZ	32.42	31.43	-9	22.43			
GSM(SIM2) for GSM 1900 MHZ	29.54	28.52	-9	19.52			

Page 10 of 50

5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)					
Mode Power Step Nominal Peak Power					
GSM	5	<=38.45 dBm (7W)			
GPRS	3	<=38.45 dBm (7W)			

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)					
Mode Power Step Nominal Peak Power					
GSM	0	<=33 dBm (2W)			
GPRS	3	<=33 dBm (2W)			

Page 11 of 50

5.2.3 MEASUREMENT RESULT

	Radiated Power (ERP) for GSM 850 MHZ							
			Res					
Mode	Frequency	Power Step	Max. Peak ERP	Polarization	Conclusion			
			(dBm)	Of Max. ERP				
	824.2	5	30.64	Horizontal	Pass			
GSM	836.6	5	30.53	Horizontal	Pass			
	848.8	5	30.51	Horizontal	Pass			
CDDC	824.2	3	30.49	Horizontal	Pass			
GPRS 83	836.6	3	30.46	Horizontal	Pass			
1 slot	848.8	3	30.43	Horizontal	Pass			
CDDC	824.2	3		Horizontal	Pass			
GPRS 2 slots	836.6	3		Horizontal	Pass			
2 51015	848.8	3		Horizontal	Pass			
CDDC	824.2	2	Loop than	Horizontal	Pass			
GPRS 3 slots	836.6	2	Less than	Horizontal	Pass			
3 81018	848.8	2	27 dBm	Horizontal	Pass			
CDDC	824.2	2		Horizontal	Pass			
GPRS	836.6	2]	Horizontal	Pass			
4 slots	848.8	2		Horizontal	Pass			

Radiated Power (E.I.R.P) for PCS 1900 MHZ

			R	esult	
Mode	Frequency	Power Step	Max. Peak	Polarization	Conclusion
			E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	0	28.48	Horizontal	Pass
GSM	1880.0	0	28.45	Horizontal	Pass
	1909.8	0	28.37	Horizontal	Pass
GPRS	1850.2	3	28.40	Horizontal	Pass
1slot	1880.0	3	28.38	Horizontal	Pass
15101	1909.8	3	28.36	Horizontal	Pass
GPRS	1850.2 3		Horizontal	Pass	
2 slots	1880.0	3		Horizontal	Pass
2 51015	1909.8	3		Horizontal	Pass
GPRS	1850.2	2	Less than	Horizontal	Pass
	1880.0	2	27 dBm	Horizontal	Pass
3 51015	3 slots 1909.8 2	2	27 UDIII	Horizontal	Pass
CDDC	1850.2	2		Horizontal	Pass
GPRS 4 slots	1880.0	2		Horizontal	Pass
4 slots	1909.8	2		Horizontal	Pass

Page 12 of 50

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz				
Channel	Frequency (MHz)			
128	824.2			
190	836.6			
251	848.8			

Typical Channels for testing of PCS 1900 MHz				
Channel	Frequency (MHz)			
512	1850.2			
661	1880.0			
810	1909.8			

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Page 13 of 50

6.1.3 MEASUREMENT RESULT

	Conducted Spurious Emission for GSM 850 MHz								
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)			
2	1648.4	B.I.N.F	1673.2	B.I.N.F	1697.6	B.I.N.F			
3	2472.6	B.I.N.F	2509.8	B.I.N.F	2546.4	B.I.N.F			
4	3296.8	B.I.N.F	3346.4	B.I.N.F	3395.2	B.I.N.F			
5	4121	B.I.N.F	4183	B.I.N.F	4244	B.I.N.F			
6	4945.2	B.I.N.F	5019.6	B.I.N.F	5092.8	B.I.N.F			
7	5769.4	B.I.N.F	5856.2	B.I.N.F	5941.6	B.I.N.F			
8	6593.6	B.I.N.F	6692.8	B.I.N.F	6790.4	B.I.N.F			
9	7417.8	B.I.N.F	7529.4	B.I.N.F	7639.2	B.I.N.F			
10	10 8242 B.I.N.F 8366 B.I.N.F 8488 B.I.N.F								
B.I.N.F	B.I.N.F: Below Instruments Noise floor								

	Conducted Spurious Emission for PCS 1900 MHz							
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)			Tx ch. 810 Freq. (MHz)	Level (dBm)		
2	3700.4	B.I.N.F	3760	B.I.N.F	3819.6	B.I.N.F		
3	5550.6	B.I.N.F	5640	B.I.N.F	5729.4	B.I.N.F		
4	7400.8	B.I.N.F	7520	B.I.N.F	7639.2	B.I.N.F		
5	9251.0	B.I.N.F	9400	B.I.N.F	9549.0	B.I.N.F		
6	11101.2	B.I.N.F	11280	B.I.N.F	11458.8	B.I.N.F		
7	12951.4	B.I.N.F	13160	B.I.N.F	13368.6	B.I.N.F		
8	14801.6	B.I.N.F	15040	B.I.N.F	15278.4	B.I.N.F		
9	16651.8	B.I.N.F	16920	B.I.N.F	17188.2	B.I.N.F		
10	18502.0	B.I.N.F	18800	B.I.N.F	19098.0	B.I.N.F		
B.I.N.F	: Below Instrume	nts Noise	floor					

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 14 of 50


6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

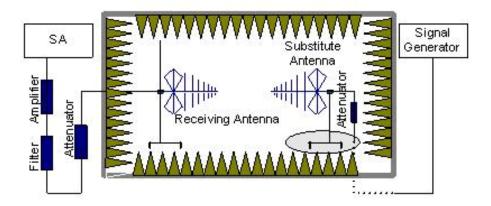

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Page 15 of 50

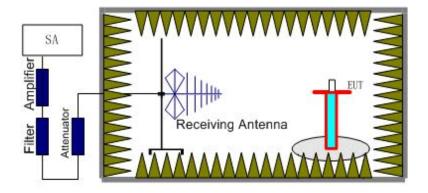

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a IMOBOnsee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Page 16 of 50

6.2.3 MEASUREMENT RESULT

The Worst Test Results for Channel 128 / 824.2 MHz									
Frequency(MHz)	Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity								
1648.00	-35.93	-5.01	-40.94	-13.00	Horizontal				
1752.00	-36.53	-2.18	-38.71	-13.00	Vertical				
2472.00	-36.71	3.46	-33.25	-13.00	Horizontal				
9086.00	-37.13	2.79	-34.22	-13.00	Horizontal				

The Worst Test Results for Channel 190/836.6 MHz								
Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity								
1673.00	-40.36	-3.22	-43.58	-13.00	Horizontal			
1903.00	-39.55	-0.24	-39.79	-13.00	Vertical			
9089.00	-37.47	3.98	-33.45	-13.00	Vertical			

The Worst Test Results for Channel 251/848.8 MHz							
Frequency(MHz) Power(dBm) A _{Rpl} (dBm) P _{Mea} (dBm) Limit (dBm) Polarity							
1698.00	-38.64	-2.26	-40.90	-13.00	Horizontal		
1888.50	-37.43	-3.12	-40.55	-13.00	Vertical		
2131.00	-41.68	-1.74	-43.42	-13.00	Vertical		
9089.00	-37.53	8.46	-29.07	-13.00	Horizontal		

The Worst Test Results for Channel 512/1850.2 MHz							
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	Р _{меа} (dВm)	Limit (dBm)	Polarity		
1999.00	-41.58	9.5	-32.03	-13.00	Horizontal		
3700.00	-37.53	8.74	-28.79	-13.00	Horizontal		
12950.40	-35.63	11.56	-24.07	-13.00	Vertical		
17919.60	-40.25	17.89	-22.36	-13.00	Vertical		

Report No.: AGC00V121004-4F2A Page 17 of 50

The Worst Test Results for Channel 661/1880.0 MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity	
2000.50	-47.16	9.7	-37.46	-13.00	Vertical	
9399.00	-39.62	11.6	-28.02	-13.00	Vertical	
13160.40	-37.35	14.89	-22.46	-13.00	Horizontal	
15039.60	-38.52	13.87	-24.65	-13.00	Vertical	
17941.20	-38.66	19.76	-18.9	-13.00	Horizontal	
	The Worst Tes	t Results for	Channel 810	/1909.8 MHz		
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity	
2000.00	-36.63	10.02	-26.61	-13.00	Vertical	
9548.50	-36.51	11.3	-25.21	-13.00	Horizontal	
13367.40	-37.65	12.4	-25.25	-13.00	Horizontal	
15277.80	-36.17	18.03	-18.14	-13.00	Vertical	
17931.60	-39.63	19	-20.63	-13.00	Horizontal	

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 18 of 50

7. MAINS CONDUCTED EMISSION

7.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

7.2 PROVISIONS APPLICABLE


Frequency of Emission (MHz)	Conducted Limit(dBuV)			
	Quasi-Peak	Average		
0.15 – 0.5	66 to 56 *	56 to 46 *		
0.5 – 5	56	46		
5 – 30	60	50		
*Decreases with the logarithm of the frequency.				

^{*}The lower limit shall apply at the transition frequency.

Page 19 of 50

7.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L

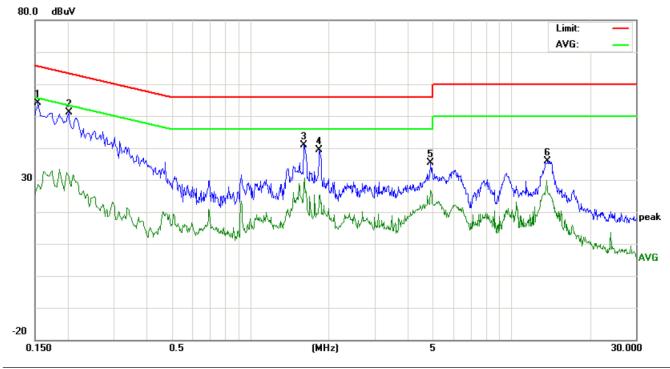

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %


EUT: GSM Mobilie Phone M/N: Normal Hopping

Mode: Call Note:

No.	Freq.		iding_L (dBuV)		Correct Factor		asuren (dBuV)			nit uV)		rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QР	AVG		
1	0.1539	43.97		18.57	10.16	54.13		28.73	65.78	55.78	-11.65	-27.05	Р	
2	0.2020	40.85		20.91	10.22	51.07		31.13	63.52	53.52	-12.45	-22.39	Р	
3	1.6100	30.57		18.09	10.34	40.91		28.43	56.00	46.00	-15.09	-17.57	Р	
4	1.8420	29.22		14.82	10.27	39.49		25.09	56.00	46.00	-16.51	-20.91	Р	
5	4.9138	25.17		16.76	10.23	35.40		26.99	56.00	46.00	-20.60	-19.01	Р	
6	13.7939	25.77		16.59	10.12	35.89		26.71	60.00	50.00	-24.11	-23.29	Р	

Page 20 of 50

LINE CONDUCTED EMISSION - N

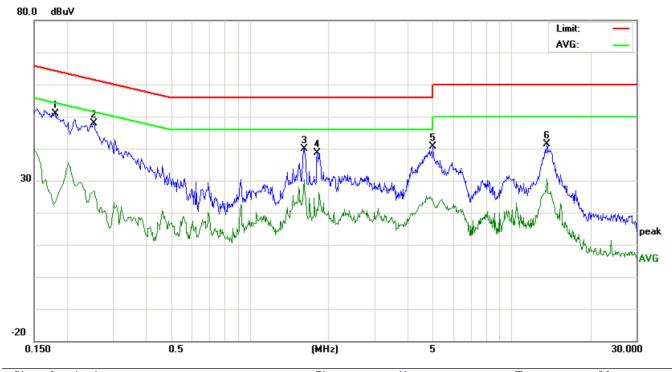

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: GSM Mobilie Phone

M/N: QT600 Mode: Call Note:

No.	Freq.	I	ding_L (dBuV)		Correct Factor	Me	easuren (dBuV)			nit uV)	l	rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QР	AVG		
1	0.1824	41.03		29.62	10.20	51.23		39.82	64.37	54.37	-13.14	-14.55	Р	
2	0.2540	37.64		16.73	10.27	47.91		27.00	61.62	51.62	-13.71	-24.62	Р	
3	1.6180	29.57		19.98	10.34	39.91		30.32	56.00	46.00	-16.09	-15.68	Р	
4	1.8100	28.34		10.87	10.28	38.62		21.15	56.00	46.00	-17.38	-24.85	Р	
5	5.0057	30.36		13.26	10.24	40.60		23.50	60.00	50.00	-19.40	-26.50	Р	
6	13.6577	31.19		20.54	10.13	41.32		30.67	60.00	50.00	-18.68	-19.33	Р	

Note: The GSM850 mode is the worst condition.

Page 21 of 50

8. FREQUENCY STABILITY

8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10℃.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from - 10° C to + 50° C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50℃.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

8.2 PROVISIONS APPLICABLE

8.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 22 of 50

8.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

8.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 MHz						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)				
3.4	38	0.045				
3.7	25	0.030				
4.2	29	0.035				

Frequency Error Against Temperature for GSM 850 MHz						
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)				
-10	47	0.056				
0	39	0.047				
10	36	0.043				
20	35	0.042				
30	29	0.035				
40	28	0.033				
50	34	0.041				

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Report No.: AGC00V121004-4F2A Page 23 of 50

Frequency Error Against Voltage for PCS 1900 MHz						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)				
3.4	37	0.020				
3.7	33	0.018				
4.2	35	0.019				

Frequency Error Against Temperature for PCS 1900 MHz					
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)			
-10	3	0.002			
0	41	0.022			
10	37	0.020			
20	34	0.018			
30	32	0.017			
40	46	0.024			
50	43	0.023			

Note: The EUT doesn't work below -10°C

Page 24 of 50

9. OCCUPIED BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

9.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz						
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)				
Low Channel	824.2	242.91				
Middle Channel	836.6	243.51				
High Channel	848.8	241.34				

Occupied Bandwidth (99%) for PCS 1900 MHz						
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)				
Low Channel	1850.2	244.01				
Middle Channel	1880.0	244.50				
High Channel	1909.8	243.94				

Page 25 of 50

10. EMISSION BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

10.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM 850 MHz					
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)			
Low Channel	824.2	311.41			
Middle Channel	836.6	314.95			
High Channel	848.8	311.44			

Emission Bandwidth (-26dBc) for PCS 1900 MHz		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	312.83
Middle Channel	1880.0	316.44
High Channel	1909.8	312.67

Page 26 of 50

11. BAND EDGE

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

11.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges.

Report No.: AGC00V121004-4F2A Page 27 of 50


APPENDIX I

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION


Page 28 of 50

CONDUCTED EMISSION IN GSM BAND

Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

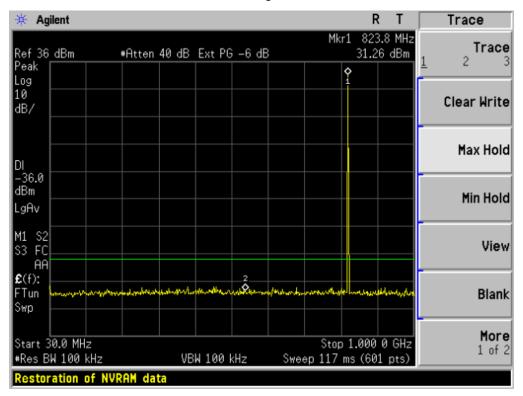


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

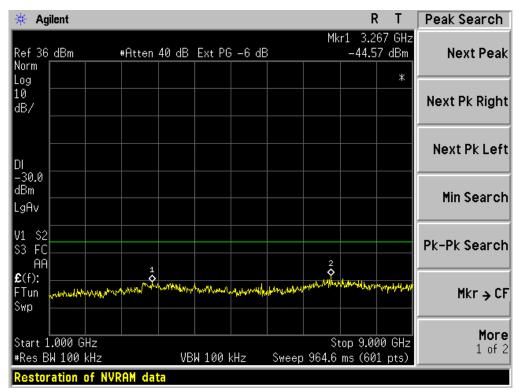


Report No.: AGC00V121004-4F2A Page 29 of 50


Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

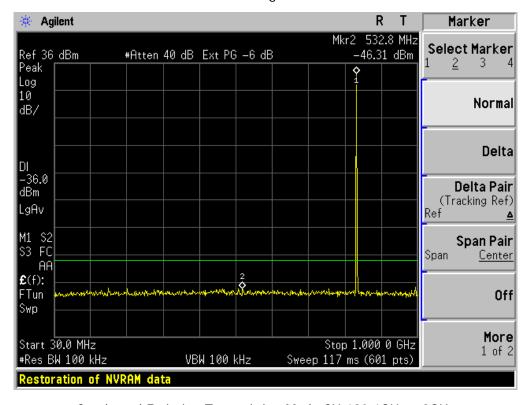


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

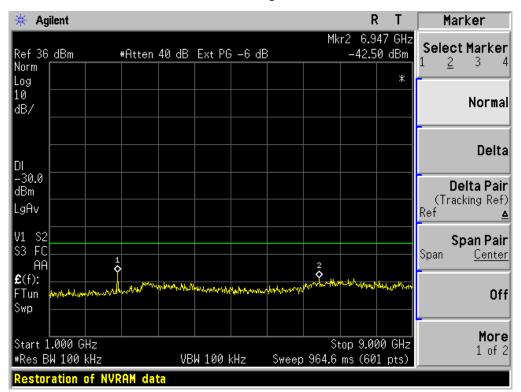

Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

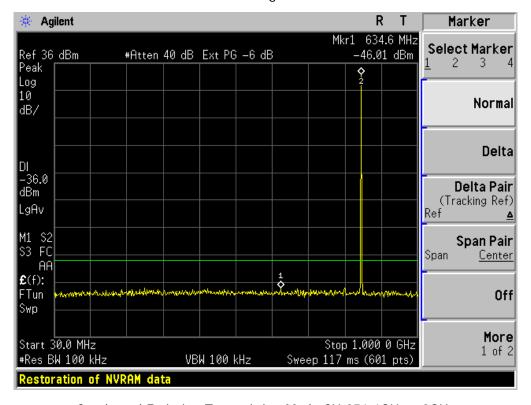


Conducted Emission Transmitting Mode CH 251 1GHz - 9GHz

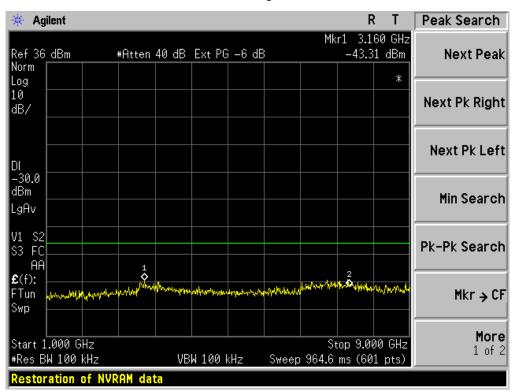


Report No.: AGC00V121004-4F2A Page 31 of 50

Conducted Emission Idle Mode 30MHz - 1GHz

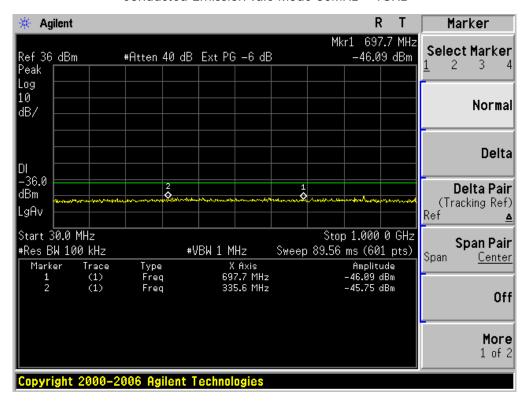


Conducted Emission Idle Mode 1GHz - 9GHz

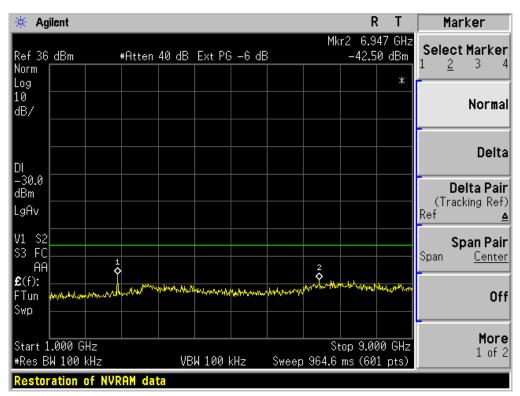


Page 32 of 50

CONDUCTED EMISSION IN PCS BAND Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

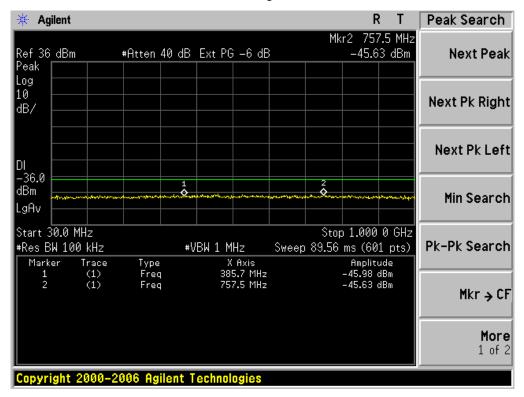


Conducted Emission Transmitting Mode CH 512 1GHz - 20GHz

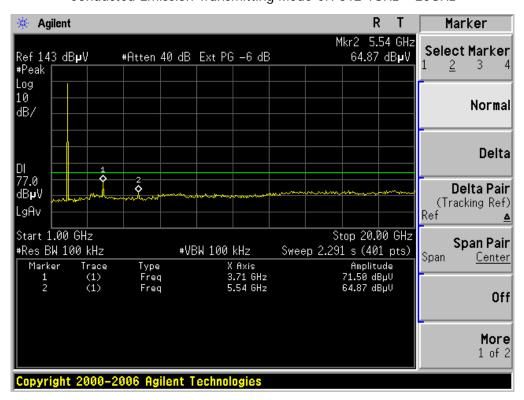


Report No.: AGC00V121004-4F2A Page 33 of 50

Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

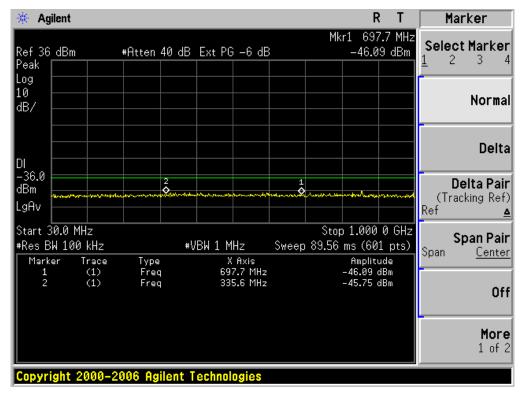


Conducted Emission Transmitting Mode CH 661 1GHz - 20GHz

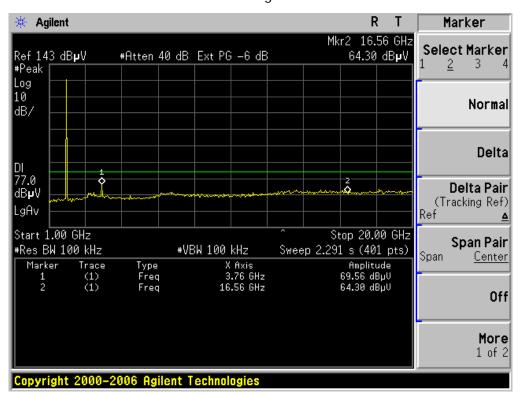


Report No.: AGC00V121004-4F2A Page 34 of 50

Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

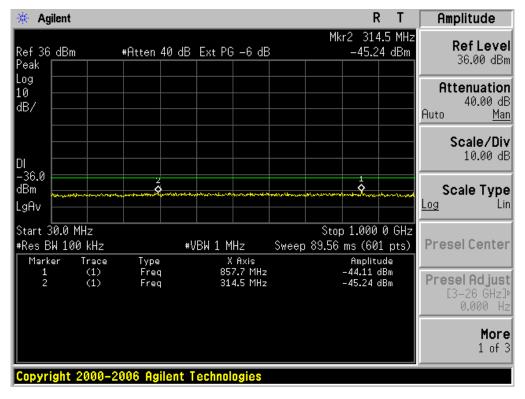

Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

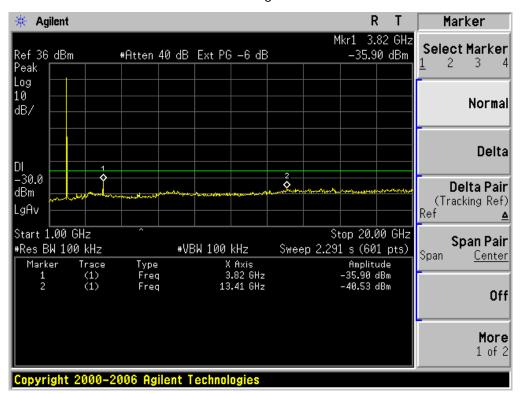


Page 35 of 50

APPENDIX II

TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

Page 36 of 50

Occupied Bandwidth (99%) GSM 850 BAND CH 128

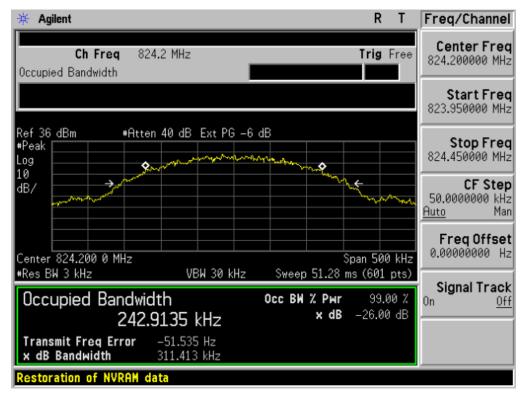


Occupied Bandwidth (99%) GSM 850 BAND CH 190




Page 37 of 50

Occupied Bandwidth (99%) GSM 850 BAND CH 251

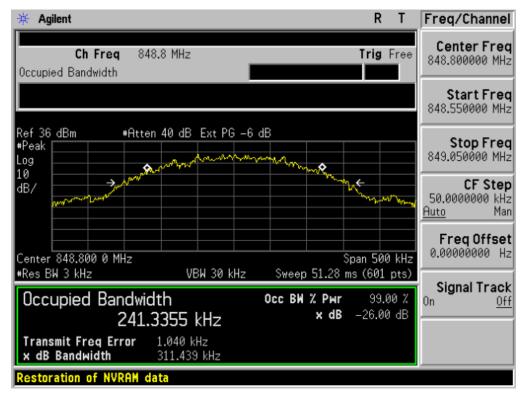


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

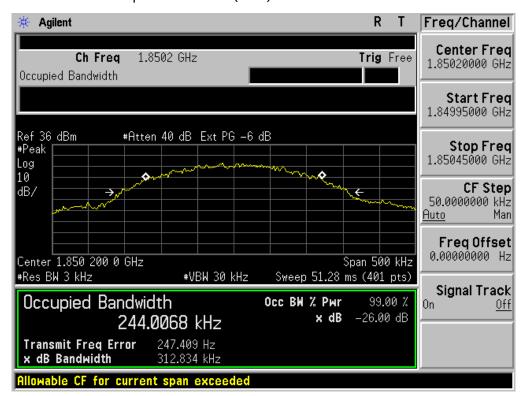


Page 38 of 50

Occupied Bandwidth (99%) PCS 1900 BAND CH 661

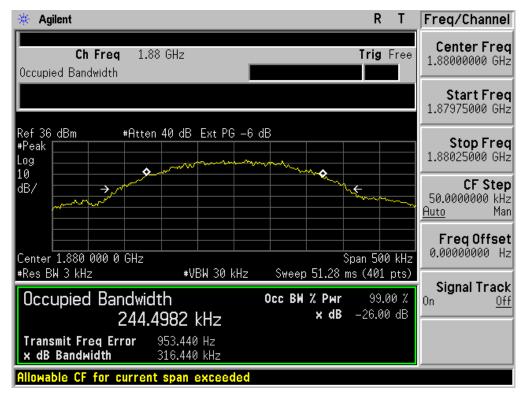

Occupied Bandwidth (99%) PCS 1900 BAND CH 810

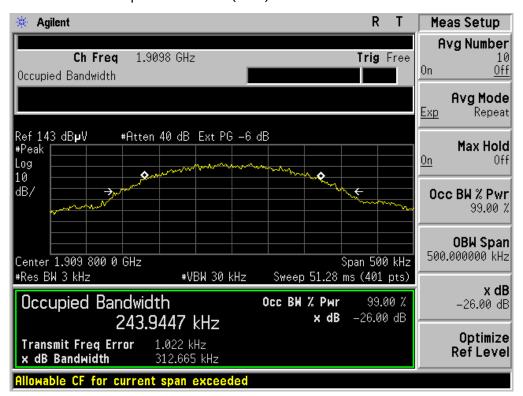


Page 39 of 50

APPENDIX III


TEST PLOTS FOR BAND EDGES

Report No.: AGC00V121004-4F2A Page 40 of 50

Low Band Edge GSM 850 BAND CH 128

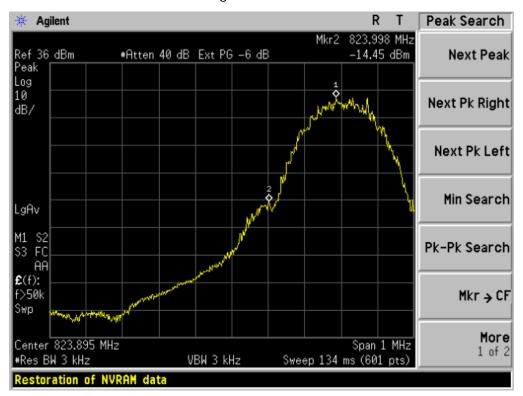


High Band Edge GSM 850 BAND CH 251

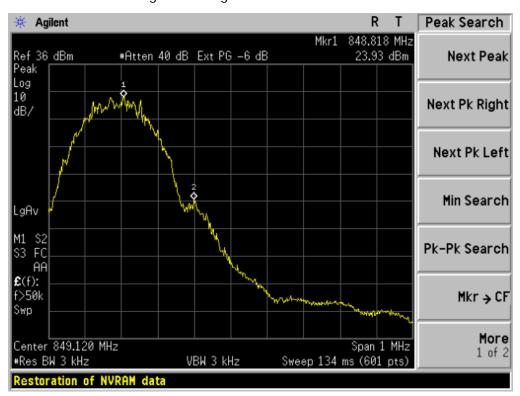


Report No.: AGC00V121004-4F2A Page 41 of 50

Low Band Edge PCS 1900 BAND CH 512

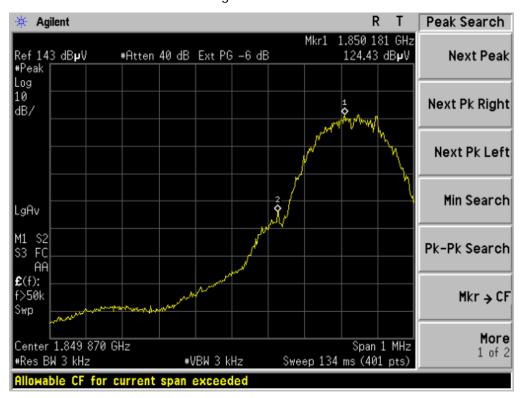

High Band Edge PCS 1900 BAND CH 810

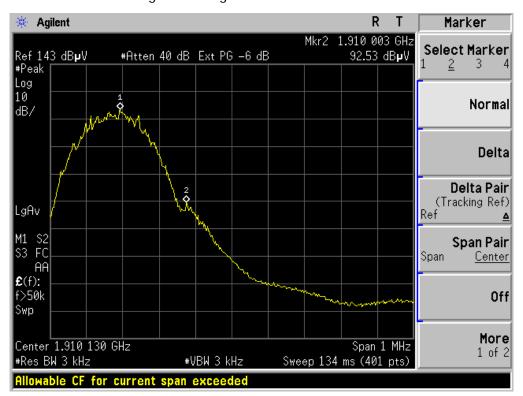

Page 42 of 50

APPENDIX IV


PHOTOGRAPHS OF TEST SETUP

Report No.: AGC00V121004-4F2A Page 43 of 50

CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

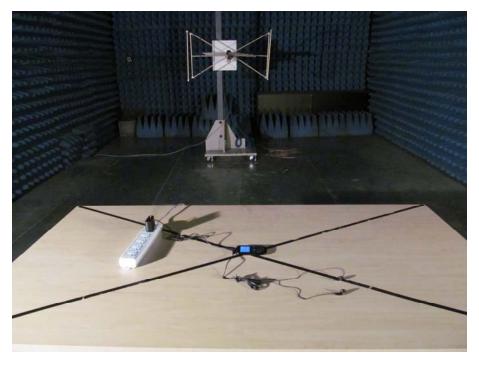

Page 44 of 50

APPENDIX V

PHOTOGRAPHS OF EUT

Report No.: AGC00V121004-4F2A Page 45 of 50

TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



Report No.: AGC00V121004-4F2A Page 46 of 50

LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



Report No.: AGC00V121004-4F2A Page 47 of 50

FRONT VIEW OF SAMPLE



BACK VEIW OF SAMPLE




Report No.: AGC00V121004-4F2A Page 48 of 50

ALL VIEW OF SAMPLE




OPEN VIEW OF SAMPLE-1

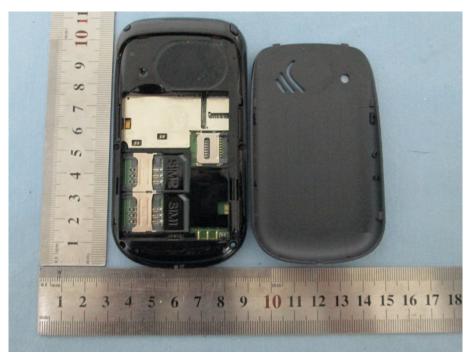

Report No.: AGC00V121004-4F2A Page 49 of 50



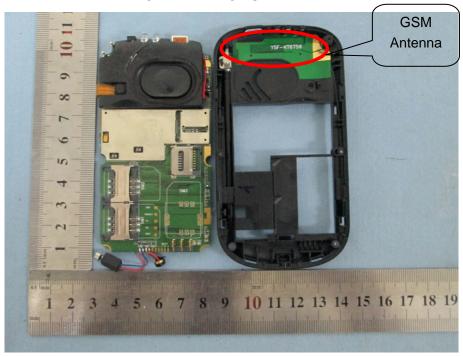

OPEN VIEW OF SAMPLE-3




Report No.: AGC00V121004-4F2A Page 50 of 50

INTERNAL VIEW OF SAMPLE-1



INTERNAL VIEW OF SAMPLE-2

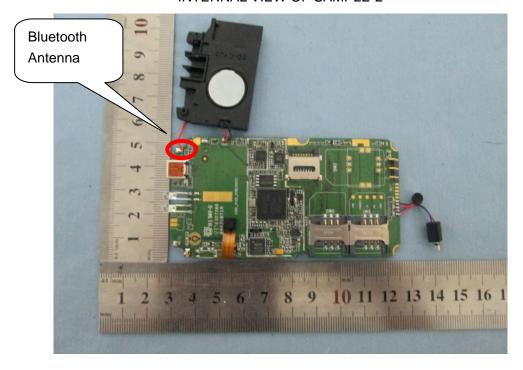

----END OF REPORT----