



FCC RADIO TEST REPORT

Applicant's company	AirTies Wireless Networks
Applicant Address	Gülbahar Mah. Avni Dilligil Sok. Celik Is Merkezi ISTANBUL, 34394 Turkey
FCC ID	Z3WAIR49200
Manufacturer's company	SHENZHEN GONGJIN ELECTRONICS CO.,LTD.
Manufacturer Address	2F/3F/4F Baiying Building, 1019# Naihai RD, Nanshan Dist., Shenzhen, Guangdong, CHINA

Product Name	2 Port Gigabit Ethernet 11ac/11n Wireless Router
Brand Name	AirTies
Model No.	Air 4920
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 22, 2014
Final Test Date	May 23, 2015
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. EUT Operation during Test	9
3.10. Duty Cycle.....	10
3.11. Test Configurations	11
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement	29
4.5. Radiated Emissions Measurement	35
4.6. Band Edge Emissions Measurement	51
4.7. Frequency Stability Measurement	57
4.8. Antenna Requirements	61
5. LIST OF MEASURING EQUIPMENTS	62
6. MEASUREMENT UNCERTAINTY.....	64
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3



History of This Test Report



1. VERIFICATION OF COMPLIANCE

Product Name : 2 Port Gigabit Ethernet 11ac/11n Wireless Router
Brand Name : AirTies
Model No. : Air 4920
Applicant : AirTies Wireless Networks
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 22, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that appears to read "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	0.59 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	3.25 dB
4.4	15.407(a)	Power Spectral Density	Complies	3.74 dB
4.5	15.407(b)	Radiated Emissions	Complies	6.00 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.09 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11a: WLAN (1TX, 1RX) IEEE 802.11n: WLAN (3TX, 3RX) IEEE 802.11ac: WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	For non-beamforming mode: IEEE 802.11a: 20.34 MHz For beamforming mode: IEEE 802.11ac MCS0/Nss1 (VHT20): 19.28 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 38.35 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.83 MHz
Maximum Conducted Output Power	For non-beamforming mode: IEEE 802.11a: 22.05 dBm For beamforming mode: IEEE 802.11ac MCS0/Nss1 (VHT20): 26.75 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 24.89 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 18.39 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

Note: The product has beamforming function for 802.11n/ac in 5GHz.

Antenna and Band width

Antenna	Single (TX)			Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X	X	X	X
IEEE 802.11n	X	X	X	V	V	X
IEEE 802.11ac	X	X	X	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	MOSO	MSP-C1000IC12.0-12B-US	INPUT: 100-240V~50/60Hz, 0.5A max. OUTPUT: 12.0V, 1A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	-	-	PCB Antenna	N/A	2.5	-
2	Airgain	N2420S-T-G50U	PIFA Antenna	I-PEX	2.5	-
3	-	-	PCB Antenna	N/A	-	0
4	-	-	PCB Antenna	N/A	-	0
5	-	-	PCB Antenna	N/A	-	0

Note: The EUT has five antennas. There are two antennas for 2.4GHz and three antennas for 5GHz.

<For 2.4GHz band>

For 802.11b/g mode:

Only Chain 1 can be used as transmitting/receiving antenna.

For 802.11n mode:

Both Chain 1 and Chain 2 support transmit and receive functions.

Chain 1 and Chain 2 can transmit and receive signal simultaneously.

<For 5GHz band>


For 802.11a mode:

Only Chain 3 can be used as transmitting/receiving antenna.

For 802.11n/ac mode:

Chain 3, Chain 4 and Chain 5 support transmit and receive functions.

Chain 3, Chain 4 and Chain 5 can transmit and receive signal simultaneously.

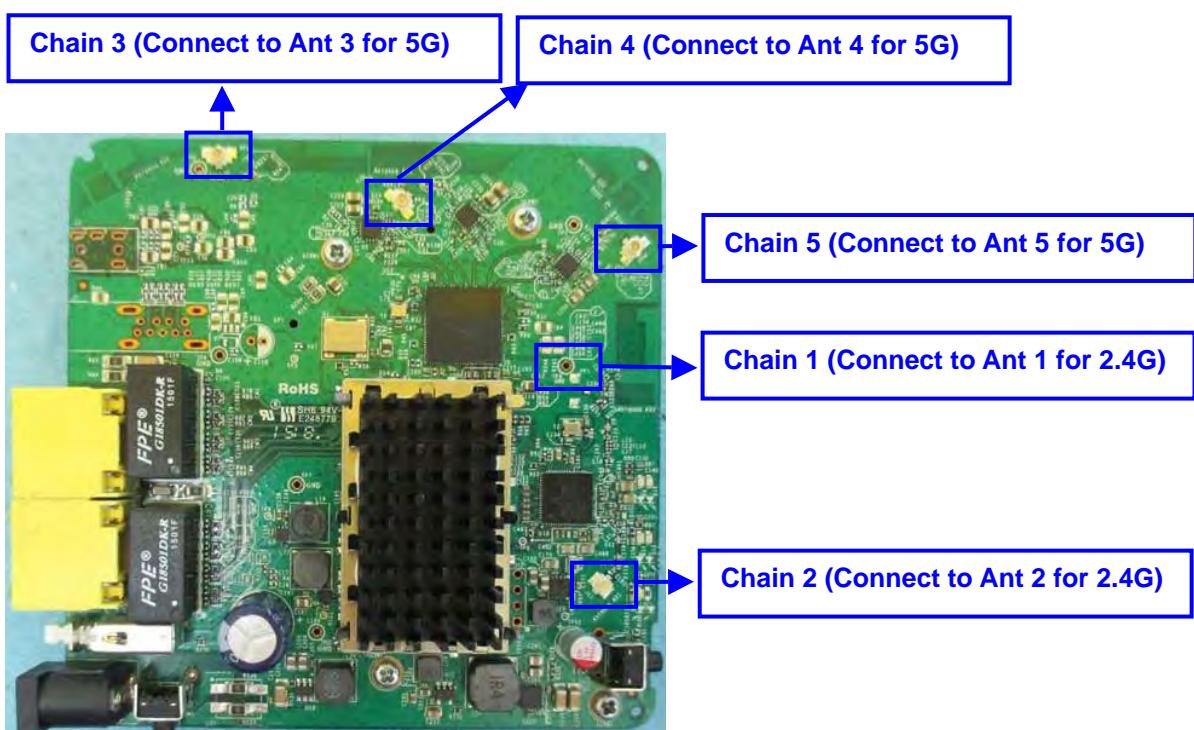

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	3
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
Power Spectral Density	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	3
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	3
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5

Radiated Emission Below 1GHz	CTX	-	-	-
Radiated Emission Above 1GHz	For non-beamforming mode			
	11a/BPSK	Band 1	6Mbps	36/40/48
	For beamforming mode			
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48
	11ac VHT40	Band 1	MCS0/Nss1	38/46
	11ac VHT80	Band 1	MCS0/Nss1	42
Band Edge Emission	For non-beamforming mode			
	11a/BPSK	Band 1	6Mbps	36/40/48
	For beamforming mode			
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48
	11ac VHT40	Band 1	MCS0/Nss1	38/46
	11ac VHT80	Band 1	MCS0/Nss1	42
Frequency Stability	20 MHz	Band 1	-	40
	40 MHz	Band 1	-	38
	80 MHz	Band 1	-	42

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac in 5GHz, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. CTX + Adapter_Max. output power of 5GHz

For Radiated Emission below 1GHz test:

Mode 1. CTX + Adapter_Max. output power of 5GHz

For Radiated Emission above 1GHz test:

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1G) and TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: 03CH01-CB (Above 1G)

For non-beamforming mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For beamforming mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
NB	DELL	E4300	DoC
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming mode:

Test Software Version	Mtool 2.0.0.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
5180 MHz	5200 MHz	5240 MHz	
802.11a	88	88	88

For beamforming mode:

Test Software Version	Mtool 2.0.0.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
5180 MHz	5200 MHz	5240 MHz	
802.11ac MCS0/Nss1 VHT20	65	72	88
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	64	83	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz	56	

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10.Duty Cycle

For non-beamforming mode:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	0.462	0.489	94.43	0.25	2.17

For beamforming mode:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.838	3.936	97.50	0.11	0.26
802.11ac MCS0/Nss1 VHT40	4.492	4.660	96.39	0.16	0.22
802.11ac MCS0/Nss1 VHT80	5.000	5.456	91.64	0.38	0.20


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

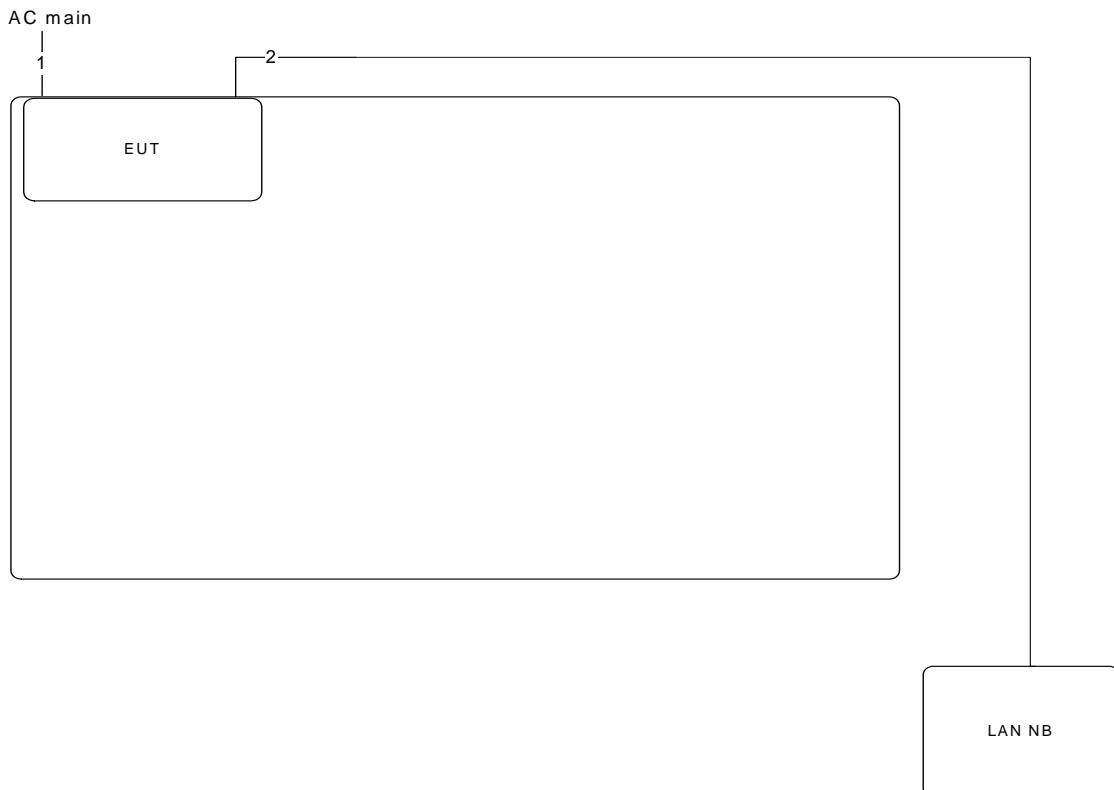

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions (Below 1G) Test Configuration

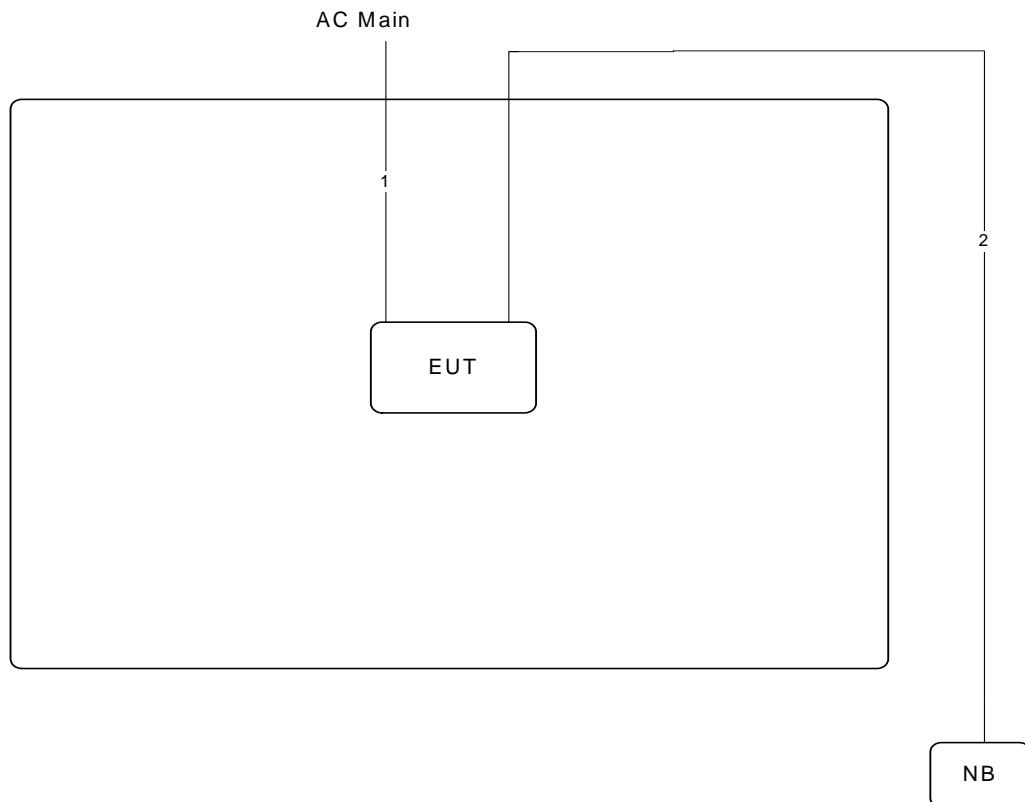

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m


3.11.3. Radiation Emissions (Above 1G) Test Configuration

For non-beamforming mode:

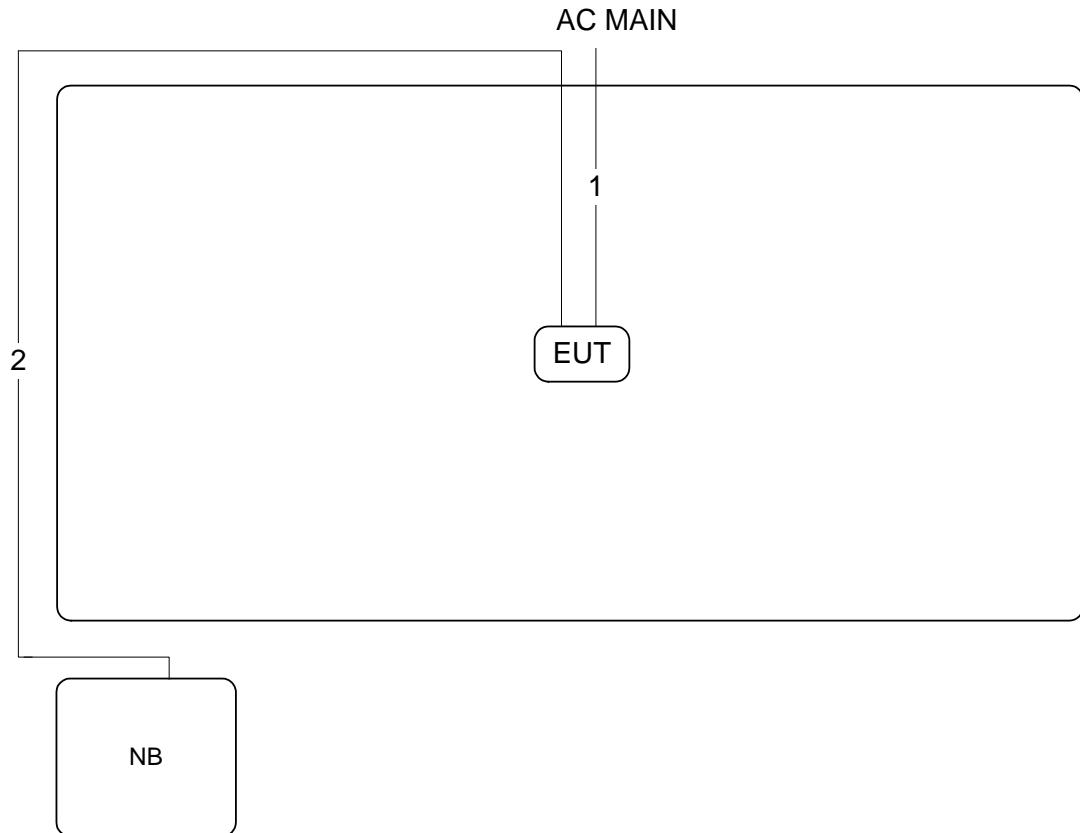

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

For beamforming mode:

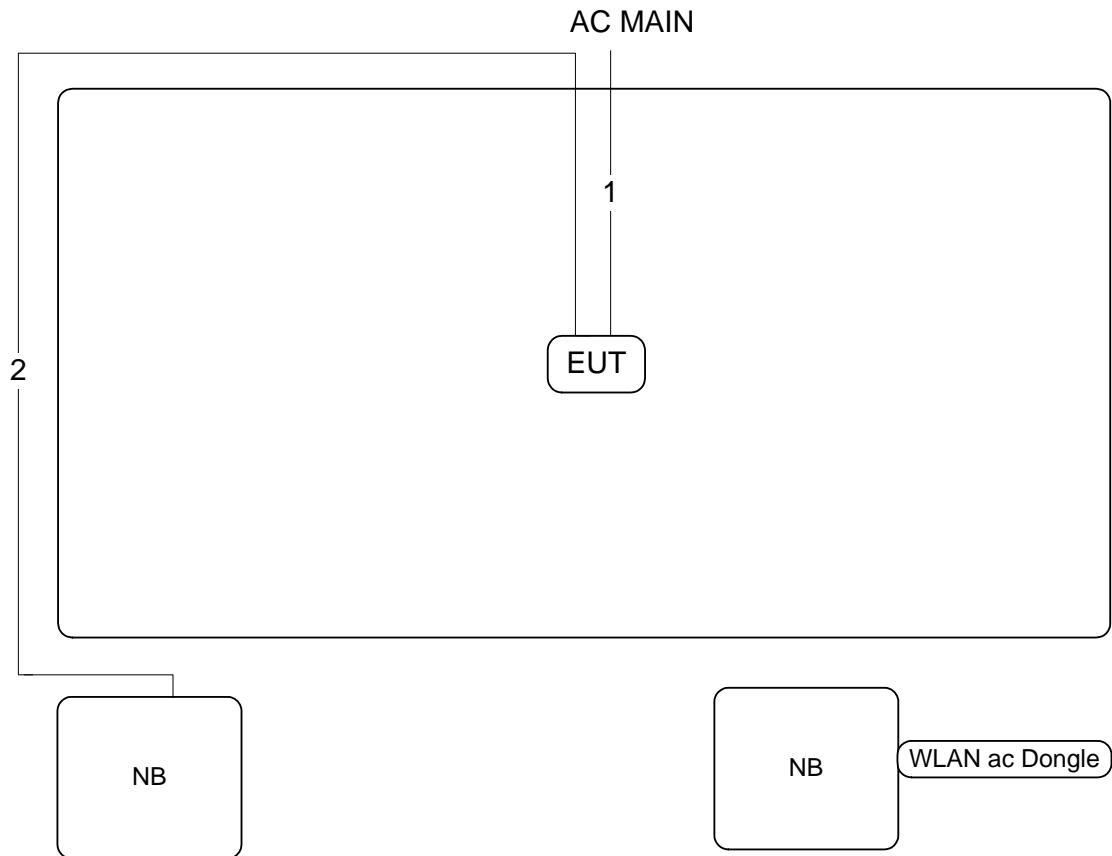

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

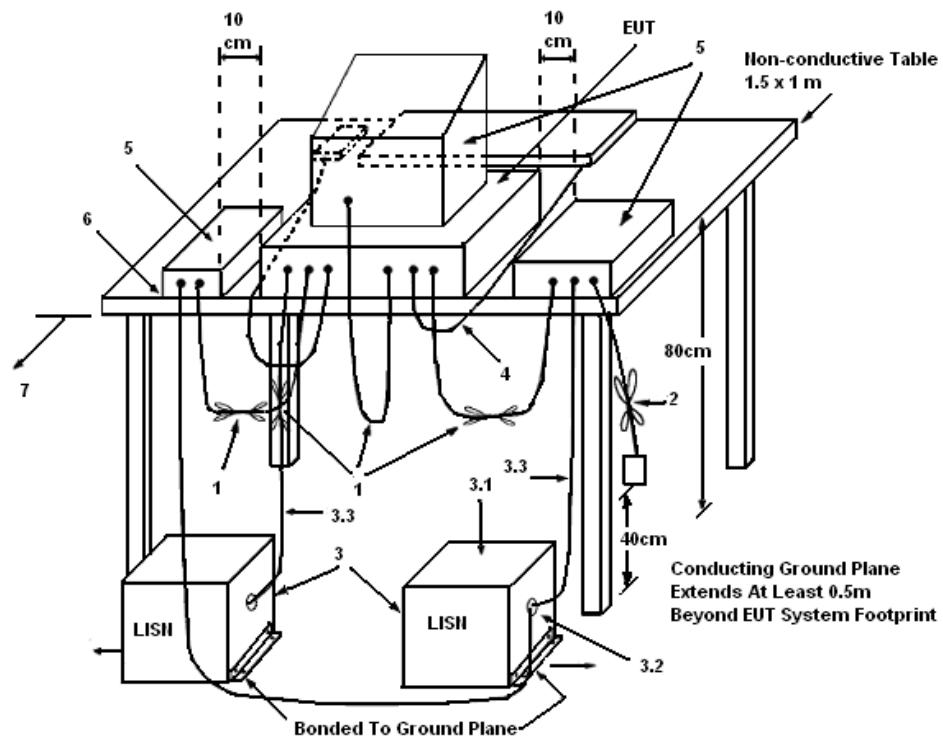

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

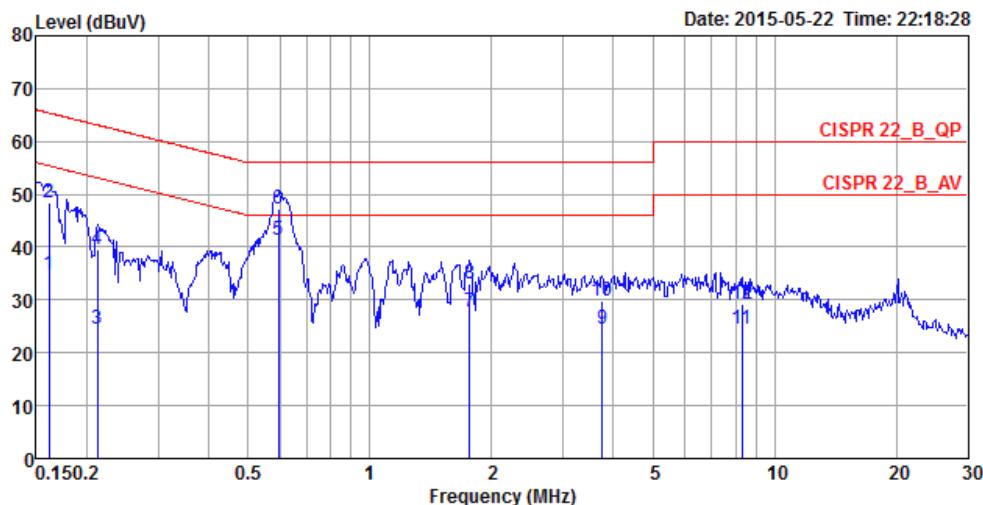

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Limit	Line	Level	Factor	Loss		
	MHz	dBuV	dB	dBuV	dB	dB		
1	0.16	34.88	-20.50	55.38	24.93	9.93	0.02	LINE Average
2	0.16	48.27	-17.11	65.38	38.32	9.93	0.02	LINE QP
3	0.21	24.48	-28.62	53.10	14.53	9.93	0.02	LINE Average
4	0.21	39.44	-23.66	63.10	29.49	9.93	0.02	LINE QP
5	0.59	41.45	-4.55	46.00	31.47	9.94	0.04	LINE Average
6	0.59	47.25	-8.75	56.00	37.27	9.94	0.04	LINE QP
7	1.76	27.75	-18.25	46.00	17.71	9.98	0.06	LINE Average
8	1.76	33.10	-22.90	56.00	23.06	9.98	0.06	LINE QP
9	3.76	24.38	-21.62	46.00	14.29	10.02	0.07	LINE Average
10	3.76	29.91	-26.09	56.00	19.82	10.02	0.07	LINE QP
11	8.32	24.63	-25.37	50.00	14.30	10.15	0.18	LINE Average
12	8.32	29.21	-30.79	60.00	18.88	10.15	0.18	LINE QP

Temperature	24°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

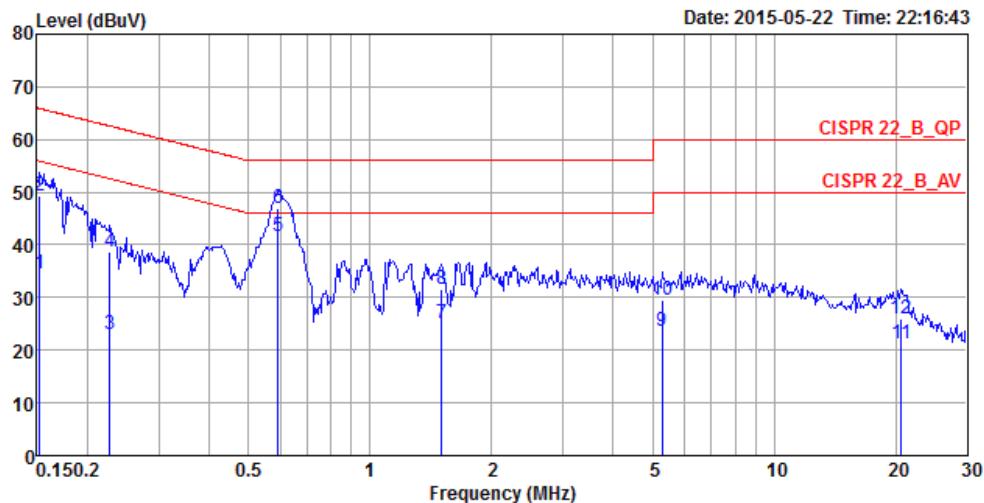

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Line	Level	Factor	Loss			
	MHz	dBuV	dB	dBuV	dB	dB		
1	0.15	34.62	-21.25	55.87	24.82	9.78	0.02	NEUTRAL
2	0.15	49.26	-16.61	65.87	39.46	9.78	0.02	NEUTRAL
3	0.23	23.04	-29.53	52.57	13.22	9.79	0.03	NEUTRAL
4	0.23	38.78	-23.79	62.57	28.96	9.79	0.03	NEUTRAL
5	0.59	41.58	-4.42	46.00	31.74	9.80	0.04	NEUTRAL
6	0.59	46.93	-9.07	56.00	37.09	9.80	0.04	NEUTRAL
7	1.50	25.06	-20.94	46.00	15.17	9.83	0.06	NEUTRAL
8	1.50	31.46	-24.54	56.00	21.57	9.83	0.06	NEUTRAL
9	5.28	23.61	-26.39	50.00	13.59	9.91	0.11	NEUTRAL
10	5.28	29.38	-30.62	60.00	19.36	9.91	0.11	NEUTRAL
11	20.59	21.24	-28.76	50.00	10.78	10.19	0.27	NEUTRAL
12	20.59	26.08	-33.92	60.00	15.62	10.19	0.27	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	59%
Test Engineer	Mars Lin		

For non-beamforming mode:


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	34.00	19.53
	5200 MHz	36.34	20.34
	5240 MHz	33.83	18.40

For beamforming mode:

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.39	17.97
	5200 MHz	22.69	18.14
	5240 MHz	40.26	19.28
802.11ac MCS0/Nss1 VHT40	5190 MHz	40.87	36.76
	5230 MHz	82.75	38.35
802.11ac MCS0/Nss1 VHT80	5210 MHz	82.61	75.83

For non-beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 / 5180 MHz

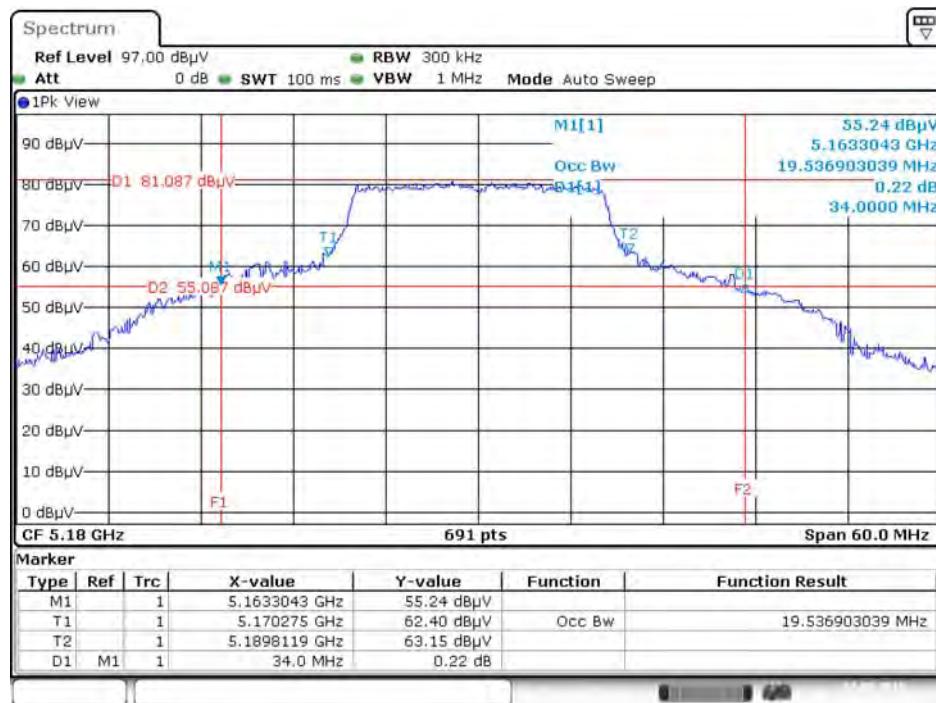


Date: 23.MAY.2015 19:55:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 / 5200 MHz




Date: 23.MAY.2015 19:56:28

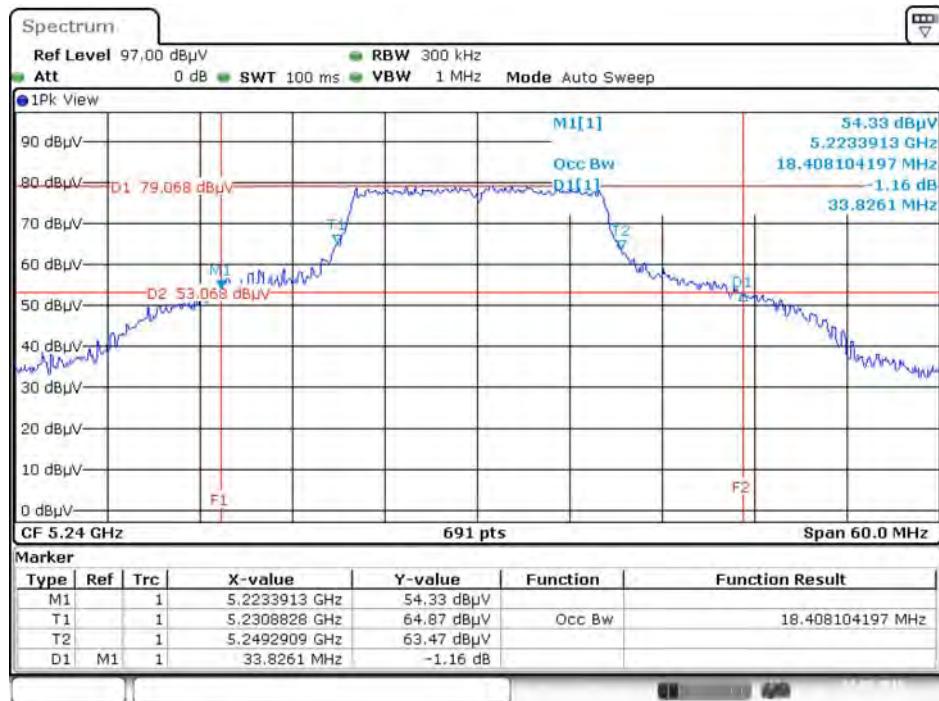26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 3 / 5240 MHz


Date: 23.MAY.2015 20:11:01


For beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 + Chain 4 + Chain 5 / 5180 MHz

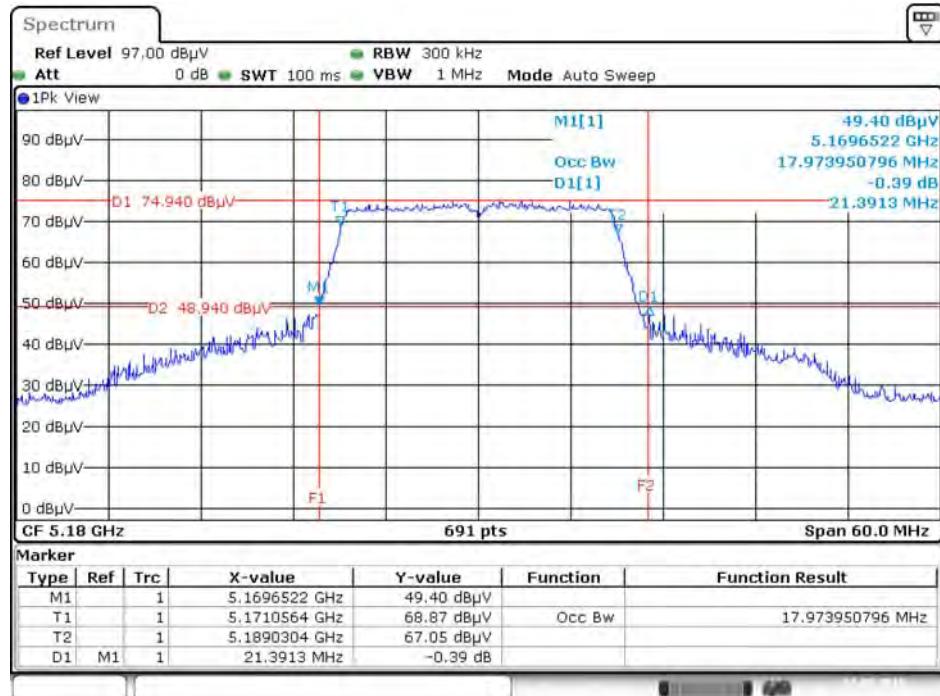


Date: 23.MAY.2015 20:13:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 + Chain 4 + Chain 5 / 5200 MHz

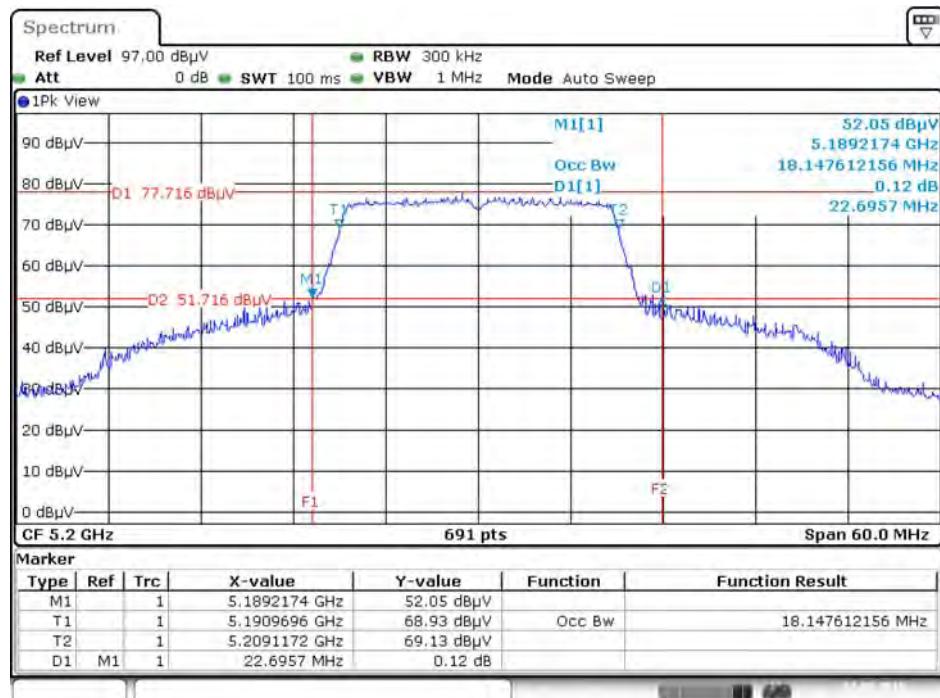


Date: 23.MAY.2015 20:14:38


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 + Chain 4 + Chain 5 / 5240 MHz

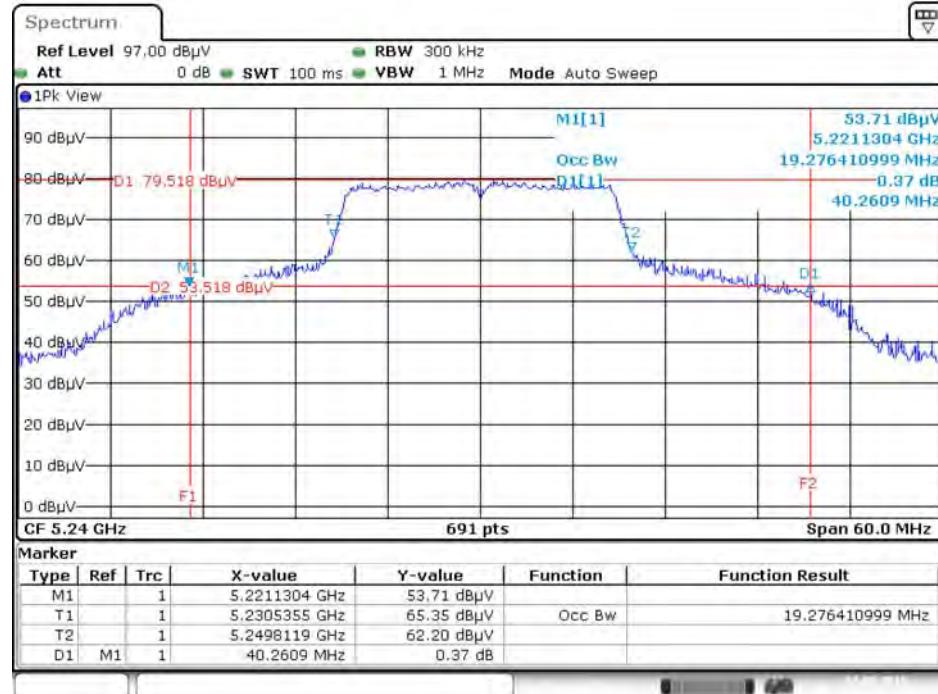


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 + Chain 4 + Chain 5 / 5190 MHz

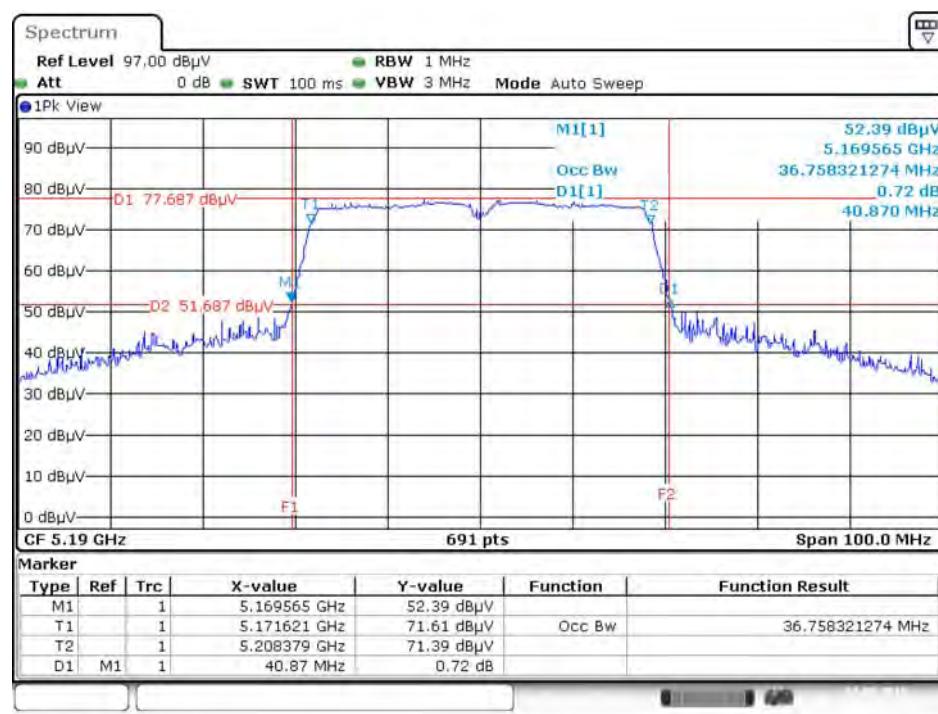

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 + Chain 4 + Chain 5 / 5230 MHz

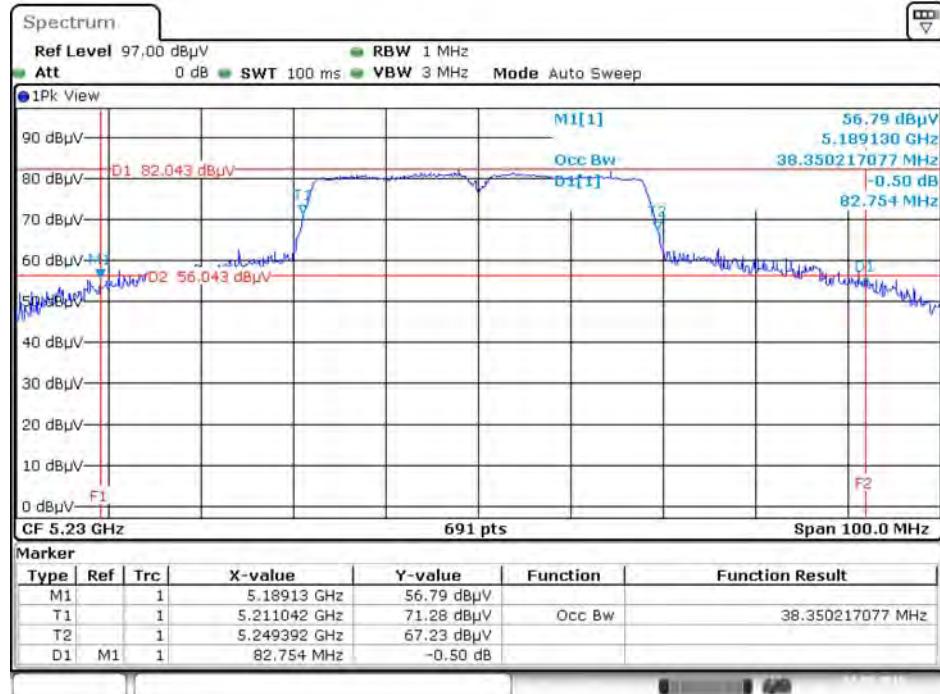

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 + Chain 4 + Chain 5 / 5210 MHz

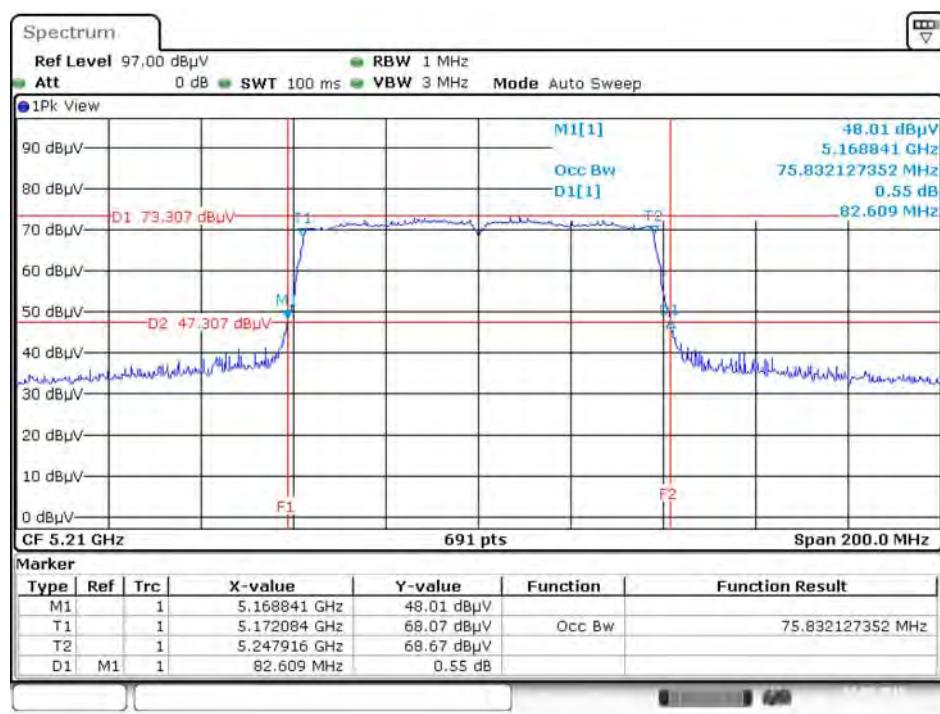

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band	Limit
5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/> Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/> Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/> Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power => 3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

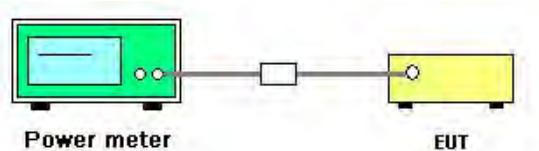

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	59%
Test Engineer	Mars Lin	Test Date	May 23, 2015

For non-beamforming mode:

Mode	Frequency	Conducted Power (dBm)		Max. Limit (dBm)	Result
		Chain 1			
802.11a	5180 MHz	21.63		30.00	Complies
	5200 MHz	21.72		30.00	Complies
	5240 MHz	22.05		30.00	Complies

For beamforming mode:

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11ac	5180 MHz	16.39	16.31	16.75	21.26	30.00	Complies
	5200 MHz	18.11	18.13	18.34	22.97	30.00	Complies
	VHT20	22.06	21.57	22.28	26.75	30.00	Complies
802.11ac	5190 MHz	15.67	15.43	15.88	20.44	30.00	Complies
	MCS0/Nss1	20.15	19.97	20.23	24.89	30.00	Complies
	VHT40	13.56	13.46	13.84	18.39	30.00	Complies
802.11ac	5210 MHz	13.56	13.46	13.84	18.39	30.00	Complies
MCS0/Nss1							
VHT80							

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.77 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band	Limit
5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/> Indoor access point	17 dBm/MHz
<input type="checkbox"/> Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/> Mobile and portable client devices	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

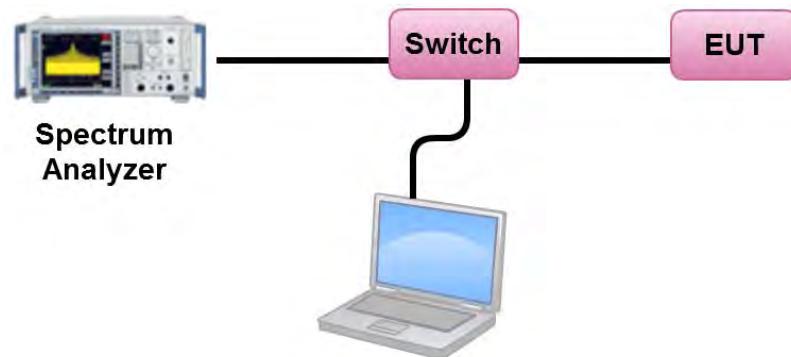

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	59%
Test Engineer	Mars Lin	Test Date	May 23, 2015

For non-beamforming mode:

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5180 MHz	8.49	17.00	Complies
	5200 MHz	8.36	17.00	Complies
	5240 MHz	8.72	17.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 \right] / N_{ANT} = 4.77 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

For beamforming mode:

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5180 MHz	8.25	17.00	Complies
	5200 MHz	9.87	17.00	Complies
	5240 MHz	13.26	17.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	4.32	17.00	Complies
	5230 MHz	8.69	17.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	-0.62	17.00	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2 \right] / N_{ANT} = 4.77 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For non-beamforming mode:

Power Density Plot on Configuration IEEE 802.11a / Chain 3 / 5240 MHz

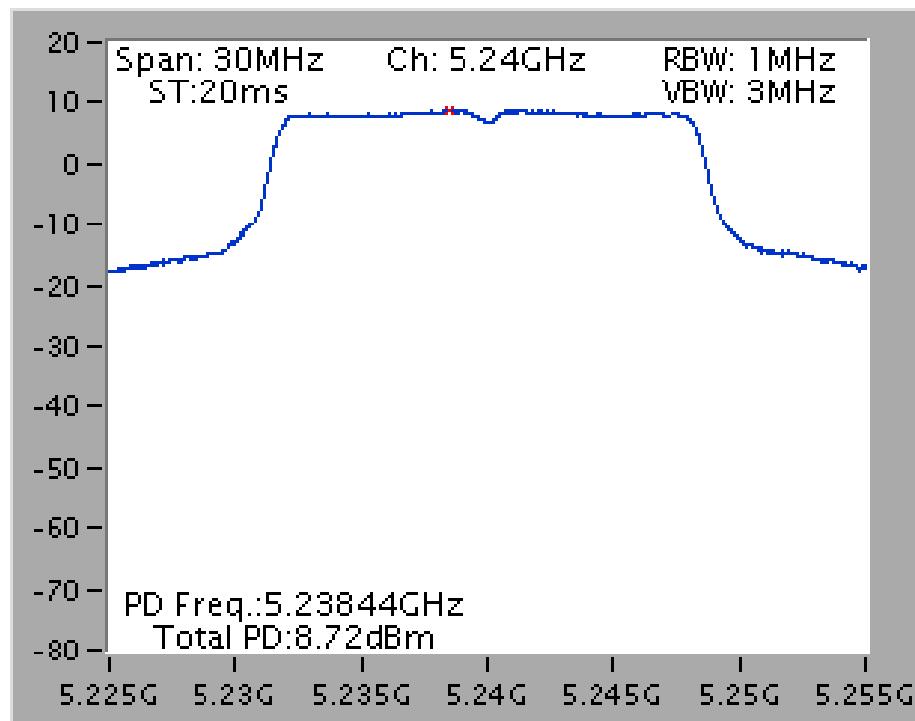


For beamforming mode:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 + Chain 4 + Chain 5 / 5240 MHz

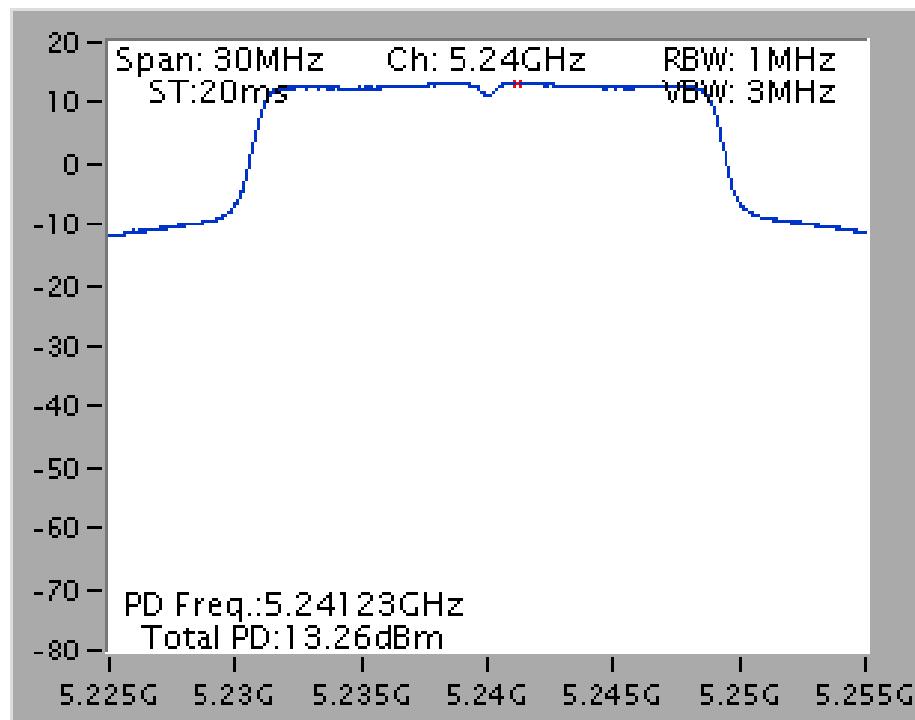

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 + Chain 4 + Chain 5 / 5230 MHz

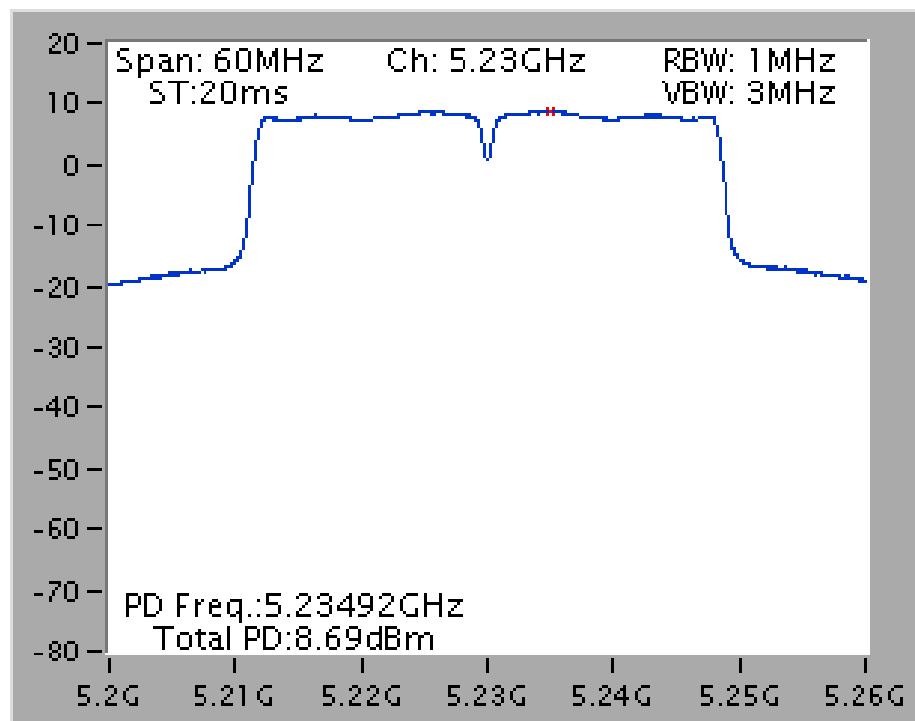

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 + Chain 4 + Chain 5 / 5210 MHz

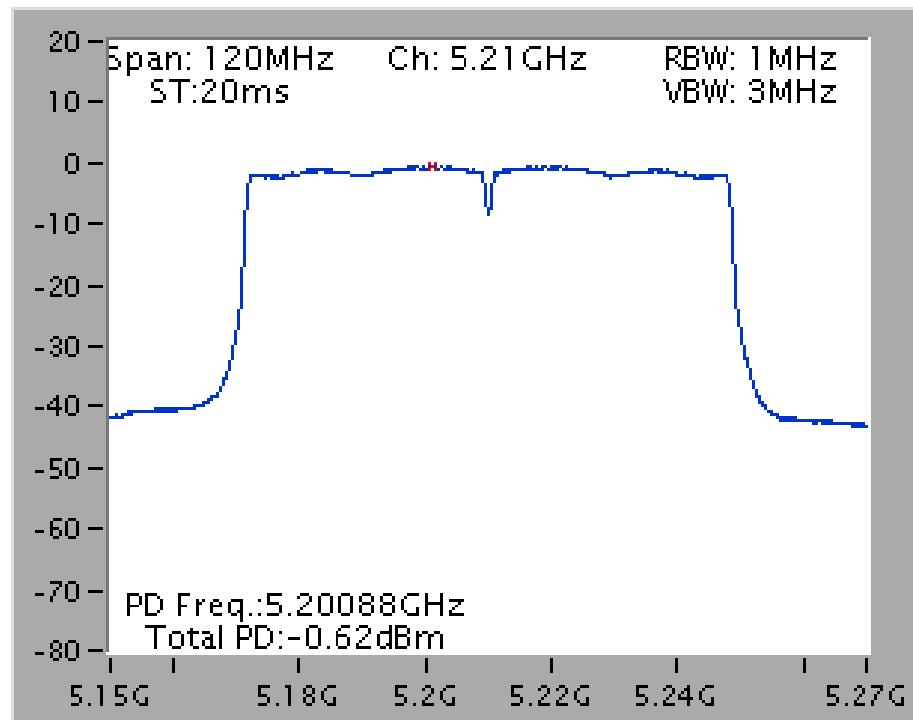

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz .

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

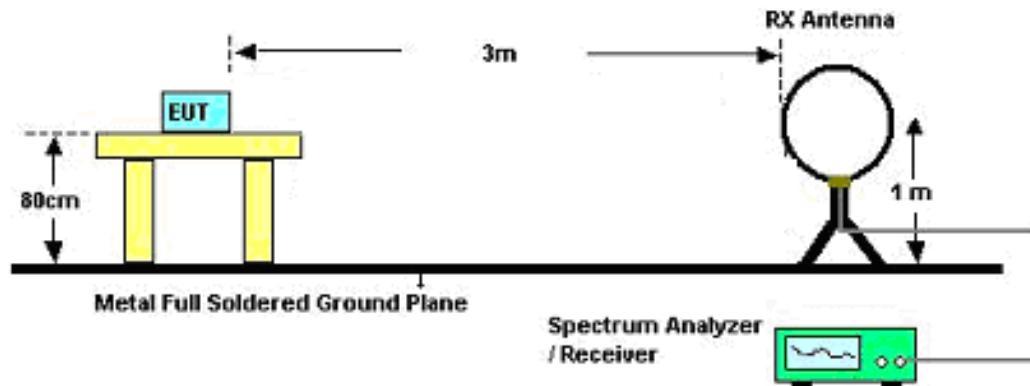

For Radiated Emissions: 30MHz~1GHz

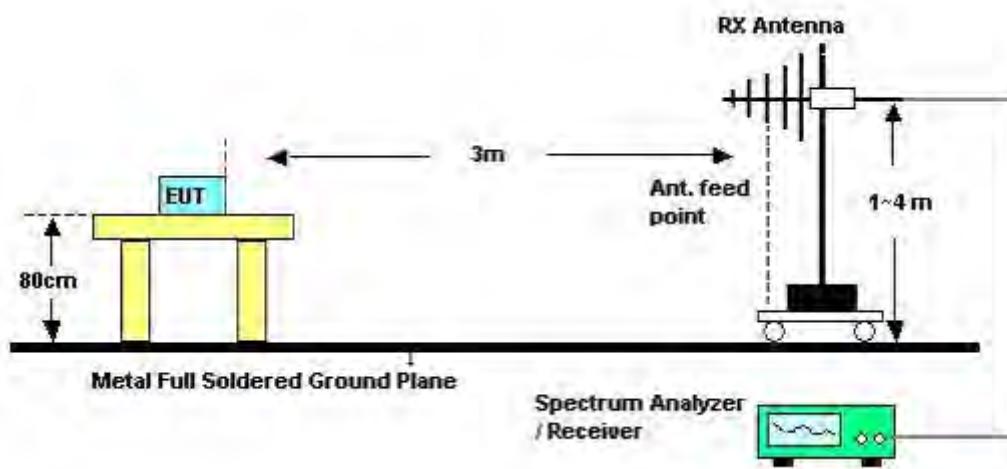

For Radiated Emissions: Above 1GHz

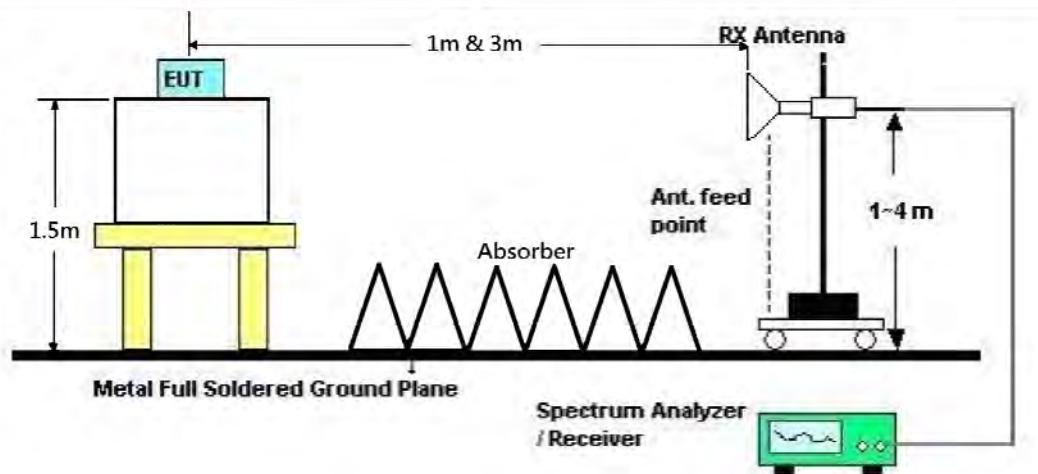

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	CTX
Test Date	May 23, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	CTX

Horizontal

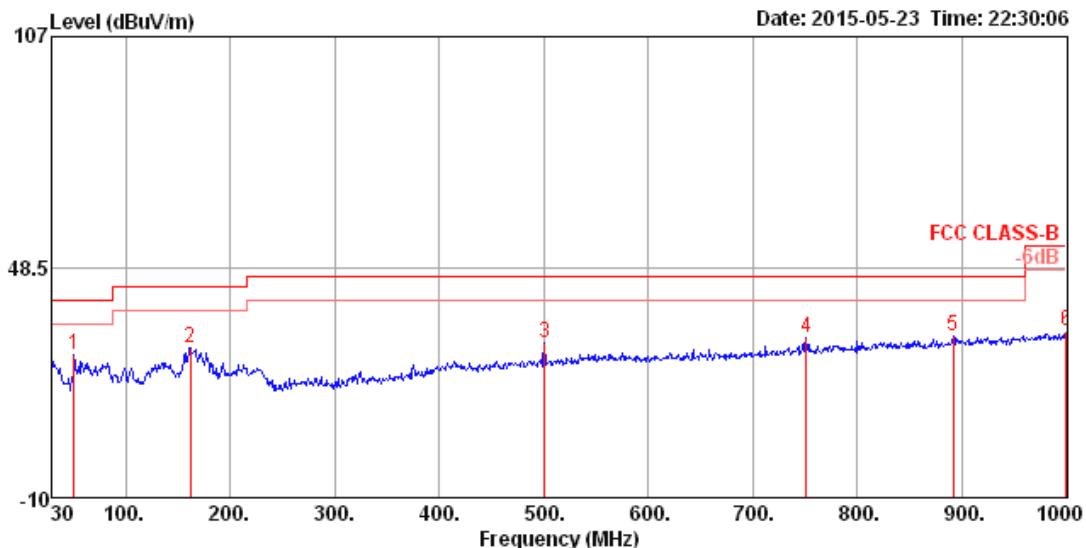

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	50.37	26.44	40.00	-13.56	43.61	0.84	7.44	25.45	400	65	HORIZONTAL	Peak
2	161.92	27.94	43.50	-15.56	45.59	1.53	9.51	28.69	200	90	HORIZONTAL	Peak
3	500.45	29.18	46.00	-16.82	37.12	2.82	16.92	27.68	150	148	HORIZONTAL	Peak
4	750.71	30.61	46.00	-15.39	35.18	3.53	19.69	27.79	125	216	HORIZONTAL	Peak
5	891.36	31.05	46.00	-14.95	33.54	3.96	20.58	27.03	125	358	HORIZONTAL	Peak
6	1000.00	32.36	54.00	-21.64	33.02	4.21	21.44	26.31	100	234	HORIZONTAL	Peak

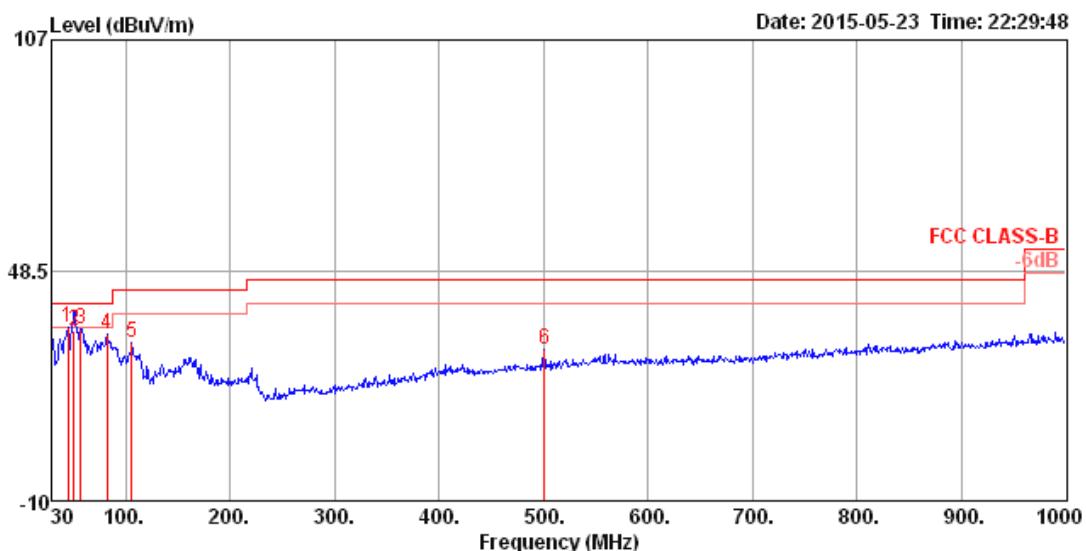Vertical


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	44.55	34.00	40.00	-6.00	48.93	0.79	9.74	25.46	100	128	VERTICAL Peak
2	50.37	33.12	40.00	-6.88	50.29	0.84	7.44	25.45	100	254	VERTICAL QP
3	57.16	33.69	40.00	-6.31	53.00	0.88	5.51	25.70	200	94	VERTICAL Peak
4	82.38	32.15	40.00	-7.85	50.39	1.06	7.13	26.43	200	15	VERTICAL Peak
5	105.66	30.14	43.50	-13.36	44.91	1.22	11.03	27.02	100	196	VERTICAL Peak
6	500.45	28.39	46.00	-17.61	36.33	2.82	16.92	27.68	125	69	VERTICAL Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode:

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 36 / Chain 3
Test Date	May 14, 2015		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB						
MHz		dBuV/m	dBuV/m										
1	15528.37	60.54	74.00	-13.46	43.99	12.91	34.72	38.36	HORIZONTAL		195	152	Peak
2	15530.84	47.76	54.00	-6.24	31.21	12.91	34.72	38.36	HORIZONTAL		195	152	Average

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB						
MHz		dBuV/m	dBuV/m										
1	15530.54	61.00	74.00	-13.00	44.47	12.91	34.72	38.34	VERTICAL		123	208	Peak
2	15533.59	47.54	54.00	-6.46	31.00	12.93	34.73	38.34	VERTICAL		123	208	Average

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 40 / Chain 3
Test Date	May 14, 2015		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m				
1	15602.39	60.59	74.00	-13.41	44.13	12.96	34.75	38.25	HORIZONTAL	184	162	Peak
2	15613.20	47.83	54.00	-6.17	31.38	12.96	34.75	38.24	HORIZONTAL	184	162	Average

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m				
1	15591.75	47.79	54.00	-6.21	31.32	12.95	34.75	38.27	VERTICAL	160	172	Average
2	15597.61	61.29	74.00	-12.71	44.81	12.96	34.75	38.27	VERTICAL	160	172	Peak

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 48 / Chain 3
Test Date	May 14, 2015		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m				
1	15712.10	61.05	74.00	-12.95	44.71	13.03	34.79	38.10	HORIZONTAL	148	162	Peak
2	15727.77	47.94	54.00	-6.06	31.62	13.04	34.80	38.08	HORIZONTAL	148	162	Average

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m				
1	15719.22	60.42	74.00	-13.58	44.11	13.03	34.80	38.08	VERTICAL	103	153	Peak
2	15725.64	47.91	54.00	-6.09	31.60	13.03	34.80	38.08	VERTICAL	103	153	Average

For beamforming mode:

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15537.89	45.40	54.00	-8.60	28.85	12.92	34.72	38.35	HORIZONTAL	288	155 Average
2	15541.70	58.24	74.00	-15.76	41.71	12.92	34.73	38.34	HORIZONTAL	288	155 Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15539.44	45.73	54.00	-8.27	29.19	12.92	34.72	38.34	VERTICAL	301	150 Average
2	15540.31	57.88	74.00	-16.12	41.34	12.92	34.72	38.34	VERTICAL	301	150 Peak

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15597.57	57.91	74.00	-16.09	41.44	12.96	34.75	38.26	HORIZONTAL	253	173 Peak
2	15599.92	45.53	54.00	-8.47	29.06	12.96	34.75	38.26	HORIZONTAL	253	173 Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15599.91	57.71	74.00	-16.29	41.23	12.96	34.75	38.27	VERTICAL	263	166 Peak
2	15601.31	45.68	54.00	-8.32	29.26	12.96	34.75	38.21	VERTICAL	263	166 Average

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15717.56	43.71	54.00	-10.29	27.39	13.03	34.80	38.09	HORIZONTAL	214	170 Average
2	15721.24	55.55	74.00	-18.45	39.23	13.03	34.80	38.09	HORIZONTAL	214	170 Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15718.26	44.02	54.00	-9.98	27.71	13.03	34.80	38.08	VERTICAL	238	166 Average
2	15720.52	56.33	74.00	-17.67	40.02	13.03	34.80	38.08	VERTICAL	238	166 Peak

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15569.78	57.39	74.00	-16.61	40.89	12.94	34.74	38.30	HORIZONTAL	194	175 Peak
2	15571.12	44.45	54.00	-9.55	27.95	12.94	34.74	38.30	HORIZONTAL	194	175 Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15570.89	57.36	74.00	-16.64	40.89	12.94	34.74	38.27	VERTICAL	214	170 Peak
2	15572.05	44.36	54.00	-9.64	27.89	12.94	34.74	38.27	VERTICAL	214	170 Average

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15689.81	56.56	74.00	-17.44	40.21	13.01	34.79	38.13	HORIZONTAL	216	184 Peak
2	15690.24	43.15	54.00	-10.85	26.80	13.01	34.79	38.13	HORIZONTAL	216	184 Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	15687.75	43.46	54.00	-10.54	27.08	13.01	34.78	38.15	VERTICAL	201	179 Average
2	15690.30	56.08	74.00	-17.92	39.71	13.01	34.79	38.15	VERTICAL	201	179 Peak

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 3 + Chain 4 + Chain 5
Test Date	May 14, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15627.77	44.70	54.00	-9.30	28.27	12.97	34.76	38.22	HORIZONTAL	216	184 Average
2	15631.48	57.75	74.00	-16.25	41.32	12.98	34.76	38.21	HORIZONTAL	216	184 Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
			Line	Limit	Level	Loss	Factor	Pol/Phase			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm
1	15627.95	57.56	74.00	-16.44	41.14	12.97	34.76	38.21	VERTICAL	210	189 Peak
2	15630.86	44.40	54.00	-9.60	27.97	12.98	34.76	38.21	VERTICAL	210	189 Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz .

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode:

Temperature	22°C	Humidity			38%				
Test Engineer	Mars Lin	Configurations			IEEE 802.11a CH 36, 40, 48 / Chain 3				
Test Date	May 14, 2015								

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m			
		MHz	dBuV/m	dBuV/m	dB				deg	cm	
1	5150.00	53.68	54.00	-0.32	48.41	7.33	33.58	31.52 VERTICAL	0	175	Average
2	5150.00	72.57	74.00	-1.43	67.30	7.33	33.58	31.52 VERTICAL	0	175	Peak
3	5178.84	112.92			107.58	7.36	33.57	31.55 VERTICAL	0	175	Peak
4	5181.16	102.29			96.95	7.36	33.57	31.55 VERTICAL	0	175	Average

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m			
		MHz	dBuV/m	dBuV/m	dB				deg	cm	
1	5118.74	52.40	54.00	-1.60	47.19	7.30	33.59	31.50 VERTICAL	360	175	Average
2	5118.74	65.01	74.00	-8.99	59.80	7.30	33.59	31.50 VERTICAL	360	175	Peak
3	5198.84	113.22			107.84	7.38	33.56	31.56 VERTICAL	360	175	Peak
4	5201.16	102.51			97.13	7.38	33.56	31.56 VERTICAL	360	175	Average

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m			
		MHz	dBuV/m	dBuV/m	dB				deg	cm	
1	5118.74	47.83	54.00	-6.17	42.62	7.30	33.59	31.50 VERTICAL	358	192	Average
2	5119.90	61.02	74.00	-12.98	55.81	7.30	33.59	31.50 VERTICAL	358	192	Peak
3	5239.42	113.71			108.25	7.42	33.55	31.59 VERTICAL	358	192	Peak
4	5241.16	103.24			97.78	7.42	33.55	31.59 VERTICAL	358	192	Average
5	5354.05	61.59	74.00	-12.41	55.89	7.52	33.50	31.68 VERTICAL	358	192	Peak
6	5360.42	48.53	54.00	-5.47	42.81	7.53	33.50	31.69 VERTICAL	358	192	Average

Item 3, 4 are the fundamental frequency at 5240 MHz.

For beamforming mode:

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 3 + Chain 4 + Chain 5
Test Date	May 13, 2015		

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
MHz		dBuV/m	dBuV/m						deg	cm	
1	5096.80	64.42	74.00	-9.58	59.27	7.28	33.60	31.47	VERTICAL	175	149 Peak
2	5101.60	53.91	54.00	-0.09	48.75	7.28	33.60	31.48	VERTICAL	175	149 Average
3	5175.20	113.45			108.12	7.35	33.57	31.55	VERTICAL	175	149 Peak
4	5178.40	103.59			98.25	7.36	33.57	31.55	VERTICAL	175	149 Average

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
MHz		dBuV/m	dBuV/m						deg	cm	
1	5126.40	53.89	54.00	-0.11	48.67	7.31	33.59	31.50	HORIZONTAL	250	181 Average
2	5128.00	64.36	74.00	-9.64	59.13	7.31	33.59	31.51	HORIZONTAL	250	181 Peak
3	5208.00	104.29			98.89	7.39	33.56	31.57	HORIZONTAL	250	181 Average
4	5208.00	113.75			108.35	7.39	33.56	31.57	HORIZONTAL	250	181 Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
MHz		dBuV/m	dBuV/m						deg	cm	
1	5150.00	49.31	54.00	-4.69	44.04	7.33	33.58	31.52	VERTICAL	359	185 Average
2	5150.00	59.14	74.00	-14.86	53.87	7.33	33.58	31.52	VERTICAL	359	185 Peak
3	5241.60	106.67			101.21	7.42	33.55	31.59	VERTICAL	359	185 Average
4	5242.40	116.94			111.48	7.42	33.55	31.59	VERTICAL	359	185 Peak
5	5357.60	47.71	54.00	-6.29	41.99	7.53	33.50	31.69	VERTICAL	359	185 Average
6	5363.20	61.36	74.00	-12.64	55.64	7.53	33.50	31.69	VERTICAL	359	185 Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 3 + Chain 4 + Chain 5
Test Date	May 13, 2015		

Channel 38

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	5149.20	68.40	74.00	-5.60	63.13	7.33	33.58	31.52	VERTICAL			360	182	Peak
2	5150.00	53.60	54.00	-0.40	48.33	7.33	33.58	31.52	VERTICAL			360	182	Average
3	5185.20	109.71			104.37	7.36	33.57	31.55	VERTICAL			360	182	Peak
4	5194.00	98.74			93.37	7.37	33.56	31.56	VERTICAL			360	182	Average

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	5136.40	65.37	74.00	-8.63	60.13	7.32	33.59	31.51	VERTICAL			175	145	Peak
2	5146.00	53.87	54.00	-0.13	48.61	7.32	33.58	31.52	VERTICAL			175	145	Average
3	5225.20	104.54			99.11	7.40	33.55	31.58	VERTICAL			175	145	Average
4	5234.80	114.64			109.19	7.41	33.55	31.59	VERTICAL			175	145	Peak

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	22°C	Humidity	38%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 3 + Chain 4 + Chain 5
Test Date	May 13, 2015		

Channel 42

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	Line	dB	dBuV	dB	dB						
1	5146.00	66.39	74.00	-7.61	61.13	7.32	33.58	31.52	VERTICAL			360	186	Peak
2	5148.40	53.75	54.00	-0.25	48.48	7.33	33.58	31.52	VERTICAL			360	186	Average
3	5215.60	105.75			100.35	7.39	33.56	31.57	VERTICAL			360	186	Peak
4	5221.20	95.24			89.81	7.40	33.55	31.58	VERTICAL			360	186	Average
5	5350.00	45.93	54.00	-8.07	40.24	7.52	33.51	31.68	VERTICAL			360	186	Average
6	5367.60	59.09	74.00	-14.91	53.36	7.54	33.50	31.69	VERTICAL			360	186	Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

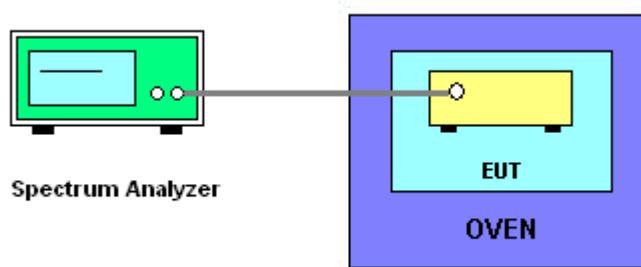

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	59%
Test Engineer	Mars Lin	Test Date	May 23, 2015

Mode: 20 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9736
110.00	5199.9730
93.50	5199.9724
Max. Deviation (MHz)	0.027600
Max. Deviation (ppm)	5.31

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9754
10	5199.9742
20	5199.9730
30	5199.9724
40	5199.9718
Max. Deviation (MHz)	0.028200
Max. Deviation (ppm)	5.42

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190 MHz
126.50	5189.9754
110.00	5189.9718
93.50	5189.9688
Max. Deviation (MHz)	0.031200
Max. Deviation (ppm)	6.01

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190 MHz
0	5189.9754
10	5189.9730
20	5189.9718
30	5189.9706
40	5189.9700
Max. Deviation (MHz)	0.030000
Max. Deviation (ppm)	5.78

Mode: 80 MHz
Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5210 MHz
126.50	5209.9760
110.00	5209.9760
93.50	5209.9752
Max. Deviation (MHz)	0.024800
Max. Deviation (ppm)	4.76

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5210 MHz
0	5209.9760
10	5209.9760
20	5209.9760
30	5209.9758
40	5209.9758
Max. Deviation (MHz)	0.024200
Max. Deviation (ppm)	4.64

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m ~ 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Thermometer	HTC-1	HTC-1	TP-1	-50°C~70°C	Mar. 11, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Thermometer	HTC-1	HTC-1	TP-8	-50°C~70°C	Mar. 05, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%