

## FCC RADIO TEST REPORT

**Report Reference No.** ..... NTEK-2011NT0930290F1

Compiled by (+ signature) ..... Tom Zhang



Approved by (+ signature) ..... Bovey Yang



**Applicant's name** ..... Donghui Great Techonology Co.Ltd.

Address ..... Room 1510B, Huaqiangbei Seg Plaza, Futian Area, Shenzhen,Guangdong, China

**Manufacture's Name** ..... Donghui Great Techonology Co.Ltd.

Address ..... Room 1510B, Huaqiangbei Seg Plaza, Futian Area, Shenzhen,Guangdong, China

### Test specification:

Standard ..... FCC Part 22H and 24E

Test procedure ..... ANSI C63.4-2003

### Test item description

Product name ..... Mobile Phone

FCC ID ..... Z4W1371434380FCC

Trademark ..... N/A

Model and/or type reference ..... DH98

Rating(s) ..... DC 3.7V by battery

### Testing Laboratory information:

Testing Laboratory Name ..... NTEK Testing Technology Co., Ltd

Address ..... 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao ' an District, Shenzhen P.R. China.

This device described above has been tested by NTEK Testing Technology Co., Ltd, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd, this document may be altered or revised by NTEK Testing Technology Co., Ltd, personal only, and shall be noted in the revision of the document

### Testing

Date of receipt of test item ..... 17 Oct. 2011

Date (s) of performance of tests ..... 1 Oct. 2011 ~ Oct.17 2011

Date of Issue ..... 17 Oct. 2011

Test Result ..... **Pass**

Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>1.1 TEST FACILITY</b>	<b>5</b>
<b>1.2 MEASUREMENT UNCERTAINTY</b>	<b>5</b>
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	<b>6</b>
<b>2.2 DESCRIPTION OF TEST MODES</b>	<b>7</b>
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>8</b>
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>9</b>
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>10</b>
<b>3 . TEST RESULT</b>	<b>11</b>
<b>3.1 ANTENNA REQUIREMENT</b>	<b>11</b>
<b>3.1.1 STANDARD REQUIREMENT</b>	<b>11</b>
<b>3.1.2 EUT ANTENNA</b>	<b>11</b>
<b>3.2 OUTPUT POWER</b>	<b>12</b>
<b>3.2.1 CONDUCTED OUTPUT POWER</b>	<b>12</b>
<b>3.2.2 RADIATED OUTPUT POWER</b>	<b>13</b>
<b>3.3 SPURIOUS EMISSION</b>	<b>16</b>
<b>3.3.1 CONDUCTED SPURIOUS EMISSION</b>	<b>16</b>
<b>3.3.2 RADIATED SPURIOUS EMISSION</b>	<b>18</b>
<b>3.4 FREQUENCY STABILITY</b>	<b>22</b>
<b>3.4.1 MEASUREMENT METHOD</b>	<b>22</b>
<b>3.4.2 PROVISIONS APPLICABLE</b>	<b>22</b>
<b>3.5 OCCUPIED BANDWIDTH</b>	<b>25</b>
<b>3.5.1 MEASUREMENT METHOD</b>	<b>25</b>
<b>3.5.2 PROVISIONS APPLICABLE</b>	<b>25</b>
<b>3.5.3 MEASUREMENT RESULT</b>	<b>25</b>
<b>3.6 EMISSION BANDWIDTH</b>	<b>26</b>
<b>3.6.1 MEASUREMENT METHOD</b>	<b>26</b>
<b>3.6.2 PROVISIONS APPLICABLE</b>	<b>26</b>
<b>3.6.3 MEASUREMENT RESULT</b>	<b>26</b>
<b>3.7 BAND EDGE</b>	<b>27</b>
<b>3.7.1 MEASUREMENT METHOD</b>	<b>27</b>
<b>3.7.2 PROVISIONS APPLICABLE</b>	<b>27</b>
<b>3.7.3 MEASUREMENT RESULT</b>	<b>27</b>
<b>APPENDIX I</b>	<b>28</b>
<b>APPENDIX II</b>	<b>40</b>
<b>APPENDIX III</b>	<b>46</b>

<b>Table of Contents</b>	<b>Page</b>
<b>APPENDIX IV</b>	<b>50</b>
<b>4 . EUT TEST PHOTO</b>	<b>52</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
3	Frequency Stability		2.1055 /24.235	Pass
4	Occupied Bandwidth		2.1049 (h)(i)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
6	Band Edge		22.917(b) / 24.238 (b)	Pass

---

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report.

**1.1 TEST FACILITY**

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC FRN Registration Nombre:238937; IC Registration Nombre:9270A-1

**1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	Radiated Emission Test	$\pm 3.17\text{dB}$
3	RF power,conducted	$\pm 0.16\text{dB}$
4	Spurious emissions,conducted	$\pm 0.21\text{dB}$
5	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone
Trade Name	N/A
Model Name	DH98
OEM Brand/Model Name	N/A
Model Difference	N/A
Frequency:	GSM 850 MHz; PCS 1900 MHz
Output Power:	GSM850(Class 4) : 2.05 W (33.12dBm) GPRS850(Multislot Class 10) : 1.95 W (32.9 dBm) GSM1900 (Class 1) : 0.85 W (29.30dBm) GPRS1900 (Multislot Class 10) : 0.77 W (28.88 dBm)
Type of Modulation	GMSK
Antenna Type	PIFA Antenna
Bluetooth	Frequency:2400 – 2483.5 MHz Modulation:GFSK Output Power: < -4dBm
Wifi	Frequency:2412 – 2462 MHz Modulation:DSSS Output Power: < 13 dBm
Power Source	DC Voltage supplied from battery
Power Rating	DC 3.7V
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	N/A
EUT Modification(s)	N/A
SIM card:	The Phone has dual SIM Card sockets but only one of the dual SIM Card can be transmitting when the two SIM Cards are inserting the phone together. Anyone of the SIM Card socket was tested

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


For Radiated Emission	
Final Test Mode	Description
GSM850	TX1
PCS1900	TX2
GPRS850	TX3
GPRS1900	TX4

Note:


- (1) During the testing, the EUT (GSM Dual Band GPRS Digital Mobile Phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.
- (2) The EUT use new battery.

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### CONDUCTED METHOD:

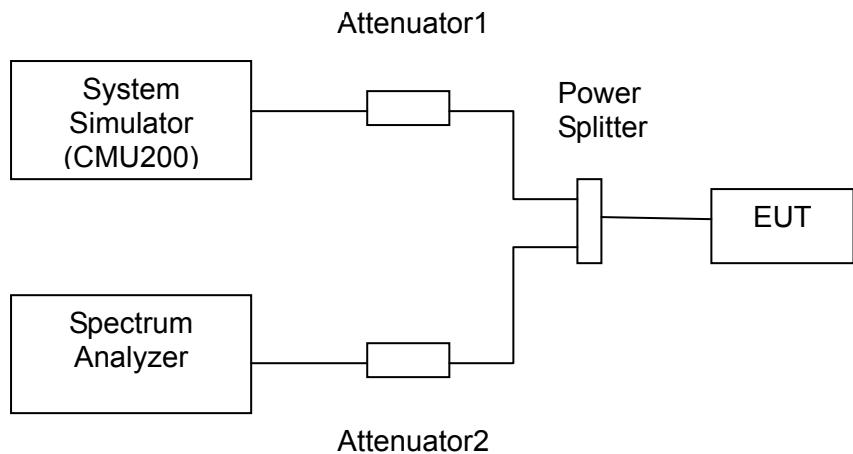

#### RADIATED METHOD:

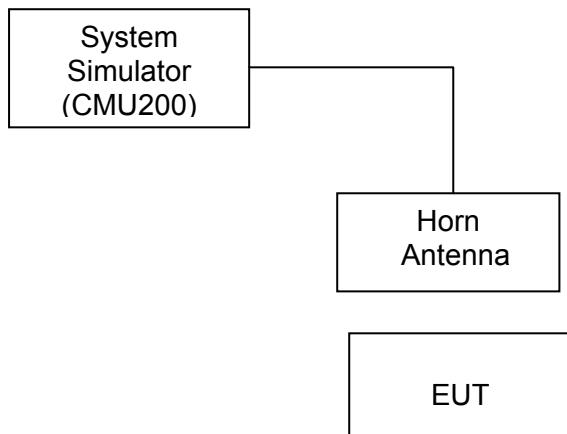

## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Mobile Phone	N/A	DH98	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2012
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2012
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2012
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2012
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2012
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2012
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2012
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2012
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2012
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2012
11	Communication Tester	R&S	CMU200	A0304247	Jul. 06. 2012
12	Power Splitter	Agilent	11636A	N/A	Jul. 06. 2012
13	Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	Jul. 06. 2012

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2012
2	LISN	R&S	ENV216	101313	Jul. 06. 2012
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2012
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2012
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2012
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2012

### **3. TEST RESULT**

#### **3.1 ANTENNA REQUIREMENT**

##### **3.1.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

##### **3.1.2 EUT ANTENNA**

The EUT antenna is integral Antenna. It comply with the standard requirement.

### 3.2 OUTPUT POWER

#### 3.2.1 CONDUCTED OUTPUT POWER MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band

#### PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHZ			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	5	33 dBm (2W)	+/- 1
GPRS	3	33 dBm (2W)	+/- 1

Conducted Output Power Limits for PCS 1900 MHZ			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	0	30 dBm (1W)	+/- 1
GPRS	3	30 dBm (1W)	+/- 1

#### MEASUREMENT RESULT

Conducted Output Power for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	824.2	5	33.12	0.12	Pass
	836.6	5	32.17	-0.83	Pass
	848.8	5	32.36	-0.64	Pass
GPRS	824.2	3	32.90	-0.10	Pass
	836.6	3	32.36	-0.64	Pass
	848.8	3	32.68	-0.32	Pass

Conducted Output Power for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	1850.2	0	28.45	-1.55	Pass
	1880.0	0	28.82	-1.12	Pass
	1909.8	0	29.30	-0.70	Pass
GPRS	1850.2	3	28.39	-1.61	Pass
	1880.0	3	28.83	-1.17	Pass
	1909.8	3	28.88	-1.12	Pass

Please refers to Appendix IV for compliance test plots for Conducted Out Power

### 3.2.2 RADIATED OUTPUT POWER MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_{r}$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl}=P_{in} + 2.15 - P_{r}$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power=PM_{ea}+AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).

ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

## PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)		
Mode	Power Step	Nominal Peak Power
GSM	5	<=38.45 dBm (7W)
GPRS	3	<=38.45 dBm (7W)

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)		
Mode	Power Step	Nominal Peak Power
GSM	0	<=33 dBm (2W)
GPRS	3	<=33 dBm (2W)

## MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	5	27.98	Horizontal	Pass
	836.6	5	27.67	Horizontal	Pass
	848.8	5	27.76	Horizontal	Pass
GPRS	824.2	3	27.66	Horizontal	Pass
	836.6	3	26.76	Horizontal	Pass
	848.8	3	26.88	Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	0	26.74	Horizontal	Pass
	1880.0	0	27.56	Horizontal	Pass
	1909.8	0	27.87	Horizontal	Pass
GPRS	1850.2	3	27.51	Horizontal	Pass
	1880.0	3	26.74	Horizontal	Pass
	1909.8	3	27.65	Horizontal	Pass

### 3.3 SPURIOUS EMISSION

#### 3.3.1 CONDUCTED SPURIOUS EMISSION

##### MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

##### PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

##### MEASUREMENT RESULT

Conducted Spurious Emission for GSM 850 MHz						
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	B.I.N.F	1673.2	nf	1697.6	B.I.N.F
3	2472.6	B.I.N.F	2509.8	nf	2546.4	B.I.N.F
4	3296.8	B.I.N.F	3346.4	nf	3395.2	B.I.N.F
5	4121	B.I.N.F	4183	nf	4244	B.I.N.F
6	4945.2	B.I.N.F	5019.6	nf	5092.8	B.I.N.F
7	5769.4	B.I.N.F	5856.2	nf	5941.6	B.I.N.F
8	6593.6	B.I.N.F	6692.8	nf	6790.4	B.I.N.F
9	7417.8	B.I.N.F	7529.4	nf	7639.2	B.I.N.F
10	8242	B.I.N.F	8366	nf	8488	B.I.N.F

● B.I.N.F: Below Instruments Noise floor

Conducted Spurious Emission for PCS 1900 MHz						
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	B.I.N.F	3760	nf	3819.6	B.I.N.F
3	5550.6	B.I.N.F	5640	nf	5729.4	B.I.N.F
4	7400.8	B.I.N.F	7520	nf	7639.2	B.I.N.F
5	9251.0	B.I.N.F	9400	nf	9549.0	B.I.N.F
6	11101.2	B.I.N.F	11280	nf	11458.8	B.I.N.F
7	12951.4	B.I.N.F	13160	nf	13368.6	B.I.N.F
8	14801.6	B.I.N.F	15040	nf	15278.4	B.I.N.F
9	16651.8	B.I.N.F	16920	nf	17188.2	B.I.N.F
10	18502.0	B.I.N.F	18800	nf	19098.0	B.I.N.F

B.I.N.F: Below Instruments Noise floor

Please refers to Appendix I for compliance test plots for Conducted Spurious Emission


### 3.3.2 RADIATED SPURIOUS EMISSION

## MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107$  (dBuV to dBm) The SA is calibrated using following setup.

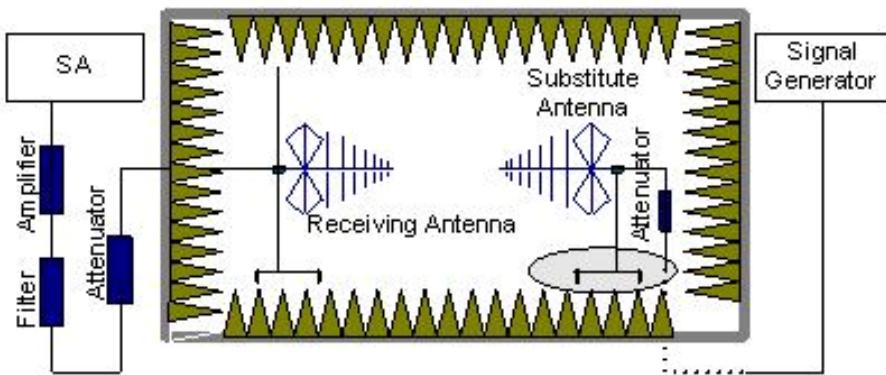

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

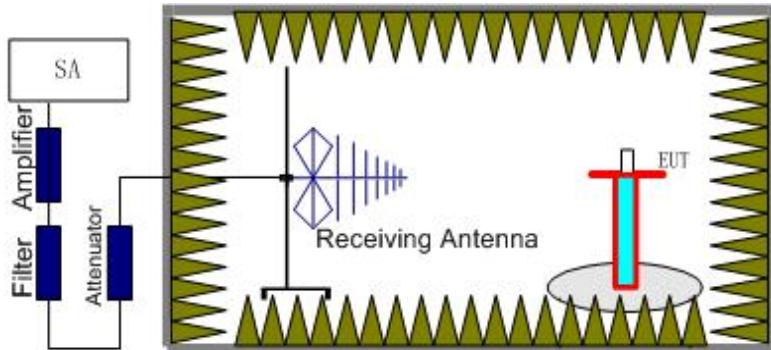

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900, GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $\text{Power} = P_{\text{Mea}} + A_{Rpl}$

## PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**MEASUREMENT RESULT**

<b>The Worst Test Results for Channel 128 / 824.2 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1648.00	-37.54	-2.95	-34.59	-13.00	Horizontal
1752.00	-36.74	-0.35	-36.39	-13.00	Vertical
2472.00	-39.87	0.12	-39.99	-13.00	Horizontal
9086.00	-38.46	8.45	-46.91	-13.00	Horizontal

<b>The Worst Test Results for Channel 190/836.6 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1673.00	-39.98	-2.09	-37.89	-13.00	Horizontal
1903.00	-41.26	-0.25	-41.01	-13.00	Vertical
9089.00	-45.33	8.52	-53.85	-13.00	Vertical

<b>The Worst Test Results for Channel 251/848.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
1698.00	-35.64	-2.25	-33.39	-13.00	Horizontal
1888.50	-42.18	-0.29	-41.89	-13.00	Vertical
2131.00	-44.39	-0.87	-43.52	-13.00	Vertical
9089.00	-40.91	8.52	-49.43	-13.00	Horizontal

<b>The Worst Test Results for Channel 512/1850.2 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
1999.00	-39.87	9.6	-49.47	-13.00	Horizontal
3700.00	-34.28	10.5	-44.78	-13.00	Horizontal
12950.40	-39.15	12.3	-51.45	-13.00	Vertical
17919.60	-38.84	18.7	-57.54	-13.00	Vertical

<b>The Worst Test Results for Channel 661/1880.0 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
2000.50	-34.98	9.8	-44.78	-13.00	Vertical
9399.00	-37.11	11.8	-48.91	-13.00	Vertical
13160.40	-33.22	14.4	-47.62	-13.00	Horizontal
15039.60	-35.46	14.9	-50.36	-13.00	Vertical
17941.20	-32.78	19.9	-52.68	-13.00	Horizontal

<b>The Worst Test Results for Channel 810/1909.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
2000.00	-31.21	9.8	-41.01	-13.00	Vertical
9548.50	-35.66	11.3	-46.96	-13.00	Horizontal
13367.40	-37.54	12.4	-49.94	-13.00	Horizontal
15277.80	-36.94	14.8	-51.74	-13.00	Vertical
17931.60	-33.32	19	-52.32	-13.00	Horizontal

### **3.4 FREQUENCY STABILITY**

#### **3.4.1 MEASUREMENT METHOD**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- (1) Measure the carrier frequency at room temperature.
- (2) Subject the EUT to overnight soak at -30°C.
- (3) With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900, channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- (4) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- (5) Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- (6) Subject the EUT to overnight soak at +50°C.
- (7) With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- (8) Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- (9) At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **3.4.2 PROVISIONS APPLICABLE**

**For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

### **MEASUREMENT RESULT**

<b>Frequency Error Against Voltage for GSM 850 MHz</b>		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	12	0.015
3.8	13	0.016
4.2	17	0.020

<b>Frequency Error Against Temperature for GSM 850 MHz</b>		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	27	0.032
-20	28	0.033
-10	28	0.030
0	24	0.030
10	19	0.022
20	19	0.022
30	20	0.023
40	24	0.028
50	25	0.029

<b>Frequency Error Against Voltage for PCS 1900 MHz</b>		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	35	0.018
3.8	30	0.015
4.2	34	0.018

<b>Frequency Error Against Temperature for PCS 1900 MHz</b>		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	30	0.016
-20	42	0.022
-10	33	0.018
0	36	0.019
10	35	0.018
20	31	0.016
30	30	0.016
40	33	0.018
50	37	0.020

### 3.5 OCCUPIED BANDWIDTH

#### 3.5.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### 3.5.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

#### 3.5.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
GSM	824.2	246.23
	836.6	249.32
	848.8	246.58
GPRS	824.2	243.99
	836.6	250.06
	848.8	250.97

Occupied Bandwidth (99%) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
GSM	1850.2	250.03
	1880.0	247.62
	1909.8	245.29
GPRS	1850.2	248.57
	1880.0	248.11
	1909.8	247.44

Please refers to Appendix II for compliance test plots for Occupied Bandwidth (99%)

### 3.6 EMISSION BANDWIDTH

#### 3.6.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### 3.6.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

#### 3.6.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)
GSM	824.2	309.50
	836.6	323.01
	848.8	324.07
GPRS	824.2	312.16
	836.6	323.95
	848.8	312.68

Emission Bandwidth (-26dBc) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)
GSM	1850.2	347.26
	1880.0	342.01
	1909.8	344.17
GPRS	1850.2	344.42
	1880.0	341.05
	1909.8	341.34

Please refers to Appendix II for compliance test plots for Emission Bandwidth (-26dBc)

### **3.7 BAND EDGE**

#### **3.7.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

#### **3.7.2 PROVISIONS APPLICABLE**

as Specified in FCC rules of 22.917(b) and 24.238(b)

#### **3.7.3 MEASUREMENT RESULT**


Please refers to Appendix III for compliance test plots for band edges

## APPENDIX I


## TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

## CONDUCTED EMISSION IN GSM BAND


Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

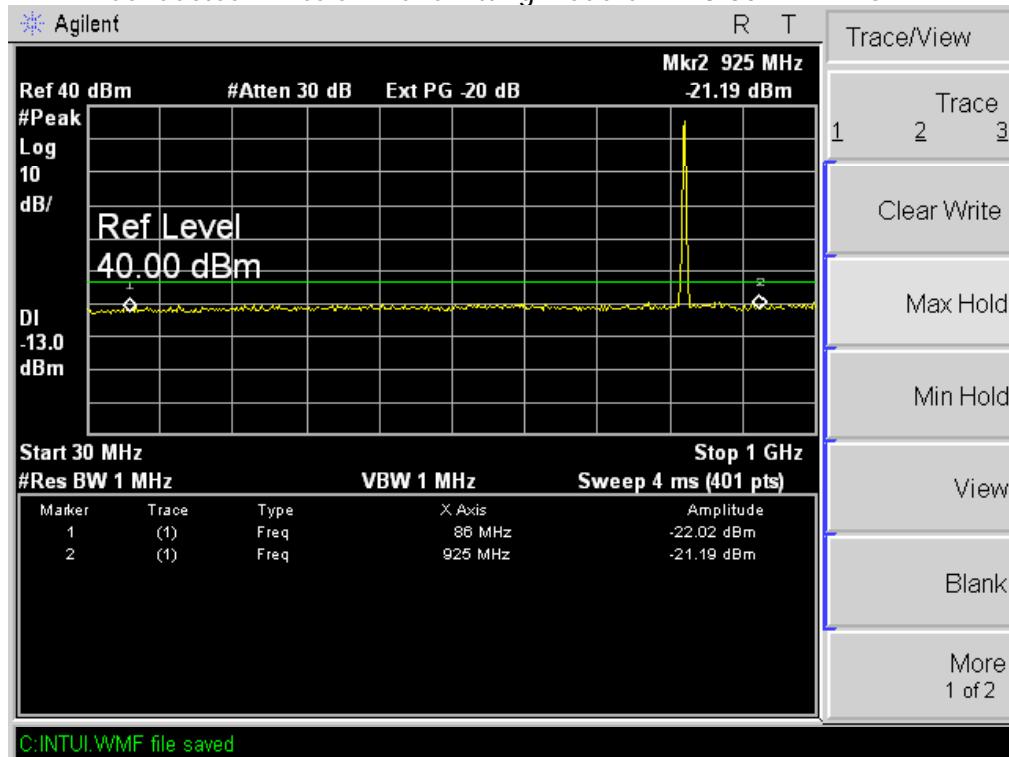


Conducted Emission Transmitting Mode CH 128 1GHz – 26.5GHz

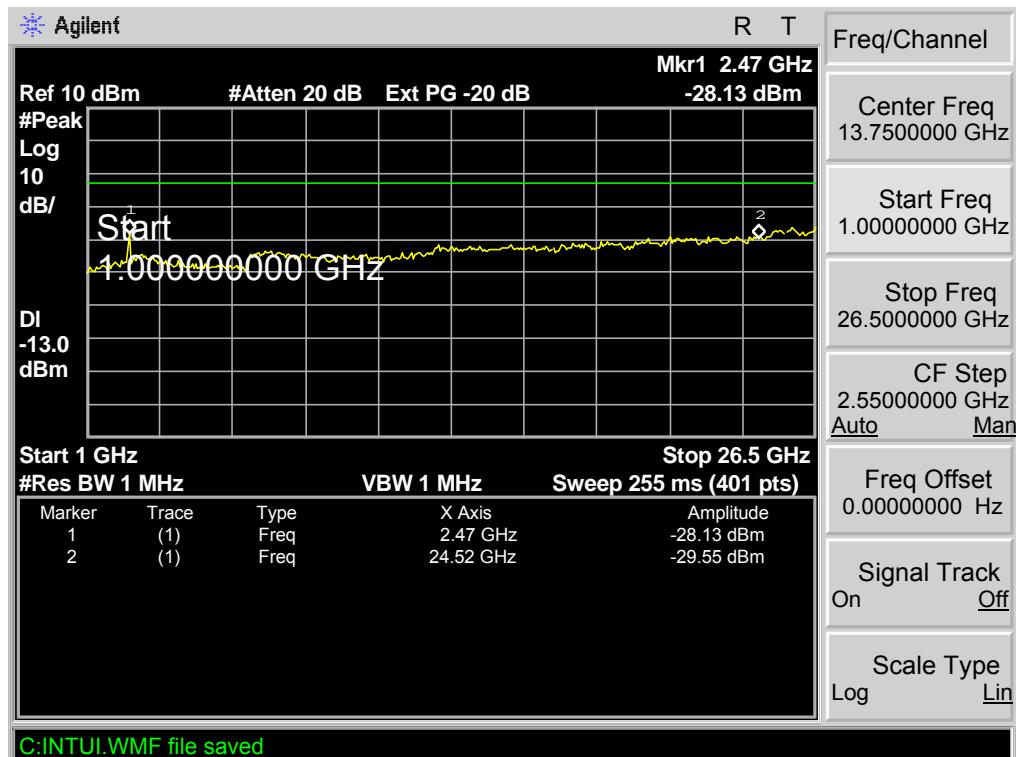


## Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

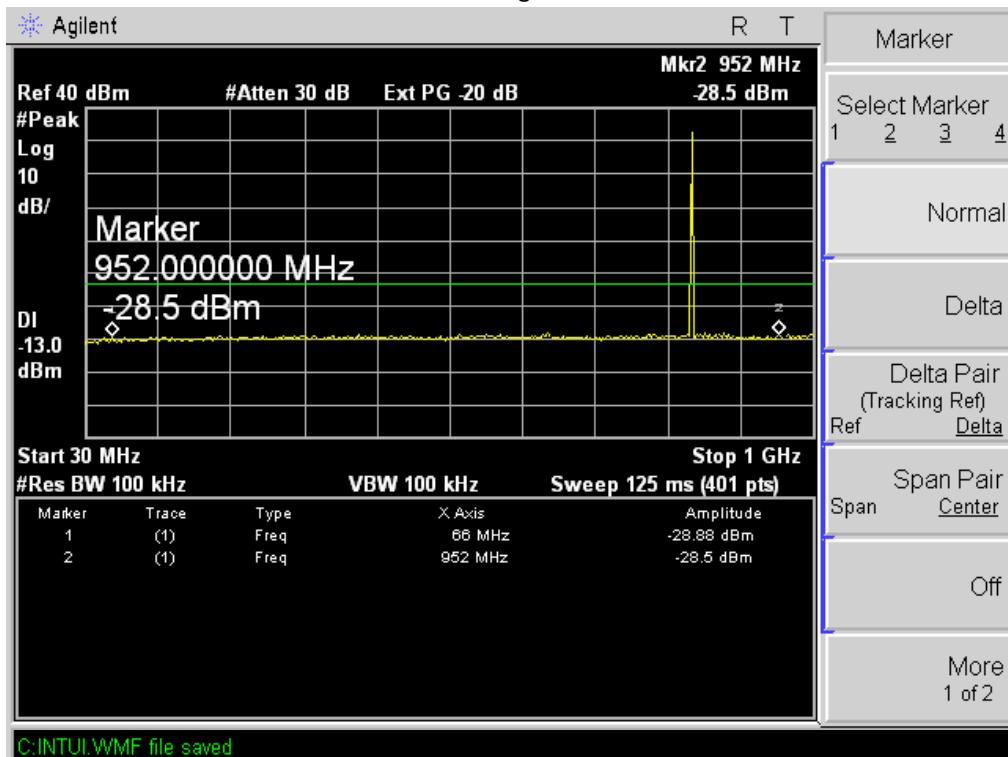


## Conducted Emission Transmitting Mode CH 190 1GHz – 26.5GHz

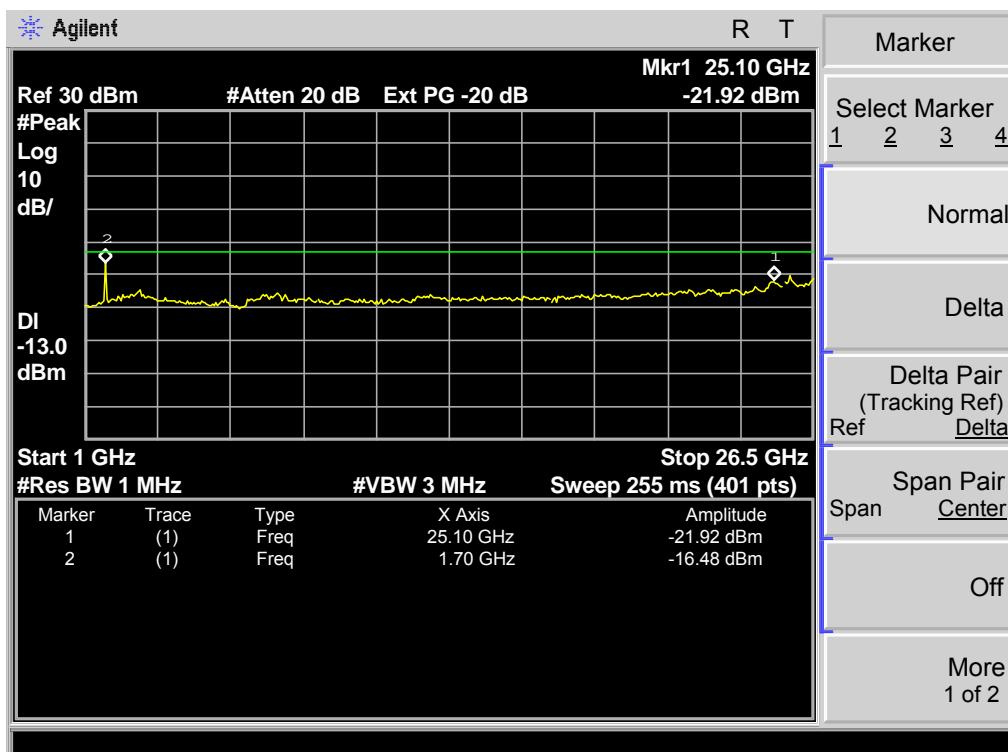

## Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

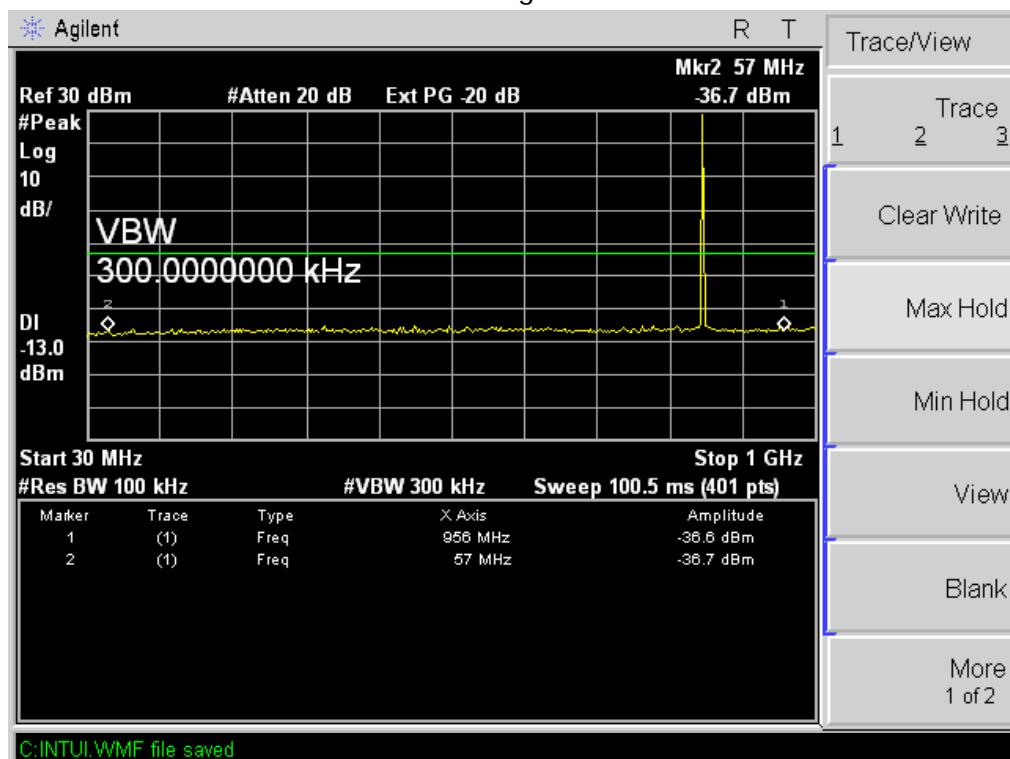


## Conducted Emission Transmitting Mode CH 251 1GHz – 26.5GHz

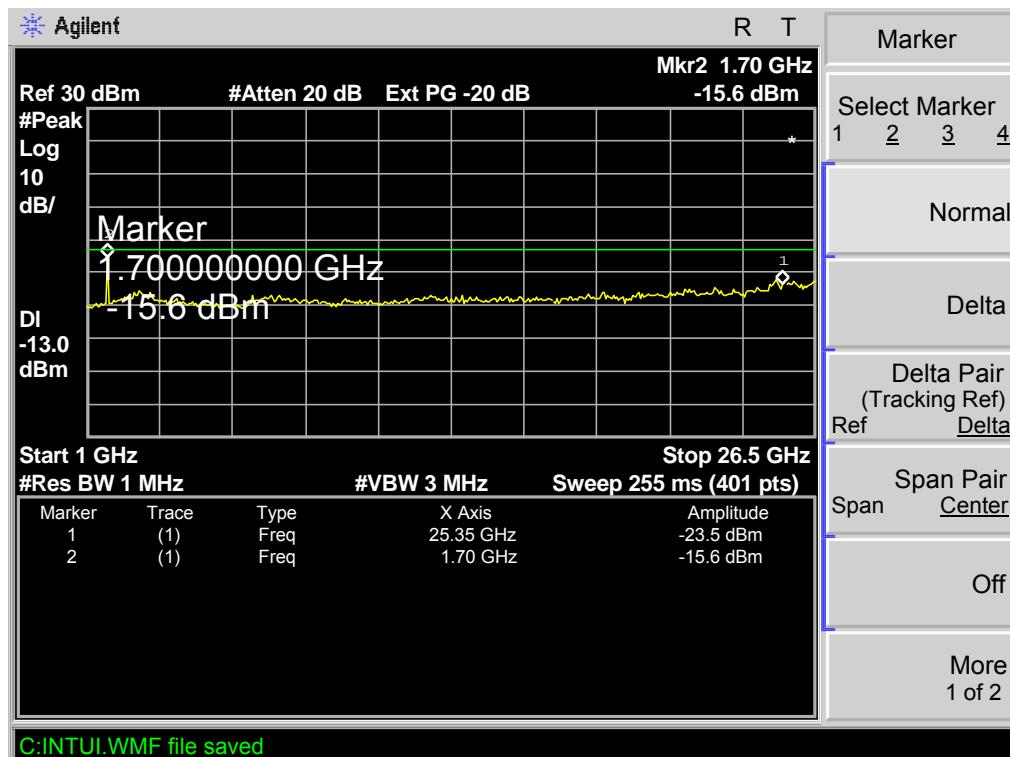


## CONDUCTED EMISSION IN GPRS BAND


Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

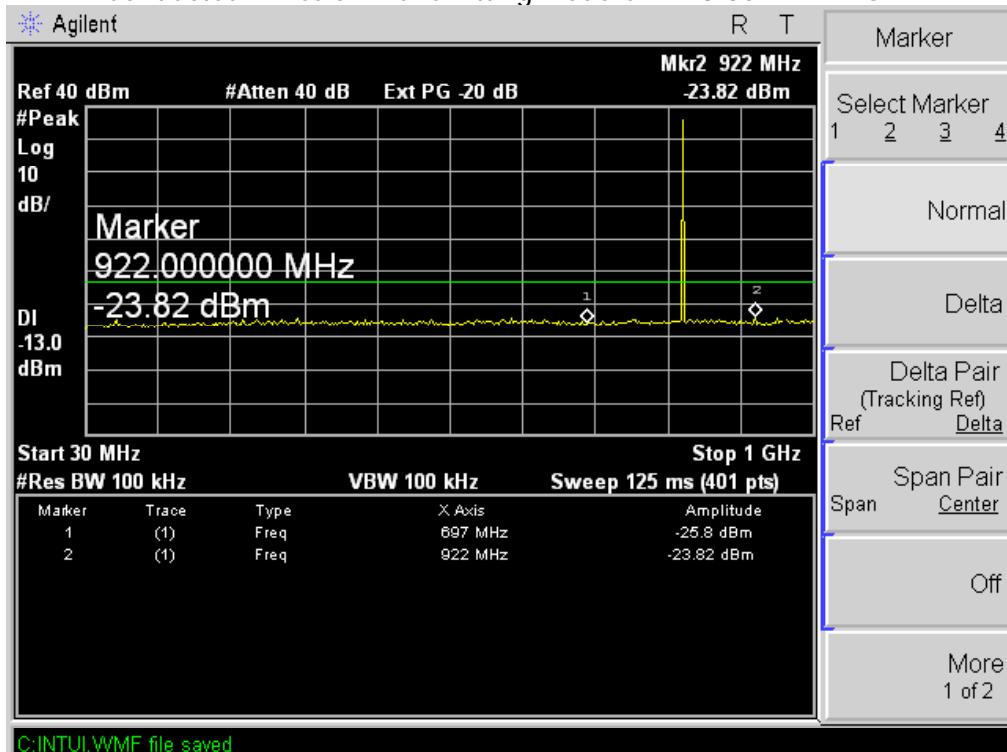


Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

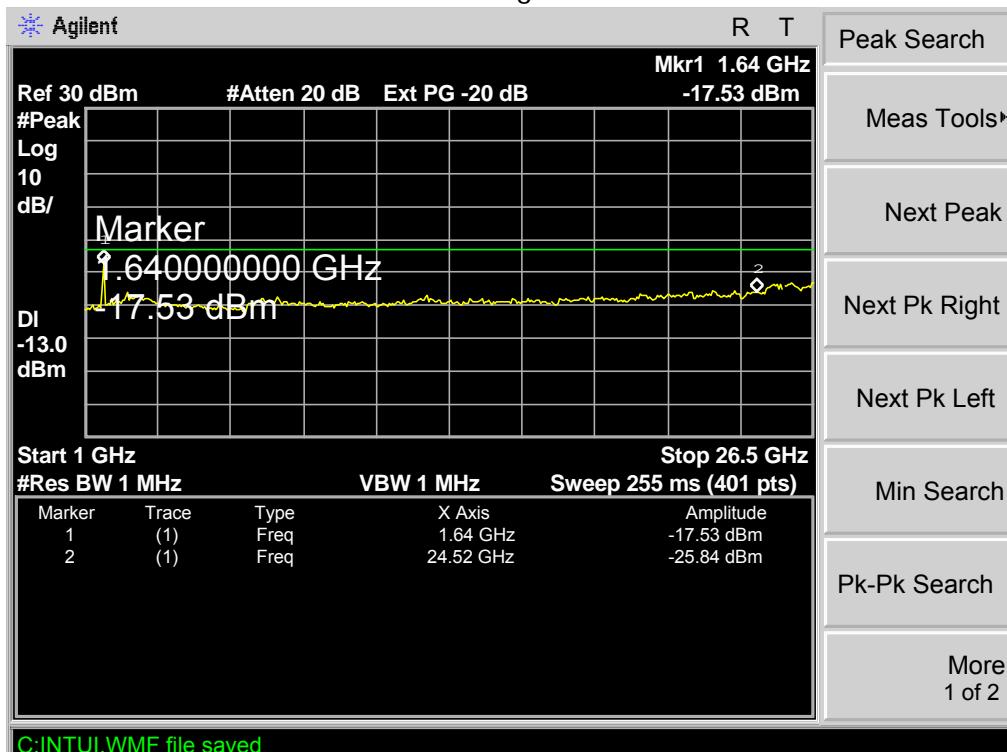


## Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

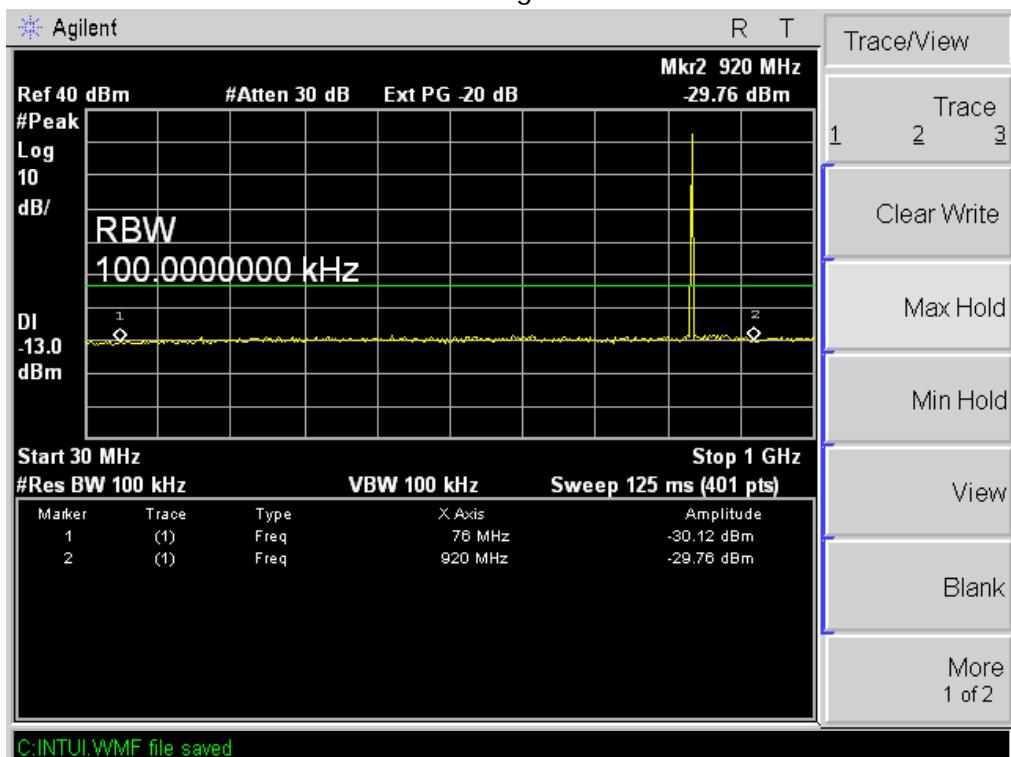


## Conducted Emission Transmitting Mode CH 190 1GHz – 26.5GHz

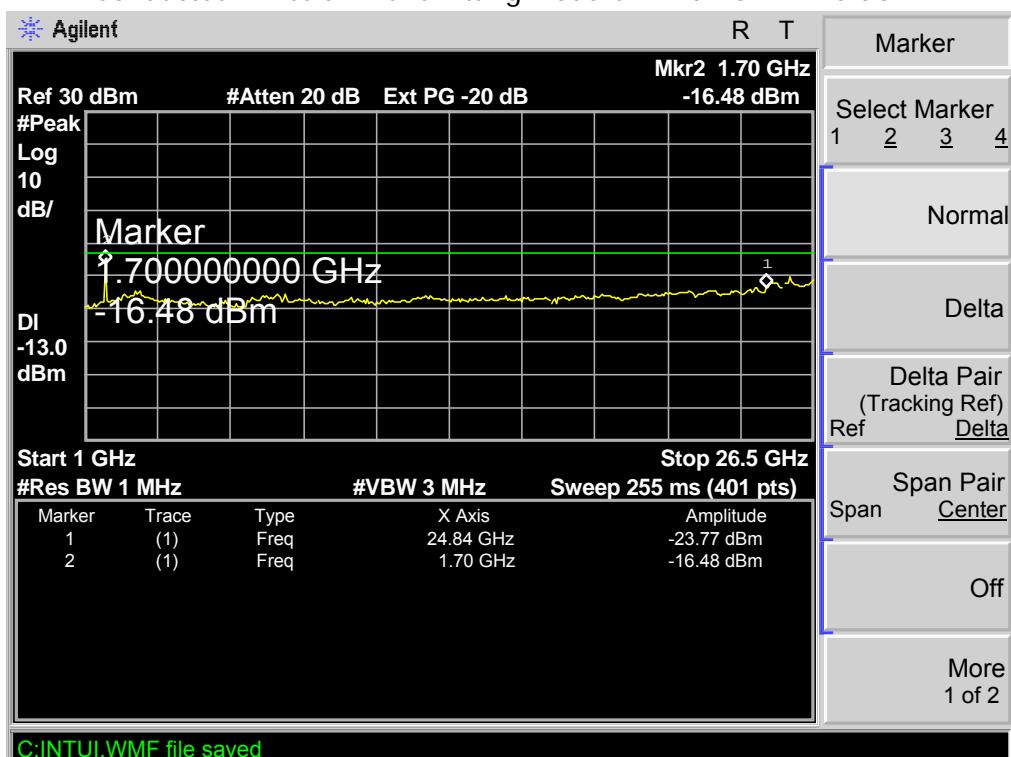

## Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

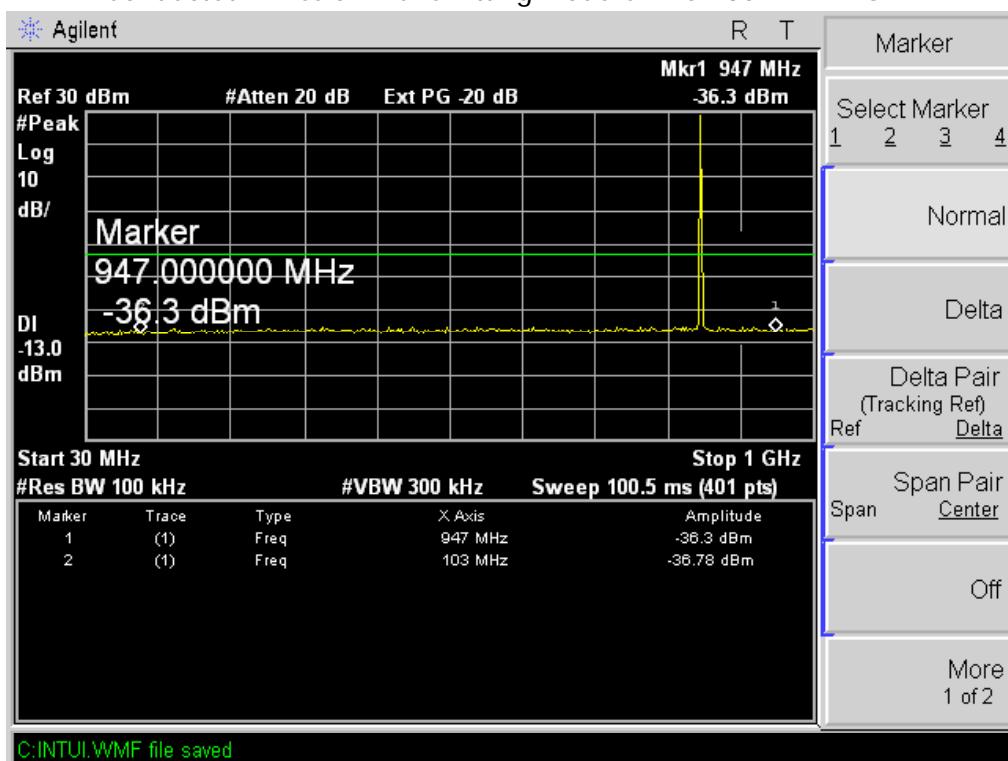


## Conducted Emission Transmitting Mode CH 251 1GHz – 26.5GHz

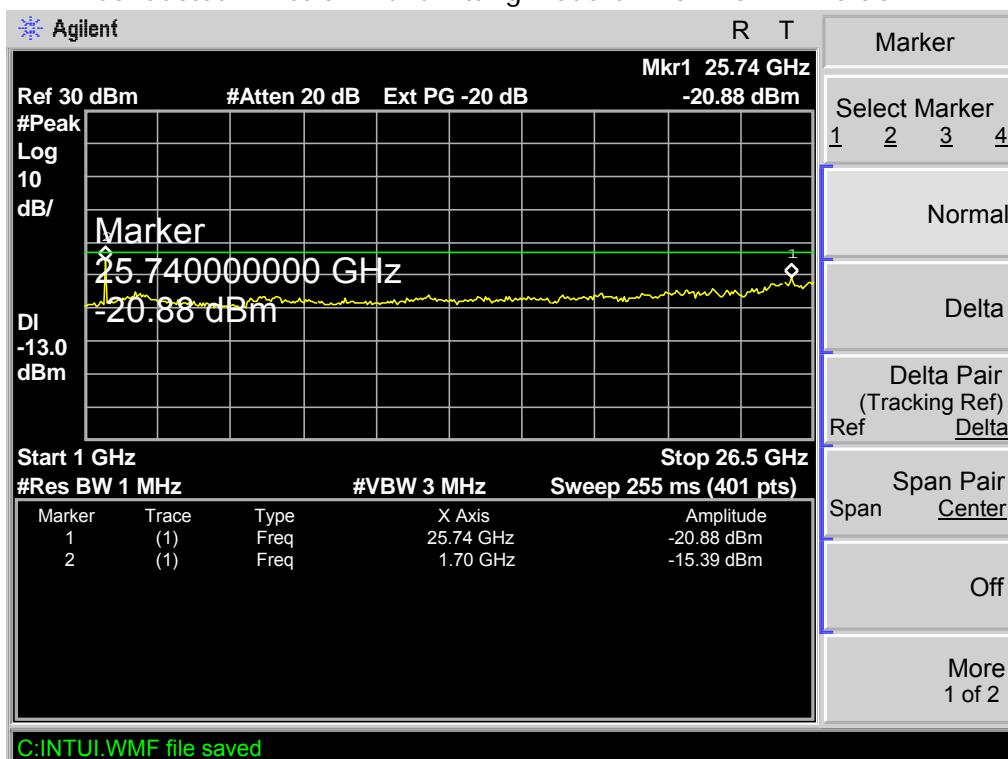


## CONDUCTED EMISSION IN PCS BAND


Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

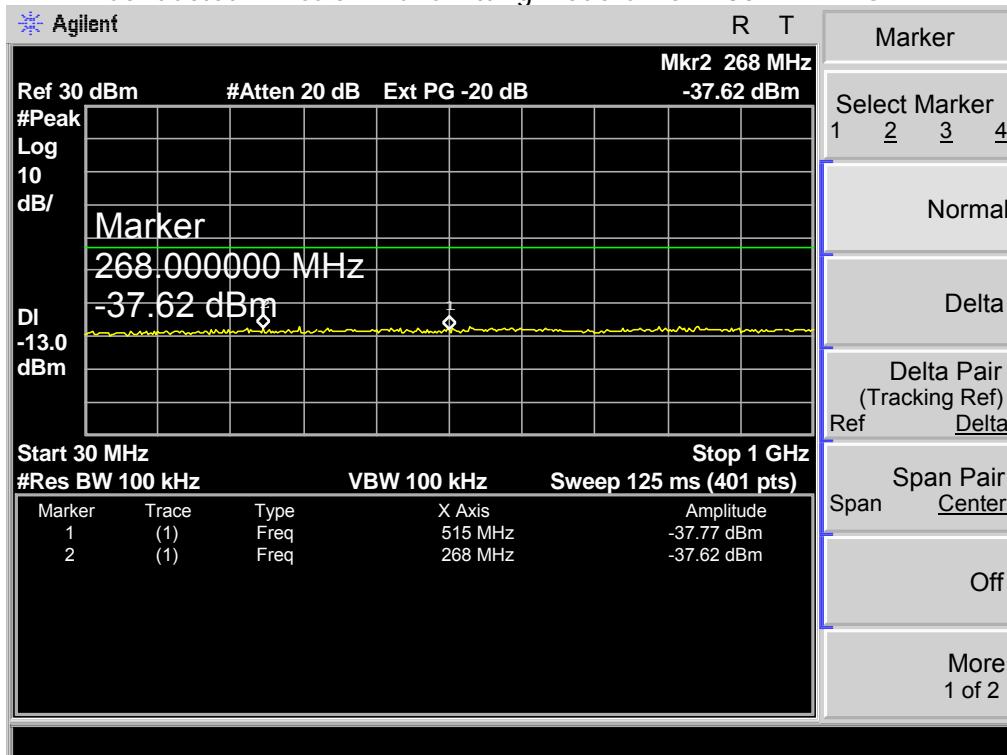


Conducted Emission Transmitting Mode CH 512 1GHz – 26.5GHz

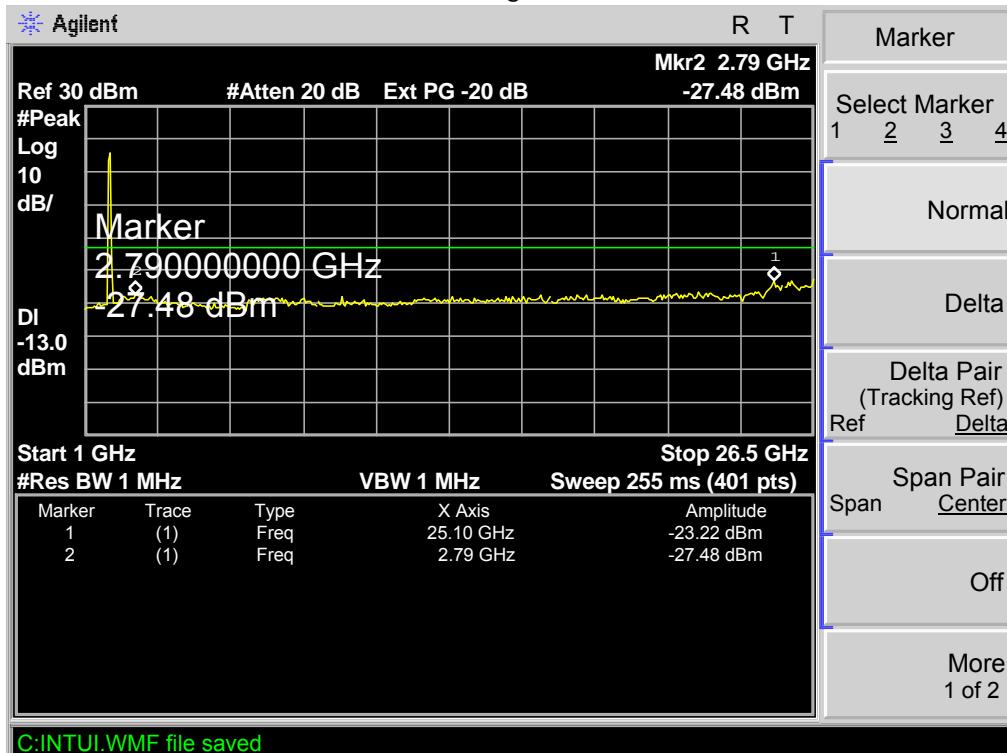


## Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

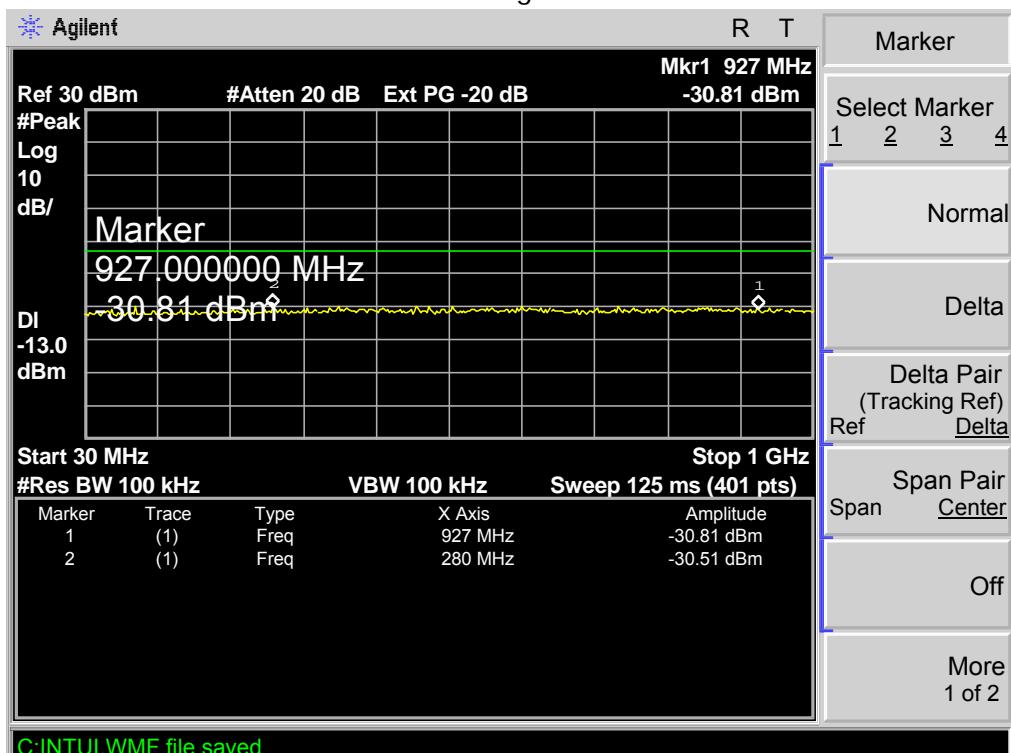


## Conducted Emission Transmitting Mode CH 661 1GHz – 26.5GHz

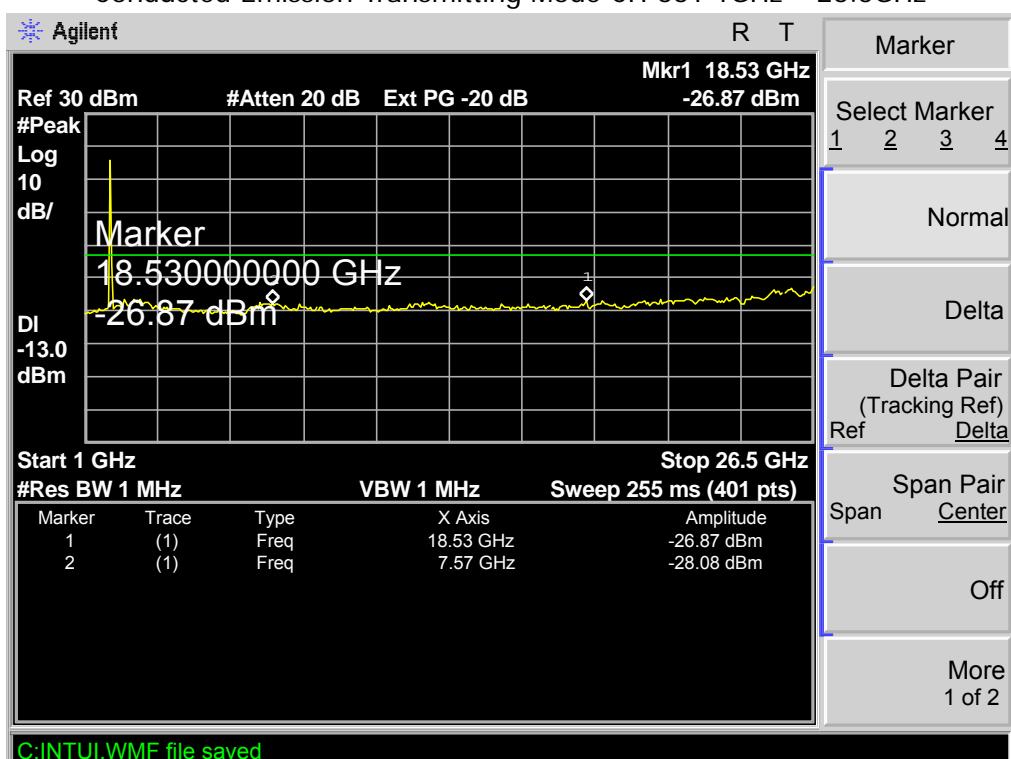


## Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

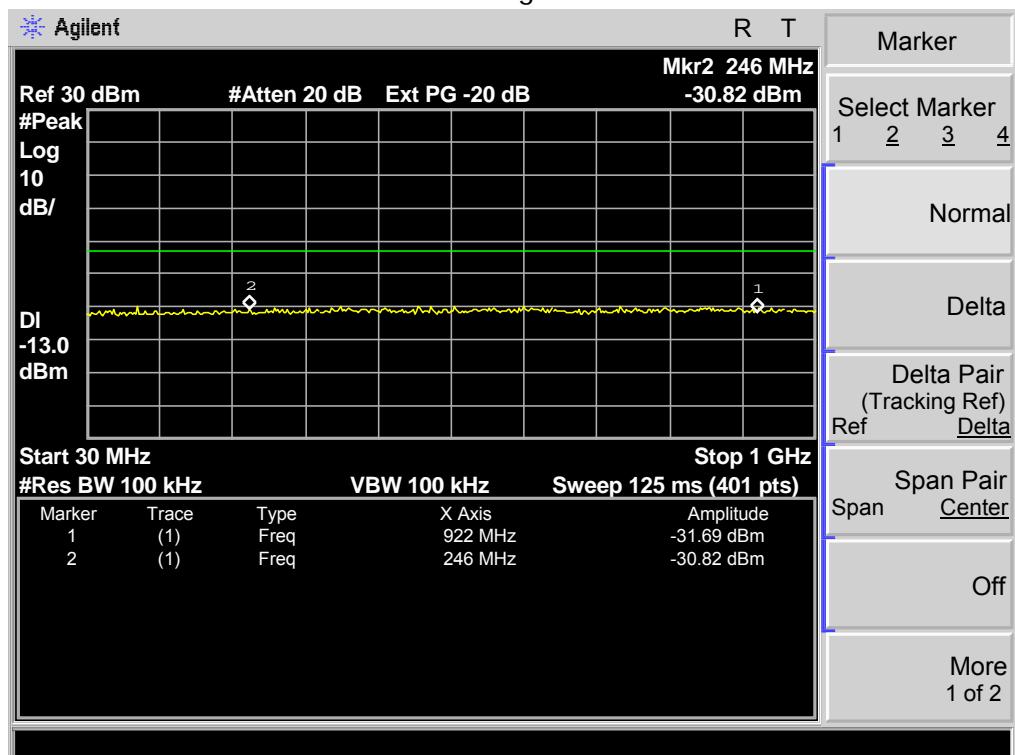


## Conducted Emission Transmitting Mode CH 810 1GHz – 26.5GHz

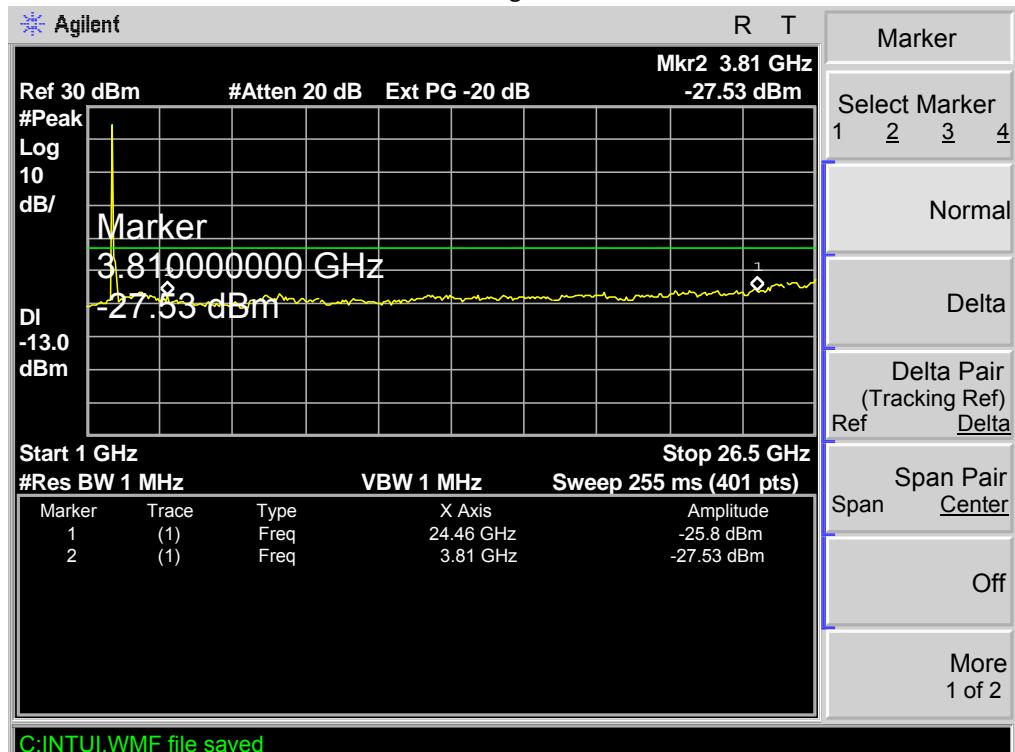

CONDUCTED EMISSION IN GPRS BAND  
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

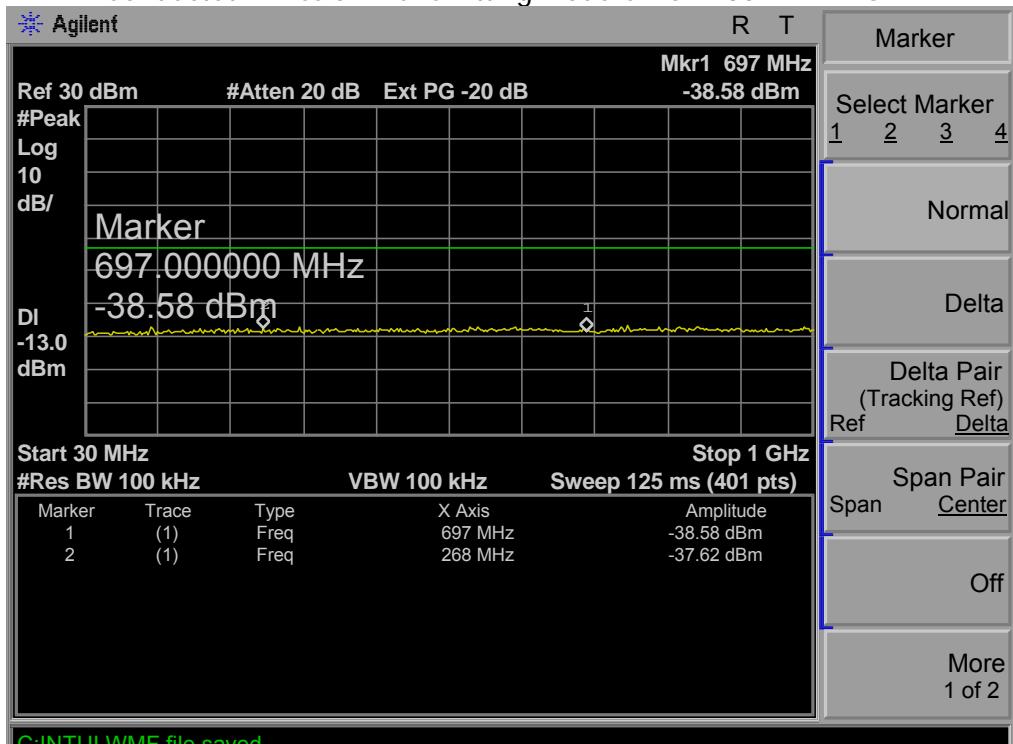


Conducted Emission Transmitting Mode CH 512 1GHz – 26.5GHz

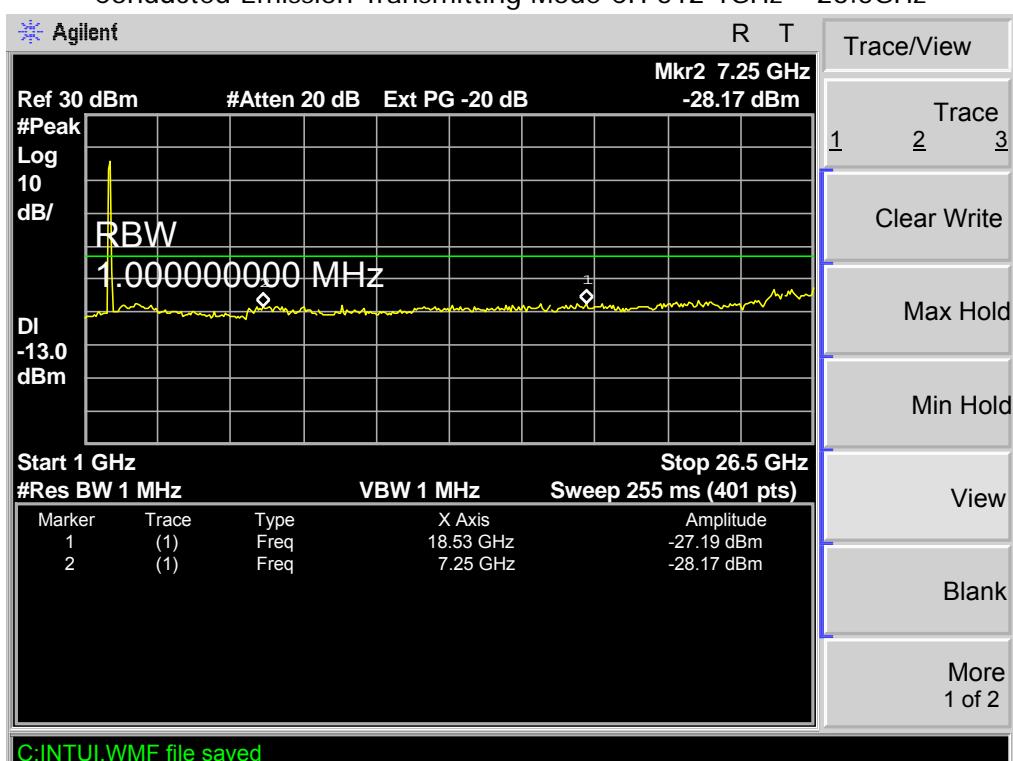


## Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz




## Conducted Emission Transmitting Mode CH 661 1GHz – 26.5GHz

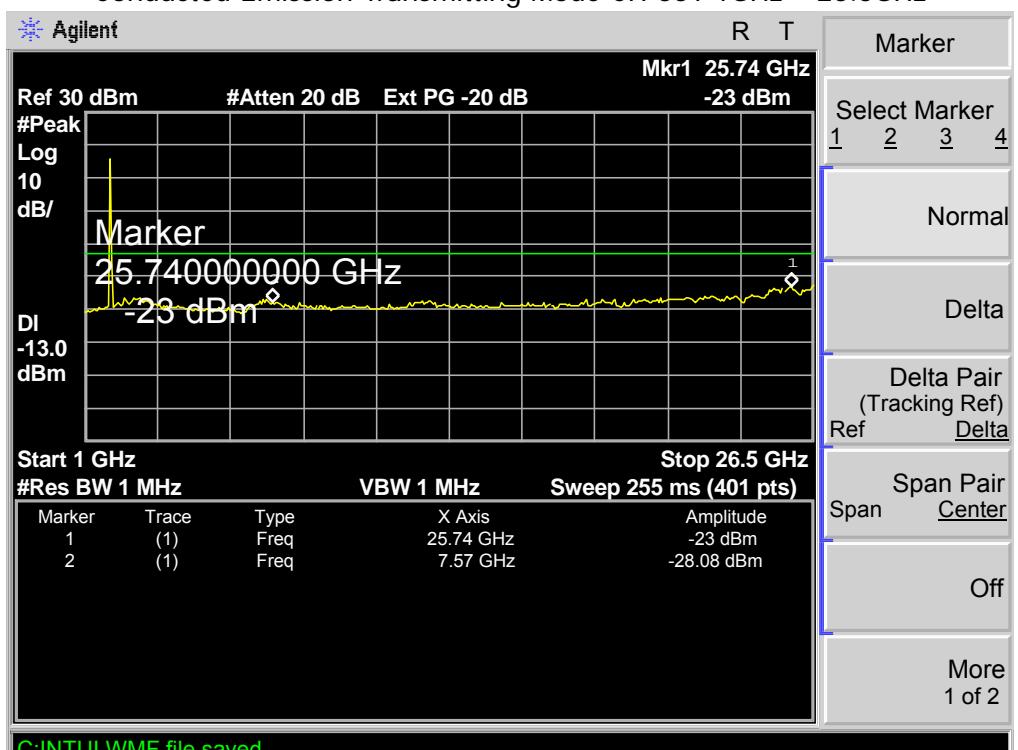

## Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

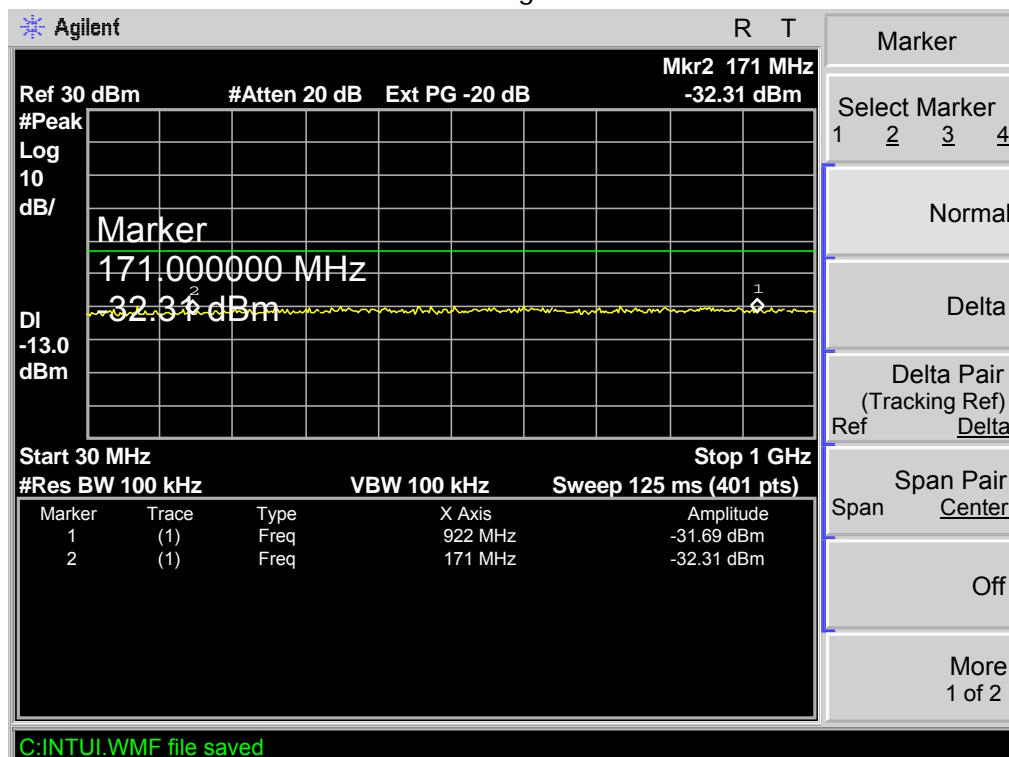



## Conducted Emission Transmitting Mode CH 810 1GHz – 26.5GHz

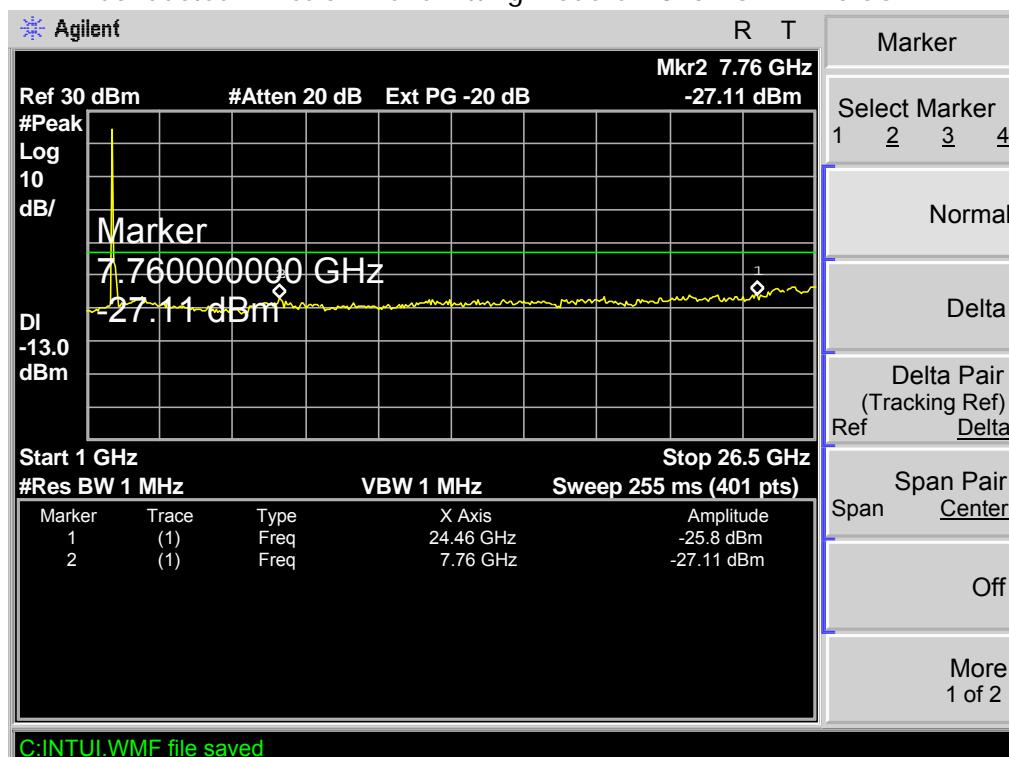


## APPENDIX II

TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)  
EMISSION BANDWIDTH (-26dBc)


Occupied Bandwidth (99%) GSM 850 BAND CH 128

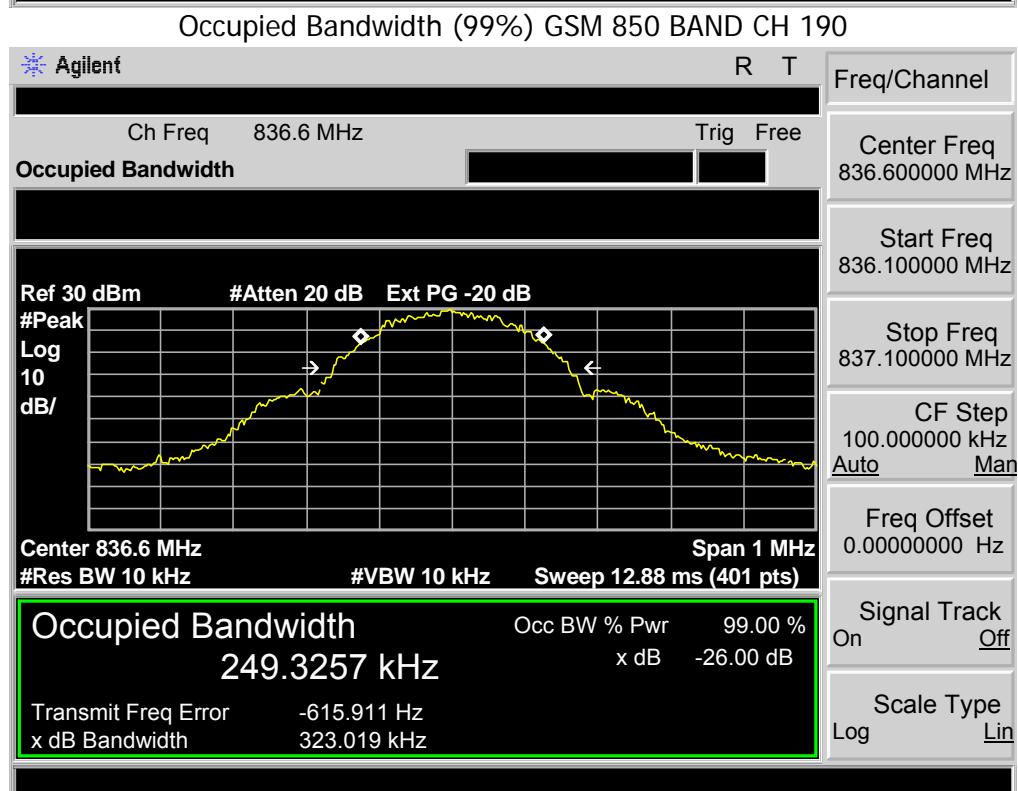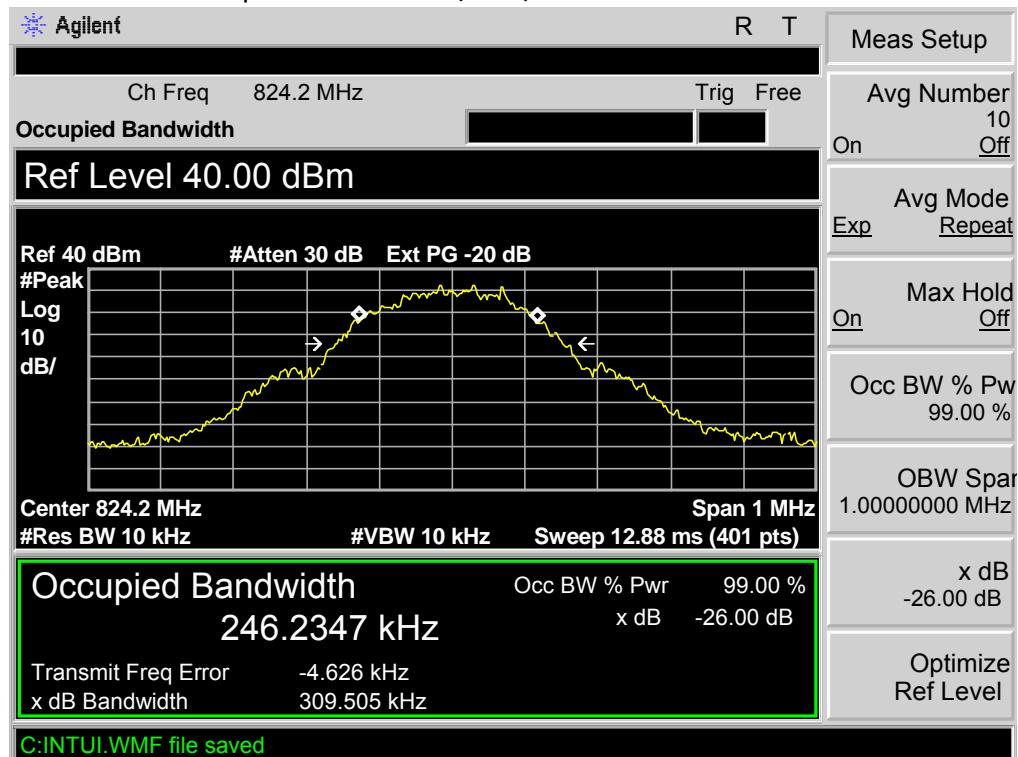


## Occupied Bandwidth (99%) GSM 850 BAND CH 251

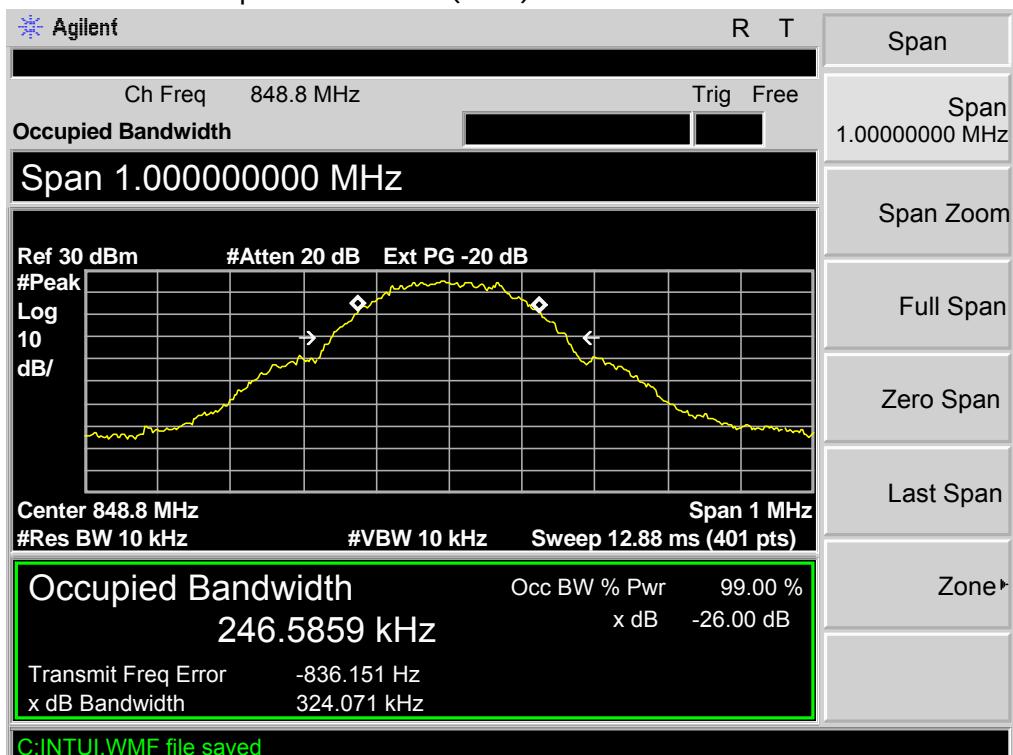


## Occupied Bandwidth (99%) GPRS 850 BAND CH 128

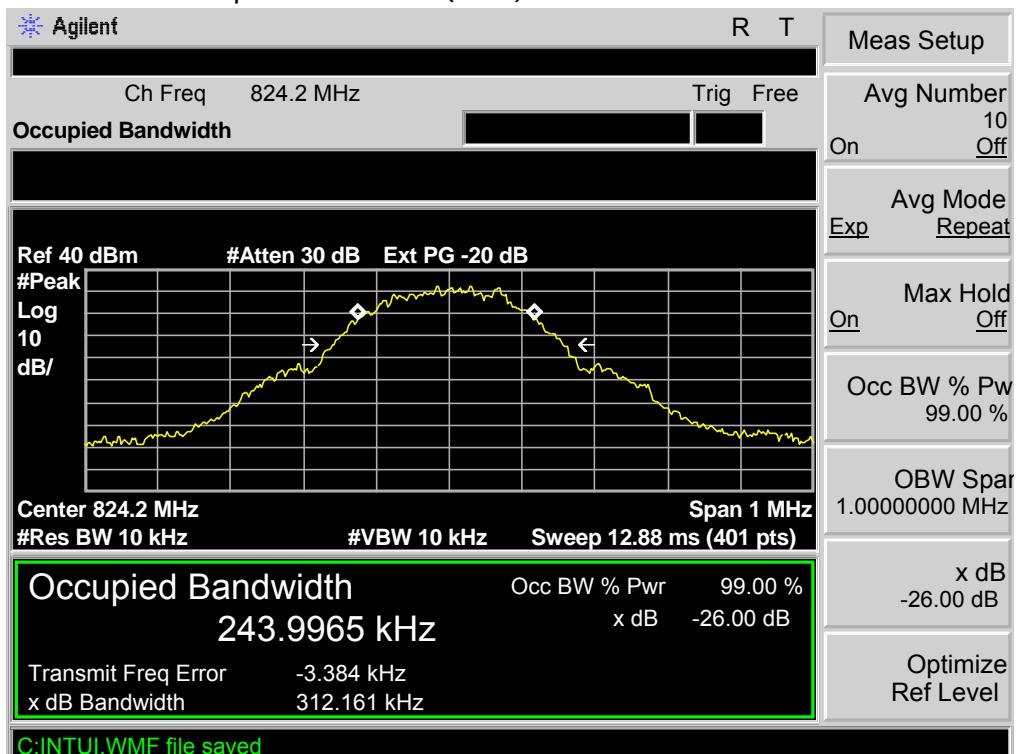


## Occupied Bandwidth (99%) GPRS 850 BAND CH 190

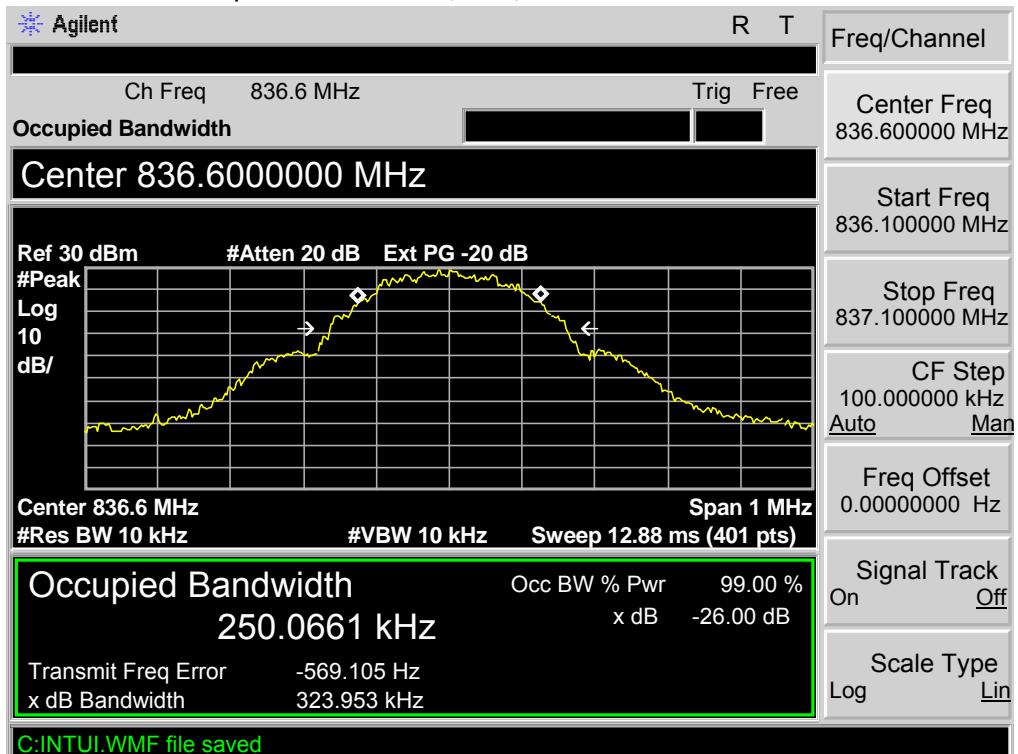

## Occupied Bandwidth (99%) GPRS 850 BAND CH 251

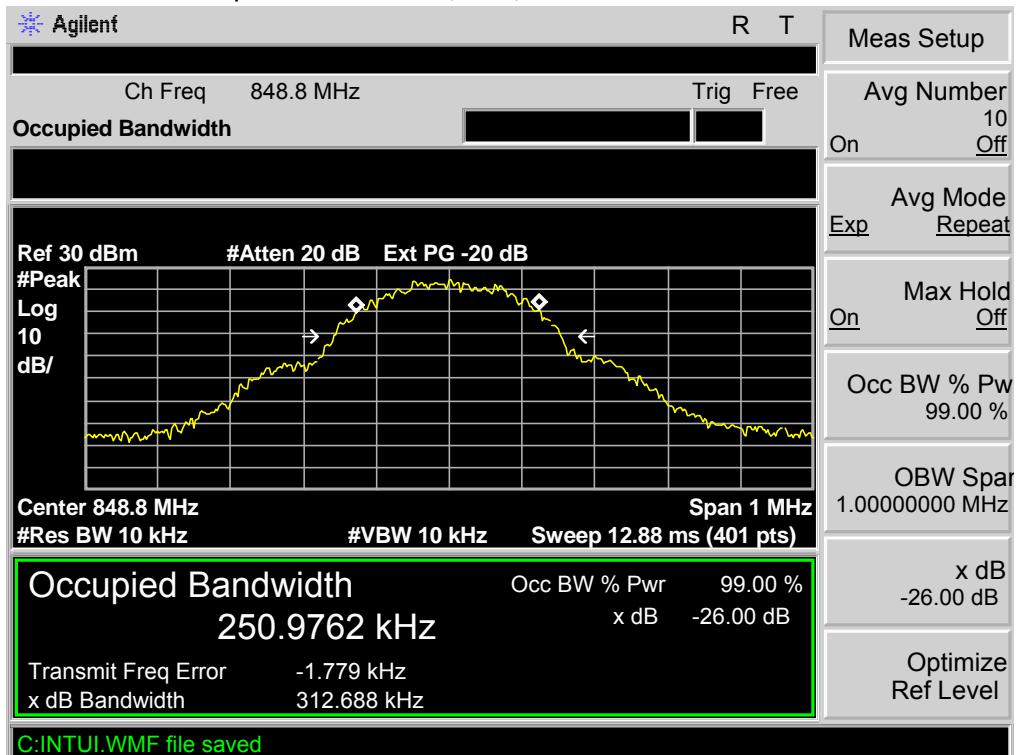


## Occupied Bandwidth (99%) PCS 1900 BAND CH 512

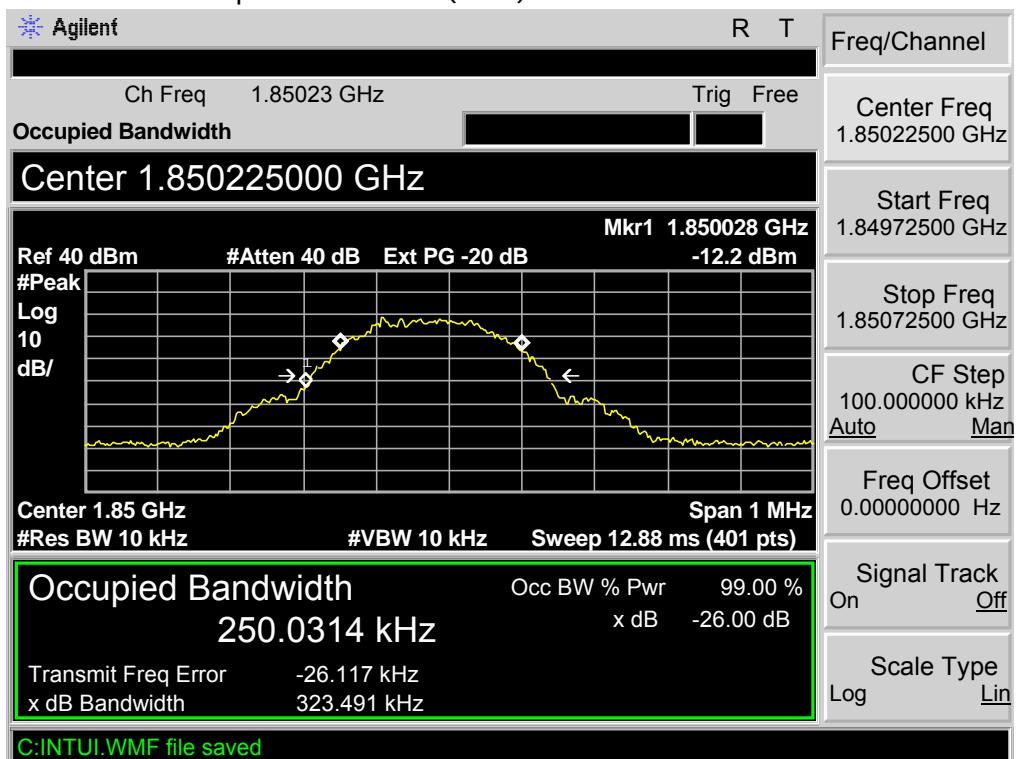


## Occupied Bandwidth (99%) PCS 1900 BAND CH 661




## Occupied Bandwidth (99%) PCS 1900 BAND CH 810

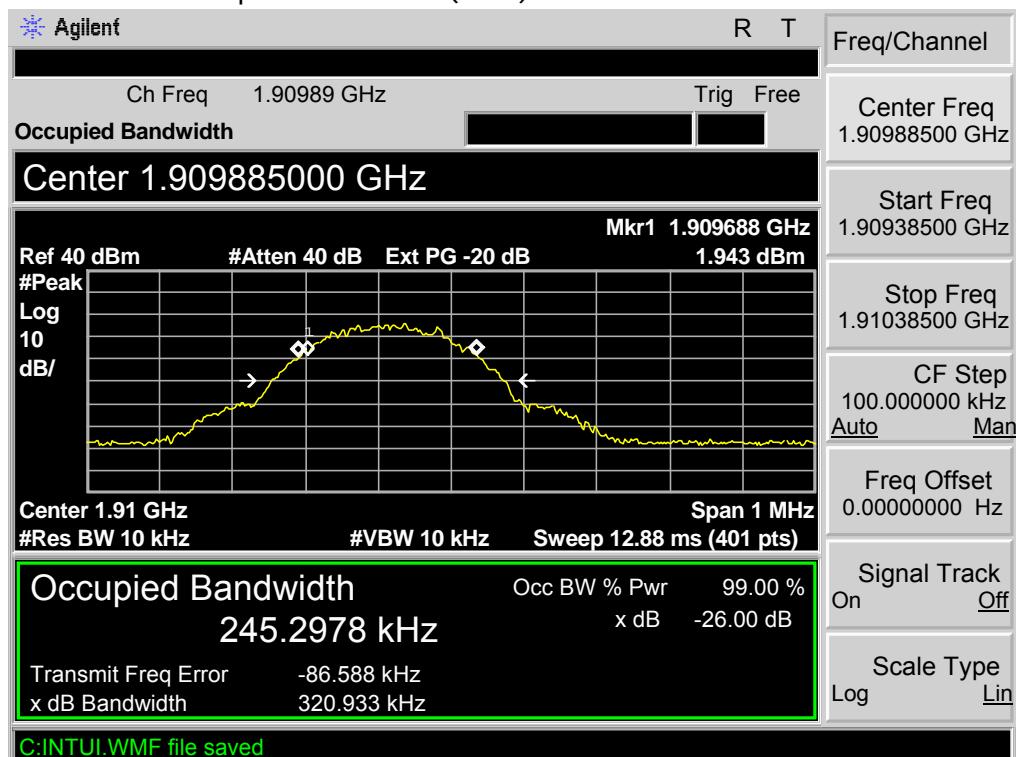


## Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

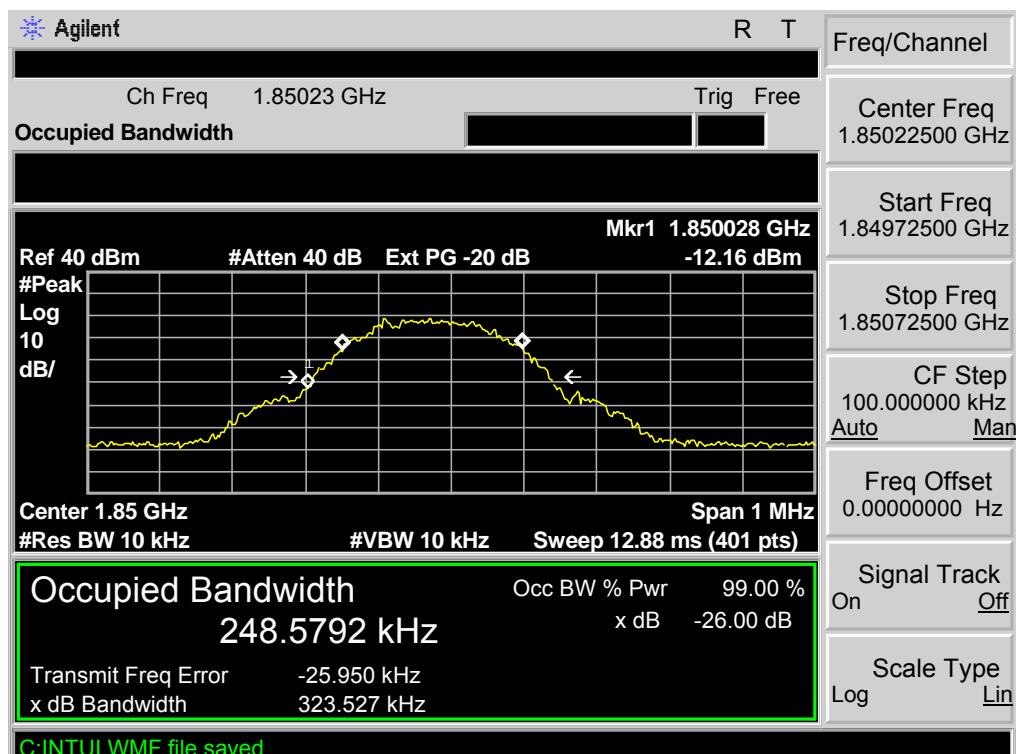

## Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

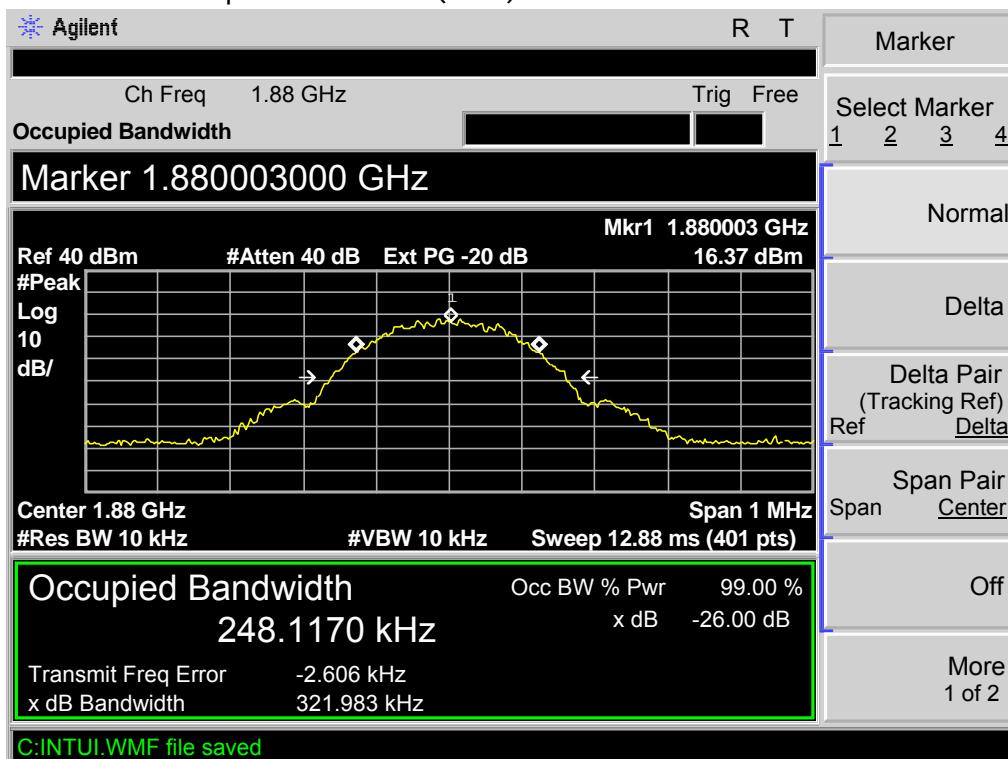


## Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

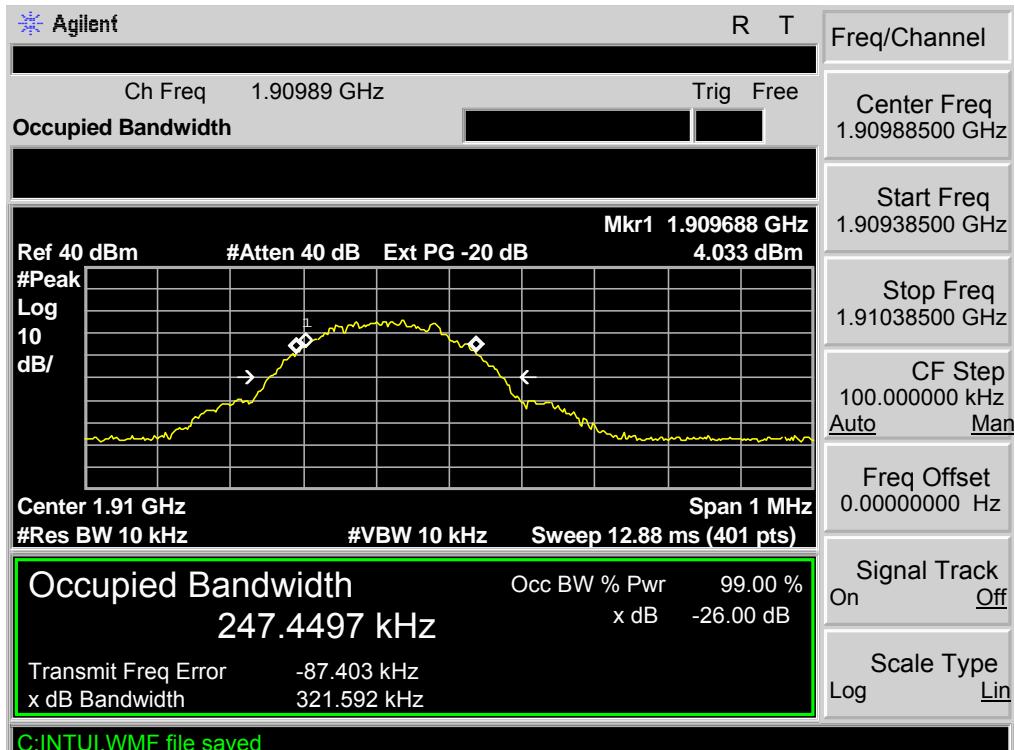


## APPENDIX III

## TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

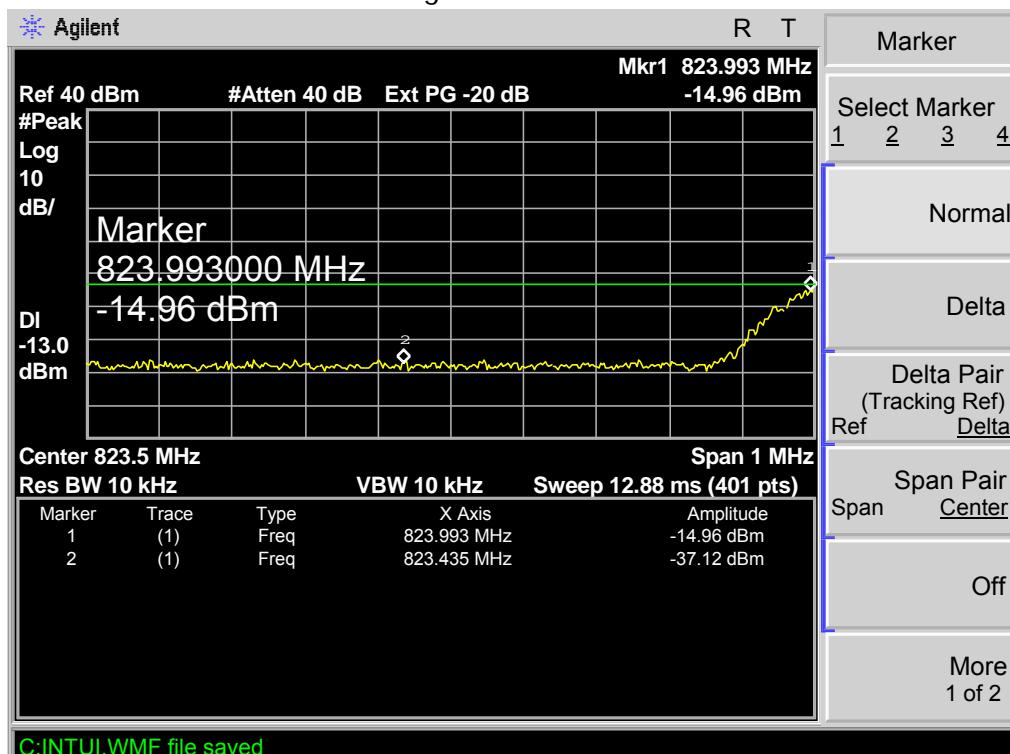


High Band Edge GSM 850 BAND CH 251

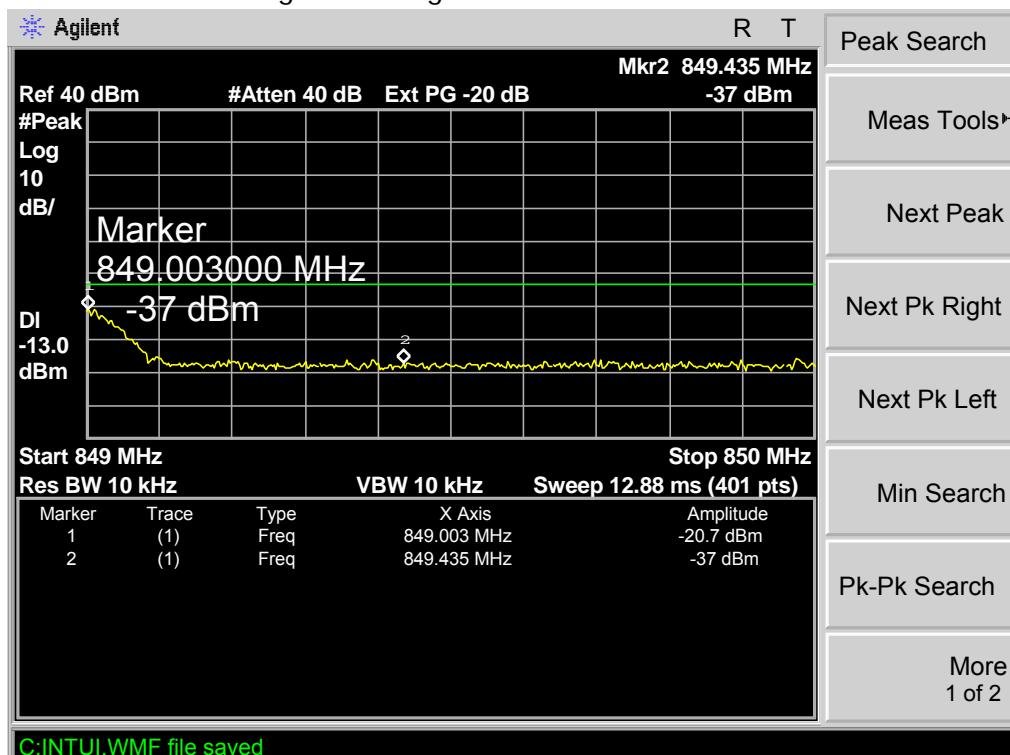


## Low Band Edge GPRS 850 BAND CH 128

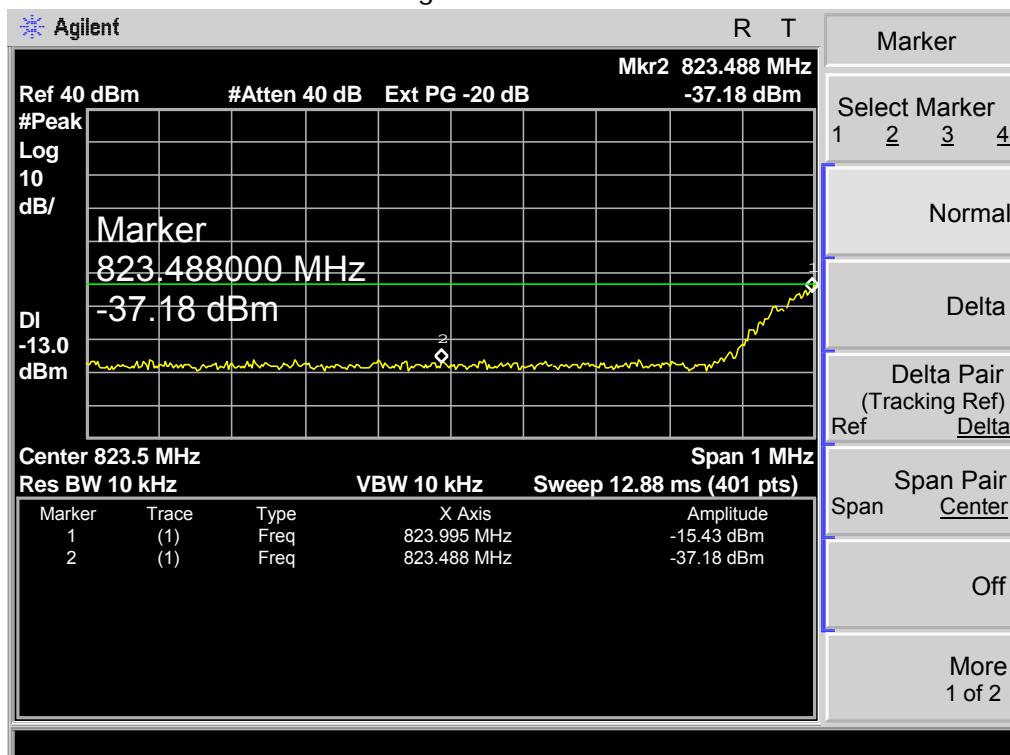


## High Band Edge GPRS 850 BAND CH 251

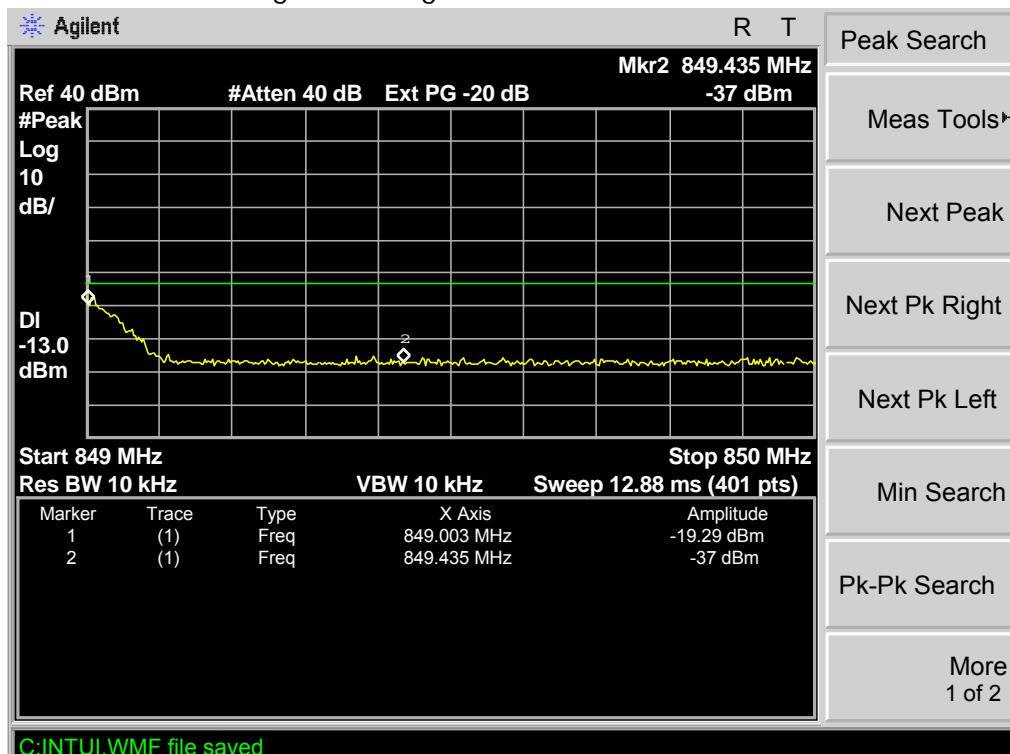


## Low Band Edge PCS 1900 BAND CH 512

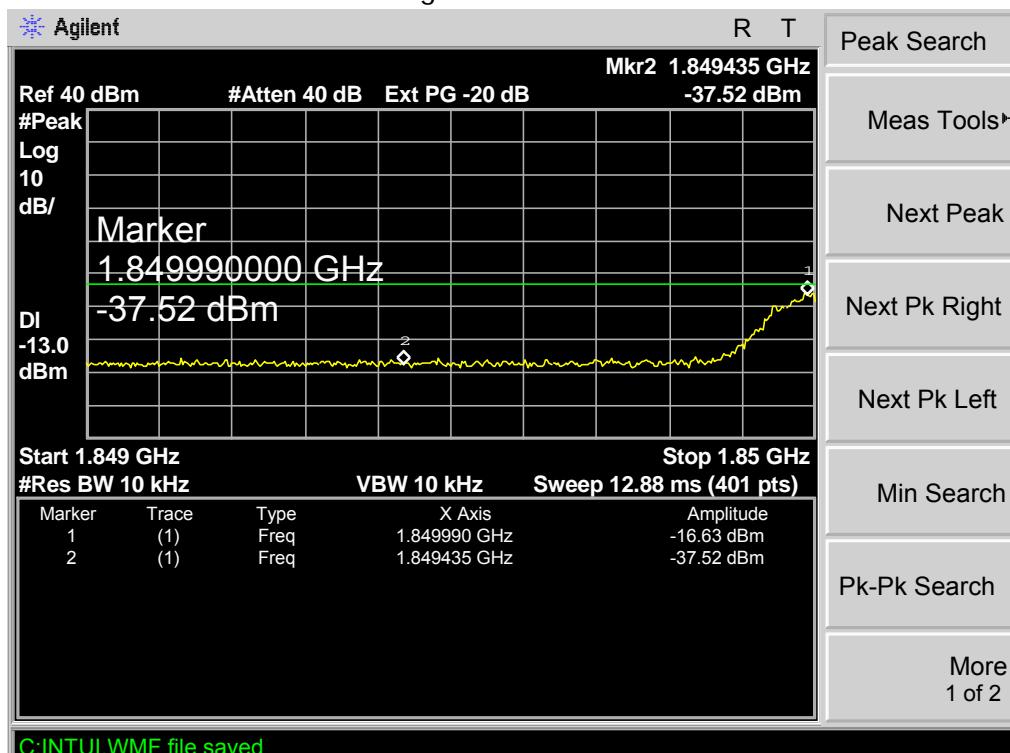


## High Band Edge PCS 1900 BAND CH 810

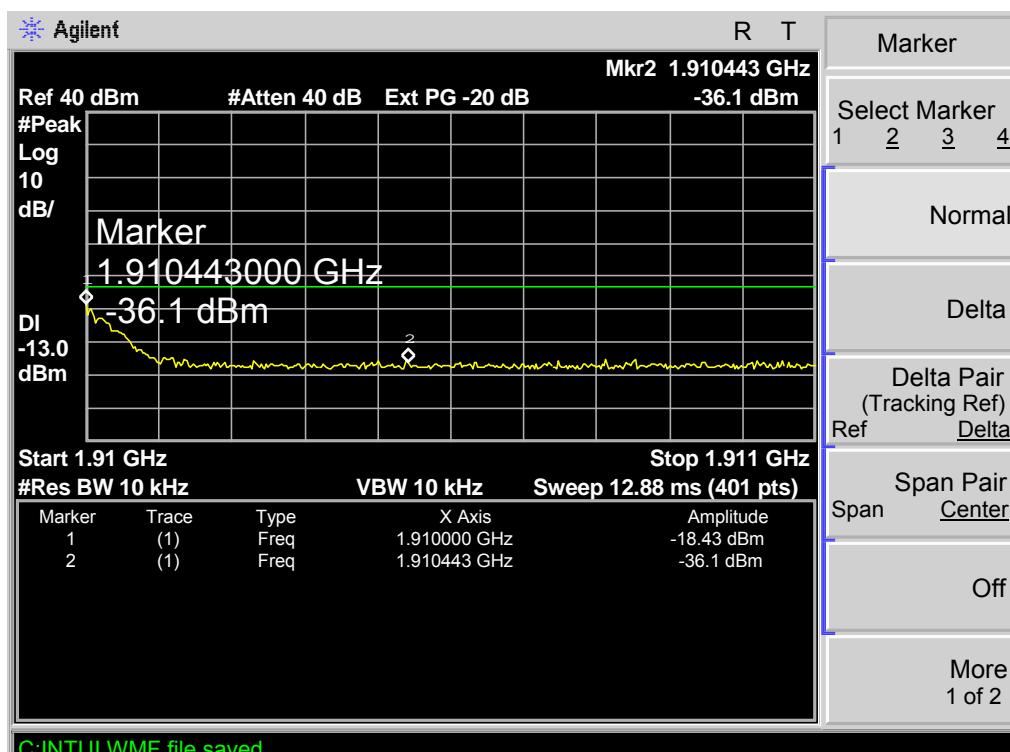


## Low Band Edge GPRS 1900 BAND CH 512

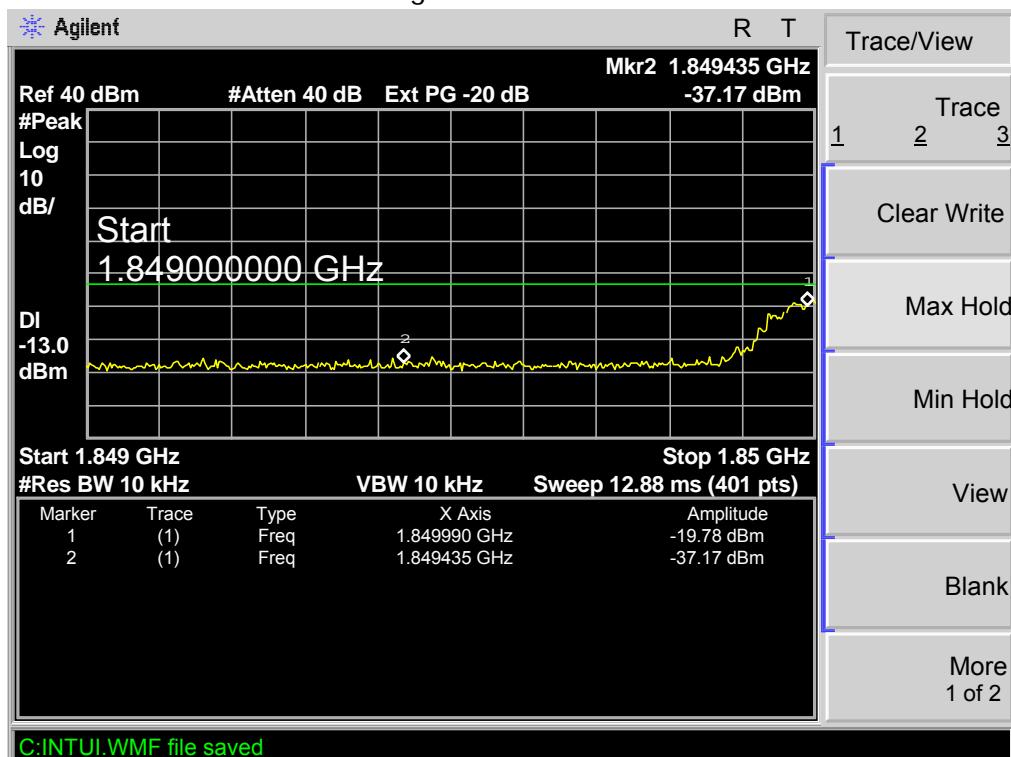


## High Band Edge GPRS 1900 BAND CH 810

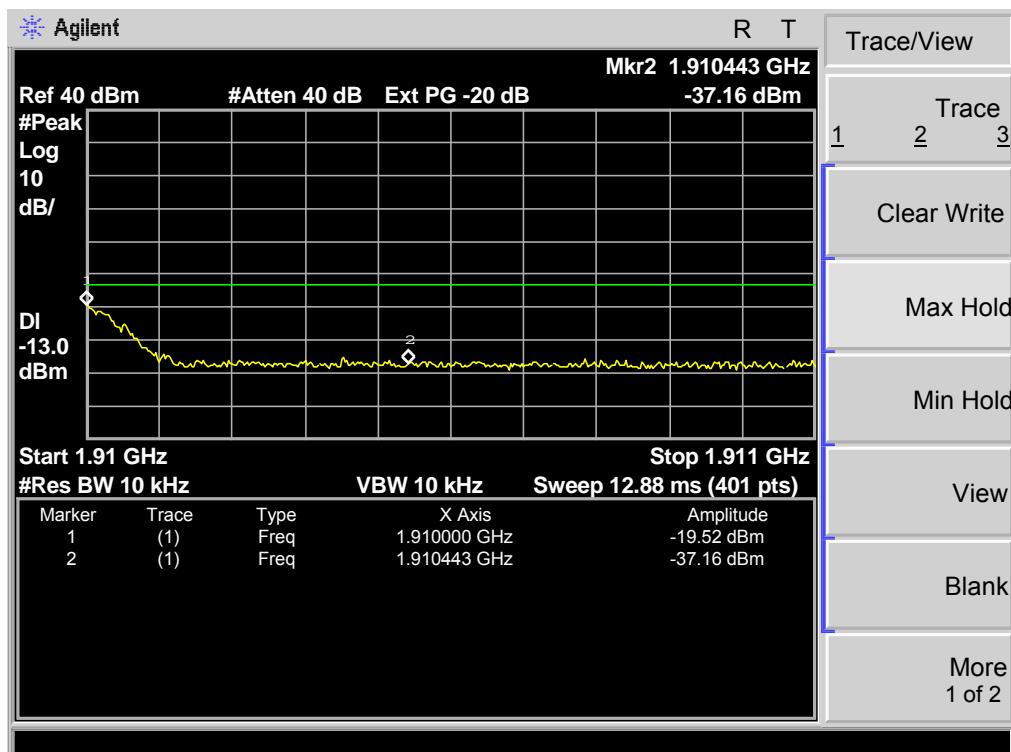


## APPENDIX IV

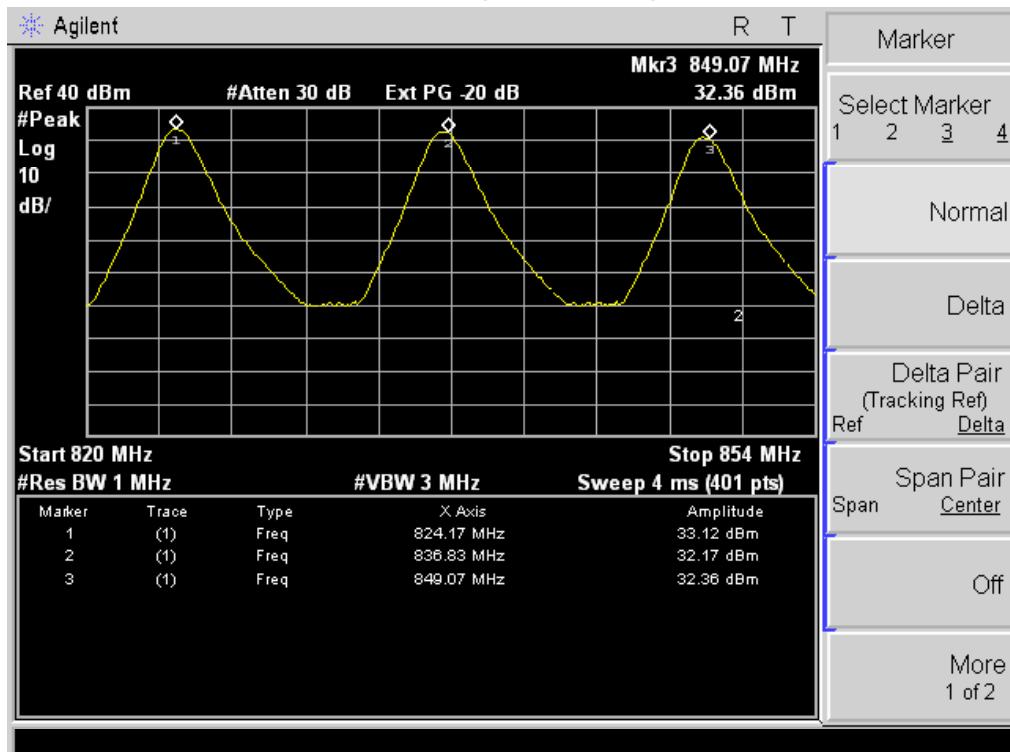CONDUCTED OUTPUT POWER  
GSM850(128,190,251)


## GSM1900(512,661,810)

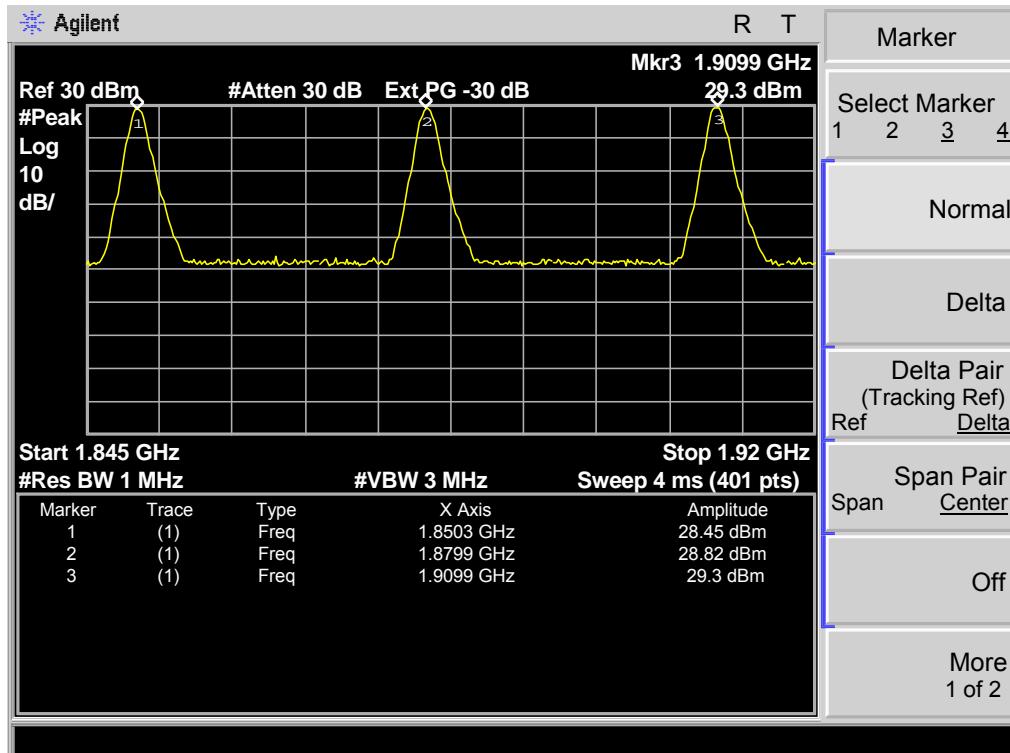

## GPRS850(128,190,251)

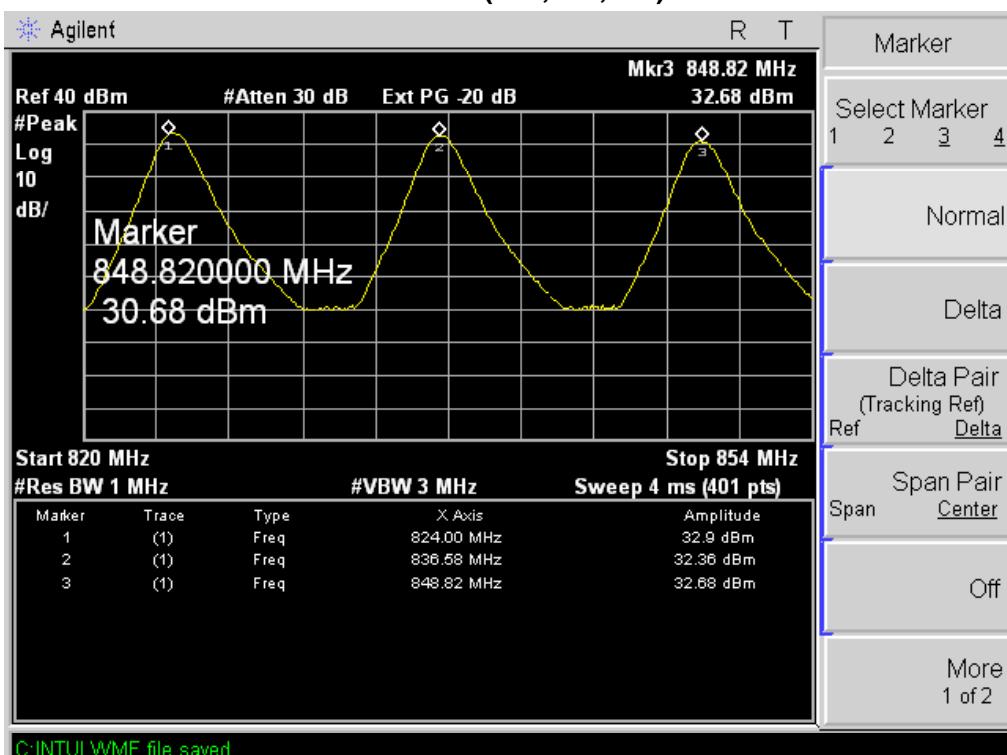

## GPRS1900(512,661,810)

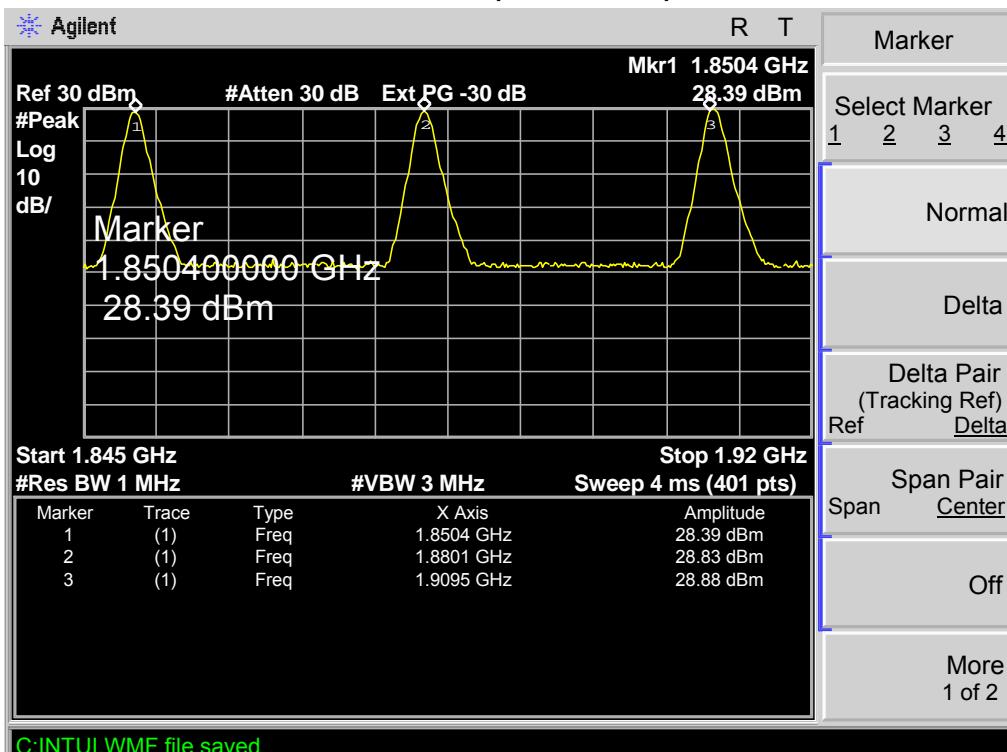

**4. EUT TEST PHOTO****Radiated Measurement Photos**