



Excellence in Compliance Testing

Certification Test Report

FCC ID: Z5E-W2CBW003-BG1

FCC Rule Part: 15.247

ACS Report Number: 12-0174.W04.1A

Applicant: Teligy, Inc.
Model: W2CBW003

Test Begin Date: May 16, 2012
Test End Date: May 18, 2012

Report Issue Date: June 28, 2012



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 13 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	GENERAL.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	6
2.3.2	<i>Open Area Tests Site (OATS)</i>	7
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	8
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT.....	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	10
7	SUMMARY OF TESTS.....	11
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	11
7.2	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS-FCC 15.247(D) IC:RSS-210 2.2, A8.....	11
7.2.1	<i>Band-Edge Compliance</i>	11
7.2.1.1	Measurement Procedure.....	11
7.2.1.2	Measurement Results	11
7.2.2	<i>Radiated Spurious Emissions (Restricted Bands).....</i>	12
7.2.2.1	Measurement Procedure.....	12
7.2.2.2	Measurement Results	12
7.2.2.3	Sample Calculation:	13
8	CONCLUSION	13

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations for a Class II Permissive Change.

The purpose of this class II permissive change is to include a new antenna and specific portable host.

1.2 General

The EUT is a complete wireless subsystem featuring full 802.11 b/g WLAN capability as well as class 2 Bluetooth capabilities in a small 12mm X 12mm form factor system-in-package.

- System-in-Package LGA with 100 pads
- Bluetooth technology based on CSR BC04-ROM

For this evaluation the EUT was integrated into a specific body-worn portable host called Bluetooth Gateway. This host is a bridge device to connect Bluetooth data from an external sensor to the proprietary cellular network that the IP Wireless modem supports. In this operating configuration, 802.11b/g capability is not available and therefore not included in this evaluation.

Technical Information:

Detail	Description
Frequency Range	2402 – 2480 MHz
Number of Channels	79
Modulation Format	GFSK modulation for Bluetooth version 2.0 $\pi/4$ DQPSK, 8DPSK modulation for Bluetooth EDR
Data Rates	up to 1Mbps for Bluetooth version 2.0 up to 3 Mbps for Bluetooth EDR
Operating Voltage	3.3VDC
Antenna	Impexa 2.4GHz SMD Antenna; 0.9dBi gain

Applicant Information:

Teligy, Inc.
40 Concourse Way
Greer, SC 29650

Manufacturer Information:

Wi2Wi, Inc
2107 N. 1st Street, Suite 540
San Jose, CA 95131

Test Sample Serial Number: WBG00108

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

The EUT was integrated in the Bluetooth Gateway portable body-worn host device for the purpose of evaluating the new antenna.

The portable body-worn host, Bluetooth Gateway, can be used in multiple orientations therefore radiated emissions were evaluated with the device positioned in the x, y, and z planes with worst case data presented in this report. Only radiated emissions were performed to demonstrate that the new antenna complies.

The EUT was evaluated for all modulations with worst case presented in this report.

As integrated in the Bluetooth Gateway host, the EUT is collocated with a Part 27 WiMax transceiver, FCC ID: Z5E-IPWPEM1-BG1. Both the EUT and collocated FCC ID: Z5E-IPWPEM1-BG1 can transmit simultaneously therefore radiated intermodulation products were evaluated and found compliant. Intermodulation data is not provided in this report but is available upon request.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

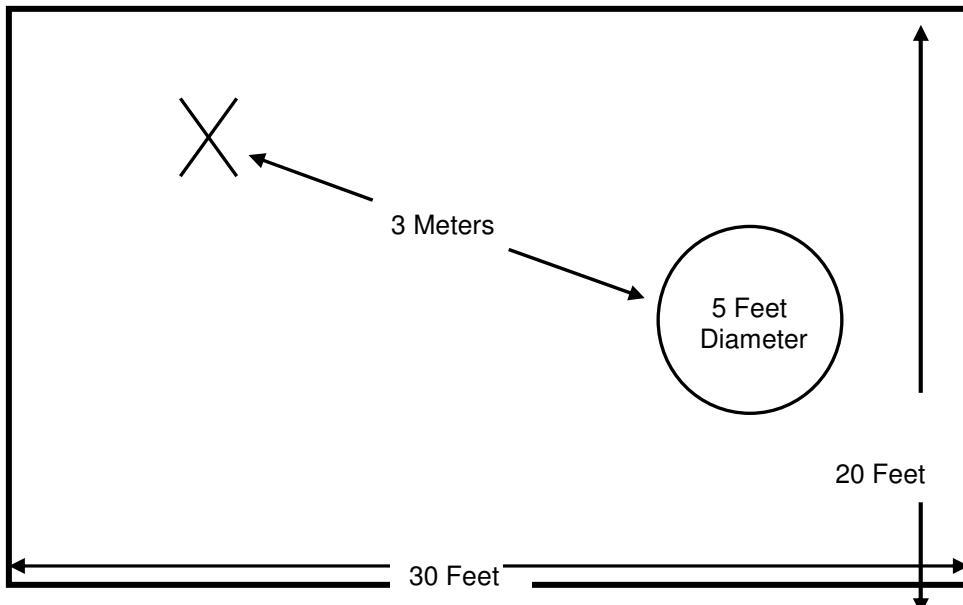


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

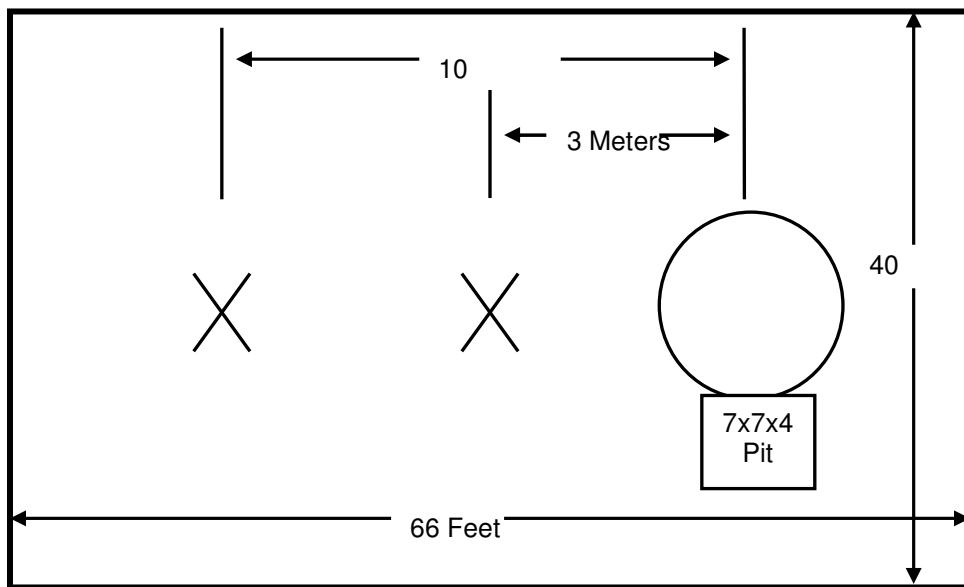


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

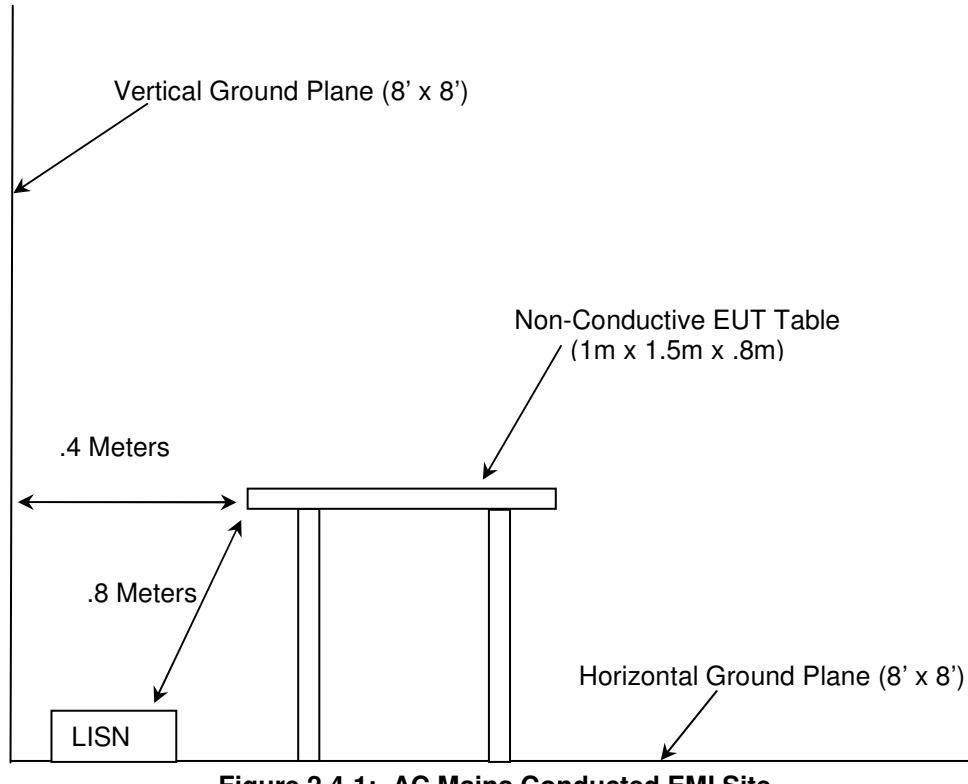


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2012
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2012

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	9/23/2011	9/23/2012
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	9/23/2011	9/23/2012
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/27/2011	4/27/2013
40	EMCO	3104	Antennas	3211	2/11/2011	2/11/2013
73	Agilent	8447D	Amplifiers	2727A05624	9/30/2011	9/30/2012
167	ACS	Chamber EMI Cable Set	Cable Set	167	12/21/2011	12/21/2012
291	Florida RF Cables	SMRE-200W-12.0	Cables	None	12/2/2011	12/2/2012
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	4/2/2012	4/2/2013
334	Rohde&Schwarz	3160-10	Antennas	45576	11/4/2010	NCR
335	Suhner	SF-102A	Cables	882/2A	8/29/2011	8/29/2012
338	Hewlett Packard	8449B	Amplifiers	3008A01111	3/1/2012	8/31/2012
345	Suhner Sucoflex	102A	Cables	1077/2A	8/29/2011	8/29/2012
412	Electro Metrics	LPA-25	Antennas	1241	7/28/2010	7/28/2012
422	Florida RF	SMS-200AW-72.0	Cables	805	12/2/2011	12/2/2012
432	Microwave Circuits	H3G020G4	Filters	264066	7/11/2011	7/11/2012

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	Portable Body-Worn Host Device	Teligy	Bluetooth Gateway	N/A

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

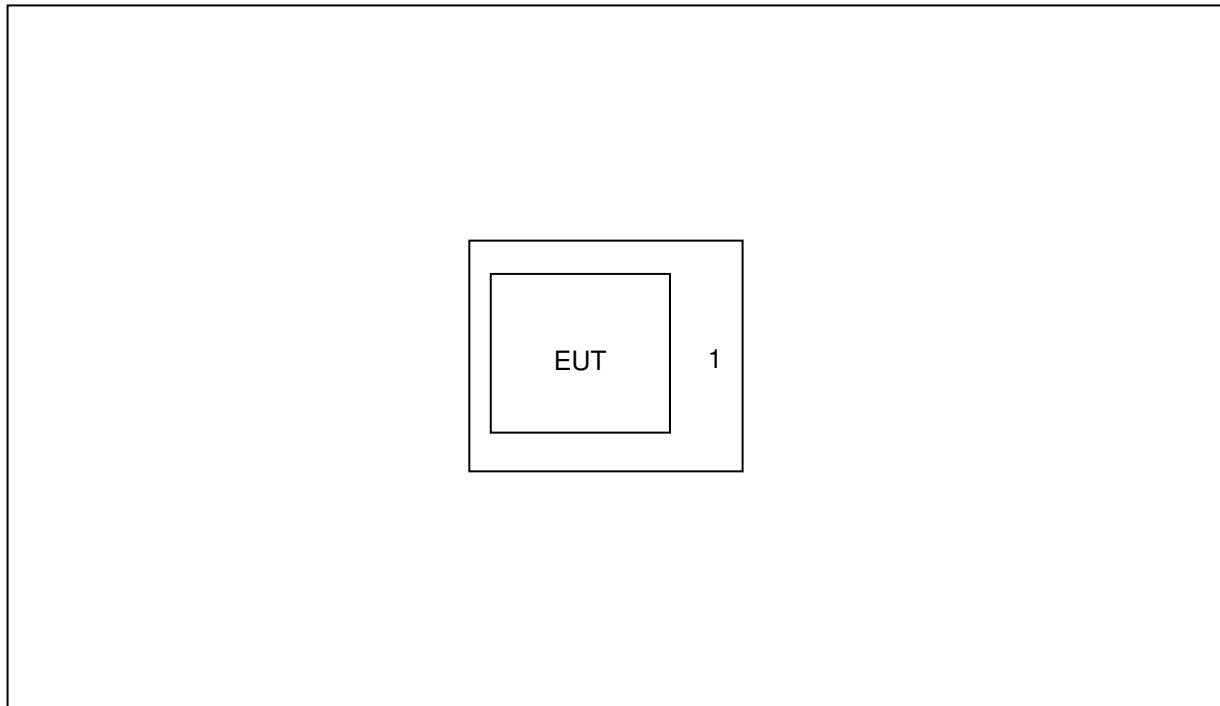


Figure 6.1: System Block Diagram

7 SUMMARY OF TESTS

7.1 Antenna Requirement – FCC: Section 15.203

The host PCB provides on-board traces to the SMD integral antenna.

7.2 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 2.2, A8.

7.2.1 Band-Edge Compliance

7.2.1.1 Measurement Procedure

The EUT was investigated at the low and high channels of operation to determine band-edge compliance. Band-edge compliance was determined based on the measurement of the absolute field strength of the highest emission outside the band-edge.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

The EUT was evaluated in X, Y and Z orientations with data representing worst case provided below. The worst case orientation was determined to be the Z orientation.

7.2.1.2 Measurement Results

Band-edge compliance is displayed in Table 7.2.1.2-1.

Table 7.2.1.2-1: Band-edge Radiated Emissions – Z Position

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2390	47.28	35.51	H	-5.47	41.81	30.04	74.0	54.0	32.20	24.00
2390	46.63	34.58	V	-5.47	41.16	29.11	74.0	54.0	32.80	24.90
2484.3	51.73	40.44	H	-5.06	46.67	35.38	74.0	54.0	27.30	18.60
2484.3	47.67	36.38	V	-5.06	42.61	31.32	74.0	54.0	31.40	22.70

7.2.2 Radiated Spurious Emissions (Restricted Bands)

7.2.2.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band, including emissions at the band-edges, was compared to the applicable radiated emission limits.

The EUT was evaluated in X, Y and Z orientations with data representing worst case provided below. The worst case orientation was determined to be the Z orientation.

7.2.2.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in the table 7.2.2.2-1 below.

Table 7.2.2.2-1: Radiated Spurious Emissions Tabulated Data – Z Position

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
1601.3	58.24	55.58	H	-9.71	48.53	45.87	74.0	54.0	25.5	8.1
1601.3	54.66	50.52	V	-9.71	44.95	40.81	74.0	54.0	29.1	13.2
2376.12	48.55	37.90	H	-5.52	43.03	32.38	74.0	54.0	31.0	21.6
2376.12	47.17	35.64	V	-5.52	41.65	30.12	74.0	54.0	32.4	23.9
4804	54.76	47.78	H	2.09	56.85	49.87	74.0	54.0	17.1	4.1
4804	51.93	41.94	V	2.09	54.02	44.03	74.0	54.0	20.0	10.0
Middle Channel										
1143.1	52.67	36.76	V	-12.41	40.26	24.35	74.0	54.0	33.7	29.6
4882	53.94	45.37	H	2.28	56.22	47.65	74.0	54.0	17.8	6.3
4882	51.86	42.29	V	2.28	54.14	44.57	74.0	54.0	19.9	9.4
High Channel										
1152.4	51.79	36.58	V	-12.35	39.44	24.23	74.0	54.0	34.6	29.8
4960	55.31	47.37	H	2.47	57.78	49.84	74.0	54.0	16.20	4.20
4960	50.66	40.87	V	2.47	53.13	43.34	74.0	54.0	20.90	10.70

Note: All spurious emissions not reported were below the noise floor of the measurement system.

7.2.2.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: 58.24 - 9.71 = 48.53dBuV/m

Margin: 74dBuV/m - 48.53dBuV/m = 25.5dB

Example Calculation: Average

Corrected Level: 55.58 - 9.71 - 0 = 45.87dBuV

Margin: 54dBuV - 45.87dBuV = 8.1dB

8 CONCLUSION

In the opinion of ACS, Inc. the W2CBW003, submitted by Teligy, Inc. meets the requirements of FCC Part 15 as applicable to this permissive change.

END REPORT