


Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Antenna Type	PCB Antenna	
Center Frequency	2402 MHz	2.34 dBi
	2441 MHz	2.07dBi
	2480 MHz	1.45 dBi
MAX. GAIN	2.34 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	3.1cm	


Antenna Photo & Length (mm)

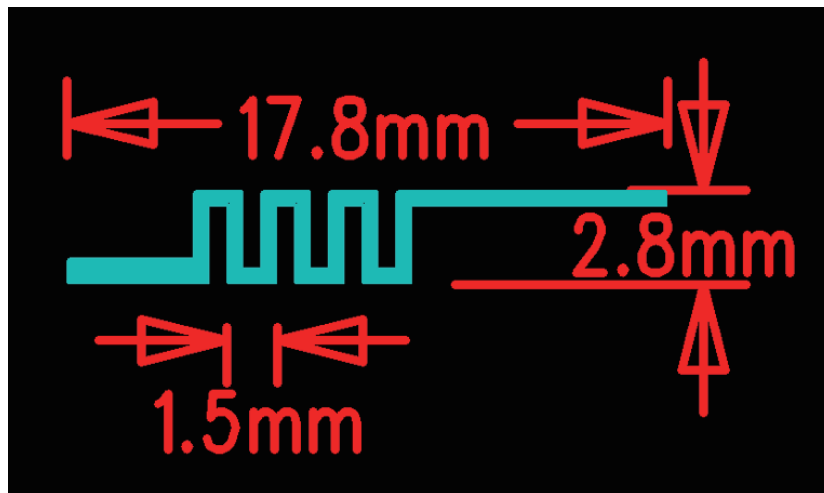

Test Address	16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan
Test Date	2009-04-14
Test Instrument	vector network analyzer - R&S ZVB20
Manufacture	COMPX Semiconductor Corp
Address	No.27, Gaoxin North Sixth Road, Songpingshan Community, Xili Street, Nanshan District, Shenzhen


1. Main antenna : 2402 MHz

1.1 Horizontal

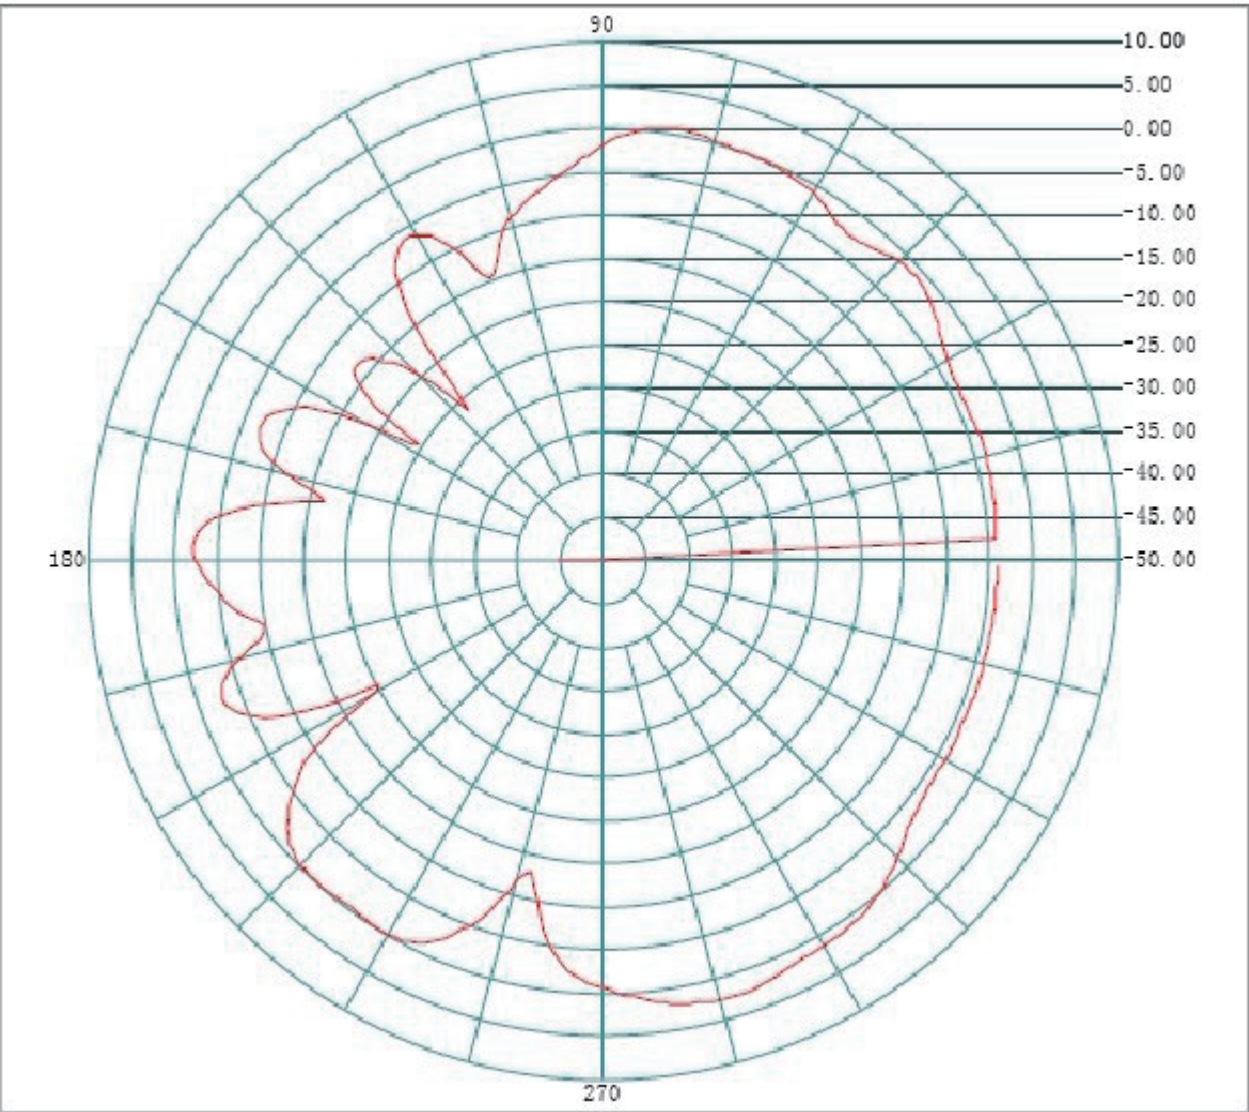

Frequency(MHZ):	2402	Antenna Polarity:	Horizontal
Maximum Value(dBi):	2.34		
Average Gain(dBi) :	-2.48		
Minimum Gain(dBi):	-55.18		

1.2 Vertical

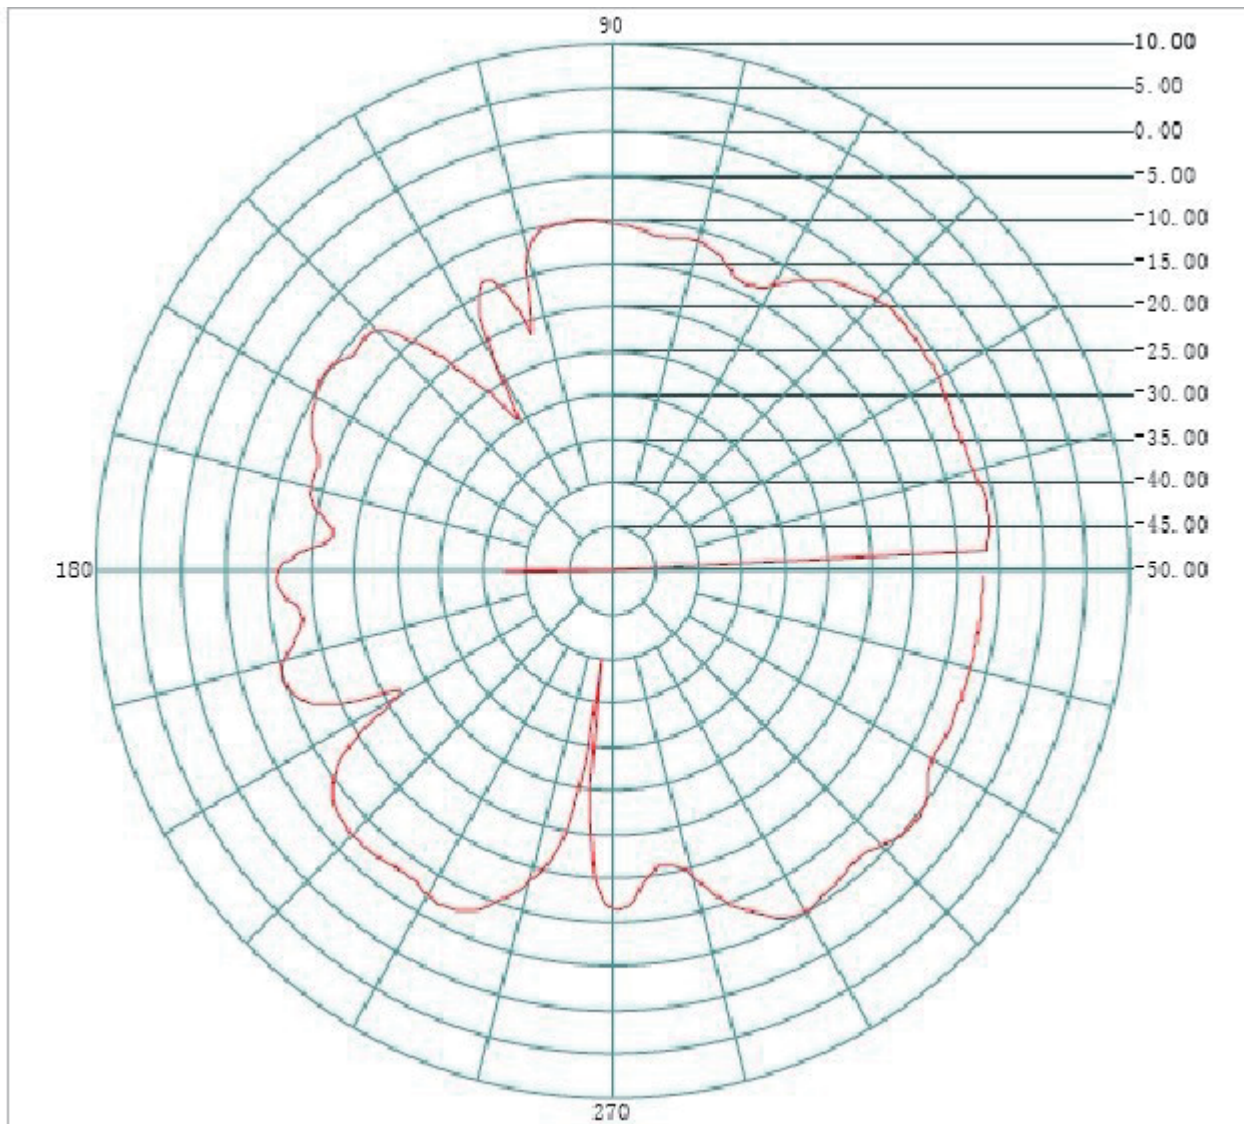

Frequency(MHZ): **2402**

Antenna Polarity: **Vertical**


Maximum Value(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**


2. Main antenna : 2441 MHz

2.1 Horizontal

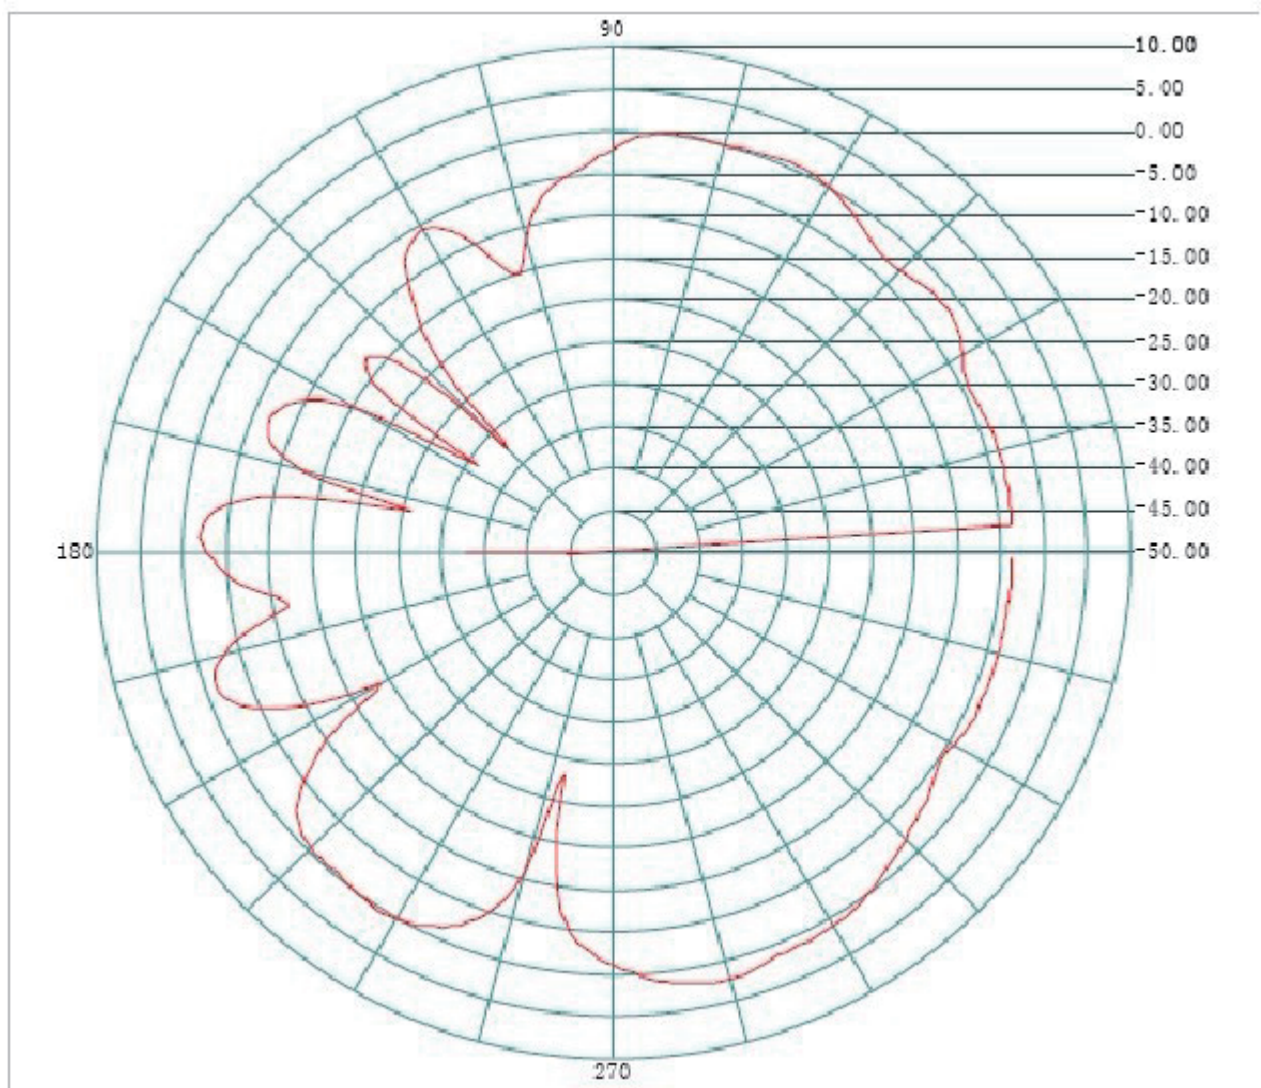

Frequency(MHZ):	2441	Antenna Polarity:	Horizontal
Maximum Value(dBi):	2.07		
Average Gain(dBi) :	-2.54		
Minimum Gain(dBi):	-66.98		

2.2 Vertical

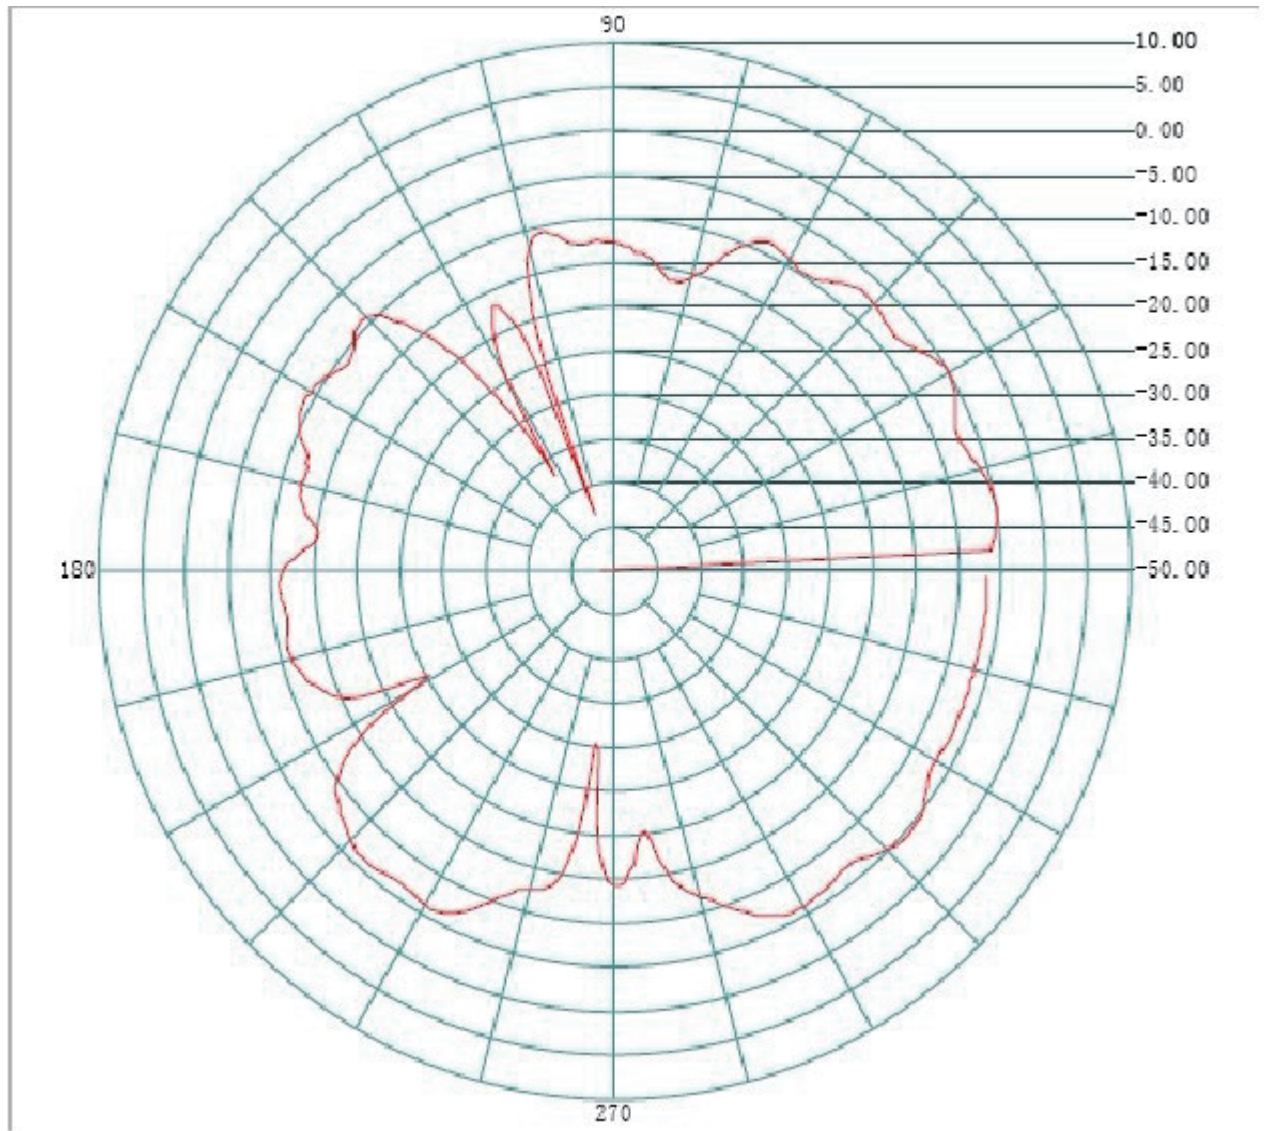

Frequency(MHZ): **2441**

Antenna Polarity: **Vertical**


Maximum Value(dBi): **-4.29**

Average Gain(dBi) : **-8.81**

Minimum Gain(dBi): **-51.4**

2. Main antenna : 2480 MHz

2.1 Horizontal

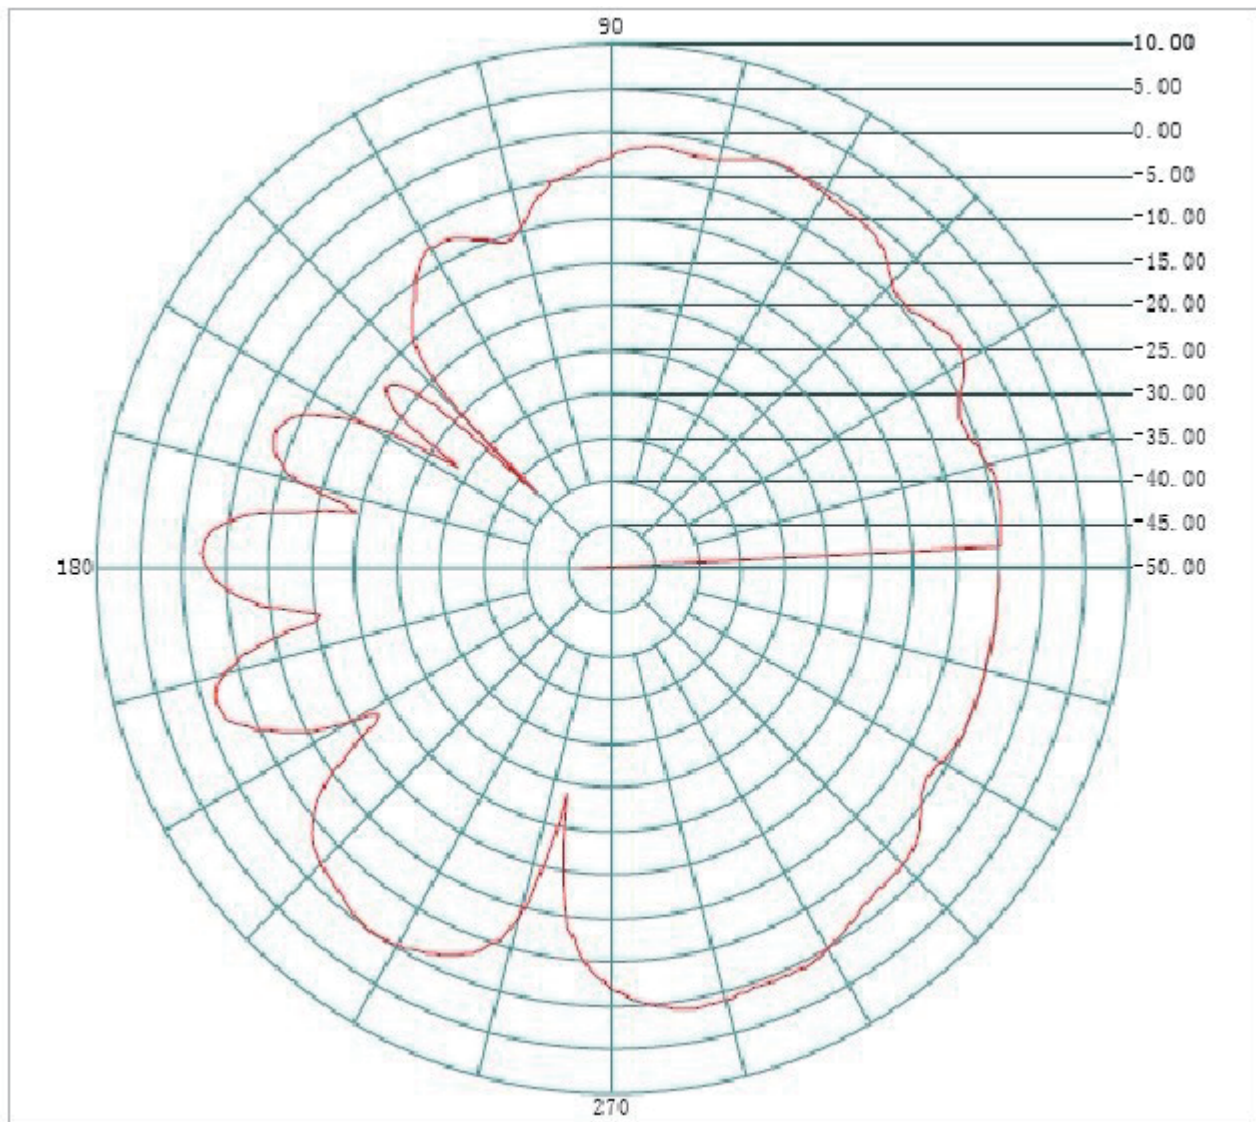

Frequency(MHZ): **2480**


Antenna Polarity: **Horizontal**

Maximum Value(dBi): **1.45**

Average Gain(dBi) : **-3.34**

Minimum Gain(dBi): **-53.4**

2.2 Vertical

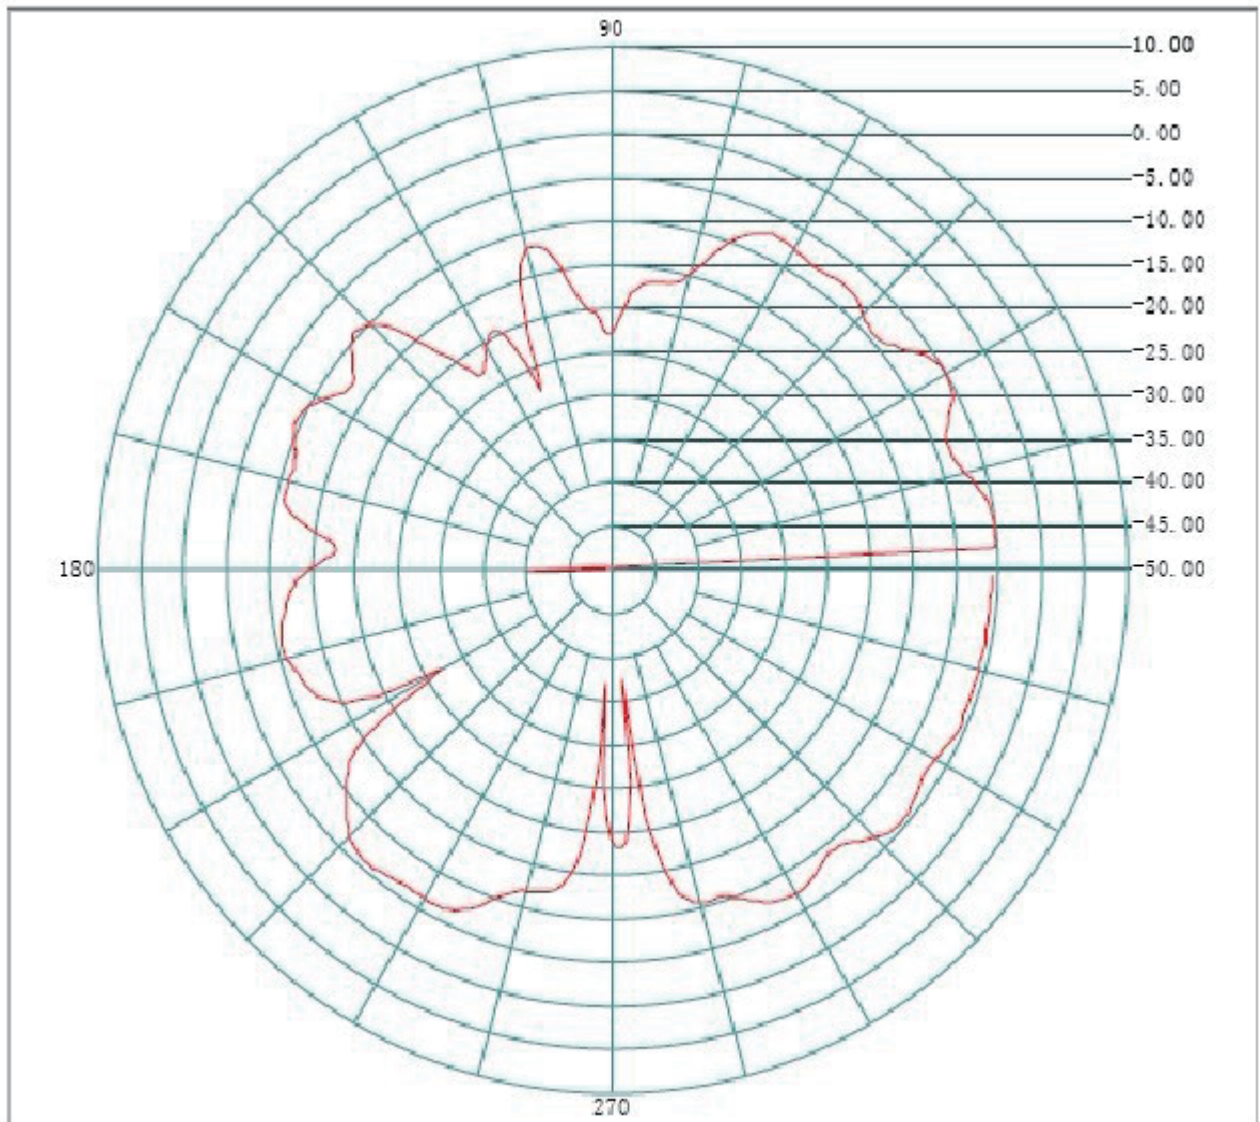

Frequency(MHZ): **2480**

Antenna Polarity: **Vertical**

Maximum Value(dBi): **-4.95**

Average Gain(dBi) : **-9.06**

Minimum Gain(dBi): **-60.00**