Mode	34	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	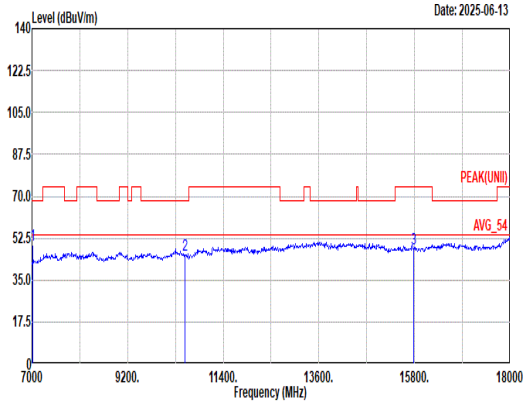 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7013.33 49.53 68.20 -18.67 64.62 35.90 13.29 65.42 1.14 396 24 Peak 2 10520.00 45.25 68.20 -22.95 56.84 38.64 16.62 67.18 0.33 -- -- Peak 3 15780.00 47.93 74.00 -26.07 56.25 37.64 20.95 67.24 0.33 -- -- Peak	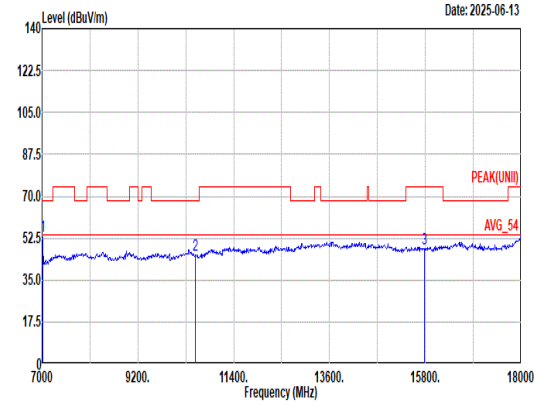 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7013.33 53.47 68.20 -14.73 68.56 35.90 13.29 65.42 1.14 382 27 Peak 2 10520.00 45.67 68.20 -22.53 57.26 38.64 16.62 67.18 0.33 -- -- Peak 3 15780.00 47.91 74.00 -26.09 56.23 37.64 20.95 67.24 0.33 -- -- Peak

Mode	34	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	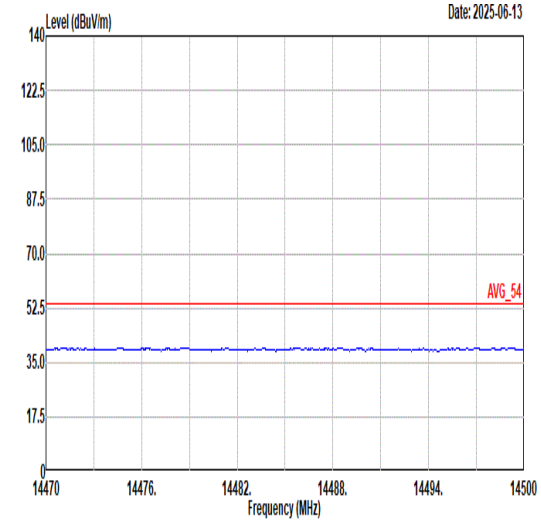 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	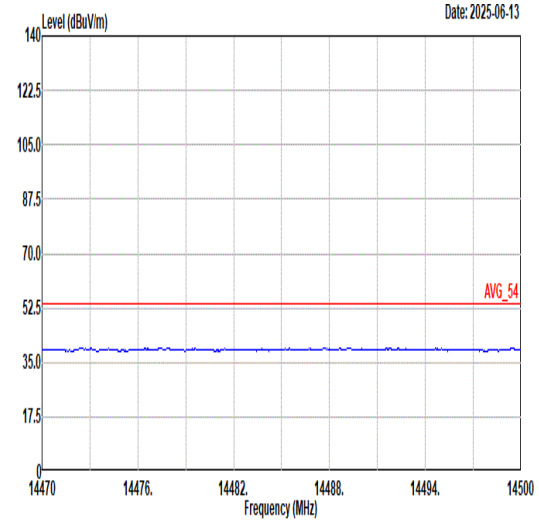 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	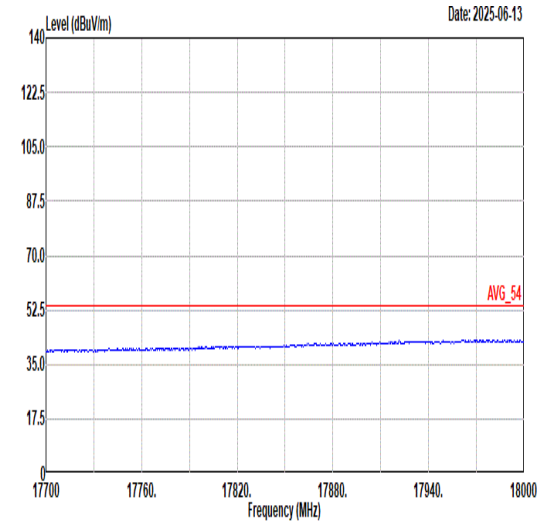 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	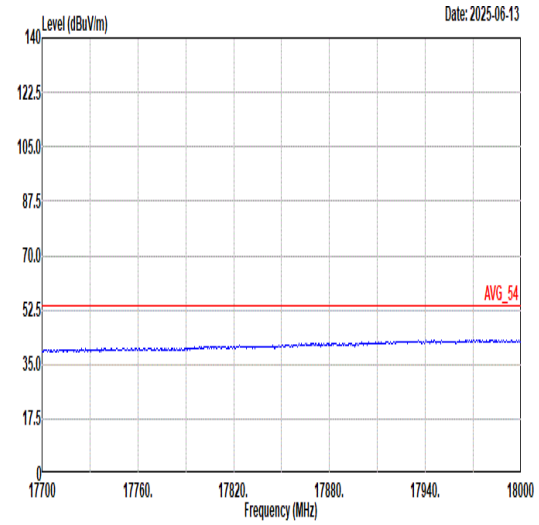 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	35	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	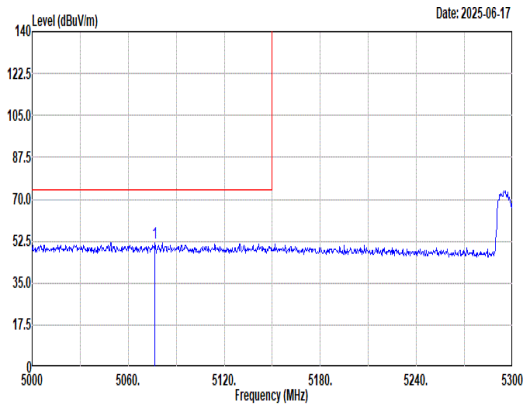 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5076.80 52.01 74.00 -21.99 42.17 32.95 9.71 32.82 0.00 153 104 Peak	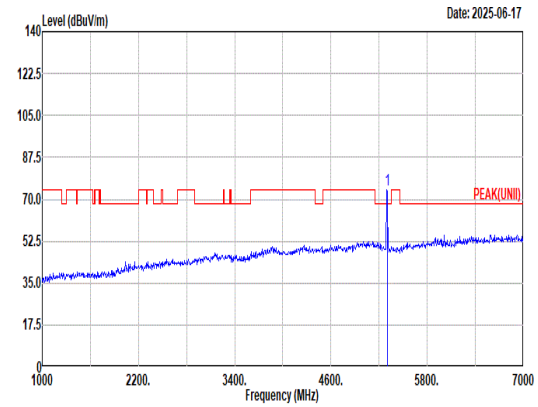 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 73.88 ------ ------ 64.10 32.91 9.64 32.77 0.00 153 104 Peak
Avg	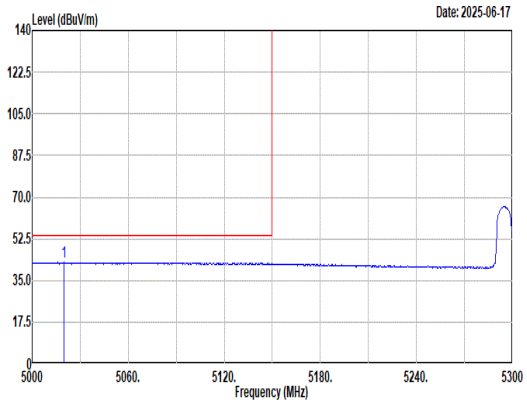 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5020.10 42.59 54.00 -11.41 32.66 33.02 9.75 32.84 0.00 153 104 Average	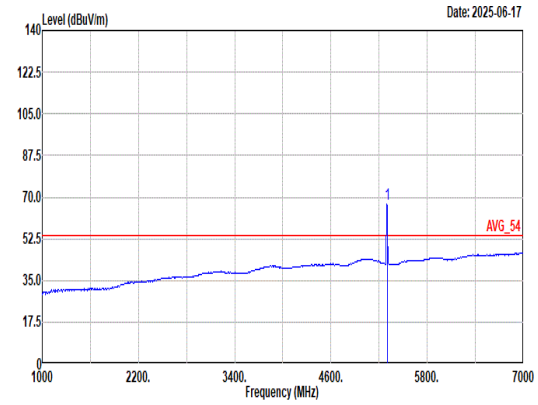 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 67.13 ------ ------ 57.35 32.91 9.64 32.77 0.00 153 104 Average

Mode	35	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	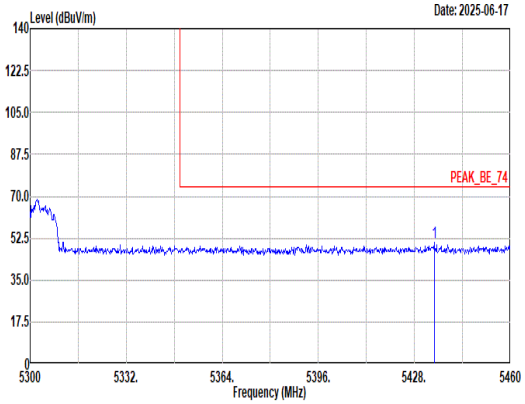 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5434.56 50.83 74.00 -23.17 40.98 32.80 9.79 32.74 0.00 153 104 Peak	Blank
Avg	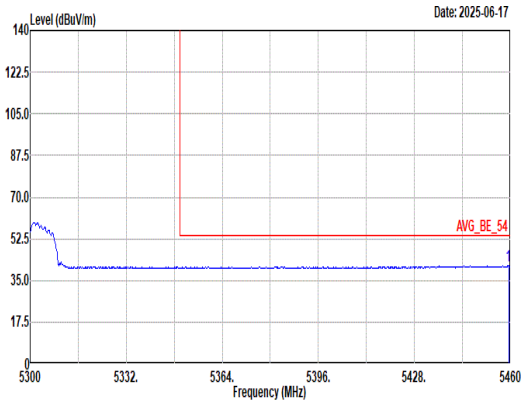 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.36 41.36 54.00 -12.64 31.37 32.84 9.89 32.74 0.00 153 104 Average	Blank

Mode	35	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	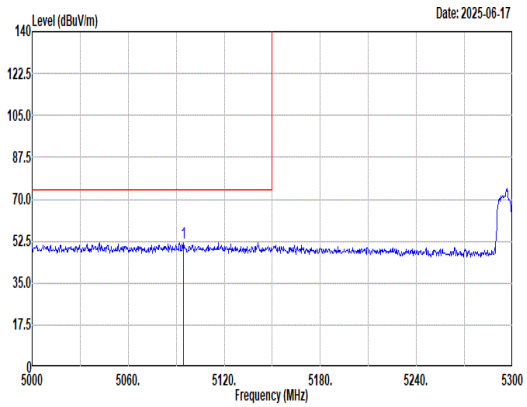 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5094.50 51.86 74.00 -22.14 41.99 32.99 9.70 32.82 0.00 300 117 Peak	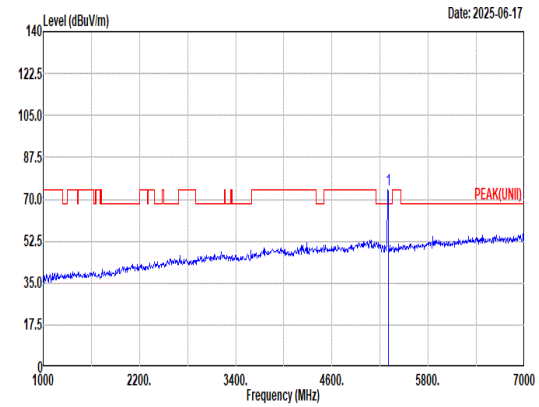 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 74.17 ------ ------ 64.39 32.91 9.64 32.77 0.00 300 117 Peak
Avg	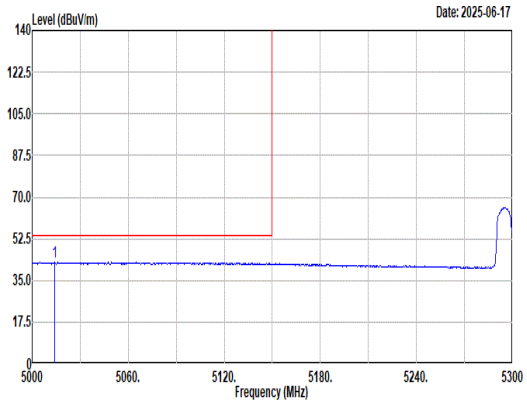 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5014.10 42.67 54.00 -11.33 32.72 33.04 9.75 32.84 0.00 300 117 Average	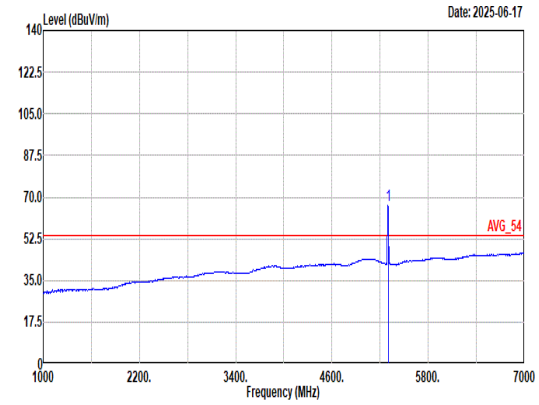 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 66.80 ------ ------ 57.02 32.91 9.64 32.77 0.00 300 117 Average

Mode	35	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	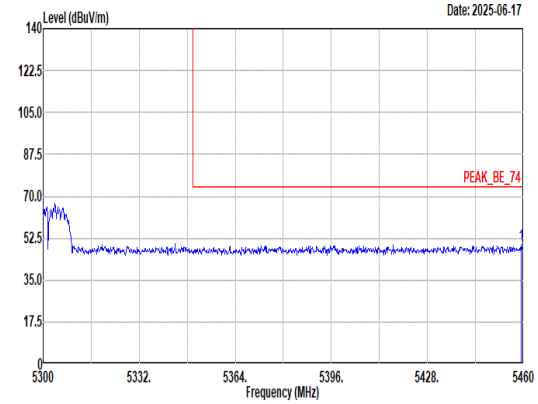 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.20 49.51 74.00 -24.49 39.53 32.84 9.88 32.74 0.00 300 117 Peak	Blank
Avg	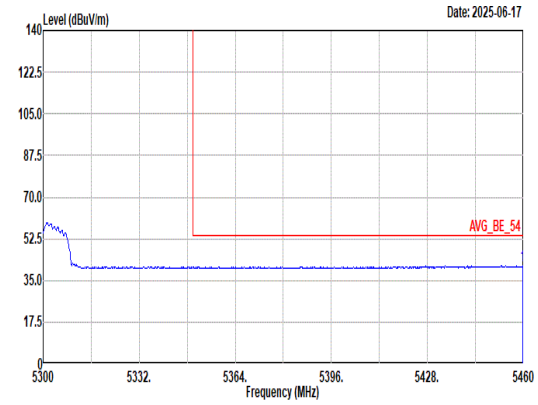 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.68 41.20 54.00 -12.80 31.21 32.84 9.89 32.74 0.00 300 117 Average	Blank

Mode	35	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	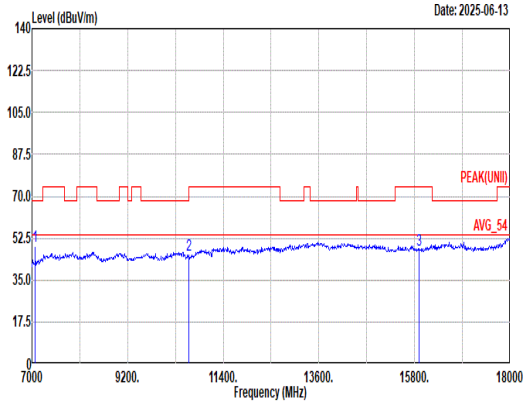 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7066.67 49.11 68.20 -19.09 64.15 36.00 13.39 65.48 1.05 397 18 Peak 2 10600.00 45.68 74.00 -28.32 56.76 39.00 16.69 67.10 0.33 -- -- Peak 3 15900.00 47.79 74.00 -26.21 55.81 37.80 21.08 67.22 0.32 -- -- Peak	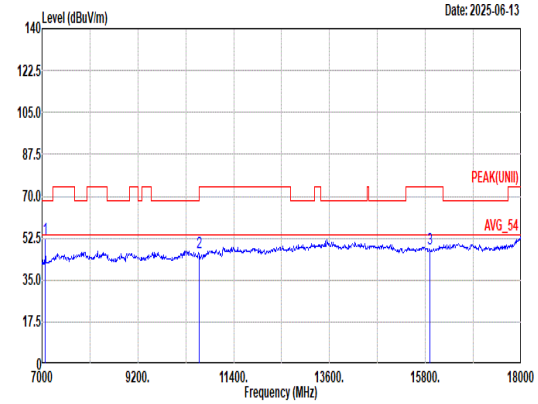 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7066.67 52.20 68.20 -16.00 67.24 36.00 13.39 65.48 1.05 117 244 Peak 2 10600.00 46.57 74.00 -27.43 57.65 39.00 16.69 67.10 0.33 -- -- Peak 3 15900.00 47.97 74.00 -26.03 55.99 37.80 21.08 67.22 0.32 -- -- Peak

Mode	35	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	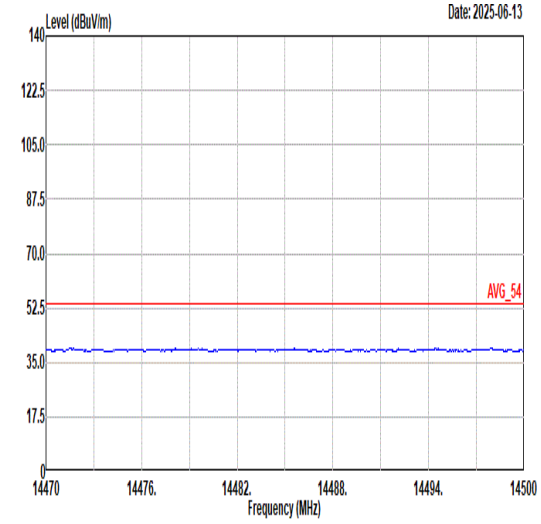 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	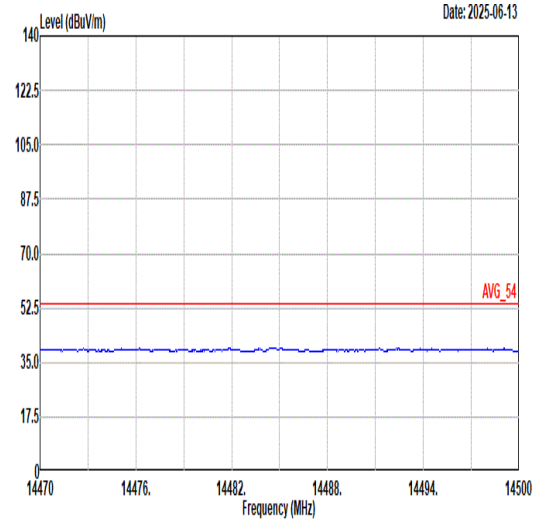 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	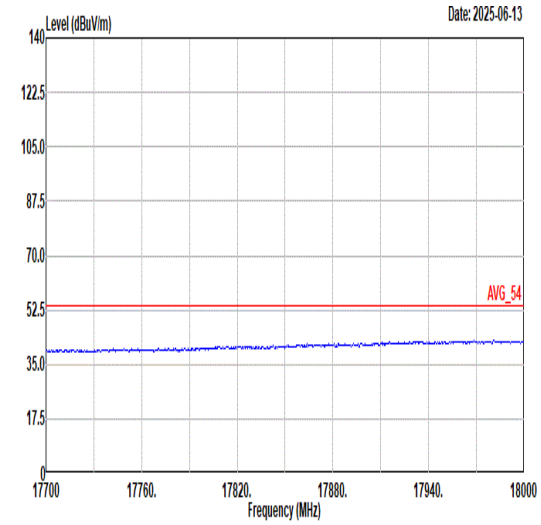 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	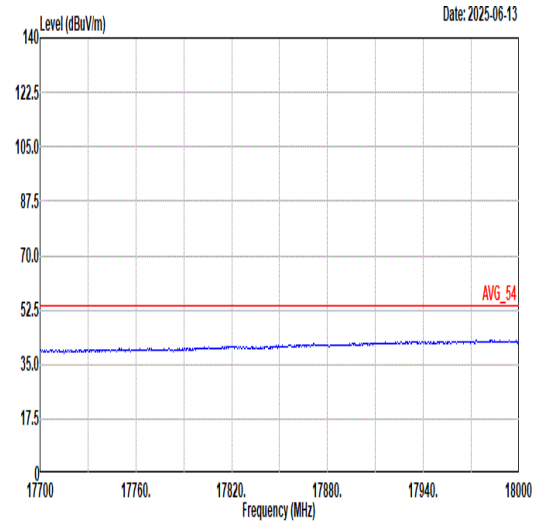 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	36	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	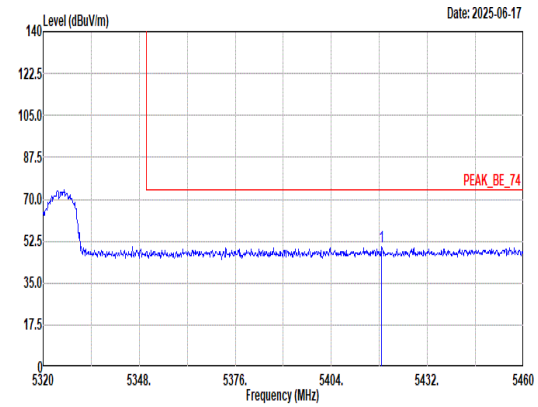 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5418.70 50.14 74.00 -23.86 40.36 32.80 9.73 32.75 0.00 149 94 Peak	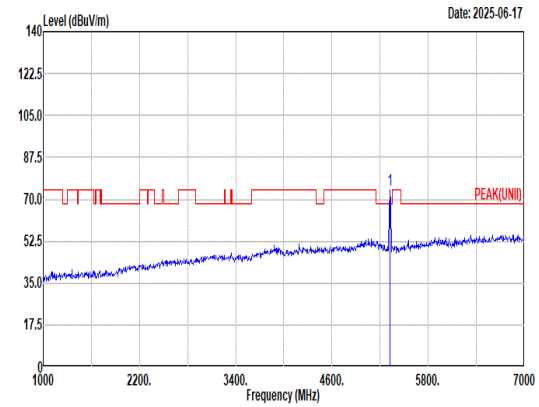 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 73.83 ------ ------ 64.05 32.90 9.65 32.77 0.00 149 94 Peak
Avg	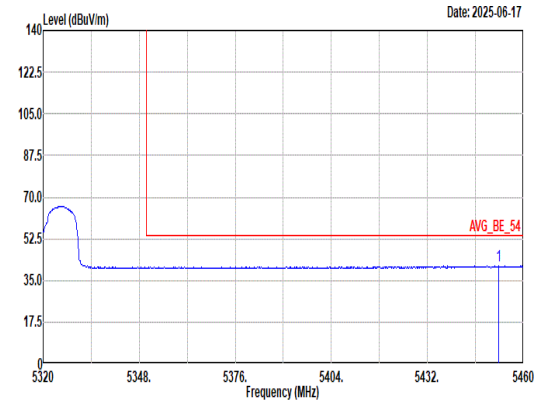 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.72 41.07 54.00 -12.93 31.14 32.81 9.86 32.74 0.00 149 94 Average	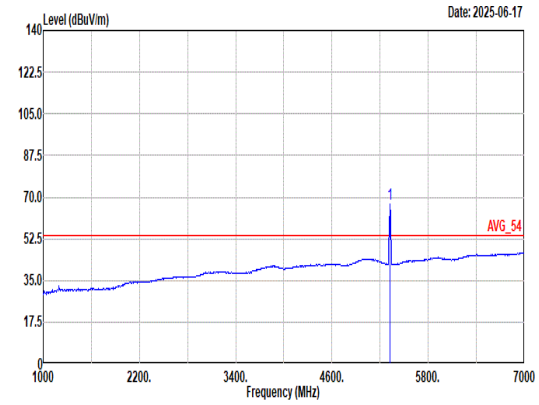 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 66.90 ------ ------ 57.12 32.90 9.65 32.77 0.00 149 94 Average

Mode	36	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	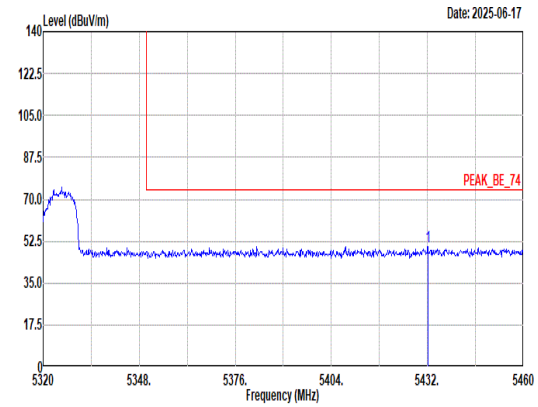 Site : 03CH11-HY Condition: PEAK_BE_74 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5432.14 50.36 74.00 -23.64 40.52 32.80 9.78 32.74 0.00 392 129 Peak	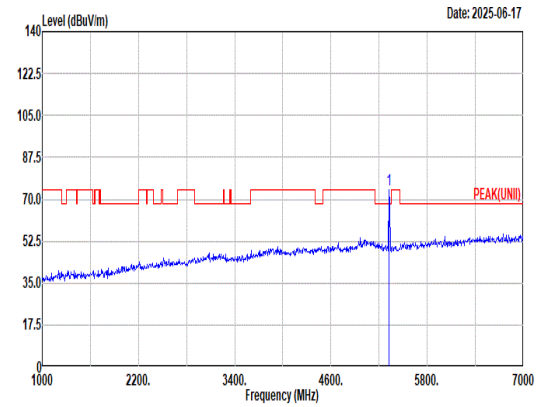 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 73.95 ------ ------ 64.17 32.90 9.65 32.77 0.00 392 129 Peak
Avg	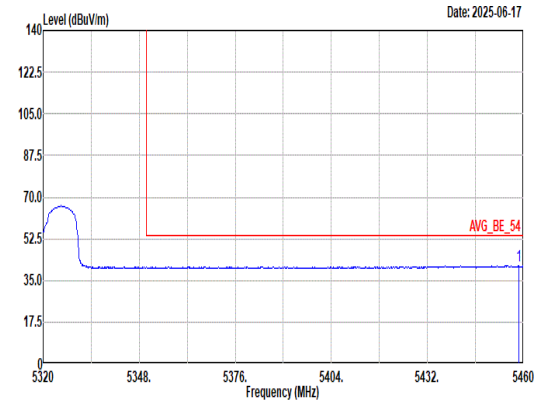 Site : 03CH11-HY Condition: AVG_BE_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.74 41.20 54.00 -12.80 31.23 32.83 9.88 32.74 0.00 392 129 Average	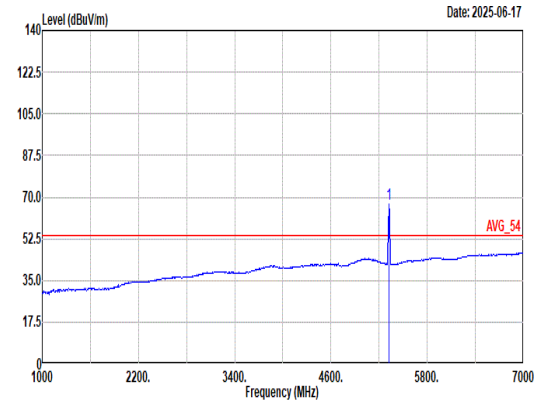 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 67.09 ------ ------ 57.31 32.90 9.65 32.77 0.00 392 129 Average

Mode	36	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	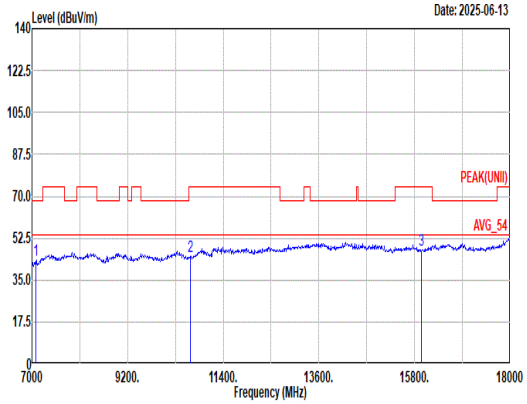 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7093.33 43.47 68.20 -24.73 58.37 36.16 13.44 65.51 1.01 -- -- Peak 2 10640.00 44.88 74.00 -29.12 55.81 39.08 16.72 67.06 0.33 -- -- Peak 3 15960.00 47.48 74.00 -26.52 55.76 37.46 21.15 67.21 0.32 -- -- Peak	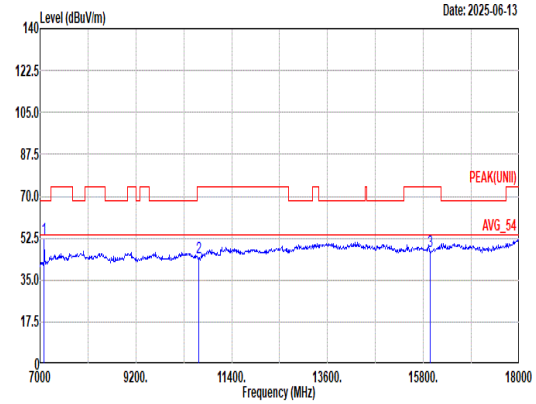 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7093.33 52.24 68.20 -15.96 67.14 36.16 13.44 65.51 1.01 387 271 Peak 2 10640.00 44.58 74.00 -29.42 55.51 39.08 16.72 67.06 0.33 -- -- Peak 3 15960.00 47.03 74.00 -26.97 55.31 37.46 21.15 67.21 0.32 -- -- Peak

Mode	36	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	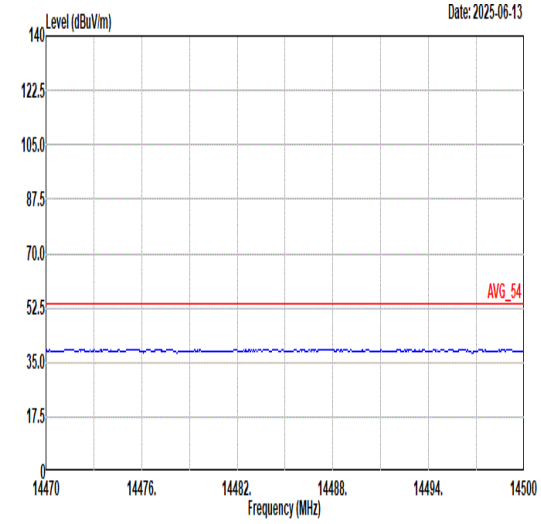 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	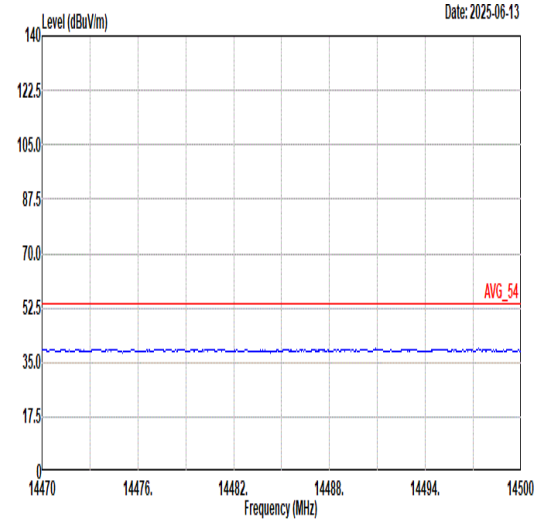 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	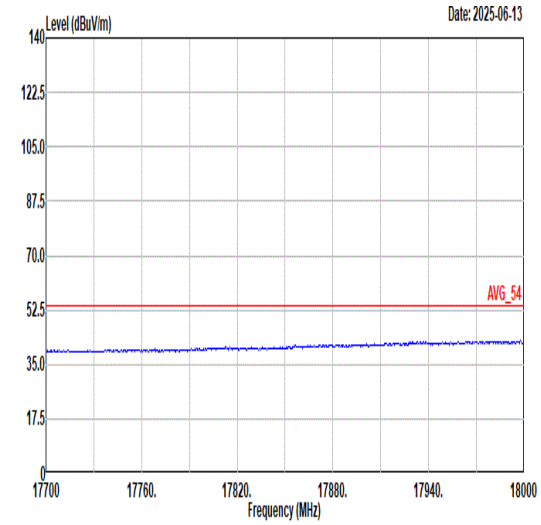 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	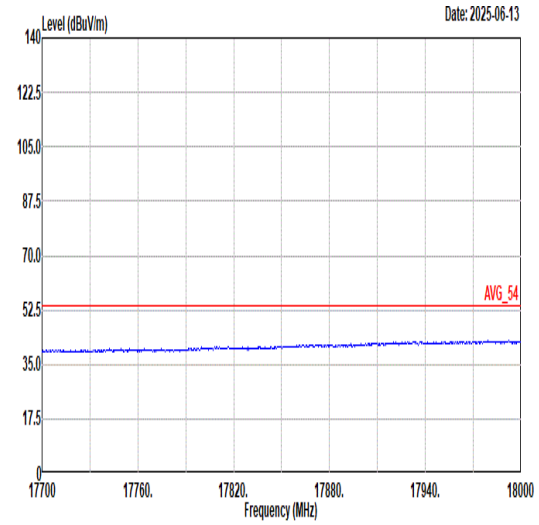 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	37	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	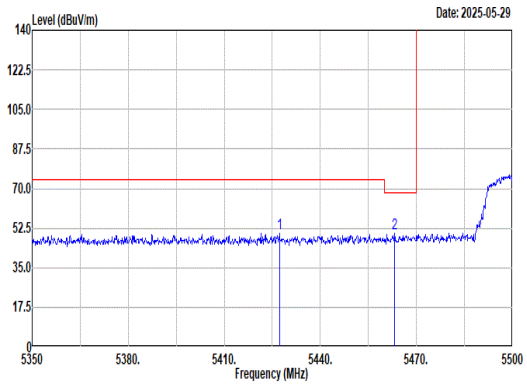 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5427.25 50.16 74.00 -23.84 40.35 32.80 9.76 32.75 0.00 278 281 PEAK 2 5463.25 49.94 68.20 -18.26 39.93 32.85 9.90 32.74 0.00 278 281 PEAK	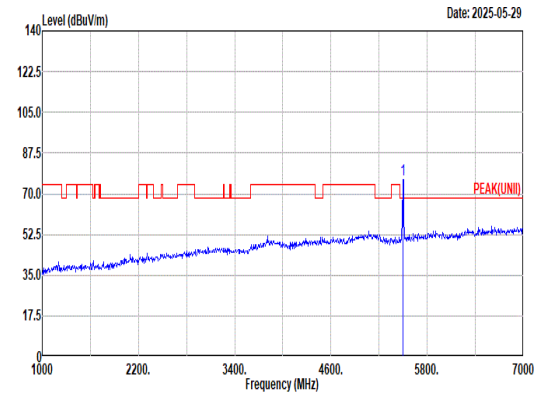 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 75.99 ------ ------ 65.68 33.00 10.04 32.73 0.00 278 281 PEAK
Avg	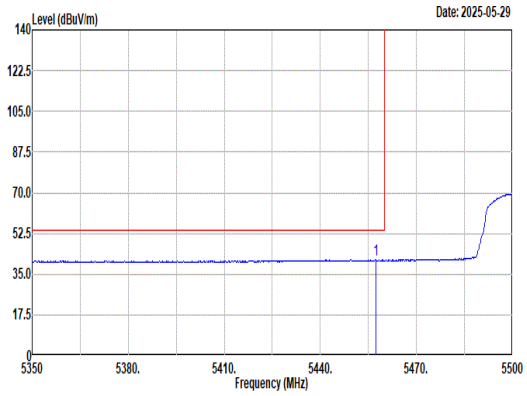 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.40 41.22 54.00 -12.78 31.25 32.83 9.88 32.74 0.00 278 281 AVERAGE	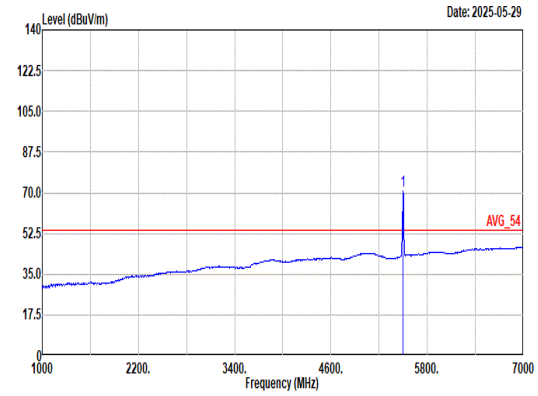 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 70.67 ------ ------ 60.36 33.00 10.04 32.73 0.00 278 281 AVERAGE

Mode	37	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	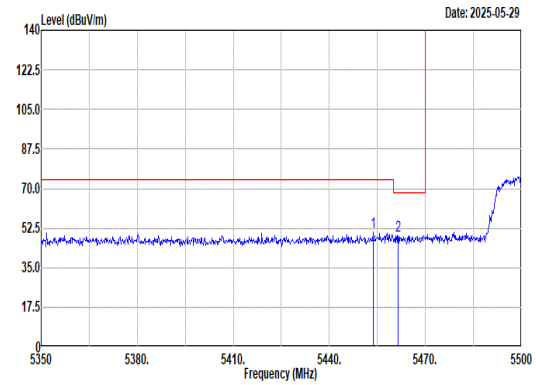 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.65 50.63 74.00 -23.37 40.70 32.81 9.86 32.74 0.00 306 315 PEAK 2 5461.45 49.15 68.20 -19.05 39.15 32.85 9.89 32.74 0.00 306 315 PEAK	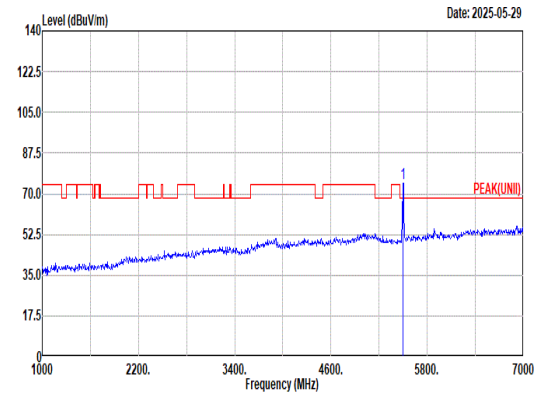 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 74.37 ------ ------ 64.06 32.98 10.06 32.73 0.00 306 315 PEAK
Avg	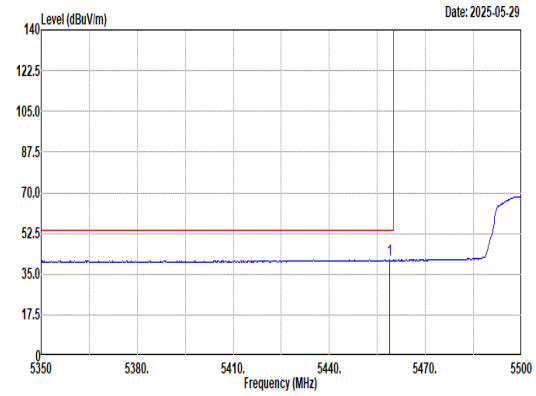 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.75 41.12 54.00 -12.88 31.15 32.83 9.88 32.74 0.00 306 315 AVERAGE	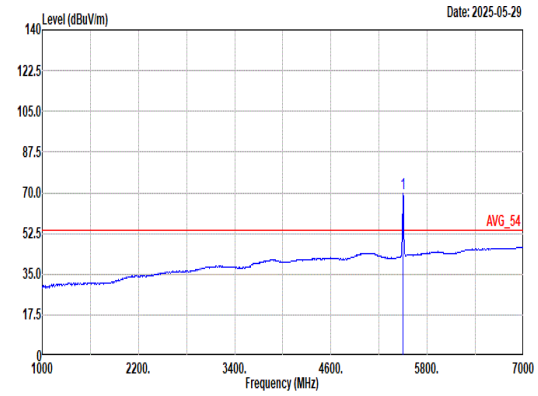 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 69.49 ------ ------ 59.18 33.00 10.04 32.73 0.00 306 315 AVERAGE

Mode	37	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	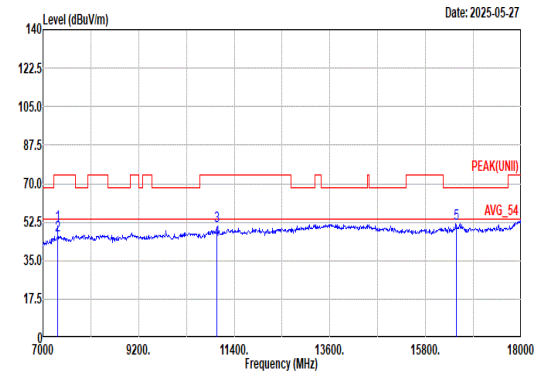 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 51.15 74.00 -22.85 65.75 36.73 13.75 65.80 0.72 137 234 Peak 2 7333.00 46.73 54.00 -7.27 61.33 36.73 13.75 65.80 0.72 137 234 Average 3 11000.00 50.49 74.00 -23.51 61.11 38.70 17.04 66.70 0.34 400 105 PEAK 4 11000.00 44.18 54.00 -9.82 54.80 38.70 17.04 66.70 0.34 400 105 Average 5 16500.00 51.69 68.20 -16.51 58.61 38.40 21.31 67.00 0.37 -- -- PEAK	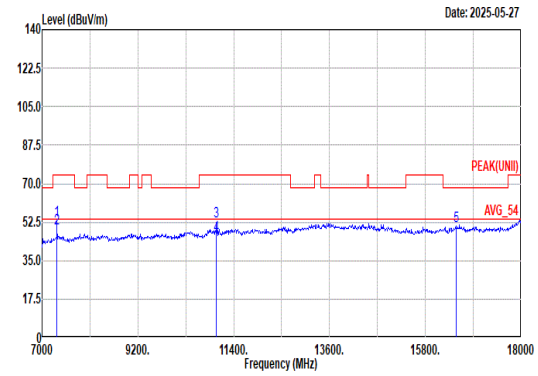 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 53.13 74.00 -20.87 67.73 36.73 13.75 65.80 0.72 247 307 Peak 2 7333.00 49.74 54.00 -4.26 64.34 36.73 13.75 65.80 0.72 247 307 Average 3 11000.00 52.75 74.00 -21.25 63.37 38.70 17.04 66.70 0.34 398 138 PEAK 4 11000.00 46.52 54.00 -7.48 57.14 38.70 17.04 66.70 0.34 398 138 Average 5 16500.00 50.67 68.20 -17.53 57.59 38.40 21.31 67.00 0.37 -- -- PEAK

Mode	37	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	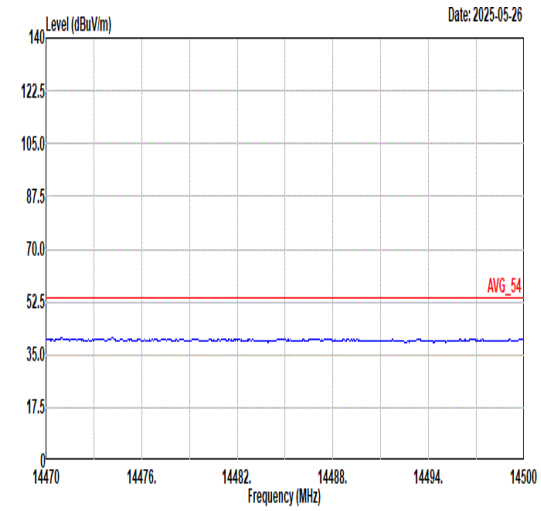 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	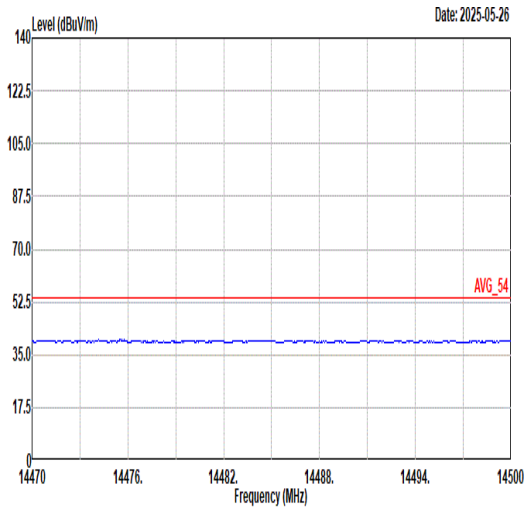 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	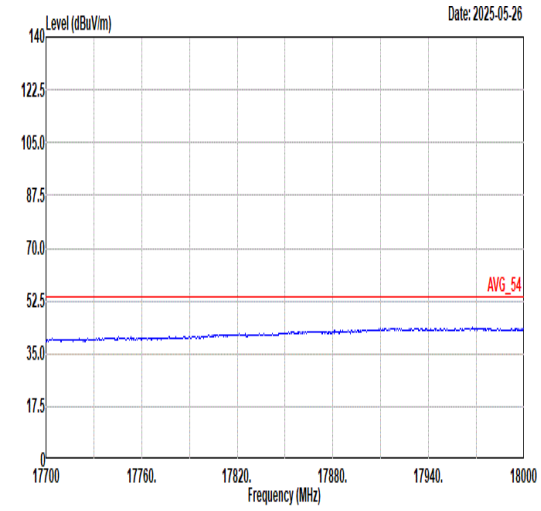 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	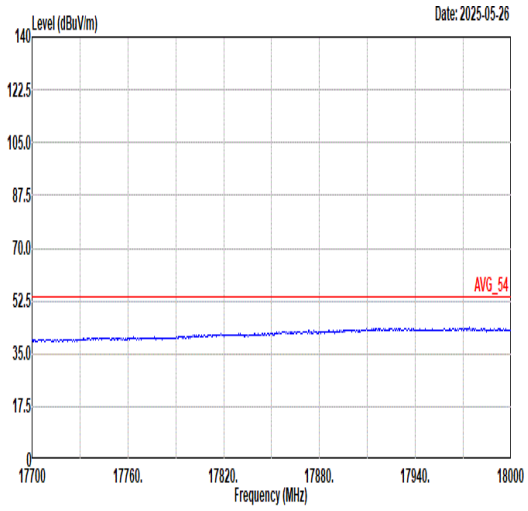 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	38
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz
ANT	1

Pol.	Horizontal	Fundamental
Peak	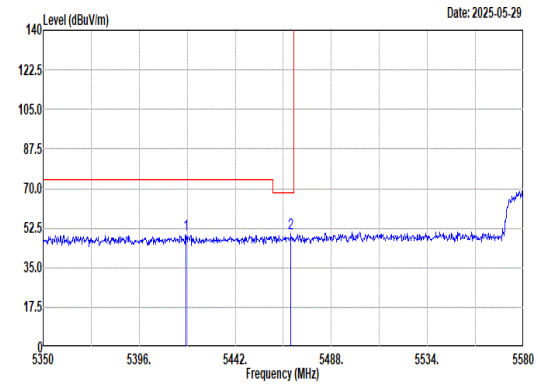 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5418.31 49.54 74.00 -24.46 39.76 32.80 9.73 32.75 0.00 306 315 PEAK 2 5468.68 50.02 68.20 -18.18 39.97 32.87 9.92 32.74 0.00 306 315 PEAK	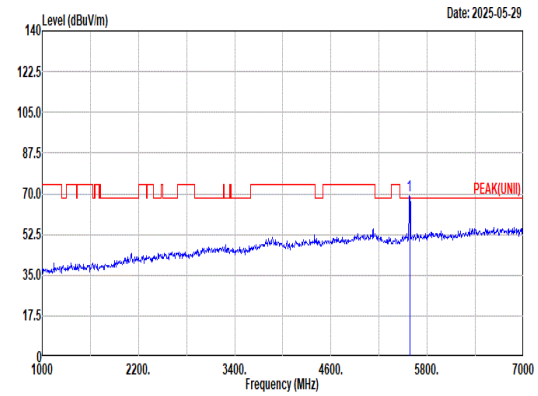 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 69.46 ------ ------ 59.08 32.80 10.34 32.76 0.00 306 315 PEAK
Avg	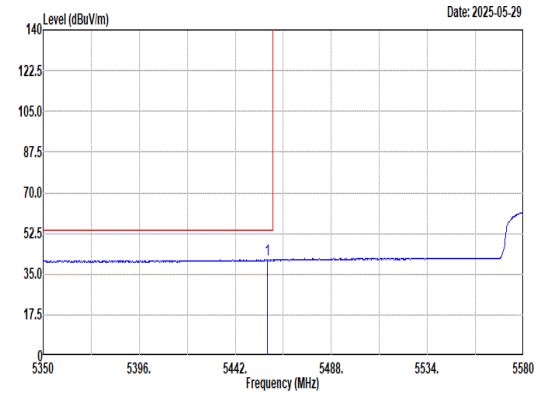 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.41 41.17 54.00 -12.83 31.20 32.83 9.88 32.74 0.00 306 315 AVERAGE	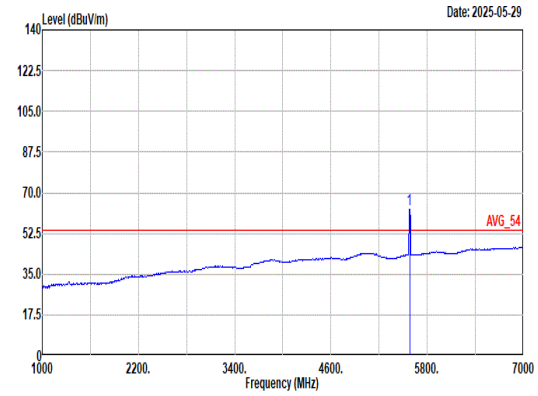 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 62.99 ------ ------ 52.59 32.80 10.36 32.76 0.00 306 315 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	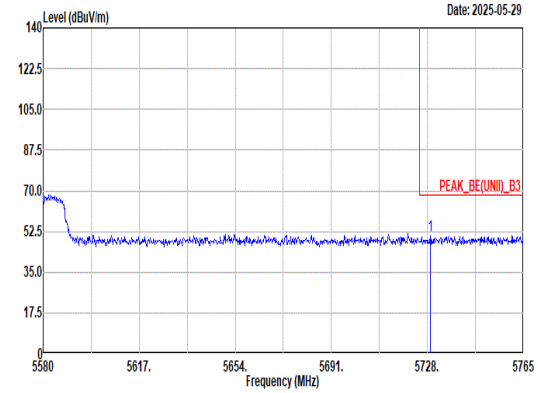 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.11 50.79 68.20 -17.41 39.95 33.46 10.20 32.82 0.00 306 315 PEAK	Blank

Mode	38
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz
ANT	1

Pol.	Vertical	Fundamental
Peak	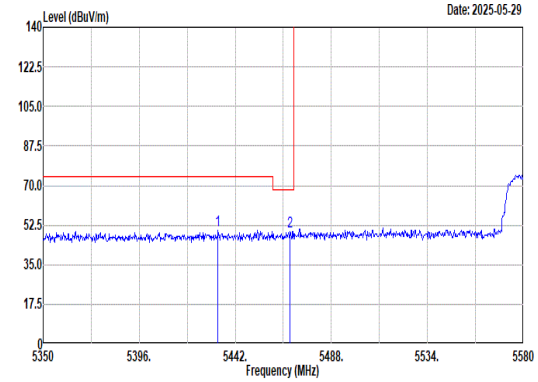 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5433.72 50.14 74.00 -23.86 40.29 32.80 9.79 32.74 0.00 306 315 PEAK 2 5468.22 49.89 68.20 -18.31 39.84 32.87 9.92 32.74 0.00 306 315 PEAK	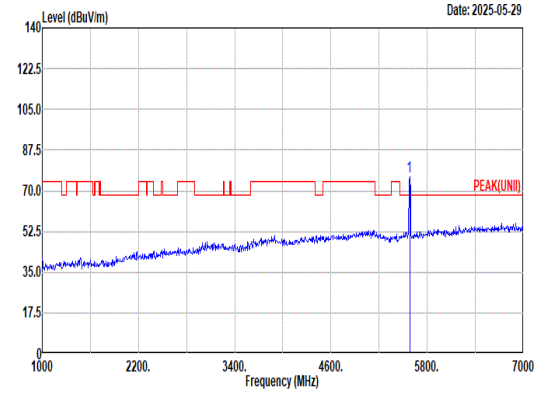 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 76.18 ------ ------ 65.78 32.80 10.36 32.76 0.00 306 315 PEAK
Avg	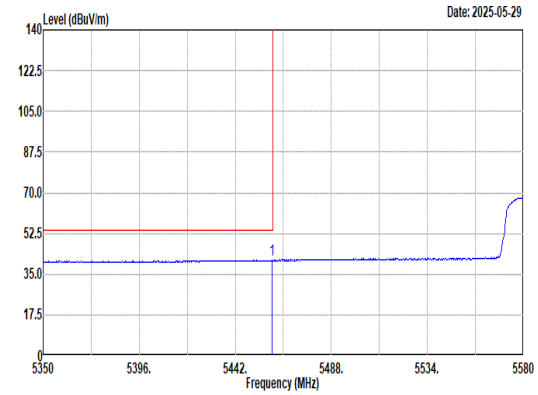 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto 1 5459.71 40.99 54.00 -13.01 31.00 32.84 9.89 32.74 0.00 306 315 AVERAGE	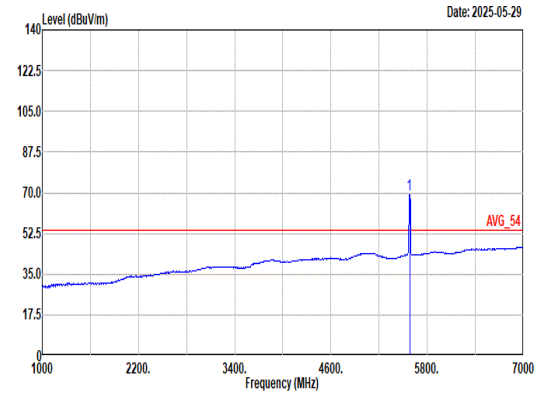 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto 1 5580.00 69.36 ------ ------ 58.98 32.80 10.34 32.76 0.00 306 315 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	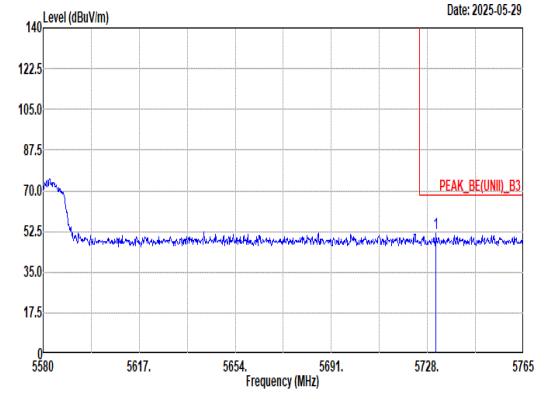 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5731.33 51.60 68.20 -16.60 40.76 33.46 10.20 32.82 0.00 306 315 PEAK	Blank

Mode	38	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	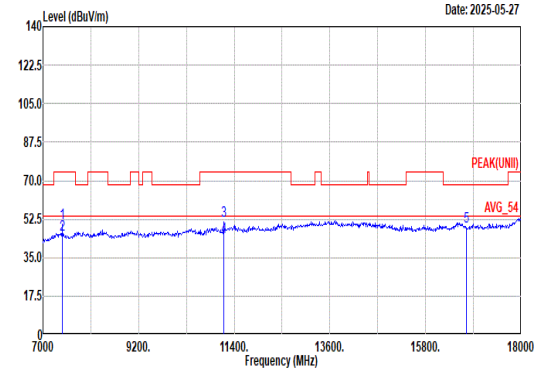 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 50.89 74.00 -23.11 66.03 36.24 13.86 65.93 0.69 140 233 Peak 2 7440.00 45.54 54.00 -8.46 60.68 36.24 13.86 65.93 0.69 140 233 Average 3 11160.00 51.84 74.00 -22.16 62.20 38.62 17.18 66.51 0.35 400 262 PEAK 4 11160.00 44.28 54.00 -9.72 54.64 38.62 17.18 66.51 0.35 400 262 Average 5 16740.00 49.07 68.20 -19.13 55.89 37.84 21.37 66.42 0.39 -- -- PEAK	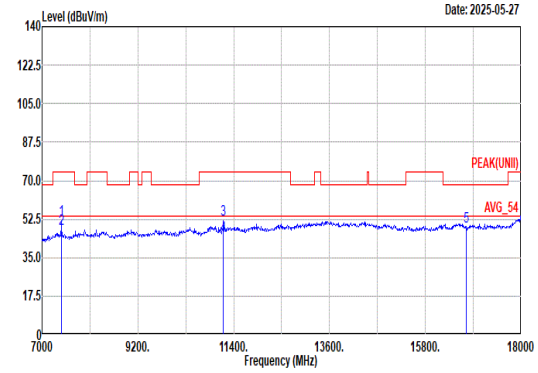 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 52.25 74.00 -21.75 67.39 36.24 13.86 65.93 0.69 375 245 Peak 2 7440.00 47.87 54.00 -6.13 63.01 36.24 13.86 65.93 0.69 375 245 Average 3 11160.00 52.47 74.00 -21.53 62.83 38.62 17.18 66.51 0.35 400 339 PEAK 4 11160.00 45.09 54.00 -8.91 55.45 38.62 17.18 66.51 0.35 400 339 Average 5 16740.00 49.20 68.20 -19.00 56.02 37.84 21.37 66.42 0.39 -- -- PEAK

Mode	38	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	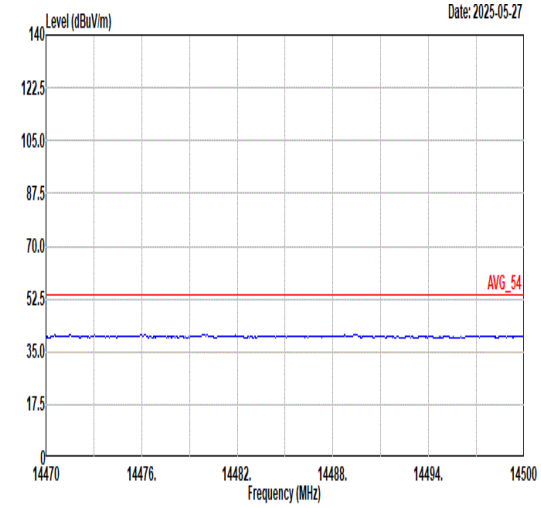 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	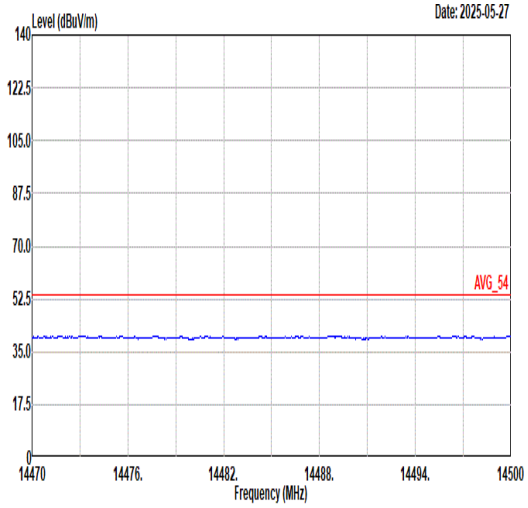 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	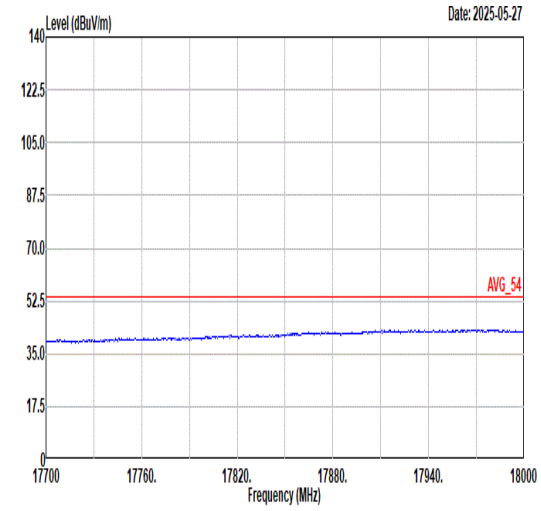 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	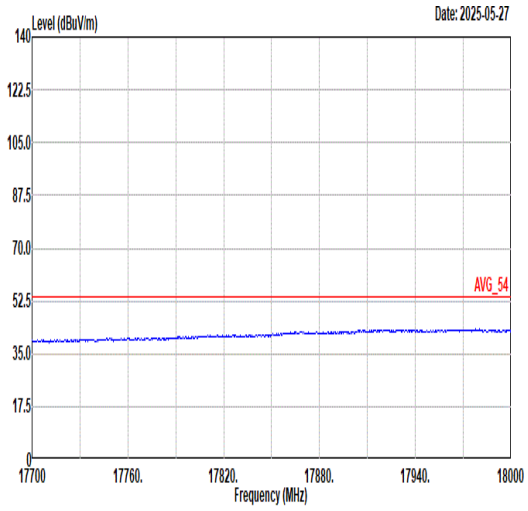 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	39	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	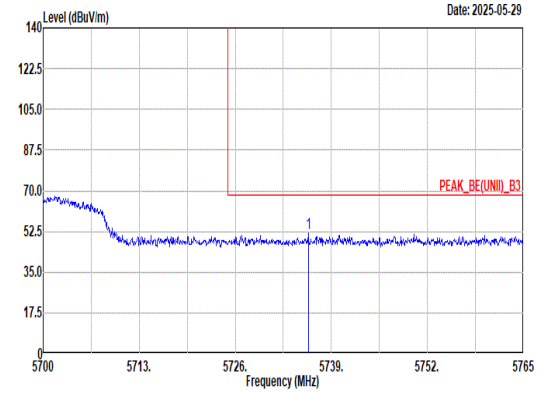 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5735.88 51.93 68.20 -16.27 41.09 33.47 10.19 32.82 0.00 306 315 PEAK	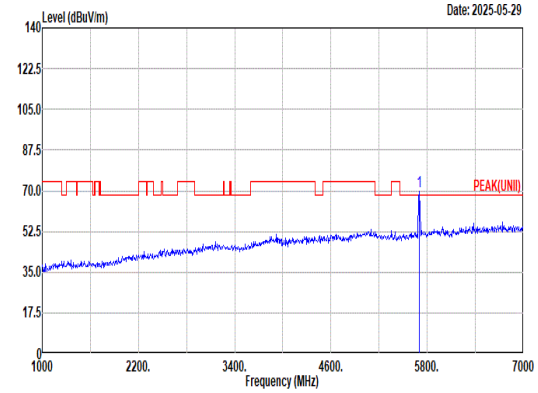 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 69.58 ------ ------ 58.76 33.38 10.25 32.81 0.00 306 315 PEAK
Avg	Blank	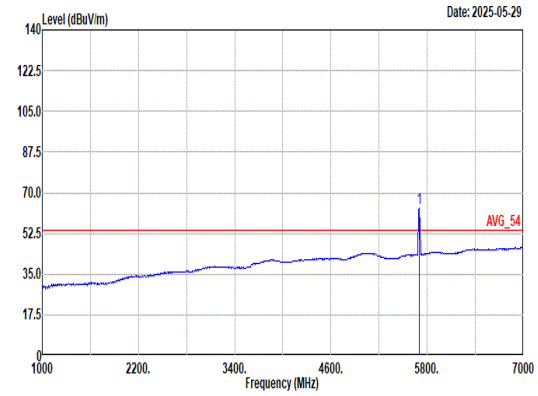 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 63.47 ------ ------ 52.65 33.38 10.25 32.81 0.00 306 315 AVERAGE

Mode	39	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	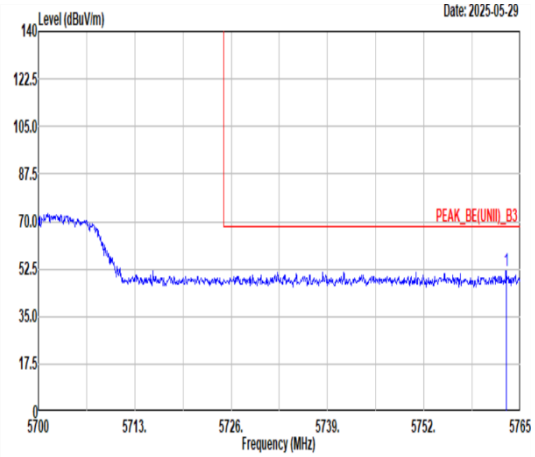 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5763.12 51.97 68.20 -16.23 41.11 33.55 10.14 32.83 0.00 306 315 PEAK	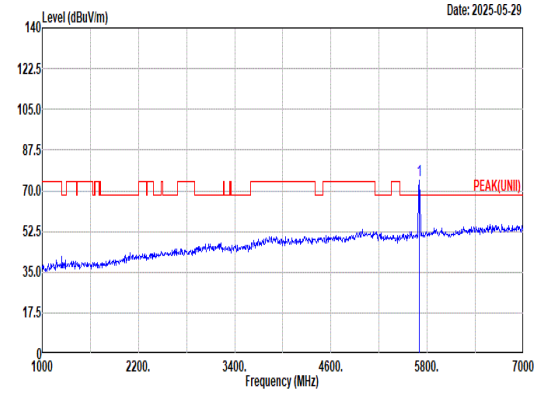 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 74.66 ------ ------ 63.84 33.38 10.25 32.81 0.00 306 315 PEAK
Avg	Blank	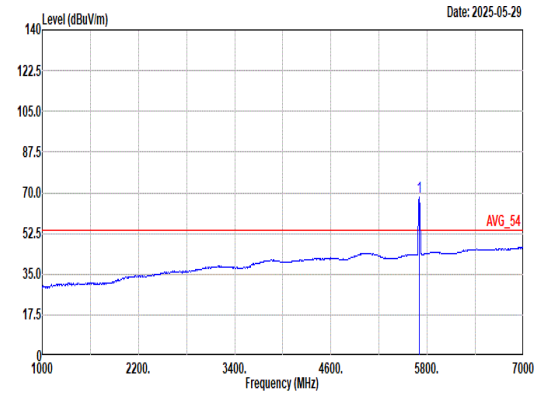 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 67.94 ------ ------ 57.12 33.38 10.25 32.81 0.00 306 315 AVERAGE

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	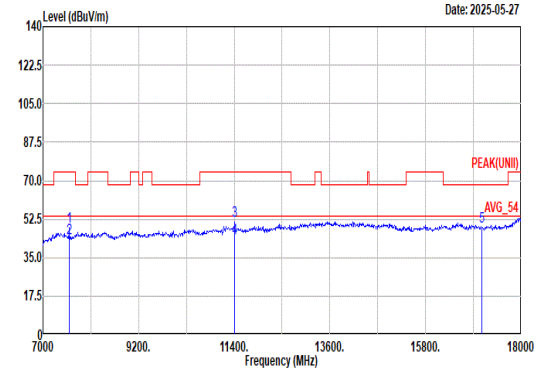 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 49.12 74.00 -24.88 64.19 36.10 14.08 66.04 0.79 125 227 PEAK 2 7600.00 43.78 54.00 -10.22 58.85 36.10 14.08 66.04 0.79 125 227 Average 3 11400.00 51.67 74.00 -22.33 61.13 39.00 17.40 66.22 0.36 390 263 PEAK 4 11400.00 43.77 54.00 -10.23 53.23 39.00 17.40 66.22 0.36 390 263 Average 5 17100.00 49.13 68.20 -19.07 55.30 37.80 21.49 65.88 0.42 -- -- PEAK	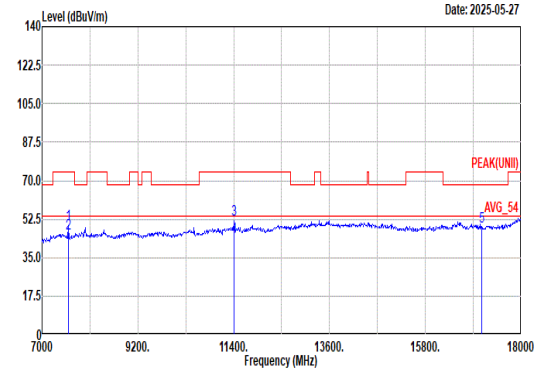 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 50.35 74.00 -23.65 65.42 36.10 14.08 66.04 0.79 356 276 PEAK 2 7600.00 46.12 54.00 -7.88 61.19 36.10 14.08 66.04 0.79 356 276 Average 3 11400.00 52.36 74.00 -21.64 61.82 39.00 17.40 66.22 0.36 392 220 PEAK 4 11400.00 44.18 54.00 -9.82 53.64 39.00 17.40 66.22 0.36 392 220 Average 5 17100.00 49.15 68.20 -19.05 55.32 37.80 21.49 65.88 0.42 -- -- PEAK

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	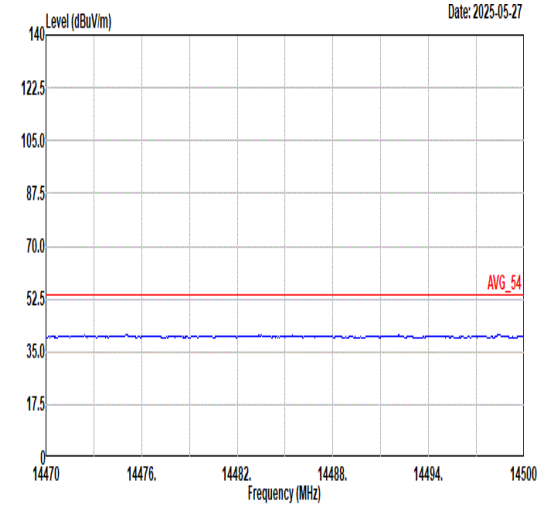 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	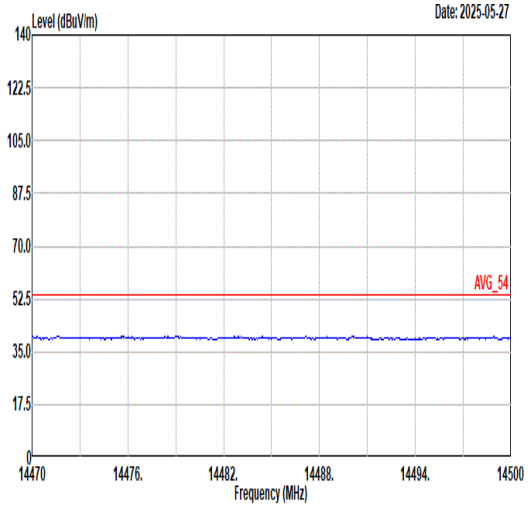 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	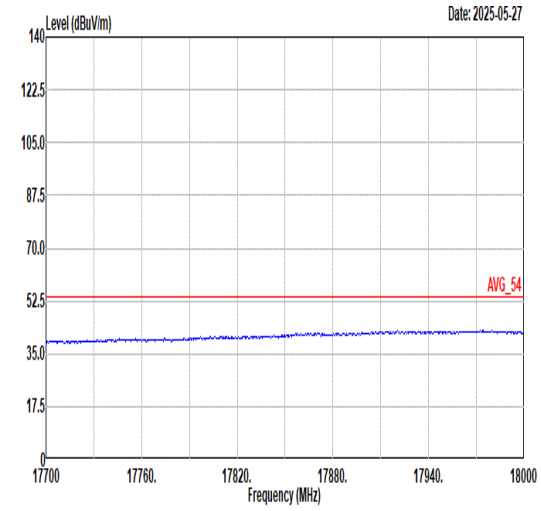 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	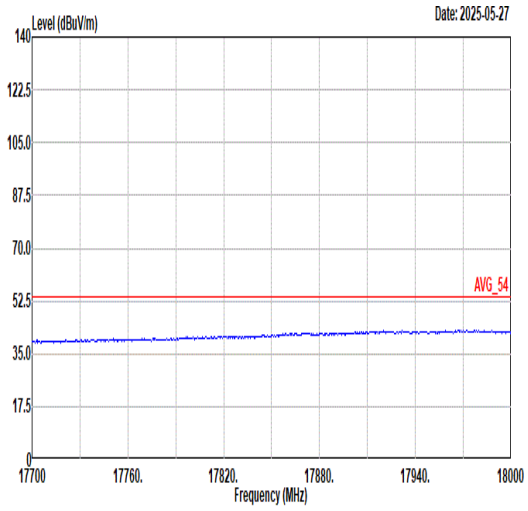 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	40	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	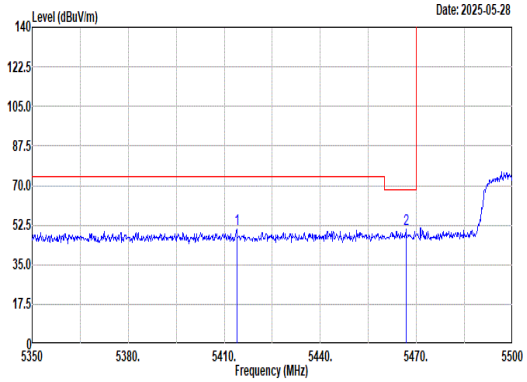 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5413.90 50.47 74.00 -23.53 40.71 32.80 9.71 32.75 0.00 275 280 PEAK 2 5466.70 50.62 68.20 -17.58 40.58 32.87 9.91 32.74 0.00 275 280 PEAK	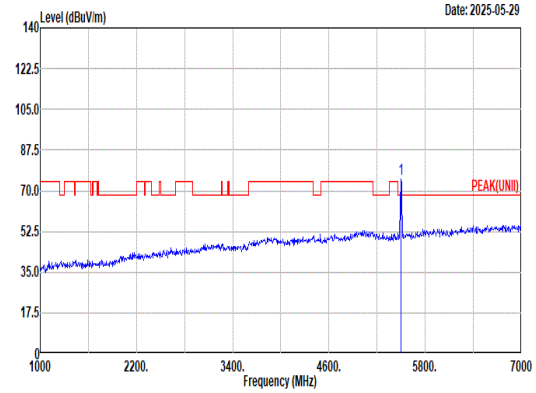 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 74.82 ------ ------ 64.51 33.00 10.04 32.73 0.00 275 280 PEAK
Avg	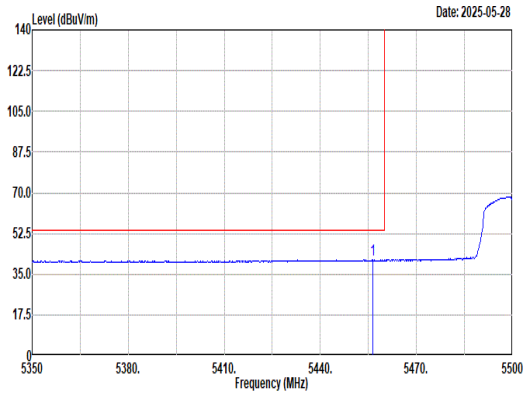 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.50 41.04 54.00 -12.96 31.08 32.83 9.87 32.74 0.00 275 280 AVERAGE	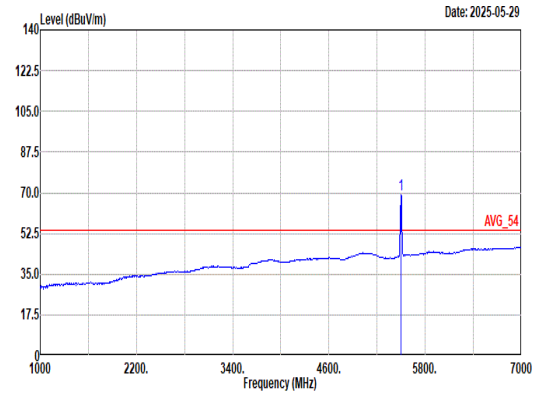 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 69.35 ------ ------ 59.04 33.00 10.04 32.73 0.00 275 280 AVERAGE

Mode	40	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	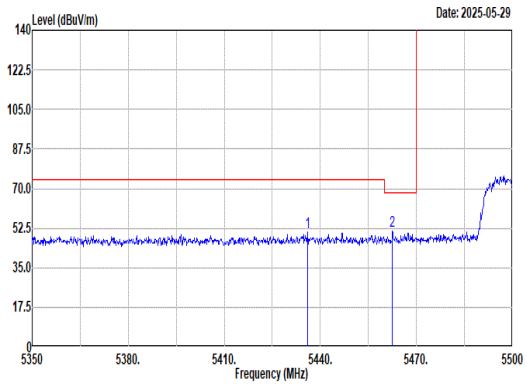 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.10 50.62 74.00 -23.38 40.76 32.80 9.80 32.74 0.00 400 304 PEAK 2 5462.50 51.22 68.20 -16.98 41.21 32.85 9.90 32.74 0.00 400 304 PEAK	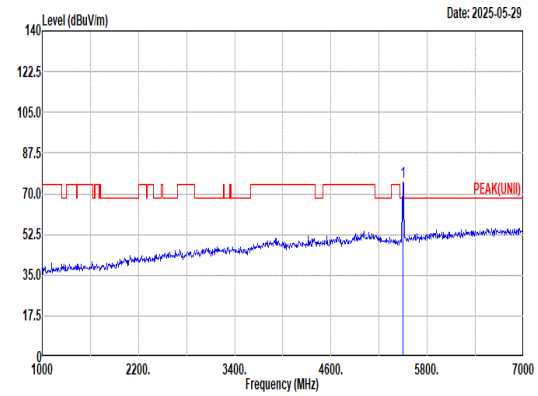 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 74.85 ------ ------ 64.58 32.98 10.02 32.73 0.00 400 304 PEAK
Avg	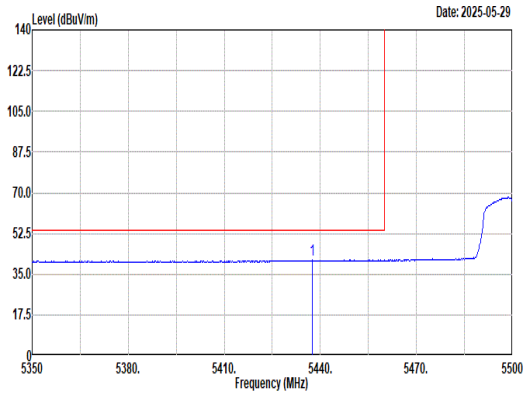 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5437.60 41.15 54.00 -12.85 31.29 32.80 9.80 32.74 0.00 400 304 AVERAGE	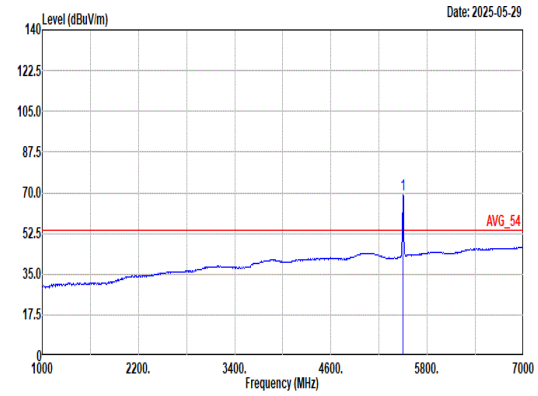 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 69.08 ------ ------ 58.77 33.00 10.04 32.73 0.00 400 304 AVERAGE

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	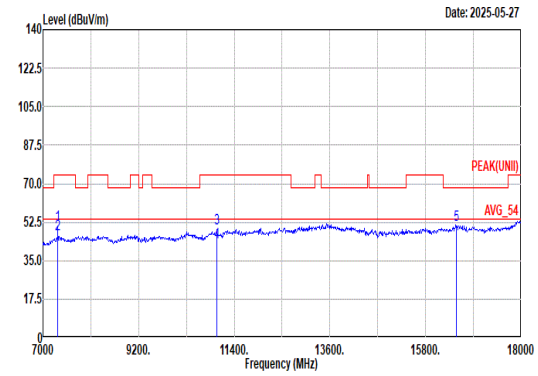 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL	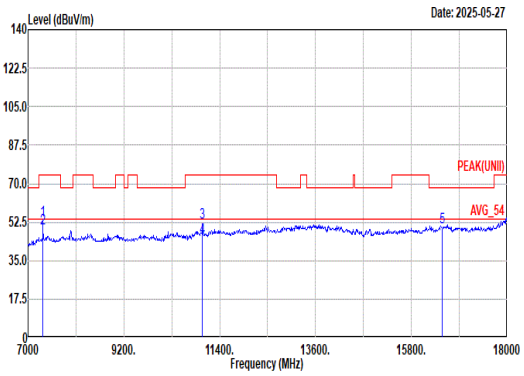 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL

Horizontal:

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7333.33	51.27	74.00	-22.73	65.87	36.73	13.75	65.80	0.72	134	233	PEAK
2	7333.33	46.85	54.00	-7.15	61.45	36.73	13.75	65.80	0.72	134	233	Average
3	11000.00	49.46	74.00	-24.54	60.08	38.70	17.04	66.70	0.34	400	100	PEAK
4	11000.00	43.51	54.00	-10.49	54.13	38.70	17.04	66.70	0.34	400	100	Average
5	16500.00	51.14	68.20	-17.06	58.06	38.40	21.31	67.00	0.37	--	--	PEAK

Vertical:

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7333.33	53.15	74.00	-20.85	67.75	36.73	13.75	65.80	0.72	249	307	PEAK
2	7333.33	49.84	54.00	-4.16	64.44	36.73	13.75	65.80	0.72	249	307	Average
3	11000.00	52.34	74.00	-21.66	62.96	38.70	17.04	66.70	0.34	330	144	PEAK
4	11000.00	45.63	54.00	-8.37	56.25	38.70	17.04	66.70	0.34	330	144	Average
5	16500.00	50.25	68.20	-17.95	57.17	38.40	21.31	67.00	0.37	--	--	PEAK

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	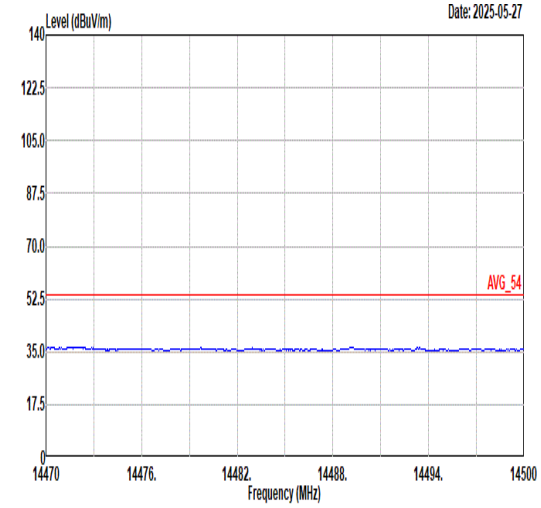 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	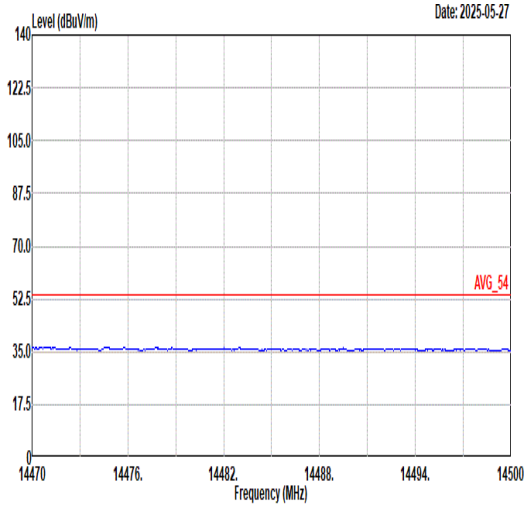 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	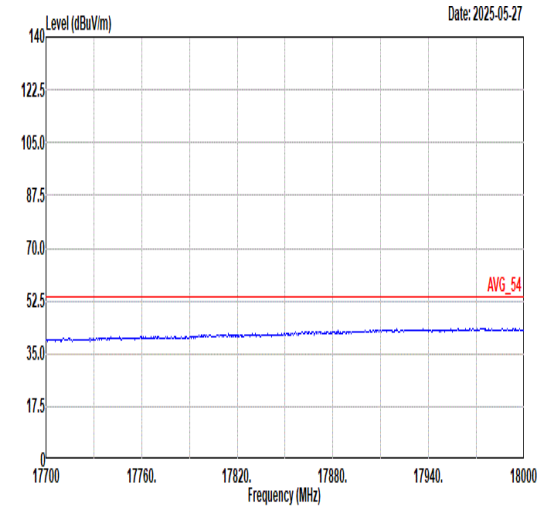 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	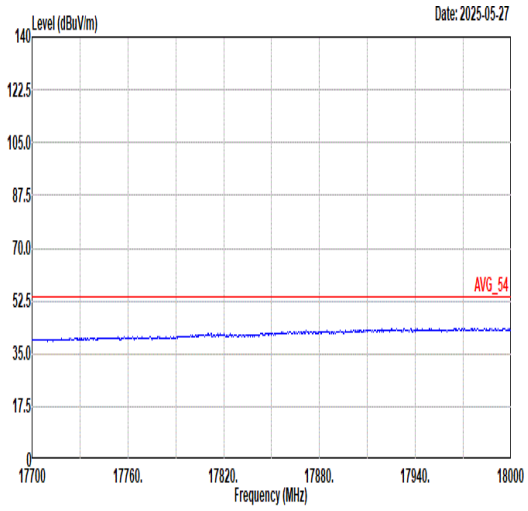 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	41	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	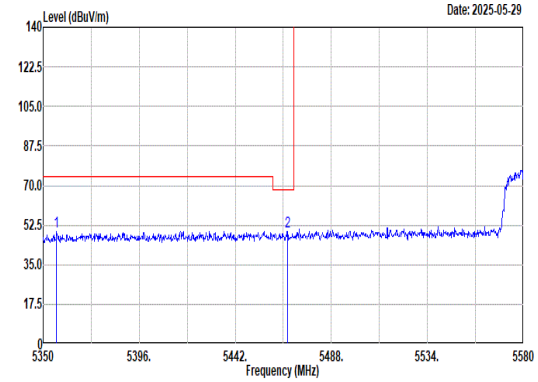 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5356.44 49.70 74.00 -24.30 39.92 32.89 9.65 32.76 0.00 146 288 PEAK 2 5467.07 49.47 68.20 -18.73 39.43 32.87 9.91 32.74 0.00 146 288 PEAK	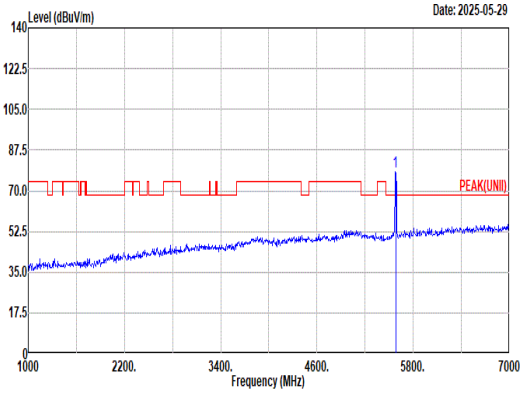 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 78.24 ------ ------ 67.86 32.80 10.34 32.76 0.00 146 288 PEAK
Avg	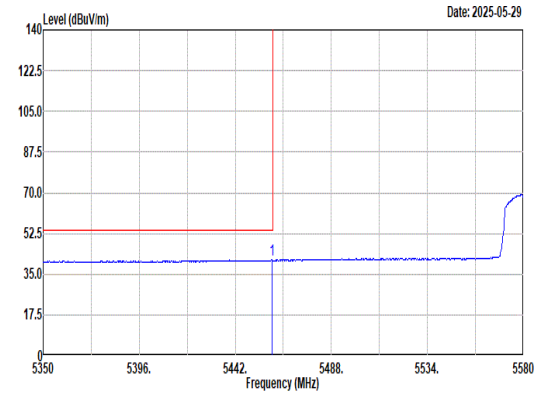 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto 1 5459.71 41.10 54.00 -12.90 31.11 32.84 9.89 32.74 0.00 146 288 AVERAGE	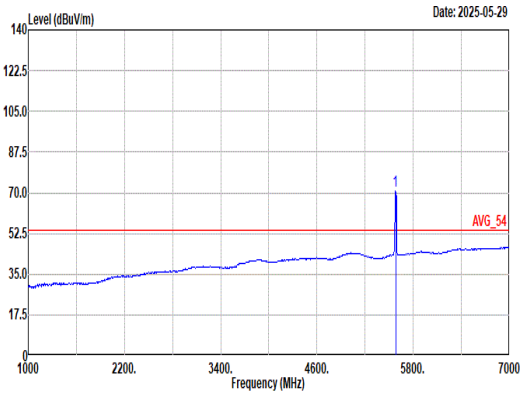 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto 1 5580.00 70.59 ------ ------ 60.21 32.80 10.34 32.76 0.00 146 288 AVERAGE

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	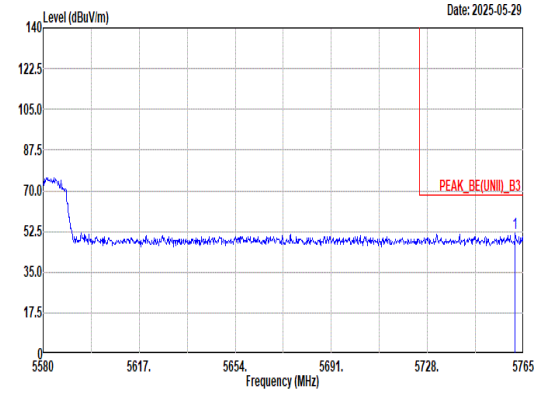 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5761.86 52.00 68.20 -16.20 41.14 33.55 10.14 32.83 0.00 146 288 PEAK	Blank

Mode	41	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	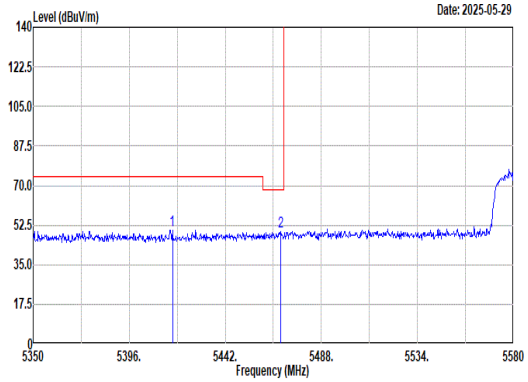 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5416.70 50.09 74.00 -23.91 40.32 32.80 9.72 32.75 0.00 372 318 PEAK 2 5468.68 49.85 68.20 -18.35 39.80 32.87 9.92 32.74 0.00 372 318 PEAK	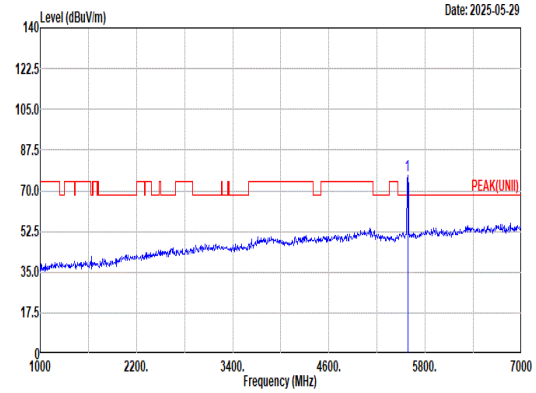 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 76.37 ------ ------ 65.97 32.80 10.36 32.76 0.00 372 318 PEAK
Avg	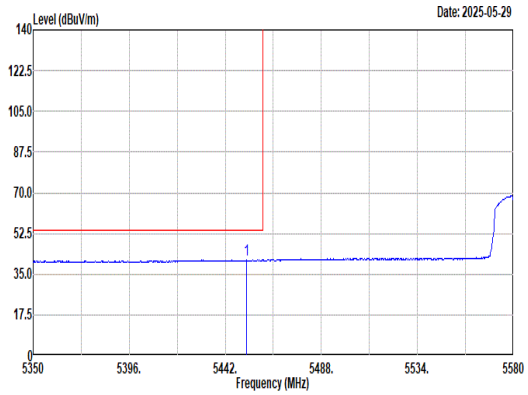 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto 1 5452.12 41.14 54.00 -12.86 31.21 32.81 9.86 32.74 0.00 372 318 AVERAGE	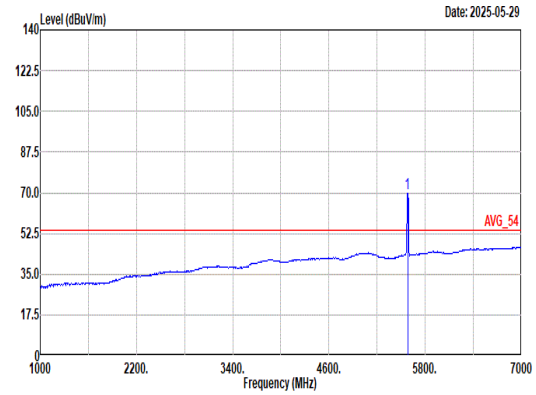 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto 1 5580.00 69.97 ------ ------ 59.59 32.80 10.34 32.76 0.00 372 318 AVERAGE

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	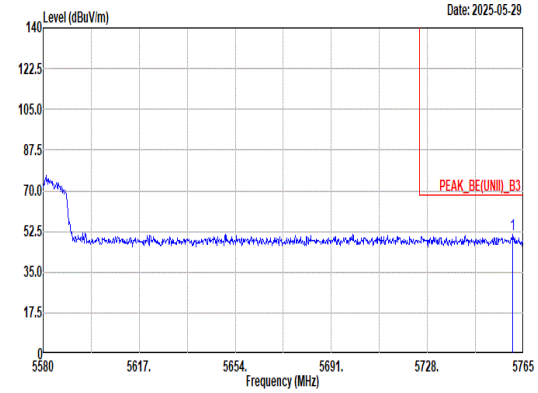 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.93 51.19 68.20 -17.01 40.33 33.54 10.15 32.83 0.00 372 318 PEAK	Blank

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	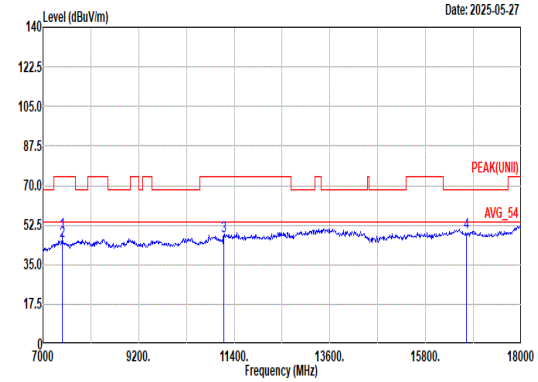 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 49.11 74.00 -24.89 64.25 36.24 13.86 65.93 0.69 154 245 PEAK 2 7440.00 45.52 54.00 -8.48 60.66 36.24 13.86 65.93 0.69 154 245 Average 3 11160.00 47.70 74.00 -26.30 58.06 38.62 17.18 66.51 0.35 -- -- PEAK 4 16740.00 49.15 68.20 -19.05 55.97 37.84 21.37 66.42 0.39 -- -- PEAK	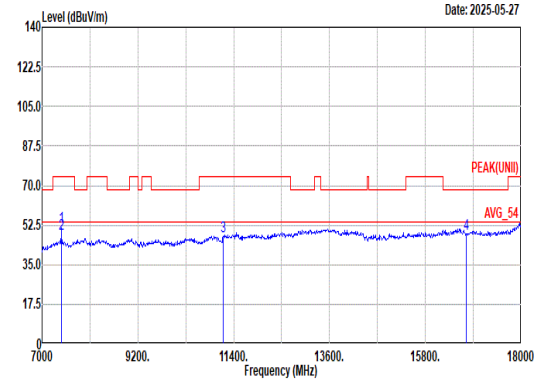 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 51.80 74.00 -22.20 66.94 36.24 13.86 65.93 0.69 268 301 PEAK 2 7440.00 48.55 54.00 -5.45 63.69 36.24 13.86 65.93 0.69 268 301 Average 3 11160.00 47.79 74.00 -26.21 58.15 38.62 17.18 66.51 0.35 -- -- PEAK 4 16740.00 48.58 68.20 -19.62 55.40 37.84 21.37 66.42 0.39 -- -- PEAK

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	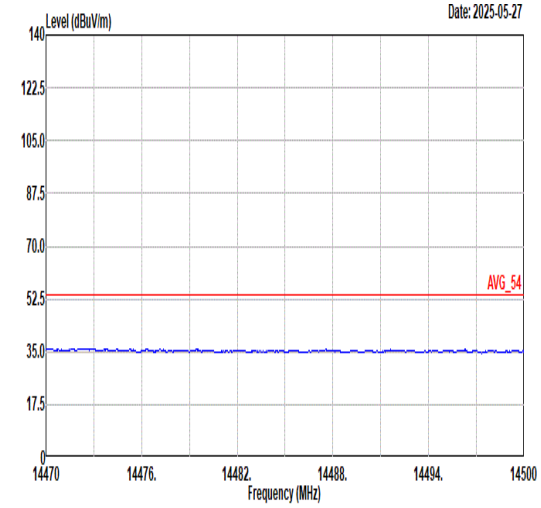 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	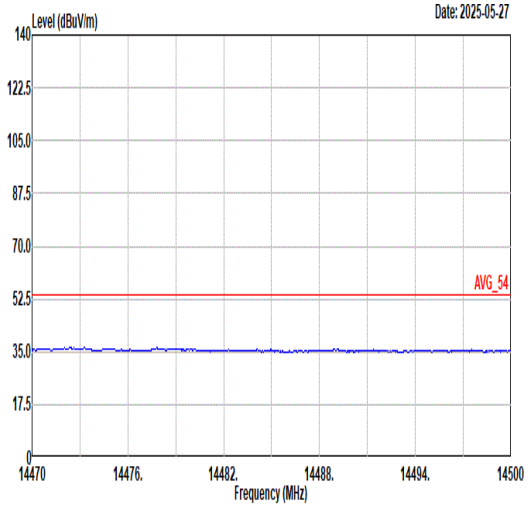 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	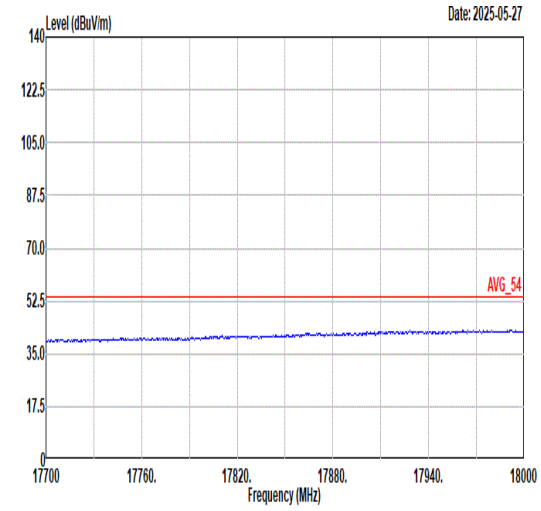 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	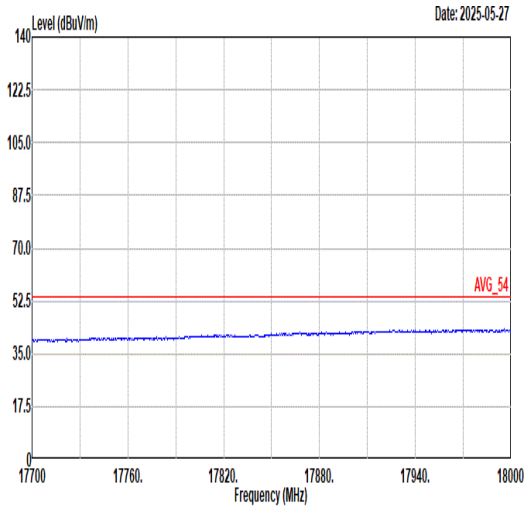 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	42	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	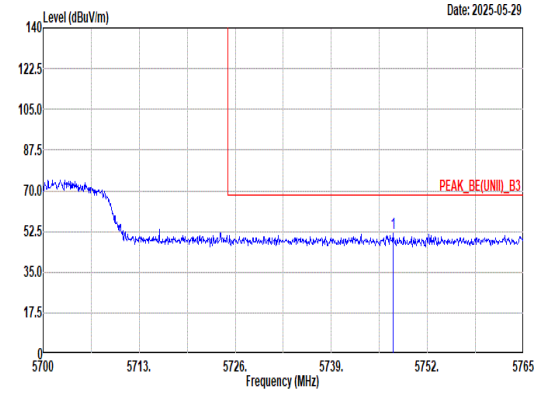 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5747.32 51.81 68.20 -16.39 40.97 33.49 10.17 32.82 0.00 299 254 PEAK	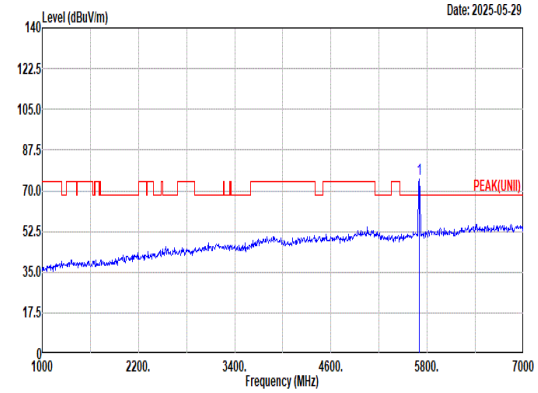 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 75.09 ------ ------ 64.27 33.38 10.25 32.81 0.00 299 254 PEAK
Avg	Blank	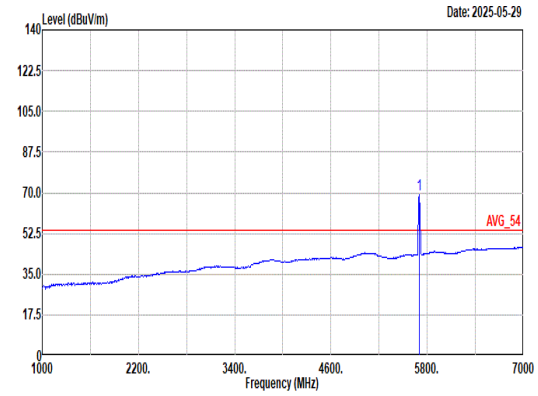 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 69.21 ------ ------ 58.39 33.38 10.25 32.81 0.00 299 254 AVERAGE

Mode	42	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	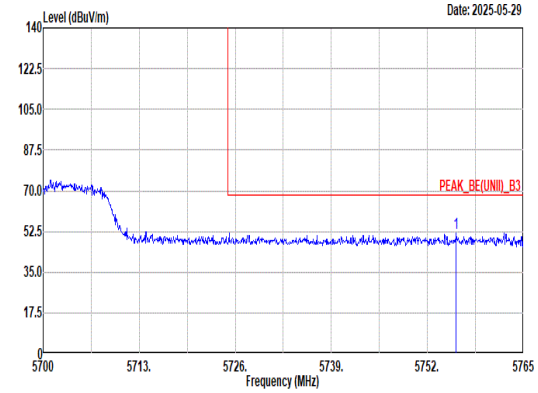 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.90 51.90 68.20 -16.30 41.06 33.52 10.15 32.83 0.00 316 260 PEAK	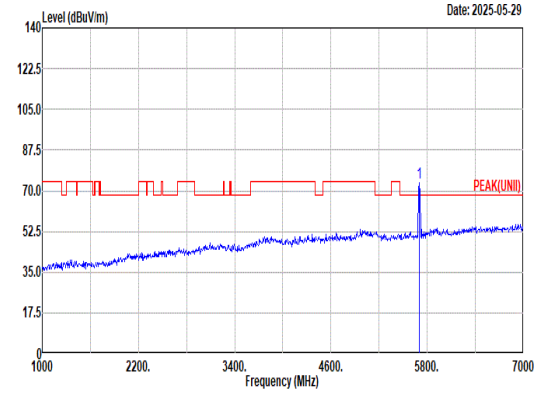 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 73.60 ------ ------ 62.76 33.41 10.24 32.81 0.00 316 260 PEAK
Avg	Blank	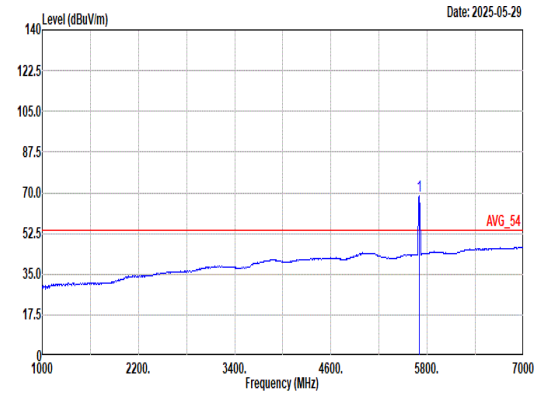 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 68.61 ------ ------ 57.79 33.38 10.25 32.81 0.00 316 260 AVERAGE

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	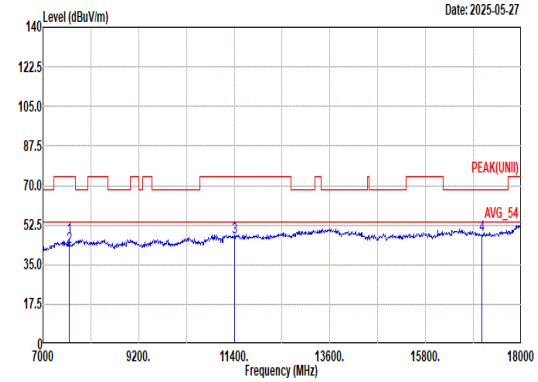 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 47.06 74.00 -26.94 62.13 36.10 14.08 66.04 0.79 100 232 PEAK 2 7600.00 42.84 54.00 -11.16 57.91 36.10 14.08 66.04 0.79 100 232 Average 3 11400.00 47.20 74.00 -26.80 56.66 39.00 17.40 66.22 0.36 -- -- PEAK 4 17100.00 48.18 68.20 -20.02 54.35 37.80 21.49 65.88 0.42 -- -- PEAK	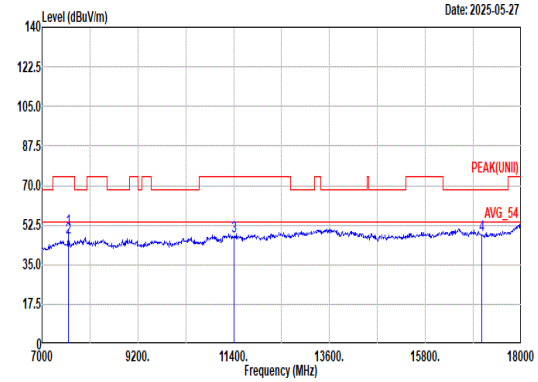 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 50.51 74.00 -23.49 65.58 36.10 14.08 66.04 0.79 311 360 PEAK 2 7600.00 47.11 54.00 -6.89 62.18 36.10 14.08 66.04 0.79 311 360 Average 3 11400.00 47.59 74.00 -26.41 57.05 39.00 17.40 66.22 0.36 -- -- PEAK 4 17100.00 48.21 68.20 -19.99 54.38 37.80 21.49 65.88 0.42 -- -- PEAK

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	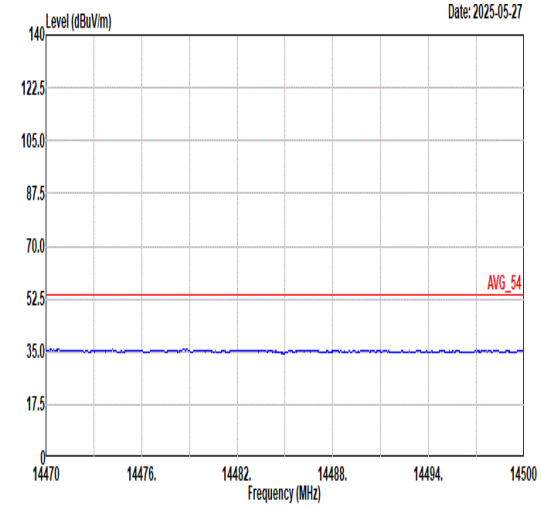 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	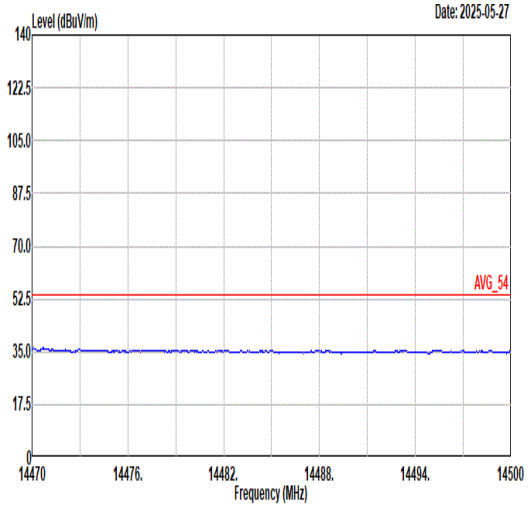 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	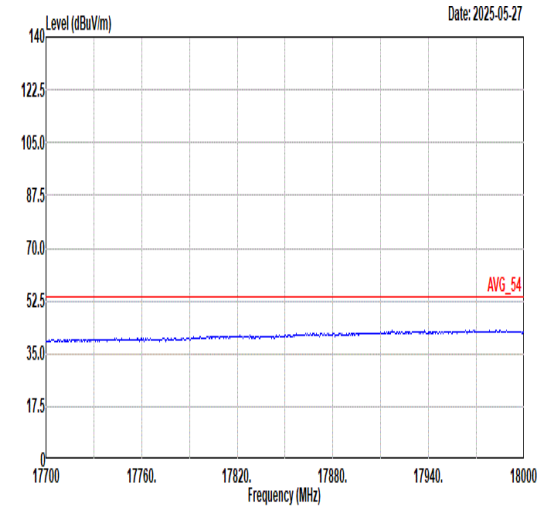 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	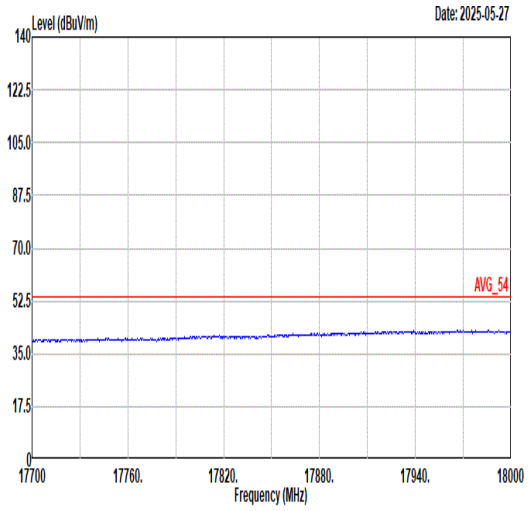 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	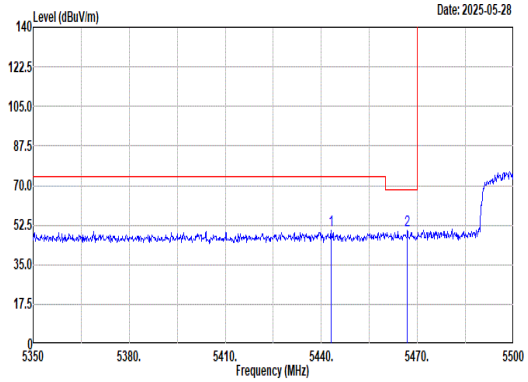 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.00 50.20 74.00 -23.80 40.32 32.80 9.82 32.74 0.00 300 280 PEAK 2 5466.85 50.09 68.20 -18.11 40.05 32.87 9.91 32.74 0.00 300 280 PEAK	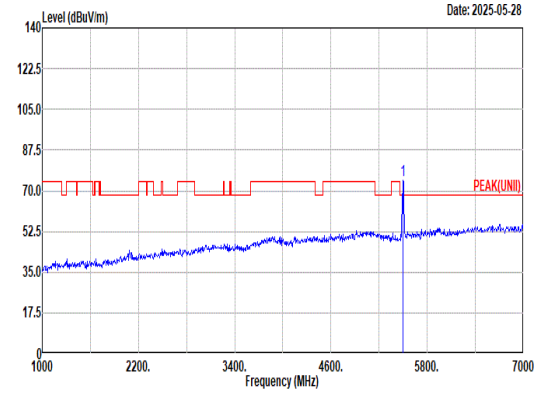 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 74.60 ------ ------ 64.29 33.00 10.04 32.73 0.00 300 280 PEAK
Avg	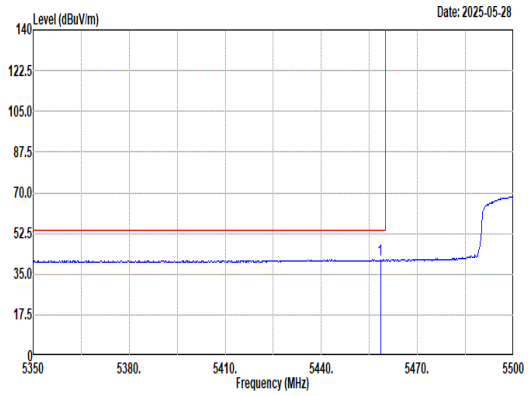 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.45 41.45 54.00 -12.55 31.48 32.83 9.88 32.74 0.00 300 280 AVERAGE	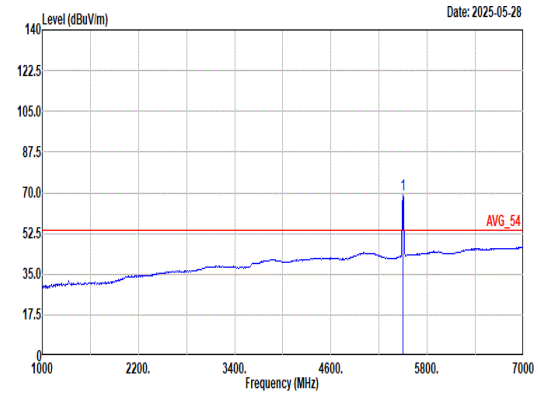 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 69.13 ------ ------ 58.82 33.00 10.04 32.73 0.00 300 280 AVERAGE

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	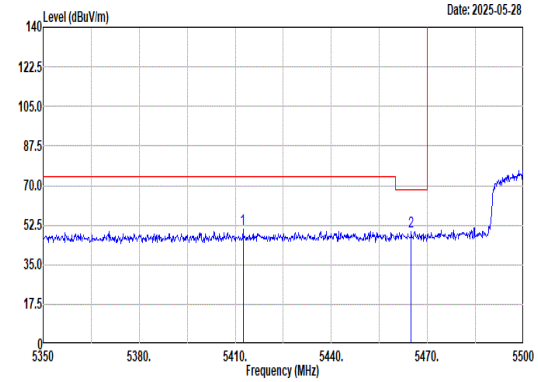 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5412.40 50.92 74.00 -23.08 41.16 32.80 9.71 32.75 0.00 400 305 PEAK 2 5464.90 49.51 68.20 -18.69 39.48 32.86 9.91 32.74 0.00 400 305 PEAK	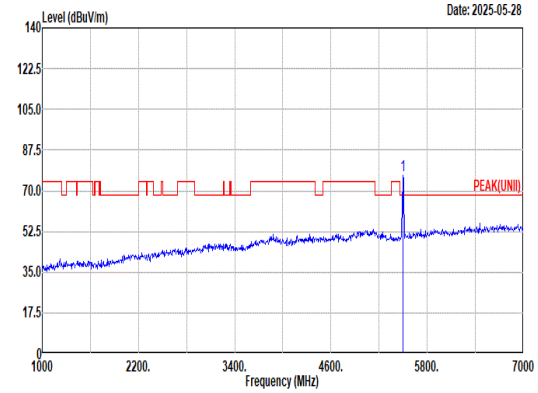 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5500.00 76.44 ------ ------ 66.13 33.00 10.04 32.73 0.00 400 305 PEAK
Avg	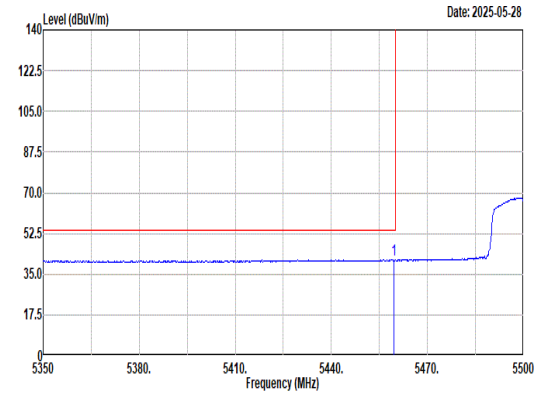 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5459.65 41.07 54.00 -12.93 31.08 32.84 9.89 32.74 0.00 400 305 AVERAGE	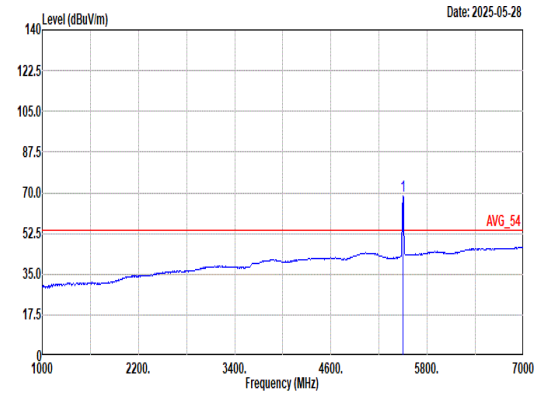 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5500.00 68.88 ------ ------ 58.57 33.00 10.04 32.73 0.00 400 305 AVERAGE

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	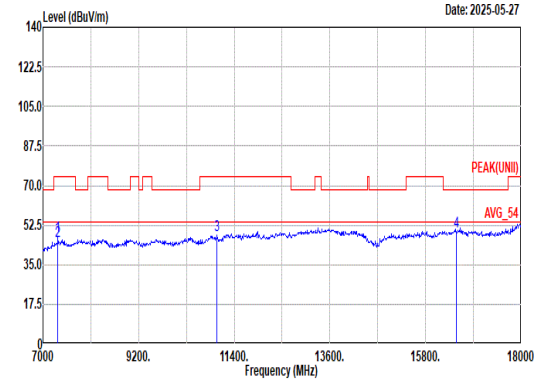 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 47.43 74.00 -26.57 62.03 36.73 13.75 65.80 0.72 150 232 PEAK 2 7333.33 45.20 54.00 -8.80 59.80 36.73 13.75 65.80 0.72 150 232 Average 3 11000.00 47.83 74.00 -26.17 58.45 38.70 17.04 66.70 0.34 -- -- PEAK 4 16500.00 49.78 68.20 -18.42 56.70 38.40 21.31 67.00 0.37 -- -- PEAK	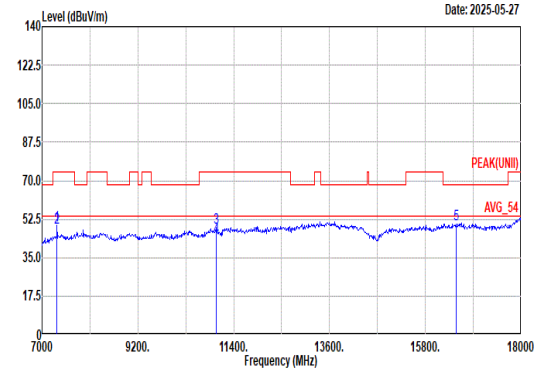 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 49.83 74.00 -24.17 64.43 36.73 13.75 65.80 0.72 250 310 PEAK 2 7333.33 48.69 54.00 -5.31 63.29 36.73 13.75 65.80 0.72 250 310 Average 3 11000.00 48.79 74.00 -25.21 59.41 38.70 17.04 66.70 0.34 400 137 PEAK 4 11000.00 44.19 54.00 -9.81 54.81 38.70 17.04 66.70 0.34 400 137 Average 5 16500.00 50.19 68.20 -18.01 57.11 38.40 21.31 67.00 0.37 -- -- PEAK

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	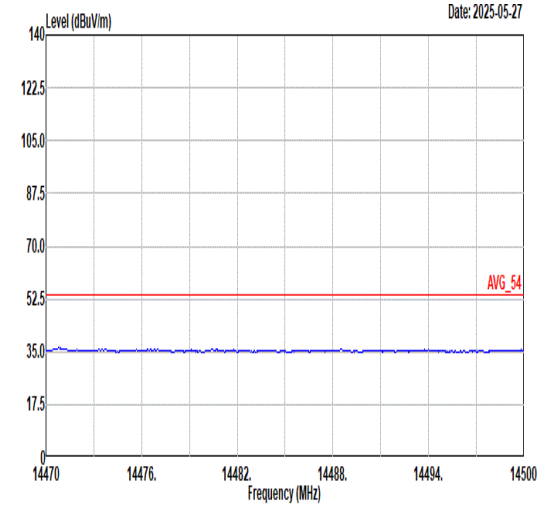 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	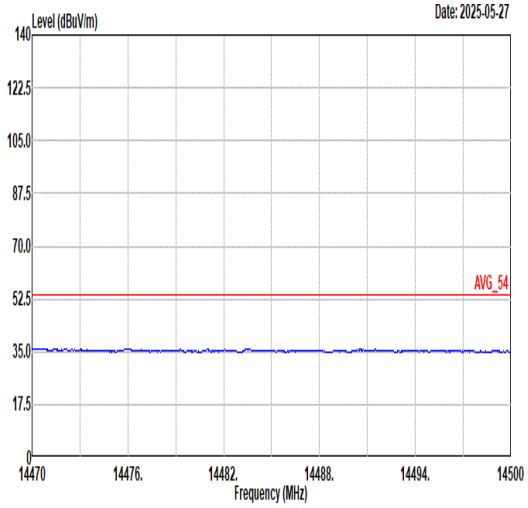 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	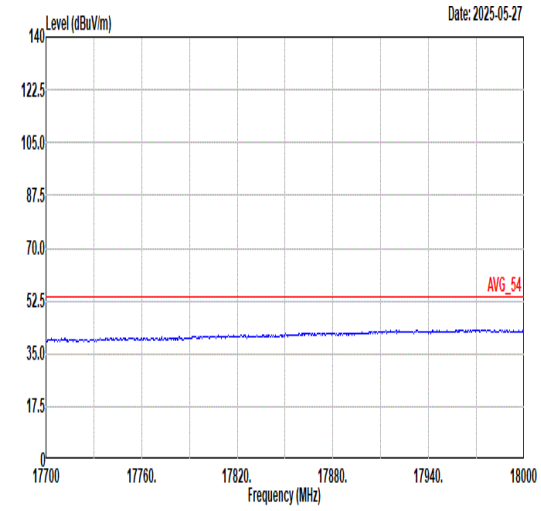 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	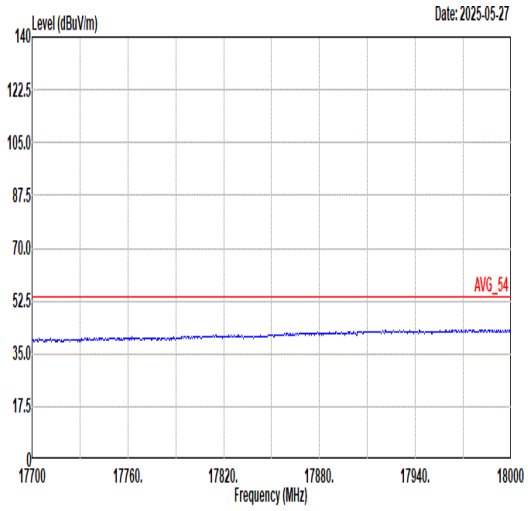 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	44
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz
ANT	1

Pol.	Horizontal	Fundamental
Peak	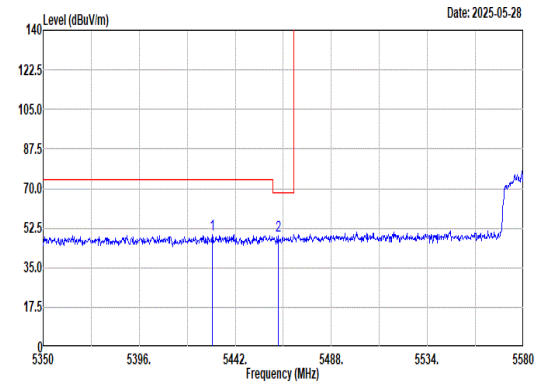 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5430.96 49.42 74.00 -24.58 39.59 32.80 9.78 32.75 0.00 295 279 PEAK 2 5462.47 49.12 68.20 -19.08 39.11 32.85 9.90 32.74 0.00 295 279 PEAK	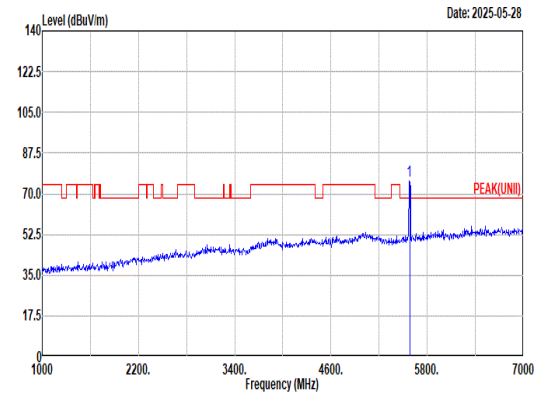 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 75.45 ------ ------ 65.07 32.80 10.34 32.76 0.00 295 279 PEAK
Avg	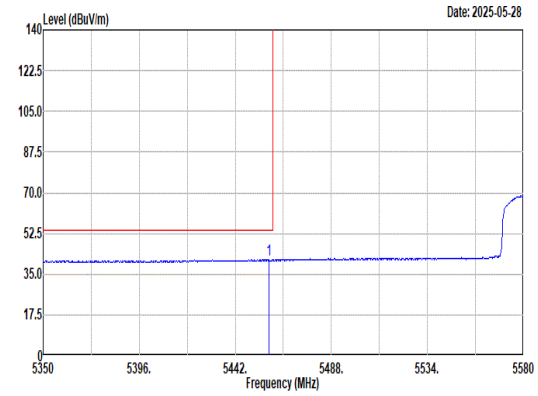 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.10 41.17 54.00 -12.83 31.20 32.83 9.88 32.74 0.00 295 279 AVERAGE	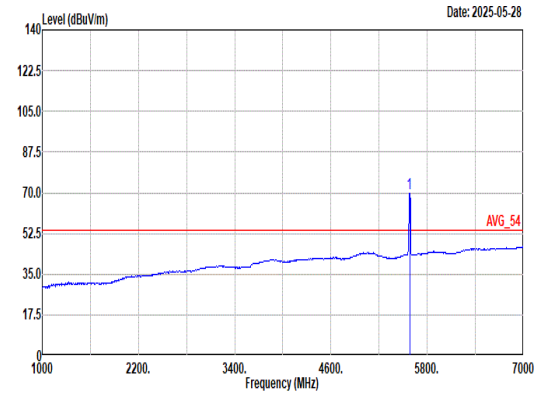 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 69.80 ------ ------ 59.42 32.80 10.34 32.76 0.00 295 279 AVERAGE

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	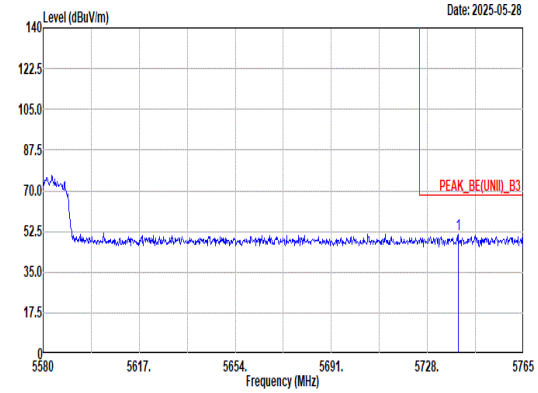 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5739.84 51.06 68.20 -17.14 40.22 33.48 10.18 32.82 0.00 295 279 PEAK	Blank

Mode	44	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	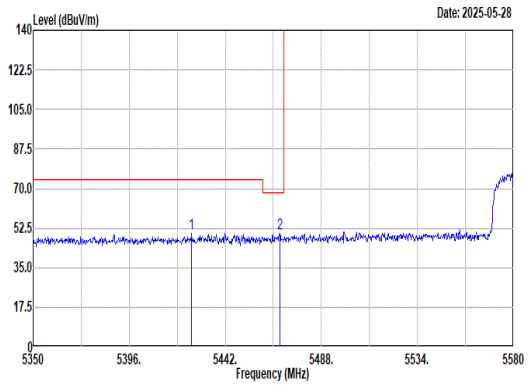 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5425.90 49.97 74.00 -24.03 40.16 32.80 9.76 32.75 0.00 370 318 PEAK 2 5467.99 50.06 68.20 -18.14 40.01 32.87 9.92 32.74 0.00 370 318 PEAK	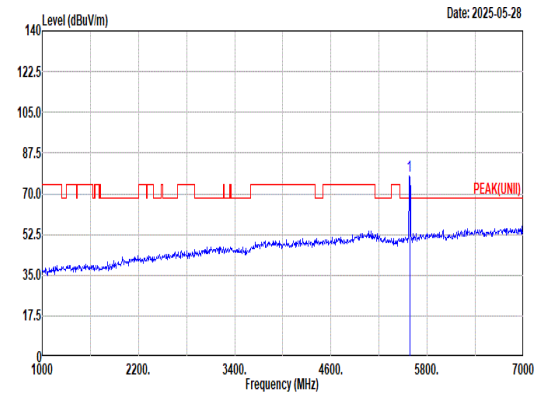 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 77.74 ------ ------ 67.36 32.80 10.34 32.76 0.00 370 318 PEAK
Avg	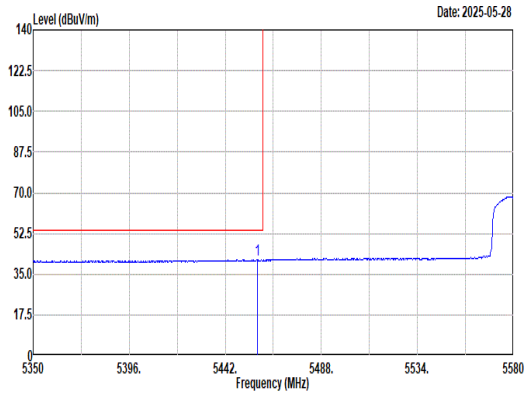 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.41 41.19 54.00 -12.81 31.22 32.83 9.88 32.74 0.00 370 318 AVERAGE	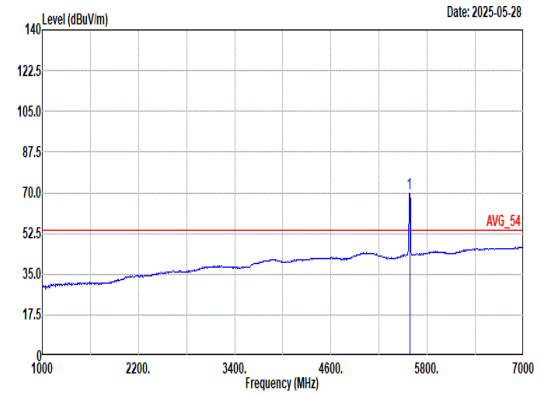 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 69.73 ------ ------ 59.35 32.80 10.34 32.76 0.00 370 318 AVERAGE

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	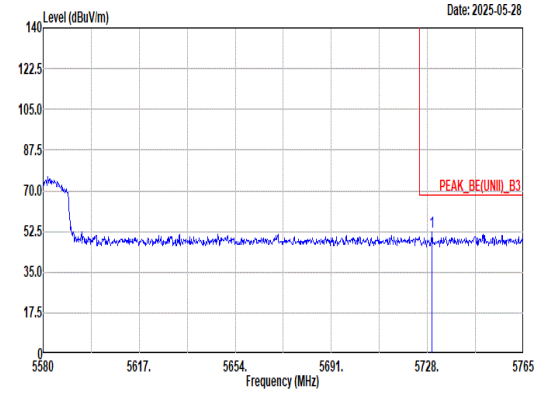 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.85 52.09 68.20 -16.11 41.25 33.46 10.20 32.82 0.00 370 318 PEAK	Blank

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	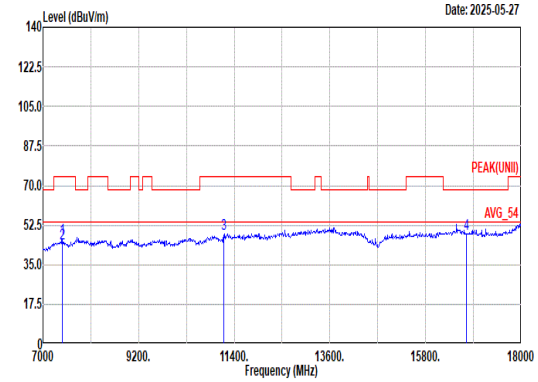 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 46.52 74.00 -27.48 61.66 36.24 13.86 65.93 0.69 150 232 PEAK 2 7440.00 44.16 54.00 -9.84 59.30 36.24 13.86 65.93 0.69 150 232 Average 3 11160.00 48.66 74.00 -25.34 59.02 38.62 17.18 66.51 0.35 -- -- PEAK 4 16740.00 48.75 68.20 -19.45 55.57 37.84 21.37 66.42 0.39 -- -- PEAK	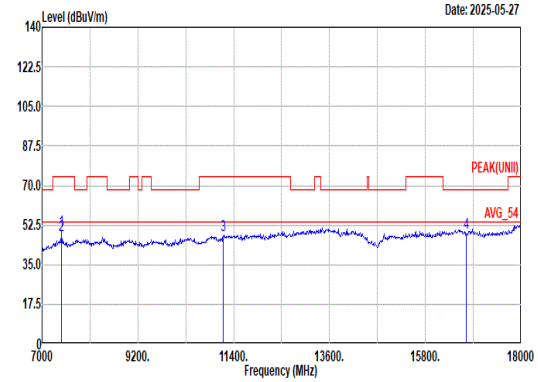 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 50.07 74.00 -23.93 65.21 36.24 13.86 65.93 0.69 250 315 PEAK 2 7440.00 47.98 54.00 -6.02 63.12 36.24 13.86 65.93 0.69 250 315 Average 3 11160.00 47.89 74.00 -26.11 58.25 38.62 17.18 66.51 0.35 -- -- PEAK 4 16740.00 49.08 68.20 -19.12 55.90 37.84 21.37 66.42 0.39 -- -- PEAK

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	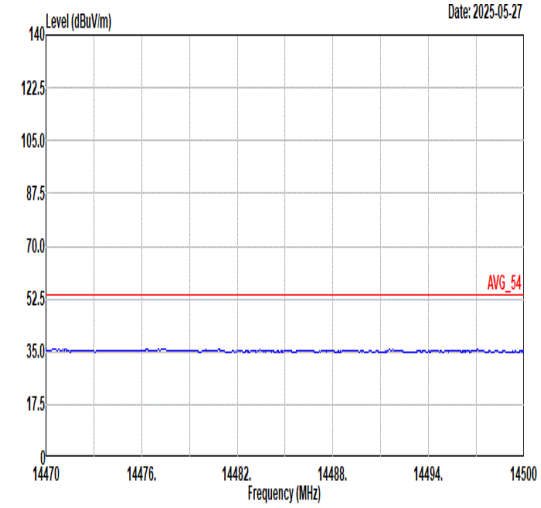 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	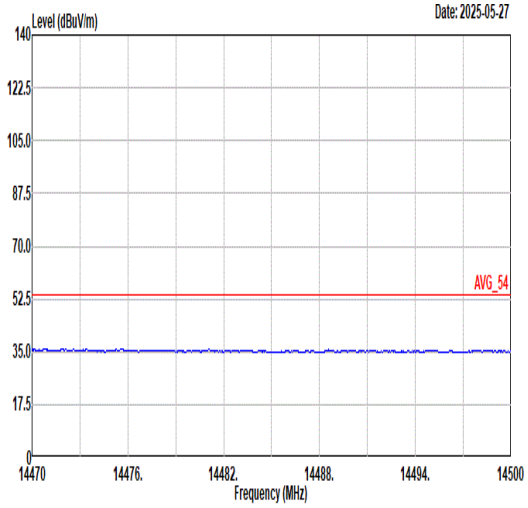 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	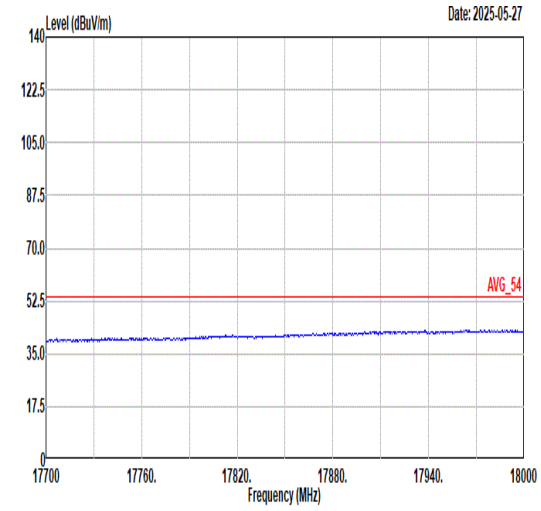 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	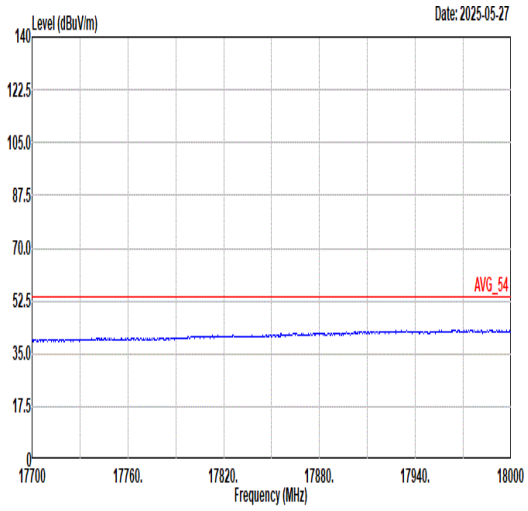 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	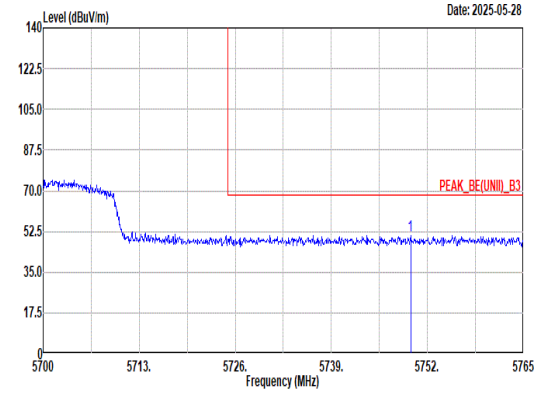 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5749.73 50.97 68.20 -17.23 40.12 33.50 10.17 32.82 0.00 299 253 PEAK	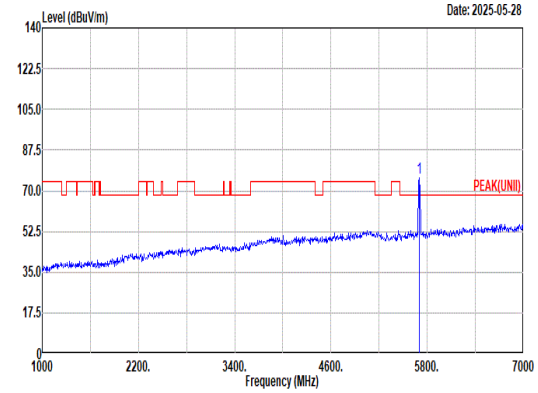 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 75.64 ------ ------ 64.82 33.38 10.25 32.81 0.00 299 253 PEAK
Avg	Blank	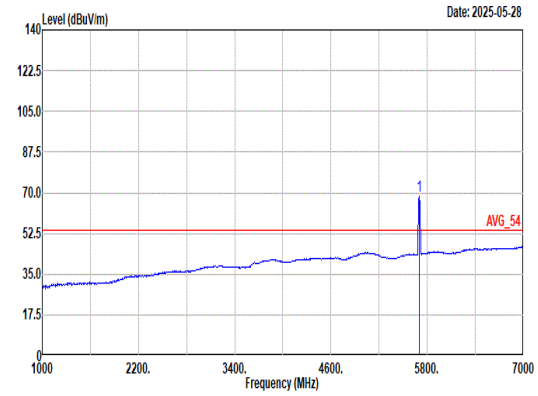 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 68.77 ------ ------ 57.95 33.38 10.25 32.81 0.00 299 253 AVERAGE

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	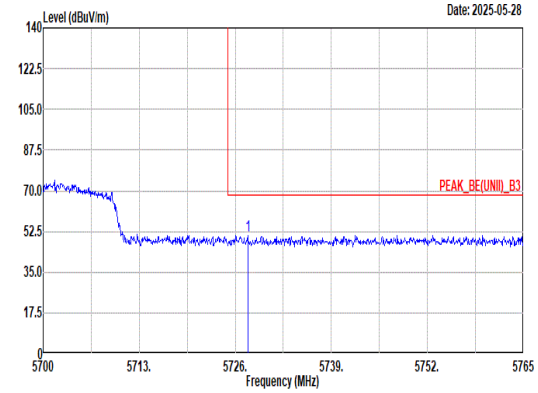 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.69 50.93 68.20 -17.27 40.09 33.46 10.20 32.82 0.00 400 287 PEAK	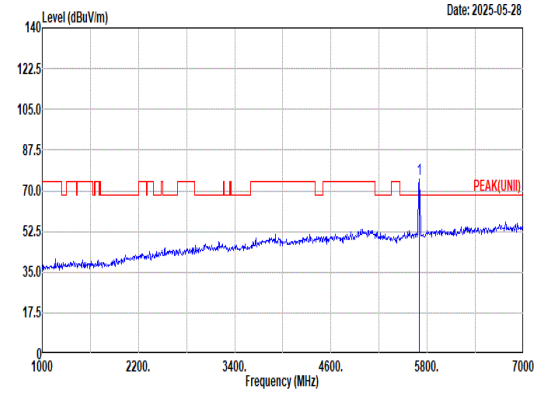 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 75.19 ------ ------ 64.37 33.38 10.25 32.81 0.00 400 287 PEAK
Avg	Blank	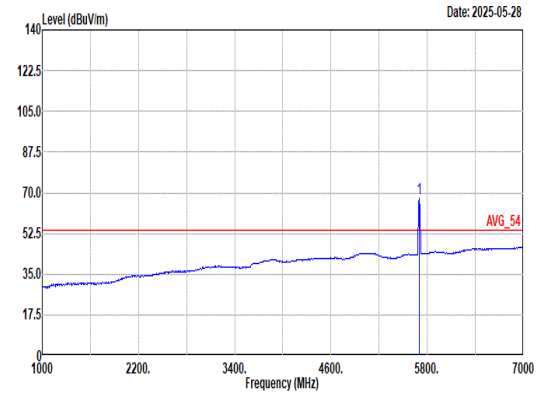 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 67.74 ------ ------ 56.90 33.41 10.24 32.81 0.00 400 287 AVERAGE

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	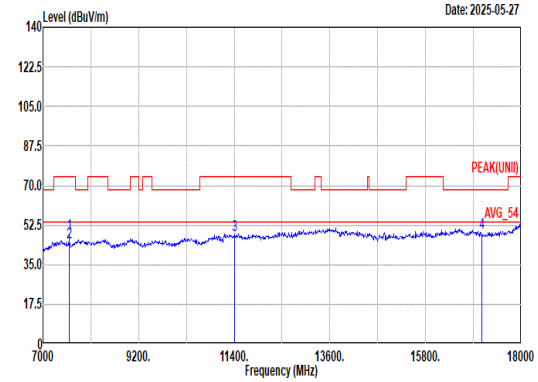 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 48.52 74.00 -25.48 63.59 36.10 14.08 66.04 0.79 144 250 PEAK 2 7600.00 44.99 54.00 -9.01 60.06 36.10 14.08 66.04 0.79 144 250 Average 3 11400.00 47.85 74.00 -26.15 57.31 39.00 17.40 66.22 0.36 -- -- PEAK 4 17100.00 49.07 68.20 -19.13 55.24 37.80 21.49 65.88 0.42 -- -- PEAK	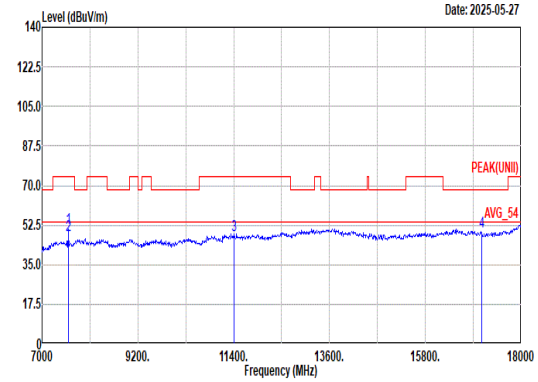 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 51.44 74.00 -22.56 66.51 36.10 14.08 66.04 0.79 311 360 PEAK 2 7600.00 47.90 54.00 -6.10 62.97 36.10 14.08 66.04 0.79 311 360 Average 3 11400.00 47.90 74.00 -26.10 57.36 39.00 17.40 66.22 0.36 -- -- PEAK 4 17100.00 49.53 68.20 -18.67 55.70 37.80 21.49 65.88 0.42 -- -- PEAK

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	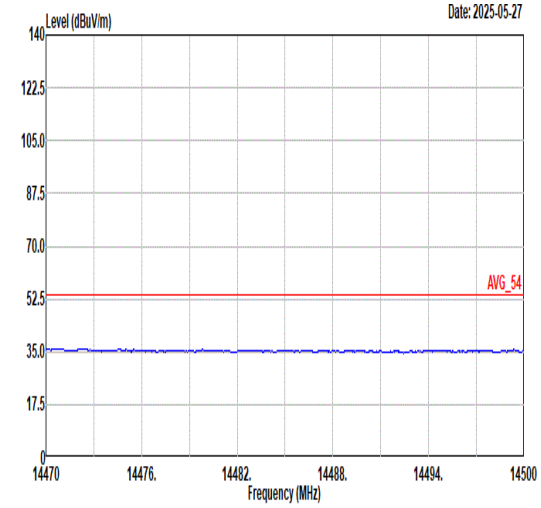 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	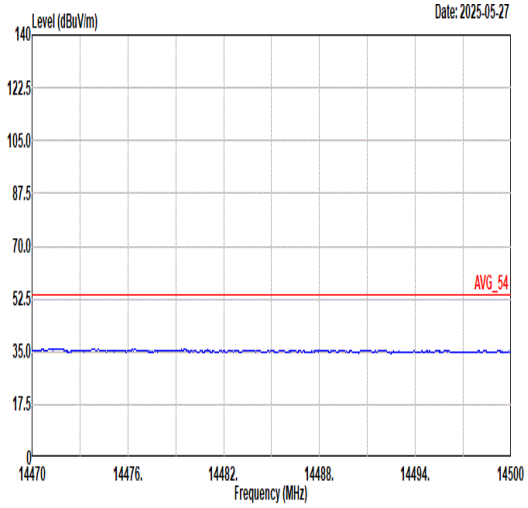 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	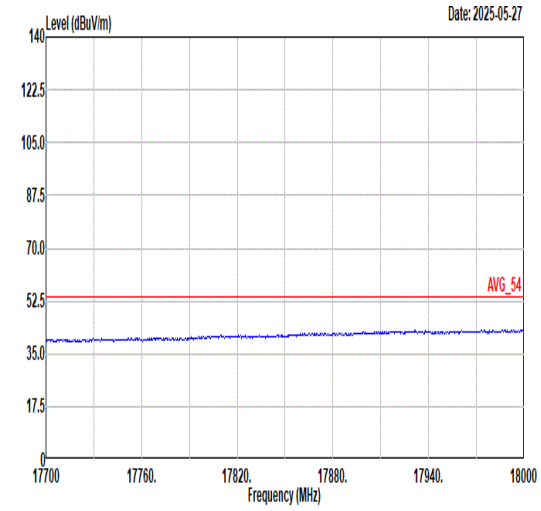 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	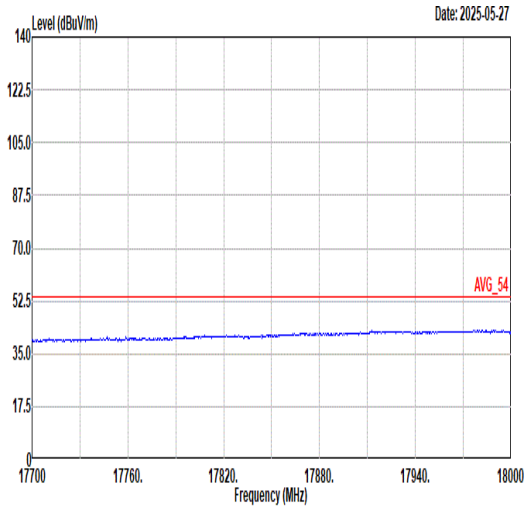 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	46	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	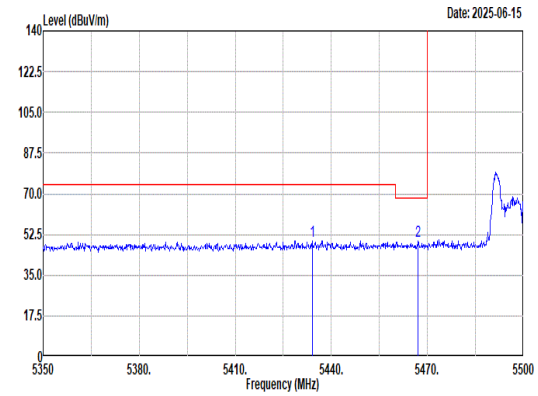 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5434.00 49.87 74.00 -24.13 40.02 32.80 9.79 32.74 0.00 162 106 Peak 2 5467.15 49.60 68.20 -18.60 39.55 32.87 9.92 32.74 0.00 162 106 Peak	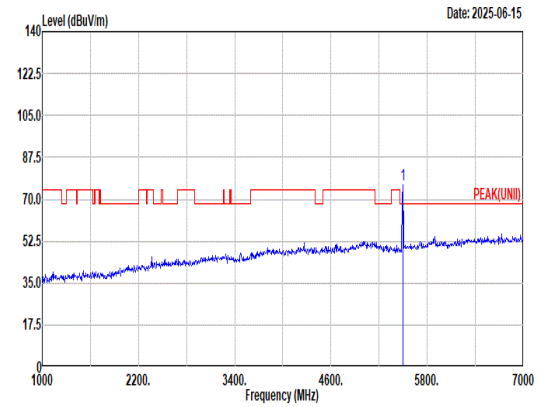 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 76.15 ------ ------ 65.88 32.98 10.02 32.73 0.00 162 106 Peak
Avg	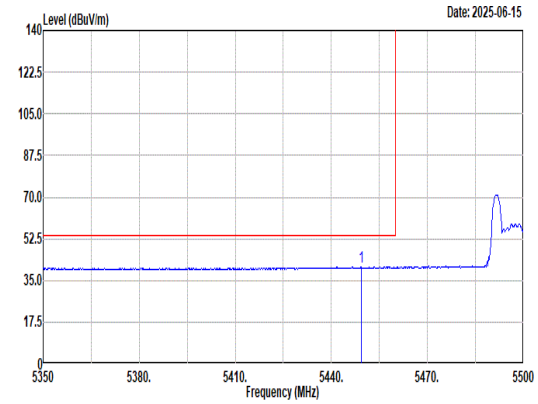 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5449.30 40.83 54.00 -13.17 30.92 32.80 9.85 32.74 0.00 162 106 Average	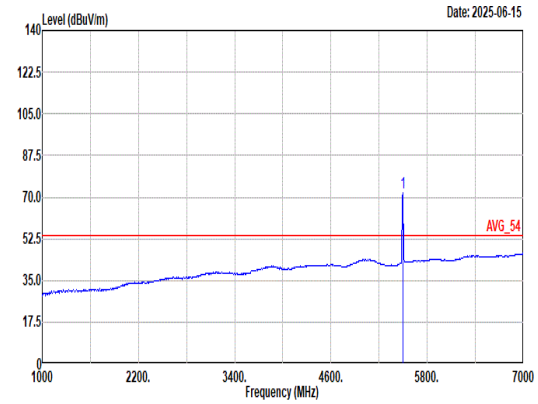 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 71.67 ------ ------ 61.40 32.98 10.02 32.73 0.00 162 106 Average

Mode	46	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	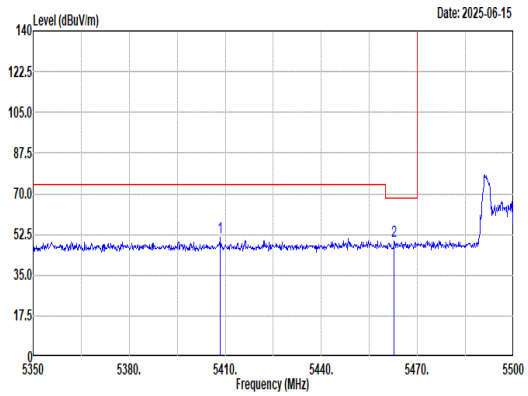 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5408.50 51.13 74.00 -22.87 41.39 32.80 9.69 32.75 0.00 349 125 Peak 2 5462.80 49.83 68.20 -18.37 39.82 32.85 9.90 32.74 0.00 349 125 Peak	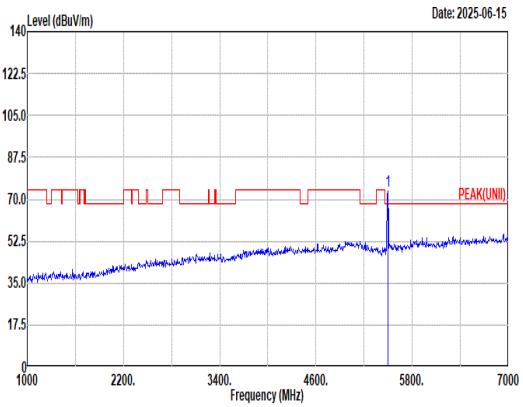 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 73.42 ------ ------ 63.15 32.98 10.02 32.73 0.00 349 125 Peak
Avg	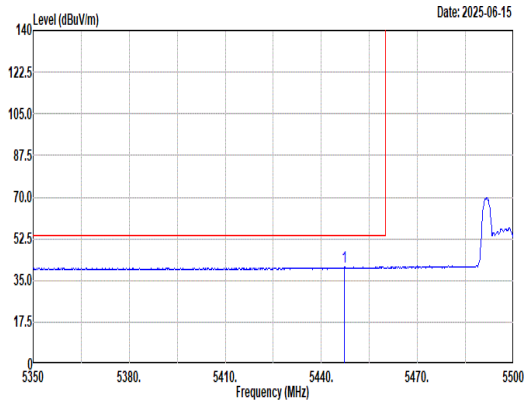 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5447.20 40.70 54.00 -13.30 30.80 32.80 9.84 32.74 0.00 349 125 Average	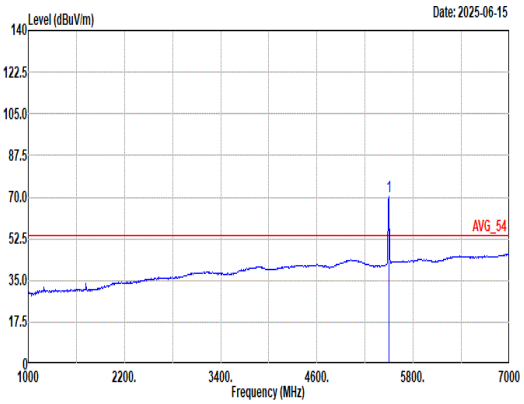 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 70.37 ------ ------ 60.10 32.98 10.02 32.73 0.00 349 125 Average

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	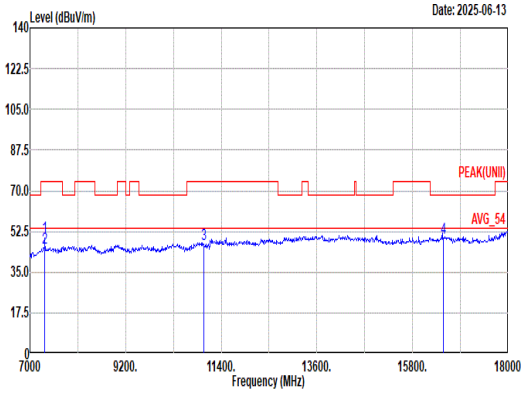 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL 1 7333.33 50.36 74.00 -23.64 64.96 36.73 13.75 65.80 0.72 100 244 Peak 2 7333.33 45.47 54.00 -8.53 60.07 36.73 13.75 65.80 0.72 100 244 Average 3 11000.00 47.14 74.00 -26.86 57.76 38.70 17.04 66.70 0.34 -- -- Peak 4 16500.00 49.91 68.20 -18.29 56.83 38.40 21.31 67.00 0.37 -- -- Peak	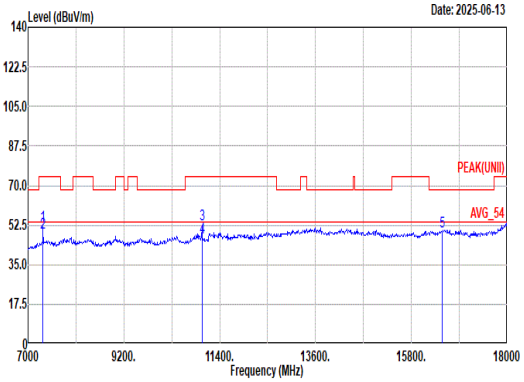 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL 1 7333.33 52.56 74.00 -21.44 67.16 36.73 13.75 65.80 0.72 258 269 Peak 2 7333.33 49.31 54.00 -4.69 63.91 36.73 13.75 65.80 0.72 258 269 Average 3 11000.00 53.08 74.00 -20.92 63.70 38.70 17.04 66.70 0.34 138 63 Peak 4 11000.00 46.93 54.00 -7.07 57.55 38.70 17.04 66.70 0.34 138 63 Average 5 16500.00 49.79 68.20 -18.41 56.71 38.40 21.31 67.00 0.37 -- -- Peak

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	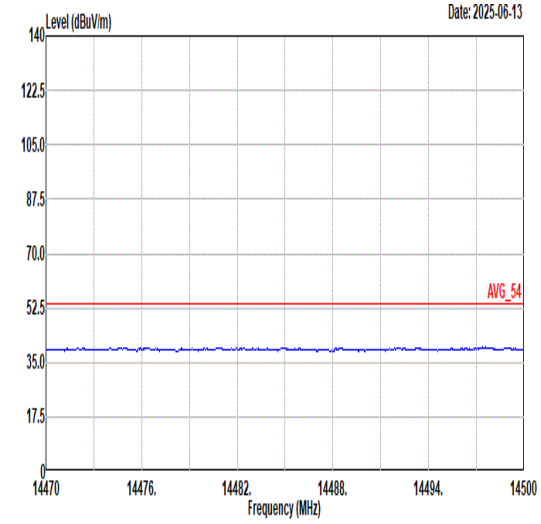 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	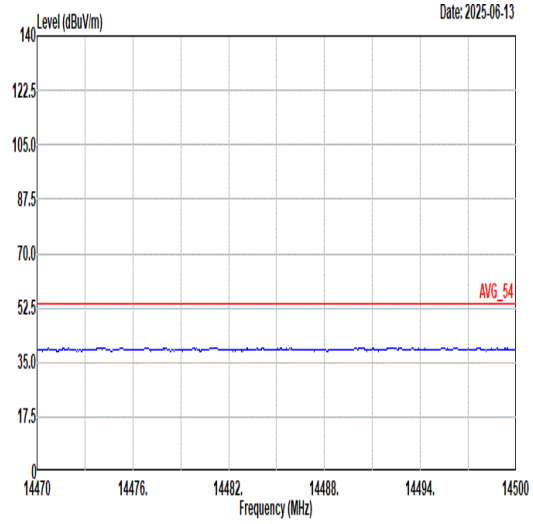 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	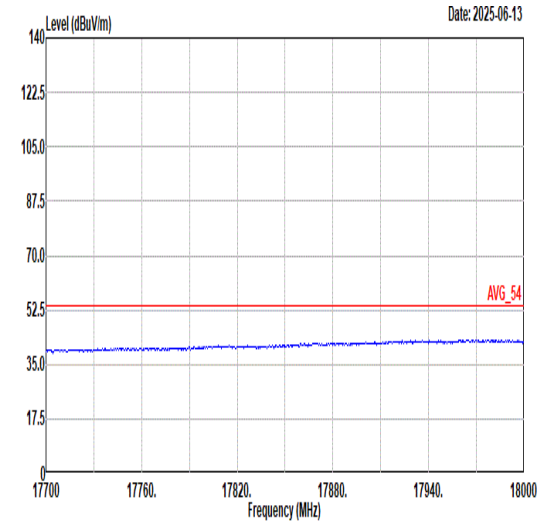 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	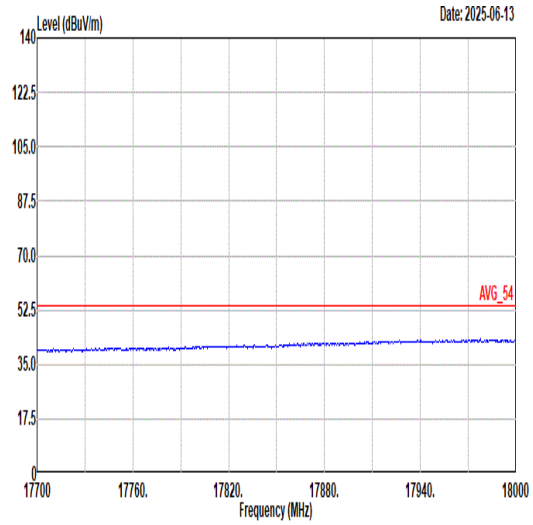 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	47	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	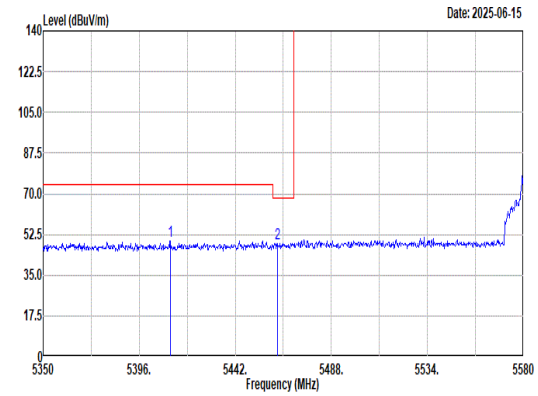 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5410.95 49.90 74.00 -24.10 40.15 32.80 9.70 32.75 0.00 114 99 Peak 2 5462.24 48.77 68.20 -19.43 38.76 32.85 9.90 32.74 0.00 114 99 Peak	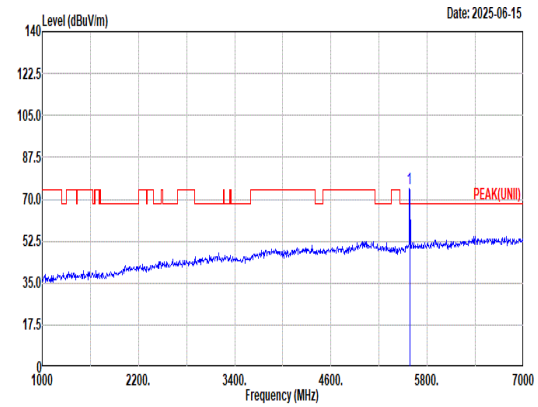 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 74.73 ------ ------ 64.35 32.80 10.34 32.76 0.00 114 99 Peak
Avg	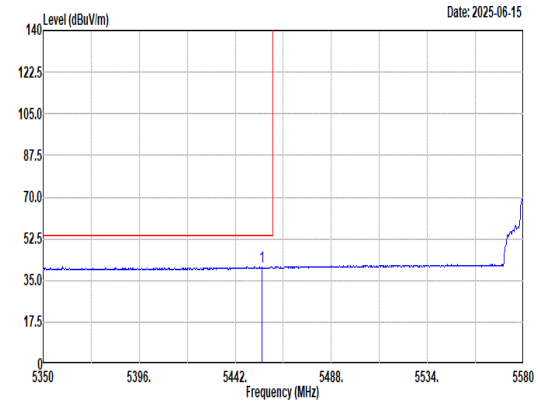 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.65 40.90 54.00 -13.10 30.95 32.82 9.87 32.74 0.00 114 99 Average	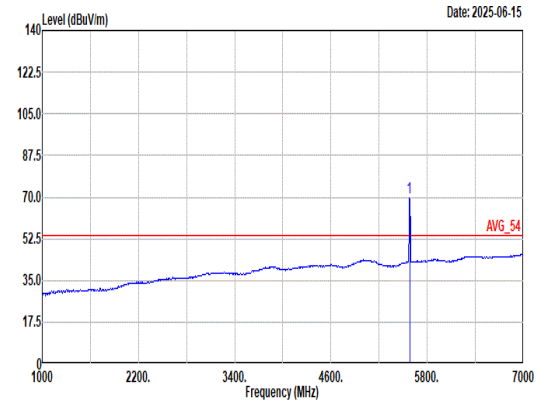 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 69.84 ------ ------ 59.46 32.80 10.34 32.76 0.00 114 99 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	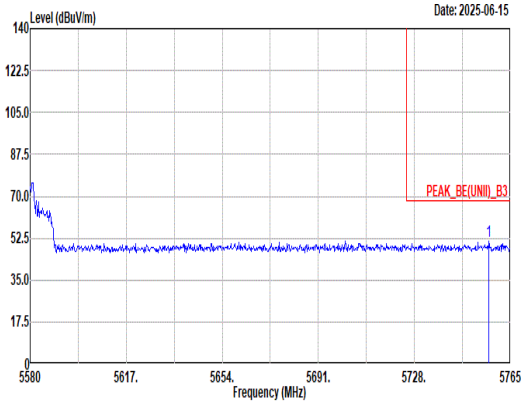 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5756.68 51.21 68.20 -16.99 40.36 33.53 10.15 32.83 0.00 114 99 Peak	Blank

Mode	47	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	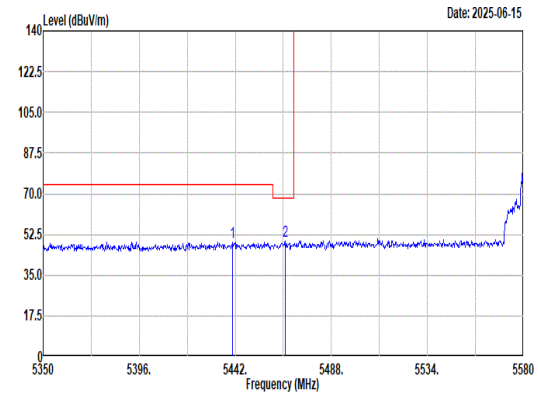 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5440.62 49.30 74.00 -24.70 39.43 32.80 9.81 32.74 0.00 374 147 Peak 2 5465.92 49.43 68.20 -18.77 39.40 32.86 9.91 32.74 0.00 374 147 Peak	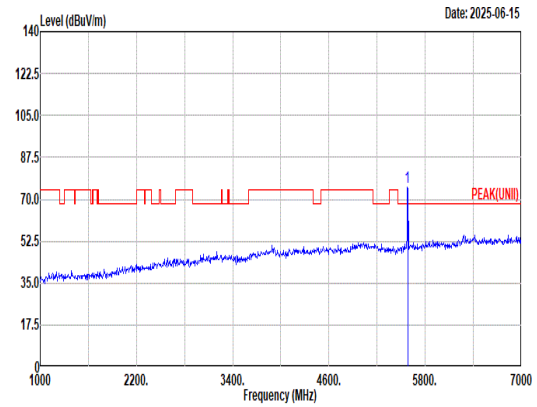 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 74.91 ------ ------ 64.53 32.80 10.34 32.76 0.00 374 147 Peak
Avg	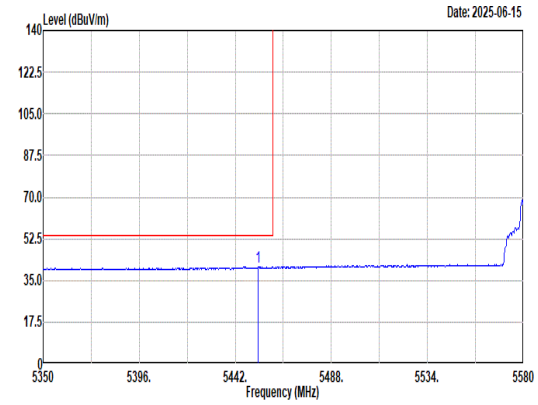 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5453.04 40.64 54.00 -13.36 30.71 32.81 9.86 32.74 0.00 374 147 Average	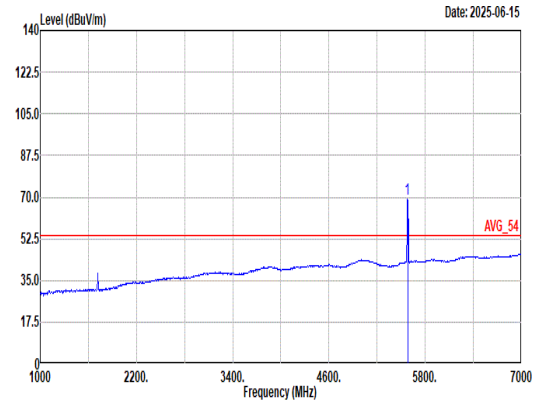 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 69.19 ------ ------ 58.81 32.80 10.34 32.76 0.00 374 147 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	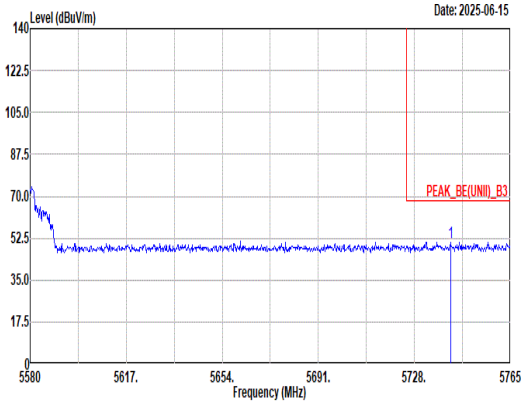 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.88 50.85 68.20 -17.35 40.01 33.48 10.18 32.82 0.00 374 147 Peak	Blank

Mode	47	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	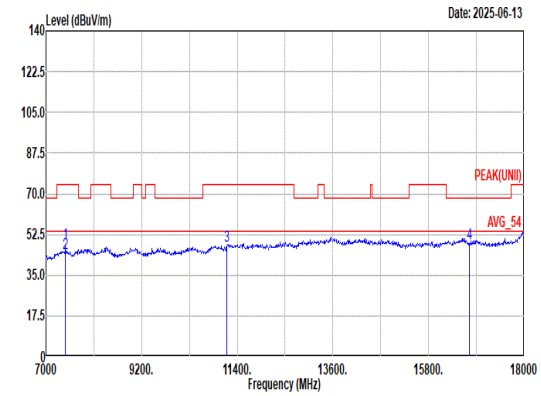 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 48.62 74.00 -25.38 63.76 36.24 13.86 65.93 0.69 133 253 Peak 2 7440.00 44.44 54.00 -9.56 59.58 36.24 13.86 65.93 0.69 133 253 Average 3 11160.00 47.67 74.00 -26.33 58.03 38.62 17.18 66.51 0.35 -- -- Peak 4 16740.00 48.61 68.20 -19.59 55.43 37.84 21.37 66.42 0.39 -- -- Peak	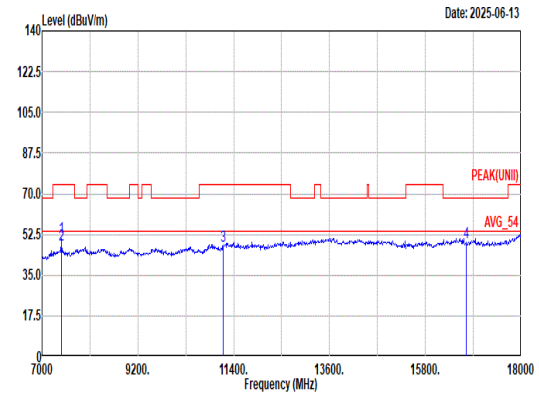 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 51.40 74.00 -22.60 66.54 36.24 13.86 65.93 0.69 273 305 Peak 2 7440.00 48.04 54.00 -5.96 63.18 36.24 13.86 65.93 0.69 273 305 Average 3 11160.00 47.61 74.00 -26.39 57.97 38.62 17.18 66.51 0.35 -- -- Peak 4 16740.00 48.98 68.20 -19.22 55.80 37.84 21.37 66.42 0.39 -- -- Peak

Mode	47	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_26/4 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	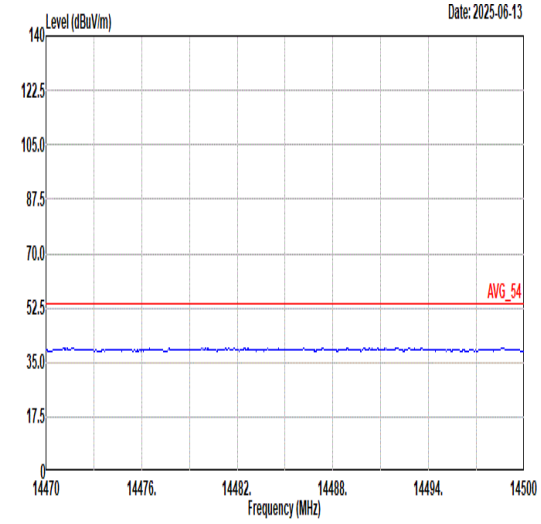 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	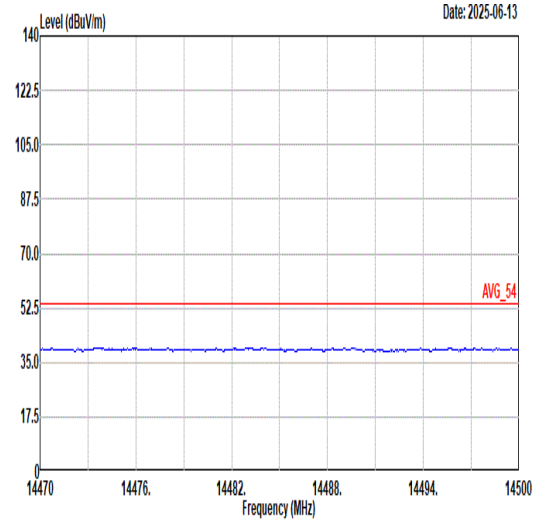 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	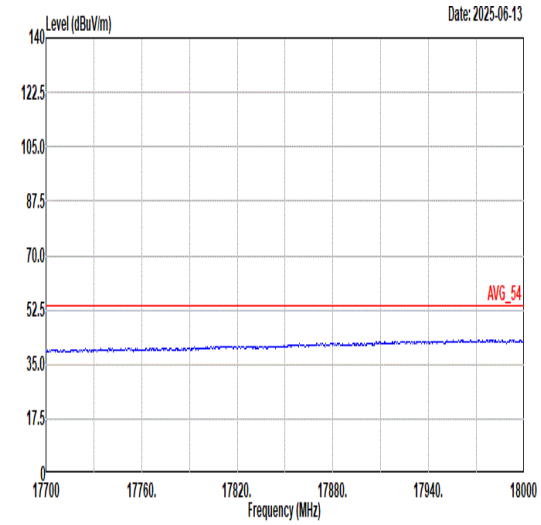 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	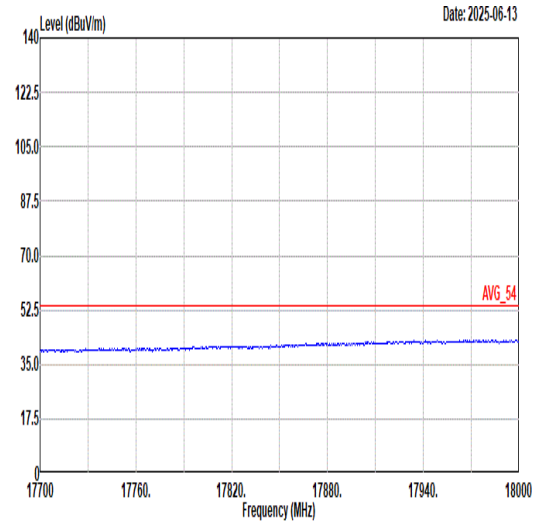 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	48	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	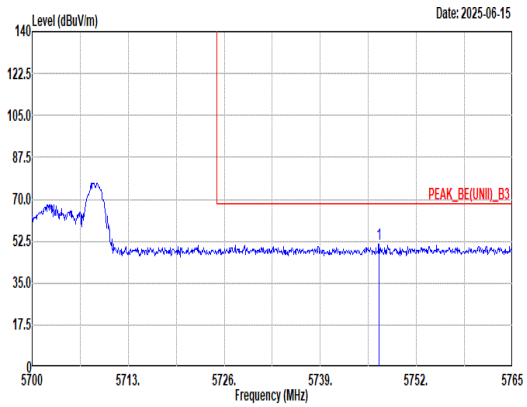 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5746.93 51.27 68.20 -16.93 40.43 33.49 10.17 32.82 0.00 102 106 Peak	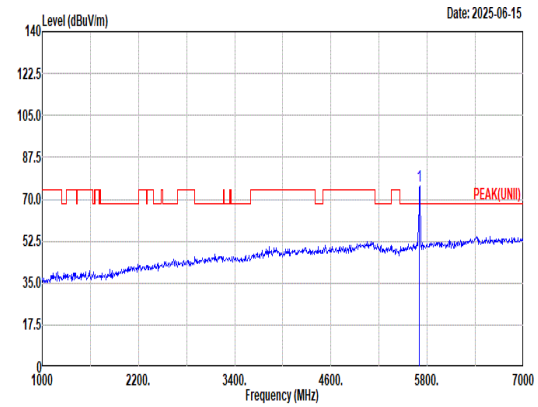 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 75.74 ------ ------ 64.90 33.42 10.23 32.81 0.00 102 106 Peak
Avg	Blank	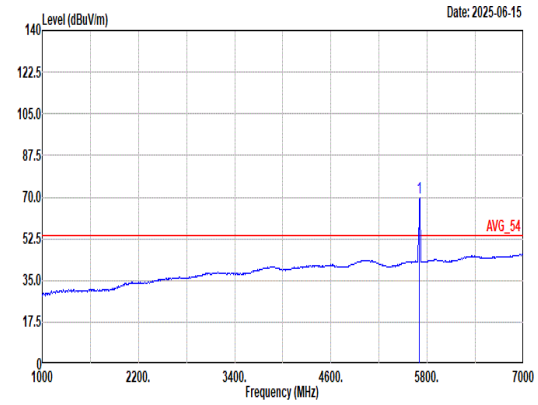 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 69.90 ------ ------ 59.06 33.42 10.23 32.81 0.00 102 106 Average

Mode	48	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	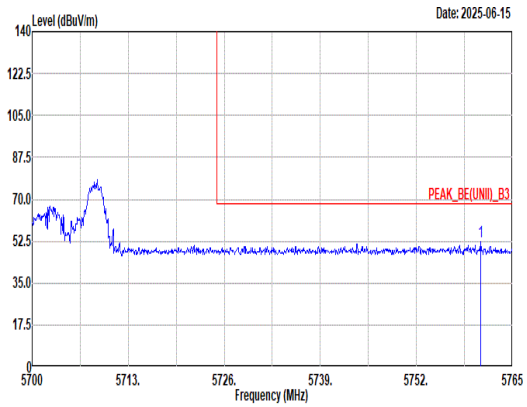 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.71 52.05 68.20 -16.15 41.19 33.54 10.15 32.83 0.00 378 120 Peak	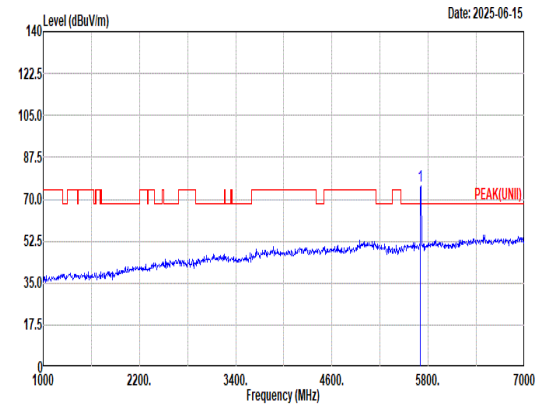 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 75.36 ------ ------ 64.52 33.42 10.23 32.81 0.00 378 120 Peak
Avg	Blank	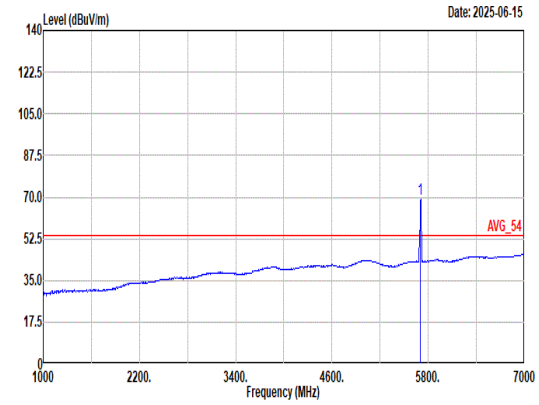 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 69.16 ------ ------ 58.32 33.42 10.23 32.81 0.00 378 120 Average

Mode	48	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	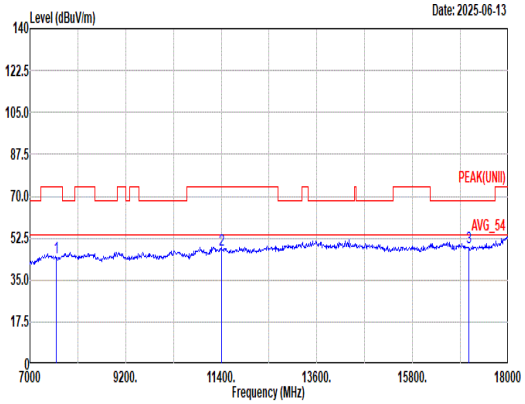 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 44.61 74.00 -29.39 59.68 36.10 14.08 66.04 0.79 -- -- Peak 2 11400.00 47.79 74.00 -26.21 57.25 39.00 17.40 66.22 0.36 -- -- Peak 3 17100.00 48.73 68.20 -19.47 54.90 37.80 21.49 65.88 0.42 -- -- Peak	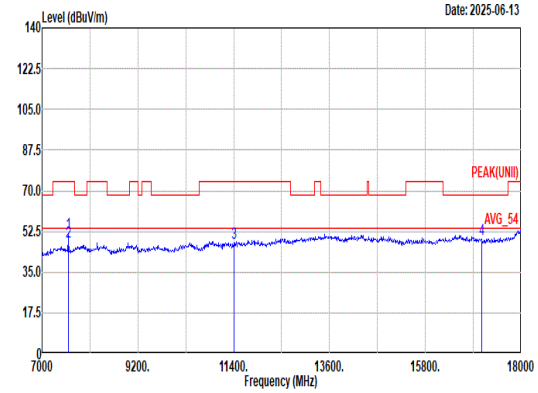 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 51.78 74.00 -22.22 66.85 36.10 14.08 66.04 0.79 241 147 Peak 2 7600.00 48.21 54.00 -5.79 63.28 36.10 14.08 66.04 0.79 241 147 Average 3 11400.00 47.32 74.00 -26.68 56.78 39.00 17.40 66.22 0.36 -- -- Peak 4 17100.00 49.09 68.20 -19.11 55.26 37.80 21.49 65.88 0.42 -- -- Peak

Mode	48	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	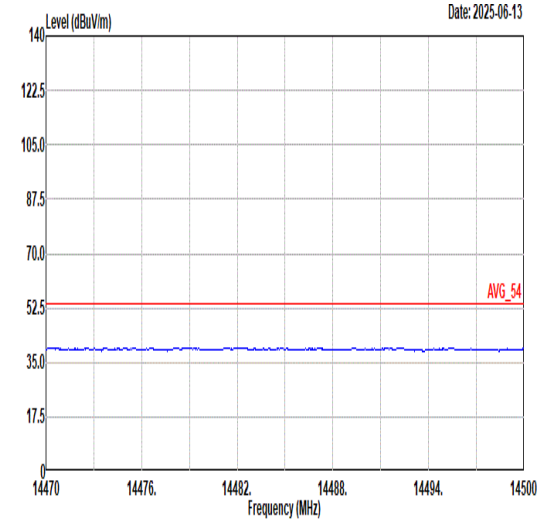 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	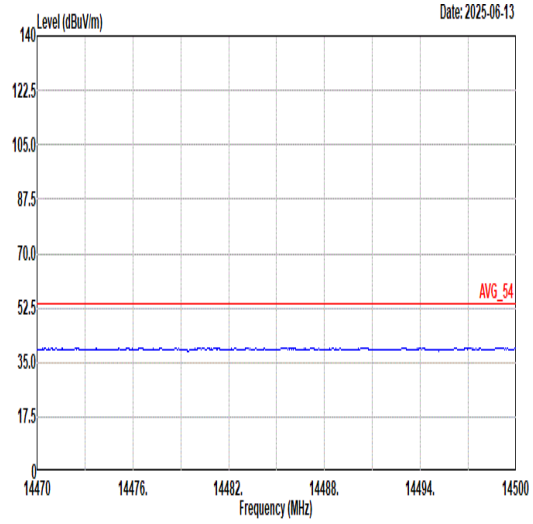 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	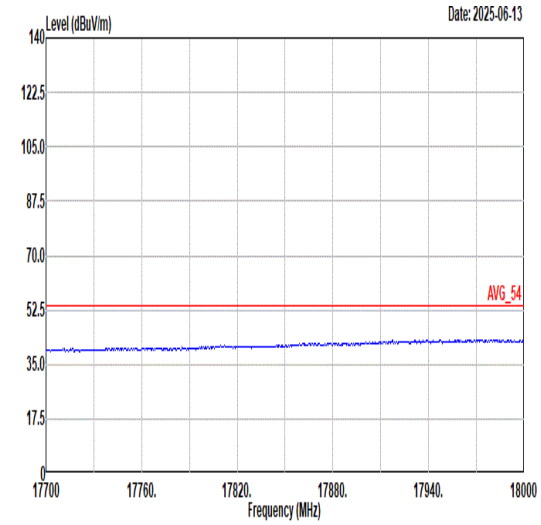 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	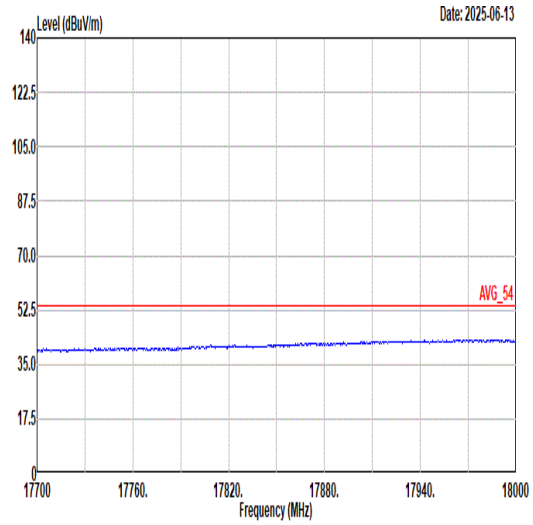 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	49	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	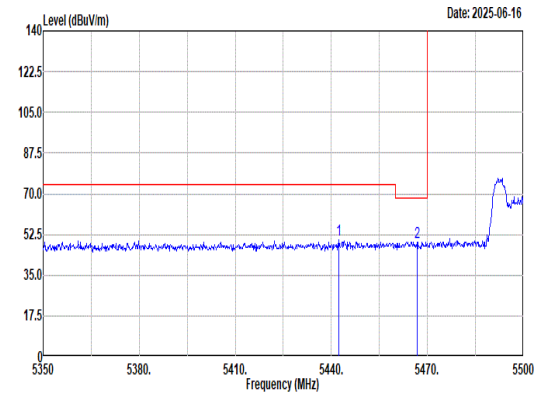 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5442.25 50.12 74.00 -23.88 40.24 32.80 9.82 32.74 0.00 162 95 Peak 2 5466.85 49.21 68.20 -18.99 39.17 32.87 9.91 32.74 0.00 162 95 Peak	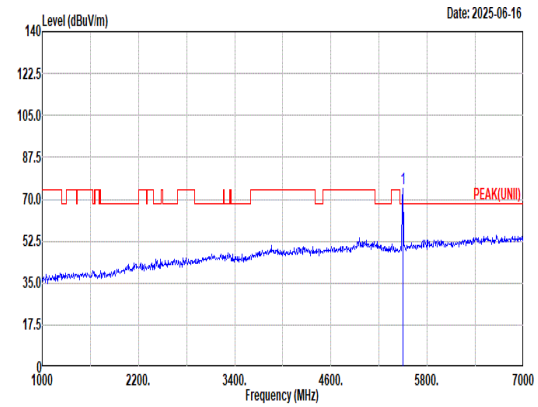 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 74.46 ------ ------ 64.19 32.98 10.02 32.73 0.00 162 95 Peak
Avg	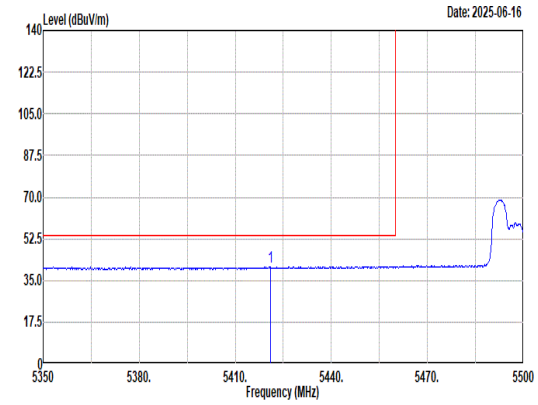 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5420.95 40.84 54.00 -13.16 31.05 32.80 9.74 32.75 0.00 162 95 Average	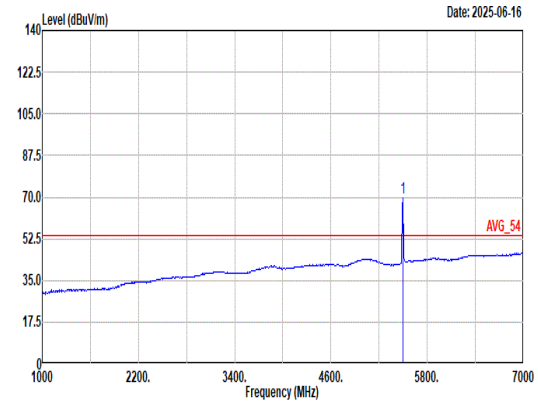 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 69.82 ------ ------ 59.55 32.98 10.02 32.73 0.00 162 95 Average

Mode	49	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	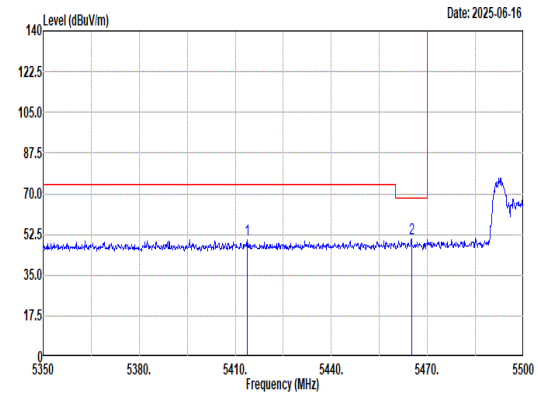 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5413.75 50.21 74.00 -23.79 40.45 32.80 9.71 32.75 0.00 349 121 Peak 2 5465.05 50.83 68.20 -17.37 40.80 32.86 9.91 32.74 0.00 349 121 Peak	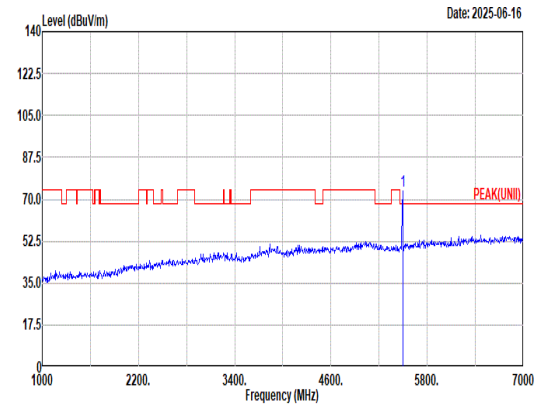 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 73.56 ------ ------ 63.29 32.98 10.02 32.73 0.00 349 121 Peak
Avg	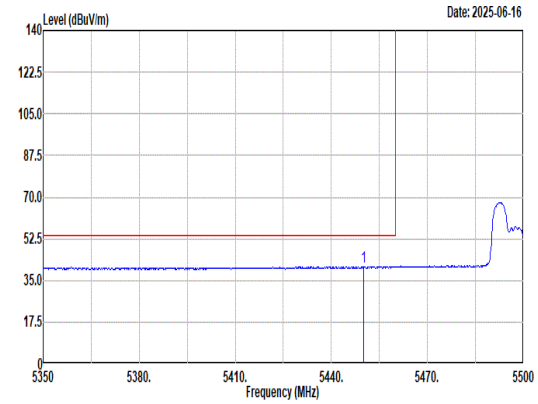 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5450.20 40.89 54.00 -13.11 30.98 32.80 9.85 32.74 0.00 349 121 Average	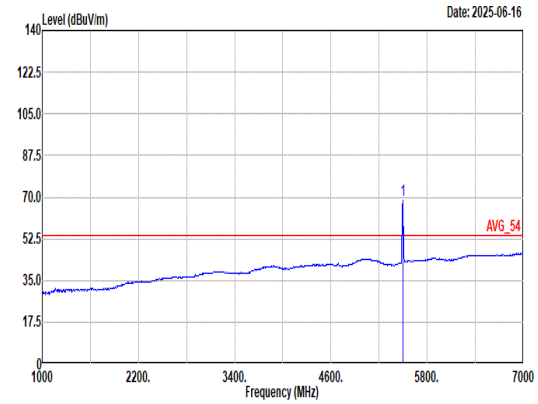 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 68.84 ------ ------ 58.57 32.98 10.02 32.73 0.00 349 121 Average

Mode	49	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	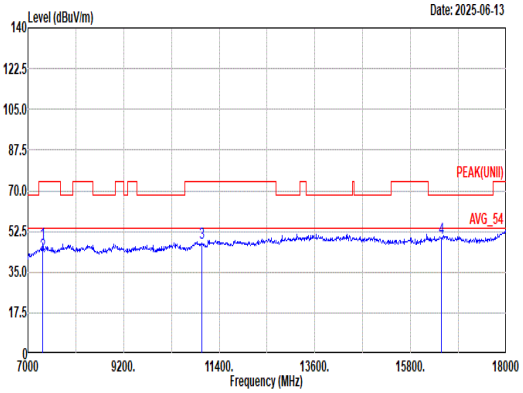 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 47.53 74.00 -26.47 62.13 36.73 13.75 65.80 0.72 102 233 Peak 2 7333.33 42.63 54.00 -11.37 57.23 36.73 13.75 65.80 0.72 102 233 Average 3 11000.00 47.69 74.00 -26.31 58.31 38.70 17.04 66.70 0.34 -- -- Peak 4 16500.00 49.75 68.20 -18.45 56.67 38.40 21.31 67.00 0.37 -- -- Peak	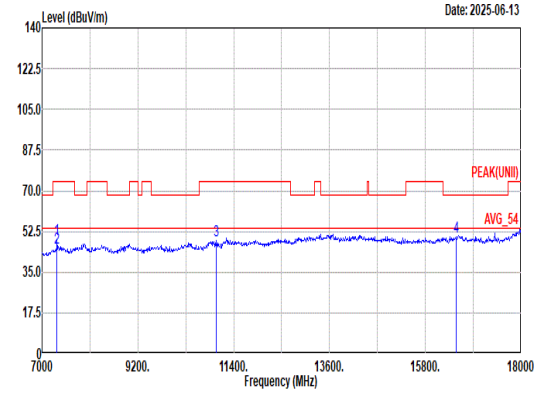 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 49.23 74.00 -24.77 63.83 36.73 13.75 65.80 0.72 253 153 Peak 2 7333.33 45.42 54.00 -8.58 60.02 36.73 13.75 65.80 0.72 253 153 Average 3 11000.00 48.59 74.00 -25.41 59.21 38.70 17.04 66.70 0.34 -- -- Peak 4 16500.00 50.00 68.20 -18.20 56.92 38.40 21.31 67.00 0.37 -- -- Peak

Mode	49	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	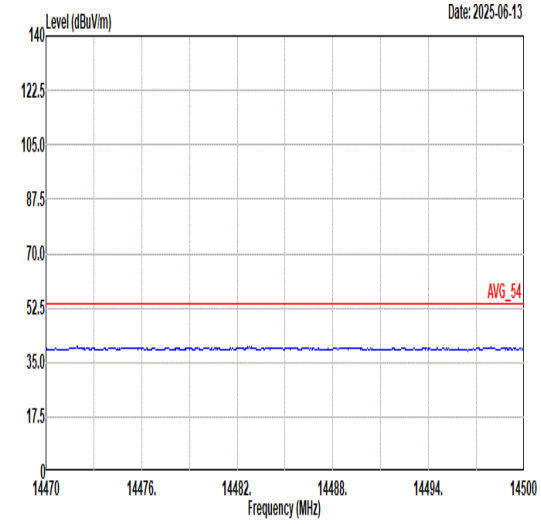 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	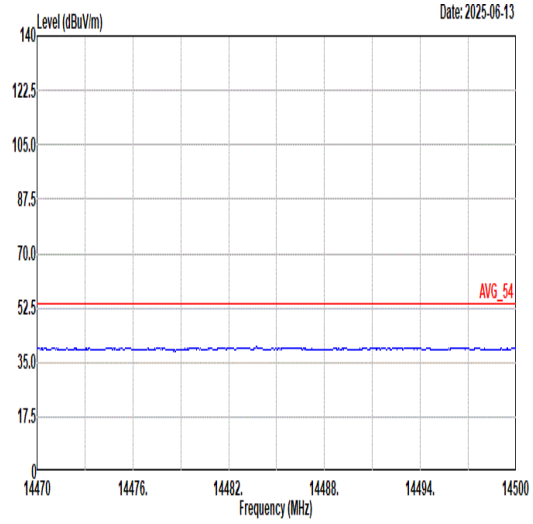 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	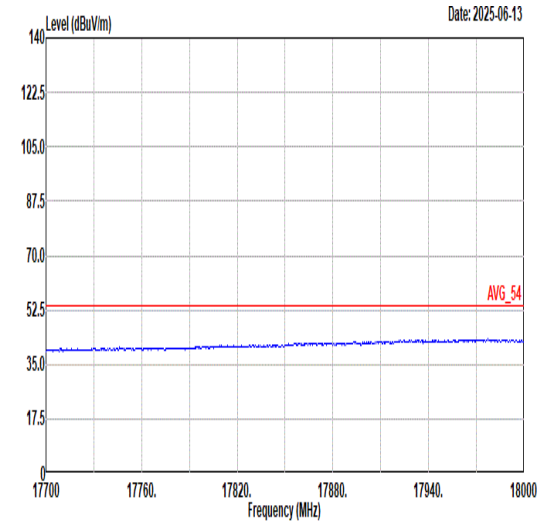 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	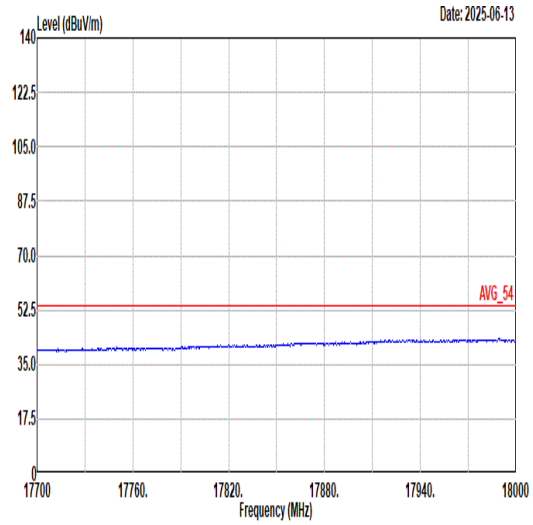 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	50	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	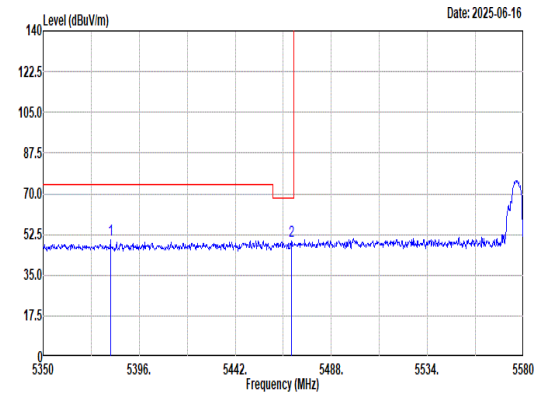 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5382.20 50.07 74.00 -23.93 40.33 32.84 9.66 32.76 0.00 131 87 Peak 2 5468.91 49.61 68.20 -18.59 39.55 32.88 9.92 32.74 0.00 131 87 Peak	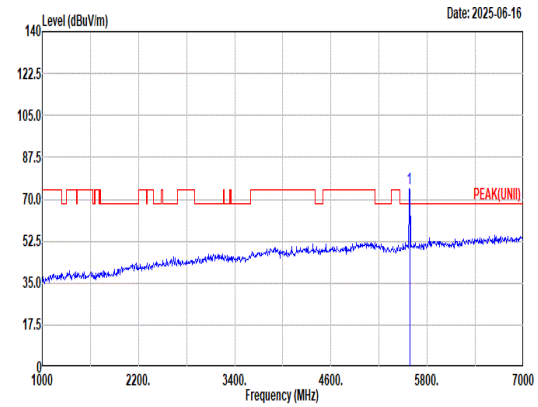 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 74.72 ------ ------ 64.34 32.80 10.34 32.76 0.00 131 87 Peak
Avg	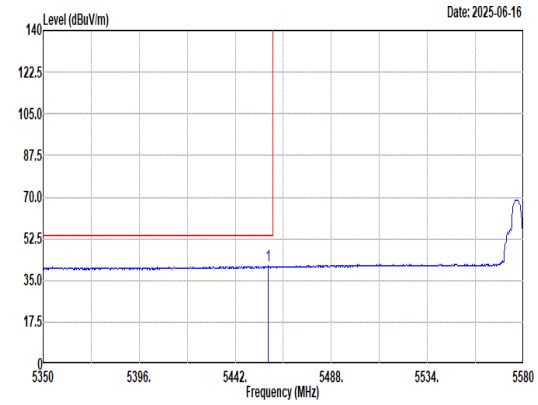 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5457.87 41.04 54.00 -12.96 31.07 32.83 9.88 32.74 0.00 131 87 Average	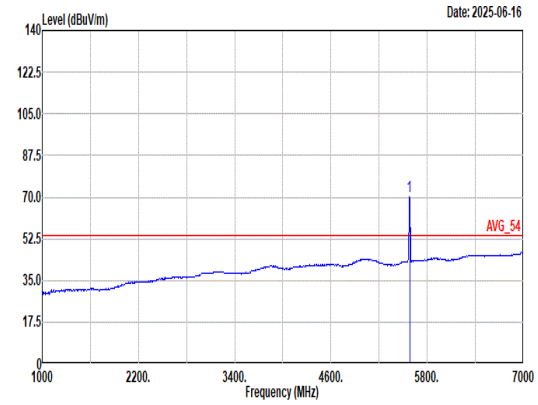 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 70.17 ------ ------ 59.79 32.80 10.34 32.76 0.00 131 87 Average

Mode	50	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	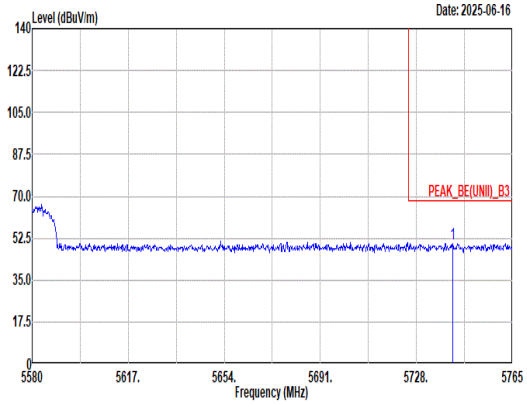 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.88 50.30 68.20 -17.90 39.46 33.48 10.18 32.82 0.00 131 87 Peak	Blank

Mode	50	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	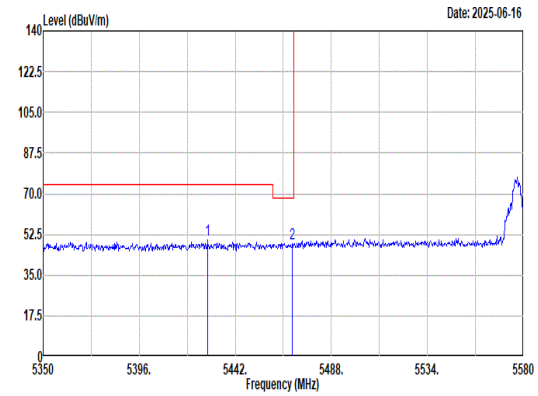 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5428.66 50.21 74.00 -23.79 40.39 32.80 9.77 32.75 0.00 335 145 Peak 2 5469.37 48.81 68.20 -19.39 38.75 32.88 9.92 32.74 0.00 335 145 Peak	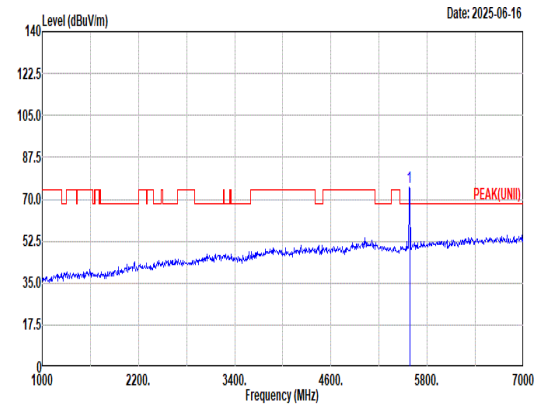 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 75.21 ------ ------ 64.83 32.80 10.34 32.76 0.00 335 145 Peak
Avg	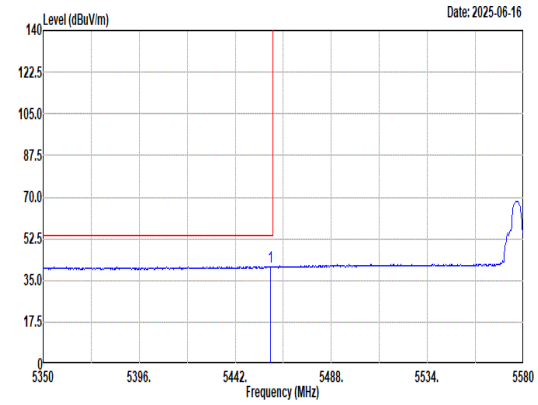 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.02 40.81 54.00 -13.19 30.83 32.84 9.88 32.74 0.00 335 145 Average	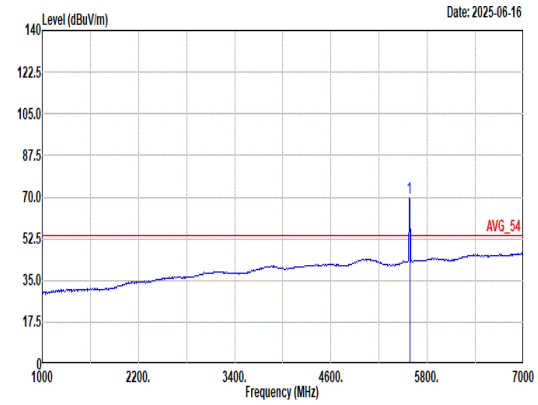 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 69.73 ------ ------ 59.35 32.80 10.34 32.76 0.00 335 145 Average

Mode	50	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	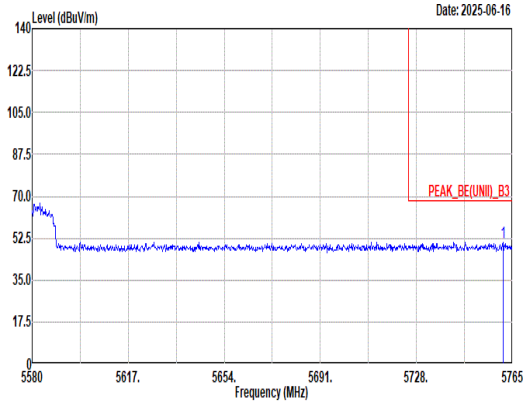 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5761.49 50.83 68.20 -17.37 39.96 33.55 10.15 32.83 0.00 335 145 Peak	Blank

Mode	50	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	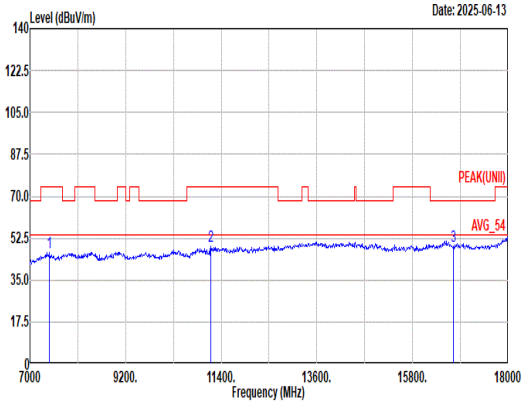 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 46.51 74.00 -27.49 61.65 36.24 13.86 65.93 0.69 -- -- Peak 2 11160.00 49.19 74.00 -24.81 59.55 38.62 17.18 66.51 0.35 -- -- Peak 3 16740.00 49.15 68.20 -19.05 55.97 37.84 21.37 66.42 0.39 -- -- Peak	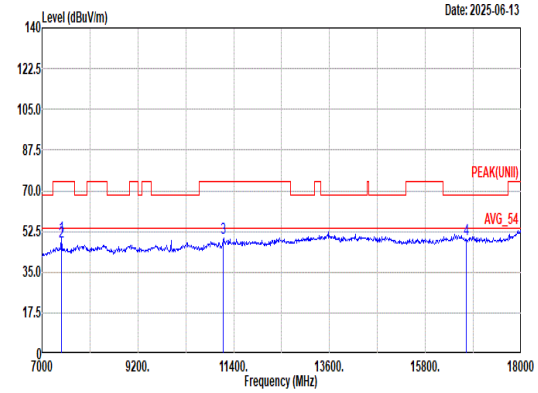 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 50.12 74.00 -23.88 65.26 36.24 13.86 65.93 0.69 250 147 Peak 2 7440.00 47.96 54.00 -6.04 63.10 36.24 13.86 65.93 0.69 250 147 Average 3 11160.00 49.63 74.00 -24.37 59.99 38.62 17.18 66.51 0.35 -- -- Peak 4 16740.00 49.12 68.20 -19.08 55.94 37.84 21.37 66.42 0.39 -- -- Peak

Mode	50	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_52/38 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	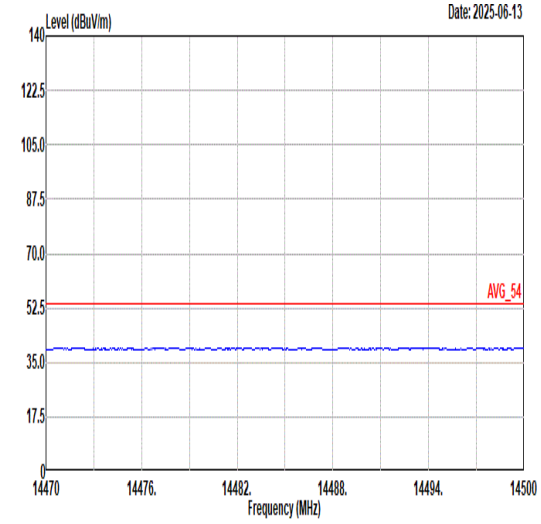 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	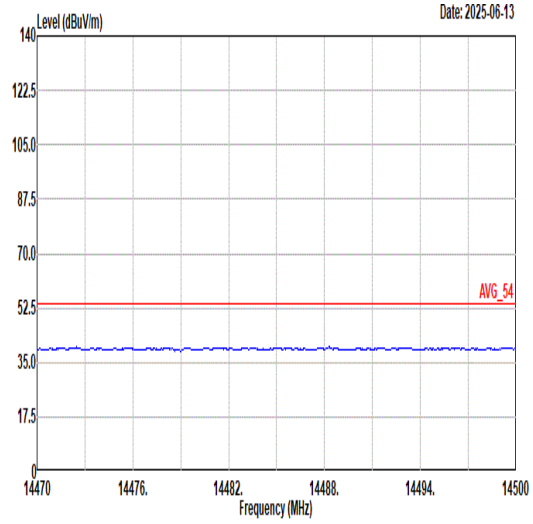 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	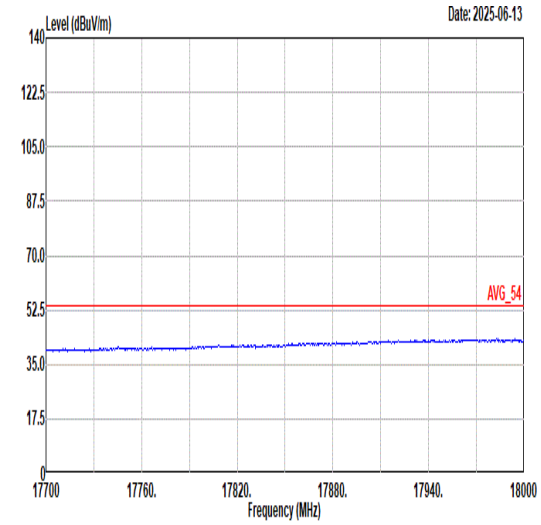 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	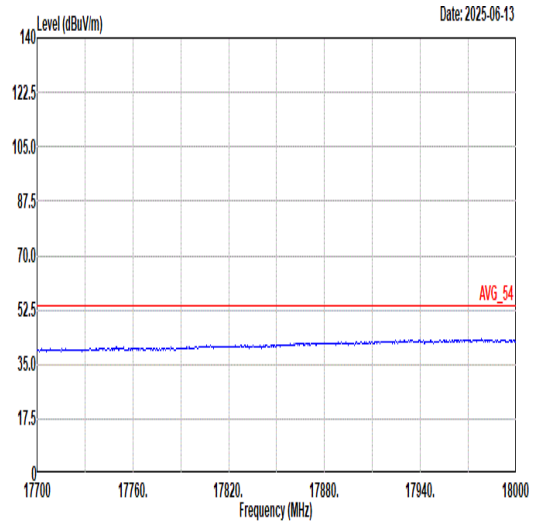 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	51	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	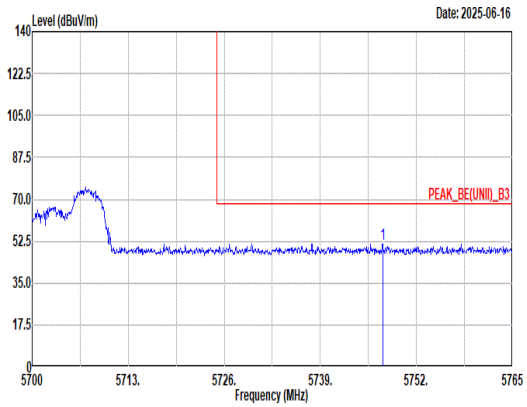 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5747.45 51.50 68.20 -16.70 40.66 33.49 10.17 32.82 0.00 100 118 Peak	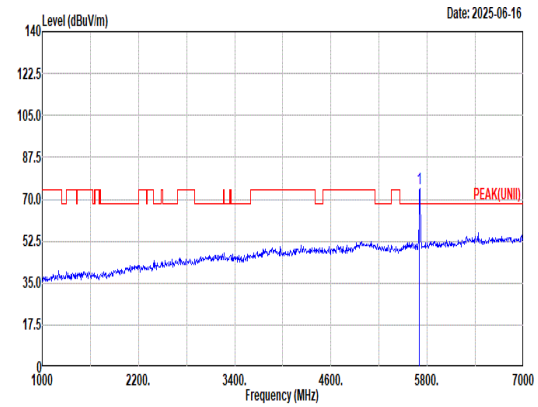 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 74.56 ------ ------ 63.72 33.42 10.23 32.81 0.00 100 118 Peak
Avg	Blank	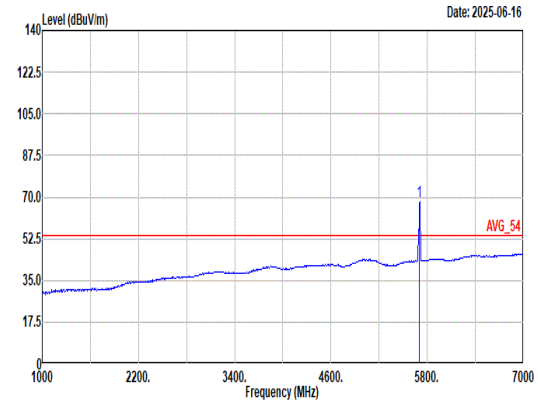 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 68.15 ------ ------ 57.31 33.42 10.23 32.81 0.00 100 118 Average

Mode	51	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	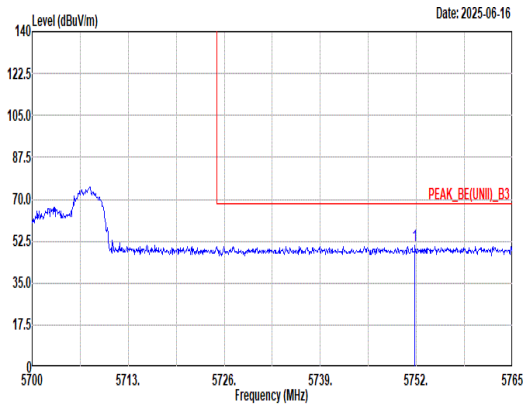 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5751.81 50.87 68.20 -17.33 40.03 33.51 10.16 32.83 0.00 380 120 Peak	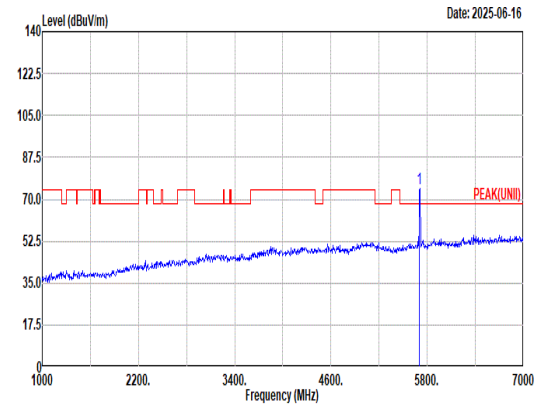 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 74.29 ------ ------ 63.45 33.42 10.23 32.81 0.00 380 120 Peak
Avg	Blank	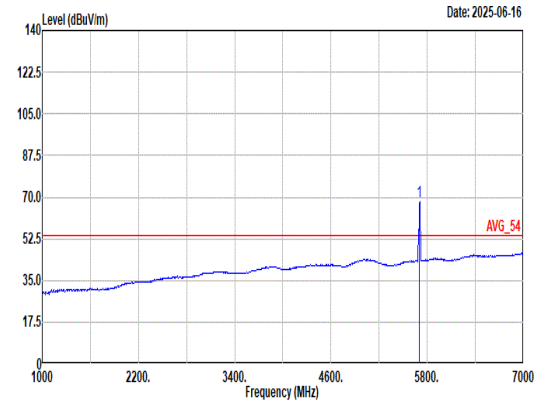 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 68.09 ------ ------ 57.25 33.42 10.23 32.81 0.00 380 120 Average

Mode	51	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	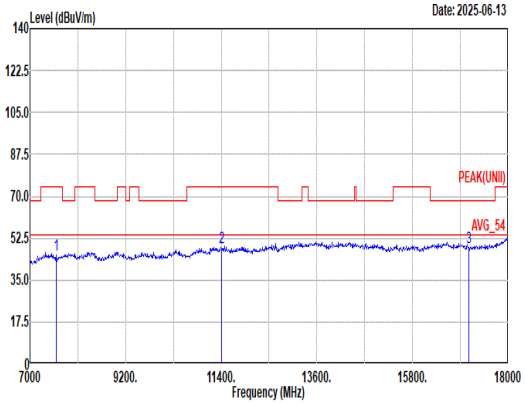 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 45.35 74.00 -28.65 60.42 36.10 14.08 66.04 0.79 -- -- Peak 2 11400.00 48.72 74.00 -25.28 58.18 39.00 17.40 66.22 0.36 -- -- Peak 3 17100.00 48.84 68.20 -19.36 55.01 37.80 21.49 65.88 0.42 -- -- Peak	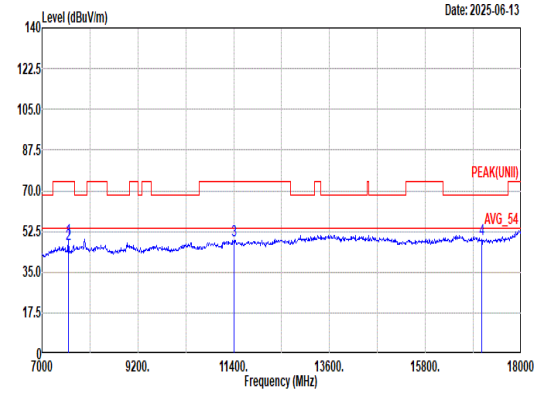 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7600.00 48.95 74.00 -25.05 64.02 36.10 14.08 66.04 0.79 238 163 Peak 2 7600.00 46.82 54.00 -7.18 61.89 36.10 14.08 66.04 0.79 238 163 Average 3 11400.00 48.78 74.00 -25.22 58.24 39.00 17.40 66.22 0.36 -- -- Peak 4 17100.00 48.94 68.20 -19.26 55.11 37.80 21.49 65.88 0.42 -- -- Peak

Mode	51	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	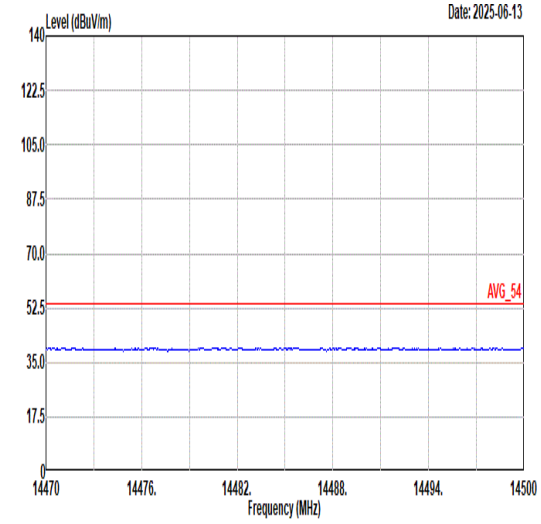 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	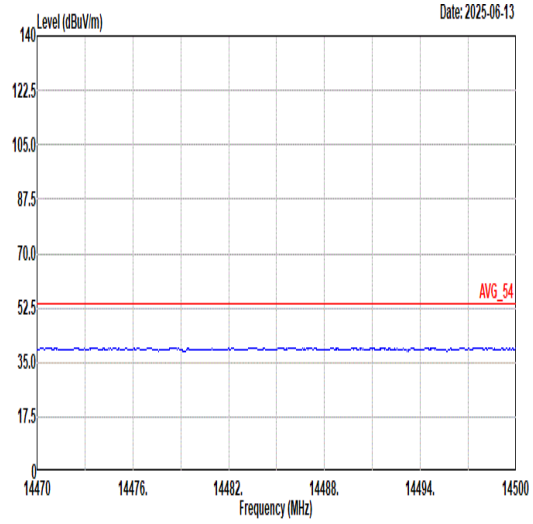 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	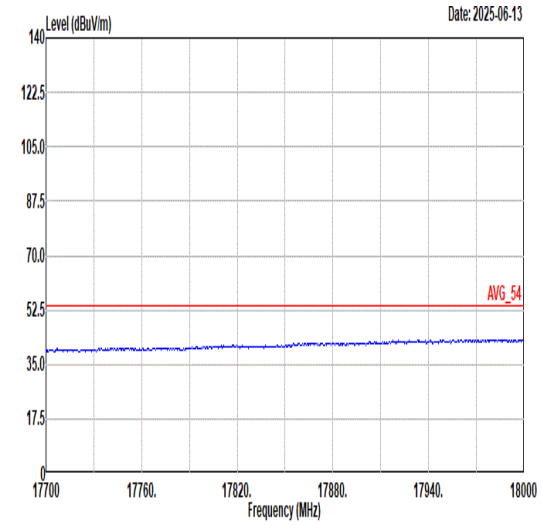 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	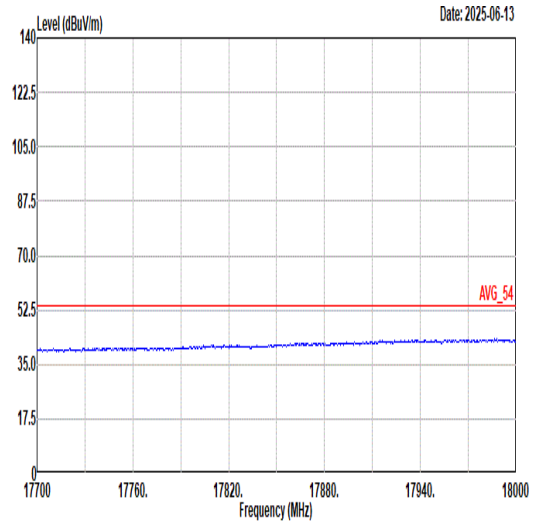 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	52	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	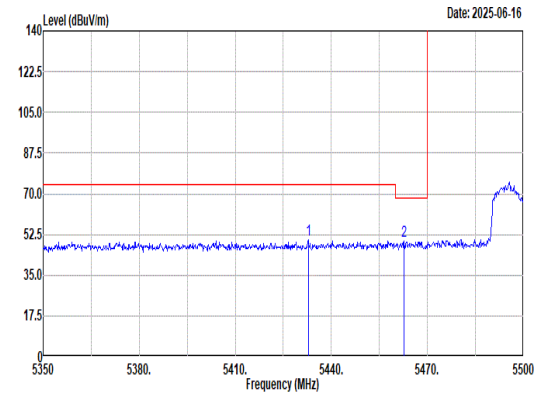 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5432.80 50.09 74.00 -23.91 40.25 32.80 9.78 32.74 0.00 150 96 Peak 2 5462.65 49.75 68.20 -18.45 39.74 32.85 9.90 32.74 0.00 150 96 Peak	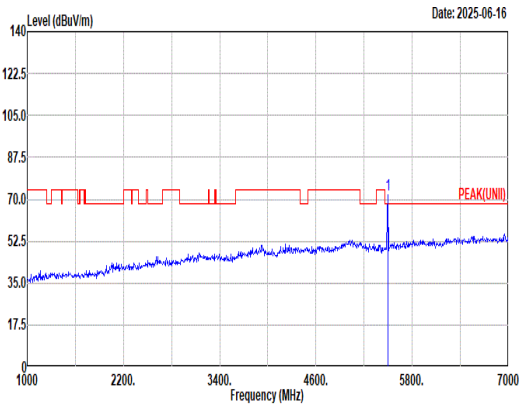 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 72.04 ------ ------ 61.77 32.98 10.02 32.73 0.00 150 96 Peak
Avg	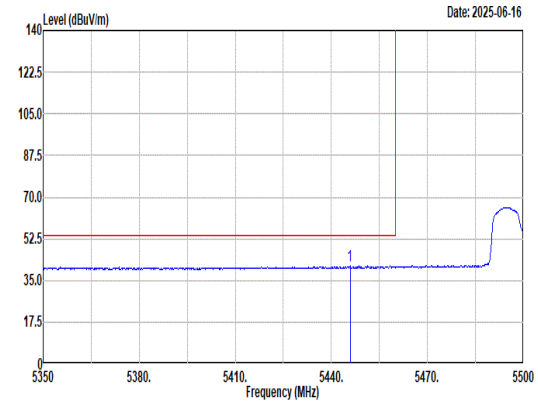 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5445.85 41.03 54.00 -12.97 31.14 32.80 9.83 32.74 0.00 150 96 Average	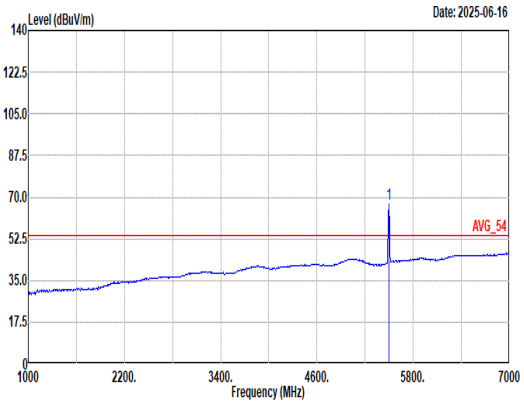 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5500.00 66.88 ------ ------ 56.61 32.98 10.02 32.73 0.00 150 96 Average

Mode	52	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	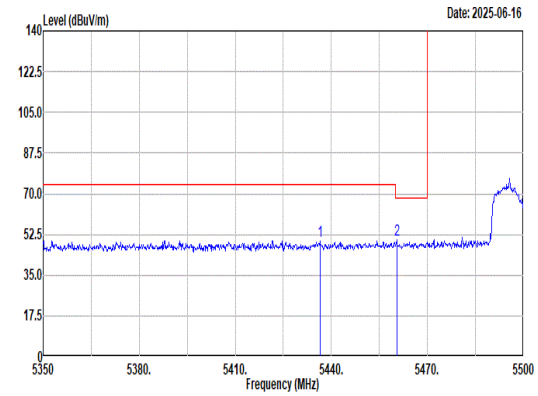 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.40 49.82 74.00 -24.18 39.96 32.80 9.80 32.74 0.00 366 132 Peak 2 5460.40 50.10 68.20 -18.10 40.11 32.84 9.89 32.74 0.00 366 132 Peak	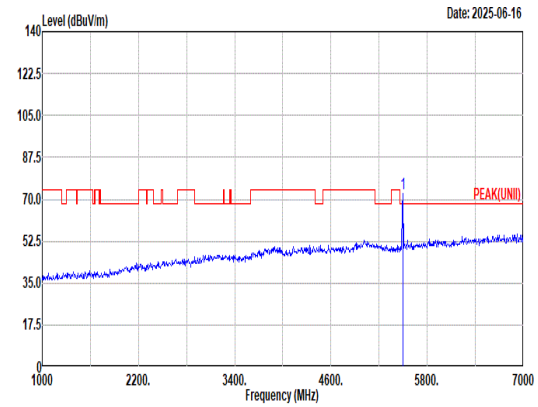 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 72.45 ------ ------ 62.18 32.98 10.02 32.73 0.00 366 132 Peak
Avg	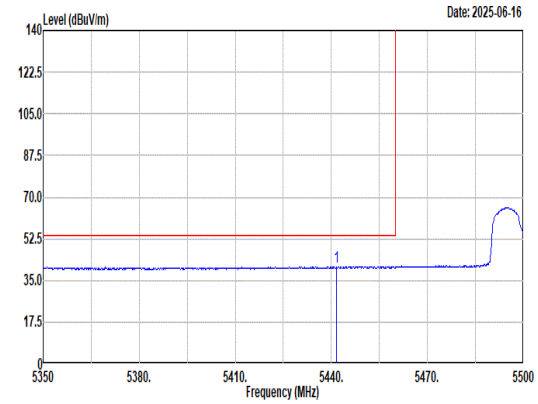 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5441.50 40.79 54.00 -13.21 30.91 32.80 9.82 32.74 0.00 366 132 Average	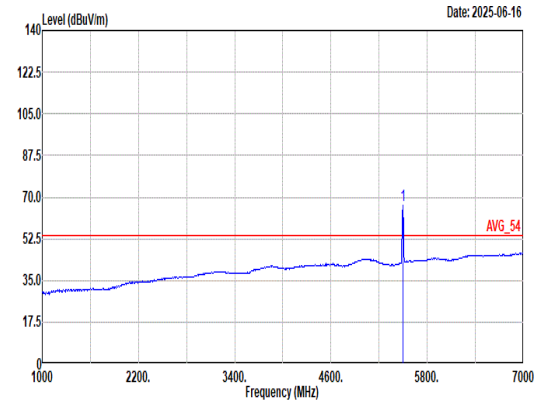 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 66.68 ------ ------ 56.41 32.98 10.02 32.73 0.00 366 132 Average

Mode	52	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	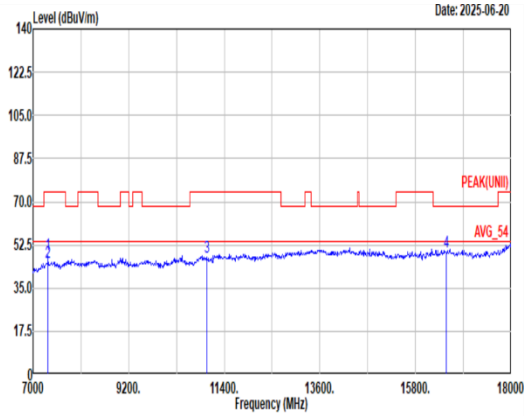 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 48.58 74.00 -25.42 63.18 36.73 13.75 65.80 0.72 150 246 Peak 2 7333.33 45.41 54.00 -8.59 60.01 36.73 13.75 65.80 0.72 150 246 Average 3 11000.00 47.54 74.00 -26.46 58.16 38.70 17.04 66.70 0.34 -- -- Peak 4 16500.00 49.70 68.20 -18.50 56.62 38.40 21.31 67.00 0.37 -- -- Peak	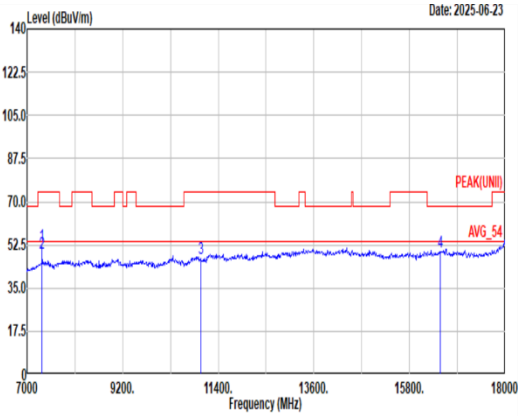 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.33 52.19 74.00 -21.81 66.79 36.73 13.75 65.80 0.72 250 269 Peak 2 7333.33 48.99 54.00 -5.01 63.59 36.73 13.75 65.80 0.72 250 269 Average 3 11000.00 47.11 74.00 -26.89 57.73 38.70 17.04 66.70 0.34 -- -- Peak 4 16500.00 49.71 68.20 -18.49 56.63 38.40 21.31 67.00 0.37 -- -- Peak

Mode	52	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	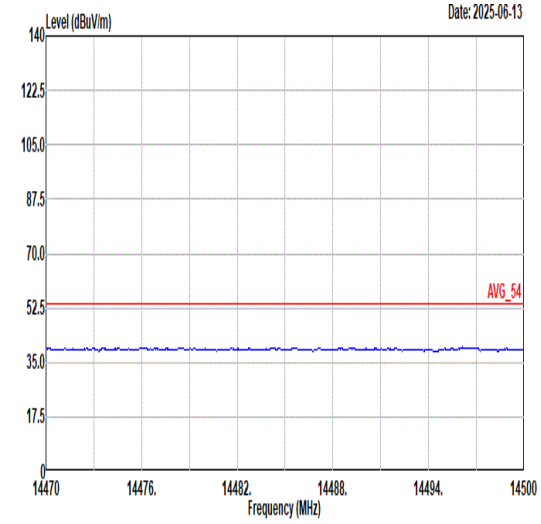 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	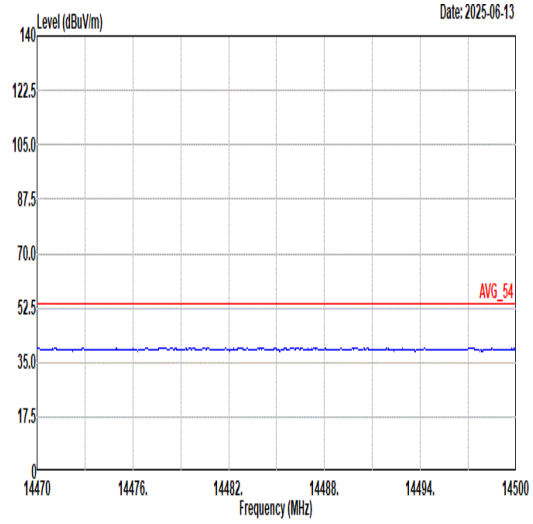 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL
17.7G ~18G Avg	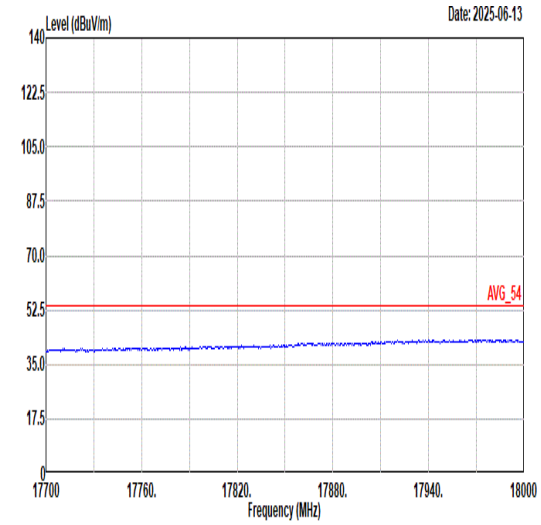 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL	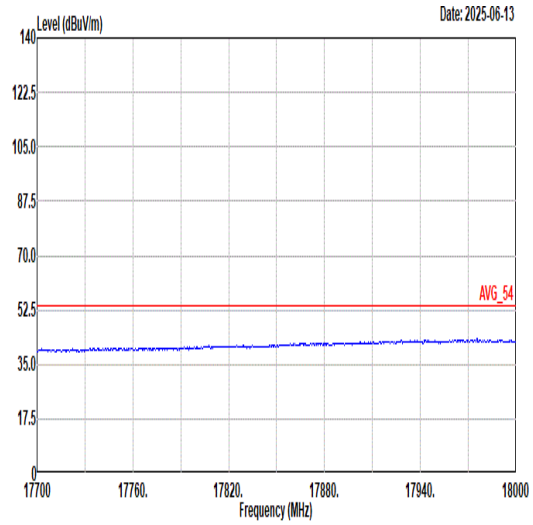 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL

Mode	53	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	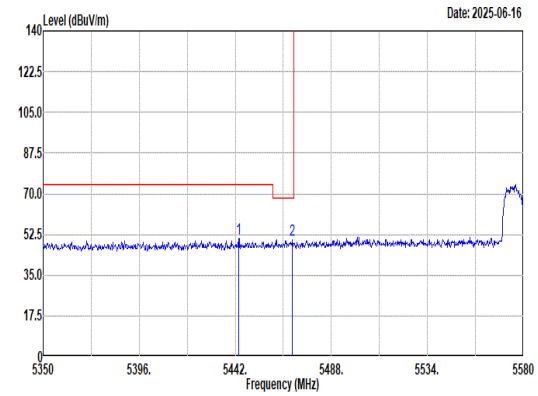 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5443.61 50.98 74.00 -23.02 41.09 32.80 9.83 32.74 0.00 145 91 Peak 2 5469.37 50.23 68.20 -17.97 40.17 32.88 9.92 32.74 0.00 145 91 Peak	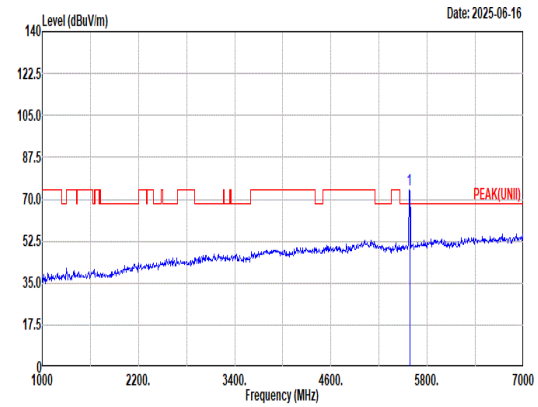 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 74.06 ------ ------ 63.71 32.80 10.31 32.76 0.00 145 91 Peak
Avg	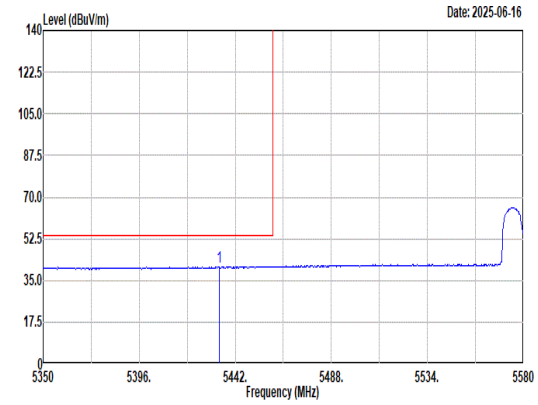 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5434.41 40.90 54.00 -13.10 31.05 32.80 9.79 32.74 0.00 145 91 Average	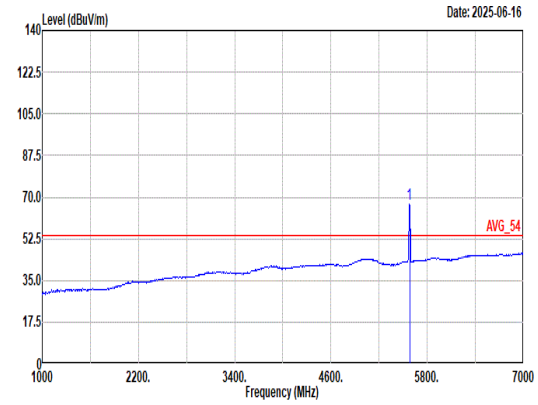 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5580.00 66.88 ------ ------ 56.50 32.80 10.34 32.76 0.00 145 91 Average

Mode	53	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	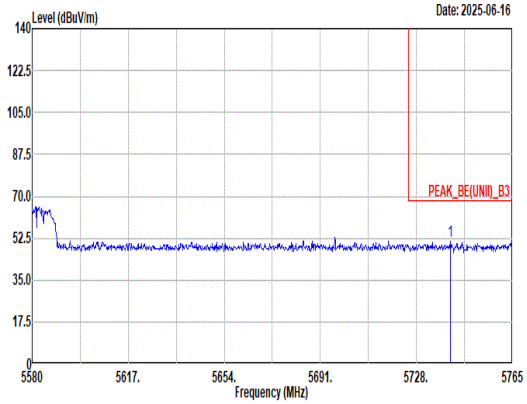 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.14 51.50 68.20 -16.70 40.66 33.48 10.18 32.82 0.00 145 91 Peak	Blank

Mode	53	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	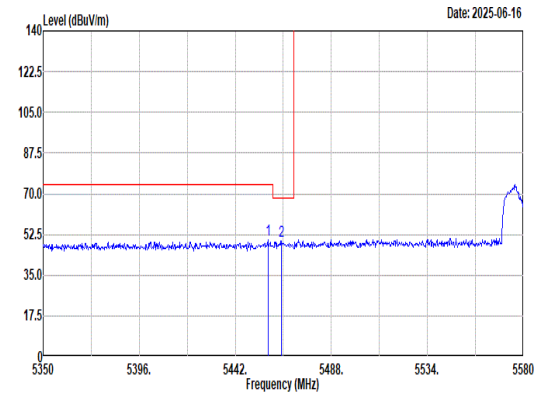 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.64 50.05 74.00 -23.95 40.08 32.83 9.88 32.74 0.00 389 135 Peak 2 5464.08 49.83 68.20 -18.37 39.81 32.86 9.90 32.74 0.00 389 135 Peak	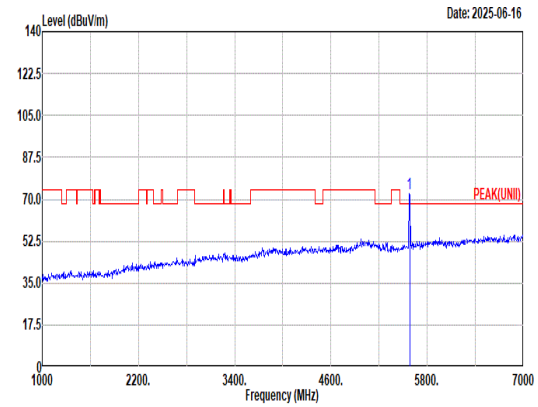 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 72.23 ------ ------ 61.85 32.80 10.34 32.76 0.00 389 135 Peak
Avg	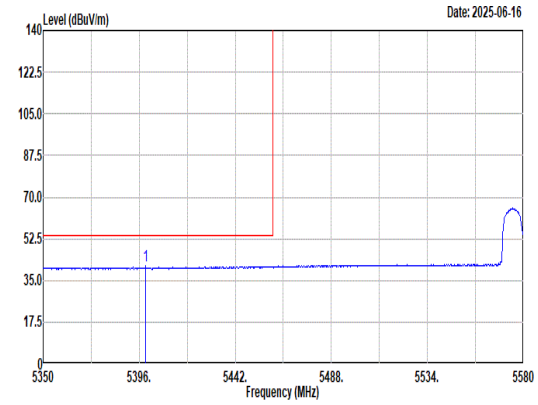 Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5399.22 40.98 54.00 -13.02 31.27 32.80 9.66 32.75 0.00 389 135 Average	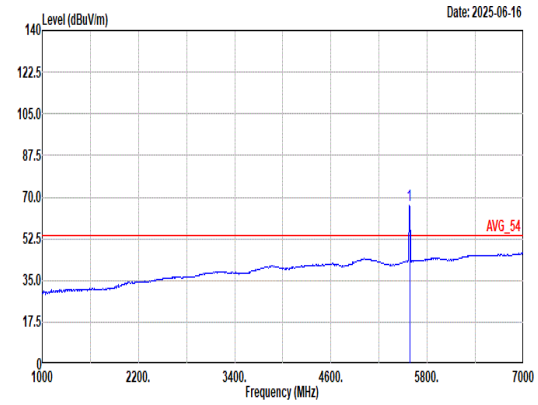 Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 66.54 ------ ------ 56.16 32.80 10.34 32.76 0.00 389 135 Average

Mode	53	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	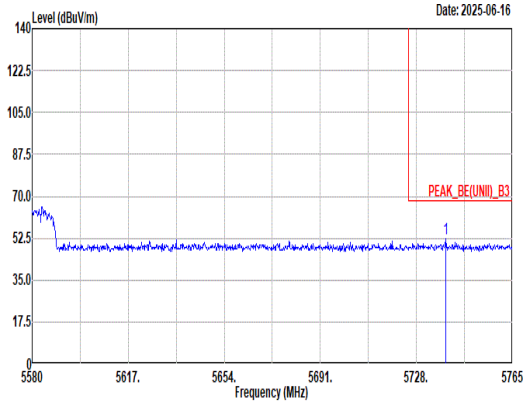 Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 9120D_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5739.29 52.14 68.20 -16.06 41.30 33.48 10.18 32.82 0.00 389 135 Peak	Blank

Mode	53	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_106/53 RU_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	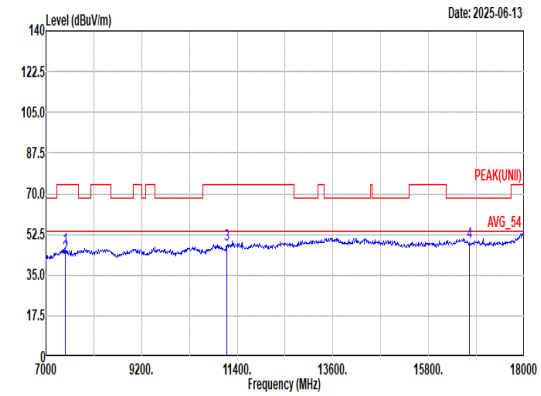 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 46.73 74.00 -27.27 61.87 36.24 13.86 65.93 0.69 350 114 Peak 2 7440.00 43.37 54.00 -10.63 58.51 36.24 13.86 65.93 0.69 350 114 Average 3 11160.00 48.03 74.00 -25.97 58.39 38.62 17.18 66.51 0.35 -- -- Peak 4 16740.00 49.05 68.20 -19.15 55.87 37.84 21.37 66.42 0.39 -- -- Peak	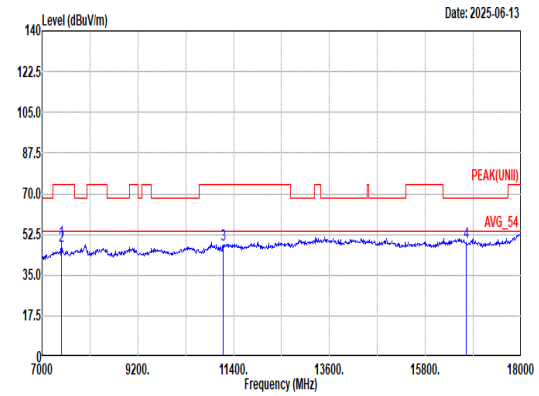 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_240828 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 49.62 74.00 -24.38 64.76 36.24 13.86 65.93 0.69 300 303 Peak 2 7440.00 47.61 54.00 -6.39 62.75 36.24 13.86 65.93 0.69 300 303 Average 3 11160.00 48.02 74.00 -25.98 58.38 38.62 17.18 66.51 0.35 -- -- Peak 4 16740.00 49.11 68.20 -19.09 55.93 37.84 21.37 66.42 0.39 -- -- Peak