

Global United Technology Services Co., Ltd.

Report No: GTSE11100084402

FCC REPORT (Mobile Phone)

Applicant: DELTA NETWORK PTE. LTD.

2 INTERNATIONAL BUSINESS PARK #01-23 STRATEGY, Address of Applicant:

THE SINGAPORE 609930

Equipment Under Test (EUT)

Product Name: MOBILE PHONE

Model No.: Mini GIO

Trade mark: **ALVO**

FCC ID: **Z6PALVOMiniGIO**

Applicable standards: FCC CFR Title 47 Part 2: 2010

> FCC CFR Title 47 Part22 Subpart H: 2010 FCC CFR Title 47 Part24 Subpart E: 2010

Date of sample receipt: Oct. 12, 2011

Date of Test: Oct.17-22, 2011

Date of report issued: Oct.22, 2011

Test Result: PASS *

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Stephen Guo

Laboratory Manager This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Version

Version No.	Date	Description
00	Oct. 22, 2011	Original

Prepared By:	collan. He	Date:	Oct. 22, 2011
	Project Engineer	_	
Check By:	Hams. Hu	Date:	Oct. 22, 2011

Reviewer

Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



3 Contents

			Page
1	CO	VER PAGE	1
2	VEI	RSION	2
_			
3	CO	NTENTS	3
4	TES	ST SUMMARY	4
5	GE	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF E.U.T.	
	5.3	TEST MODE:	
	5.4	RELATED SUBMITTAL(S) / GRANT (S)	8
	5.5	TEST METHODOLOGY	8
	5.6	TEST FACILITY	-
	5.7	TEST LOCATION	8
	5.8	TEST INSTRUMENTS LIST	9
6	SYS	STEM TEST CONFIGURATION	10
	6.1	JUSTIFICATION	10
	6.2	EUT Exercise	
	6.3	CONFIGURATION OF TESTED SYSTEM	
	6.4	DESCRIPTION OF TEST MODES	
	6.5	CONDUCTED EMISSIONS	
	6.6	RF OUTPUT POWER	
	6.7	OCCUPY BANDWIDTH	
	6.8	MODULATION CHARACTERISTIC	
	6.9	OUT OF BAND EMISSION AT ANTENNA TERMINALS	
	6.10	ERP, EIRP MEASUREMENT	
	6.11	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	
	6.12 6.13	Frequency stability V.S. Temperature measurement Frequency stability V.S. Voltage measurement	
7		FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	
7	IES	51 SETUP PHOTO	44
Ω	EII.	CONSTRUCTIONAL DETAILS	45

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



4 Test Summary

Test Item	Section in CFR 47	Result	
DE Empanya (CAD)	Part 1.1307	Passed*	
Output Power(Radiated & Conducted) Odulation Characteristics Owner (Radiated & Conducted)	Part 2.1093	(Please refer to SAR Report)	
	Part 2.1046		
RF Output Power(Radiated & Conducted)	Part 22.913 (a)(2)	Pass	
odulation Characteristics 9% & Occupied Bandwidth	Part 24.232 (c)		
Modulation Characteristics	Part 2.1047	N/A	
	Part 2.1049		
200/ 9 Occupied Bondwidth	Part 22.905	Pass	
99% & Occupied Bandwidth	Part 22.917	Pass	
	Part 24.238		
	Part 2.1051	Pass	
Spurious Emissions at Antenna Terminal	Part 22.917 (a)		
2F Exposure (SAR) 2F Output Power(Radiated & Conducted) 2F Output Power(Radiated & Conducted)	Part 24.238 (a)		
	Part 2.1053		
Field Strength of Spurious Radiation	Part 22.917 (a)	Pass	
	Part 24.238 (a)		
Out of hand emission Rand Edge	Part 22.917 (a)	Door	
Out of band emission, Band Edge	Part 24.238 (a)	Pass	
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass	
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass	

Pass: The EUT complies with the essential requirements in the standard.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



5 General Information

5.1 Client Information

Applicant:	DELTA NETWORK PTE. LTD.		
Address of Applicant:	2 INTERNATIONAL BUSINESS PARK #01-23 STRATEGY, THE SINGAPORE 609930		
Manufacturer:	SHENZHEN UNITED TIME TECHNOLOGY CO.,LTD.		
Address of Manufacturer:	Room 1001 Microprofit Building,6 Gaoxin south Road, High- Tech Park, Nanshan district ,Shenzhen, P.R. China		
Factory:	HUIZHOU UNITED TIME TECHNOLOGY CO.,LTD.		
Address of Factory:	2# songbai road, south zone , Cyber Park,huizhou,guangdong,		

5.2 General Description of E.U.T.

Product Name:	MOBILE PHONE
Model No.:	Mini GIO
Trade mark:	ALVO
Operation Frequency range:	GSM/GPRS 850: 824MHz-849MHz
	PCS1900: 1850MHz-1910MHz
Type of Emission:	250KGXW
IMEI:	355819049996378
	355819049996386
Software Version:	X321_2D_LD_ALVO_COM_V01
Hardware Version:	X321-MB-0.2
Antenna Gain (GSM850)	1dBi (-1.5dBd)
Antenna Gain (PCS1900)	1dBi
Data cable(USB):	Length 1m
Earphone line:	Length 1.5m
Power supply:	Type:Li-on Mini GIO-BAT 3.7V 800mAh
AC adapter:	Model: Mini GIO
	Input: AC 100-240V 50/60Hz
	Output: DC 5V 500mA

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Operation Frequency List:

GSM	1 850	PCS1900		
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)	
128	824.20	512	1850.20	
129	824.40	513	1850.40	
			••••	
189	836.40	660	1879.80	
190	836.60	661	1880.00	
191	836.80	662	1880.20	
•••				
250	848.60	809	1909.60	
251	848.80	810	1909.80	

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

	GSM850		PCS1900			
Channel Frequency(MHz)		Channel Frequency		Frequency(MHz)		
Lowest channel	128	824.20	Lowest channel	512	1850.20	
Middle channel	190	836.60	Middle channel	661	1880.00	
Highest channel	251	848.80	Highest channel	810	1909.80	

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



5.3 Test mode:

GSM850 mode	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is GSM mode.
GPRS850 mode1	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 1 uplink.
GPRS850 mode2	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 2 uplink.
GPRS850 mode3	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 3 uplink.
GPRS850 mode4	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 4 uplink.
EGPRS850 mode1	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 1 uplink.
EGPRS850 mode2	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 2 uplink.
EGPRS850 mode3	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 3 uplink.
EGPRS850 mode4	Keep the EUT in communicating continuously with CMU200 in 850MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 4 uplink.
PCS1900 mode	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is GSM mode.
GPRS1900 mode1	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 1 uplink.
GPRS1900 mode2	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 2 uplink.
GPRS1900 mode3	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 3 uplink.
GPRS1900 mode4	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is GPRS mode which it is 4 downlink and 4 uplink.
EGPRS1900 mode1	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 1 uplink.
EGPRS1900 mode2	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 2 uplink.
EGPRS1900 mode3	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 3 uplink.
EGPRS1900 mode4	Keep the EUT in communicating continuously with CMU200 in 1900MHz band, the EUT's operation mode is EGPRS mode which it is 4 downlink and 4 uplink.

Pre-scan mode:

Have pre-scan the GSM mode, GPRS mode1, GPRS mode2, GPRS mode3, GPRS mode4, EGPRS mode1, EGPRS mode2, EGPRS mode3 and EGPRS mode4, and found the GSM mode which it was worst case mode, so only show the worst case mode in the test report.

Final test mode:	
850MHz band	GSM 850 mode
1900MHz band	PCS1900 mode

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

Page 7 of 45



Project No.: GTSE111000844RF

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010. Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 8 of 45



5.8 Test Instruments list

Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2012	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 04 2011	Jul. 03 2012	
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 26 2011	Feb. 25 2012	
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 30 2011	June 29 2012	
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2011	Mar. 29 2012	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
8	Coaxial Cable	GTS	N/A	GTS213	Apr. 01 2011	Mar. 31 2012	
9	Coaxial Cable	GTS	N/A	GTS211	Apr. 01 2011	Mar. 31 2012	
9	Coaxial cable	GTS	N/A	GTS210	Apr. 01 2011	Mar. 31 2012	
11	Coaxial Cable	GTS	N/A	GTS212	Apr. 01 2011	Mar. 31 2012	
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 04 2011	Jul. 03 2012	
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 04 2011	Jul. 03 2012	
14	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2011	Mar. 31 2012	
15	Band filter	Amindeon	82346	GTS219	Apr. 01 2011	Mar. 31 2012	
16	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 11 2011	May 11 2012	
17	Signal Generator	Rohde & Schwarz	SML03	GTS236	May 11 2011	May 11 2012	
18	Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	May 11 2011	May 11 2012	
19	D.C. Power Supply	Instek	PS-3030	GTS232	NA	NA	
20	Splitter	Agilent	11636B	GTS237	May 11 2011	May 11 2012	

Radia	Radiated Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS252	Jul. 04 2011	Jul. 03 2012			
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 04 2011	Jul. 03 2012			
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 04 2011	Jul. 03 2012			
4	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 04 2011	Jul. 03 2012			
5	Coaxial Cable	GTS	N/A	GTS227	Apr. 01 2011	Mar. 31 2012			
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6 System test configuration

6.1 Justification

The EUT configuration for testing is installed on RF field strength measurement to meet the commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.


The EUT was configured for testing according to TIA/EIA -603-C.

The final qualification test was performed with the EUT operating at normal mode.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

6.3 Configuration of Tested System



6.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for both GSM/PCS with power adaptors, earphone and Data cable. The worst-case H mode for GSM 850 band, PCS1900 band.

Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Project No.: GTSE111000844RF

6.5 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.4: 2009			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz			
Limit:	(A411.)	Limit (c	dBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30 * Decreases with the logarithm	60	50	
Test procedure	1. The E.U.T and simulators a line impedance stabiliza 50ohm/50uH coupling im 2. The peripheral devices at through a LISN that provi with 50ohm termination. (test setup and photograp) 3. Both sides of A.C. line are interference. In order to fi positions of equipment ar changed according to AN measurement.	s are connected to the ation network(L.I.S.N.) pedance for the measure also connected to the des a 50ohm/50uH co (Please refers to the blhs). The checked for maximum and the maximum emising all of the interface contains the second s	The provide a uring equipment. The main power upling impedance ock diagram of the m conducted sion, the relative ables must be	
Test setup:	LISN 40cm		er — AC power	
Test Instruments:	Refer to section 5.8 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			
		•		

Measurement Data


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 11 of 45



Project No.: GTSE111000844RF

Test mode: GSM850

Live Line:

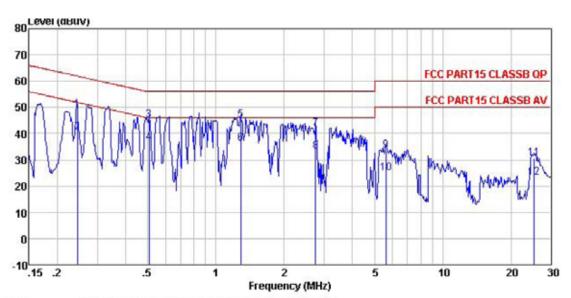

Condition : FCC PART15 CLASSB QP LISN(2011) LINE

Job No. : 844RF

Test Mode : Communication mode

Test Engineer: Osccar Remark : GSM850


renar k	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
-	MHz	dBuV	-dB	dB	dBuV	dBuV	dB	
1	0.244	48.38	0.63	0.10	49.11	61.95	-12.84	QP
2	0.244	39.67	0.63	0.10	40.40	51.95	-11.55	Average
3	0.507	44.45	0.55	0.10	45.10	56.00	-10.90	QP
4	0.507	35.94	0.55	0.10	36.59	46.00	-9.41	Average
5	1.289	44.74	0.45	0.10	45.29	56.00	-10.71	QP
6	1.289	35.49	0.45	0.10	36.04	46.00	-9.96	Average
7	2.750	41.24	0.37	0.10	41.71		-14.29	
1 2 3 4 5 6 7 8 9	2.750	32.66	0.37	0.10	33.13	46.00	-12.87	Average
9	5.623	33.23	0.29	0.11	33.63		-26.37	
	5.623	24.61	0.29	0.11	25.01			Average
11	25.321	30.16	0.12	0.21	30.49		-29.51	
12	25.321	22.94	0.12	0.21	23. 27	50.00	-26.73	Average

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 12 of 45



Project No.: GTSE111000844RF

Neutral Line:

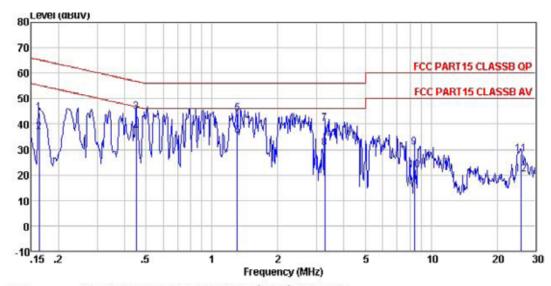

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 844RF

Test Mode : Communication mode

Test Engineer: Osccar Remark : GSM850


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
-	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	43.56	0.68	0.10	44.34	65.34	-21.00	QP
2	0.162	35.92	0.68	0.10	36.70	55.34	-18.64	Average
3	0.452	44.02	0.57	0.10	44.69	56.85	-12.16	QP
4	0.452	36.18	0.57	0.10	36.85	46.85	-10.00	Average
1 2 3 4 5 6 7 8 9 10	1.303	43.49	0.45	0.10	44.04		-11.96	
6	1.303	34.97	0.45	0.10	35.52	46.00	-10.48	Average
7	3.276	39.86	0.35	0.10	40.31		-15.69	
8	3.276	30.17	0.35	0.10	30.62	46.00	-15.38	Average
9	8.367	30.42	0.24	0.18	30.84	60.00	-29.16	QP
10	8.367	21.47	0.24	0.18	21.89	50.00	-28.11	Average
11	25.727	27.99	0.12	0.21	28.32	60.00	-31.68	QP
12	25.727	19.84	0.12	0.21	20.17	50.00	-29.83	Average

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 13 of 45



Test mode: PCS1900

Live Line:

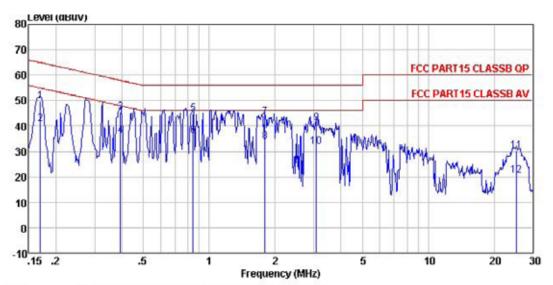

Condition : FCC PART15 CLASSB QP LISN(2011) LINE

Job No. Test Mode : 844RF

: Communication mode


Test Engineer: Osccar : PCS1900 Remark

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.169	49.01	0.67	0.10	49.78	64.99	-15.21	QP
2	0.169	40.19	0.67	0.10	40.96	54.99	-14.03	Average
3	0.393	44.63	0.58	0.10	45.31	57.99	-12.68	QP
4	0.393	35.49	0.58	0.10	36.17	47.99	-11.82	Average
5	0.844	44.35	0.50	0.10	44.95	56.00	-11.05	QP
6	0.844	35.64	0.50	0.10	36.24	46.00	-9.76	Average
7	1.800	42.92	0.41	0.10	43.43	56.00	-12.57	QP
1 2 3 4 5 6 7 8 9	1.800	33.19	0.41	0.10	33.70	46.00	-12.30	Average
9	3.090	40.85	0.35	0.10	41.30	56.00	-14.70	QP
10	3.090	31.23	0.35	0.10	31.68	46.00	-14.32	Average
11	25.321	29.75	0.12	0.21	30.08	60.00	-29.92	QP
12	25.321	20.31	0.12	0.21	20.64	50.00	-29.36	Average

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Neutral Line:

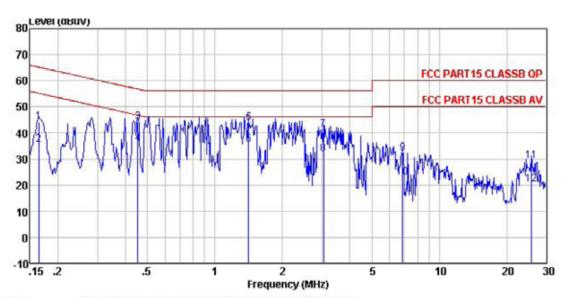

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 844RF

Test Mode : Communication mode

Test Engineer: Osccar Remark : PCS1900

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	-
1	0.164	43.38	0.68	0.10	44.16	65.25	-21.09	QP
2	0.164	34.59	0.68	0.10	35.37	55. 25	-19.88	Average
3	0.454	43.56	0.57	0.10	44.23	56.80	-12.57	QP
4	0.454	35.19	0.57	0.10	35.86	46.80	-10.94	Average
5	1.411	43.39	0.44	0.10	43.93	56.00	-12.07	QP
6	1.411	35.11	0.44	0.10	35.65	46.00	-10.35	Average
7	3.041	40.55	0.35	0.10	41.00	56.00	-15.00	QP
1 2 3 4 5 6 7 8 9	3.041	31.27		0.10	31.72	46.00	-14.28	Average
9	6.878	31.84	0.26	0.14	32.24		-27.76	
10	6.878	22.37	0.26	0.14	22.77	50.00	-27.23	Average
11	25.727	28.77	0.12	0.21	29.10		-30.90	
12	25.727	19.79	0.12	0.21	20.12			Average

Notes:


- 1. An initial pre-scan was performed on the live and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level = Receiver Read level + LISN Factor + Cable Loss

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

Page 15 of 45



6.6 RF Output Power

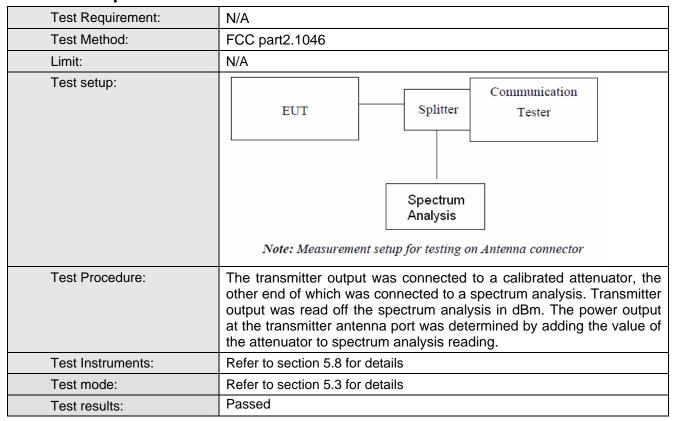


Measurement Data

EUT Mode	Channel	Frequency (MHz)	PK power (dBm)
	128	824.20	31.57
GSM 850	190	836.60	31.49
	251	848.80	31.45
	512	1850.20	29.18
PCS 1900	661	1880.00	28.73
	810	1909.80	28.33


Test plot as follows:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



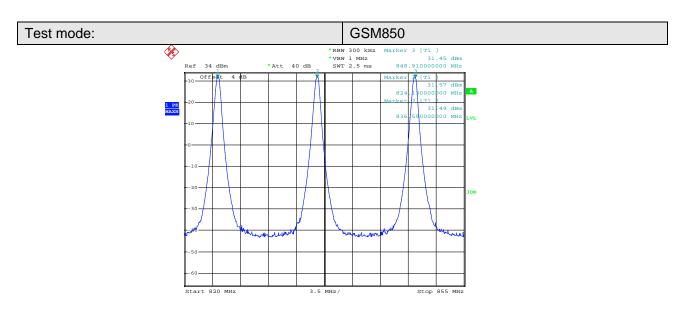

Date: 18.OCT.2011 05:49:33

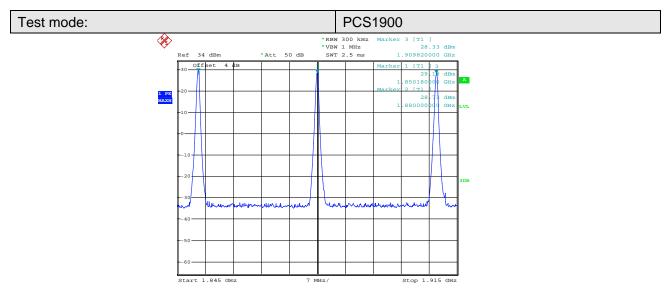


Date: 22.OCT.2011 03:31:35

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6.7 Occupy Bandwidth

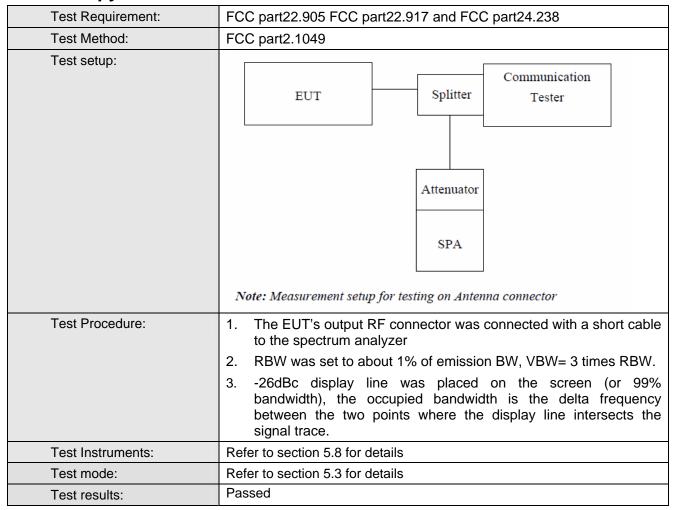


Measurement Data

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
	128	824.20	242	312
GSM 850	190	836.60	242	316
	251	848.80	248	318
	512	1850.20	250	324
PCS 1900	661	1880.00	248	318
	810	1909.80	246	316

Test plot as follows:


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



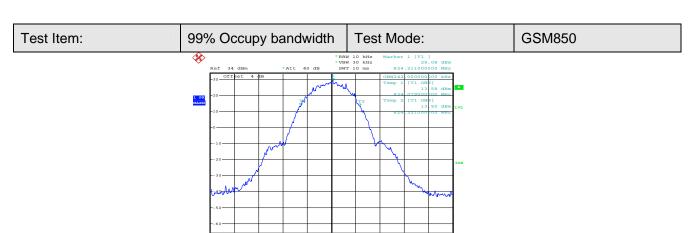


Date: 18.0CT.2011 05:59:30

Lowest channel



Date: 18.0CT.2011 05:56:33

Middle channel




Date: 18.0CT.2011 05:51:51

Highest channel:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960









Date: 22.0CT.2011 03:33:07

Lowest channel



Date: 22.0CT.2011 03:39:25

Middle channel




Date: 22.OCT.2011 03:44:16

Highest channel:









Date: 18.0CT.2011 05:59:01

Lowest channel



Date: 18.0CT.2011 05:56:05


Middle channel




Date: 18.0CT.2011 05:51:12

Highest channel:









Date: 22.OCT.2011 03:32:35

Lowest channel



Date: 22.0CT.2011 03:38:51

Middle channel



Date: 22.OCT.2011 03:43:35


Highest channel:



6.8 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.9 Out of band emission at antenna terminals

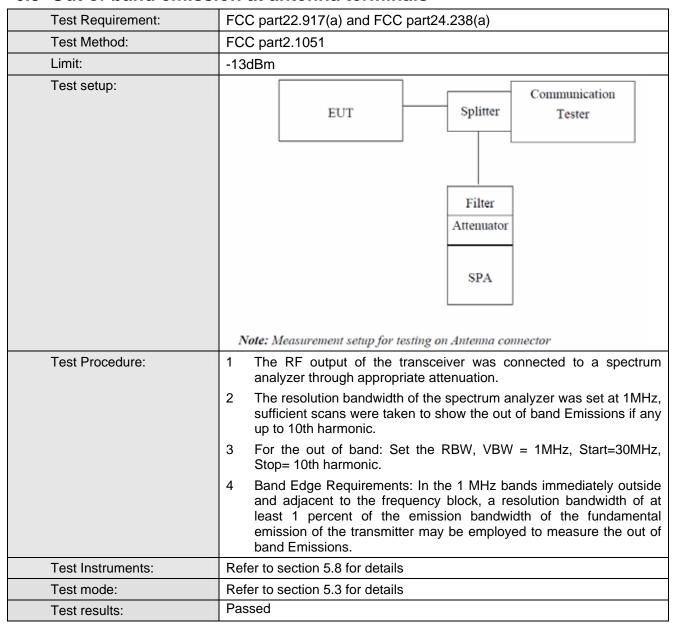


Test plot as follows:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960




Spurious emission

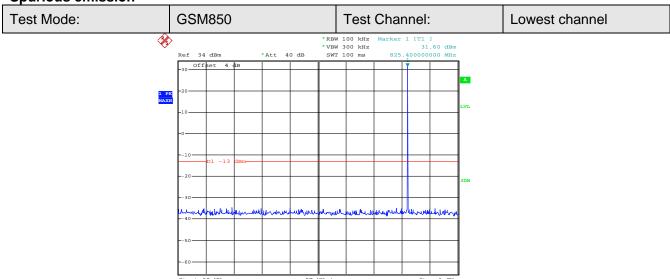

Date: 18.OCT.2011 06:00:01

30MHz~1GHz




Date: 18.OCT.2011 06:00:18

1GHz~9GHz


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



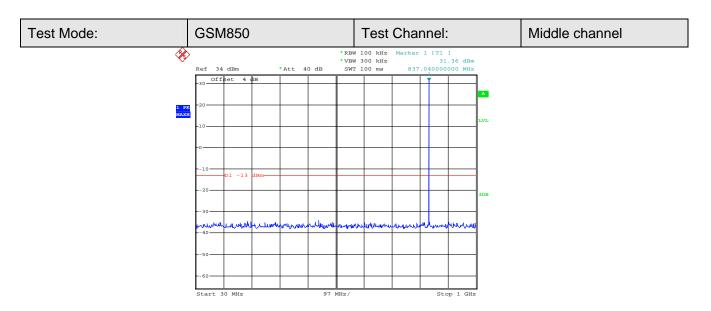

Date: 18.OCT.2011 05:57:07

30MHz~1GHz




Date: 18.OCT.2011 05:57:44

1GHz~9GHz


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



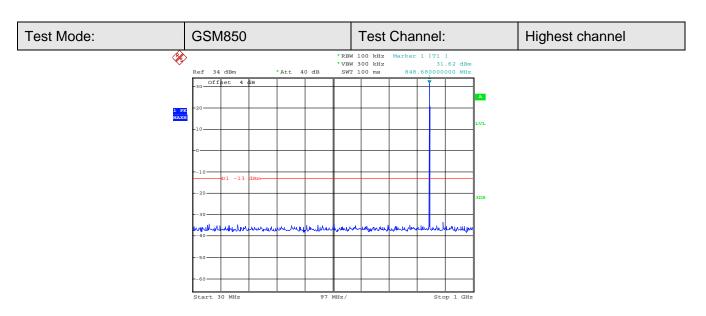

Date: 18.OCT.2011 05:52:30

30MHz~1GHz




Date: 18.OCT.2011 05:52:51

1GHz~9GHz

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960


Page 26 of 45



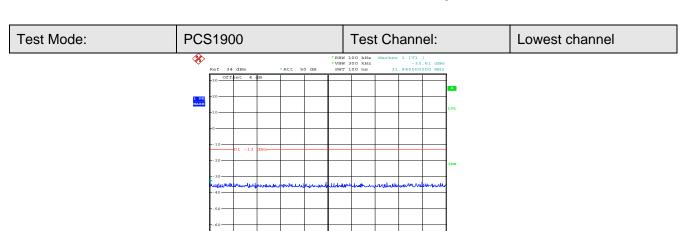


Date: 22.0CT.2011 03:33:43

30MHz~1GHz



Date: 22.0CT.2011 03:35:56

1GHz~9GHz




Date: 22.OCT.2011 03:41:10

9GHz~19GHz









Date: 22.0CT.2011 03:39:53

30MHz~1GHz



Date: 22.OCT.2011 03:40:28

1GHz~9GHz




9GHz~19GHz

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960









Date: 22.OCT.2011 03:42:31

30MHz~1GHz



Date: 22.0CT.2011 03:42:07

1GHz~9GHz




9GHz~19GHz




Band edge emission:





Date: 18.0CT.2011 06:01:14

Lowest channel



Date: 18.OCT.2011 05:54:54

Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960






Date: 22.OCT.2011 03:37:40

Lowest channel

hall be where where we were



Date: 22.OCT.2011 03:45:20

Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6.10 ERP, EIRP Measurement

Test Requirement:	FCC part22.913(a) and FCC part24.232(c)
Test Method:	FCC part2.1046
Limit:	GSM850 7W ERP
	PCS1900 2W EIRP
Test setup:	Below 1GHz Antenna Tower Antenna Ant
	Substituted method: Substituted method: Antenna mast d: distance in meters d: 3 meter
	Substituted Dipole or Hom Antenna Bi-Log Antenna or Hom Antenna SPA

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test Procedure:	 The EUT was placed on an non-conductive turntable using a non- conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 		
	2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.		
	3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated asfollows:		
	ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)		
	4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:		
	EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
			V	32.34		
		Н	Н	30.32		
		_,	V	29.86		_
	Lowest	E1	Н	30.05	38.45	Pass
			V	29.02		
		E2	Н	29.68		
			V	32.11		Pass
		Н	Н	30.54	38.45	
		E1	V	28.02		
GSM850	Middle		Н	30.19		
		E2	V	28.48		
			Н	29.83		
			V	31.79		
		Н	н	30.93		
		F4	V	29.86		_
	Highest	E1	Н	30.75	38.45	Pass
		F0	V	27.45		
		E2	Н	29.86		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
			V	30.28		
		Н	Н	28.65		
		_,	V	28.13		_
	Lowest	E1	Н	29.37	33.00	Pass
			V	28.02		
		E2	Н	29.63		
			V	29.89		Pass
		Н	Н	29.22	33.00	
5004000		E1	V	28.14		
PCS1900	Middle		Н	28.83		
		E2	V	28.21		
			Н	28.95		
			V	29.78		
		Н	Н	27.69		
		F4	V	27.33	00.00	
	Highest	E1	Н	28.94	33.00	Pass
		F0	V	27.08		
		E2	Н	28.84		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6.11 Field strength of spurious radiation measurement

Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1053
Limit:	-13dBm
Limit: Test setup:	Below 1GHz Antenna Tower Antenna Tower Search Antenna Tum Table Ground Plane Above 1GHz
	Antenna Tower Horn Antenna Spectrum Analyzer Turn Table A A A A A A A A A A A A A A A A A A A
	Substituted method:
	Ground plane d: distance in meters d:3 meter I -4 meter SpA Substituted Dipole or Horn Antenna Bi-Log Antenna or Horn Antenna

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test Procedure:	The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.
	2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.
	3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.
	4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.
	ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) –
	Cable Loss (dB)
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test mode:	GSM850		Test channel:	Lowest	
	Spurious Emission			_	
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
186.35	Vertical	-43.06			
3296.80	V	-25.85			
4121.00	V	-40.03	40.00	Pass	
4945.20	V	-36.24	-13.00		
5769.40	V				
6593.60	V				
224.26	Horizontal	-44.02			
3296.80	Н	-28.01			
4121.00	Н	-42.36		Pass	
4945.20	Н	-38.43	-13.00		
5769.40	Н				
6593.60	Н				
Test mode:	GSN	1850	Test channel:	Middle	
Face (8.411.)	Spurious	Emission		D II	
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
94.35	Vertical	-39.05			
3346.40	V	-33.00			
4183.00	V	-41.93		Dana	
			40.00		
5019.60	V	-28.71	-13.00	Pass	
5019.60 5856.20	V V	-28.71 	-13.00	Pass	
			-13.00 - -	Pass	
5856.20	V		-13.00	Pass	
5856.20 6692.80	V V		-13.00	Pass	
5856.20 6692.80 102.69	V V Horizontal	 -40.19			
5856.20 6692.80 102.69 3346.40	V V Horizontal H	 -40.19 -35.33	-13.00	Pass	
5856.20 6692.80 102.69 3346.40 4183.00	V V Horizontal H	 -40.19 -35.33 -44.55			

Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. Remark"---" means that the emission level is too low to be measured
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Test mode:	GSM850		Test channel:	Highest	
	Spurious	Spurious Emission			
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
210.79	Vertical	-41.06			
3395.20	V	-29.13			
4244.00	V	-37.64		_	
5092.80	V	-30.89	-13.00	Pass	
5941.60	V				
6790.40	V				
116.01	Horizontal	-40.92			
3395.20	Н	-31.68			
4244.00	Н	-40.08		_	
5092.80	Н	-33.22	-13.00	Pass	
5941.60	Н				
6790.40	Н				
Test mode:	PCS	1900	Test channel:	Lowest	
	Spurious Emission			.	
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
326.03	Vertical	40.05			
		-46.25			
3700.40	V	-46.25 -17.80			
3700.40 5550.60					
	V	-17.80	-13.00	Pass	
5550.60	V V	-17.80 -30.01	-13.00	Pass	
5550.60 7400.80	V V V	-17.80 -30.01	-13.00	Pass	
5550.60 7400.80 9251.00	V V V	-17.80 -30.01 -32.68	-13.00	Pass	
5550.60 7400.80 9251.00 11101.20	V V V V	-17.80 -30.01 -32.68 	-13.00	Pass	
5550.60 7400.80 9251.00 11101.20 123.95	V V V V V Horizontal	-17.80 -30.01 -32.68 -42.35	_		
5550.60 7400.80 9251.00 11101.20 123.95 3700.40	V V V V V Horizontal	-17.80 -30.01 -32.68 -42.35 -20.36	-13.00	Pass Pass	
5550.60 7400.80 9251.00 11101.20 123.95 3700.40 5550.60	V V V V V Horizontal H	-17.80 -30.01 -32.68 -42.35 -20.36 -32.35	_		

Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. Remark"---" means that the emission level is too low to be measured
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Report No. 913E11100064402						
Test mode:	PCS1900		Test channel:	Middle		
(NALL_)	Spurious	Emission	Lineit (dDns)	Result		
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
111.68	Vertical	-40.29				
3760.00	V	-17.93				
5640.00	V	-29.33	40.00	Pass		
7520.00	V	-35.49	-13.00			
9400.00	V					
11280.00	V					
202.16	Horizontal	-39.59				
3760.00	Н	-20.81				
5640.00	Н	-31.89	40.00	Pass		
7520.00	Н	-38.10	-13.00			
9400.00	Н					
11280.00	Н					
Test mode:	PCS	1900	Test channel:	Highest		
	Spurious Emission					
Frequency (MHz)						
	Polarization	Level (dBm)	Limit (dBm)	Result		
99.56	Polarization Vertical	Level (dBm) -43.09	Limit (dbm)	Result		
99.56 3819.60			Limit (dbin)	Result		
	Vertical	-43.09				
3819.60	Vertical V	-43.09 -20.61	-13.00	Result		
3819.60 5729.40	Vertical V V	-43.09 -20.61 -28.83				
3819.60 5729.40 7639.20	Vertical V V	-43.09 -20.61 -28.83				
3819.60 5729.40 7639.20 9549.00	Vertical V V V V	-43.09 -20.61 -28.83				
3819.60 5729.40 7639.20 9549.00 11458.80	Vertical V V V V	-43.09 -20.61 -28.83 -37.94 				
3819.60 5729.40 7639.20 9549.00 11458.80 193.26	Vertical V V V V V Horizontal	-43.09 -20.61 -28.83 -37.94 -40.15	-13.00	Pass		
3819.60 5729.40 7639.20 9549.00 11458.80 193.26 3819.60	Vertical V V V V V Horizontal	-43.09 -20.61 -28.83 -37.9440.15 -22.83				
3819.60 5729.40 7639.20 9549.00 11458.80 193.26 3819.60 5729.40	Vertical V V V V V Horizontal H H	-43.09 -20.61 -28.83 -37.9440.15 -22.83 -30.96	-13.00	Pass		

Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. Remark"---" means that the emission level is too low to be measured
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6.12 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part2.1055(a)(1)(b)			
Test Method:	FCC Part2.1055(a)(1)(b)			
Limit:	2.5ppm			
Test setup:	Spectrum analyzer EUT Variable Power Supply Note: Measurement setup for testing on Antenna connector			
Test procedure:	 The equipment under test was connected to an external DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25 operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20 . After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 increased per stage until the highest temperature of +50 reached. 			
Test Instruments:	Refer to section 5.8 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			

Measurement Data

Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Dower complied (//de)	Temperature ()	Frequer	cy error	Limit (ppm)	Result
Power supplied (vac)		Hz	ppm		
	-20	51	0.0610		
	-10	49	0.0586		Pass
	0	45	0.0538		
2.70	10	46	0.0550	0.5	
3.70	20	43	0.0514	2.5	
	30	48	0.0574		
	40	46	0.0550		
	50	47	0.0562		
Refe	rence Frequency: PC	CS1900 Middle ch	annel=661 chann	el=1880MHz	
Dower complied (//de)	Tomporatura ()	Frequency error		Limeit (mmma)	Desuit
Power supplied (Vdc)	Temperature ()	Hz	ppm	Limit (ppm)	Result
	-20	50	0.0266		
	-10	52	0.0277		
	0	53	0.0282	2.5 F	
	10	44	0.0234		
3.70	20	40	0.0213		Pass
	30	41	0.0218		
	40	43	0.0229		
	50	48	0.0255		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6.13 Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	Spectrum analyzer EUT Variable Power Supply Note: Measurement setup for testing on Antenna connector
Test procedure:	 Set chamber temperature to 25 . Use a variable DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Measurement Data						
Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz						
Temperature ()	Power supplied	Frequency error		Limit (ppm)	Result	
	(Vdc)	Hz	ppm	Еппі (рріп)	Nesuit	
	4.25	46	0.0550			
25	3.70	43	0.0514	2.5	Pass	
	3.40	41	0.0490			
Refe	rence Frequency: PO	CS1900 Middle ch	annel=661 chanr	nel=1880MHz		
Tomporatura ()	Power supplied	Frequency error		Limit (nnm)	Dogult	
Temperature ()	(Vdc)	Hz	ppm	Limit (ppm)	Result	
	4.25	43	0.0229			
25	3.70	42	0.0223	2.5	Pass	
	3.40	45	0.0239			

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960