



Shenzhen CTL Electromagnetic Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 22 AND PART 24 TEST REPORT

FCC Part 22 Subpart H / Part 24 Subpart E

Report Reference No......: **CTL1312121961-WU**

Compiled by

(position+printed name+signature)...: File administrators Jacky Chen

Jacky Chen

Name of the

organization performing the tests Test Engineer Tracy Qi

(position+printed name+signature)...:

Tracy Qi

Approved by

(position+printed name+signature)...: Manager Tracy Qi

Tracy Qi

Date of issue.....: Dec. 28, 2013

Representative Laboratory Name : **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shaheixi Road,
Nanshan District, Shenzhen, China 518055

Test Firm.....: **Bontek Compliance Testing Laboratory Ltd**

Address.....: 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Applicant's name.....: **DORRY ELECTRONICS INTERNATIONAL CO.,LTD**

Address.....: F/2, 3-4 Lane, Guangya Yuan, Bantian Town, Longgang District,
Shenzhen City, China

Test specification:

Standard: **FCC CFR Title 47 Part 2, Part 22H and Part 24E**

EIA/TIA 603-C: 2004

Master TRF.....: Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : **2G Phone Tablet PC**

FCC: **Z75TB650**

ID.....:

Trade Mark: N/A

Model/Type reference.....: TB-650, TB-726G, TB-782G, TB-M77, TB-798M, TB-677M,
TB-720M, TB-A31G

GSM

Transmit: GSM 850: 824~849MHz, PCS 1900: 1850~1910MHz

Receive: GSM 850: 869~894MHz, PCS 1900: 1930~1990MHz

Release Version: R99

Type of modulation: GMSK for GSM/GPRS

8PSK for EDGE

GPRS Type: Class B

GPRS Class: Class 12

Bluetooth

Work frequency: 2402~2480MHz

Version.....: V3.0 + HS

Type of modulation: FHSS

Data Rate.....: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)

Wi-Fi

Work frequency: 802.11b/g/n(20MHz): 2412~2462MHz

Type of modulation: 802.11b DSSS, 802.11g/n: OFDM

Data Rate.....: 802.11b: 1/2/5.5/11 Mbps

802.11g: 6/9/12/18/24/36/48/54 Mbps

802.11n: up to 65 Mbps

Antenna Gain: 0 dBi for GSM850 and PCS1900

-2.0 dBi for Bluetooth and Wi-Fi

Antenna type: Internal

Result.....: **Positive**



TEST REPORT

Test Report No. :	CTL1312121961-WU	Dec. 28, 2013 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : **2G Phone Tablet PC**

Model /Type : TB-650

Listed Models : TB-726G, TB-782G, TB-M77, TB-798M, TB-677M,
TB-720M, TB-A31G

Different Description : Only model's name and colour are different based on
marketing requirement.

Applicant : **DORRY ELECTRONICS INTERNATIONAL CO.,LTD**

Address : F/2, 3-4 Lane,Guangya Yuan,Bantian Town, Longgang
District, Shenzhen City, China

Manufacturer **DORRY ELECTRONICS INTERNATIONAL CO.,LTD**

Address F/2, 3-4 Lane,Guangya Yuan,Bantian Town, Longgang
District, Shenzhen City, China

Test Result according to the
standards on page 5:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	5
2. SUMMARY	6
2.1. General Remarks	6
2.2. Equipment Under Test	6
2.3. Short description of the Equipment under Test (EUT)	6
2.4. EUT operation mode	6
2.5. EUT configuration	7
2.6. Related Submittal(s) / Grant (s)	7
2.7. Modifications	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory	8
3.2. Test Facility	8
3.3. Environmental conditions	8
3.4. Configuration of Tested System	8
3.5. EUT Exercise Software	9
3.6. Statement of the measurement uncertainty	9
3.7. Equipments Used during the Test	10
3.8. Summary of Test Result	11
4. TEST CONDITIONS AND RESULTS	12
4.1. Peak Output Power	12
4.2. Modulation Characteristic	18
4.3. Occupied Bandwidth	19
4.4. Spurious Emission At Antenna Terminals (+/- 1MHz)	32
4.5. Spurious Emission	39
4.6. Frequency Stability under Temperature & Voltage Variations	40
5. TEST SETUP PHOTOS OF THE EUT	66
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	73

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 Subpart H:](#) Public Mobile Services

[FCC Part 24 Subpart E:](#) Personal Communications Services

[EIA/TIA 603-C: 2004](#)

[FCC CFR Title 47 Part 2](#)



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Dec. 18, 2013

Testing commenced on : Dec. 18, 2013

Testing concluded on : Dec. 28, 2013

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : ☒ 120V / 60 Hz ☐ 115V / 60Hz
☐ 12 V DC ☐ 24 V DC
☒ Other (specified in blank below)

DC 3.7V from battery

2.3. Short description of the Equipment under Test (EUT)

The EUT is a **2G Phone Tablet PC** with GSM850/1900MHz, Bluetooth and wifi function.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

CTL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GSM850
Mode 2: PCS1900
Mode 3: GPRS850
Mode 4: GPRS1900
Mode 5: EDGE850
Mode 6: EDGE1900

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- o - supplied by the manufacturer
- o - supplied by the lab

0 Manufacturer :
Model No. :


0 Manufacturer :
Model No. :

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: Z75TB650 filing to comply with of the FCC Part 22 and Part 24 Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

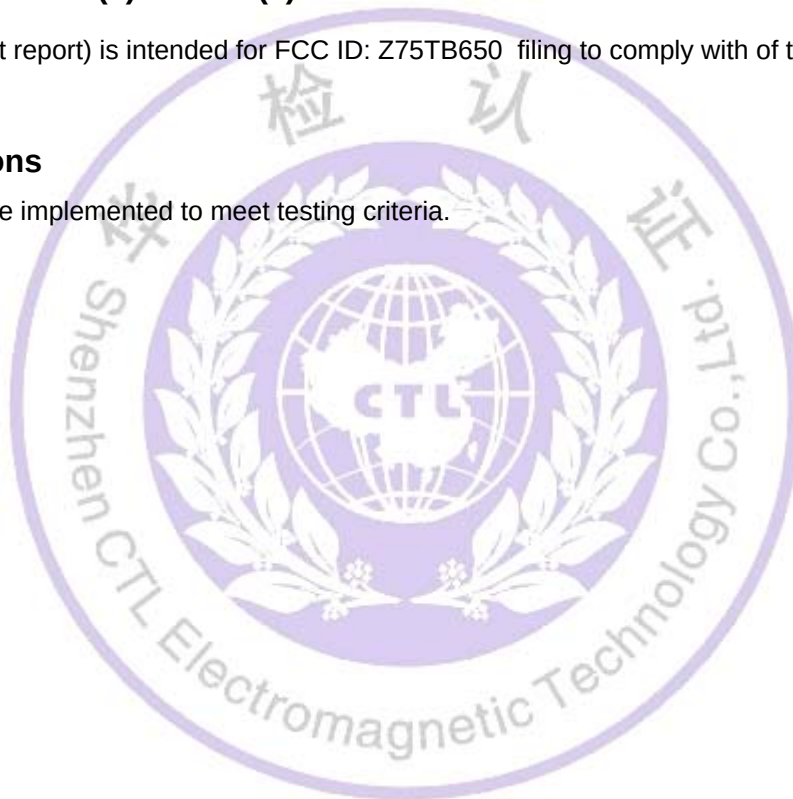

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

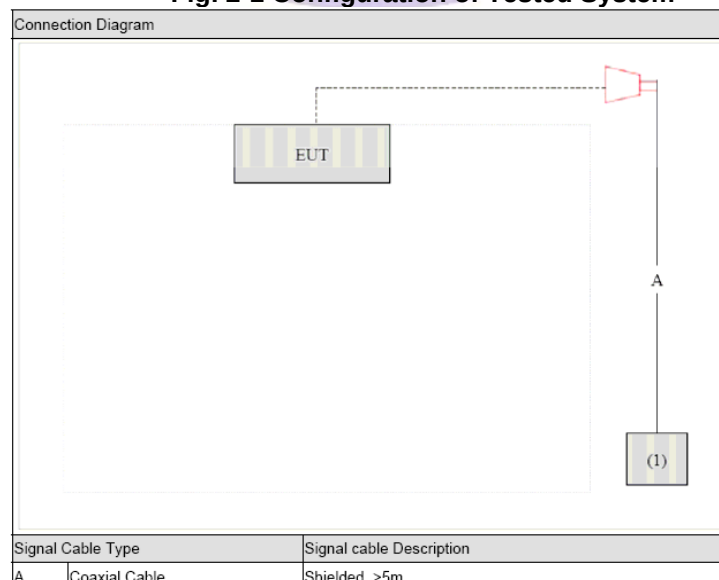

3.5. EUT Exercise Software

1. Setup the EUT and simulators as shown on above.
2. Turn on the power of all equipment.
3. EUT Communicate with CMU200, then select channel to test.


3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

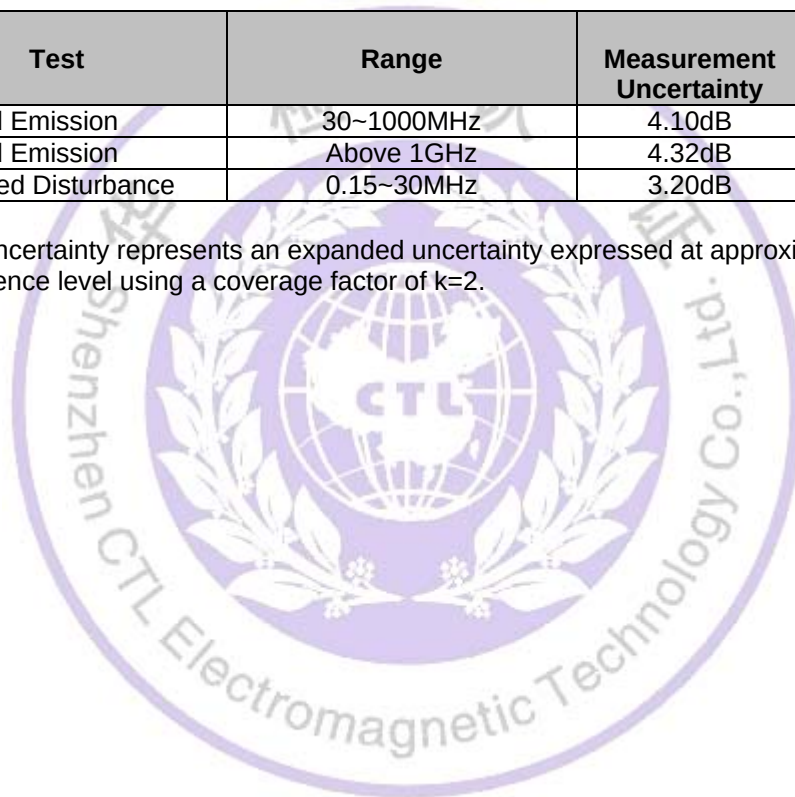

3.7. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2013/04/14	2014/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2013/04/14	2014/04/13
3	Dual Directional Coupler	Agilent	778D	2013/04/14	2014/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2013/04/14	2014/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2013/04/14	2014/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2013/04/14	2014/04/13
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2013/04/14	2014/04/13
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2013/04/14	2014/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2013/04/14	2014/04/13
10	AC Power Supply	IDRC	CF-500TP	2013/04/14	2014/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2013/04/14	2014/04/13
12	RF Current Probe	FCC	F-33-4	2013/04/14	2014/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2013/04/14	2014/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2013/04/14	2014/04/13
15	Amplifier	HP	8447D	2013/04/14	2014/04/13
16	SIGNAL GENERATOR	HP	8647A	2013/04/14	2014/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2013/04/14	2014/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2013/04/14	2014/04/13
19	EMI Test Receiver	R&S	ESPI	2013/04/14	2014/04/13
20	Loop Antenna	ZHINAN	ZN30900A	2013/04/14	2014/04/13
21	Horn Antenna	Schwarzbeck	BBHA9120D	2013/04/14	2014/04/13
22	Horn Antenna	Schwarzbeck	BBHA9170	2013/04/14	2014/04/13
23	Spectrum Analyzer	Agilent	E4446A	2013/04/14	2014/04/13
24	Wideband Peak Power Meter	Anritsu	ML2495A	2013/04/14	2014/04/13
25	Power Sensor	Anritsu	MA2411B	2013/04/14	2014/04/13
26	Climate Chamber	ESPEC	EL-10KA	2013/04/14	2014/04/13

3.8. Summary of Test Result

No deviations from the test standards

For GSM 850 (FCC Part 22H & Part 2)

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 22.913(a)(2) and Part 2.1046 EIA/TIA 603-C	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 22.917(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 22.917(b) and Part 2.1051, 2.1053 EIA/TIA 603-C	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 22.355 and 2.1055 EIA/TIA 603-C	Yes	No

For PCS 1900 (FCC Part 24E & Part 2)


Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 24.232(b) and Part 2.1046 EIA/TIA 603-C	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 24.238(b) and Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 24.238(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 24.238(b) and Part 2.1051, 2.1053 EIA/TIA 603-C	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 24.235 and 2.1055 EIA/TIA 603-C	Yes	No

4. TEST CONDITIONS AND RESULTS


4.1. Peak Output Power

TEST CONFIGURATION

Conducted Power Measurement:

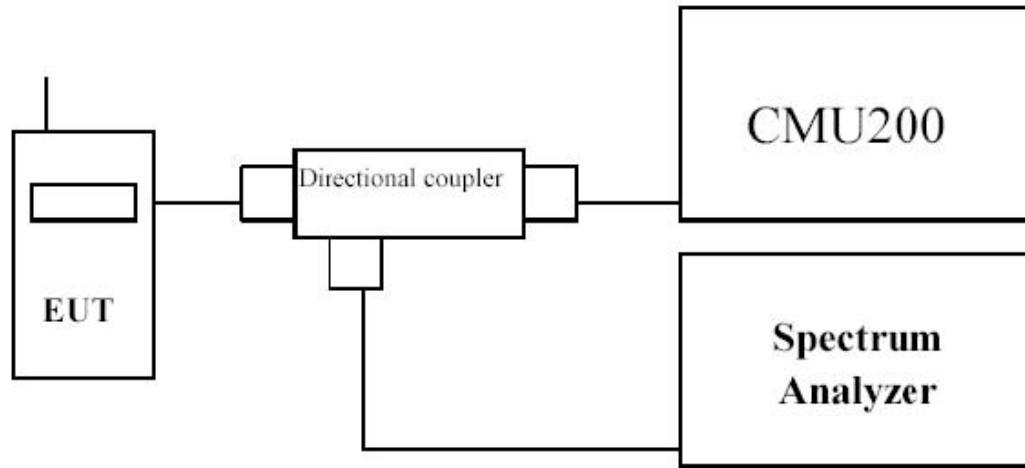

Radiated Power Measurement:

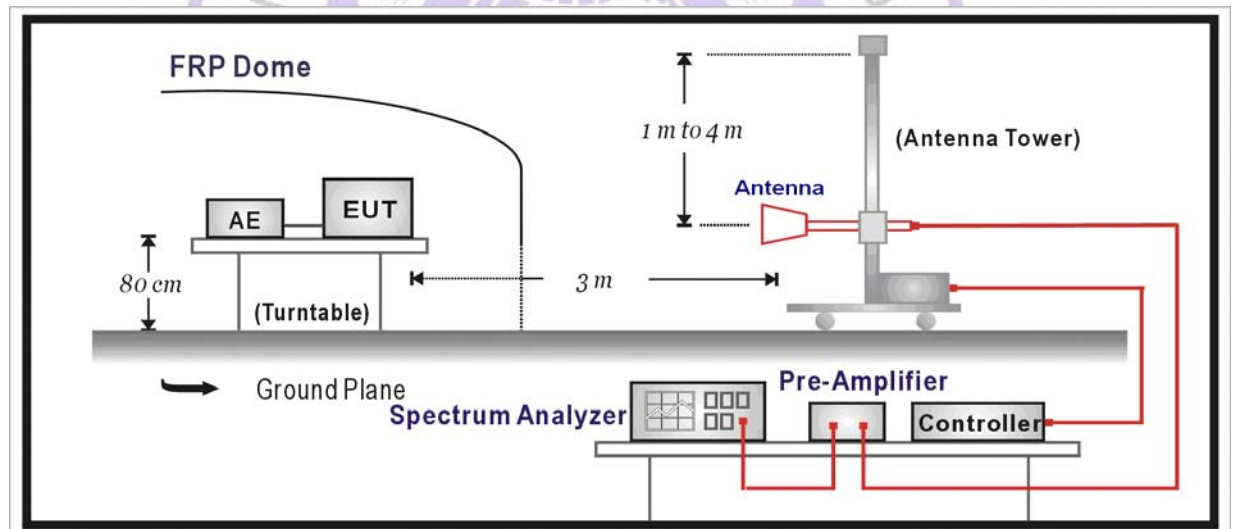

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4: 2003.

Base station simulator settings for each test mode:

1. For GSM/GPRS
Configure R&S CMU200 to support GMSK and 8PSK call respectively, and set one timeslot transmission for GMSK GSM/GPRS and 8PSK EDGE.
Measure and record power outputs for both modulations.

LIMIT

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

TEST RESULTS

Product	2G Phone Tablet PC
Test Item	Peak Output Power
Date of Test	2013/12/25

GSM 850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	32.98	30.49	38.50
189	836.4	GMSK	32.76	32.44	38.50
251	848.8	GMSK	32.57	33.14	38.50

PCS1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	24.54	22.77	33.00
661	1880.0	GMSK	24.24	23.12	33.00
810	1909.8	GMSK	24.01	23.06	33.00

Note: The maximum PAR for PCS1900 is 9.6dB less than 13 dB.

GPRS 850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	32.97	29.82	38.50
189	836.4	GMSK	32.75	32.35	38.50
251	848.8	GMSK	32.51	32.90	38.50

GPRS1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	24.41	22.57	33.00
661	1880.0	GMSK	24.06	23.56	33.00
810	1909.8	GMSK	23.83	23.95	33.00

Note: The maximum PAR for GPRS1900 is 10.2dB less than 13 dB.

EDGE 850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	24.11	24.29	38.50
189	836.4	GMSK	24.00	25.16	38.50
251	848.8	GMSK	24.12	25.33	38.50

EDGE1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	19.89	18.81	33.00
661	1880.0	GMSK	19.74	19.19	33.00
810	1909.8	GMSK	19.17	19.38	33.00

Note: The maximum PAR for GPRS1900 is 7.4dB less than 13 dB.

Radiated Measurement

GSM850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.20	-13.60	H	19.35	0.73	-0.02	18.60	38.50	-19.90
824.20	-1.00	V	31.24	0.73	-0.02	30.49	38.50	-8.01
Middle Channel 189 (836.40MHz)								
836.40	-17.09	H	15.36	0.76	0.10	14.70	38.50	-23.80
836.40	1.45	V	33.10	0.76	0.10	32.44	38.50	-6.06
High Channel 251 (848.80MHz)								
848.80	-16.74	H	16.35	0.75	0.13	15.73	38.50	-22.77
848.80	1.17	V	33.76	0.75	0.13	33.14	38.50	-5.36

PCS1900


Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.20	8.10	H	17.02	1.22	4.64	20.44	33.00	-12.56
1850.20	9.40	V	19.35	1.22	4.64	22.77	33.00	-10.23
Middle Channel 661 (1880.00MHz)								
1880.00	8.13	H	17.53	1.20	4.59	20.92	33.00	-12.08
1880.00	10.18	V	19.73	1.20	4.59	23.12	33.00	-9.88
High Channel 810 (1909.80MHz)								
1909.80	7.64	H	17.43	1.22	4.54	20.75	33.00	-12.25
1909.80	9.62	V	19.74	1.22	4.54	23.06	33.00	-9.94

GPRS850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.20	-14.60	H	18.35	0.73	-0.02	17.60	38.50	-20.90
824.20	-1.67	V	30.57	0.73	-0.02	29.82	38.50	-8.68
Middle Channel 189 (836.40MHz)								
836.40	-16.12	H	16.33	0.76	0.10	15.67	38.50	-22.83
836.40	1.36	V	33.01	0.76	0.10	32.35	38.50	-6.15
High Channel 251 (848.80MHz)								
848.80	-16.35	H	16.74	0.75	0.13	16.12	38.50	-22.38
848.80	0.93	V	33.52	0.75	0.13	32.90	38.50	-5.60

GPRS1900

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.20	8.32	H	17.24	1.22	4.64	20.66	33.00	-12.34
1850.20	9.20	V	19.15	1.22	4.64	22.57	33.00	-10.43
Middle Channel 661 (1880.00MHz)								
1880.00	8.25	H	17.65	1.20	4.59	21.04	33.00	-11.96
1880.00	10.62	V	20.17	1.20	4.59	23.56	33.00	-9.44
High Channel 810 (1909.80MHz)								
1909.80	8.63	H	18.40	1.22	4.54	21.72	33.00	-11.28
1909.80	10.51	V	20.63	1.22	4.54	23.95	33.00	-9.05

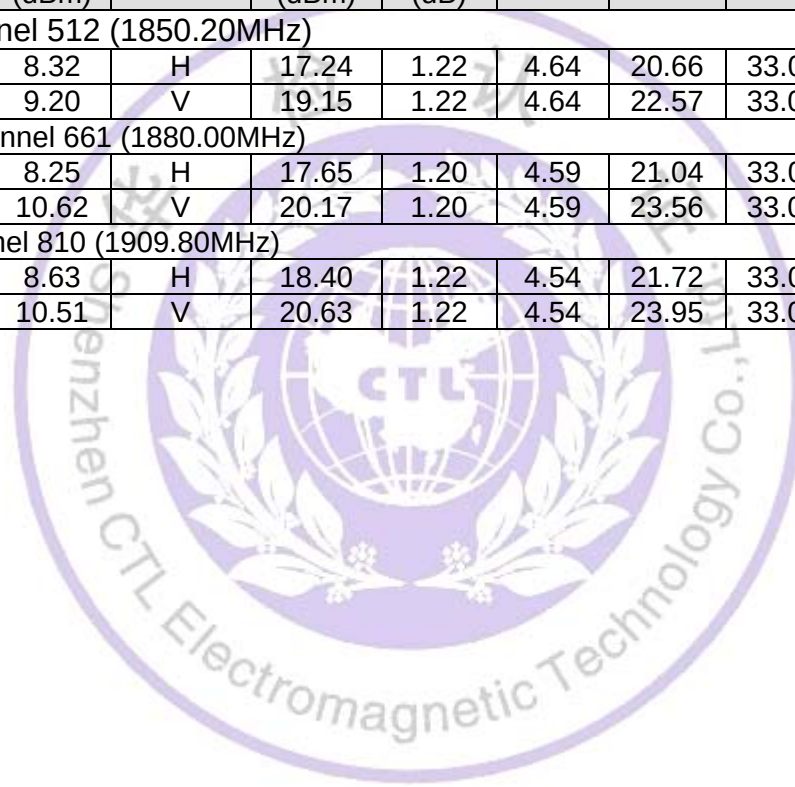


EDGE850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.20	-21.07	H	11.88	0.73	-0.02	11.13	38.50	-27.37
824.20	-7.20	V	25.04	0.73	-0.02	24.29	38.50	-14.21
Middle Channel 189 (836.40MHz)								
836.40	-18.52	H	13.93	0.76	0.10	13.27	38.50	-25.23
836.40	-5.84	V	25.82	0.76	0.10	25.16	38.50	-13.34
High Channel 251 (848.80MHz)								
848.80	-19.49	H	13.60	0.75	0.13	12.98	38.50	-25.52
848.80	-6.64	V	25.95	0.75	0.13	25.33	38.50	-13.17


EDGE1900

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.20	2.93	H	11.85	1.22	4.64	15.27	33.00	-17.73
1850.20	5.44	V	15.39	1.22	4.64	18.81	33.00	-14.19
Middle Channel 661 (1880.00MHz)								
1880.00	3.97	H	13.37	1.20	4.59	16.76	33.00	-16.24
1880.00	6.25	V	15.80	1.20	4.59	19.19	33.00	-13.81
High Channel 810 (1909.80MHz)								
1909.80	3.83	H	13.60	1.22	4.54	16.92	33.00	-16.08
1909.80	5.94	V	16.06	1.22	4.54	19.38	33.00	-13.62

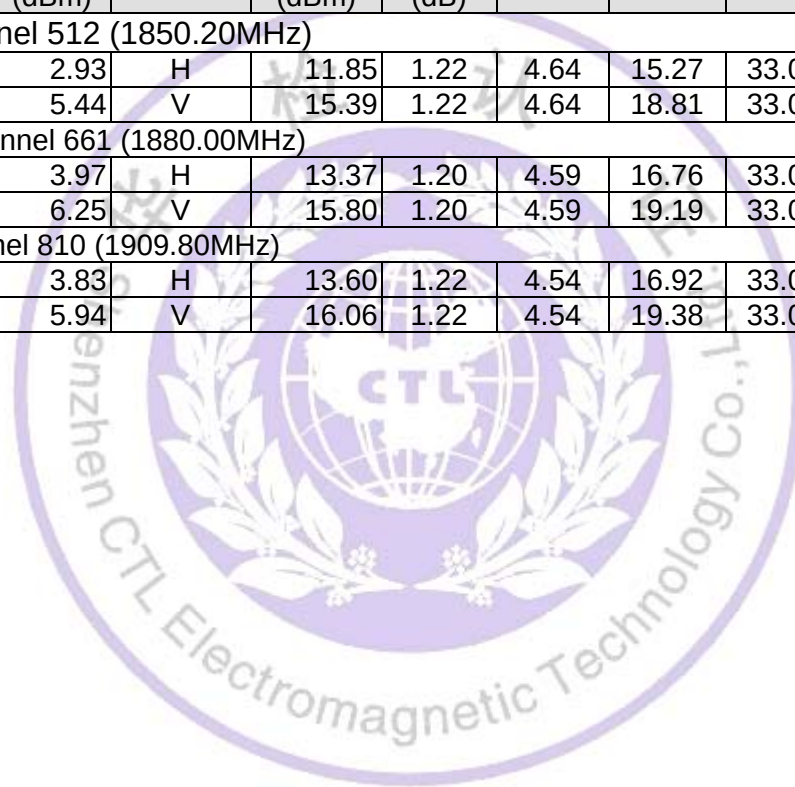

4.2. Modulation Characteristic

TEST CONFIGURATION

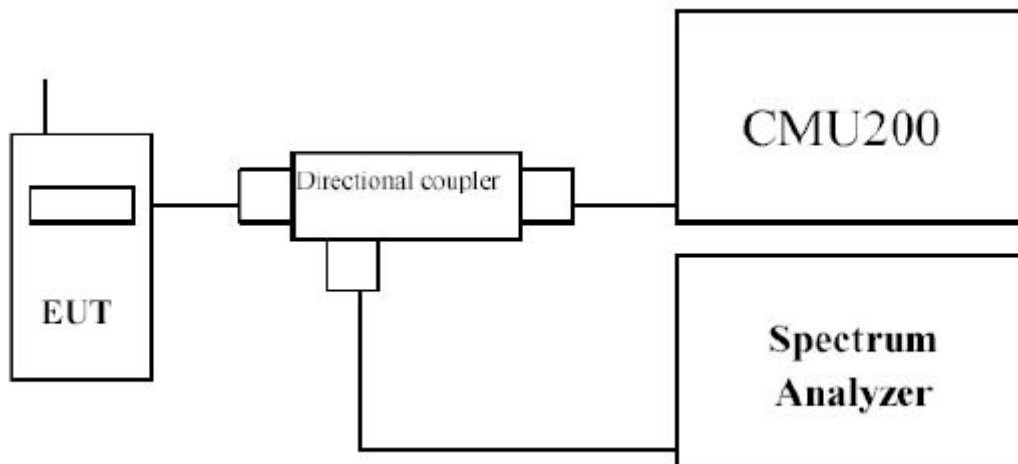

LIMIT

N/A

TEST PROCEDURE

GMSK is a form of binary signaling schemes which represent digital states as a shift between discrete sinusoidal frequencies called Frequency Shift Keying (FSK). Minimum Shift Keying (MSK) is continuous phase FSK with the smallest possible modulation index h . Modulation index is defined as:
 $h = 2 \cdot F \cdot T_b$
 where F = Peak frequency deviation in Hz and T_b = Bit period in seconds

Two discrete frequencies, representing two distinct digital states, with equal phases at switch time $t = 0$ requires a minimum value of $h = 0.5$. The Gaussian part of GMSK describes the fact that the digital pulses are filtered in the time domain. This results in bits which are sinusoidal rather than square. The effective spectrum is then compressed with the average carrier frequency in the center of the passband. This is a great advantage because of the significantly reduced bandwidth. GMSK is utilized because of these bandwidth conservation properties.

The bandwidth for GSM is a 60 MHz up-link at 1850-1910 MHz and down-link at 1930-1990 MHz. The 65 MHz is divided into 299 channels, each of which is 200 kHz wide. Slight spectral spillage is allowed into neighboring channels (which is minimized by GMSK). This separated transmit/receive frequencies scheme under GSM enables easier duplex filtering.


Within the bandwidth, individual channels are subdivided into multiframes (made of 26 frames), frames (made of 8 time slots), and time slots (made of 8 fields). The time slots are 0.57 ms long allowing 156.25 bits of information including overhead.

TEST RESULTS

The modulation of GSM was verified and confirmed compliance with requirement.

4.3. Occupied Bandwidth

TEST CONFIGURATION

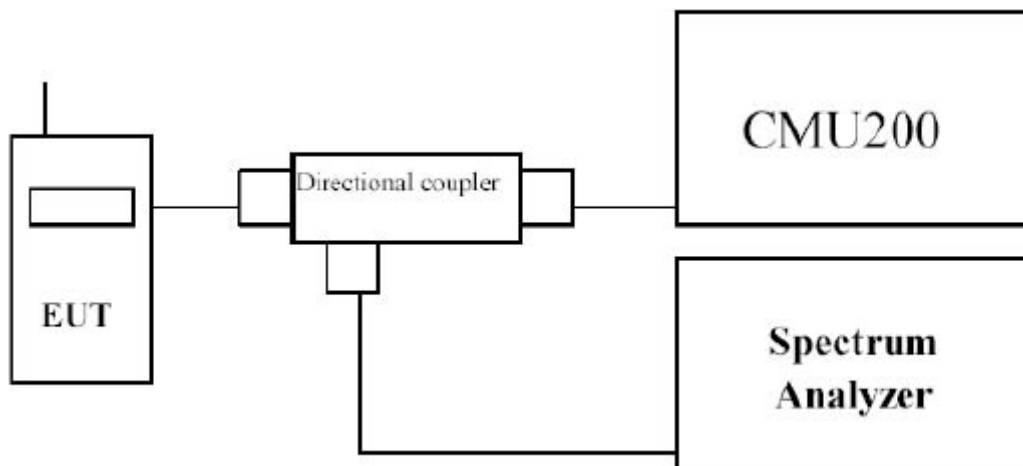

TEST PROCEDURE

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:

For GPRS/EDGE 850/1900 test --- RBW = 3 kHz and VBW = 10 kHz

For WCDMA FDD Band II/V test --- RBW = 50 kHz and VBW = 200 kHz

LIMIT

N/A

TEST RESULTS

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 1: GSM 850 Link
Date of Test	2013/12/22

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	313.30	245.31
189	836.40	310.30	244.48
251	848.80	316.40	246.12

Figure Channel 128 (824.20MHz)

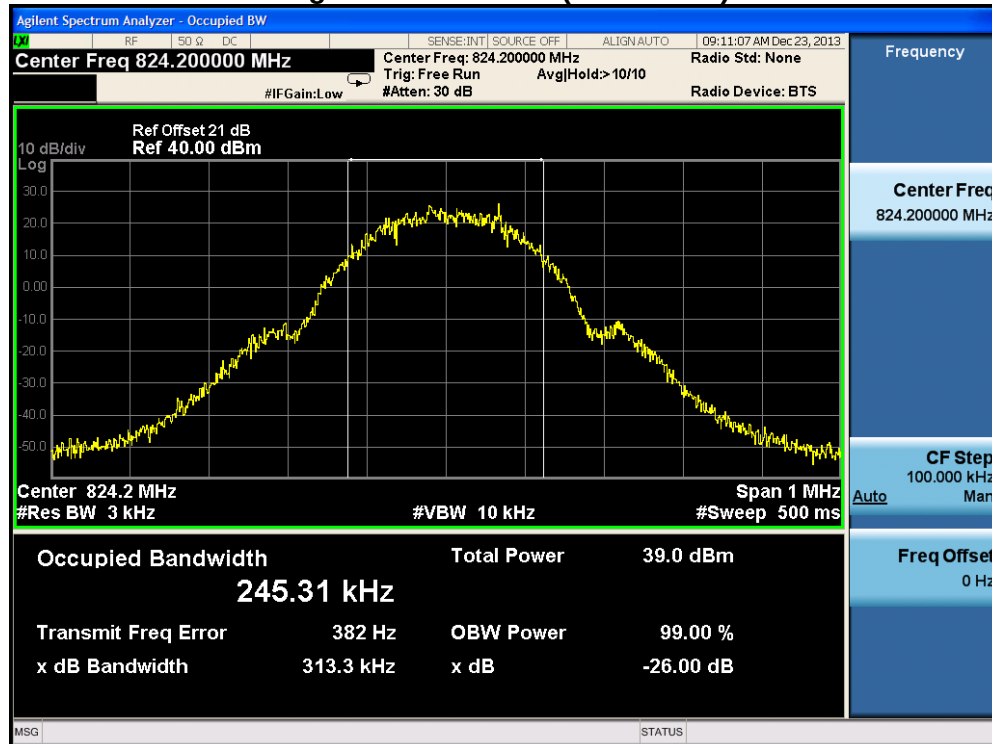


Figure Channel 189 (836.40MHz)


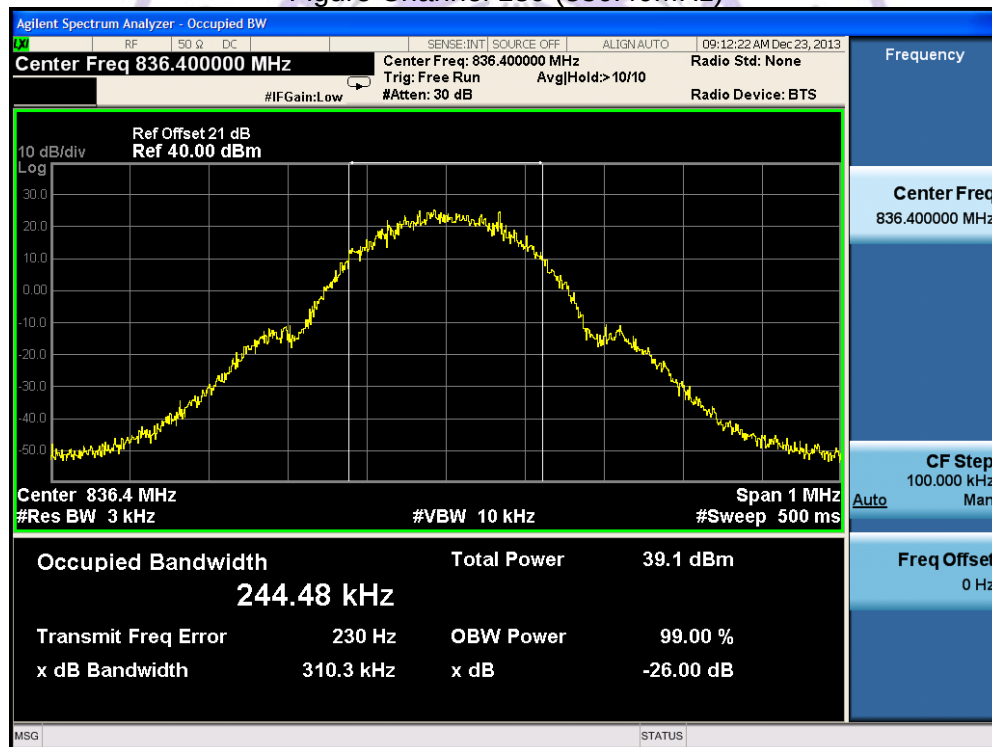


Figure Channel 251 (848.80MHz)

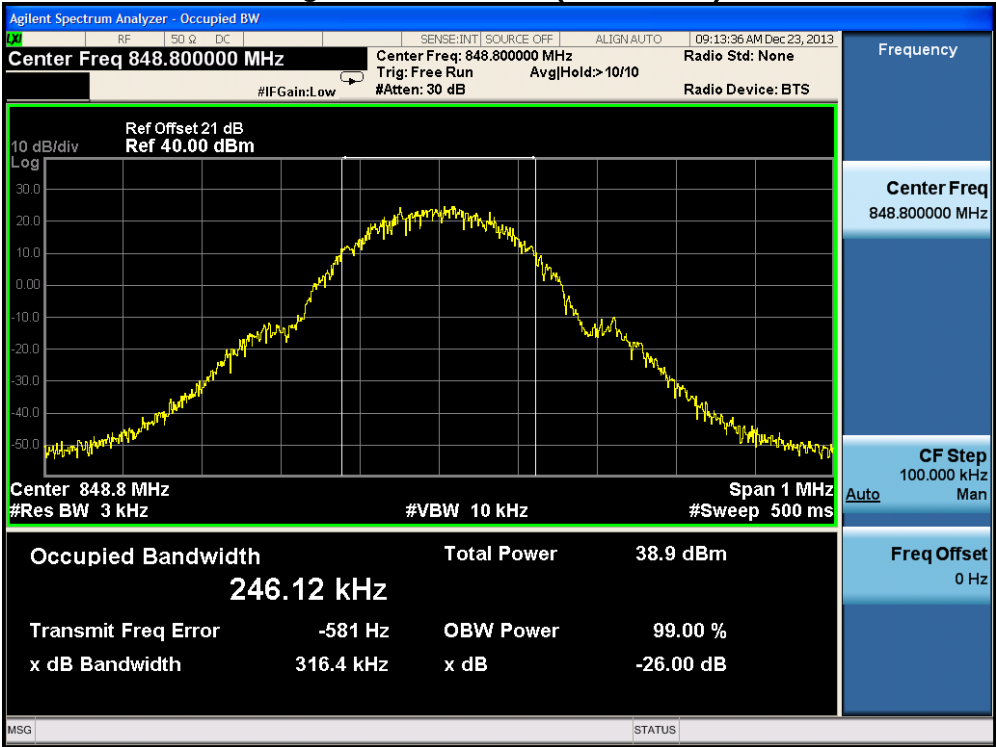

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 2: PCS 1900 Link
Date of Test	2013/12/22

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	308.50	242.82
661	1880.00	312.40	247.76
810	1909.80	319.70	246.36

Figure Channel 512 (1850.20MHz)

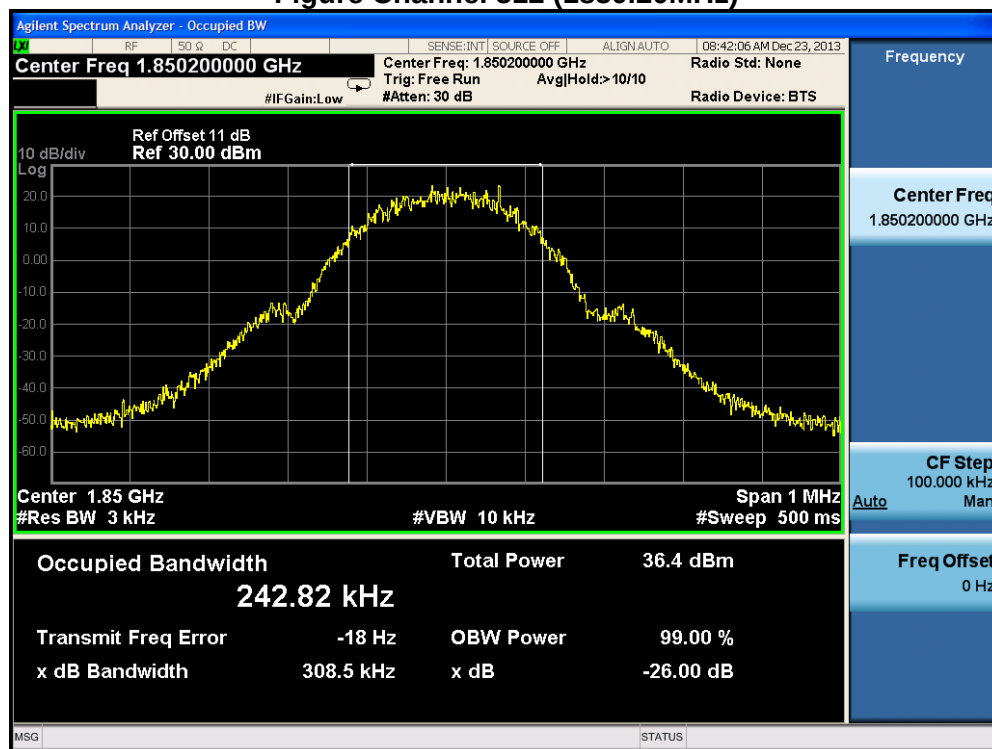


Figure Channel 661 (1880.00MHz)


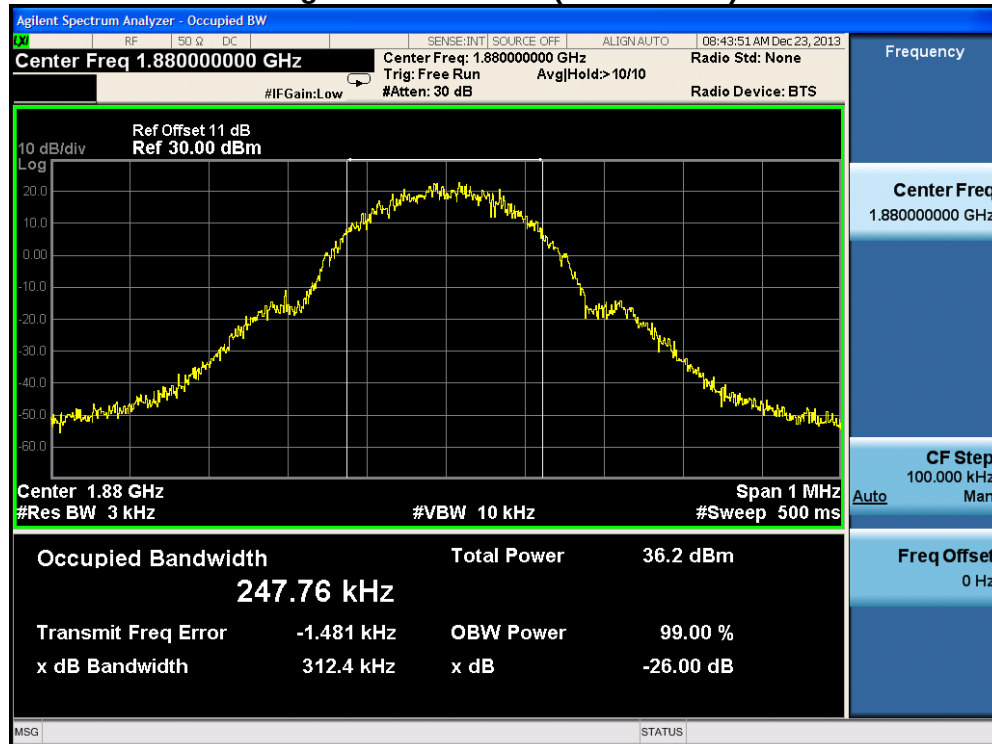


Figure Channel 810 (1909.80MHz)

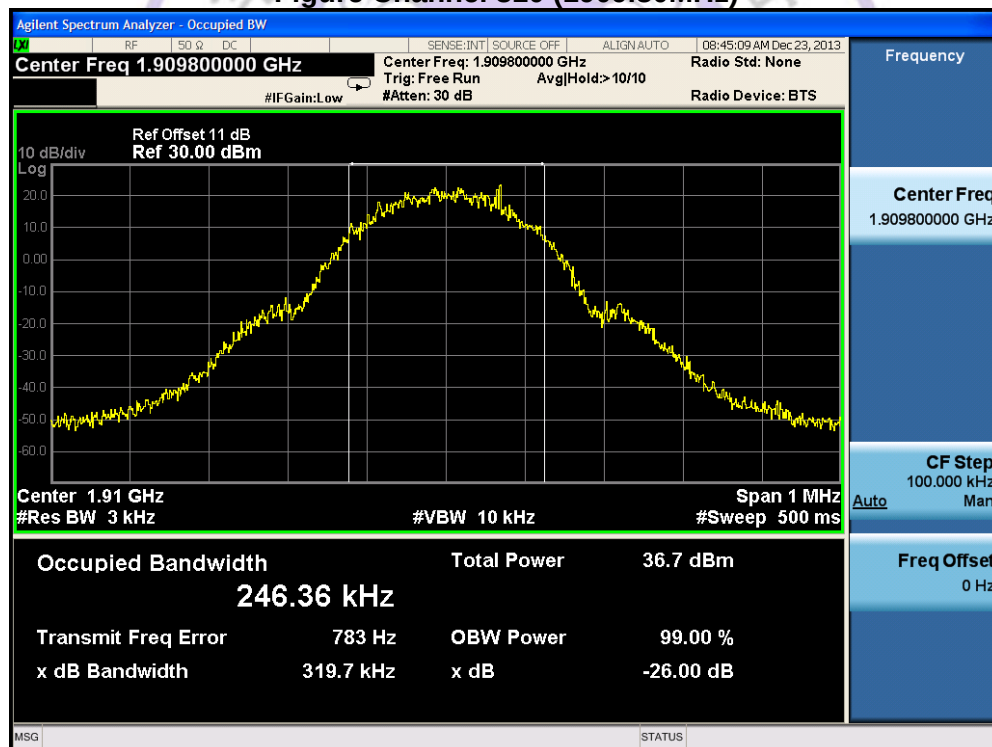

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 3: GPRS 850 Link
Date of Test	2013/12/22

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	312.60	238.23
189	836.40	311.30	236.53
251	848.80	313.10	237.37

Figure Channel 128 (824.20MHz)

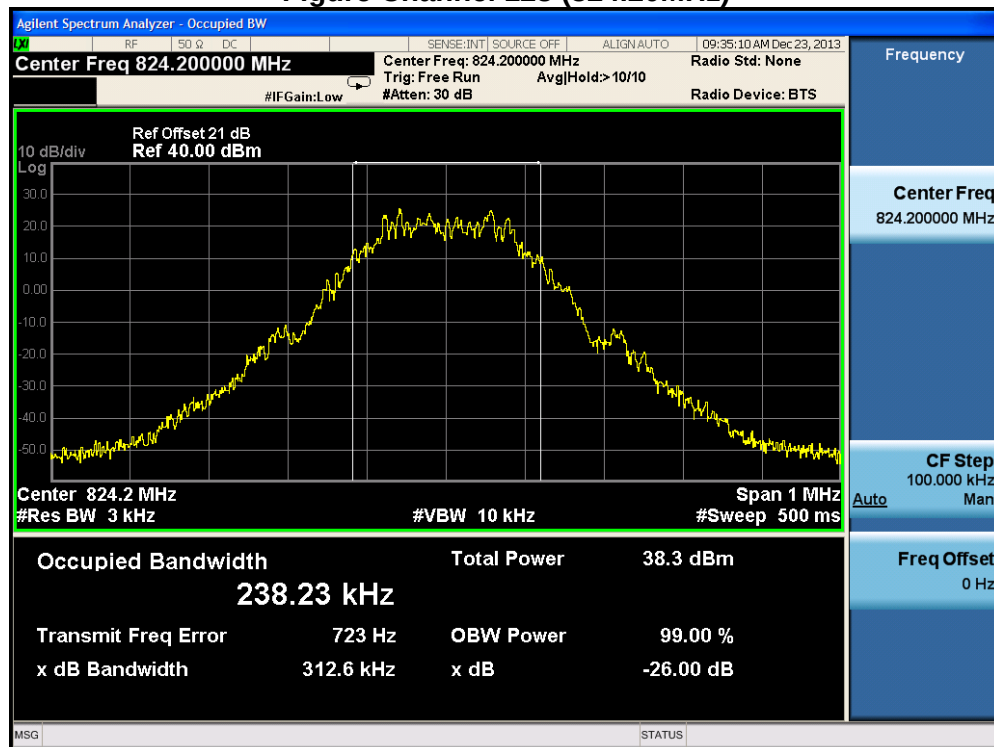


Figure Channel 189 (836.40MHz)


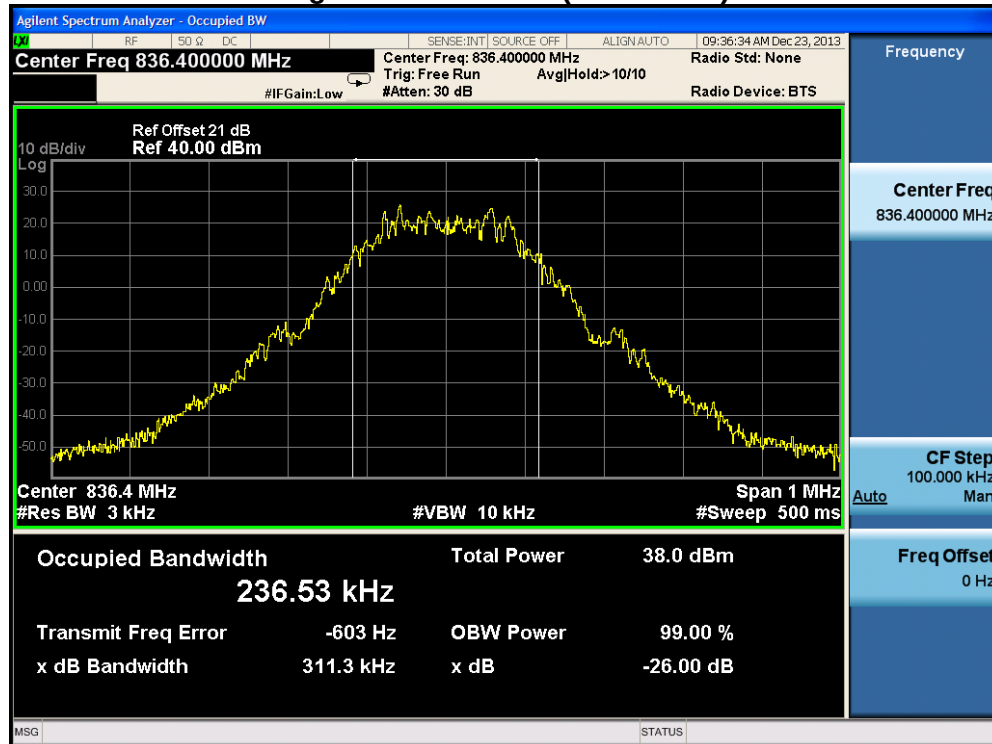


Figure Channel 251 (848.80MHz)

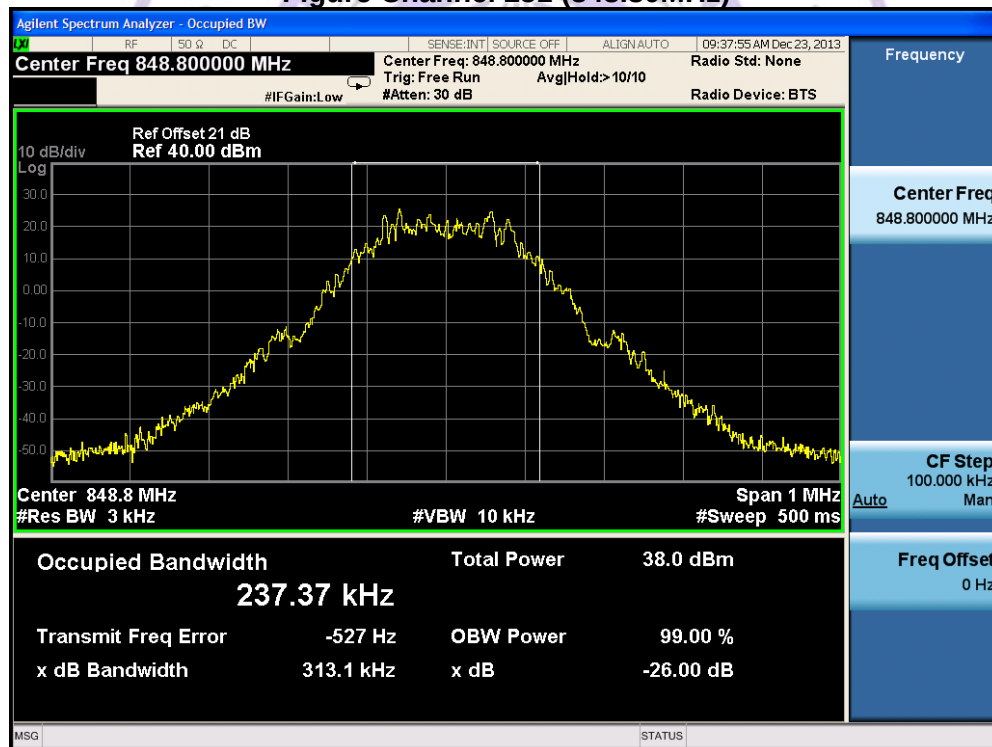

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 4: GPRS 1900 Link
Date of Test	2013/12/22

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	314.50	245.23
661	1880.00	315.20	246.79
810	1909.80	320.20	246.98

Figure Channel 512 (1850.20MHz)

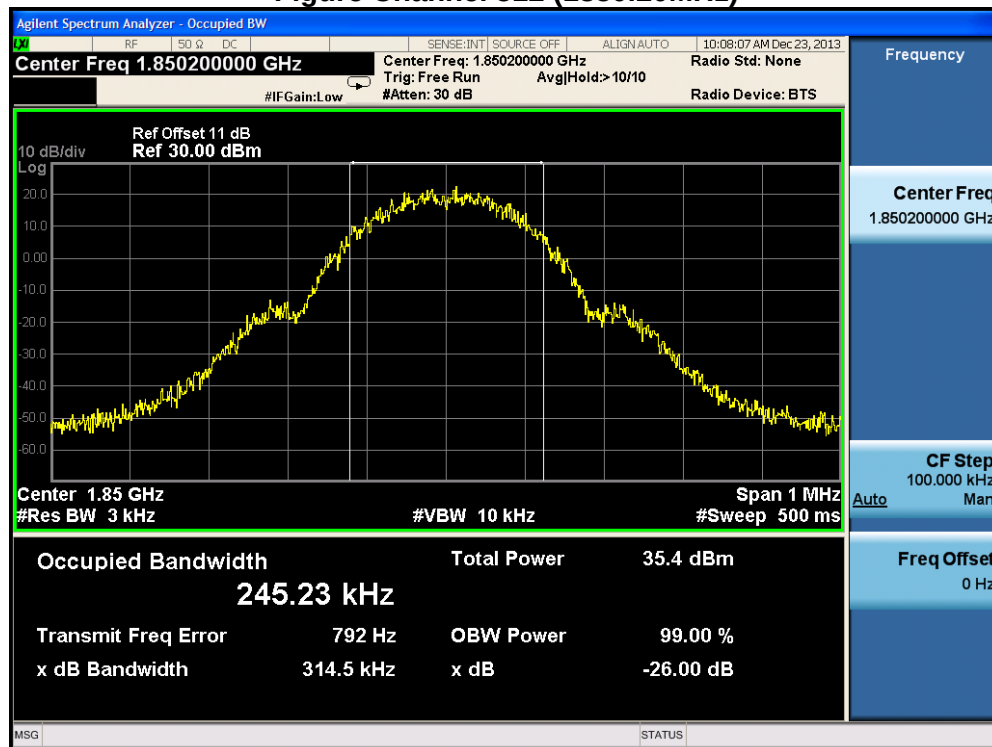


Figure Channel 661 (1880.00MHz)


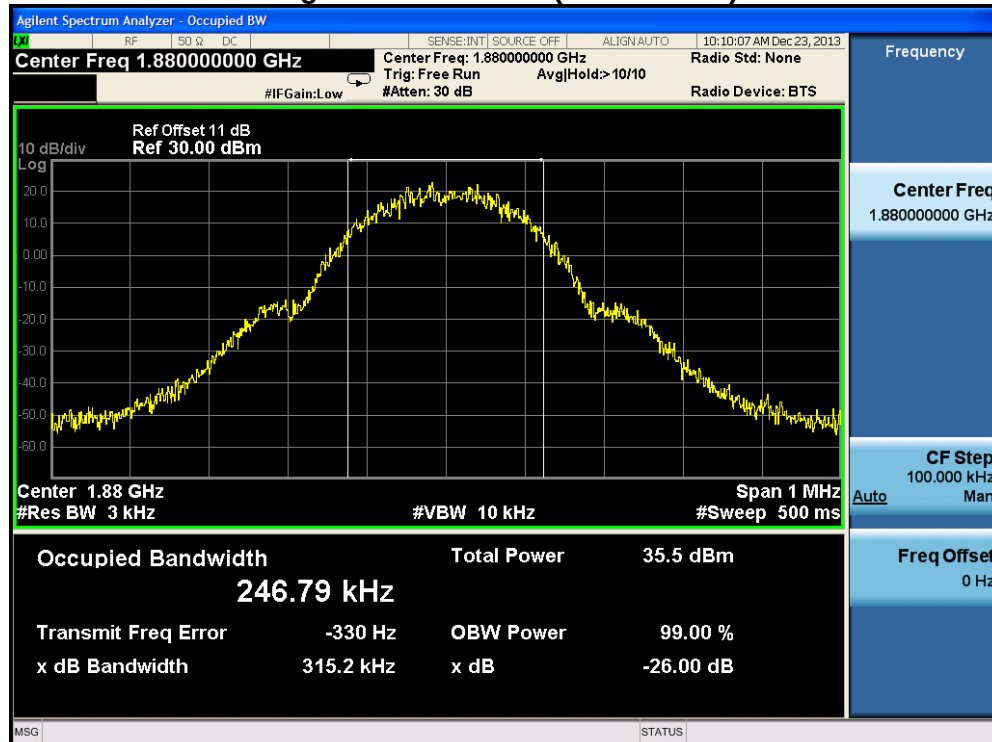


Figure Channel 810 (1909.80MHz)

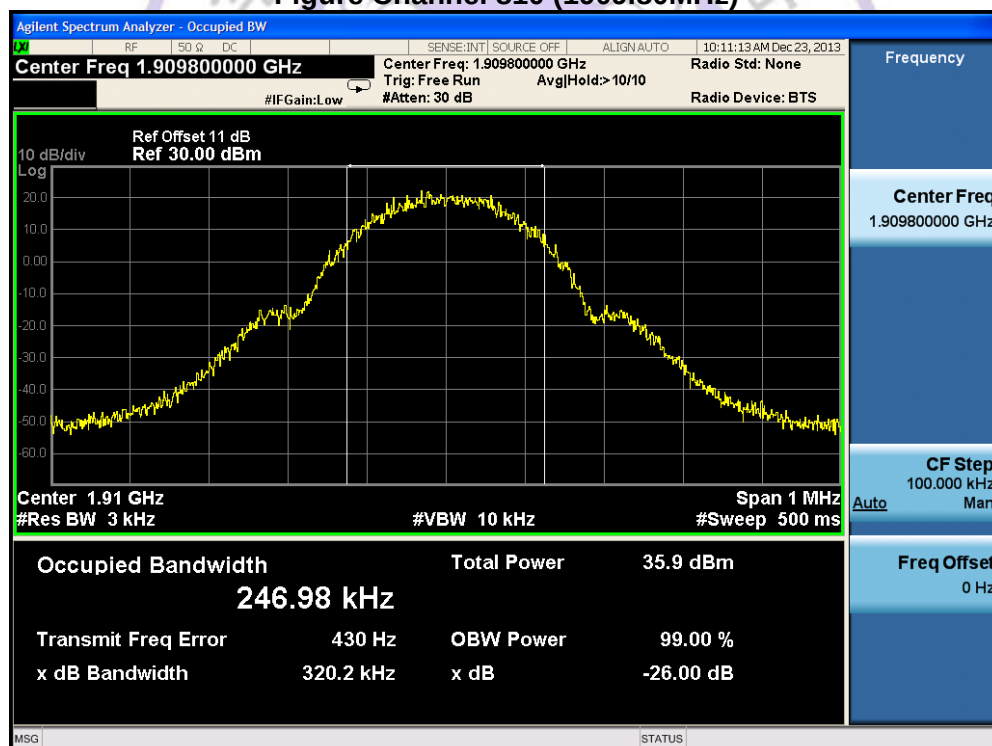

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 5: EDGE 850 Link
Date of Test	2013/12/25

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	280.00	234.91
189	836.40	293.10	239.72
251	848.80	313.60	248.74

Figure Channel 128 (824.20MHz)

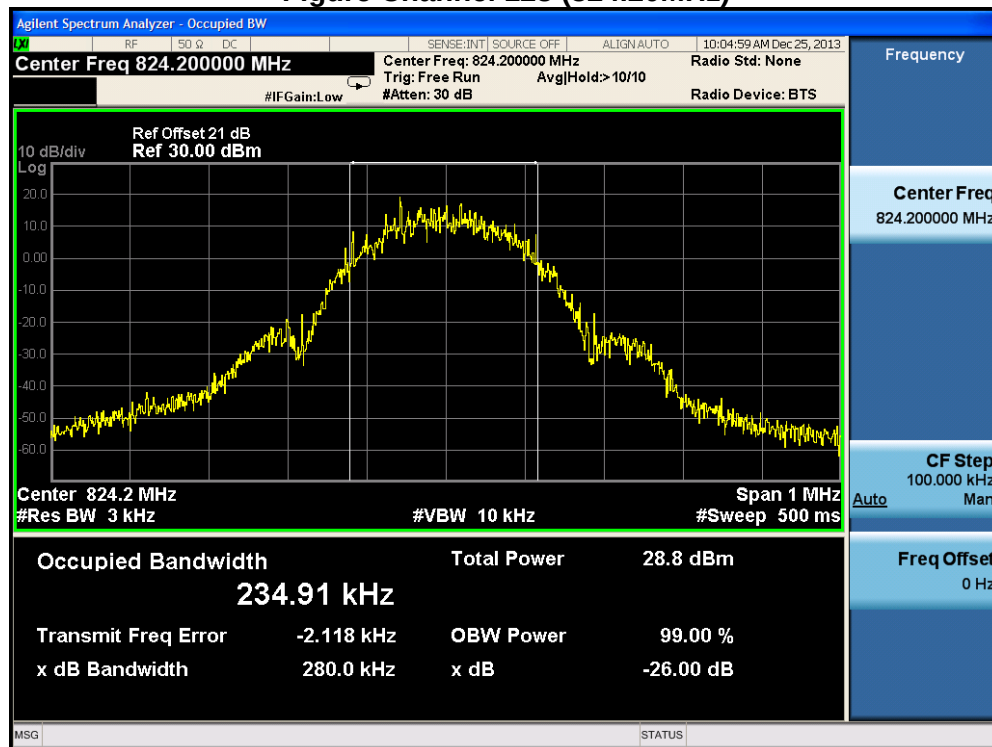


Figure Channel 189 (836.40MHz)


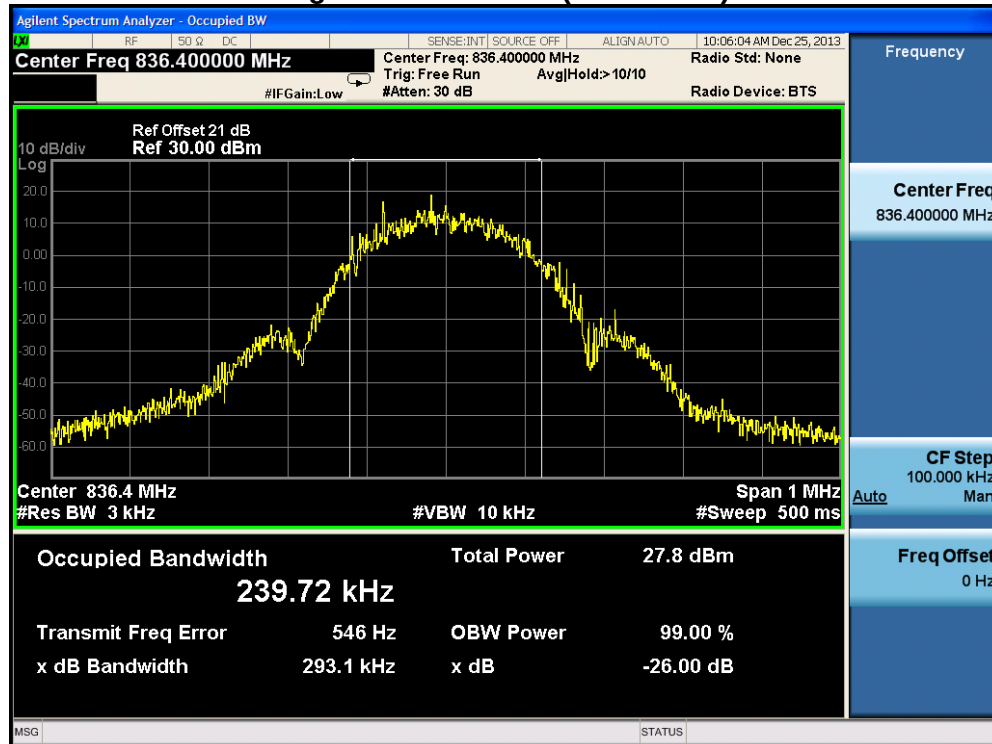


Figure Channel 251 (848.80MHz)

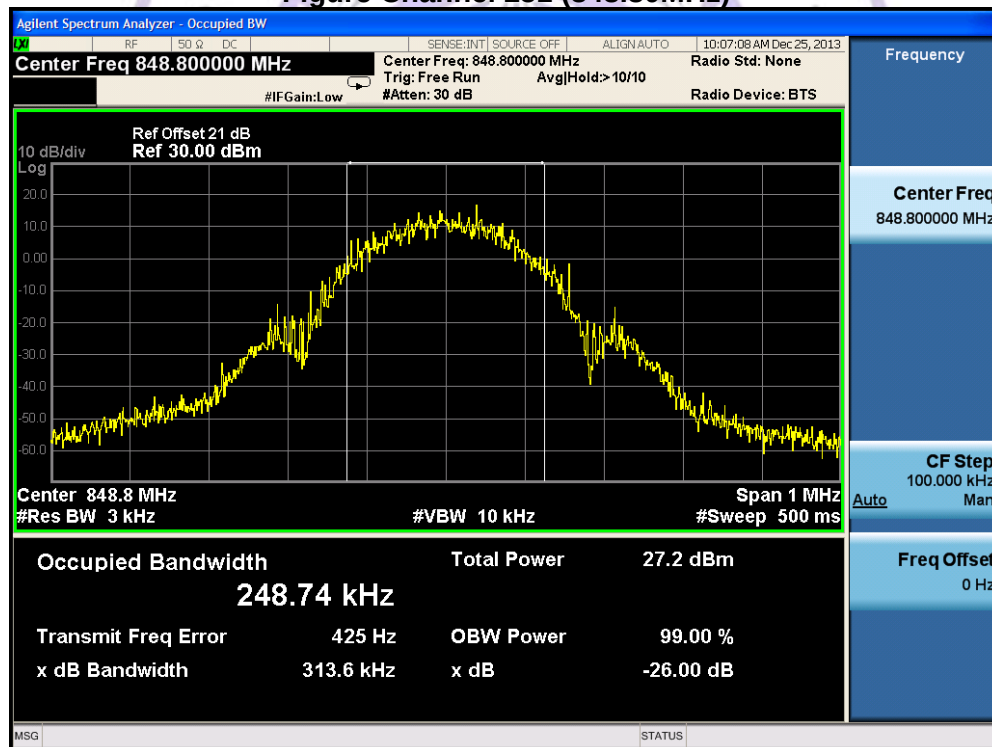

Product	2G Phone Tablet PC
Test Item	Occupied Bandwidth
Test Mode	Mode 6: EDGE 1900 Link
Date of Test	2013/12/25

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	305.60	244.35
661	1880.00	298.60	244.37
810	1909.80	301.80	242.09

Figure Channel 512 (1850.20MHz)

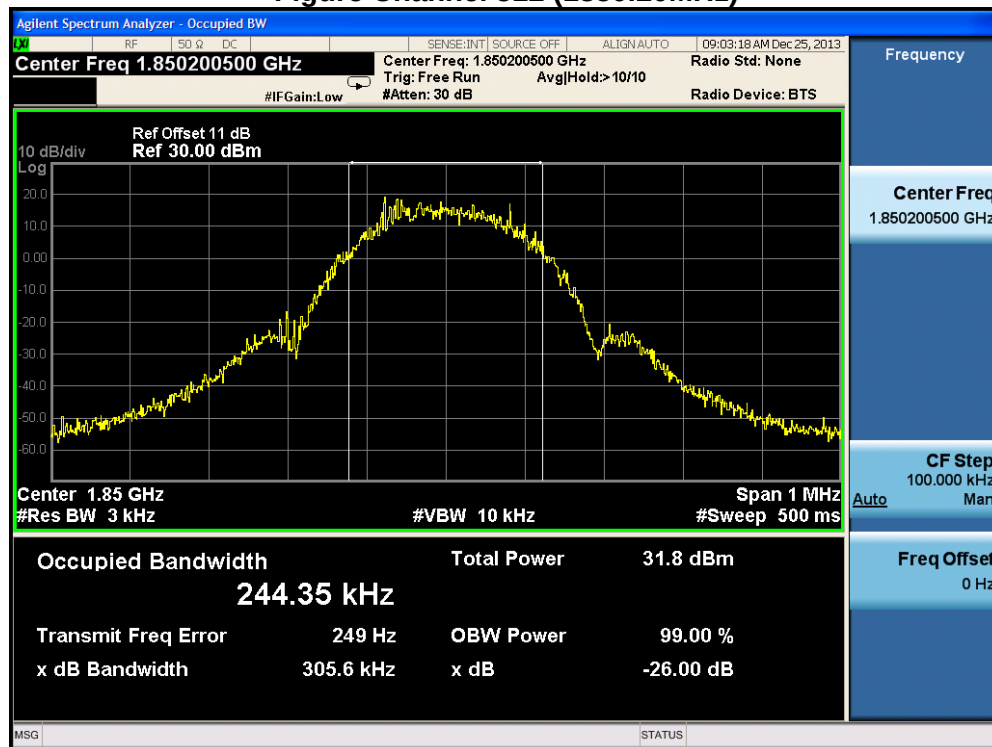


Figure Channel 661 (1880.00MHz)



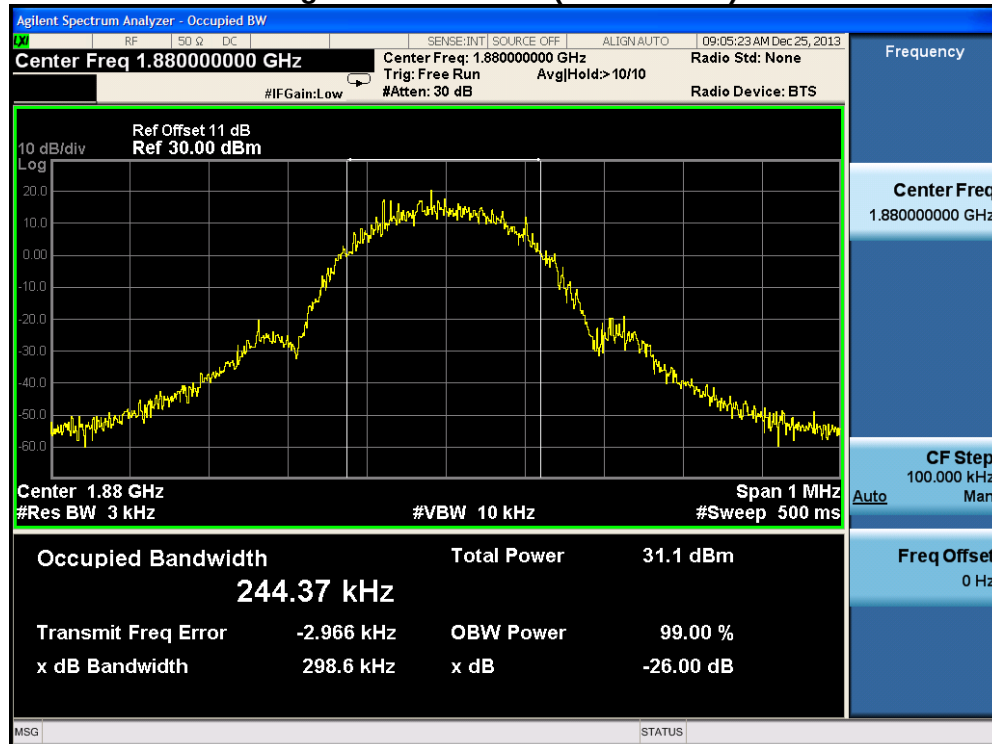


Figure Channel 810 (1909.80MHz)

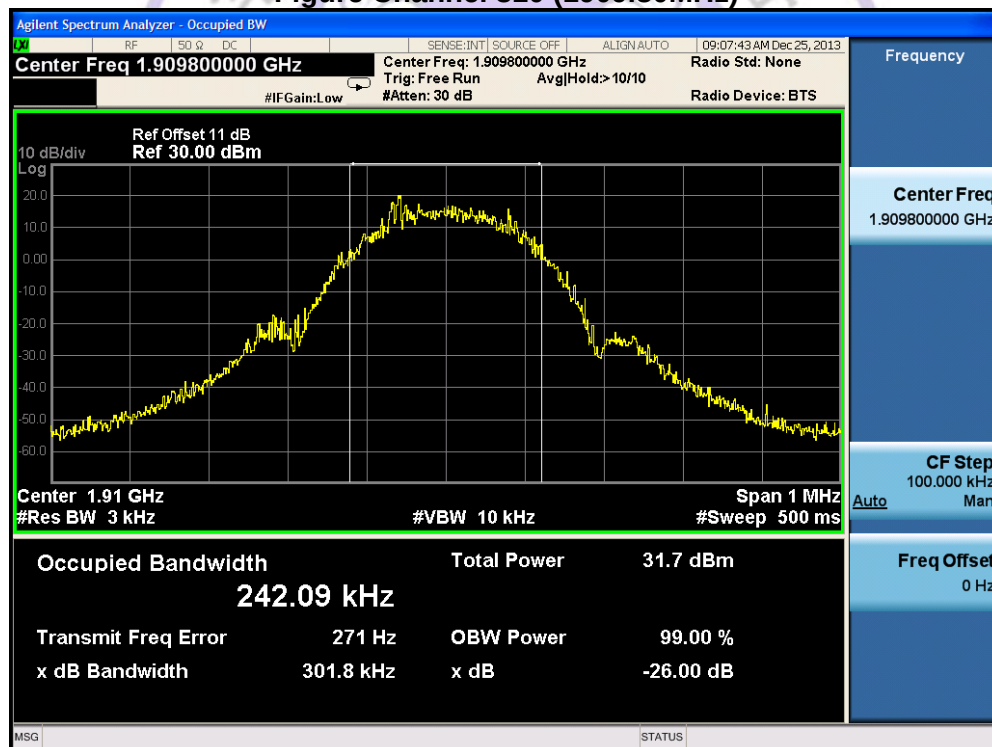

4.4. Spurious Emission At Antenna Terminals (+/- 1MHz)

TEST CONFIGURATION

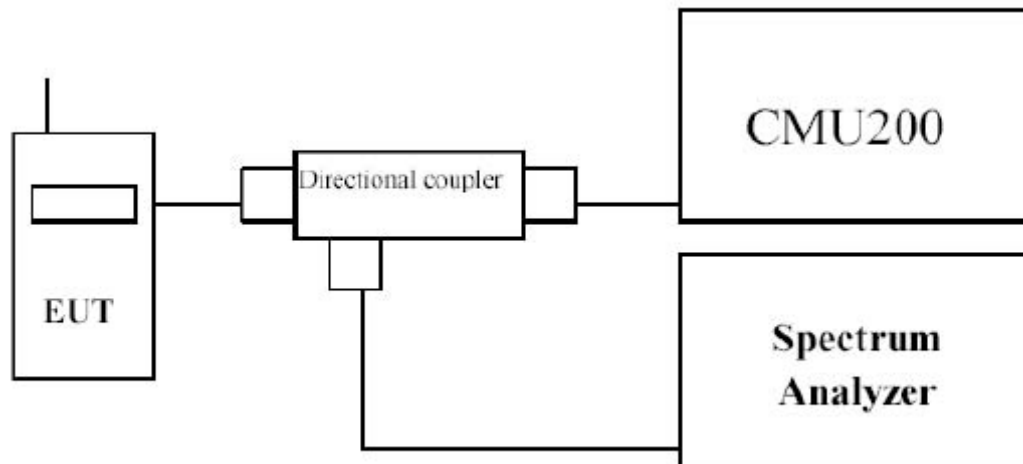

TEST PROCEDURE

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST RESULTS

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 1: GSM 850 Link
Date of Test	2013/12/22

Figure Channel 128 (824.20MHz)


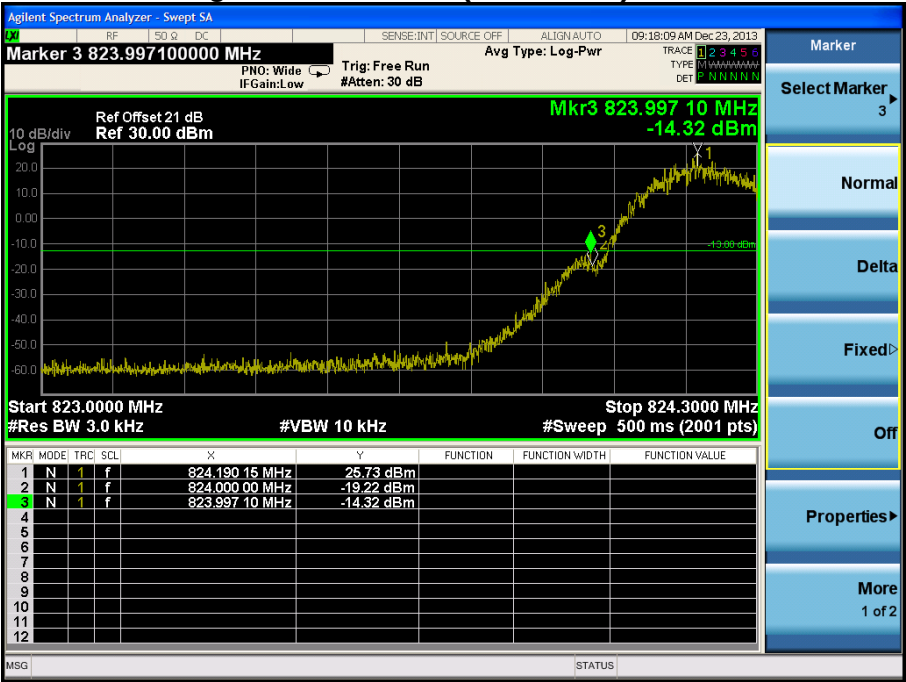


Figure Channel 251 (848.80MHz)

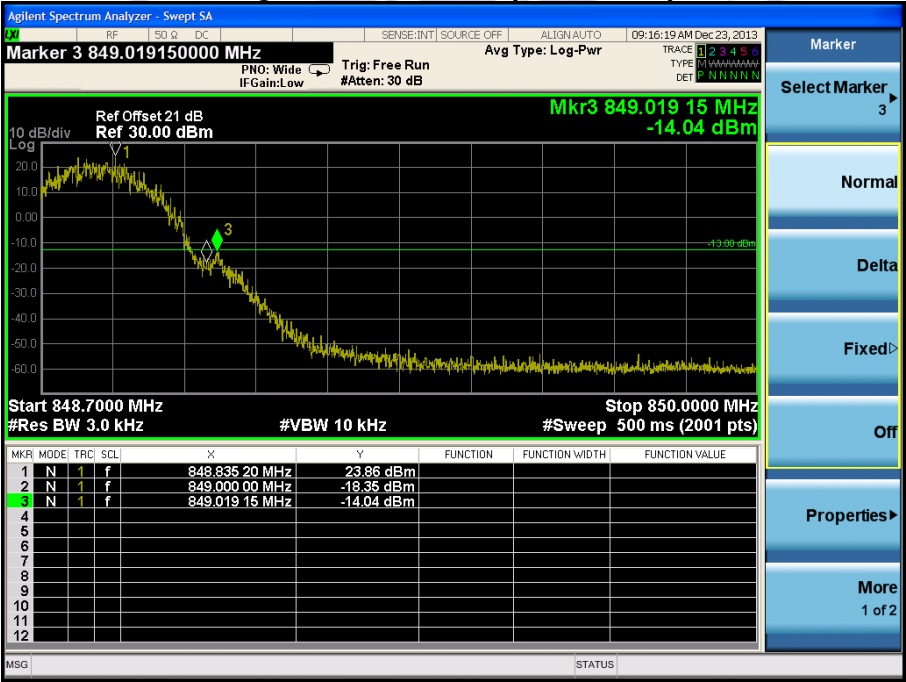

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 2: PCS1900 Link
Date of Test	2013/12/22

Figure Channel 512 (1850.20MHz)


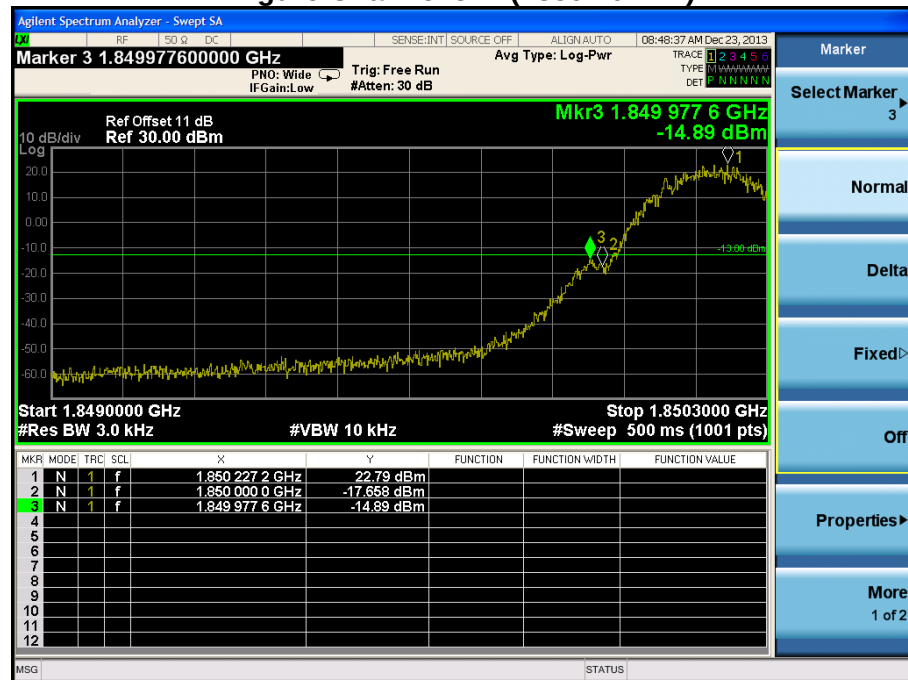


Figure Channel 810 (1909.80MHz)

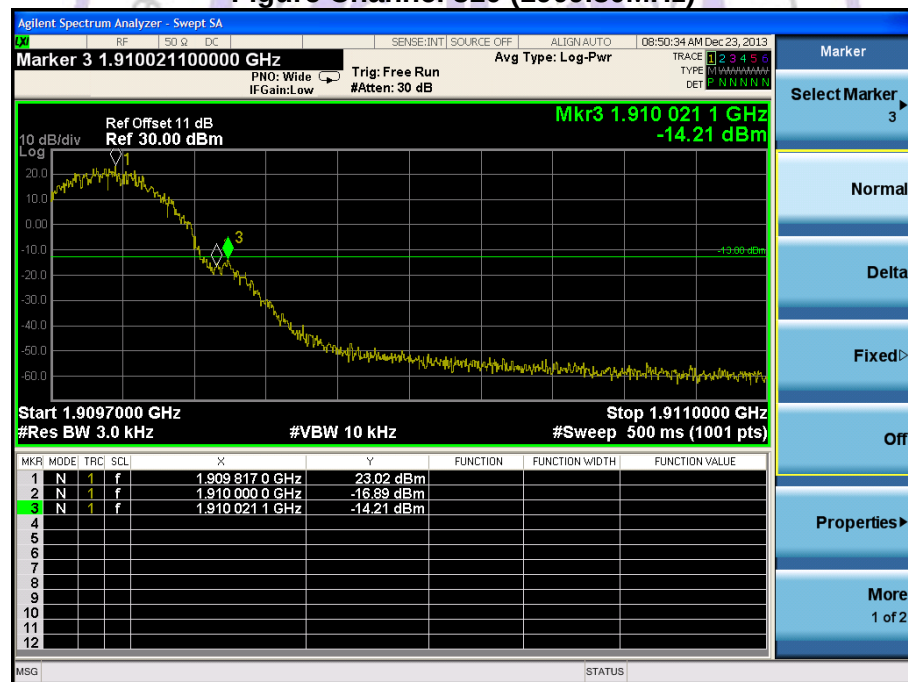

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 3: GPRS 850 Link
Date of Test	2013/12/22

Figure Channel 128 (824.20MHz)


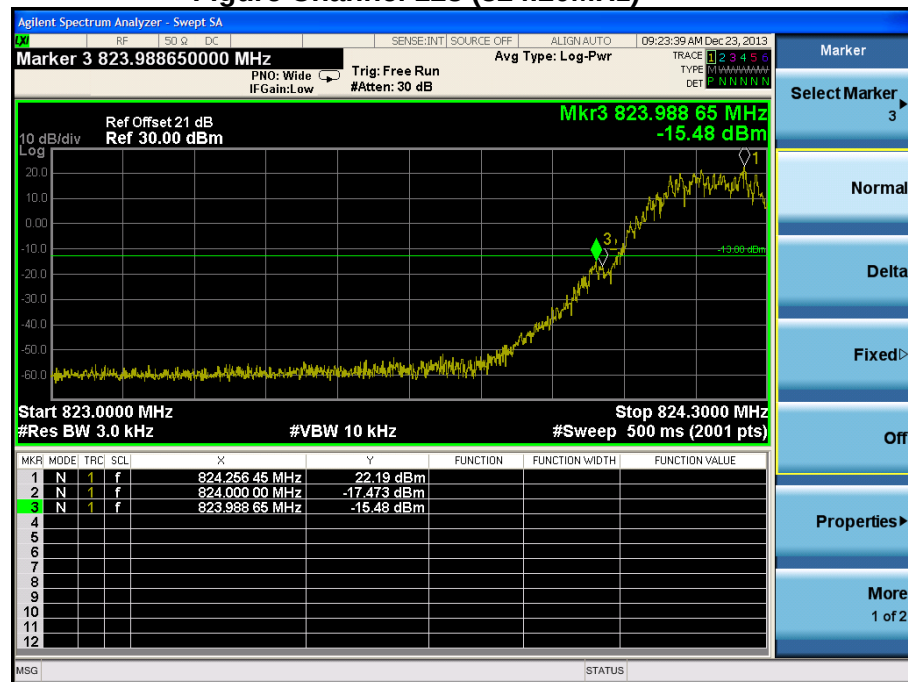


Figure Channel 251 (848.80MHz)

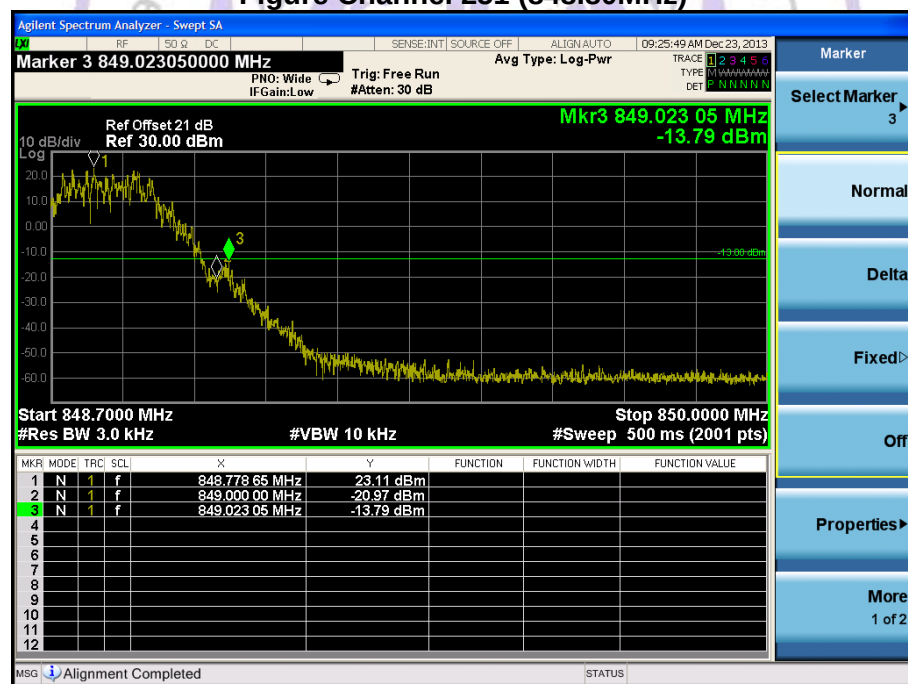

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 4: GPRS1900 Link
Date of Test	2013/12/22

Figure Channel 512 (1850.20MHz)


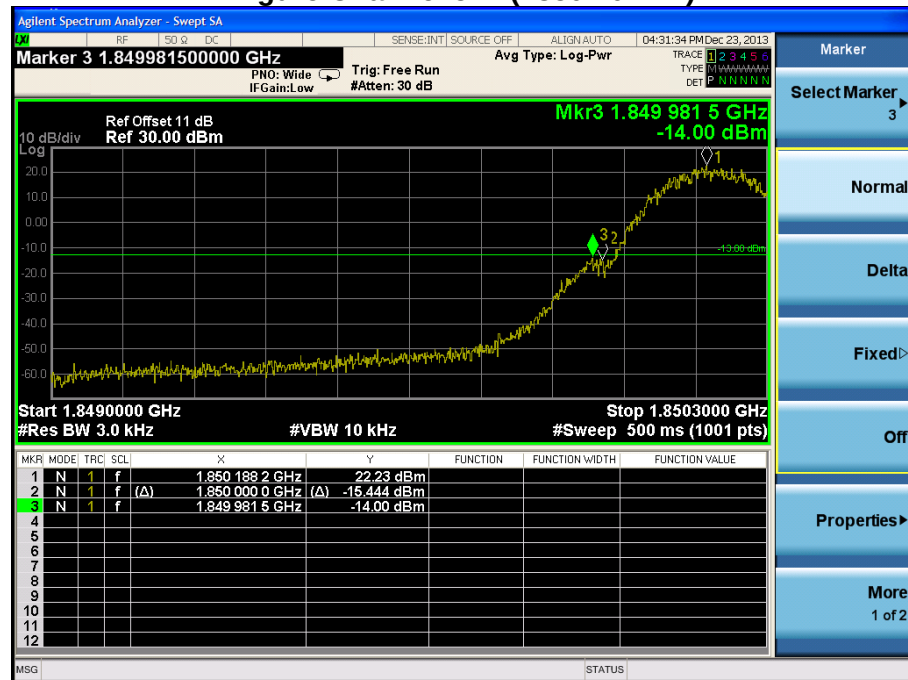


Figure Channel 810 (1909.80MHz)

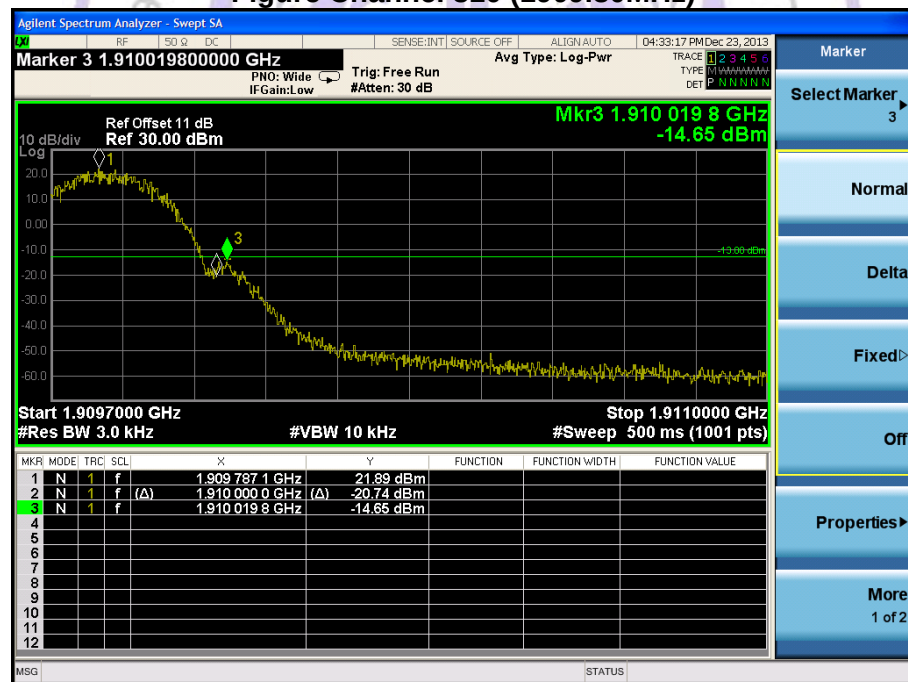

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 5: EDGE 850 Link
Date of Test	2013/12/25

Figure Channel 128 (824.20MHz)


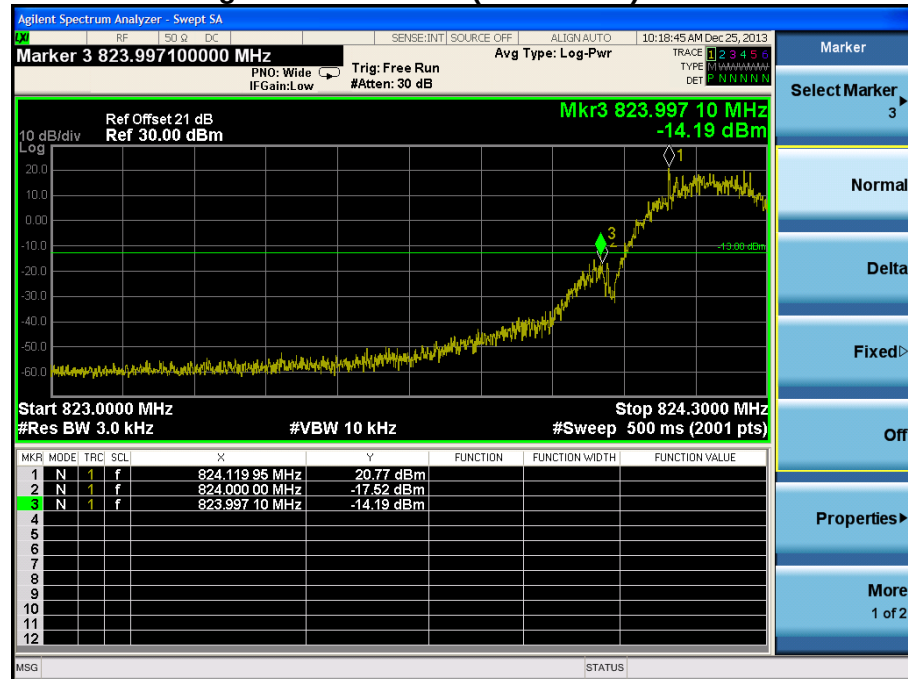


Figure Channel 251 (848.80MHz)

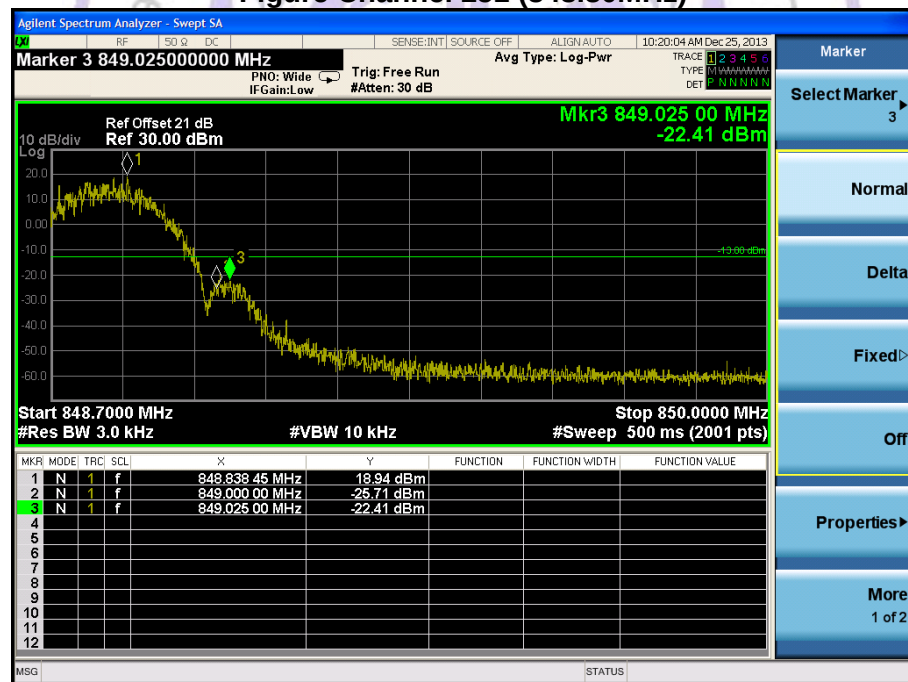

Product	2G Phone Tablet PC
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)
Test Mode	Mode 6: EDGE1900 Link
Date of Test	2013/12/25

Figure Channel 512 (1850.20MHz)


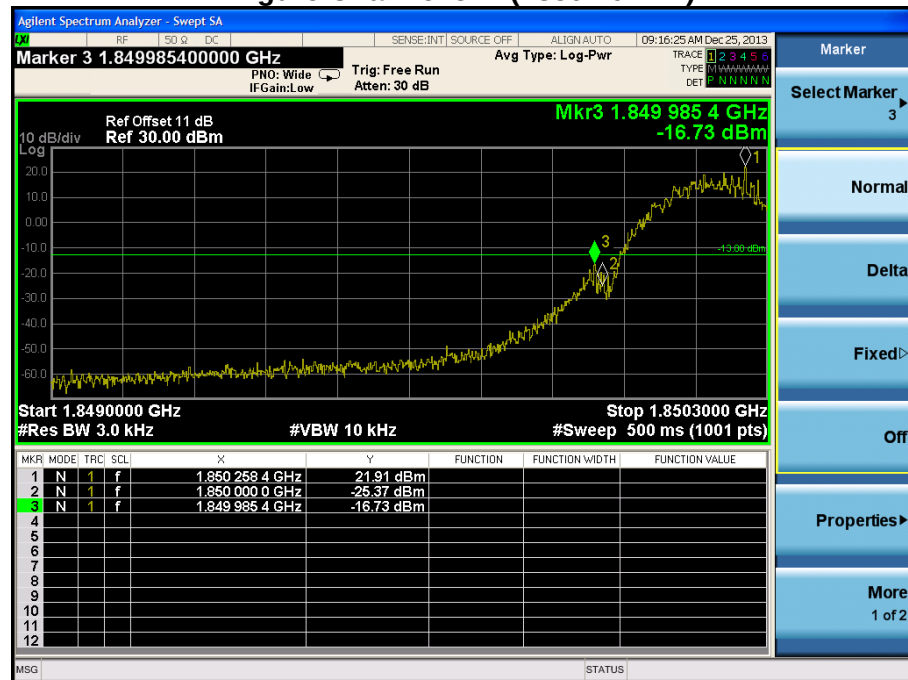



Figure Channel 810 (1909.80MHz)

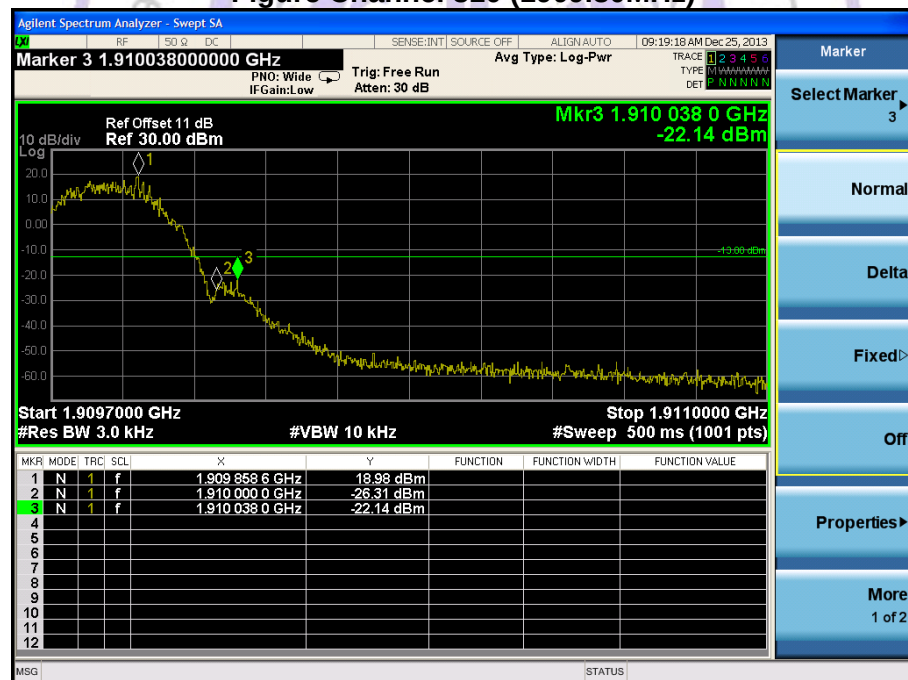


4.5. Spurious Emission

TEST CONFIGURATION

Conducted Spurious Measurement:

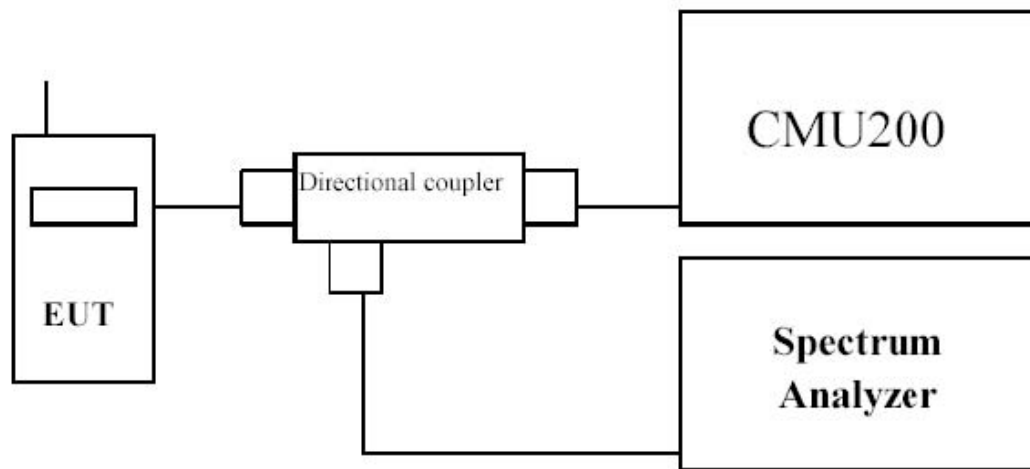

Radiated Spurious Measurement:

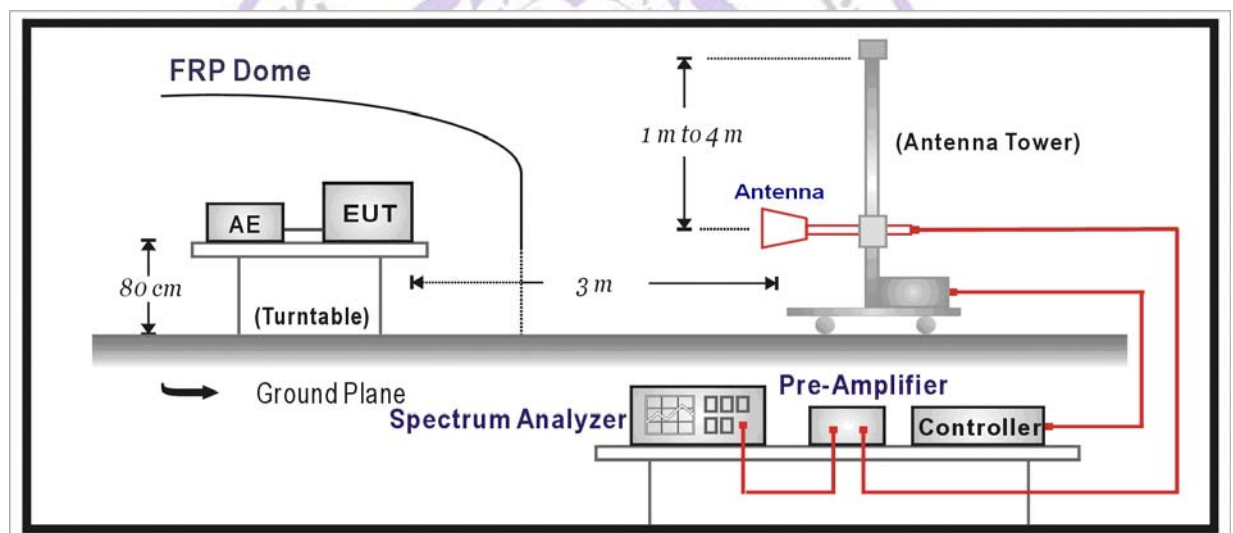

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- q) The maximum signal level detected by the measuring receiver shall be noted.
- h) The transmitter shall be replaced by a substitution antenna.
- i) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j) The substitution antenna shall be connected to a calibrated signal generator.
- k) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- o) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p) The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- q) Test site anechoic chamber refer to ANSI C63.4: 2009



LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.



TEST RESULTS

Product	2G Phone Tablet PC
Test Item	Conducted Spurious Emission
Test Mode	Mode 1: GSM 850 Link
Date of Test	2013/12/22



Low Channel 128(824.2MHz)

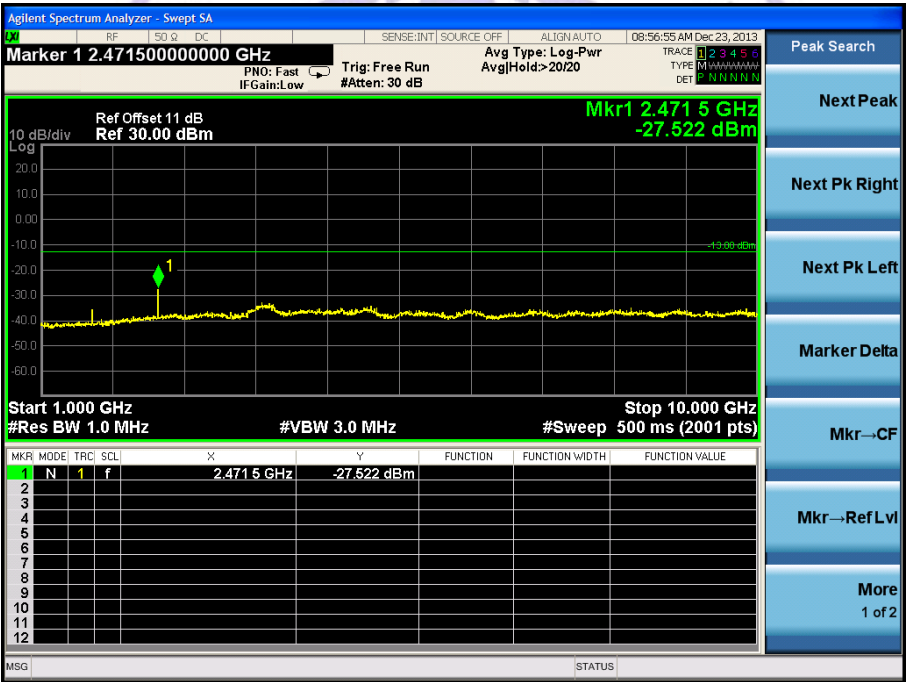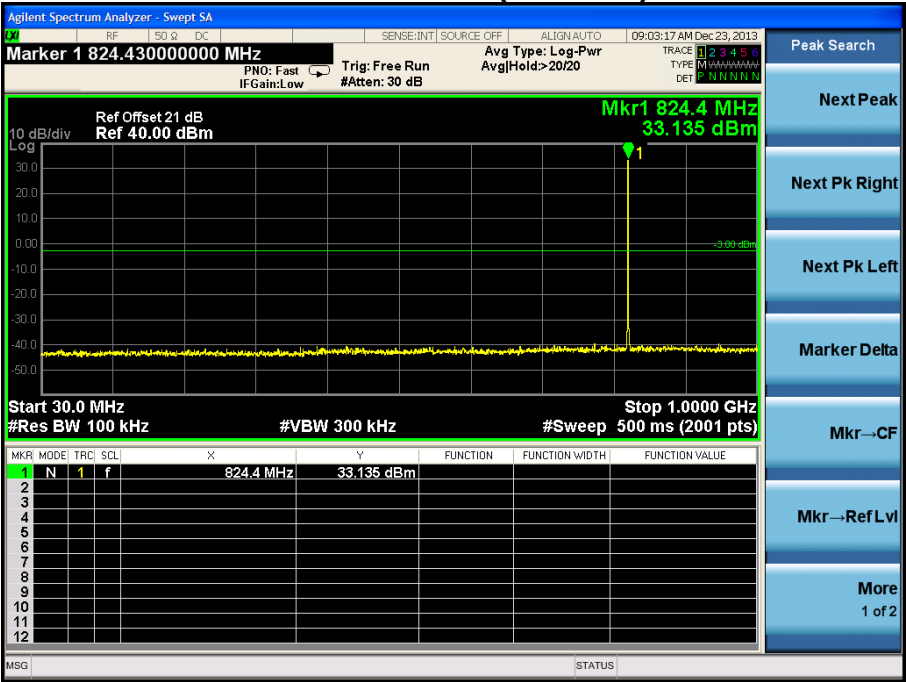

Mid Channel 189(836.4MHz)

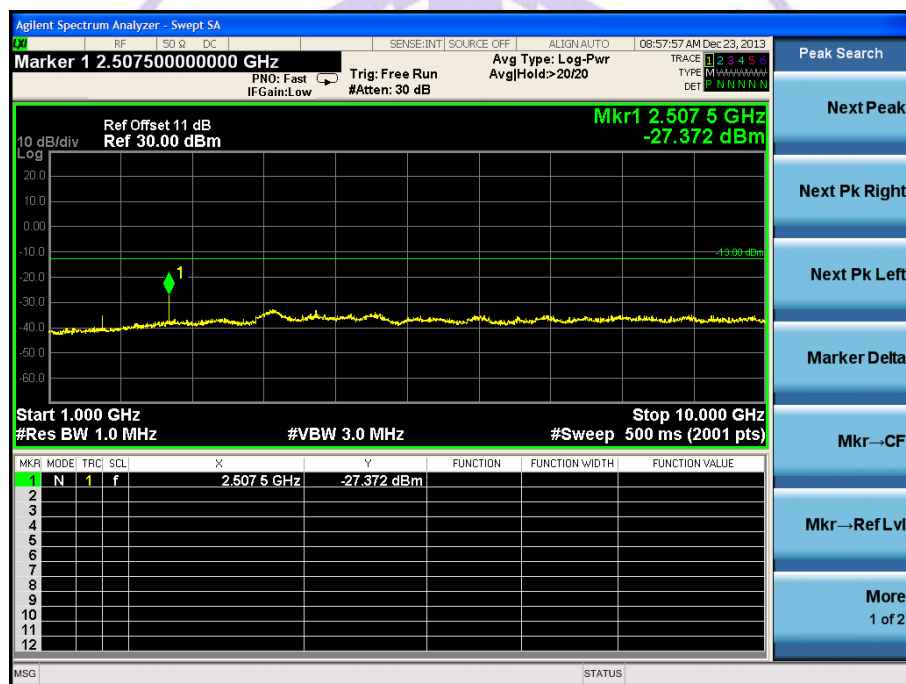
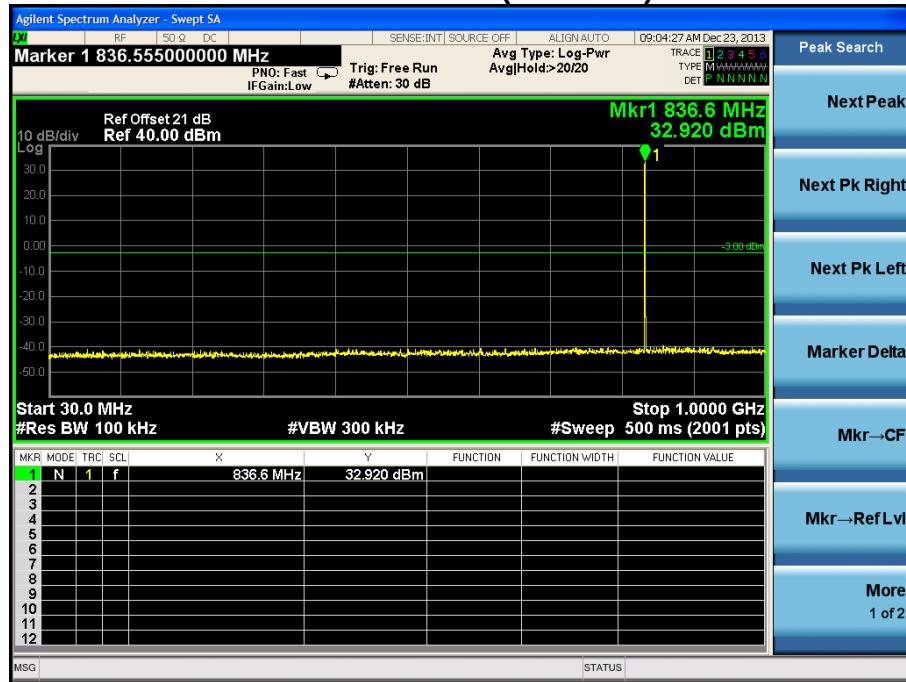


High Channel 251(848.8MHz)

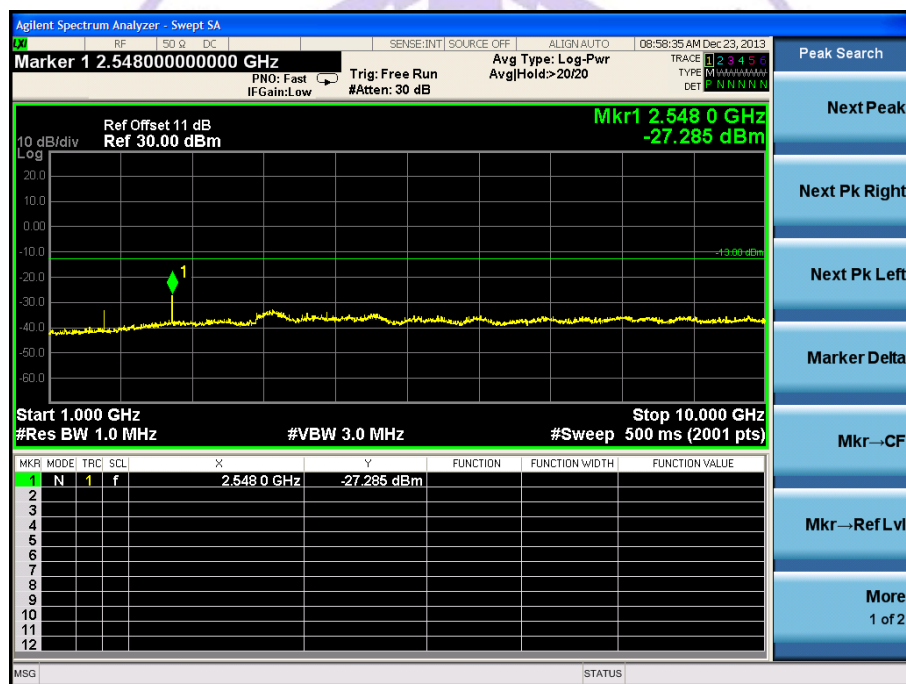
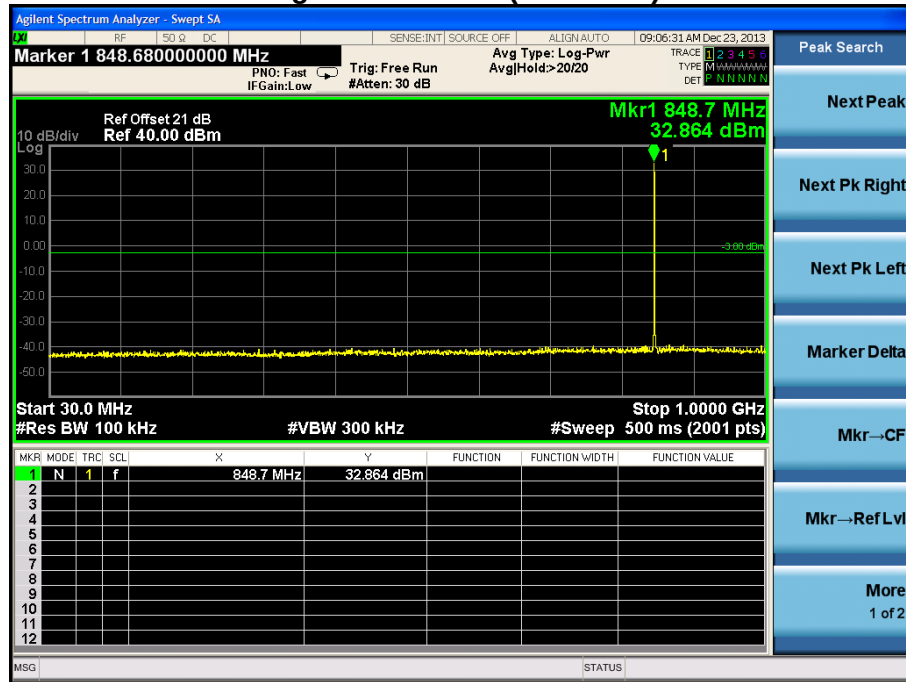


Product	2G Phone Tablet PC		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: PCS1900 Link		
Date of Test	2013/12/22	Test Site	TR3



Low Channel 512(1850.2MHz)

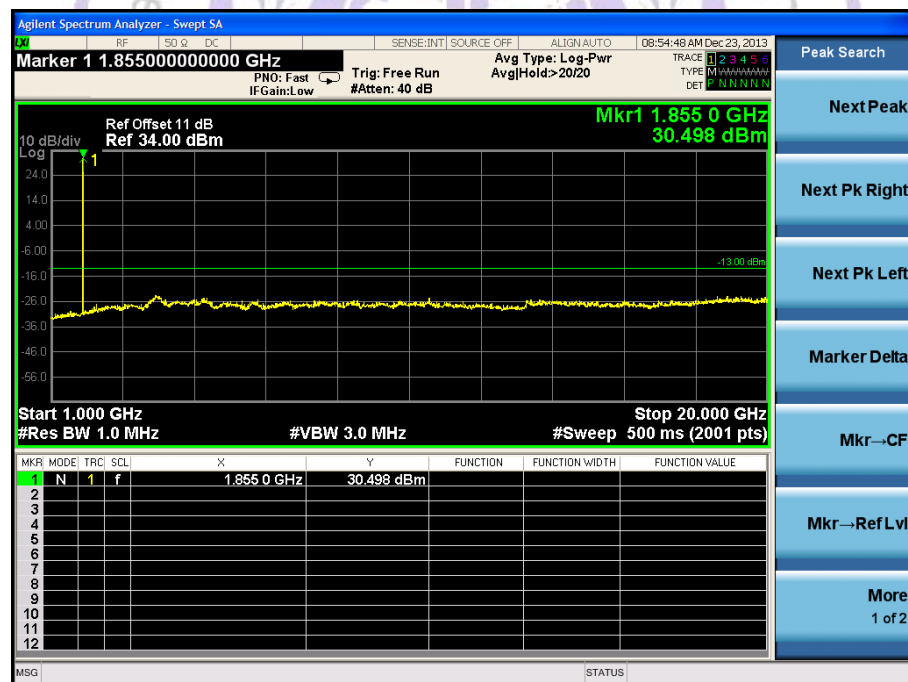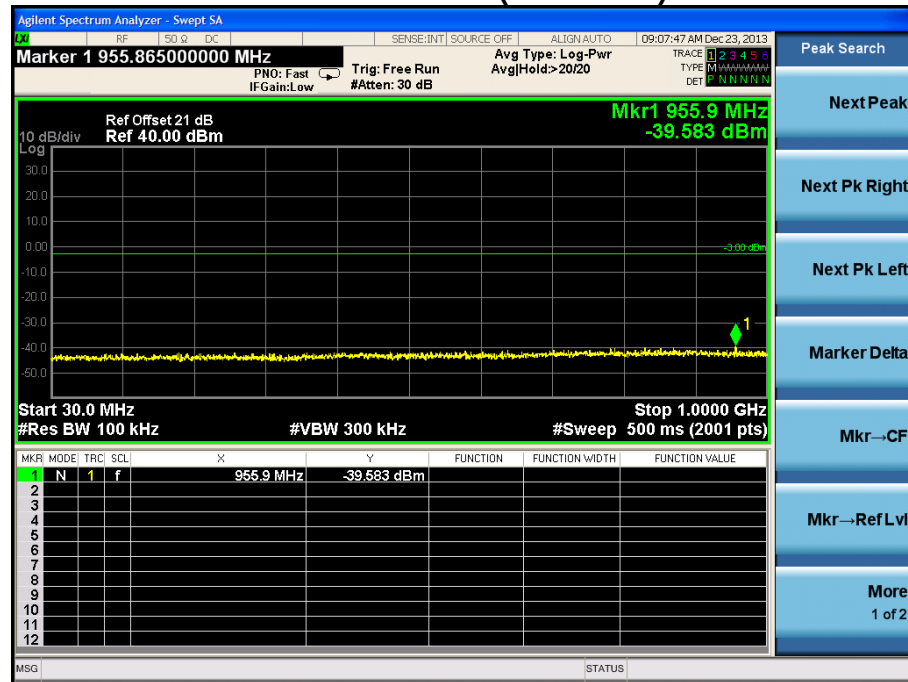

Mid Channel 661(1880.0MHz)

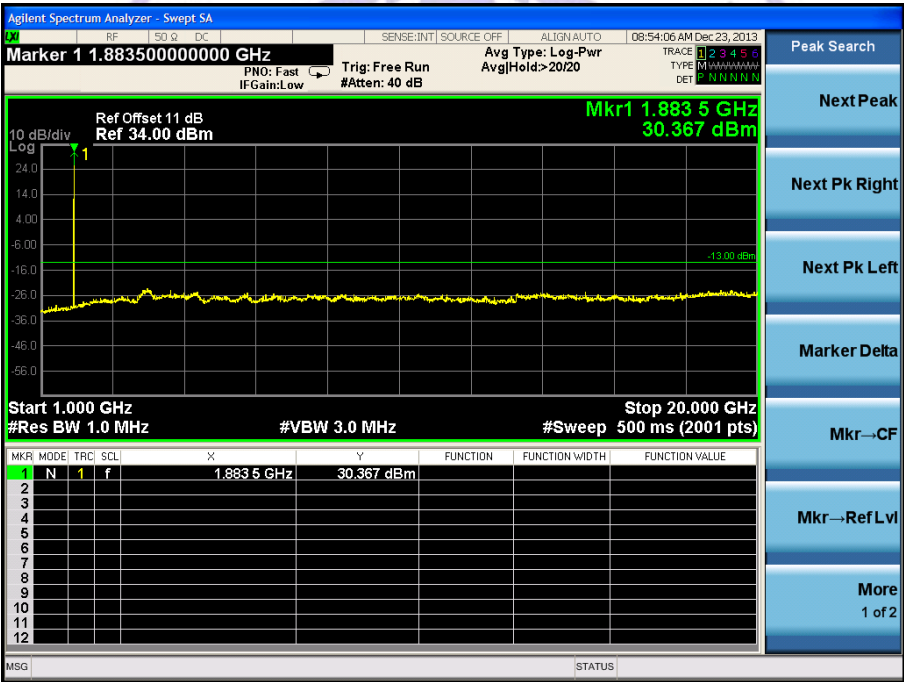
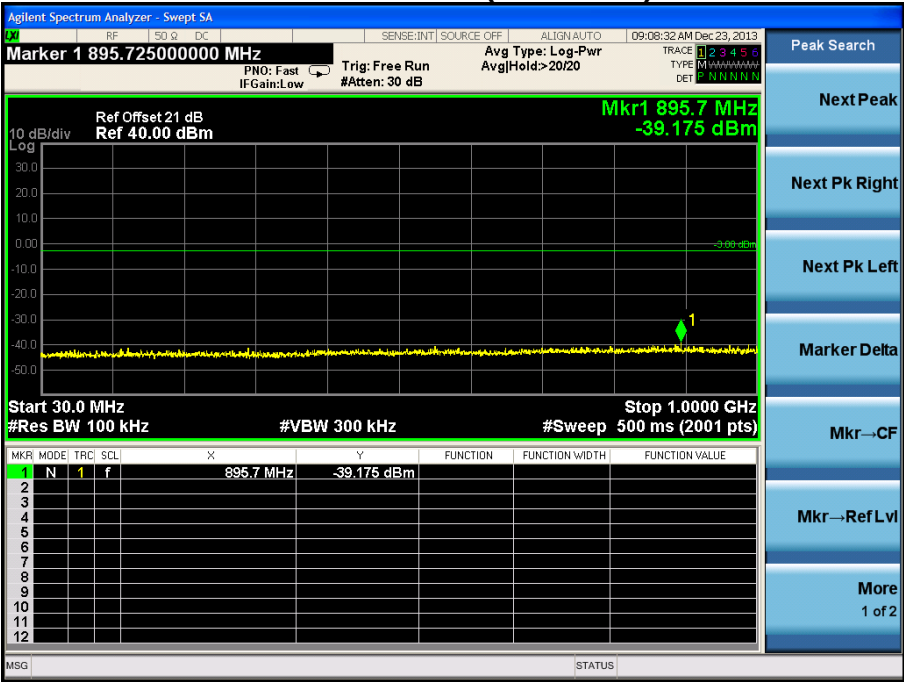


High Channel 810(1909.8MHz)

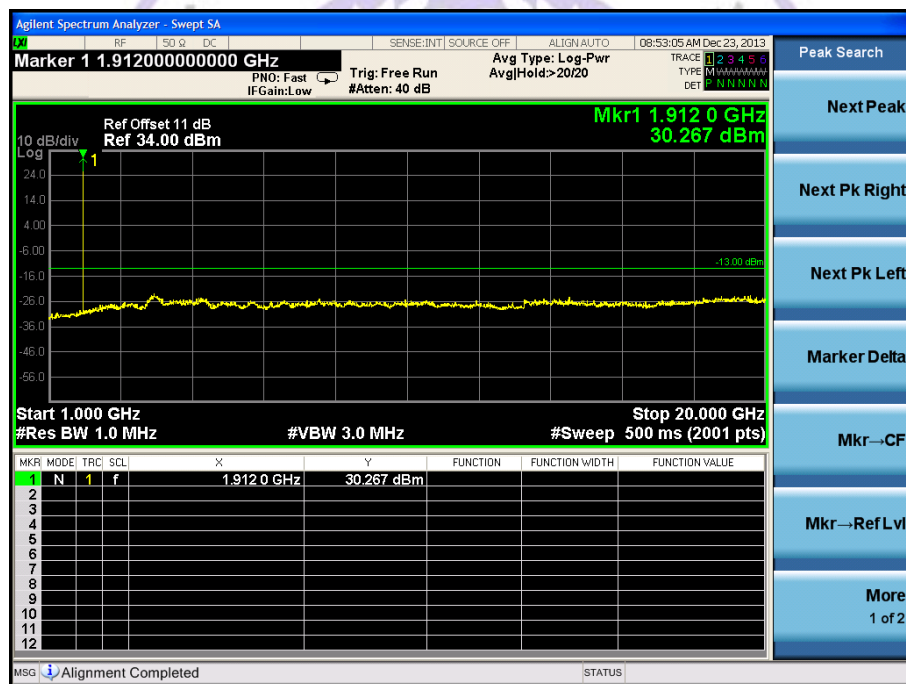
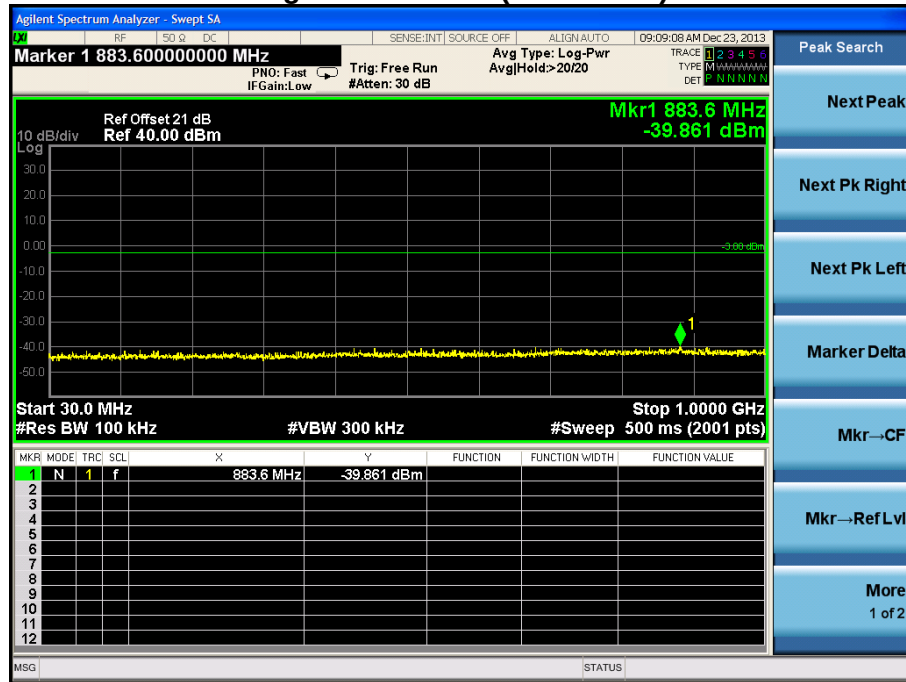


Product	2G Phone Tablet PC
Test Item	Conducted Spurious Emission
Test Mode	Mode 3: GPRS 850 Link
Date of Test	2013/12/22



Low Channel 128(824.2MHz)

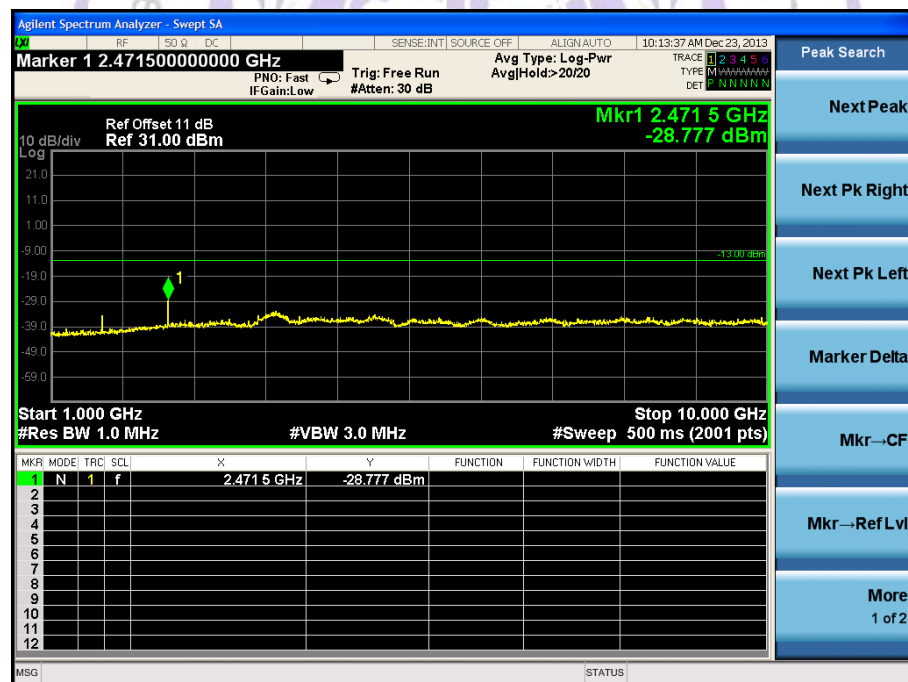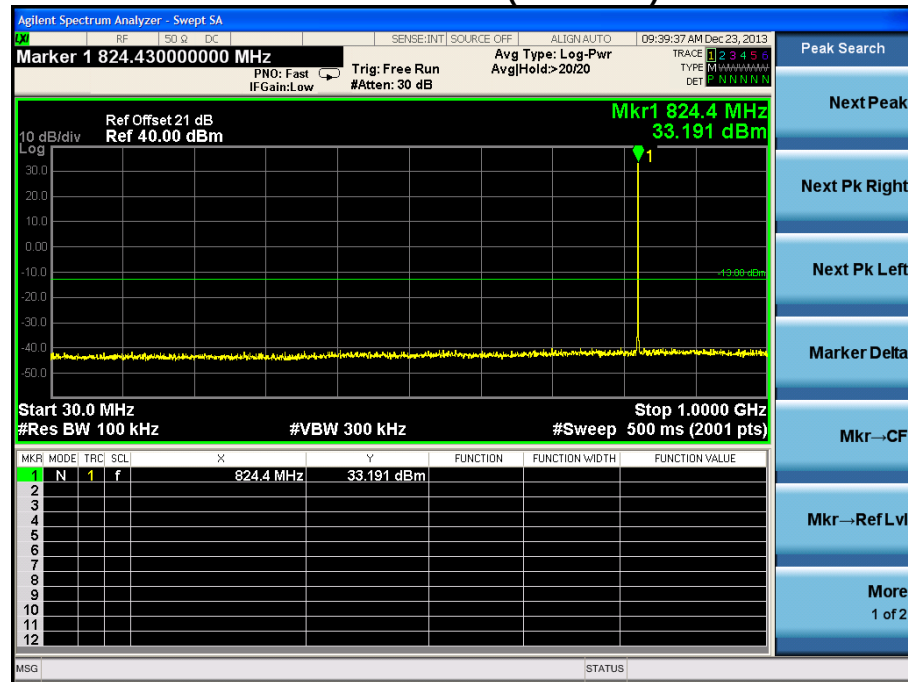

Mid Channel 189(836.4MHz)

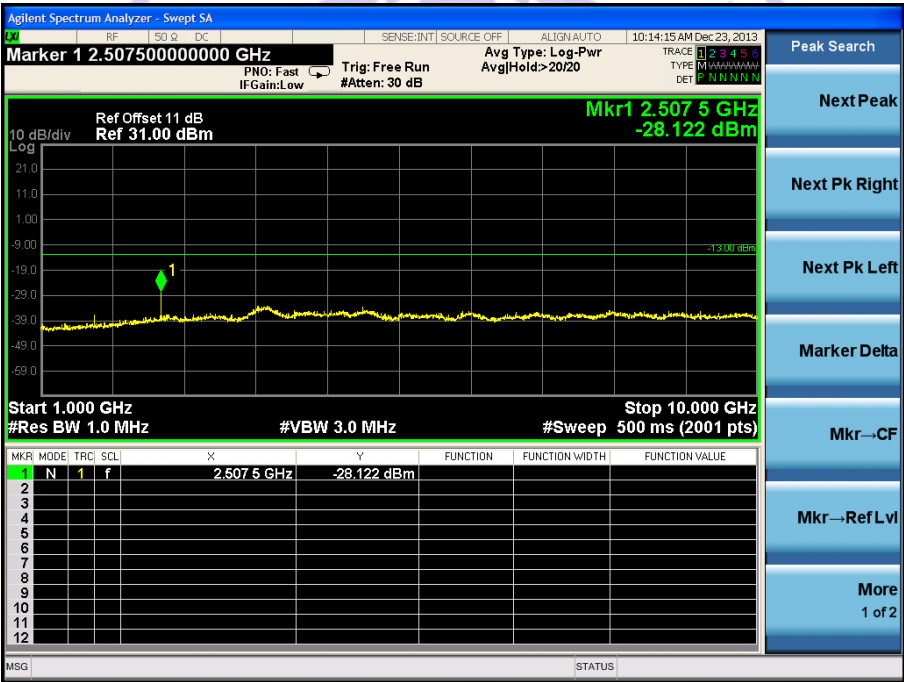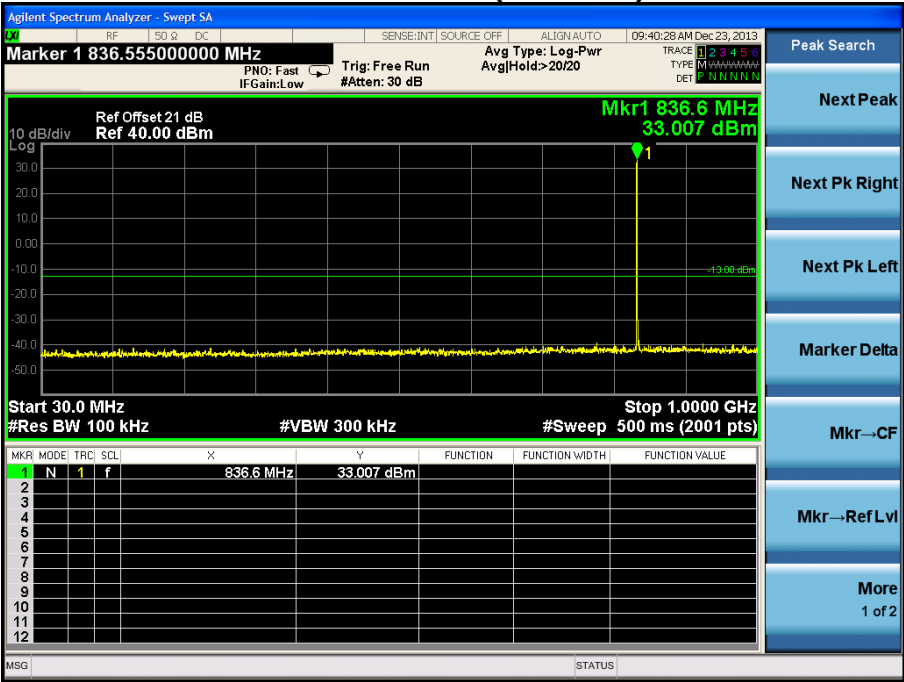

High Channel 251(848.8MHz)

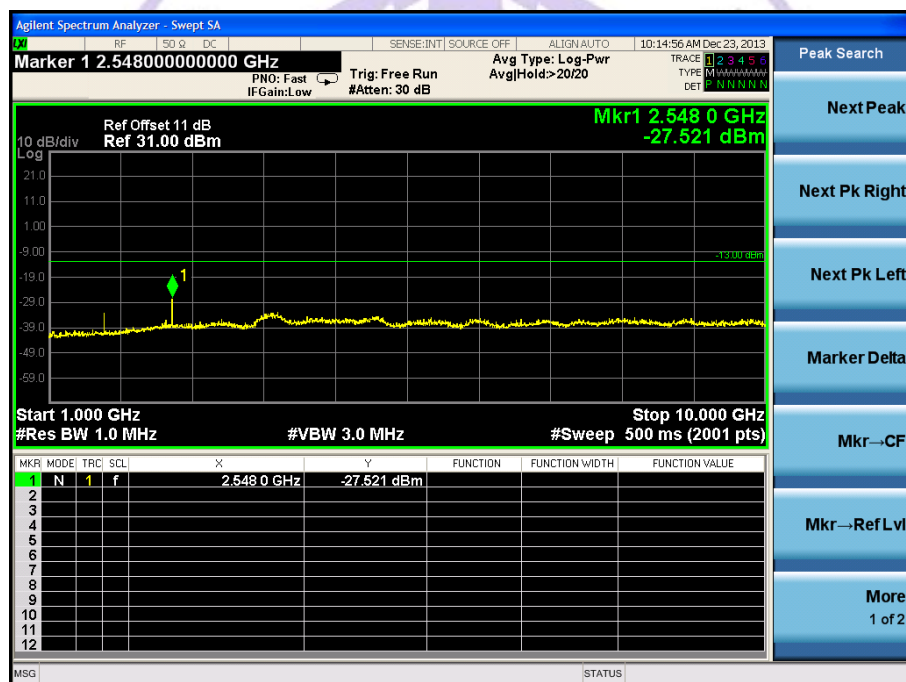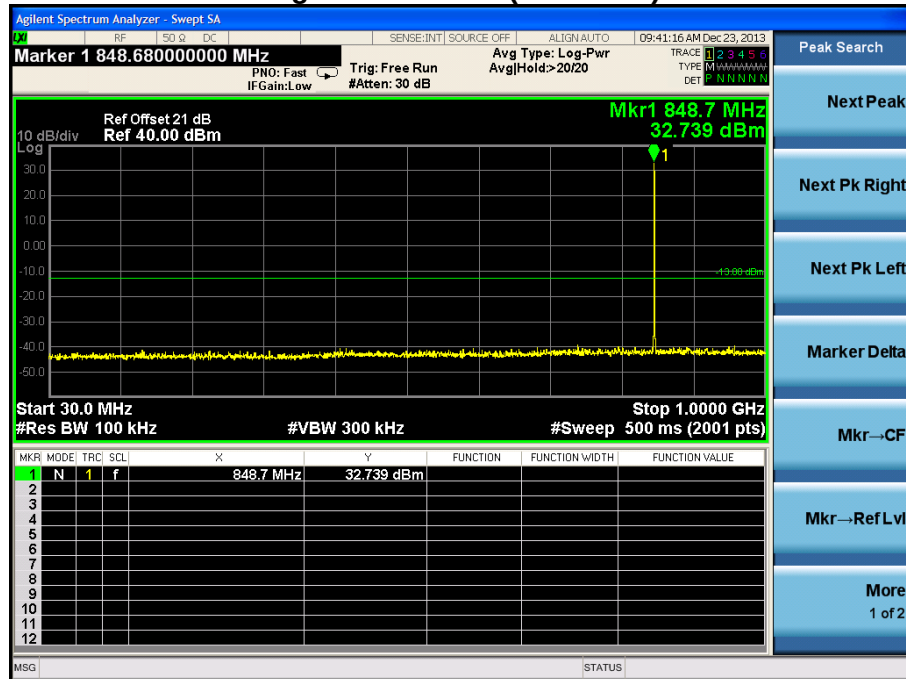

Product	2G Phone Tablet PC
Test Item	Conducted Spurious Emission
Test Mode	Mode 4: GPRS1900 Link
Date of Test	2013/12/22

Agilent Spectrum Analyzer - Swept SA

Marker 1 805.03000000 MHz

Ref Offset 21 dB
Ref 40.00 dBm

Trig: Free Run
#Atten: 30 dB

Avg Type: Log-Pwr
Avg/Hold: 20/20

09:49:27 AM Dec 23, 2013

TRAC 1 2 3 4 5 6
TYPE M
DET N N N N N

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr → CF

Mkr → Ref Lvl

More
1 of 2

10 dB/div
Log

30.0
20.0
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0

30.0 MHz 1.000 GHz

Start 30.0 MHz
#Res BW 100 kHz


Stop 1.000 GHz
#Sweep 500 ms (2001 pts)

#VBW 300 kHz



MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	805.0 MHz	-39.724 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSG



STATUS

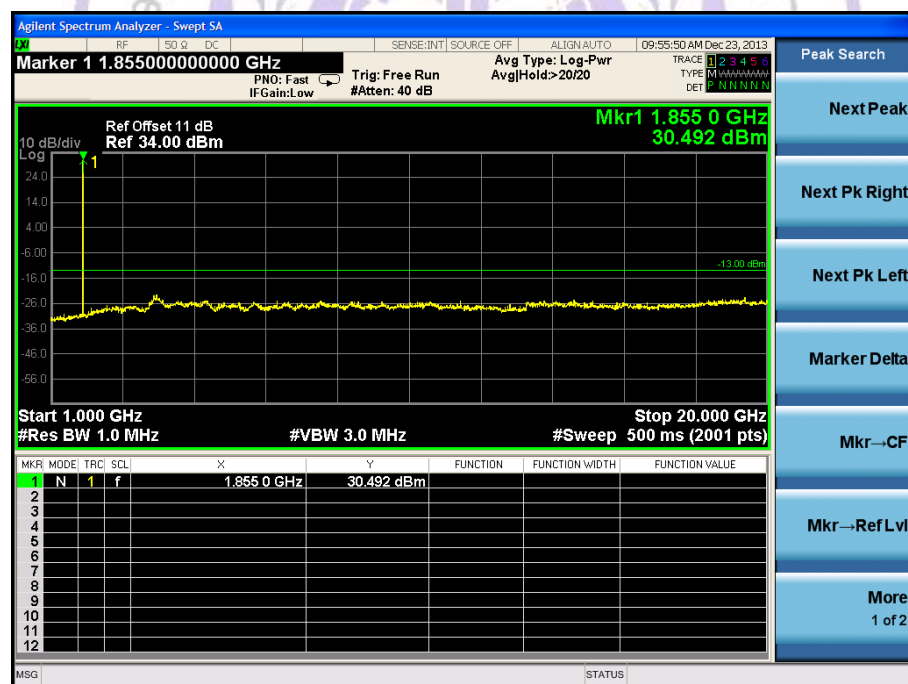

Mid Channel 661(1880.0MHz)

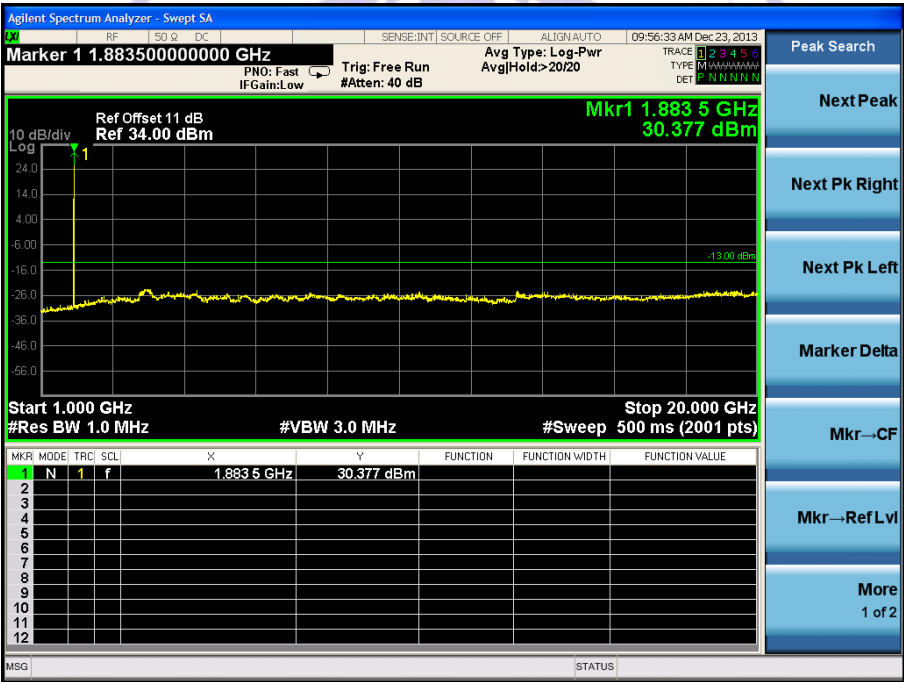
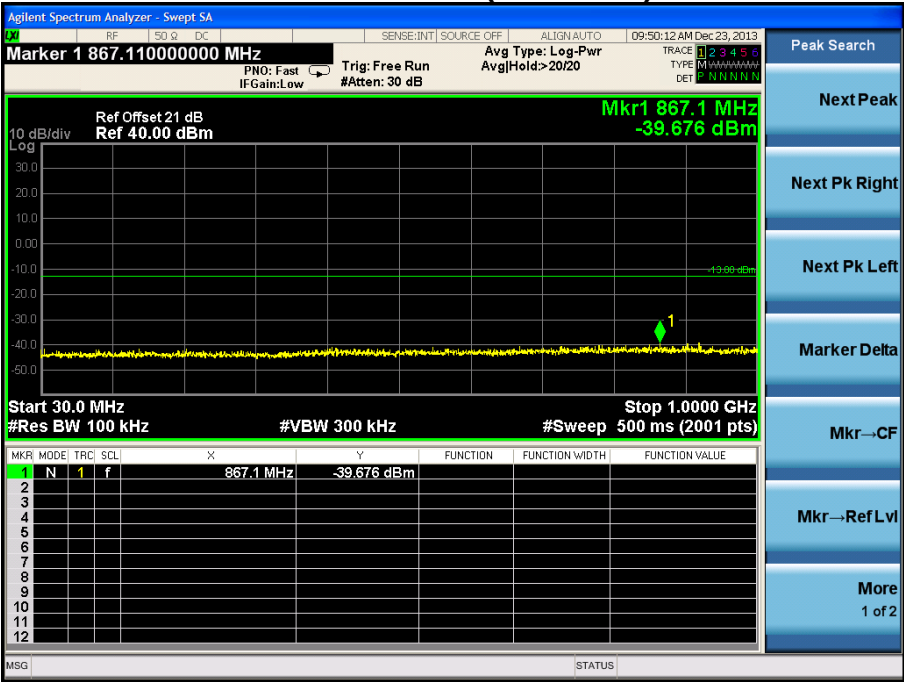


High Channel 810(1909.8MHz)

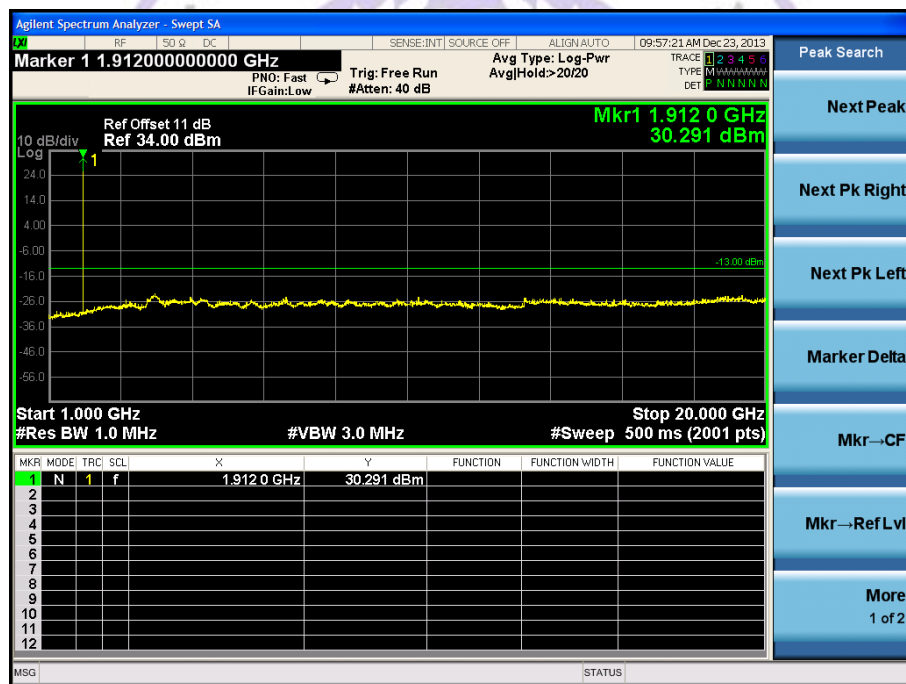
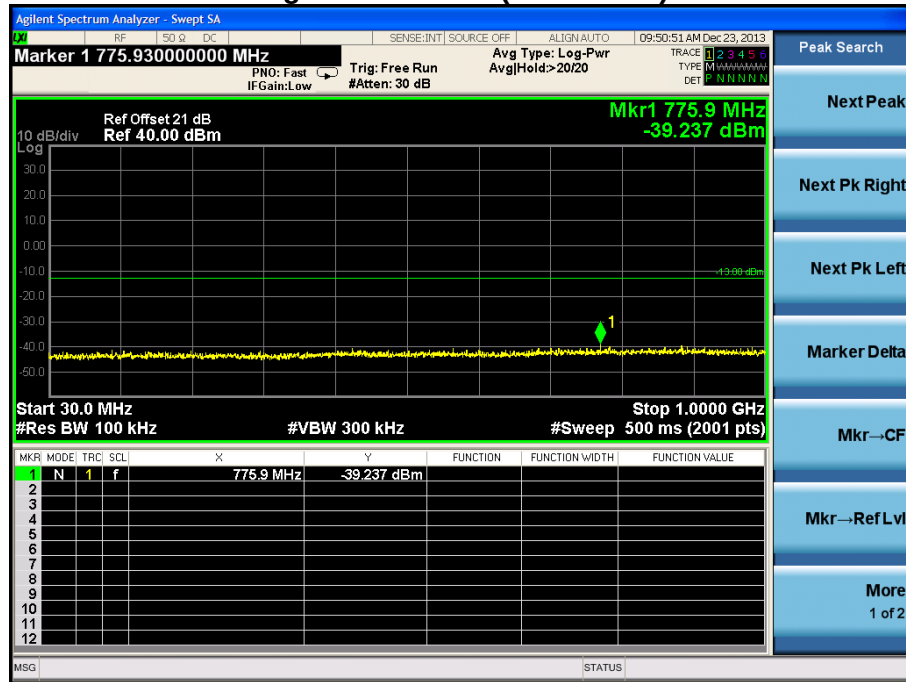


Product	2G Phone Tablet PC
Test Item	Conducted Spurious Emission
Test Mode	Mode 5: EDGE 850 Link
Date of Test	2013/12/25



Low Channel 128(824.2MHz)

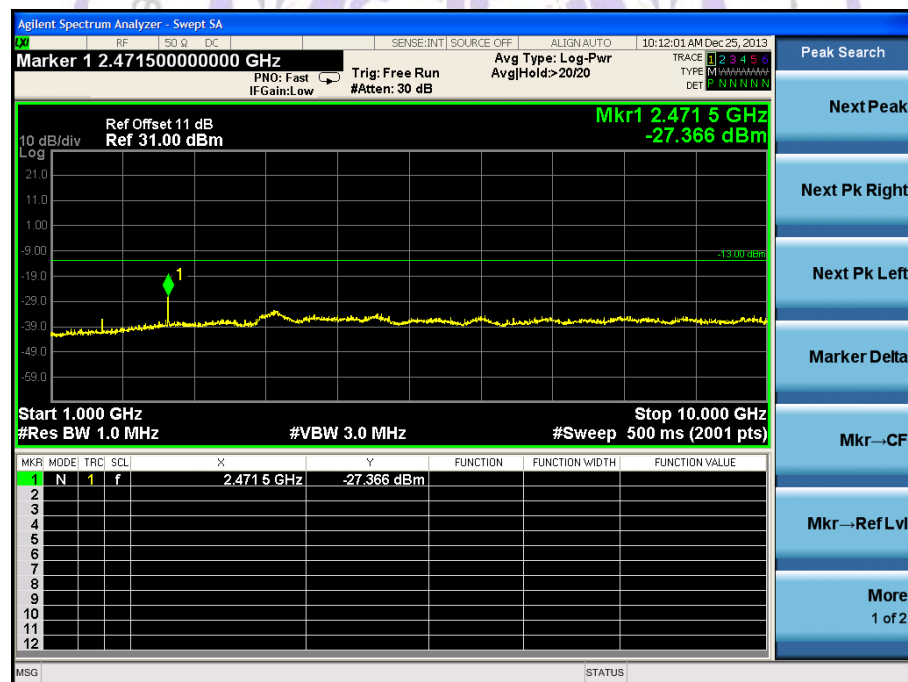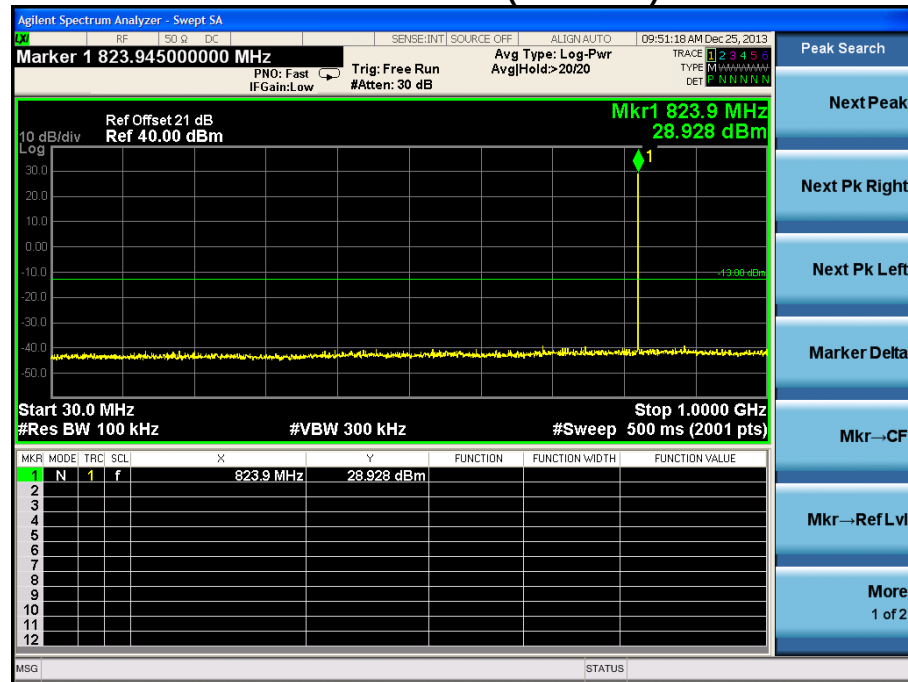

Mid Channel 189(836.4MHz)

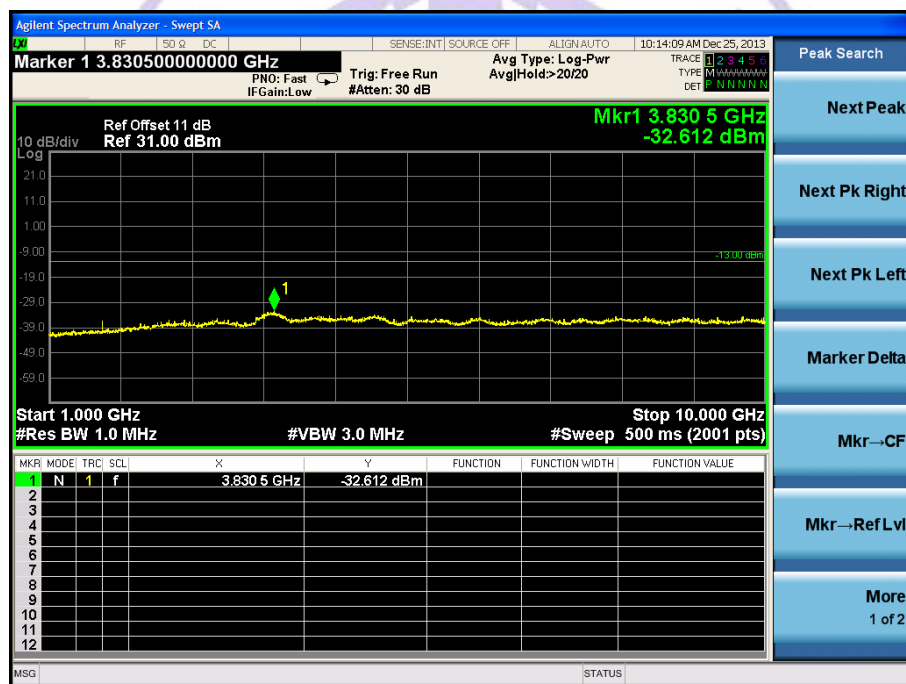
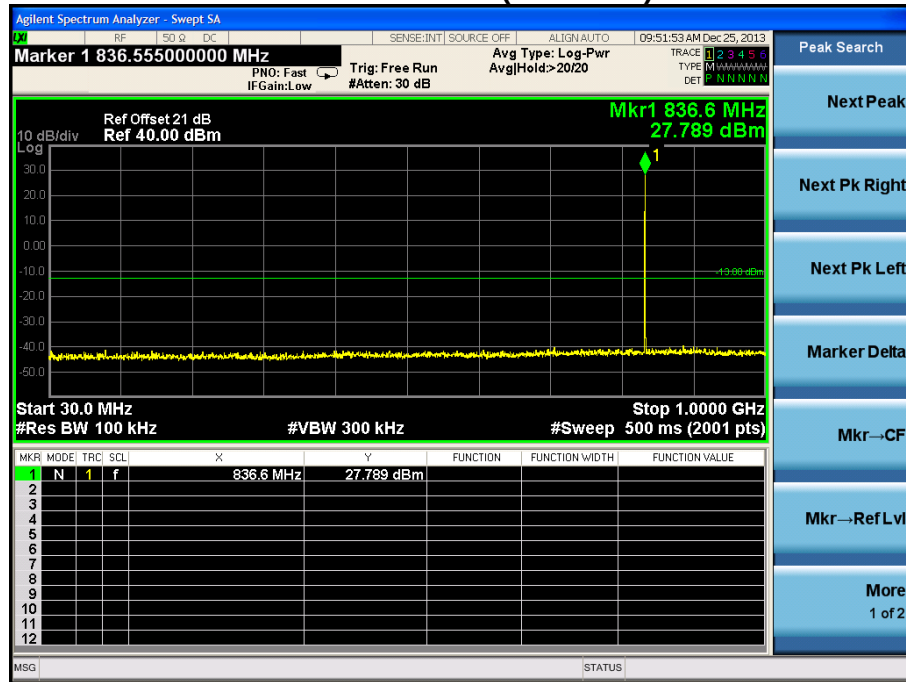


High Channel 251(848.8MHz)

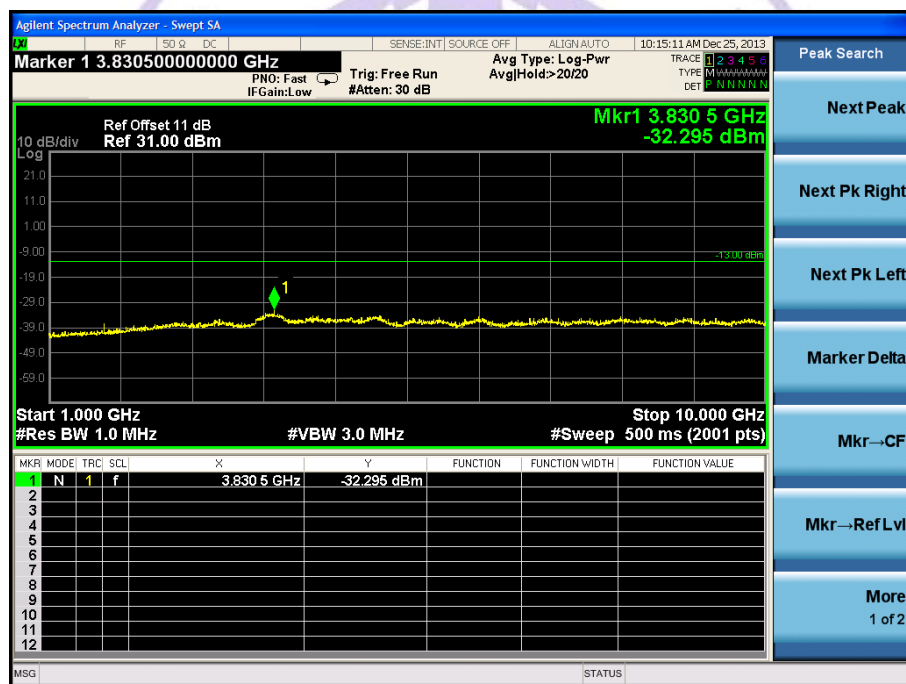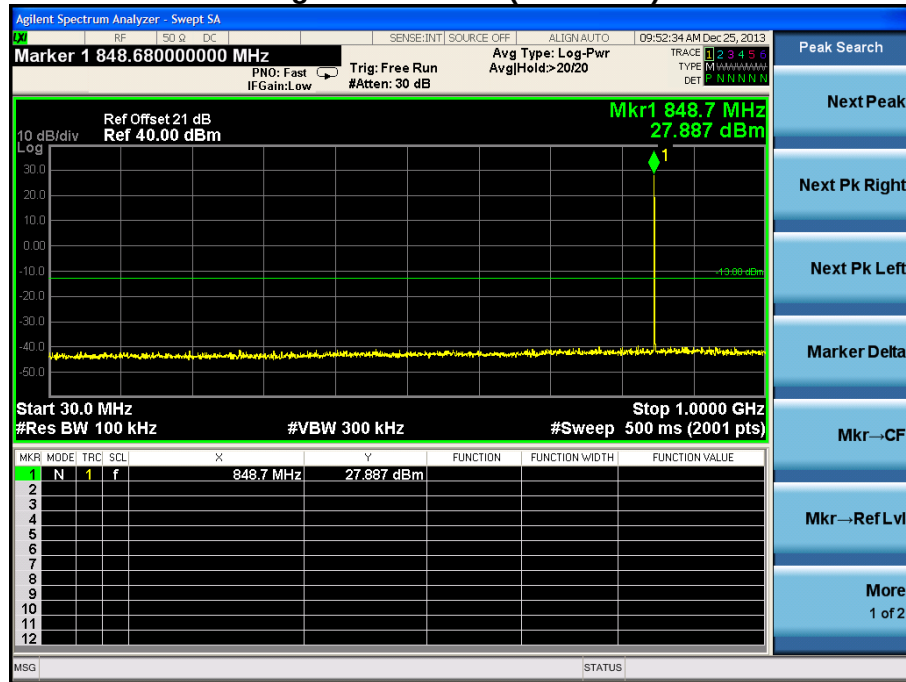

Product	2G Phone Tablet PC
Test Item	Conducted Spurious Emission
Test Mode	Mode 4: EDGE 1900 Link
Date of Test	2013/12/22

Low Channel 512(1850.2MHz)

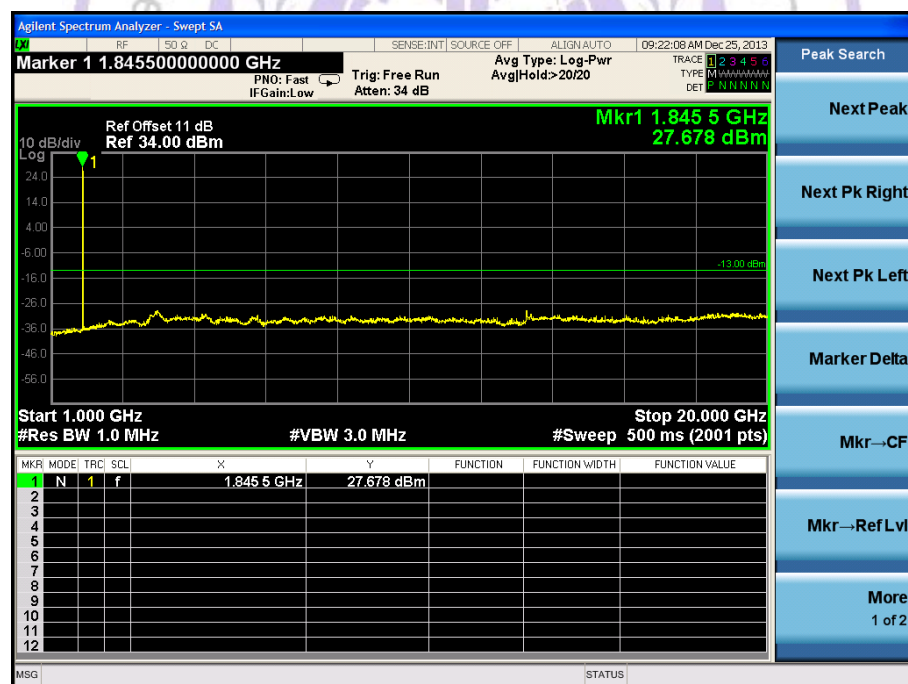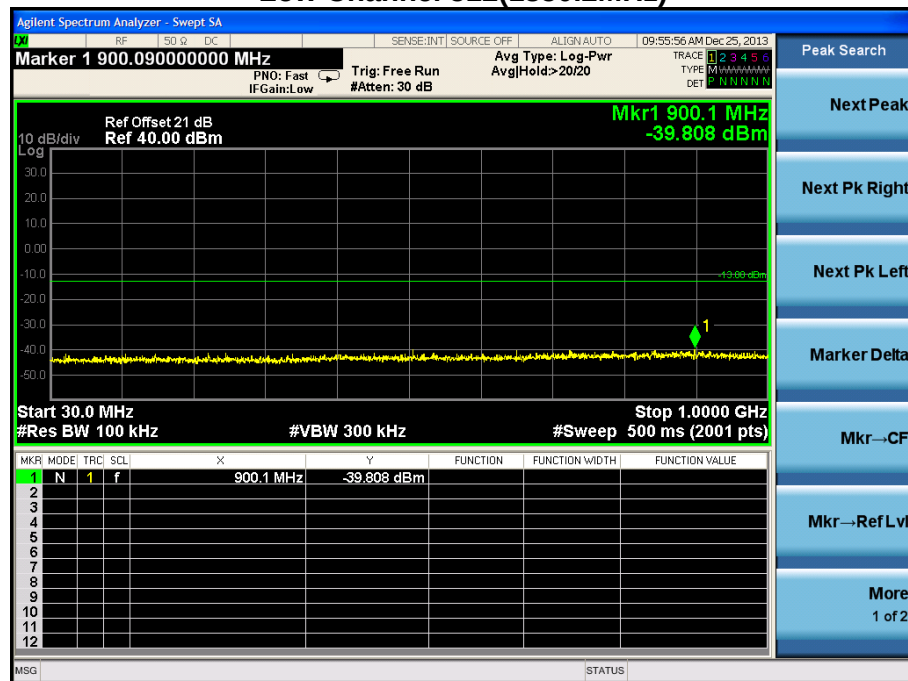

Agilent Spectrum Analyzer - Swept SA

Marker 1 859.83500000 MHz

PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg|Hold:>20/20

TRAC 1 2 3 4 5 6 TYPE: R-HARMANW DET: NNNNN

Ref Offset 21 dB Ref 40.00 dBm

Mkr1 859.8 MHz -39.964 dBm

10 dB/div Log

Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Stop 1.0000 GHz #Sweep 500 ms (2001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	859.8 MHz	-39.964 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSG STATUS

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta



Mkr→CF

Mkr→Ref Lvl

More 1 of 2

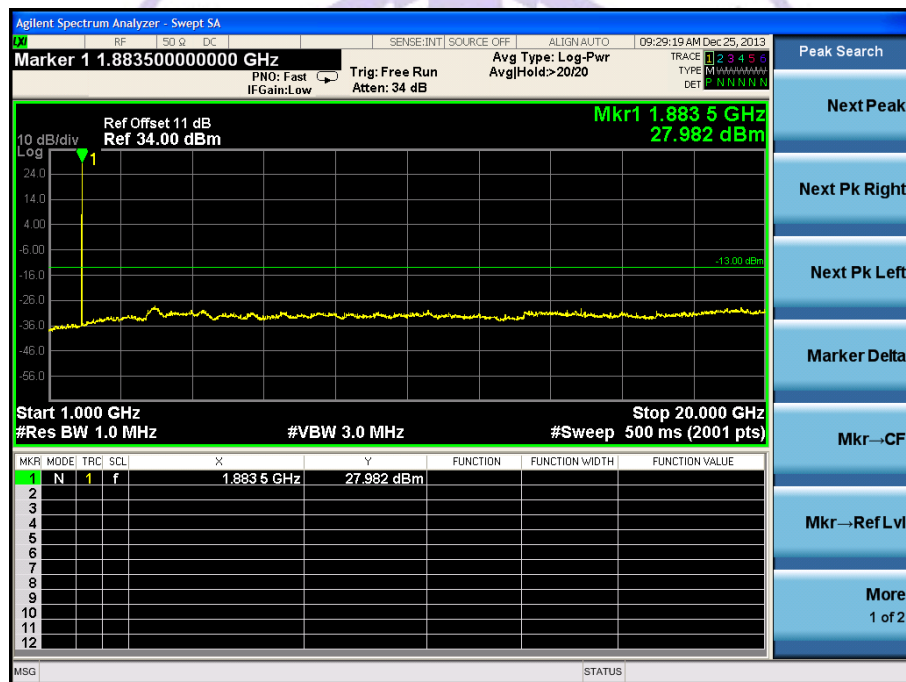

High Channel 810(1909.8MHz)

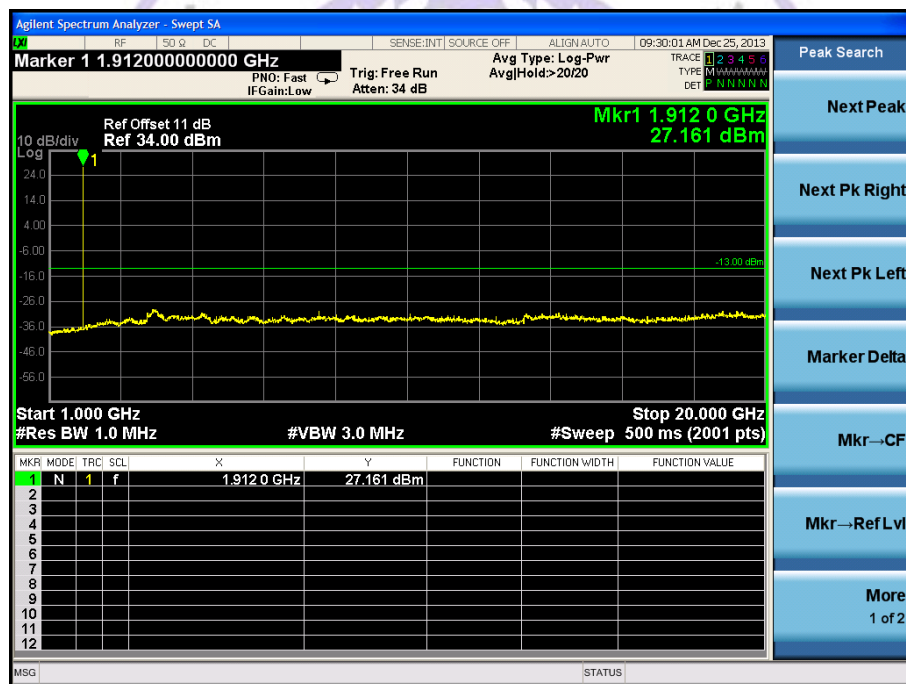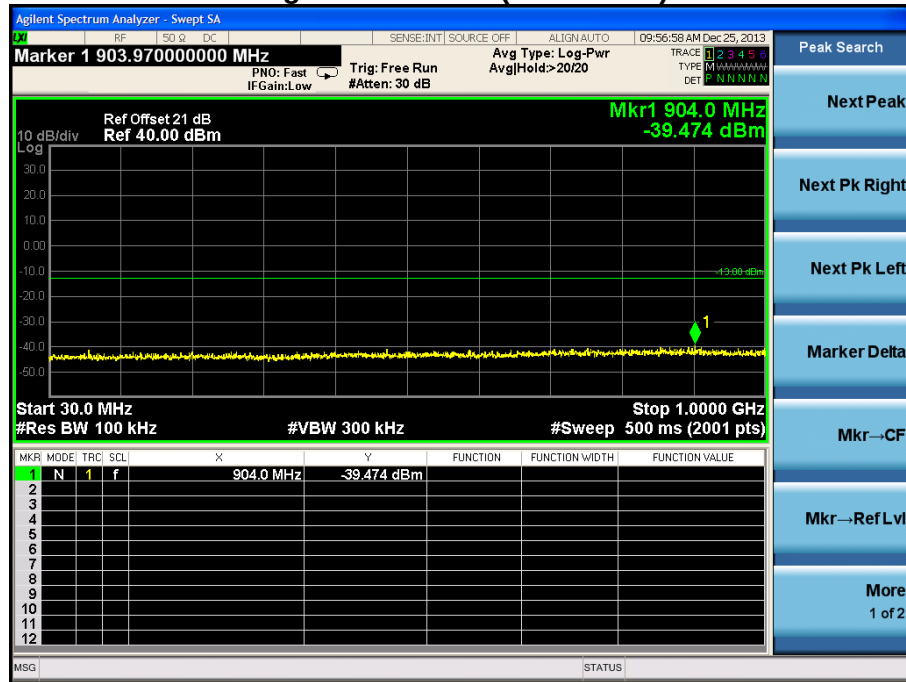

Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 1: GSM850 Link
Date of Test	2013/12/22

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
1646.30	-47.60	V	-40.92	0.62	5.13	-36.41	-13.00	-23.41
2470.60	-56.24	V	-45.40	0.76	5.54	-40.62	-13.00	-27.62
1646.30	-51.72	H	-44.05	0.62	5.13	-39.54	-13.00	-26.54
2470.60	-53.31	H	-42.92	0.76	5.54	-38.14	-13.00	-25.14
Middle Channel 189 (836.40MHz)								
1671.50	-48.95	V	-41.66	0.63	5.05	-37.24	-13.00	-24.24
2513.00	-54.71	V	-44.11	0.77	5.64	-39.24	-13.00	-26.24
1671.50	-52.14	H	-44.07	0.63	5.05	-39.65	-13.00	-26.65
2513.00	-52.34	H	-42.12	0.77	5.64	-37.25	-13.00	-24.25
High Channel 251 (848.80MHz)								
1697.00	-50.78	V	-43.02	0.63	4.97	-38.68	-13.00	-25.68
2547.00	-55.31	V	-44.80	0.78	5.73	-39.85	-13.00	-26.85
1697.00	-57.82	H	-49.69	0.63	4.97	-45.35	-13.00	-32.35
2547.00	-53.66	H	-42.96	0.78	5.73	-38.01	-13.00	-25.01



Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 2: PCS1900 Link
Date of Test	2013/12/22

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
3703.00	-44.15	V	-34.28	0.95	7.88	-27.35	-13.00	-14.35
5547.50	-59.52	V	-49.15	1.16	10.10	-40.21	-13.00	-27.21
3703.00	-48.97	H	-38.95	0.95	7.88	-32.02	-13.00	-19.02
5547.50	-63.08	H	-52.59	1.16	10.10	-43.65	-13.00	-30.65
Middle Channel 661 (1880.00MHz)								
3762.50	-43.39	V	-33.33	0.95	7.93	-26.35	-13.00	-13.35
5641.00	-60.68	V	-49.94	1.18	10.10	-41.02	-13.00	-28.02
3762.50	-50.50	H	-40.63	0.95	7.93	-33.65	-13.00	-20.65
5641.00	-65.90	H	-55.27	1.18	10.10	-46.35	-13.00	-33.35
High Channel 810 (1909.80MHz)								
3822.00	-46.68	V	-36.52	0.96	8.07	-29.41	-13.00	-16.41
5726.00	-61.53	V	-50.91	1.21	10.10	-42.02	-13.00	-29.02
3822.00	-54.65	H	-44.36	0.96	8.07	-37.25	-13.00	-24.25
5726.00	-66.14	H	-55.40	1.21	10.10	-46.51	-13.00	-33.51



Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 3: GPRS 850 Link
Date of Test	2013/12/22

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
1646.01	-35.26	V	-39.77	0.62	5.13	-35.26	-13.00	-22.26
2470.50	-56.54	V	-50.13	0.76	5.54	-45.35	-13.00	-32.35
1646.00	-51.13	H	-40.02	0.62	5.13	-35.51	-13.00	-22.51
2470.50	-49.53	H	-42.13	0.76	5.54	-37.35	-13.00	-24.35
Middle Channel 189 (836.40MHz)								
1671.50	-45.21	V	-49.63	0.63	5.05	-45.21	-13.00	-32.21
2513.00	-47.36	V	-40.52	0.77	5.64	-35.65	-13.00	-22.65
1671.50	-64.02	H	-52.97	0.63	5.05	-48.55	-13.00	-35.55
2513.00	-50.84	H	-43.22	0.77	5.64	-38.35	-13.00	-25.35
High Channel 251 (848.80MHz)								
1697.00	-40.22	V	-44.56	0.63	4.97	-40.22	-13.00	-27.22
2547.00	-56.22	V	-49.07	0.78	5.73	-44.12	-13.00	-31.12
1697.00	-57.48	H	-46.36	0.63	4.97	-42.02	-13.00	-29.02
2547.00	-52.39	H	-44.87	0.78	5.73	-39.92	-13.00	-26.92




Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 4: GPRS1900 Link
Date of Test	2013/12/22

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
3703.00	-35.65	V	-42.58	0.95	7.88	-35.65	-13.00	-22.65
5547.50	-58.05	V	-50.19	1.16	10.10	-41.25	-13.00	-28.25
3703.00	-56.83	H	-44.45	0.95	7.88	-37.52	-13.00	-24.52
5547.50	-62.31	H	-54.30	1.16	10.10	-45.36	-13.00	-32.36
Middle Channel 661 (1880.00MHz)								
3762.50	-29.65	V	-36.63	0.95	7.93	-29.65	-13.00	-16.65
5641.00	-59.37	V	-51.25	1.18	10.10	-42.33	-13.00	-29.33
3762.50	-58.20	H	-45.52	0.95	7.93	-38.54	-13.00	-25.54
5641.00	-62.41	H	-54.48	1.18	10.10	-45.56	-13.00	-32.56
High Channel 810 (1909.80MHz)								
3822.00	-36.35	V	-43.46	0.96	8.07	-36.35	-13.00	-23.35
5726.00	-60.63	V	-52.25	1.21	10.10	-43.36	-13.00	-30.36
3822.00	-59.35	H	-46.95	0.96	8.07	-39.84	-13.00	-26.84
5726.00	-64.78	H	-56.27	1.21	10.10	-47.38	-13.00	-34.38



Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 5: EDGE 850 Link
Date of Test	2013/12/25

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
1646.00	-49.60	V	-42.92	0.62	5.13	-38.41	-13.00	-25.41
2470.50	-63.60	V	-52.76	0.76	5.54	-47.98	-13.00	-34.98
1646.00	-52.82	H	-45.15	0.62	5.13	-40.64	-13.00	-27.64
2470.50	-55.59	H	-45.20	0.76	5.54	-40.42	-13.00	-27.42
Middle Channel 189 (836.40MHz)								
1671.50	-59.32	V	-52.03	0.63	5.05	-47.61	-13.00	-34.61
2513.00	-55.46	V	-44.85	0.77	5.64	-39.98	-13.00	-26.98
1671.50	-65.68	H	-57.61	0.63	5.05	-53.19	-13.00	-40.19
2513.00	-56.65	H	-46.42	0.77	5.64	-41.55	-13.00	-28.55
High Channel 251 (848.80MHz)								
1697.00	-54.39	V	-46.63	0.63	4.97	-42.29	-13.00	-29.29
2547.00	-61.87	V	-51.36	0.78	5.73	-46.41	-13.00	-33.41
1697.00	-58.20	H	-50.07	0.63	4.97	-45.73	-13.00	-32.73
2547.00	-58.27	H	-47.57	0.78	5.73	-42.62	-13.00	-29.62

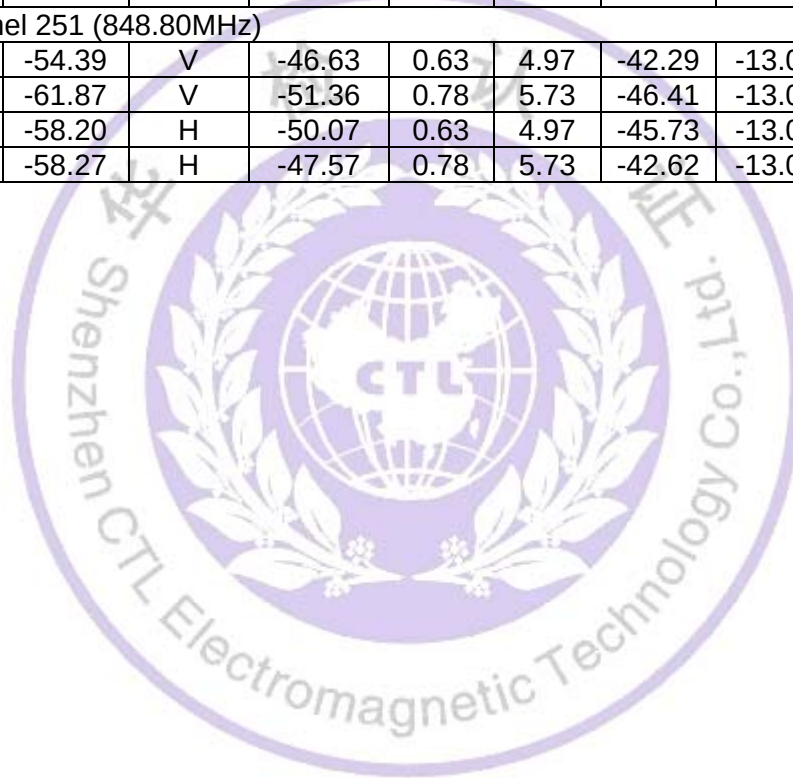


Product	2G Phone Tablet PC
Test Item	Radiated Spurious Emission
Test Mode	Mode 6: EDGE1900 Link
Date of Test	2013/12/25

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
3703.00	-46.24	V	-36.37	0.95	7.88	-29.44	-13.00	-16.44
5547.50	-66.59	V	-56.21	1.16	10.10	-47.27	-13.00	-34.27
3703.00	-54.00	H	-43.98	0.95	7.88	-37.05	-13.00	-24.05
5547.50	-69.22	H	-58.73	1.16	10.10	-49.79	-13.00	-36.79
Middle Channel 661 (1880.00MHz)								
3762.50	-47.07	V	-37.01	0.95	7.93	-30.03	-13.00	-17.03
5641.00	-64.52	V	-53.78	1.18	10.10	-44.86	-13.00	-31.86
3762.50	-54.73	H	-44.86	0.95	7.93	-37.88	-13.00	-24.88
5641.00	-70.39	H	-59.77	1.18	10.10	-50.85	-13.00	-37.85
High Channel 810 (1909.80MHz)								
3822.00	-48.94	V	-38.78	0.96	8.07	-31.67	-13.00	-18.67
5726.00	-65.00	V	-54.39	1.21	10.10	-45.50	-13.00	-32.50
3822.00	-58.38	H	-48.09	0.96	8.07	-40.98	-13.00	-27.98
5726.00	-69.00	H	-58.27	1.21	10.10	-49.38	-13.00	-36.38



4.6. Frequency Stability under Temperature & Voltage Variations

TEST CONFIGURATION

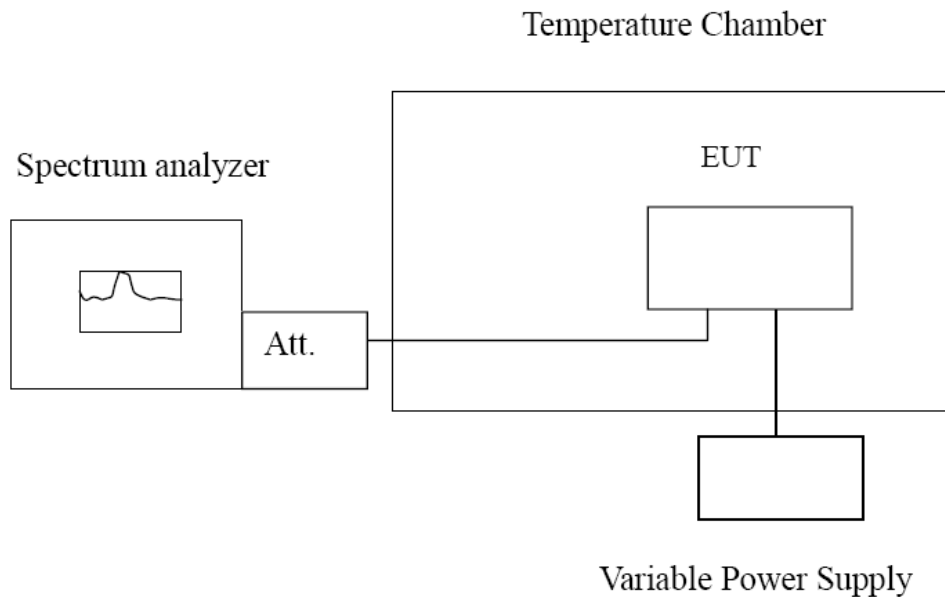

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

LIMIT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit < ± 2.5 ppm

TEST RESULTS

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 1: GSM 850 Link
Date of Test	2013/12/22

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.40	7	± 2091
-20	836.40	19	± 2091
-10	836.40	25	± 2091
0	836.40	31	± 2091
10	836.40	-33	± 2091
20	836.40	-22	± 2091
30	836.40	-65	± 2091
40	836.40	-23	± 2091
50	836.40	-19	± 2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.40	3	± 2091
3.700	836.40	24	± 2091
3.400	836.40	11	± 2091

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 2: PCS 1900 Link
Date of Test	2013/12/22

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880.00	58	± 4700
-20	1880.00	44	± 4700
-10	1880.00	23	± 4700
0	1880.00	3	± 4700
10	1880.00	11	± 4700
20	1880.00	15	± 4700
30	1880.00	-19	± 4700
40	1880.00	-32	± 4700
50	1880.00	8	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880.00	-21	± 4700
3.700	1880.00	-35	± 4700
3.400	1880.00	12	± 4700

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 3: GPRS 850 Link
Date of Test	2013/12/22

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.40	20	± 2091
-20	836.40	23	± 2091
-10	836.40	8	± 2091
0	836.40	-32	± 2091
10	836.40	-48	± 2091
20	836.40	-61	± 2091
30	836.40	-35	± 2091
40	836.40	28	± 2091
50	836.40	-43	± 2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.40	6	± 2091
3.700	836.40	13	± 2091
3.400	836.40	10	± 2091

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 4: GPRS 1900 Link
Date of Test	2013/12/22

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880.00	61	± 4700
-20	1880.00	32	± 4700
-10	1880.00	9	± 4700
0	1880.00	3	± 4700
10	1880.00	2	± 4700
20	1880.00	43	± 4700
30	1880.00	30	± 4700
40	1880.00	23	± 4700
50	1880.00	10	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880.00	10	± 4700
3.700	1880.00	24	± 4700
3.400	1880.00	47	± 4700

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 5: EDGE 850 Link
Date of Test	2013/12/22

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.40	13	± 2091
-20	836.40	17	± 2091
-10	836.40	0	± 2091
0	836.40	-44	± 2091
10	836.40	-62	± 2091
20	836.40	-76	± 2091
30	836.40	-47	± 2091
40	836.40	22	± 2091
50	836.40	-56	± 2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	836.40	-2	± 2091
3.700	836.40	6	± 2091
3.400	836.40	2	± 2091

Product	2G Phone Tablet PC
Test Item	Frequency Stability Under Temperature & Voltage Variations
Test Mode	Mode 6: EDGE 1900 Link
Date of Test	2013/12/22



Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	1880.00	58	± 4700
-20	1880.00	26	± 4700
-10	1880.00	1	± 4700
0	1880.00	-6	± 4700
10	1880.00	-7	± 4700
20	1880.00	39	± 4700
30	1880.00	24	± 4700
40	1880.00	17	± 4700
50	1880.00	2	± 4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	1880.00	2	± 4700
3.700	1880.00	18	± 4700
3.400	1880.00	43	± 4700

5. Test Setup Photos of the EUT

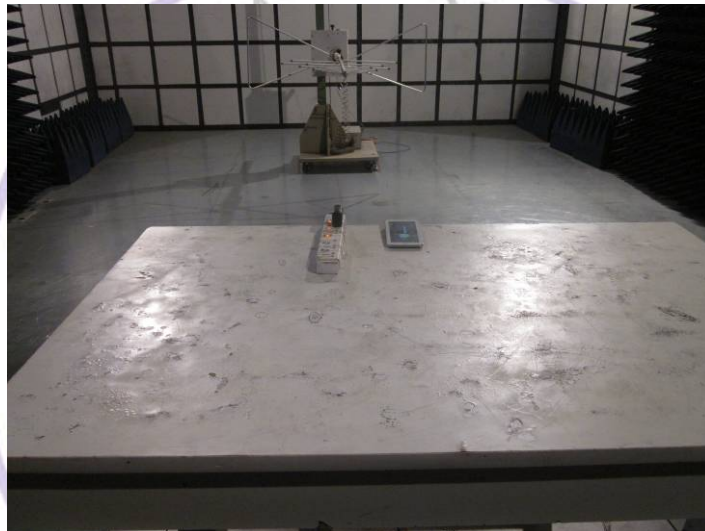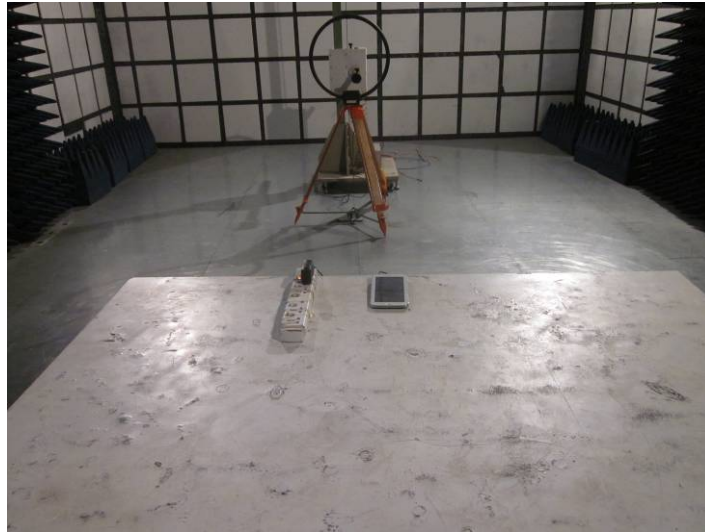

6. External and Internal Photos of the EUT


External Photos of EUT










Internal Photos of EUT

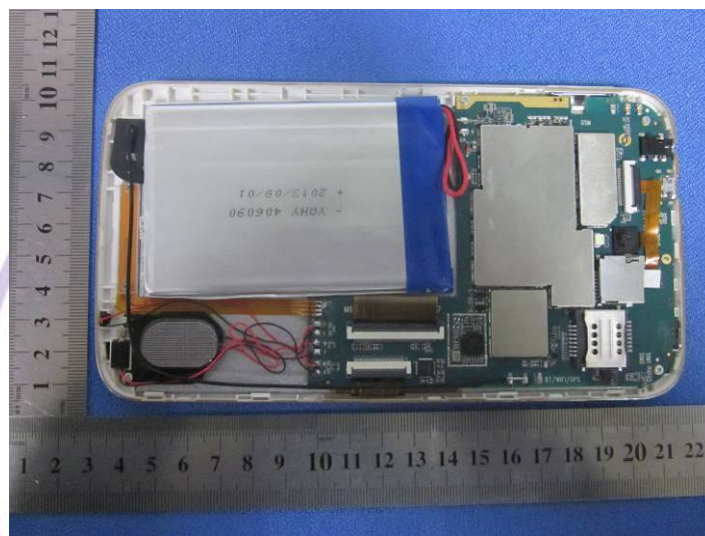

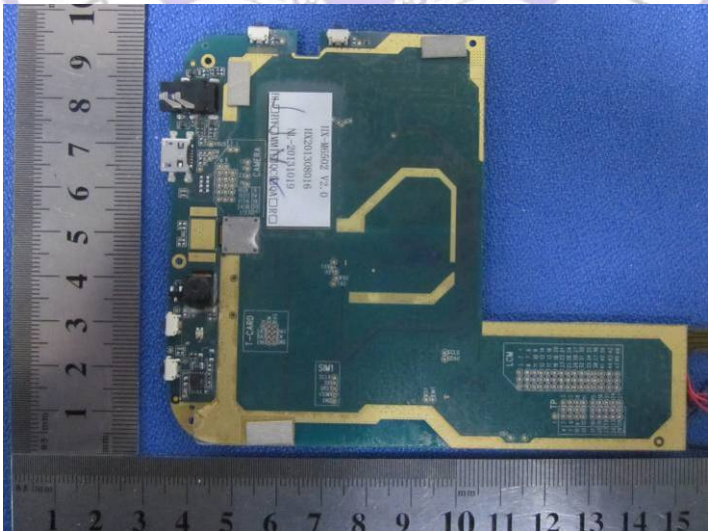

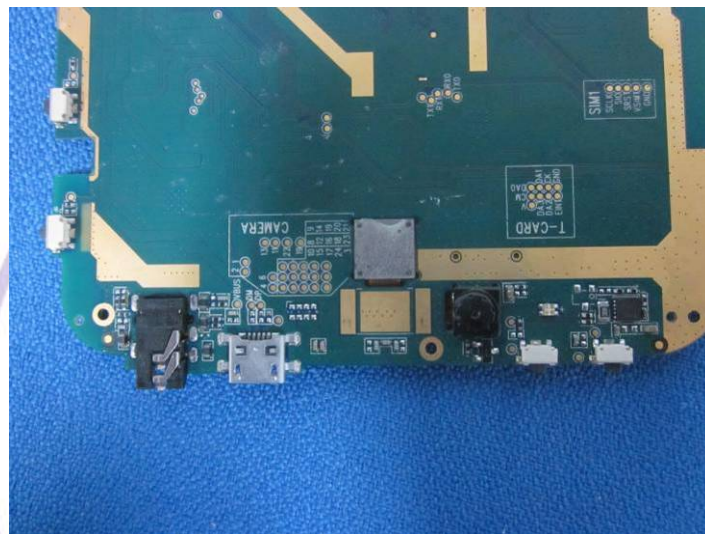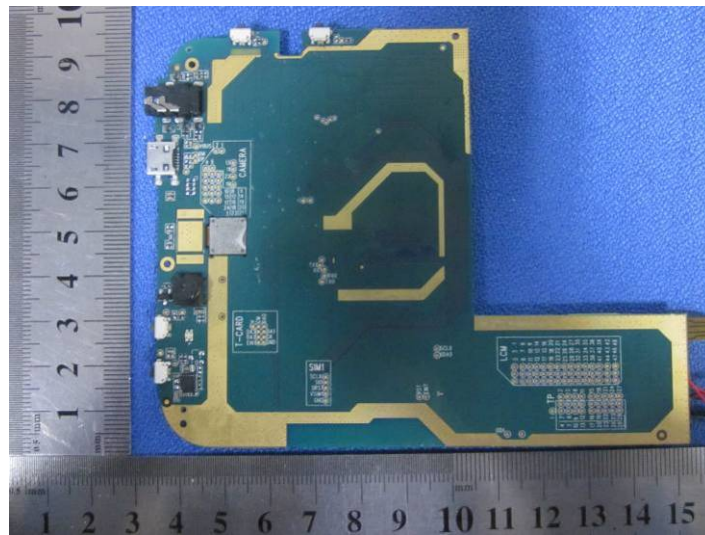

.....End of Report.....