

Verification of Conformity

On Behalf Of

Jiangmen Dascom Computer Peripherals Co., Ltd.

Portable Receipt and Label Printer

Model No.: DP-530, DP-530L

FCC ID: Z7ODP5300

Prepared for : Jiangmen Dascom Computer Peripherals Co., Ltd.
Address : No.399, Jin Xing Road, Jiang Hai District, Jiangmen
City, Guang Dong Province, P.R. China

Prepared by : DONGGUAN EMTEK CO., LTD.
Address : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

Tel : +86-769-22807078
Fax: +86-769-22807079

Report Number : ED150824030E2
Date of Test : August 24, 2015 to September 30, 2015
Date of Report : October 22, 2015

TABLE OF CONTENTS

Test Report Description	Page
1. DESCRIPTION OF STANDARDS AND RESULTS	5
1.1. Result Summary.....	5
1.2. Deviations from Standard Test Methods.....	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT).....	6
2.2. Description of Support Device.....	7
2.3. Test Facility	7
2.4. Measurement Uncertainty	7
3. POWER LINE CONDUCTED MEASUREMENT	8
3.1. Test Equipment	8
3.2. Block Diagram of Test Setup	8
3.3. Configuration of EUT on Measurement.....	9
3.4. Operating Condition of EUT	9
3.5. Test Procedure.....	9
3.6. Power Line Conducted Emission Measurement Results	9
4. RADIATED EMISSION MEASUREMENT.....	14
4.1. Test Equipment	14
4.2. Block Diagram of Test Setup	15
4.3. Radiated Emission Limit (Class B).....	16
4.4. EUT Configuration on Measurement.....	16
4.5. Operating Condition of EUT	17
4.6. Test Procedure.....	17
4.7. Radiated Emission Measurement Result	17
5. PHOTOGRAPH	24
5.1. Photos of Conducted Emission Measurement.....	24
5.2. Photo of Radiated Measurement	24

APPENDIX (Photos of EUT) (6 Pages)

TEST REPORT DESCRIPTION

Applicant : Jiangmen Dascom Computer Peripherals Co., Ltd.
Manufacturer : Jiangmen Dascom Computer Peripherals Co., Ltd.
EUT : Portable Receipt and Label Printer
Model No. : DP-530, DP-530L
Rating : DC 19V, 3.42A

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Class B October 2015 & FCC / ANSI C63.4-2014

The device described above is tested by DONGGUAN EMTEK CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and DONGGUAN EMTEK CO., LTD. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of DONGGUAN EMTEK CO., LTD.

Date of Test : August 24, 2015 to September 30, 2015

Prepared by : Ivy Huang

Ivy Huang/Editor

Reviewer : Alan He

Alan He/Supervisor

Approved & Authorized Signer : Sam Lv

Sam Lv/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ED150824030E2

1. DESCRIPTION OF STANDARDS AND RESULTS

1.1. Result Summary

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted Disturbance at Mains Terminals	FCC Part15, Subpart B, Class B ANSI C63.4-2014	§ 15.107(a)	Pass
Radiated Disturbance	FCC Part15, Subpart B, Class B ANSI C63.4-2014	§ 15.109(a)	Pass

1.2. Deviations from Standard Test Methods

For the digital part of the EUT complete test program (Conducted Emissions and Radiated Emissions per subpart B) was conducted. Since the EUT uses an approved Bluetooth transmitter, only spot verification of the Radiated Spurious Emissions and verification of the frequency range was considered necessary.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Portable Receipt and Label Printer

Model Number : DP-530, DP-530L
(Note: The samples are the same except appearance and model number. So DP-530 was selected for full test.)

Trade Mark : 

Power Supply for Test : AC 120V/60Hz for Adapter

Operate Mode : Printing

Applicant : Jiangmen Dascom Computer Peripherals Co., Ltd.

Address : No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R. China

Manufacturer : Jiangmen Dascom Computer Peripherals Co., Ltd.

Address : No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R. China

Date of sample receiver : August 24, 2015

Date of Test : August 24, 2015 to September 30, 2015

2.2. Description of Support Device

Notebook : Manufacturer: DELL
 M/N: Inspiron 14R-N4110
 S/N: 78RRRS1
 CE, FCC: DOC

2.3. Test Facility

Site Description
 EMC Lab. : Accredited by CNAS, 2015.06.11
 The certificate is valid until 2018.07.03
 The Laboratory has been assessed and proved to be in
 compliance with CNAS/CL01: 2006
 The Certificate Registration Number is L3150

Accredited by TUV Rheinland, 2014.05.22
 The certificate is valid until 2015.11.21
 The Laboratory has been assessed according to the
 requirements ISO/IEC 17025: 2005

Accredited by FCC, June 18, 2014
 The Certificate Number is 247565

Accredited by Industry Canada, February 19, 2014
 The Certificate Number is 9444A.

Name of Firm : DONGGUAN EMTEK CO., LTD.
 Site Location : No.281, Guantai Road, Nancheng District, Dongguan,
 Guangdong, China

2.4. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	: 2.42dB
Disturbance Power	: 2.86dB
Radiated Emission Uncertainty (3m Chamber)	: 3.34dB (30M~1GHz Polarize: H) 3.32dB (30M~1GHz Polarize: V)
Uncertainty for test site temperature and humidity	: 0.6°C 4%

3. POWER LINE CONDUCTED MEASUREMENT

3.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100018	May 16, 2015	1 Year
2.	L.I.S.N	Rohde & Schwarz	ENV216	100017	May 16, 2015	1 Year
3.	RF switching Unit	CDS	RUS-M2	38401	May 16, 2015	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators



(EUT: Portable Receipt and Label Printer)

3.2.2. Block diagram of test setup

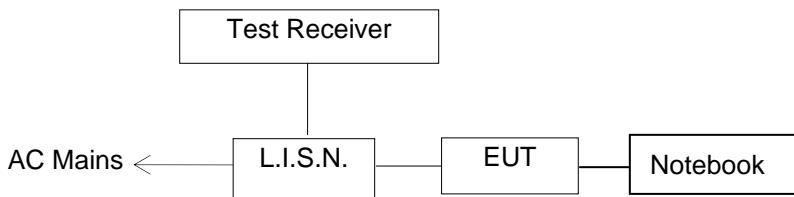

(EUT: Portable Receipt and Label Printer)

3.2.3. Power Line Conducted Emission Measurement Limits (Class B)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0*	56.0 ~ 46.0*
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Portable Receipt and Label Printer
Model Number : DP-530

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.2.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in test mode (Printing) and measure it.

3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2015 on Conducted Emission Measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 9KHz.


The frequency range from 150kHz to 30MHz is investigated.

The scanning waveforms are below the following pages.

3.6. Power Line Conducted Emission Measurement Results

PASS

Please see the attached pages.

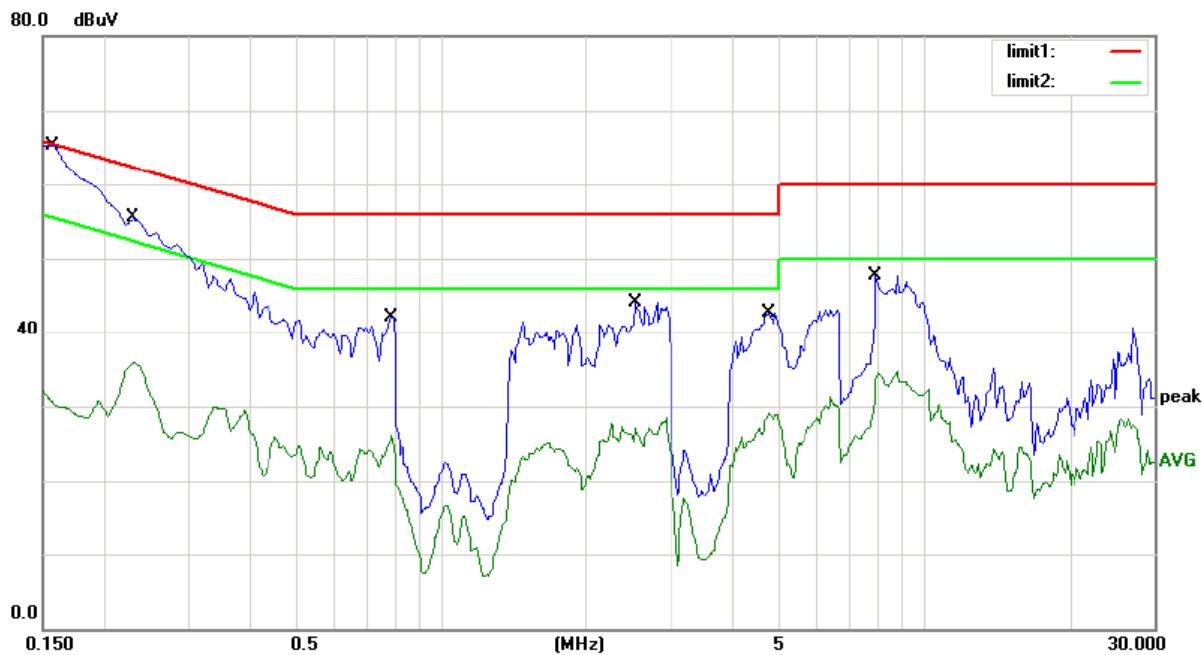

Site site #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Printing(USB Interface Connection)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1590	59.35	0.00	59.35	65.52	-6.17	QP	
2		0.1590	35.49	0.00	35.49	55.52	-20.03	AVG	
3		0.2310	50.28	0.00	50.28	62.41	-12.13	QP	
4		0.2310	35.97	0.00	35.97	52.41	-16.44	AVG	
5		0.7890	38.69	0.00	38.69	56.00	-17.31	QP	
6		0.7890	26.02	0.00	26.02	46.00	-19.98	AVG	
7		2.5200	40.28	0.00	40.28	56.00	-15.72	QP	
8		2.5200	27.01	0.00	27.01	46.00	-18.99	AVG	
9		4.7600	40.26	0.00	40.26	56.00	-15.74	QP	
10		4.7600	29.08	0.00	29.08	46.00	-16.92	AVG	
11		7.9600	45.58	0.00	45.58	60.00	-14.42	QP	
12		7.9600	34.45	0.00	34.45	50.00	-15.55	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.



Site site #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: Printing(USB Interface Connection)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1	*	0.2130	50.23	0.00	50.23	63.09	-12.86	QP	
2		0.2130	29.46	0.00	29.46	53.09	-23.63	AVG	
3		1.9050	35.58	0.00	35.58	56.00	-20.42	QP	
4		1.9050	22.72	0.00	22.72	46.00	-23.28	AVG	
5		2.6800	38.60	0.00	38.60	56.00	-17.40	QP	
6		2.6800	27.44	0.00	27.44	46.00	-18.56	AVG	
7		4.8600	40.21	0.00	40.21	56.00	-15.79	QP	
8		4.8600	28.59	0.00	28.59	46.00	-17.41	AVG	
9		7.8000	45.63	0.00	45.63	60.00	-14.37	QP	
10		7.8000	33.60	0.00	33.60	50.00	-16.40	AVG	
11		19.8500	43.87	0.00	43.87	60.00	-16.13	QP	
12		19.8500	33.42	0.00	33.42	50.00	-16.58	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

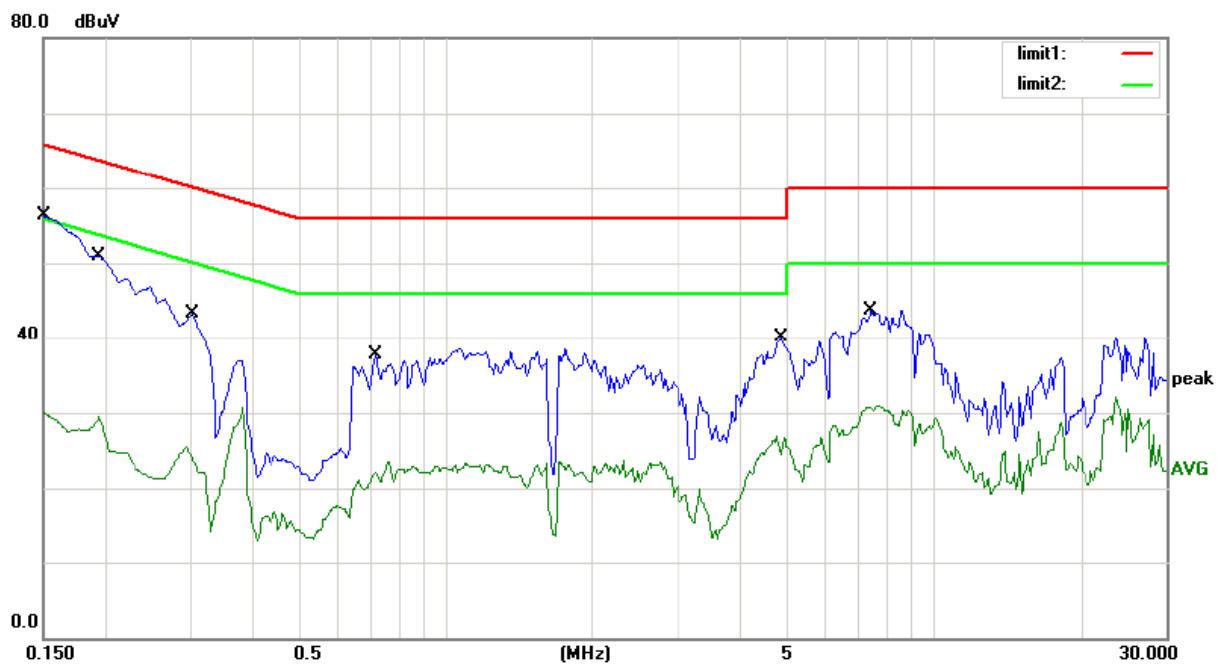

Site site #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz


Humidity: 55 %

Mode: Printing(USB Interface Connection)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1	*	0.1500	53.69	0.00	53.69	66.00	-12.31	QP	
2		0.1500	33.22	0.00	33.22	56.00	-22.78	AVG	
3		0.1950	45.25	0.00	45.25	63.82	-18.57	QP	
4		0.1950	29.41	0.00	29.41	53.82	-24.41	AVG	
5		0.3003	38.69	0.00	38.69	60.23	-21.54	QP	
6		0.3003	25.50	0.00	25.50	50.23	-24.73	AVG	
7		0.7170	35.36	0.00	35.36	56.00	-20.64	QP	
8		0.7170	21.85	0.00	21.85	46.00	-24.15	AVG	
9		4.8600	38.69	0.00	38.69	56.00	-17.31	QP	
10		4.8600	26.85	0.00	26.85	46.00	-19.15	AVG	
11		7.4600	41.00	0.00	41.00	60.00	-19.00	QP	
12		7.4600	30.62	0.00	30.62	50.00	-19.38	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

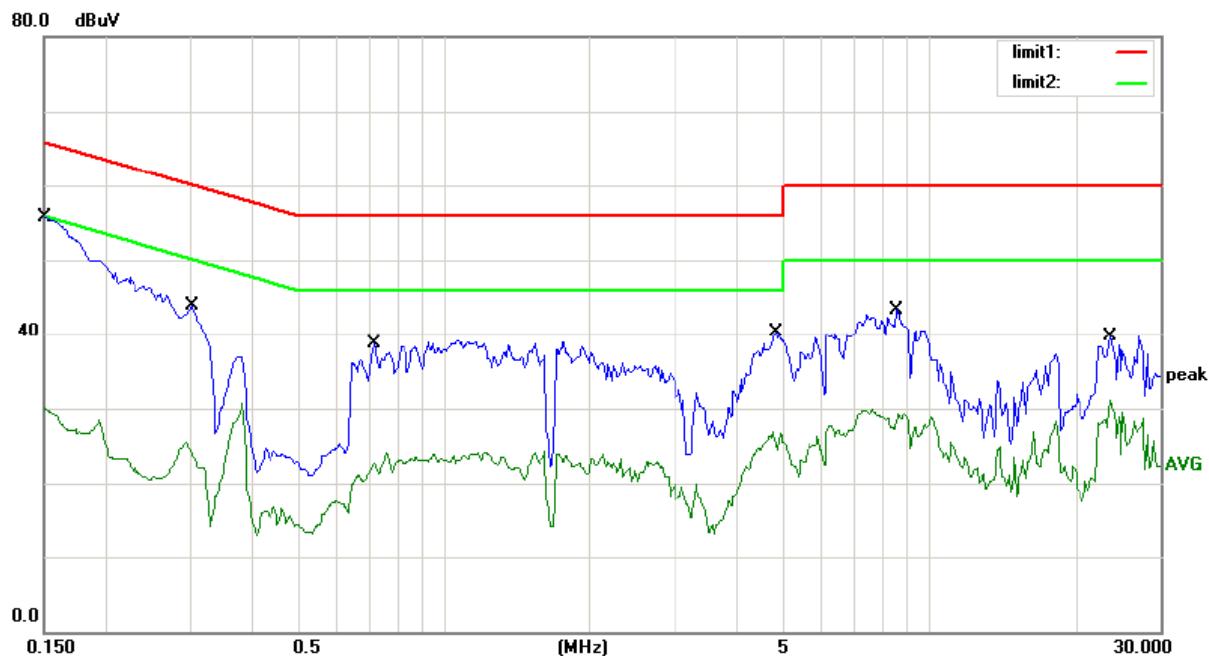

Site site #1 Phase: **N** Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz

Humidity: 55 %

Mode: Printing(USB Interface Connection)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	54.21	0.00	54.21	66.00	-11.79	QP	
2		0.1500	30.01	0.00	30.01	56.00	-25.99	AVG	
3		0.3030	40.12	0.00	40.12	60.16	-20.04	QP	
4		0.3030	25.50	0.00	25.50	50.16	-24.66	AVG	
5		0.7170	35.58	0.00	35.58	56.00	-20.42	QP	
6		0.7170	22.61	0.00	22.61	46.00	-23.39	AVG	
7		4.8224	38.57	0.00	38.57	56.00	-17.43	QP	
8		4.8224	26.67	0.00	26.67	46.00	-19.33	AVG	
9		8.5800	41.58	0.00	41.58	60.00	-18.42	QP	
10		8.5800	29.32	0.00	29.32	50.00	-20.68	AVG	
11		23.6500	39.68	0.00	39.68	60.00	-20.32	QP	
12		23.6500	31.14	0.00	31.14	50.00	-18.86	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

4.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	May 16, 2015	1 Year
2.	Bilog Antenna	Schwarzbeck	VULB9163	000141	May 16, 2015	1 Year
3.	Power Amplifier	CDS	RSU-M352	818	May 16, 2015	1 Year
4.	Power Amplifier	HP	8447F	OPT H64	May 16, 2015	1 Year
5.	Color Monitor	SUNSPO	SP-140A	N/A	May 16, 2015	1 Year
6.	Single Line Filter	JIANLI	XL-3	N/A	May 16, 2015	1 Year
7.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	May 16, 2015	1 Year
8.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	May 16, 2015	1 Year
9.	DC Power Filter	JIANLI	DL-2X50B	N/A	May 16, 2015	1 Year
10.	Cable	Schwarzbeck	PLF-100	519489	May 16, 2015	1 Year
11.	Cable	Rosenberger	CIL02	A0783566	May 16, 2015	1 Year
12.	Cable	Rosenberger	RG 233/U	525178	May 16, 2015	1 Year


4.2. Block Diagram of Test Setup

4.2.1. Block diagram of connection between the EUT and simulators



(EUT: Portable Receipt and Label Printer)

4.2.2. Anechoic Chamber Test Setup Diagram

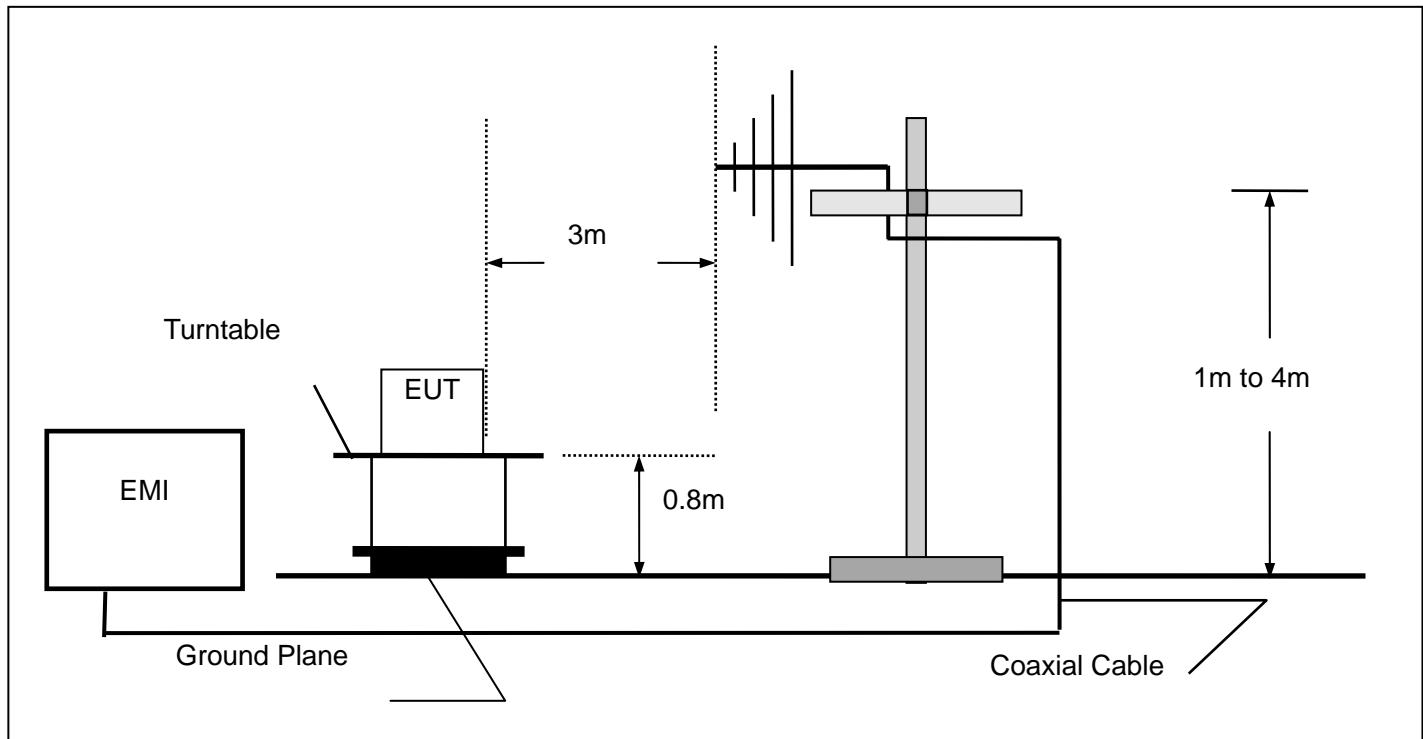

(EUT: Portable Receipt and Label Printer)

4.3. Radiated Emission Limit (Class B)

Limits below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Limits above 1GHz

Frequency (GHz)	Distance (Meters)	Field Strengths Limit	
		Average (dB μ V/m)	Peak (dB μ V/m)
1~15	3	54	74

Highest frequency generated or used in the device (MHz)	Upper frequency of Radiated measurement (MHz)
Below 1.705	No radiated testing required
1.705~108	1000
108~500	2000
500~1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Remark: (1) Emission level (dB) μ V = 20 log Emission level μ V/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : Portable Receipt and Label Printer
 Model Number : DP-530

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT as shown in Section 4.2.
- 4.5.2. Turn on the power of all equipment.
- 4.5.3. Let the EUT work in test mode (Printing) and measure it.

4.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meter to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.


The bandwidth of the EMI test receiver (R&S ESCI) is set at 120KHz.
The scanning curves in below a few pages.

4.7. Radiated Emission Measurement Result

PASS.

The frequency range from 30MHz to 1000MHz is investigated.

Please see the attached pages.

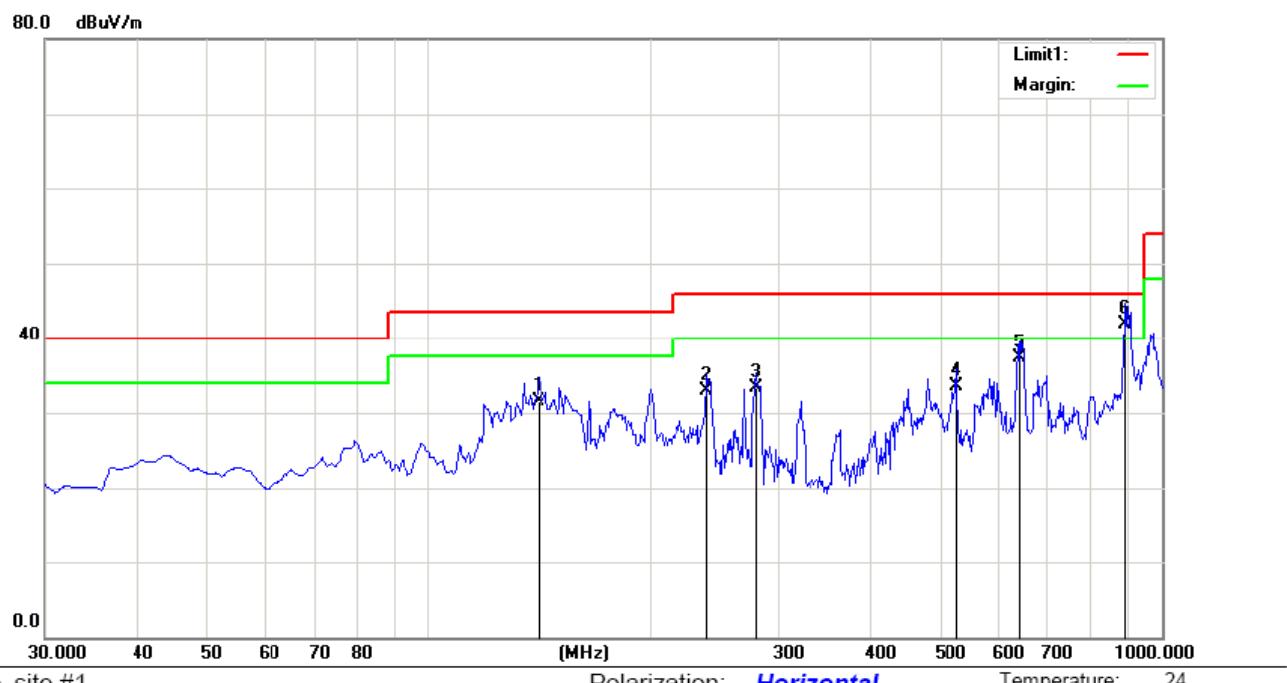

Site site #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 55 %


Mode:USB Print

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		141.5500	48.69	-17.14	31.55	43.50	-11.95	QP		0
2		240.4900	48.65	-15.66	32.99	46.00	-13.01	QP		0
3		279.2900	48.27	-14.91	33.36	46.00	-12.64	QP		0
4		525.6700	43.26	-9.80	33.46	46.00	-12.54	QP		0
5		640.1300	45.33	-8.05	37.28	46.00	-8.72	QP		0
6	*	892.3300	45.75	-3.81	41.94	46.00	-4.06	QP		0

*:Maximum data x:Over limit I:over margin

Operator:

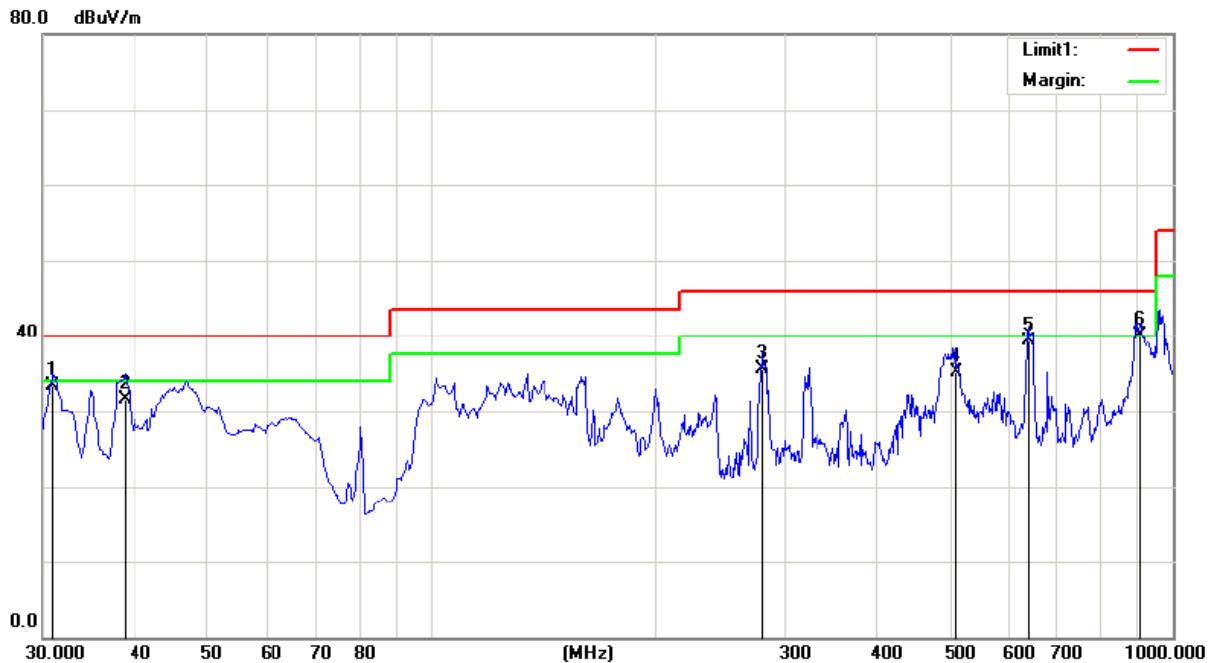

Site site #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 55 %


Mode:USB Print

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.9700	48.20	-14.90	33.30	40.00	-6.70	QP		0	
2		38.7300	45.26	-13.77	31.49	40.00	-8.51	QP		0	
3		279.2900	50.35	-14.91	35.44	46.00	-10.56	QP		0	
4		511.1200	45.21	-10.15	35.06	46.00	-10.94	QP		0	
5		640.1300	47.29	-8.08	39.21	46.00	-6.79	QP		0	
6	*	905.9100	43.55	-3.37	40.18	46.00	-5.82	QP		0	

*:Maximum data x:Over limit !:over margin

Operator:

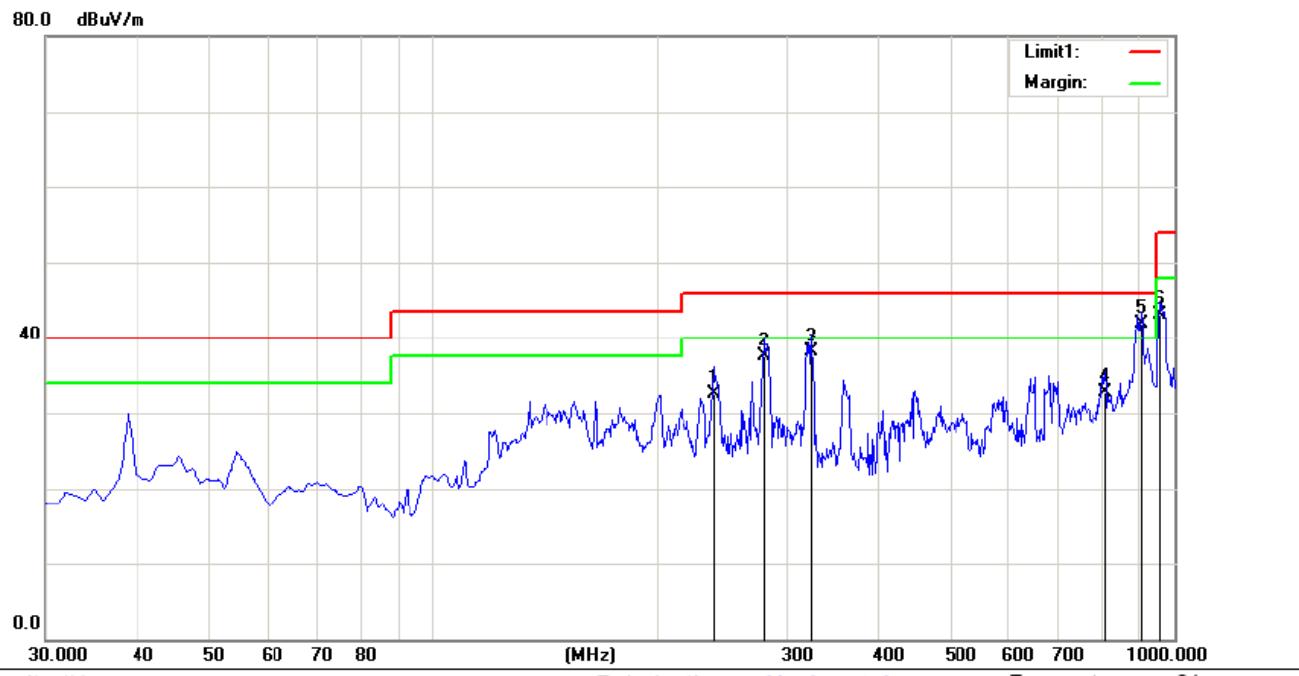

Site site #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m

Power: DC 19V

Humidity: 55 %

Mode: USB Print


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		239.5200	48.28	-15.68	32.60	46.00	-13.40	QP		0	
2		279.2900	52.33	-14.91	37.42	46.00	-8.58	QP		0	
3		323.9100	51.26	-13.07	38.19	46.00	-7.81	QP		0	
4		807.9400	37.55	-4.85	32.70	46.00	-13.30	QP		0	
5	*	903.9700	45.30	-3.46	41.84	46.00	-4.16	QP		0	
6		958.2900	45.62	-2.56	43.06	54.00	-10.94	QP		0	

*:Maximum data x:Over limit !:over margin

Operator:

80.0 dBuV/m

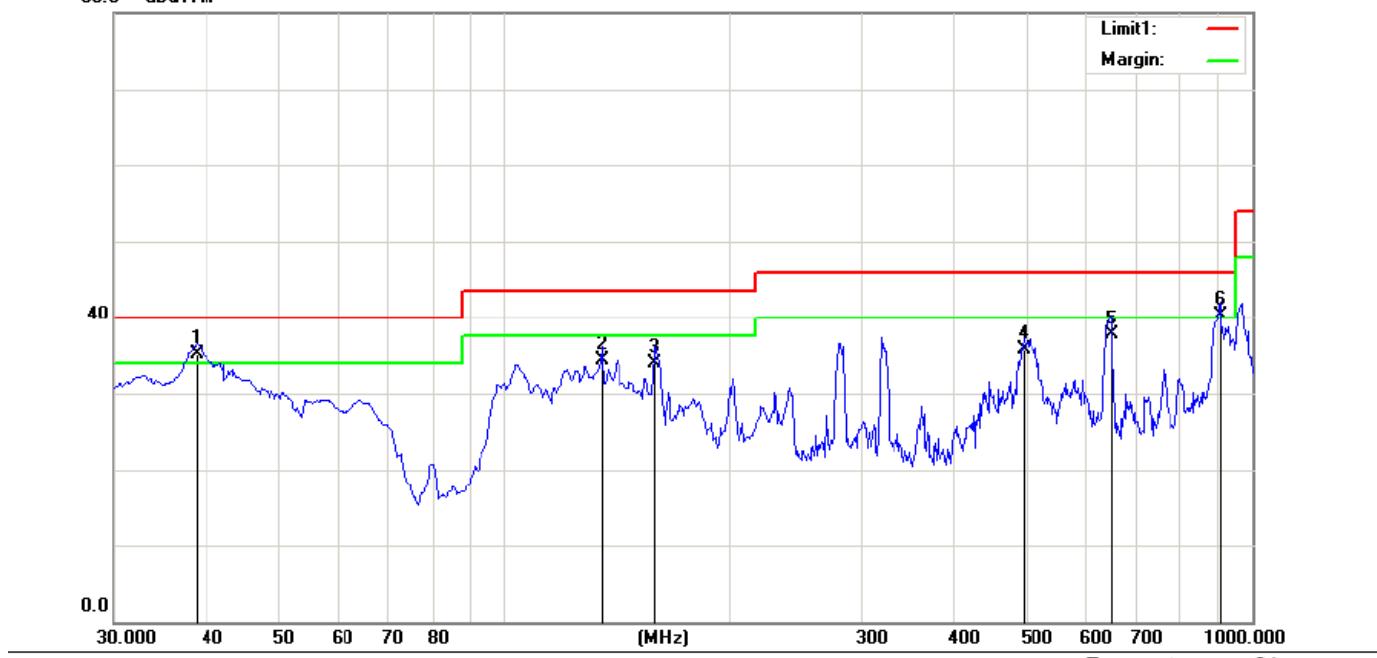

Site site #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m

Power: DC 19V

Humidity: 55 %

Mode: USB Print

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	38.7300	48.80	-13.77	35.03	40.00	-4.97	QP		0	
2		134.7600	50.77	-16.49	34.28	43.50	-9.22	QP		0	
3		159.0100	52.28	-18.38	33.90	43.50	-9.60	QP		0	
4		495.6000	46.20	-10.40	35.80	46.00	-10.20	QP		0	
5		647.8900	45.69	-8.00	37.69	46.00	-8.31	QP		0	
6	!	906.8800	43.58	-3.33	40.25	46.00	-5.75	QP		0	

*:Maximum data

x:Over limit

!:over margin

Operator:

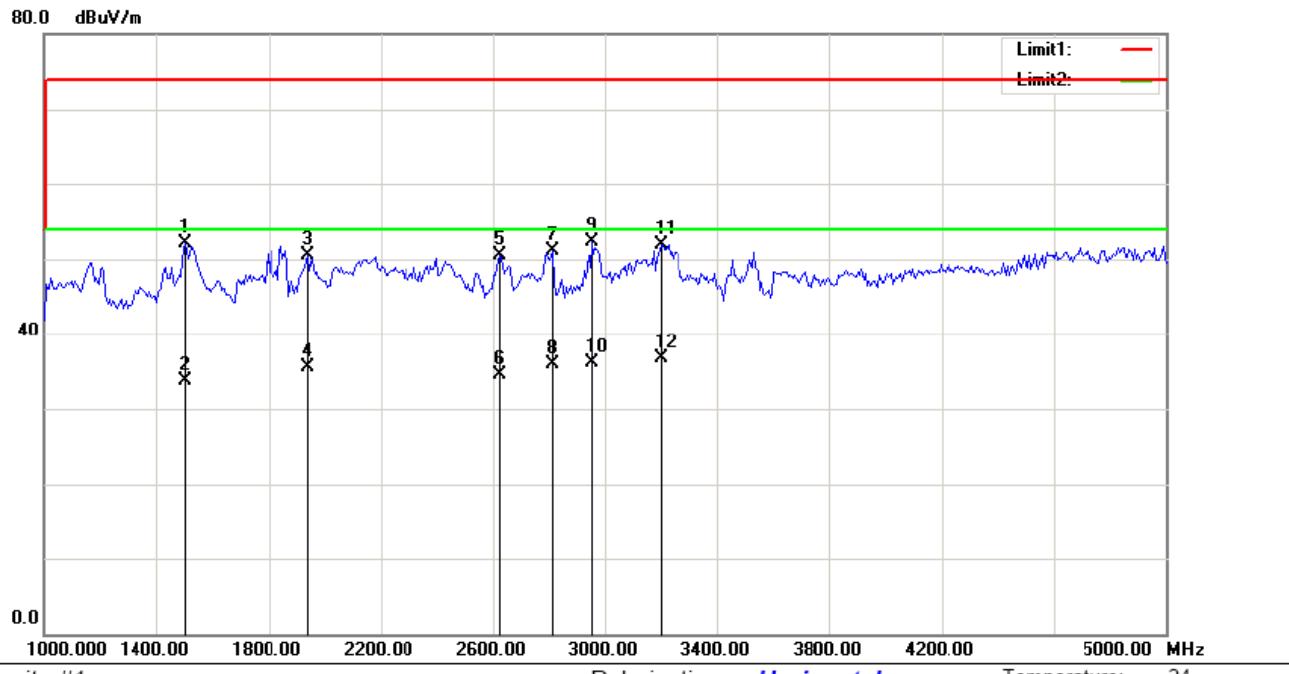

Site site #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m_PEAK

Power: AC 120V/60Hz

Humidity: 53 %


Mode:USB Print

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree
								Detector	degree	
1	1506.410	64.34	-12.15	52.19	74.00	-21.81	peak		0	
2	1506.410	45.89	-12.15	33.74	54.00	-20.26	AVG		0	
3	1942.308	61.32	-10.85	50.47	74.00	-23.53	peak		0	
4	1942.308	46.45	-10.85	35.60	54.00	-18.40	AVG		0	
5	2621.795	58.70	-8.28	50.42	74.00	-23.58	peak		0	
6	2621.795	42.69	-8.28	34.41	54.00	-19.59	AVG		0	
7	2814.102	58.53	-7.41	51.12	74.00	-22.88	peak		0	
8	2814.102	43.33	-7.41	35.92	54.00	-18.08	AVG		0	
9	2955.128	58.99	-6.77	52.22	74.00	-21.78	peak		0	
10	2955.128	42.89	-6.77	36.12	54.00	-17.88	AVG		0	
11	3198.718	58.13	-6.14	51.99	74.00	-22.01	peak		0	
12 *	3198.718	42.87	-6.14	36.73	54.00	-17.27	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator:

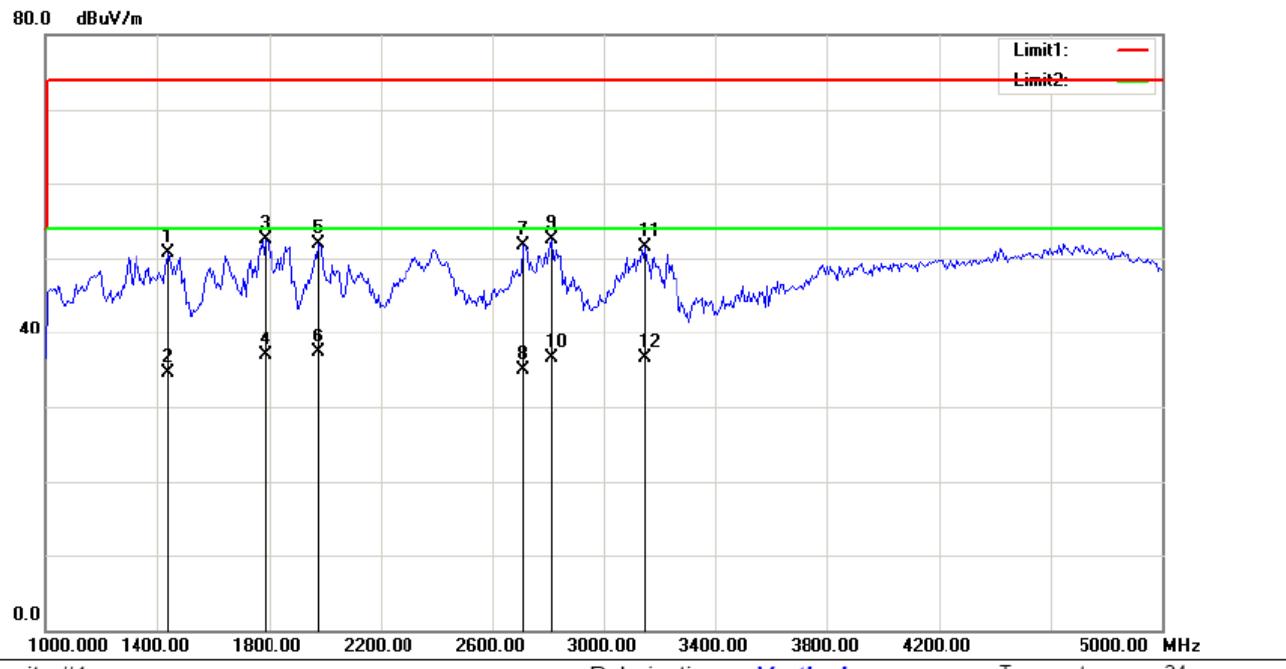

Site site #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 class B 3m_PEAK

Power: AC 120V/60Hz

Humidity: 53 %

Mode:USB Print

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		1442.308	62.39	-11.66	50.73	74.00	-23.27	peak		0	
2		1442.308	46.22	-11.66	34.56	54.00	-19.44	AVG		0	
3		1788.461	64.18	-11.65	52.53	74.00	-21.47	peak		0	
4		1788.461	48.56	-11.65	36.91	54.00	-17.09	AVG		0	
5		1980.769	62.60	-10.72	51.88	74.00	-22.12	peak		0	
6	*	1980.769	47.93	-10.72	37.21	54.00	-16.79	AVG		0	
7		2711.538	59.25	-7.61	51.64	74.00	-22.36	peak		0	
8		2711.538	42.53	-7.61	34.92	54.00	-19.08	AVG		0	
9		2814.102	59.68	-7.26	52.42	74.00	-21.58	peak		0	
10		2814.102	43.75	-7.26	36.49	54.00	-17.51	AVG		0	
11		3147.436	58.17	-6.70	51.47	74.00	-22.53	peak		0	
12		3147.436	43.25	-6.70	36.55	54.00	-17.45	AVG		0	

*:Maximum data x:Over limit !:over margin


Operator:

5. PHOTOGRAPH

5.1. Photos of Conducted Emission Measurement



5.2. Photo of Radiated Measurement

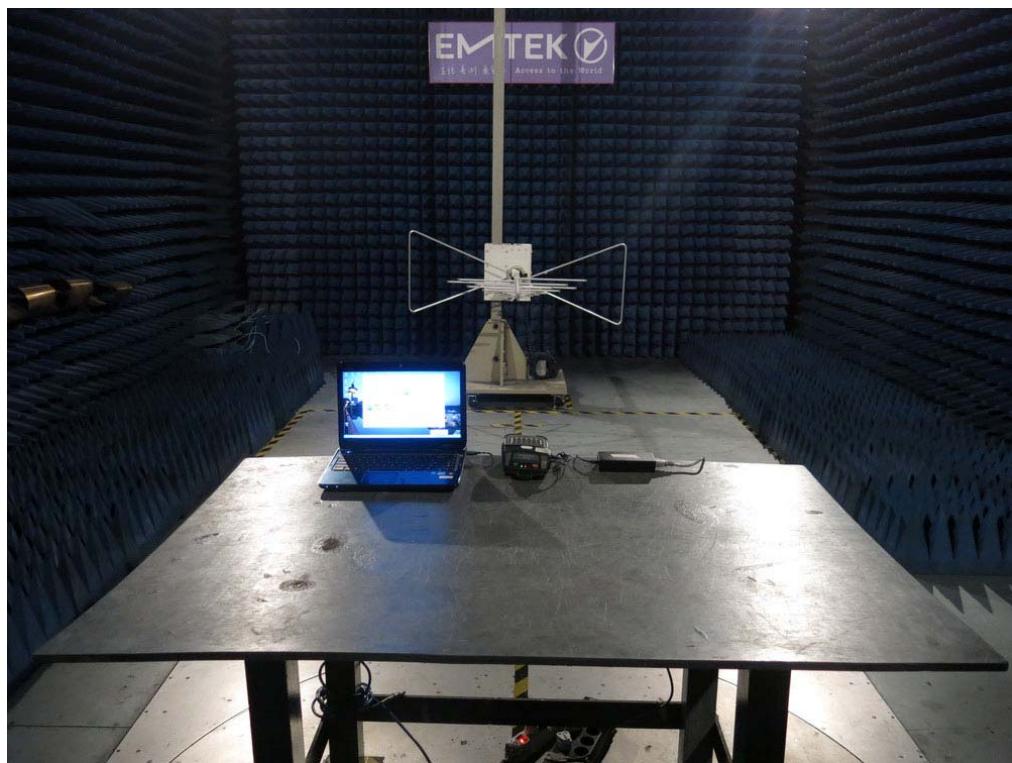

APPENDIX (Photos of EUT)



