

Testing Tomorrow's Technology

**Application
For**

**Title 47 USC, Part 2, Subpart J, Paragraph 2.902, Equipment Authorization of
Verification for an Unintentional Radiator per Part 15, Subpart B, Paragraphs
15.107 and 15.109**

And

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraph 15.249**

For the

**Level Vision Electronics
Model: MUSN-FE6-T800**

***REPORT FOR BLUETOOTH FUNCTION ONLY
(SEPARATE WIFI REPORT AVAILABLE)***

**FCC ID: Z7V-LVE100
UST Project: 11-0204
Issue Date: October 24, 2011**

Total Pages: 31

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date October 25, 2011

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Level Vision Electronics
MODEL: MUSN-FE6-T800
FCC ID: Z7V-LVE100
IC ID: 9991A-LVE100
DATE: October 24, 2011

This report concerns (check one): Original grant Class II change

Equipment Type: Tablet Styled Personal Computer with Wifi and Bluetooth
Bluetooth Report Only – WIFI Report Submitted Separately

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes _____ No

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued
on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004
Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	7
1.1	Purpose of this Report	7
1.2	Characterization of Test Sample	7
1.3	Product Description	7
1.4	Configuration of Tested System	8
1.5	Test Facility	8
1.6	Related Submittal(s)/Grant(s)	8
2	Tests and Measurements.....	10
2.1	Test Equipment	10
2.2	Modifications to EUT Hardware	11
2.3	Number of Measurements for Intentional Radiators (15.31(m))	11
2.4	Frequency Range of Radiated Measurements (Part 15.33)	11
2.4.1	Intentional Radiator	11
2.4.2	Unintentional Radiator	11
2.5	Measurement Detector Function and Bandwidth (CFR 15.35)	12
2.5.1	Detector Function and Associated Bandwidth	12
2.5.2	Corresponding Peak and Average Requirements	12
2.5.3	Pulsed Transmitter Averaging	12
2.6	EUT Antenna Requirements (CFR 15.203)	13
2.7	Restricted Bands of Operation (Part 15.205)	15
2.8	Transmitter Duty Cycle (CFR 35 (c))	15
2.9	Intentional Radiator, Power Lines Conducted Emissions (CFR 15.207)	17
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(d)) (IC RSS 210, A2.9 (a))	18
2.12	20 dB Bandwidth Measurement & Channel Spacing per CFR 15.249, 99% Occupied Bandwidth (IC RSS 210, A8.1)	25
2.12.1	20 dB Bandwidth Measurements	25
2.13	Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107)	27
2.14	Unintentional Radiator, Radiated Emissions (CFR 15.109, 15.209)	29

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Test Configuration.....	14
Figure 2.	Duty Cycle Measurement 1	15
Figure 3.	Duty Cycle Measurement 2	16
Figure 4.	Band Edge Compliance – Low Channel Delta - Peak	23
Figure 5.	Band Edge Compliance – Low Channel Delta - AVG	23
Figure 6.	Band Edge Compliance – High Channel Delta - Peak.....	24
Figure 7.	Band Edge Compliance – High Channel Delta - AVG	24
Figure 8.	Low Channel 99% Bandwidth	26
Figure 9.	Mid Channel 99% Bandwidth	26
Figure 10.	High Channel 99% Bandwidth	27

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals	9
Table 2.	Test Instruments	10
Table 3.	Number of Test Frequencies for Intentional Radiators	11
Table 4.	Allowed Antenna(s)	13
Table 5.	Intentional Conducted Emissions	17
Table 6.	Average Radiated Spurious	20
Table 7.	Upper Band Edge - Radiated Emissions	22
Table 8.	20 dB Bandwidth and 99% Occupied Bandwidth	25
Table 9.	Power Line Conducted Emissions Data, Class B Part 15.107, Peak Measurement vs. Avg. Limits	28
Table 10.	Unintentional Radiator, Radiated Emissions	30

List of Attachments

Attachments

- Agency Agreement
- Application Forms
- Letter of Confidentiality
- Equipment Label
- Block Diagram(s)
- Schematic(s)
- Test Configuration Photographs
- Internal Photographs
- Theory of Operation
- RF Exposure
- User's Manual

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on September 12, 2011 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Level Vision Electronics Model MUSN-FE6-T800, which is a tablet styled personal computer with Wifi and Bluetooth transceiver, designed for use in residential or commercial settings.

The EUT was placed into a test mode for measuring the output characteristics of the 2.4 GHz transceiver.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2003)* for FCC subpart B Digital equipment Verification requirements and per FCC KDB Publication number DA 00-705 for Spread Spectrum Systems Operating Under section 15.247 and 15.249. Also, FCC, KDB Publication No. DA 00-705 was used as a test procedure guide.

Digital RF conducted and radiated Verification emissions data (FCC 15.107 and 109) below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5117. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 2982A-1.

1.6 Related Submittal(s)/Grant(s)

The EUT will be used to wirelessly send/receive data. The transceiver presented in this report will be used with other like transceivers.

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter for Bluetooth (see test data presented herein) and Wifi (see additional test report).
- b) Verification as a class B digital device.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER.	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Level Vision Electronics (EUT)	MUSN-FE6-T800	Engineering Sample	Pending: Z7V-LVE100	USB to Micro USB 3' U - P
DC Power Supply	PSA18R-120P	--	None	3' U-P
Laptop Computer IBM	Various	--	--	6' U -P
Power Supply IBM	Various	--	None	6' U - P 120 VAC/ 60 Hz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2 Tests and Measurements

2.1 Test Equipment

Table 2 below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herein.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/18/2010
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	10/29/10
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	2944A06291	9/7/10 Extended 90 days
LOOP ANTENNA 0.09 MHz to 30 MHz	SAS-200/562	Electro-Metrics	142	08/09/11 2 Year
BICONICAL ANTENNA 25 MHz to 200 MHz	BIA-25	Electro-Metrics	2451	12/29/09 2 Year
LOG PERIODIC 100 MHz to 1000 MHz	3146	EMCO	3110-3236	1/22/10 2 Year
HORN ANTENNA 1 GHz to 18 GHz	SAS-571	A. H. Systems	605	2/9/2010 2 Year
HORN ANTENNA 1 GHz to 18 GHz	EMCO 3115	EMCO	9107-3723	8/10/2011 2 Year
PREAMP 1 GHz to 26.5 GHz	8449B	HEWLETT-PACKARD	3008A00480	9/21/10 Extended 90 days
Blue Tooth Test Set	MT8852B	Anritsu	6K00005032	06/02/11
CALCULATION PROGRAM	N/A	N/A	Ver. 6.0	N/A

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.2 Modifications to EUT Hardware

No modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated, with the device operating at the number of frequencies in each band specified in Table 3 as follows:

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 2.4 GHz to 2.4835 GHz, 3 test frequencies will be used.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB. Please see section 2.8 herein for details.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The EUT has a built in antenna; there is no obvious method of attaching a different antenna.

Table 4. Allowed Antenna(s)

MFG.	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Level Vision	Dipole integrated	N/A	1.67	integral

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

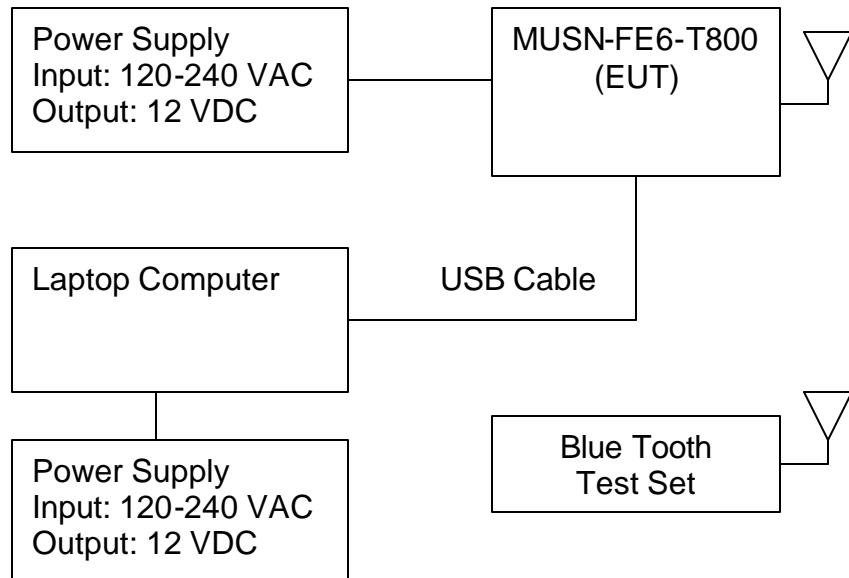


Figure 1. Test Configuration

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.10.

2.8 Transmitter Duty Cycle (CFR 35 (c))

The duty cycle de-rating factor used in the calculation of average radiated limits (per CFR 15.209 and 15.35(c)) is described below. This factor was calculated by first determining the worst case scenario for system operation.

The worst-case scenario in any 100 ms timeslot, along with all transmission lengths, will be as follows:

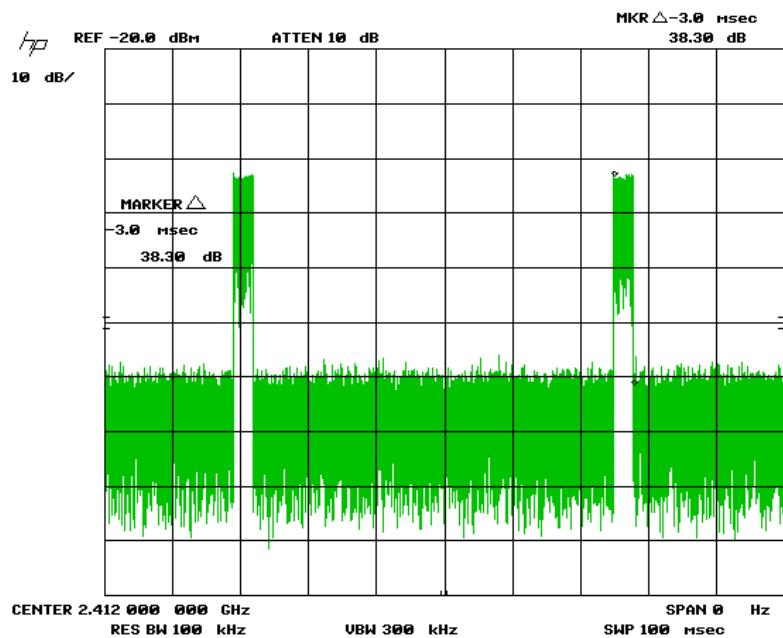


Figure 2. Duty Cycle Measurement 1

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

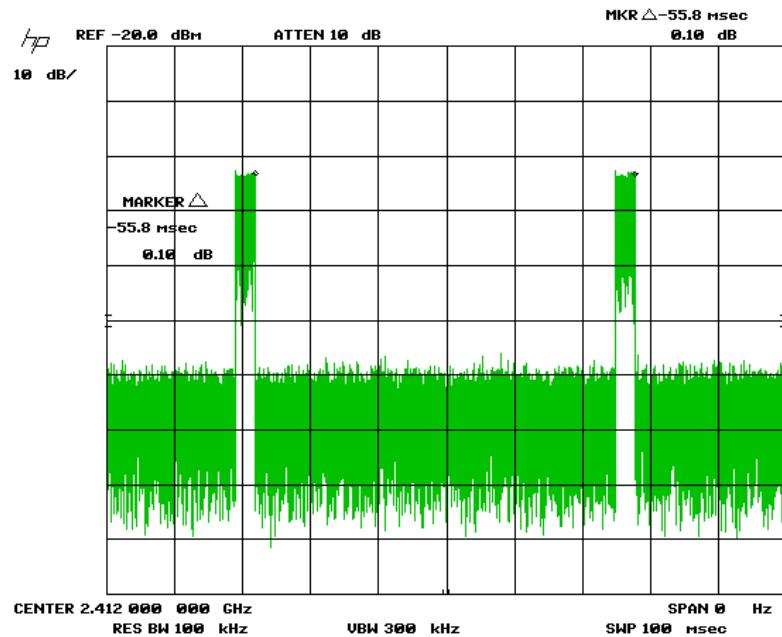


Figure 3. Duty Cycle Measurement 2

The duty cycle is computed as follows (in any 100 ms period):

$$\text{Duty Cycle} = (3 \text{ ms}/55.8 \text{ ms}) = 0.0538 \sim 0.05 = 5\%$$

$$\text{Correction Factor} = 20\log_{10}(0.0538) = -25.39 \text{ dB}$$

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.9 Intentional Radiator, Power Lines Conducted Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.4, Paragraph 7, with a spectrum analyzer connected to an LISN and the EUT placed into a continuous mode of transmission.

The worst-case results for conducted emissions were determined to be produced when the EUT was operating under continuous transmission on the low channel.

Table 5. Intentional Conducted Emissions


Intentional Conducted Emissions Tested from 150 KHz to 30 MHz						
Tested By: JCW	Specification Requirement: FCC Part 15.207 Class B	Project No.: 11-0204	Manufacturer: Level Vision Electronics Model: MUSN-FE6-T800			
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector
120 VAC, 60 Hz, Phase Line						
0.1754	55.80	0.46	56.26	64.7	8.4	PK
0.1754	36.40	0.46	36.86	54.7	17.8	AVG
0.5218	36.00	0.14	36.14	46.0	9.9	PK
1.4200	31.80	0.26	32.06	46.0	13.9	PK
8.3100	27.90	0.49	28.39	50.0	21.6	PK
12.3200	27.70	0.53	28.23	50.0	21.8	PK
27.8800	25.30	1.04	26.34	50.0	23.7	PK
120 VAC, 60 Hz, Neutral Line						
0.1740	57.50	0.46	57.96	64.8	6.8	PK
0.1740	31.30	0.46	31.76	54.8	23.0	AVG
0.5528	33.40	0.24	33.64	46.0	12.4	PK
3.6200	34.80	0.33	35.13	46.0	10.9	PK
6.1400	29.90	0.42	30.32	50.0	19.7	PK
11.8600	31.80	0.66	32.46	50.0	17.5	PK
26.6000	22.31	1.22	23.53	50.0	26.5	PK

SAMPLE CALCULATIONS: At 1.42 MHz = 31.8 + (0.26) = 32.06 dBuV

Margin = 46 dBuV – 32.06 dBuV = 13.9 dB

Test Date: October 10, 2011

Tested By

Signature: 

Name: John C. Wynn

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(d)) (IC RSS 210, A2.9 (a))

The EUT was put into a continuous-transmit mode of operation and tested. Antenna Conducted Emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions on the OATS. The conducted emissions graphs are found in Figures 3 through 8 below. The limit for antenna conducted power is 50 mv/meter (94 dBuV/m) per 15.249 (a).

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW = RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 6.

For average voltage measurements above 1 GHz, the emissions were measured using RBW = 1 MHz and VBW = 10 Hz. For a pulse-modulated transmitter, the EUT's average emissions are further modified by adding to them the worst-case duty cycle, determined by adding the EUT's total pulse widths (on time) over a 100 ms period and dividing by 100 ms.

Per 15.31(o), spurious radiated emissions greater than 20 dB below the limit are not reported in this test report.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(d)) (IC RSS 210, A2.9 (a)) (Cont'd).

On the OATS, the EUT was mounted on top of a non-conductive table, 80 cm above the floor, by placing it in the X-Y-Z plane along the Z axis with its bottom cover in parallel with the ground. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

The test data is detailed below herein for this section. Several radiated emissions above 1 GHz were measured at a distance of 1 meter. The measured value at 1 meter was then extrapolated to the resultant at 3 meters using an inverse distance extrapolation factor of -20 dB/decade. There were no test failures.

US Tech Test Report:

FCC Part 15 Certification

FCC ID:

Z7V-LVE100

Test Report Number:

11-0204

Issue Date:

October 24, 2011

Customer:

Level Vision Electronics

Model:

MUSN-FE6-T800

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)) (IC RSS 210, A2.9 (a)) (Cont'd).

Table 6. Average Radiated Spurious

Radiated Spurious Emissions, Tested from 30 MHz – 24 GHz							
Tested By: JCW	Test: FCC Part 15, Para 15.249(d)		Client: Level Vision Electronics				
	Project: 11-0204		Model: MUSN-FE6-T800				
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA+DC (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance /	Pass Margin (dB)	Detector PK / AVG
LOW BAND - PEAK							
2402.02	71.60	7.24	78.84	94	3.0m./	15.16	PK
4804.045	35.21	-3.44	31.77	54.0	1.0m./	22.2	AVG
MID BAND- PEAK							
2440.90	72.25	7.56	79.81	94	3.0m./	14.19	PK
4881.68	38.66	-3.46	35.20	54.0	1.0m./	18.8	AVG
HIGH BAND- PEAK							
2479.97	73.59	7.52	81.11	94	3.0m./	12.89	PK
4959.81	37.83	-3.48	34.35	54.0	1.0m./	13.9	AVG

1. (*) Falls within the restricted bands of CFR 15.205.
2. ND = No other emissions detected within 20 dB of the Part 15.209 limits for spurious emissions within Restricted Bands.
3. Test data values measured at 1 meter include a factor of -9.54 dB for distance extrapolation from a test distance of 1 meter to 3 meters.
4. Additional factors include a Duty Cycle, DC = -25.39 dB and filter factor of +1.0 dB.

SAMPLE CALCULATION:


Note: 1 dB loss factor is added for all measurement using the high pass filter.

RESULTS: At 4804.045 MHz: = 35.21 + -3.44 = 31.77 dBuV/m @ 3m

Margin = (54.0 – 31.77) = 22.23 dB

Test Date: October 20, 2011

Tested By

Signature: 

Name: John C. Wynn

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.11 Band Edge Measurements – (CFR 15.249 (d))

Band Edge measurements are made following the guidelines in FCC KDB Publication No. DA 00-705 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW =1% of the frequency span. In all cases, the VBW is set = RBW. See Figure 19 through 22 below.

The EUT does not have an antenna port; therefore an alternative method was used.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

Z7V-LVE100

11-0204

October 24, 2011

Level Vision Electronics

MUSN-FE6-T800

2.11 Band Edge (Cont'd)

Table 7. Upper Band Edge - Radiated Emissions

Peak Radiated Higher Band Edge Measurements								
Test By: JCW	Test: FCC Part 15.249			Client: Level Vision Electronics				
	Project: 11-0204	Class: B		Model: MUSN-FE6-T800				
Frequency (MHz)	AF table	Test Data	AF+CA- AMP+DC dB/m	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarity	Margin (dB)	Detector PK / AVG
Internal Antenna								
Fund. 2479.97	2HN3MV	73.59	32.91	106.50	--	3m./Vertical	--	AVG
Band Edge 2483.5	--	(106.5- 52.9)	--	53.6	74.0	--	20.4	PK
Band Edge 2483.5	--	(106.5- 25.39- 52.9)	--	28.21	54.0	--	25.79	AVG

The limit for the average value of radiated emissions in a Restricted Band is 54 dBuV/m. To compute the average values of the band edge emissions, the duty cycle correction factor of -20.0 dB is applied to the values in the Corrected Results column. After this correction the EUT is found to have met the restrictions placed on average radiated emissions in Restricted Bands. The worst-case measurement is computed below.

CALCULATION OF WORST-CASE AVERAGE UPPER BAND EDGE MEASUREMENT:

Results = Peak Corrected Results + Duty Cycle Correction Factor

Results = $106.5 + (-25.39) - 52.9 = 28.21$ dBuV/m

Margin = Limit – Results = $54 - 28.21 = 25.79$ dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

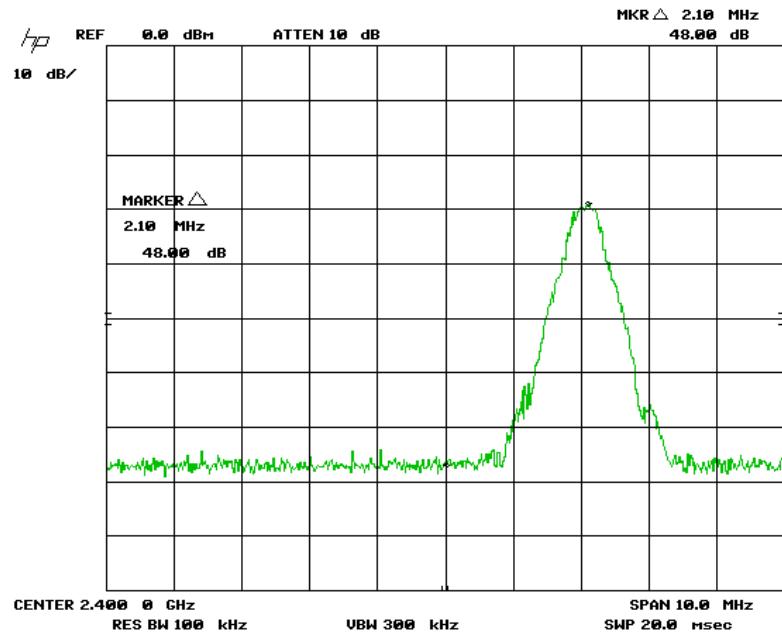


Figure 4. Band Edge Compliance – Low Channel Delta - Peak

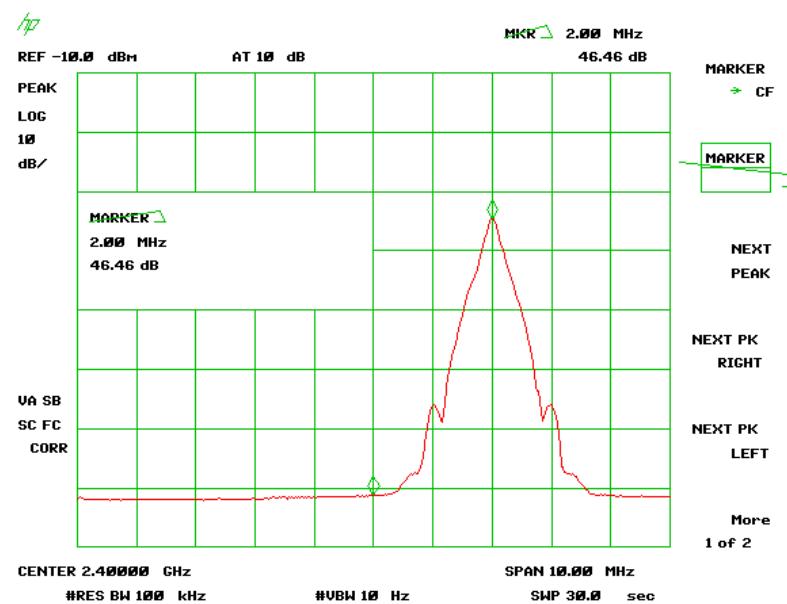


Figure 5. Band Edge Compliance – Low Channel Delta - AVG

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

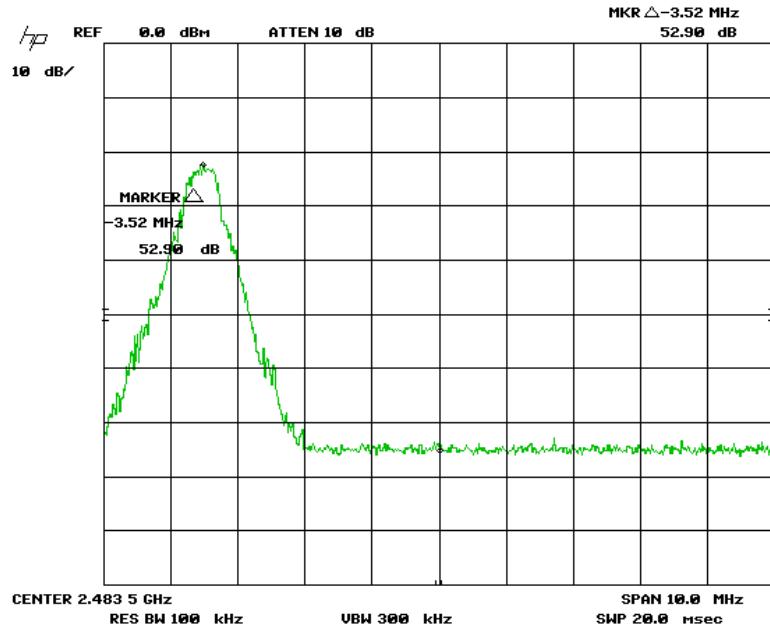


Figure 6. Band Edge Compliance – High Channel Delta - Peak

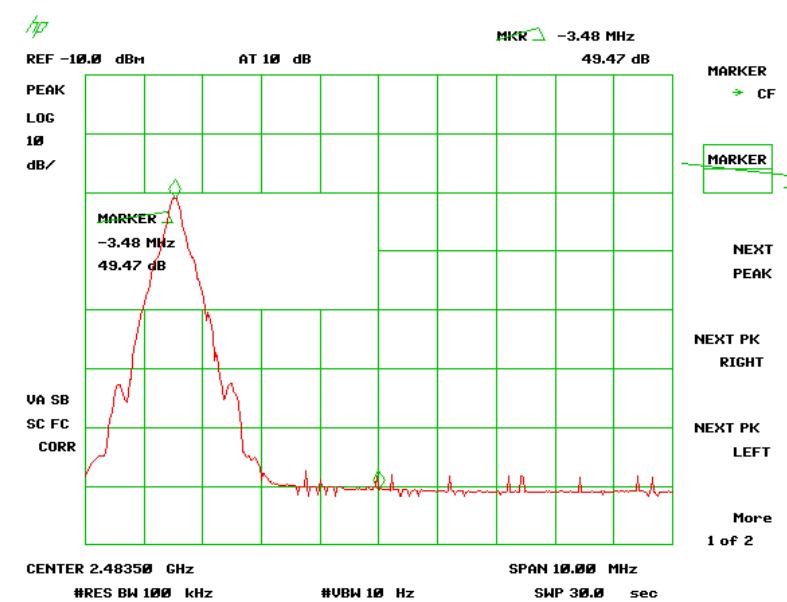


Figure 7. Band Edge Compliance – High Channel Delta - AVG

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.12 20 dB Bandwidth Measurement & Channel Spacing per CFR 15.249, 99% Occupied Bandwidth (IC RSS 210, A8.1)

2.12.1 20 dB Bandwidth Measurements

The EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. DA 00-705 for a bandwidth of 20 dB. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW = RBW. The results of this test are given in Table 13 and Figures 23 through 25.

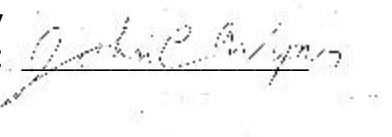
The above method was not possible. The EUT does not have an antenna port; the test were preformed using the alternate radiated method per KDB publication No. DA 00-705 was used.

Table 8. 20 dB Bandwidth and 99% Occupied Bandwidth

Frequency (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2401.93	1.076	1.076
2440.95	1.105	1.105
2480.00	1.125	1.125

Test Date: October 20, 2011

Tested By

Signature: 

Name: John C. Wynn

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

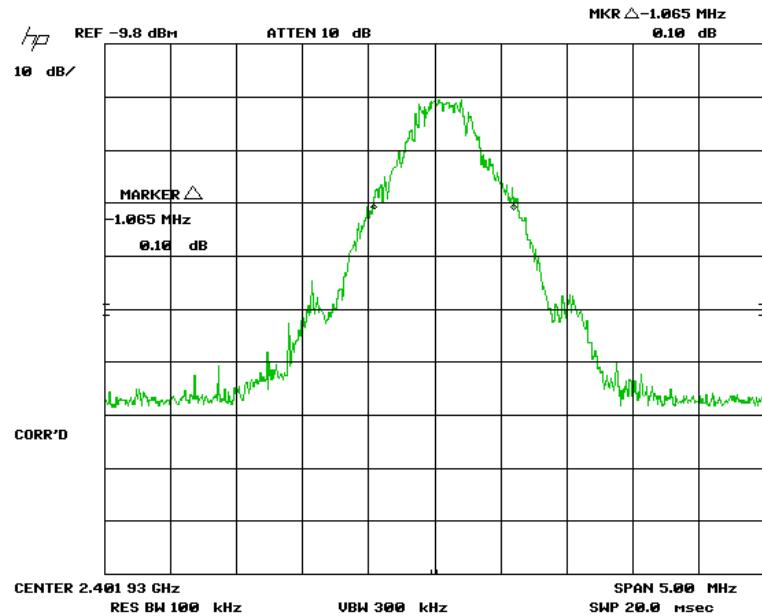


Figure 8. Low Channel 99% Bandwidth

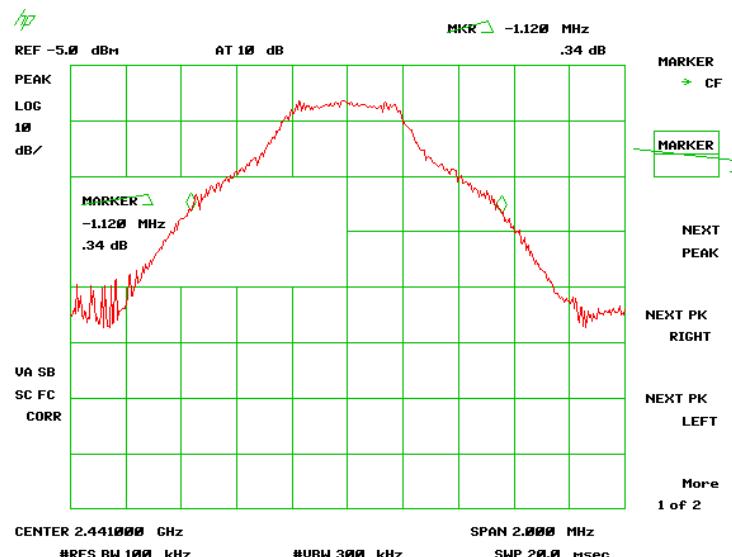


Figure 9. Mid Channel 99% Bandwidth

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

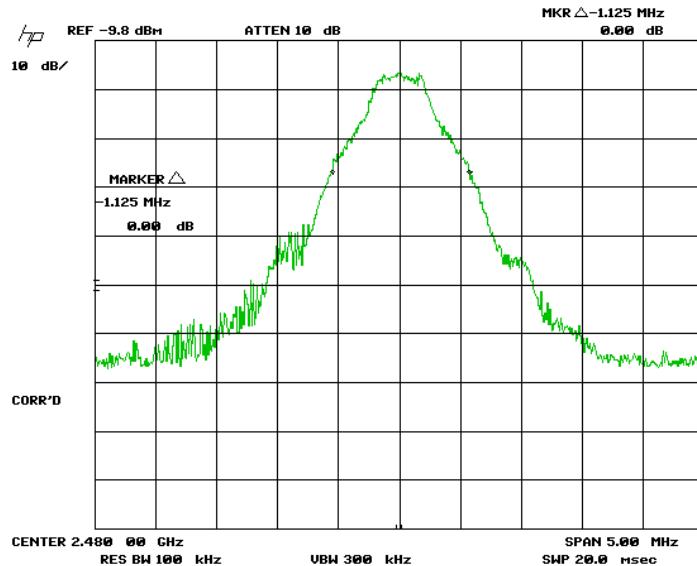


Figure 10. High Channel 99% Bandwidth

2.13 Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107)

The test data provided herein is to support the Verification requirement for the digital apparatus. The power line conducted voltage measurements for Receiver and Digital Devices have been carried out in accordance with CFR 15.107 and ANSI C63.4, Paragraph 7, with a spectrum analyzer connected to an LISN and the EUT placed into an idle condition or a continuous mode of receive (non-transmitting). Please refer to the results as shown in Table 13 below.

The testing was done with the Wifi turned off and the Bluetooth tuned on. There were no signals within 6.8 dB of the average limits. Those results are given in Table 13 below.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.13 Unintentional Radiator Power Lines Conducted Emissions (Cont'd)

Table 9. Power Line Conducted Emissions Data, Class B Part 15.107, Peak Measurement vs. Avg. Limits


CONDUCTED EMISSIONS 150 kHz to 30 MHz						
Tested By: JCW	Specification Requirement: FCC Part 15.207 Class B		Project No.: 11-0204	Manufacturer: Level Vision Electronics Model: MUSN-FE6-T800		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector
120 VAC, 60 Hz, Phase Line						
0.1754	55.80	0.46	56.26	64.7	8.4	PK
0.1754	36.40	0.46	36.86	54.7	17.8	AVG
0.5218	36.00	0.14	36.14	46.0	9.9	PK
1.4200	31.80	0.26	32.06	46.0	13.9	PK
8.3100	27.90	0.49	28.39	50.0	21.6	PK
12.3200	27.70	0.53	28.23	50.0	21.8	PK
27.8800	25.30	1.04	26.34	50.0	23.7	PK
120 VAC, 60 Hz, Neutral Line						
0.1740	57.50	0.46	57.96	64.8	6.8	PK
0.1740	31.30	0.46	31.76	54.8	23.0	AVG
0.5528	33.40	0.24	33.64	46.0	12.4	PK
3.6200	34.80	0.33	35.13	46.0	10.9	PK
6.1400	29.90	0.42	30.32	50.0	19.7	PK
11.8600	31.80	0.66	32.46	50.0	17.5	PK
26.6000	22.31	1.22	23.53	50.0	26.5	PK

SAMPLE CALCULATIONS: At 1.42 MHz = 31.8 + (0.26) = 32.06 dBuV

Margin = 46 dBuV – 32.06 dBuV = 13.9 dB

Test Date: October 10, 2011

Tested By

Signature: 

Name: John C. Wynn

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
Z7V-LVE100
11-0204
October 24, 2011
Level Vision Electronics
MUSN-FE6-T800

2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109, 15.209)

The test data is provided herein to support the Verification requirement for digital devices. Radiated emissions coming from the EUT in a non-transmit state per 15.109 and radiated emissions coming from the EUT in a transmitting state per 15.209 were evaluated from 30 MHz to 12.5 GHz as detailed in ANSI C63.4, Paragraph 8. The worst case is presented herein.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and with the analyzer's resolution bandwidth set to 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data was maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure. All measured signals were at least 15.1 dB below the specification limit. The results are shown in Table 14 below.

For EUT with oscillator circuits that generate a frequency below 30 MHz, measurements were made with the analyzer's resolution bandwidth set to 9 KHz and a calibrated Loop Antenna was used. At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade) (CFR15.31f(2)).

All emission within the range of 1.705 MHz to 30 MHz was less than 20 dBm from the applicable limit. The test was conducted using a calibrated loop antenna on US Tech's OATS site at a distance of 3 meters.

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 Z7V-LVE100
 11-0204
 October 24, 2011
 Level Vision Electronics
MUSN-FE6-T800

Table 10. Unintentional Radiator, Radiated Emissions

Unintentional Radiator, Radiated Emissions Tested from 1.705 MHz to 12.5 GHz							
Test By: JCW	Test: FCC Part 15.109, 15.209		Client: Level Vision Electronics				
	Project: 11-0204 Class: B		Model: MUSN-FE6-T800				
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance /	Margin (dB)	DETECT OR PK / QP
168.0410	35.40	-10.61	24.79	43.5	3m./	18.7	PK
46.4540	37.80	-15.64	22.17	40.0	3m./	17.8	PK
167.8700	32.60	-11.71	20.89	43.5	3m./	22.6	PK
345.5940	36.50	-8.43	28.07	46.0	3m./	17.9	PK
596.3110	35.00	-4.11	30.89	46.0	3m./	15.1	PK
596.3500	35.20	-4.41	30.79	46.0	3m./	15.2	PK
365.1470	31.80	-8.13	23.67	46.0	3m./	22.3	PK
168.2800	37.40	-11.71	25.69	43.5	3m./	17.8	PK
1903.8000	45.50	-15.75	29.75	54.0	3m./	24.2	PK
1912.1400	45.21	-15.73	29.48	54.0	3m./	24.5	PK
6260.0000	40.20	-4.74	35.46	54.0	3m./	18.5	PK
6255.5000	40.74	-4.71	36.03	54.0	3m./	18.0	PK

No other emissions detected within 20 dB of the FCC Part 15.109&15.209 limits

AF is antenna factor. CL is cable loss. PA is preamplifier gain

SAMPLE CALCULATION: At 345.59 MHz: $= 36.5 + (-8.43) = 28.07$ dBuV/m @ 3m

Margin = $(46.0 - 28.07) = 17.9$ dB

Test Date: October 10, 2011

Tested By Signature: John C. Wynn Name: John C. Wynn