



# TEST REPORT

Testing Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.  
12955 Bellamy Brothers Boulevard  
Dade City, Florida 33525 USA  
PH (352) 588-2209 FX (352) 588-2544

Submitter ID

Equitrac Corporation  
1000 Sawgrass Corporate Parkway  
Suite 305  
Sunrise, FL 33323

Report Issue Date: 16 Jan 2015

Test Report Number: 14F119B1

Sample S/N: See Appendix B

Model Designation: PCT-IMUL

Sample Receipt Date: 30 Apr 2014

Product Description: PageControl Touch

Sample Test Date: see data sheets

Description of non-standard test method or test practice: None

Estimated Measurement Uncertainty: *See page 9. This uncertainty represents and expanded uncertainty expressed at approximately 95% confidence level using a coverage factor of k=2.*

Special limitations of use: None

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the item identified above. It is the manufacturer's responsibility to assure that additional production units are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature

David Foerstner

Name David Foerstner

Title Engineering Group Leader

Date 16 Jan 2015

Reviewed by:

Approved Signatory

Steve Hoke (EMC Site Manager)

Date 16 Jan 2015

This report shall not be reproduced except in full, without written approval from Product Safety Engineering, Inc.

Test Report Number 14F119B1

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 1 of 12

## **DIR ECTOR Y - EMISSIONS**

		<b>Page(s)</b>
<b>A) Documentation</b>		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11 - 12
<b>B) Test data</b>		
Conducted emissions	10/150 kHz - 30 MHz	5, 9
Radiated emissions	10 kHz - 30 MHz	5, 9
Radiated emissions	30 MHz - 1000 MHz	6, 9
Disturbance power	30 MHz - 300 MHz	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
Antenna Disturbance Voltage	30 MHz - 1,000 MHz	7,9
<b>C) Appendix A</b>		
Test Data Sheets		A2 - 20
<b>D) Appendix B</b>		
System Under Test Description		B2 - B3

*Test Report Number 14F119B1*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525**  
Tel (352) 588-2209 Fax (352) 588-2544

Page 2 of 12

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 61000-6-3:2007

- EN 61000-6-4:2007

- EN 55011 : 2009/A1:2010

- Group 1

- Group 2

- Class A

- Class B

**■** - EN 300-330 v1.5.1 & EN 300-330 V1.7.1

- EN 55014 -1: 2006/A2:2011

- Household appliances and similar

- Portable tools

- Semiconductor devices

- EN 55022:2010/AC:2011

- Class A

- Class B

- CISPR 22:2008

- Class A

- Class B

- AS/NZS CISPR 22:2009

- Class A

- Class B

- ICES-003

- Class A

- Class B

- CNS 13438

- Class A

- Class B

- VCCI V-3/2010.4

- Class A

- Class B

**■** - FCC Part 15 (per ANSI C63.4)

- Class A

- Class B

**■** - Certification per 15.209

- Verification

- Declaration of Conformity

**■** - RSS-210 Issue 8

**■** - RSS-GEN Issue 4

Test Report Number 14F119B1

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 3 of 12

## **Environmental conditions during testing:**

	LAB	OATS
Temperature: *	_____	: _____
Relative Humidity: **	_____	: _____
Power supply system	: <u>120 / 230</u>	Volts <u>60 / 50</u> Hz <u>SINGLE</u> phase

## **Sign Explanations:**

- not applicable
- applicable

## **Models Defined:**

**Model PCT “ Contains no internal reader”**

**Model PCT – IMUL “ Contains internal 125khz/ 13.56Mhz RFID ”**

**Model PCT – IMSI “ Contains internal 125khz/ 13.56Mhz RFID reader W/ iClass support**

## Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements between 0.15 to 30 MHz were performed at the following test location:

- Test not applicable

- Darby Test Site (Open Area Test Site)
- Darby Laboratory

### Test equipment used :

Model Number	Manufacturer	Description	Serial Number
□ - 8028-50	Solar	50 Ω LISN	829012, 829022
□ - 8012	Solar	50 Ω LISN	924840
■ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - 85662A	Hewlett Packard	Analyzer Display	2403A07352
□ - 8028-50	Solar	50 Ω LISN	903725, 903726
□ - FCC-TLISN-T4-02	Fisher Custom Com.	Telecom ISN	20454
□ - FCC-TLISN-T8-02	Fisher Custom Com.	Telecom ISN	20452
■ - LI-125	Com-Power	50 Ω LISN	191080/191081

## Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The **RADIATED EMISSIONS (MAGNETIC FIELD)** measurements between 0.010 to 30 MHz were performed at the following test location:

- Darby Test Site (Open Area Test Site)
- 
- 

at a test distance of :

- 30 meters
- 10 meters

- Test not applicable

### Test equipment used :

Model Number	Manufacturer	Description	Serial Number
□ - 3148	EMCO	Log Periodic Antenna	00044783
□ - BIA-25	Electro-Metrics	Biconical Antenna	4283
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2532A02418
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - ALR-30M	Electro-Metrics	Loop Antenna	824
■ - 8447D	Hewlett Packard	Preamplifier	2944A06901
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - ALA-130/A	Antenna Research	Loop Antenna	106

Test Report Number 14F119B1

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The **RADIATED EMISSIONS (ELECTRIC FIELD)** measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

### - Test not applicable

- Darby Site (Open Area Test Site)
- Darby Lab
- 

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
□ - HLP 3003C	EMC Automation	Hybrid Periodic Antenna	017501
■ - 8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06901
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2532A02418
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - BIA 25	Electro-Metrics	Biconical Antenna	4283
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - 8566B	Hewlett Packard	Spectrum Analyzer	2532A02418
□ - 85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
□ - 85662A	Hewlett Packard	Analyzer Display	2403A06604
□ - LPA30	Electro-Metrics	Log Periodic	2280
■ - 3104C	Emco	Biconical Antenna	00075927
■ - 3148	ETS Lindgren	Log Periodic Antenna	75741

## Emissions Test Conditions): DISTURBANCE POWER

The **DISTURBANCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

### - Test not applicable

- Darby Lab
- 

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
□ - MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2532A02418
□ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00358
□ - 8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06901
□ - EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 14F119B1

The **EQUIVALENT RADIATED EMISSIONS** measurements in the frequency range 1 GHz - 2 GHz were performed in a horizontal and vertical polarization at the following test location :

- Darby Test Site (Open Area Test Site)
- 
- 
- 

at a test distance of:

- 1 meters
- 3 meters
- 10 meters

**■ - Test not applicable**

Test equipment used :

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2532A02418
□ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - 8449B	Hewlett-Packard	Preamplifier	3008A00320
□ - 3115	Electro-Mechanics	Double Ridge Guide Horn	3810

Emissions Test Conditions): CONDUCTED EMISSIONS - TELECOMMUNICATIONS PORT **measurements were performed in the frequency range 0.15 MHz - 30 MHz at the following test location :**

**■ - Test not applicable**

- Darby Lab
- 

Test equipment used :

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - FCC-TLISN-T8-02	Fischer Custom Com	T-LISN	20452
□ - FCC-TLISN-T4-02	Fischer Custom Com	T_LISN	20454
□ -			
□ -			

## **Equipment Under Test (EUT) Test Operation Mode - Emission tests :**

**The device under test was operated under the following conditions during emissions testing:**

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- 

### **Configuration of the device under test:**

- See System Under Test Information in Appendix B

### **Rationale for EUT setup / configuration:**

ANSI C63.4:2003

---

---

---

---

---

*Test Report Number 14F119B1*

## Emission Test Results:

### Conducted emissions 150 kHz - 30 MHz

The requirements are	<input checked="" type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: 5.3 dB	2.0 dB at 13.54 MHz	

### Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are	<input checked="" type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: NA	12.8 dB at 13.6 MHz	

### Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are	<input checked="" type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: 5.2 dB	0.1 dB at 40.68 MHz	

### Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: NA	dB at MHz	

### Radiated emissions 1 GHz - 2 GHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: 4.9 dB	dB at GHz 1.13	

### Emissions Test Conditions): CONDUCTED EMISSIONS - TELECOMMUNICATIONS PORT 0.15 to 30 MHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin MU: NA	dB at MHz 23.1	

**MU = Measurement Uncertainty**

*Test Report Number 14F119B*

## GENERAL REMARKS:

**Conducted emissions** - Exploratory measurements are used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation is performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest is monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords associated with non-EUT equipment in the overall system), the one and arrangement and mode of operation that produces the emission closest to the limit across all the measured conductors is recorded. Software used is Electro metrics OS-30-CAT ver 1.10

**Radiated emissions** - The equipment under test is oriented at (0) degrees azimuth with respect to the measuring antenna. The antenna is placed in the vertical polarity and the software performs an automated set of measurements across the frequency range of interest. When complete, a database of all signals labeled "suspects" is displayed and the test engineer manually investigates any signal that is within (15) dB of the limit. Those determined to be from the EUT are placed on a separate database labeled "finals" and those not from the EUT are placed in the ambient database. The EUT is then rotated (90) degrees and the process is repeated. Upon completion of (4) scans, the antenna polarity is changed to horizontal, the EUT orientation is set to (45) degrees and the process is repeated (4) additional times. After every scan, the final list is completed re-measured and updated for amplitude and polarity if higher in amplitude.

Once all (8) scans are complete, the highest (6) signals are re-measured by maximizing the amplitude with cable manipulation, antenna height and EUT azimuth. The final (6) six signals are included in the test report. Software used is HP 85870A Opt655/Rev A.02.01.

The EUT was evaluated in (3) orthogonal positions and the worst case data is included within the test report.

## SUMMARY:

The requirements according to the technical regulations are

- - met
- - **not** met.

The device under test does

- - fulfill the general approval requirements mentioned on page 3.
- - **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date 29 Sep 2014

Testing End Date: 14 Oct 2014

- PRODUCT SAFETY ENGINEERING INC -

*Test Report Number 14F119B1*

Test-setup photo(s):

Conducted emission 150 kHz - 30 MHz




*Test Report Number 14F119B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 11 of 12

Test-setup photo(s):  
Radiated emission 30 MHz - 1000 MHz

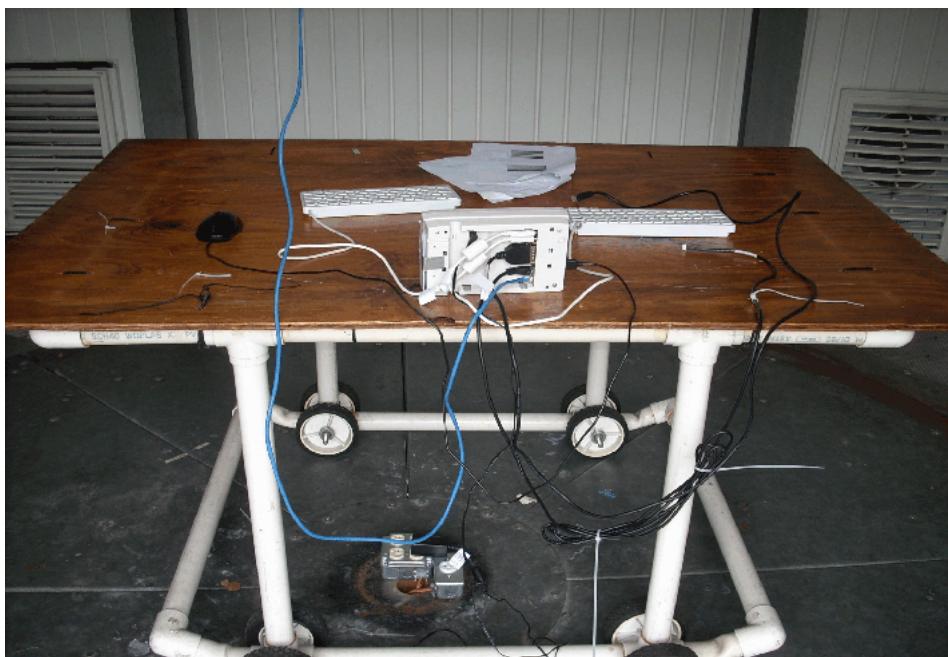

*Test Report Number 14F119B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 12 of 12

# **APPENDIX**

## **A**

### **Test Equipment Calibration Information**

**&**

### **Test Data Sheets**

Page A1 of A15

*Test Report Number 14F119B1*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525**  
**Tel (352) 588-2209 Fax (352) 588-2544**

TEST EQUIPMENT CALIBRATION INFORMATION							
Manufacturier	Model	Description	Serial Number	Cal Due *			
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526				
Hewlett Packard	85662A	Display	2151A03667				
Hewlett Packard	85650A	Quasi-peak Adapter	2043A00209	11/5/2014			
Hewlett Packard	8566B	Spectrum Analyzer	2532A02418	11/5/2014			
Hewlett Packard	85662A	Display	2403A07352	11/5/2014			
Hewlett Packard	85650A	Quasi-peak Adapter	2043A00358				
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06832				
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06901	12/10/2014			
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320				
Hewlett Packard	E7402A	Portable Spectrum Analyzer	US40240204				
ETS Lindgren	3148	Log Periodic Antenna	75741	** 2/7/2016			
Electro-Metrics	BIA-30	Biconical Antenna	3852				
EMCO	3104C	Biconical Antenna	75927	** 5/14/2016			
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824				
Electro-Metrics	EMC-30	EMI Receiver	191	7/9/2014			
Electro-Metrics	3115	Double Ridge Guide Antenna	3810				
Solar	8028	LISN	829012/809022				
Com-Power	LI-125	LISN	191180/191181	9/16/2014			
Schwartzbeck	MDS-21	Absorbing Clamp	2581				
Fisher Custom	FCC-TLISN-T4-02	T LISN	20454				
Fisher Custom	FCC-TLISN-T8-02	Fisher Custom	20452				
ATM	42-441-6	Stanard Gain Horn Antenna	E531612-01				
Electro-Metrics	3117	Double Ridge Guide Antenna	109296				
Solar	7334-1	Loop Sensor	32317				
Sun Systems	EC127	Enviromental Chamber	EC0154				
Fluke	52	Digital Thermometer	447553				
		* Cal Due Date Format = MM/DD/YYYY					
All equipment was calibrated one year prior to the cal due date listed unless otherwise indicated							
** These device are on a 2 year calibration cycle							

---

# *Test Data*

## *Radiated Emissions*

### *(125) kHz*

#### ***Limit per FCC Part 15.209***

$(2,400 / F(kHz)) \mu V/m @ (300) \text{ meters}$

$(2,400 / 125) \mu V/m @ (300) \text{ meters} = (19.2) \mu V/m @ (300) \text{ meters}$

$20 \text{ Log } (19.2) = (25.7) \text{ dBuV/m} @ (300) \text{ meters}$

*Limit adjustment extrapolated to (10) meters =  $40 \text{ Log } (300/10) = (59.1) \text{ dB}$*

*Limit @ (10) meters =  $(25.7) + (59.1) = (84.8) \text{ dBuV/m}$*

#### ***Compliance Data***

*Measured field strength =  $\text{dBuV} + \text{ACF} + \text{Cable loss} - \text{Preamp Gain}$*

$26.0 \text{ dBuV} + 53.9 \text{ dB/M} + 1.0 \text{ dB} - 25 \text{ dB} = 55.9 \text{ dBuV/M}$

*Measured field strength of signal @ (125) kHz = (55.9) dBuV/m ,*

*Limit -field strength = margin*

$Margin = (84.8) - (55.9) = (28.9) \text{ dB}$

---

**55.9 dBuV/M = 4.4 dBuA/M**

**4.2.1.1 Permitted range of operating frequencies**

The permitted range of operating frequencies shall not exceed the limits specified in clause 7.3.3 of EN 300 330-1 v1.7.1.

**7.3.3 Limits**

The permitted range of the modulation bandwidth shall be within the limits of the assigned frequency band.

**Compliance data - All measured emissions related to the (125) kHz radiator were within the 0.09 to 30 MHz band.**

**4.2.1.2 Limits for transmitters in the range from 9 kHz to 30 MHz**

The maximum radiated field strength and RF carrier current shall not exceed the limits specified in clause 7.2.1.3 of EN 300 330-1 v1.7.1.

**7.2.1.3 Limits**

The limits presented in the present document are the required field strengths to allow satisfactory operation of inductive systems. The limit for a low level generic H-field strength is given in annexes G & H.

The maximum H-field strengths for certain frequency bands are given in table 5.

The maximum RF carrier current shall not exceed the limits specified in clause 7.2.2.3 of EN 300 330-1 v1.7.1.

**Compliance data - see table below**

Frequency Band (kHz)	Limit dBuA/m @ 10 m	Frequency Measured (kHz)	H-Field dBuA/m	Margin (dB)
119 - 135	66.0	125.06	4.4	>20

Measurements made at (10) metres

**7.2.2.3 Limits**

The limit for the RF carrier current multiplied with the antenna area for Product Class 3 Large size loop transmitters is given in table 5.

**Compliance data - Not applicable**

### **4.2.1.3 Limits for the permitted range of modulation bandwidth**

The maximum range of modulation bandwidth shall not exceed the limits as specified in clause 7.4.3 of EN 300 330-1v1.7.1.

#### **7.4.3 Limits**

The permitted range of the modulation bandwidth shall be within the assigned frequency band see table 1 or  $\pm 7,5\%$  of the carrier frequency whichever is the smallest. For RFID and EAS Systems, the permitted modulation bandwidth shall be within the transmitter emission boundary of figure G.1, respectively the spectrum mask of figure G.2.

**Compliance data - see table G.1, The fundamental frequency was only 4.4 dB<sub>u</sub>A/m and no other emissions were observed.**

### **4.2.1.4 Transmitter spurious and out-of-band emissions**

The transmitter unwanted emissions, i.e. spurious and out-of-band emissions, shall not exceed the limits specified in clauses 7.5.2.2, 7.5.2.4 or 7.5.3.2 and 7.5.4.2 of EN 300 330-1v1.7.1.

#### **7.5.2 Conducted spurious emissions (Product class 3 only)**

#### **7.5.3 Radiated field strength - Magnetic Emissions**

##### **7.5.3.2 Limits**

The radiated field strength of the spurious domain emissions below 30 MHz shall not exceed the generated H-field dB<sub>u</sub>A/m at 10 m given in table below.

State	Frequency $9\text{ kHz} \leq f < 10\text{ MHz}$	Frequency $10\text{ MHz} \leq f < 30\text{ MHz}$
Operating	27 dB <sub>u</sub> A/m at 9 kHz descending 3 dB/oct	-3,5 dB <sub>u</sub> A/m
Standby	5,5 dB <sub>u</sub> A/m at 9 kHz descending 3 dB/oct	-25 dB <sub>u</sub> A/m

**Compliance data - No spurious emissions observed between 9kHz and 30 MHz**

## 7.5.4 Effective radiated power - Substitution Method

### 7.5.4.2 Limits

The power of any radiated emission shall not exceed the values given in table below.

State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW

[Compliance data - no spurious emissions related to transmitter observed above \(30\) MHz](#)

**TABLE 5**

<b>Frequency range (MHz)</b>	<b>H-field strength limit (Hf) dB<math>\mu</math>A/m at 10 m</b>
0,009 ≤ f < 0,090	72 descending 3 dB/oct above 0,03 MHz or according to note 1 (see note 5)
0,09 ≤ f < 0,119	42
0,119 ≤ f < 0,135	66 descending 3 dB/oct above 0,119 MHz or according to note 1 (see notes 3 and 5)
0,135 ≤ f < 0,140	42
0,140 ≤ f < 0,1485	37,7
0,1485 ≤ f < 30	-5 (see note 4)
0,315 ≤ f < 0,600	-5
3,155 ≤ f < 3,400	13,5
4,234	9
4,516	7
7,400 ≤ f < 8,800	9
10,2 ≤ f < 11,00	9
12,5 ≤ f ≤ 20	-7
6,765 ≤ f ≤ 6,795 13,553 ≤ f ≤ 13,567 26,957 ≤ f ≤ 27,283	42 (see note 3)
13,553 ≤ f ≤ 13,567	60 (see notes 2 and 3)
27,095	42
NOTE 1: For the frequency ranges 9 kHz to 135 kHz, the following additional restrictions apply to limits above 42 dB $\mu$ A/m: -for loop coil antennas with an area $\geq$ 0,16 m <sup>2</sup> table 5 applies directly; -for loop coil antennas with an area between 0,05 m <sup>2</sup> and 0,16 m <sup>2</sup> table 5 applies with a correction factor. The limit is: table value + 10 × log (area/0,16 m <sup>2</sup> ); -for loop coil antennas with an area < 0,05 m <sup>2</sup> the limit is 10 dB below table 5.	
NOTE 2: For RFID and EAS applications only.	
NOTE 3: Spectrum mask limit, see annex G.	
NOTE 4: For further information see annex H.	
NOTE 5: Limit is 42 dB $\mu$ A/m for the following spot frequencies: 60 kHz ± 250 Hz, 66,6 kHz ± 750 Hz, 75 kHz ± 250 Hz, 77,5 kHz ± 250 Hz, and 129,1 kHz ± 500 Hz.	

## PRODUCT EMISSIONS

HP 85870A Rev. A.02.00 Data File: PCT W/RADIO CISA@10M 29SEPT2014

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV/m	MEASUREMENTS			SITE			CORR FACTOR	COMMENTS
			ABS	dB	DLIM	MODE	POL	HGT	AZM	
1	30.627	40.0	33.4	-6.6	PK	V	125	225		-18.6
2	32.598	40.0	32.7	-7.3	PK	V	100	270		-18.3
3	34.667	40.0	33.9	-6.1	PK	V	100	270		-17.9
4	39.992	40.0	33.2	-6.8	PK	V	100	135		-17.
5	40.687	40.0	35.1	-4.9	PK	V	100	315		-17.
6	54.226	40.0	37.7	-2.4	QP	V	100	225		-17.8
7	58.715	40.0	34.7	-5.3	PK	V	100	180		-18.7
8	69.001	40.0	33.1	-6.9	PK	V	100	135		-21.3
9	71.974	40.0	35.3	-4.7	PK	V	125	225		-21.6
10	74.008	40.0	33.5	-6.5	PK	V	100	180		-21.7
11	77.552	40.0	36.8	-3.2	QP	V	100	135		-21.8
12	83.100	40.0	37.5	-2.5	QP	V	150	270		-20.9
13	86.059	40.0	34.0	-6.0	PK	V	150	135		-19.9
14	87.180	40.0	32.1	-7.9	PK	V	150	135		-19.5
15	99.999	40.0	34.6	-5.4	PK	V	100	90		-16.6
16	105.139	40.0	36.8	-3.2	QP	V	100	225		-16.1
17	110.817	40.0	39.2	-0.8	QP	V	100	135		-15.6
18	116.300	40.0	37.6	-2.4	QP	V	100	225		-15.5
19	121.792	40.0	37.0	-3.0	PK	V	100	225		-15.6
20	127.410	40.0	35.2	-4.9	PK	H	300	135		-15.9
21	132.891	40.0	36.0	-4.0	PK	V	100	225		-16.2
22	155.004	40.0	35.8	-4.2	PK	V	100	270		-13.7
23	160.599	40.0	36.9	-3.1	QP	V	100	180		-12.5
24	166.133	40.0	36.5	-3.5	PK	V	100	270		-11.6
25	188.159	40.0	36.9	-3.1	PK	V	100	180		-10.
26	199.352	40.0	33.3	-6.7	PK	V	100	135		-11.1
27	199.967	40.0	35.4	-4.6	PK	V	100	180		-11.2
28	202.634	40.0	29.0	-11.0	PK	H	250	315		-16.
29	221.494	40.0	31.6	-8.4	PK	V	150	135		-15.5
30	232.567	47.0	39.3	-7.7	PK	V	100	315		-15.3
31	249.973	47.0	36.8	-10.2	PK	H	300	135		-14.9
32	354.362	47.0	30.8	-16.2	PK	H	250	180		-12.3
33	365.486	47.0	34.6	-12.4	PK	H	200	180		-12.3
34	431.934	47.0	32.2	-14.8	PK	H	100	135		-11.4
35	464.081	47.0	36.5	-10.5	PK	V	100	270		-10.5

# Product Safety Engineering

## EQUITRAC


Date : 09/30/14      Time : 14:41:23.14  
Technician : CHIP FOERSTNER  
Test Method : EN55022-A & FCC-A  
Equipment : PCT  
Mode of Op. : WEB BROWSER ON  
Serial No. :  
Comment : 230VAC 50HZ POWER SUPPLY CUI EMA240125

## EMC-30 SETTINGS

Detector QuasiPeak  
Bandwidth CISPR  
Dump/Dwell N/A  
RF Atten. 10 dB  
IF Atten. 10 dB

## SPECS

1) CISPR 22 QUASI PEAK  
2) CISPR22 AVERAGE  
3)  
4)

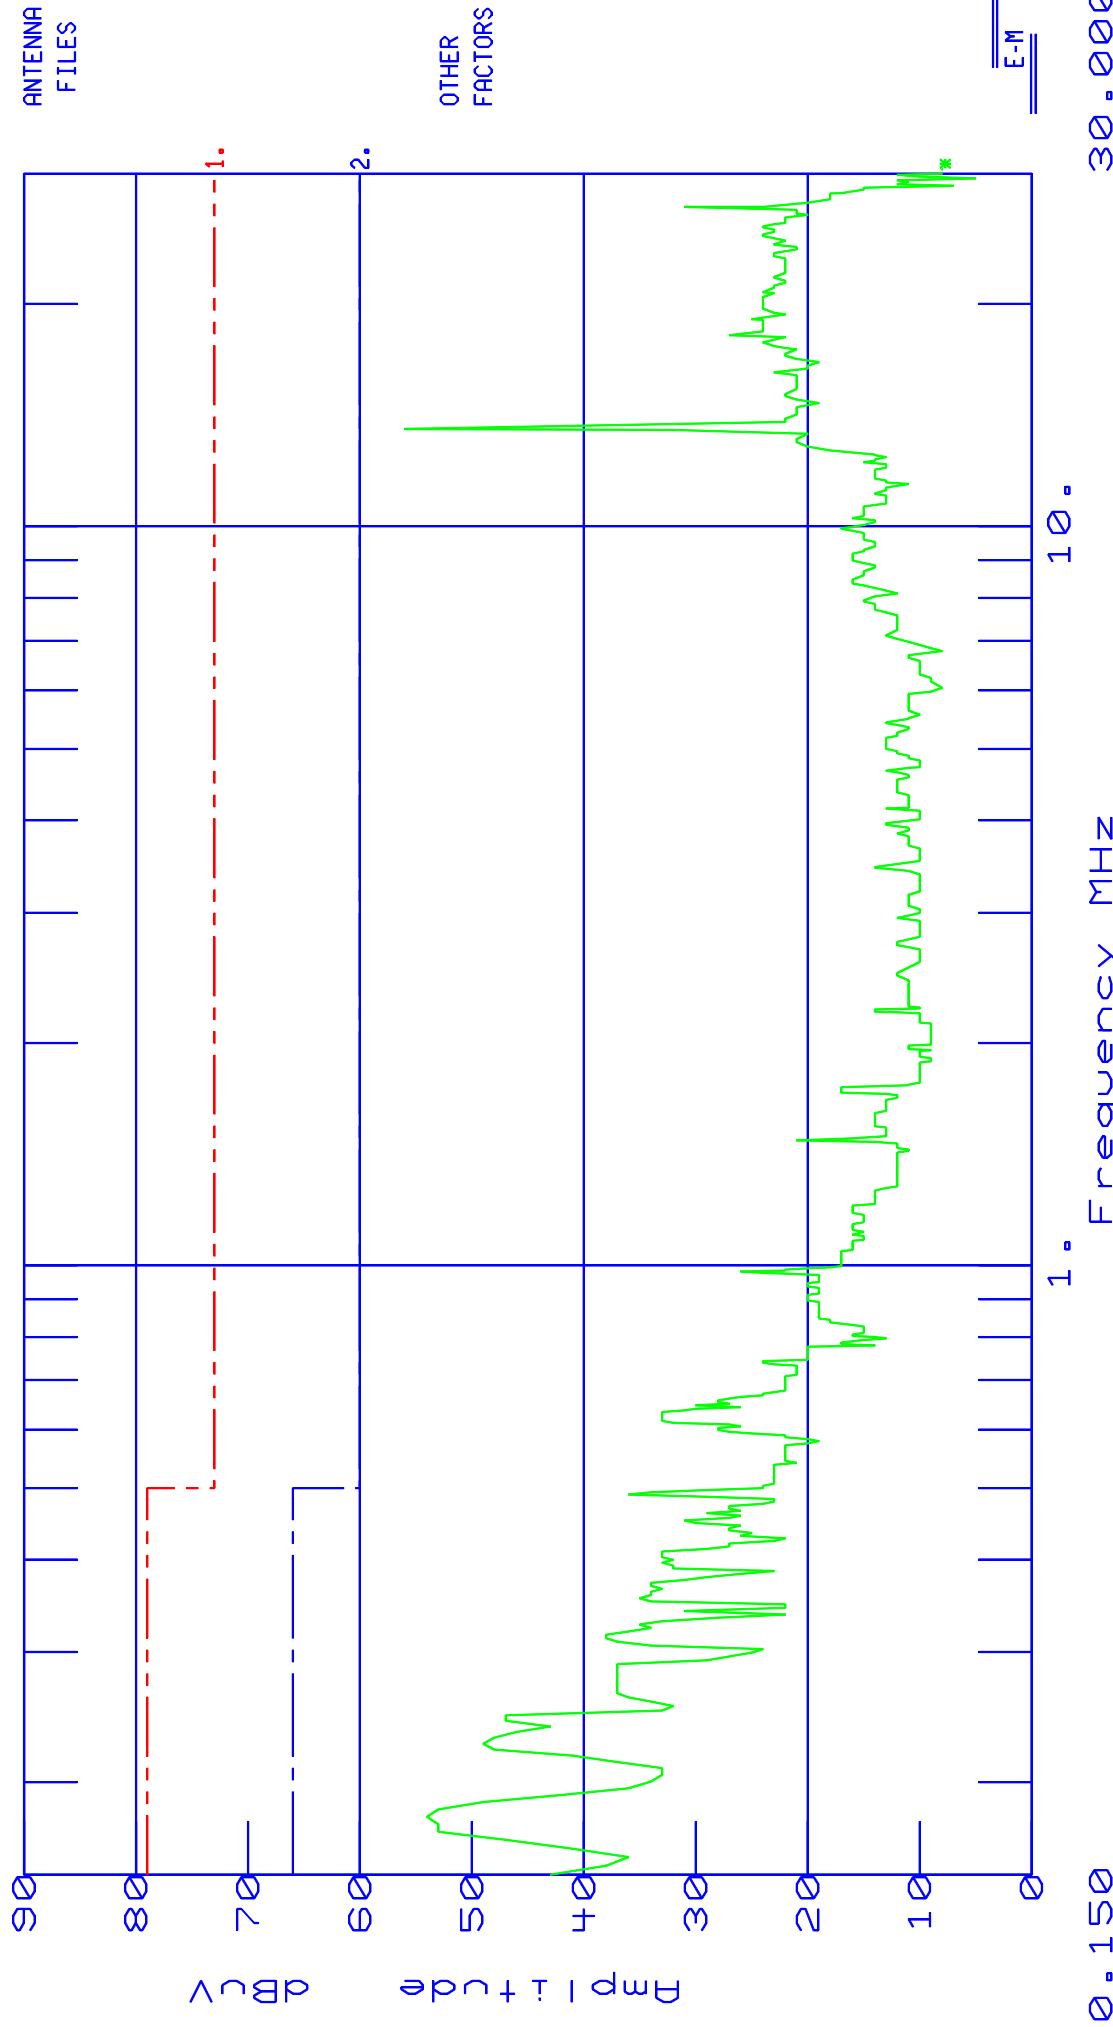

θ = 150

θ = 150

300 • 000

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_1.D30  
Amplitude Units : dBuV


Threshold -8 dB

PAGE 1  
Freq. (MHz)  
0.1500

		C22AQP. S30		C22AAVG. S30	
Freq (MHz)	Amp	vs Spec (dB)	vs Spec (dB)		
13.5356	56.0			-4.000 *	

# Product Safety Engineering

EQUIITRAC		EMC-30 SETTINGS		SPECs	
Date :	09/30/14	Time :	10:28:13.82	1) CISPR 22 QUASI PEAK	
Technician :	CHIP FOERSTNER	Test Equip. :	EMC-30	2) CISPR22 AVERAGE	
Test Method :	EN55022-A & FCC-A	Test Number :		3)	
Equipment :	PCT	Sensor Loc. :	SIDE 2	4)	
Mode of Op. :	WEB BROWSER ON	Sensor Pol. :			
Serial No. :		Ext. Atten. :	0 dB		
Comment :	230VAC 50HZ	POWER SUPPLY	CUI EMSA240125		

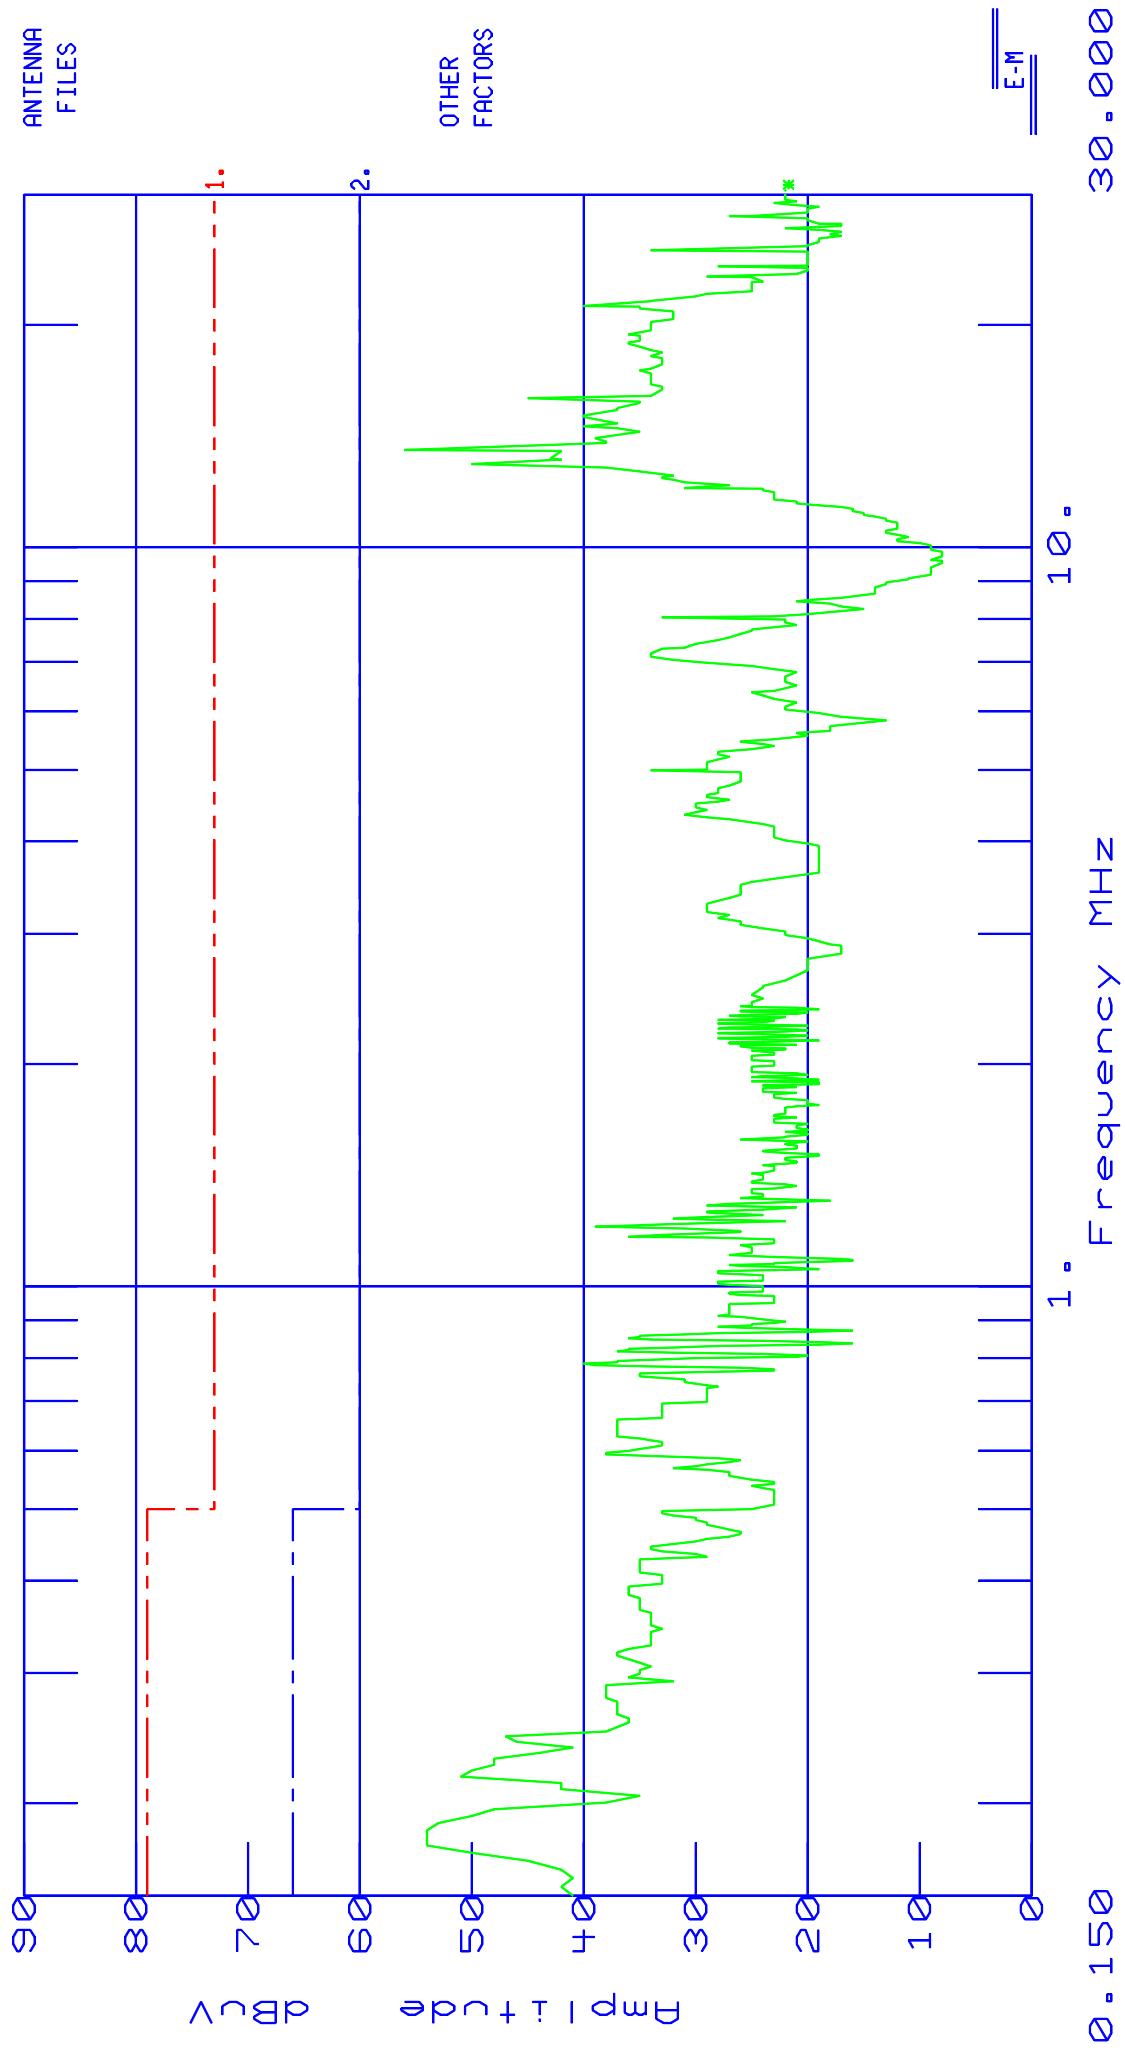

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_2.D30  
Amplitude Units : dBuV

Threshold -8 dB

PAGE 1  
Freq. (MHz)  
0.1500

		C22AQP. S30		C22AAVG. S30	
Freq( MHz)	Amp	vs Spec( dB)	vs Spec( dB)		
13.5356	56.0			-4.000 *	

# Product Safety Engineering

```


QUITRAC          Date : 09/30/14          Time : 14:58:48.26
Technician : CHIP FOERSTNER
Test Method : EN55022 CLASS A
Equipment : PCT
Mode of Op. : NORMAL
Serial No. : 1234567890

Comment : 230 VAC / 50 Hz

EMC-30 SETTINGS
Detector QuasiPeak
Bandwidth CISPR
Dump/Dwell N/A
RF Attenu. 10 dB
IF Attenu. 10 dB

SPECS
1) Default Spec (same as V885)
2) Default Spec (same as V885)
3)
4)

```

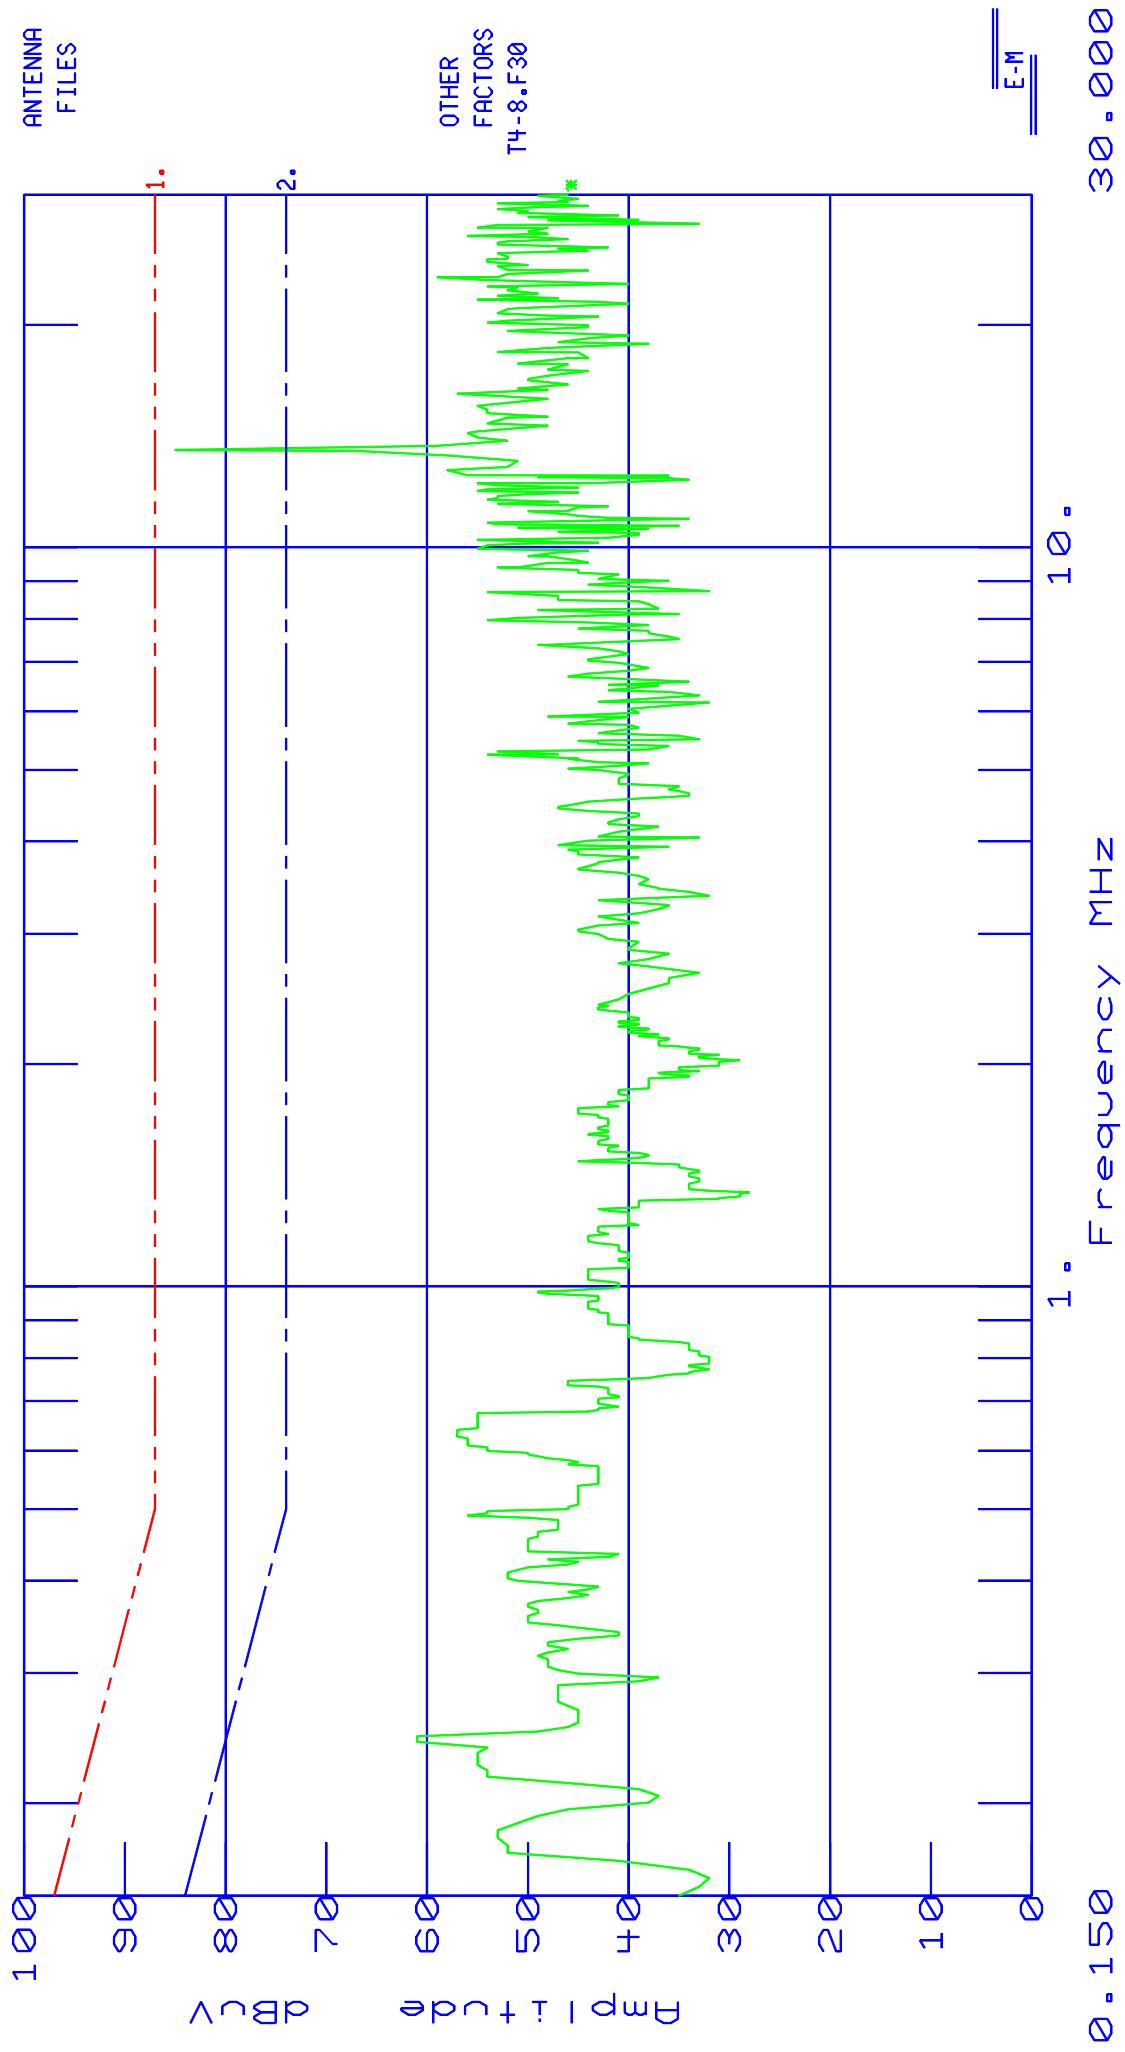

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_E.D30  
Amplitude Units : dBuV

Threshold 7 dB

PAGE 1  
Freq. (MHz)  
0.1500


		ETHAQP. S30		ETHAAVG. S30	
Freq( MHz)	Amp	vs Spec( dB)	vs Spec( dB)	vs Spec( dB)	
13.5390	85.0			11.000 *	

# Product Safety Engineering

EQUITRAC  
Date : 09/30/14      Time : 15:29:42.71  
Technician : CHIP FOERSTNER      Test Equip. : EMC-30  
Test Method : EN55022 CLASS A      Test Number : 1  
Equipment : PCT  
Mode of Op. : NORMAL  
Serial No. :  
Comment : 230 VAC / 50 HZ

EMC-30 SETTINGS  
Detector : Average  
Bandwidth : CISPR  
Dump/Dwell : N/A  
RF Atten. : 10 dB  
IF Atten. : 10 dB

SPECS  
1) Default Spec (same as V885)  
2) Default Spec (same as V885)  
3)  
4)

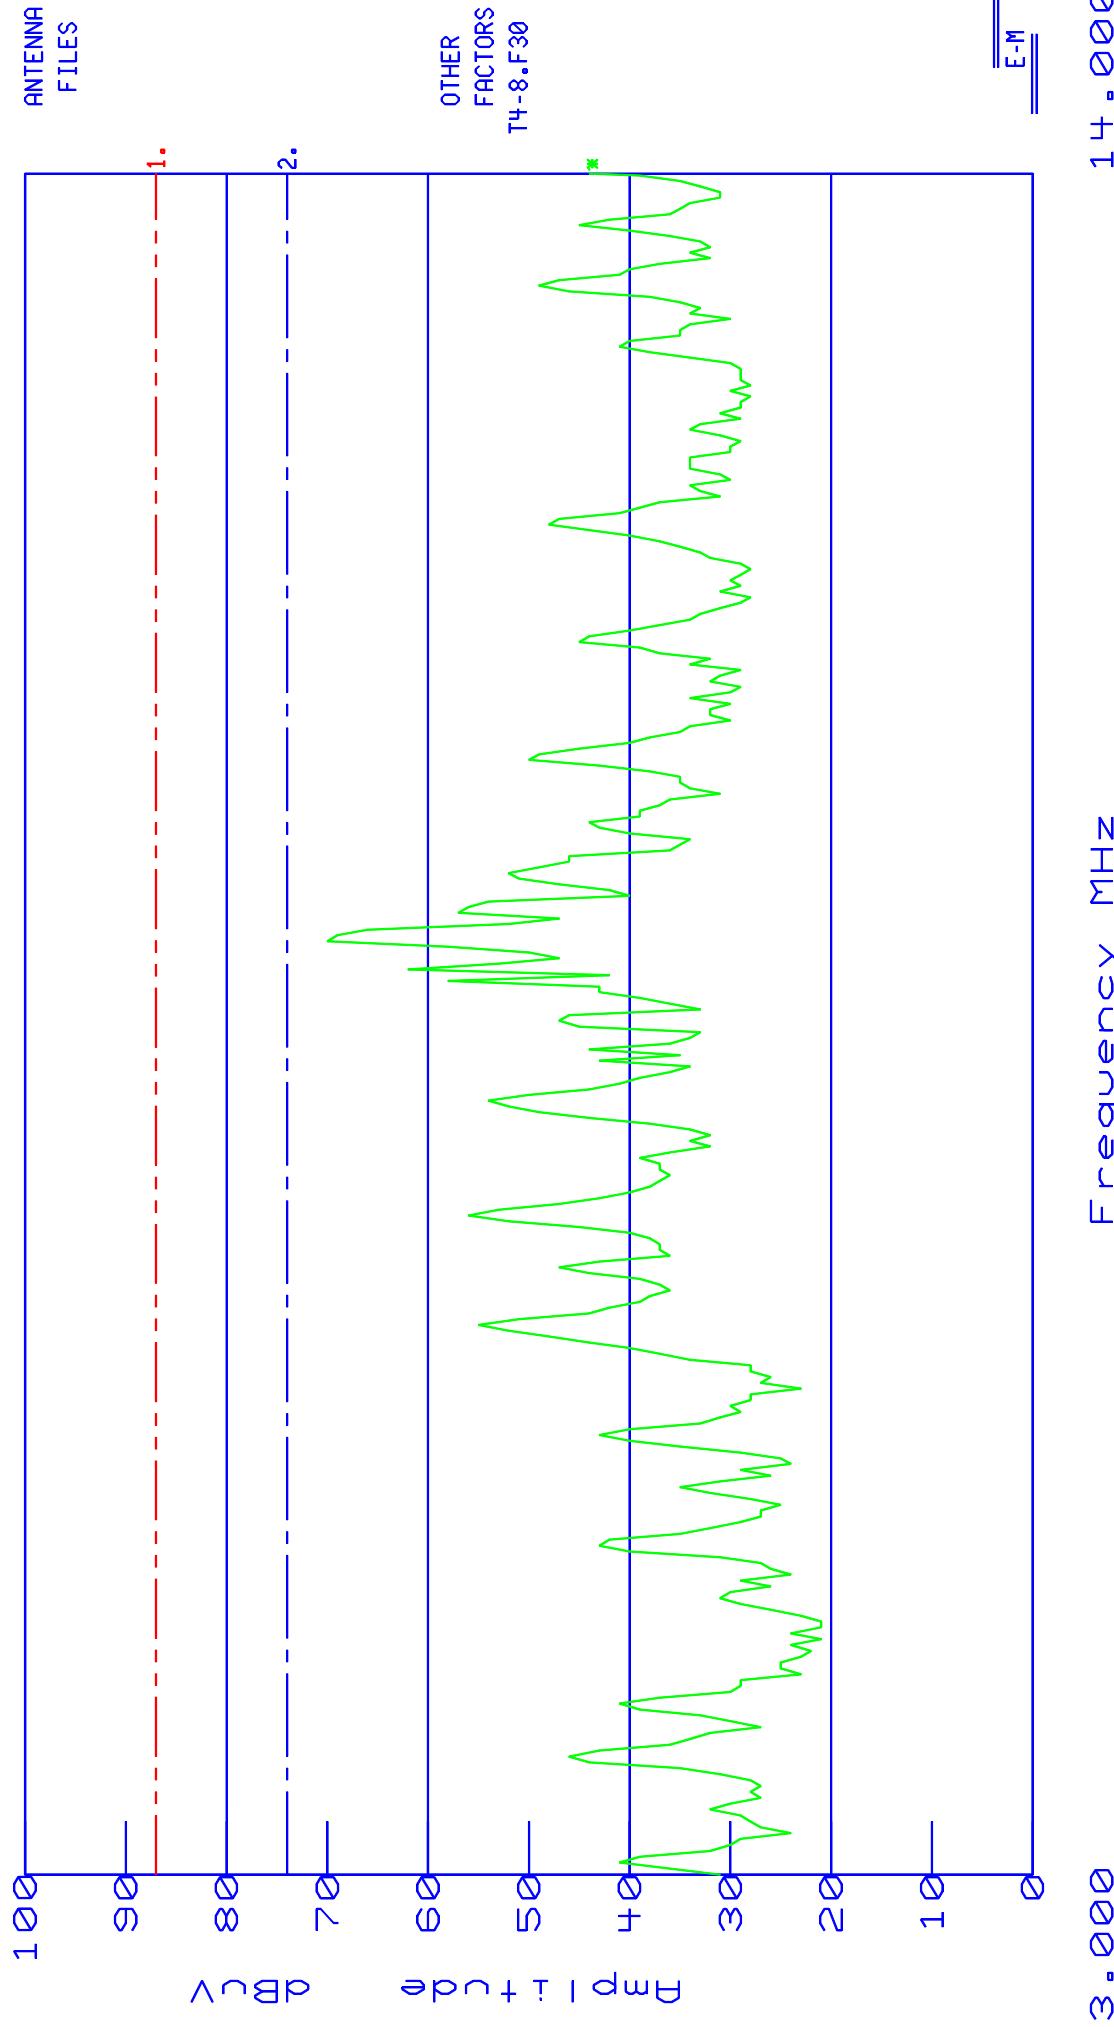

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_EA.D30  
Amplitude Units : dBuV


Threshold -8 dB

PAGE 1  
Freq. (MHz)  
13.0000

Freq (MHz)	Amp	ETHAQP. S30		ETHAAVG. S30	
		vs Spec (dB)	vs Spec (dB)	vs Spec (dB)	vs Spec (dB)
13.5396	70.0			-4.000 *	
13.5429	69.0			-5.000 *	
13.5463	66.0			-8.000 *	

# Product Safety Engineering

EQUITRAC		EMC-30 SETTINGS		SPECS	
Date :	09/30/14	Time :	09:57:53.65	1) CISPR 22 QUASI PEAK	
Technician :	CHIP FOERSTNER	Test Equip.	: EMC-30	2) CISPR22 AVERAGE	
Test Method :	EN55022-A & FCC-A	Test Number :		3)	
Equipment :	PCT	Sensor Loc.	: LINE	4)	
Mode of Op. :	WEB BROSSER ON	Sensor Pol.	:		
Serial No. :		Ext. Atten.	: 0 dB		
Comment :	120VAC 60HZ	POWER SUPPLY	CUI EMSA240125		

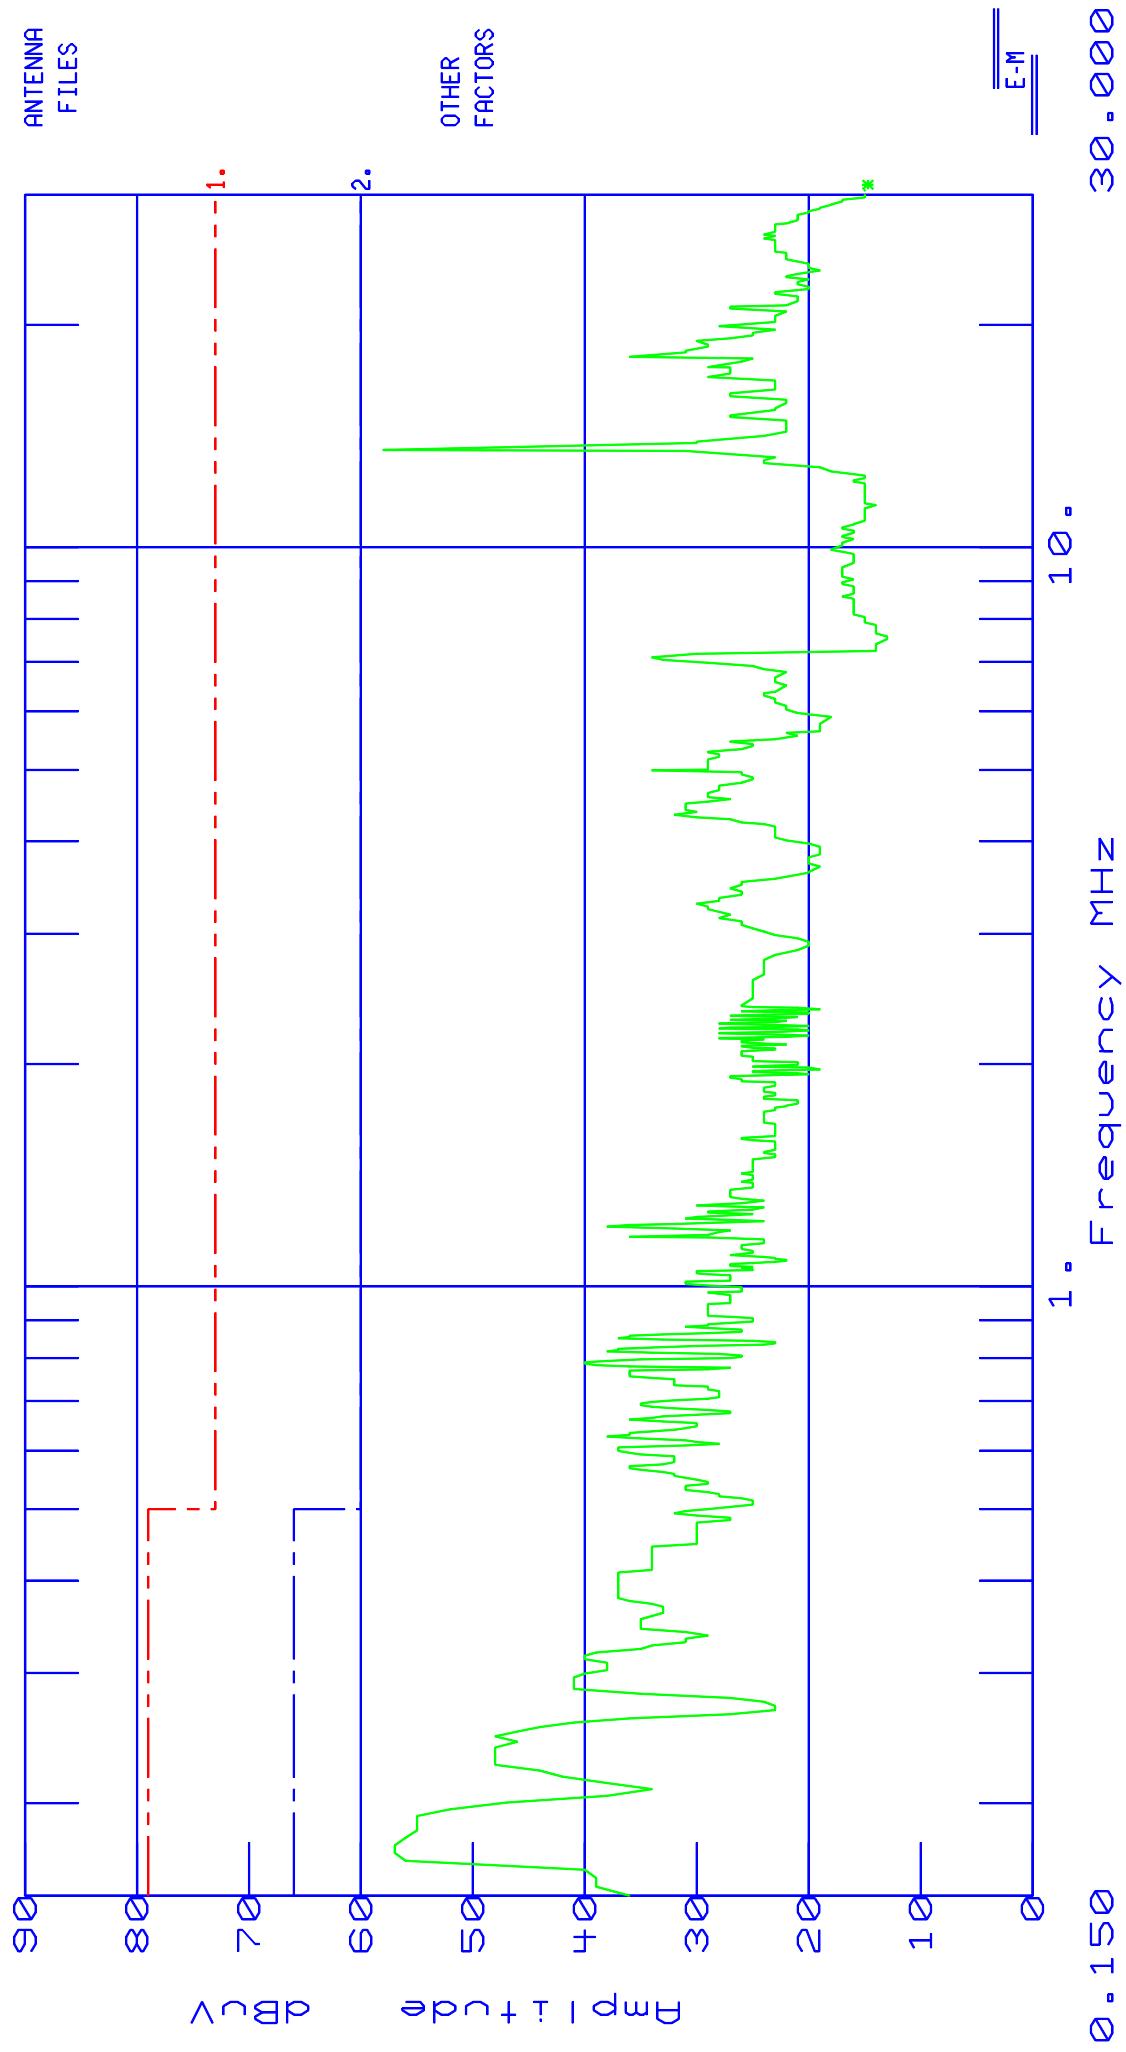

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_L.D30  
Amplitude Units : dBuV

Threshold -8 dB

PAGE 1  
Freq. (MHz)  
0.1500

		C22AQP. S30		C22AAVG. S30	
Freq (MHz)	Amp	vs Spec (dB)	vs Spec (dB)		
13.5356	58.0			-2.000 *	

# Product Safety Engineering

## EQUITRAC


Date : 09/30/14      Time : 10:14:08.25  
Technician : CHIP FOERSTNER      Test Equip. : EMC-30  
Test Method : EN55022-A & FCC-A  
Equipment : PCT  
Mode of Op. : WEB BROWSER ON  
Serial No. :  
Comment : 120VAC 60HZ POWER SUPPLY CUI EMA240125

## EMC-30 SETTINGS

Detector QuasiPeak  
Bandwidth CISPR  
Dump/Dwell N/A  
RF Atten. 10 dB  
IF Atten. 10 dB

## SPECS

1) CISPR 22 QUASI PEAK  
2) CISPR22 AVERAGE  
3)  
4)

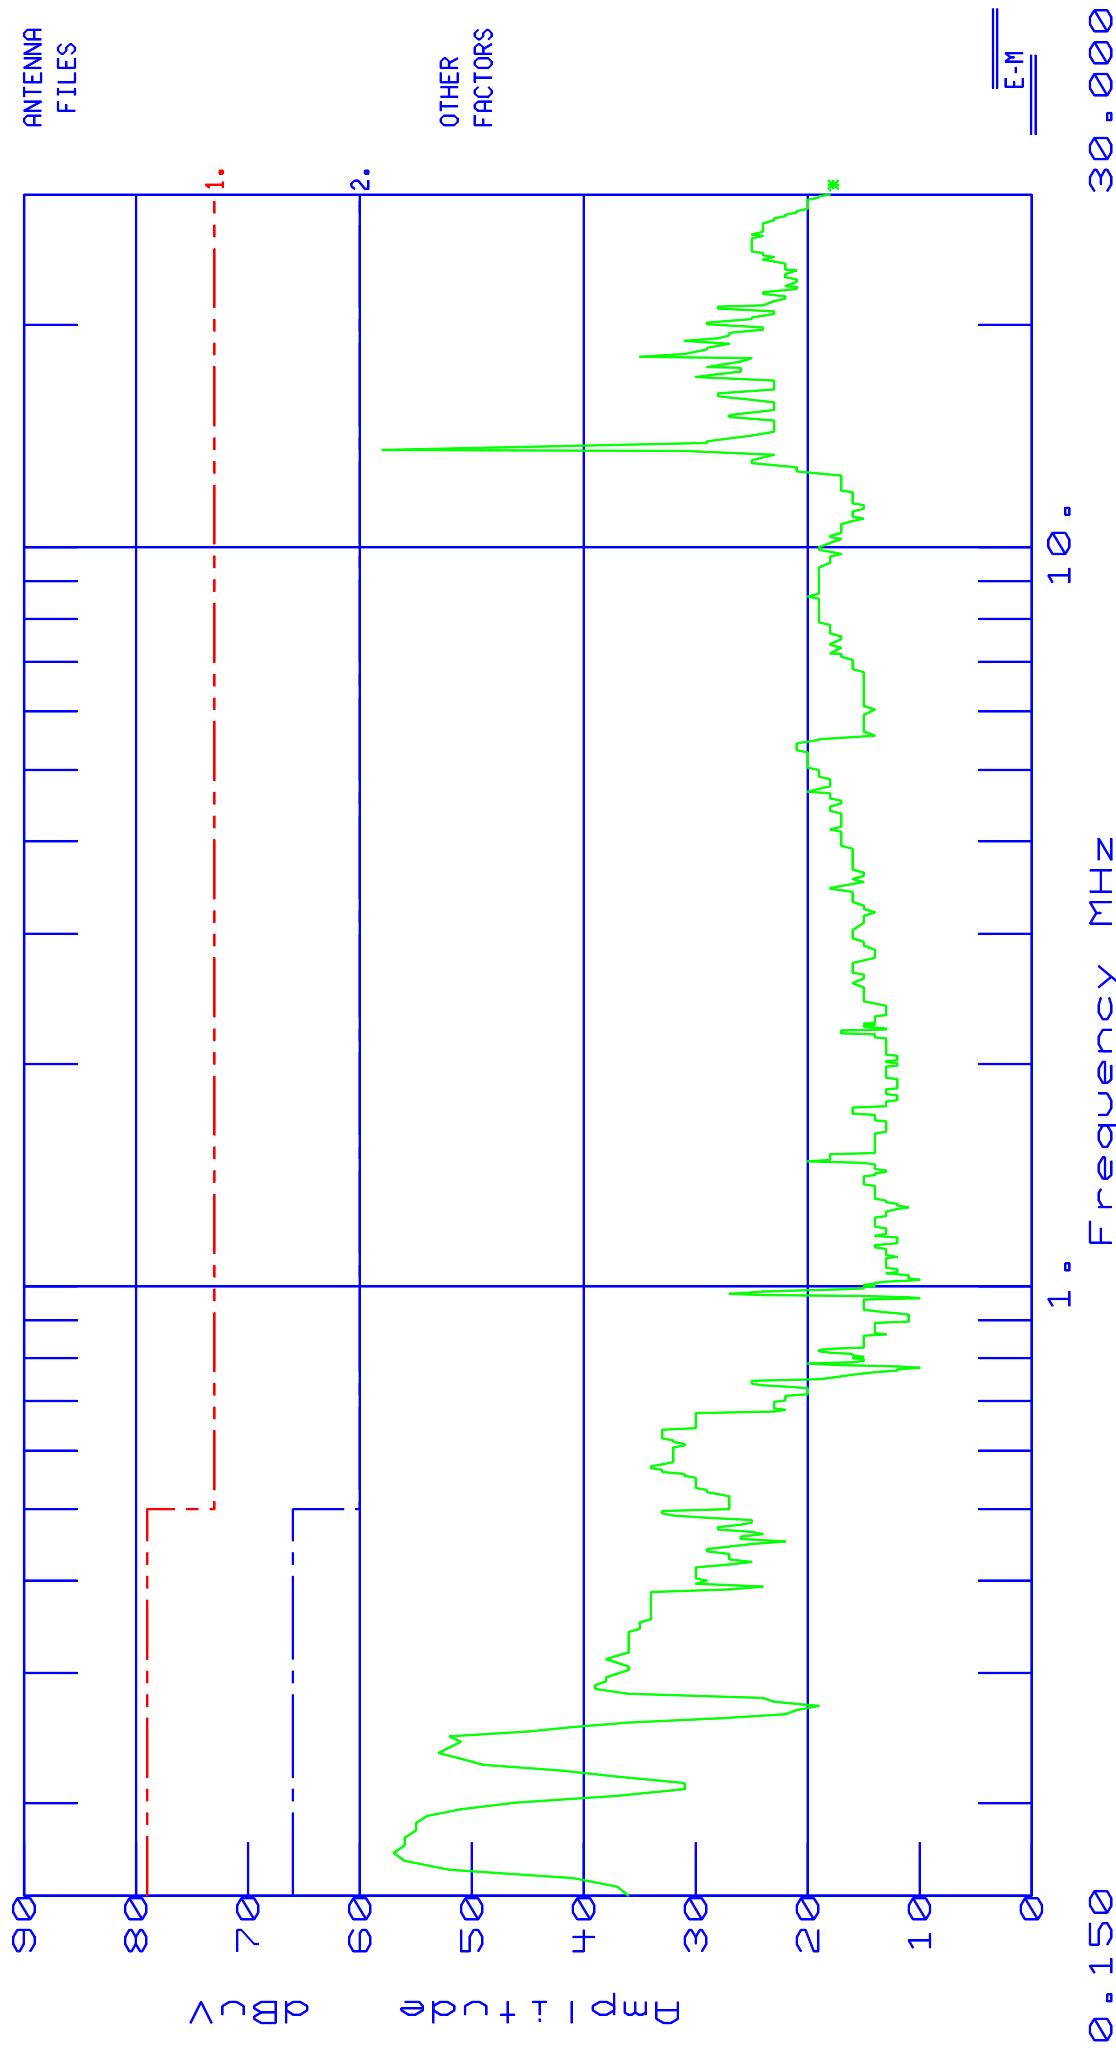

30.000

1000

θ = 150°

TEST TITLE: EQUI TRAC  
DATA FILE : 14129\_N.D30  
Amplitude Units : dBuV

Threshold -8 dB

PAGE 1  
Freq. (MHz)  
0.1500

		C22AQP. S30		C22AAVG. S30	
Freq( MHz)	Amp	vs Spec( dB)	vs Spec( dB)		
13.5356	58.0			-2.000 *	

# **APPENDIX**

## **B**

### **System Under Test Description**

Page B1 of B3

*Test Report Number 14F119B1*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525**  
Tel (352) 588-2209 Fax (352) 588-2544

## SYSTEM COMPONENTS

\*\*\*\*\*

DEVICE TYPE: EUT, PCT with CUI Power Supply P/N: 593-0005

\*\*\*\*\*

DEVICE TYPE: Keyboards **(2X)** KB-20002965

\*\*\*\*\*

DEVICE TYPE: mouse

\*\*\*\*\*

DEVICE TYPE: laptop and router

\*\*\*\*\*

## INTERFACE CABLES

\*\*\*\*\*

DEVICE TYPE: EUT

SHIELD: Yes

LENGTH: 4 meters

CONNECTOR TYPE: Dsub 26 pin to unterminated molex type

PORT: Copy Control

\*\*\*\*\*

DEVICE TYPE: KB **(2X)**

SHIELD: Yes

LENGTH: 1 meter

CONNECTOR TYPE: USB ferrites

PORT: USB on back

\*\*\*\*\*

DEVICE TYPE: Mouse

SHIELD: Yes

LENGTH: 2 meters

CONNECTOR TYPE: USB

PORT: USB on side

\*\*\*\*\*

DEVICE TYPE: EUT **(2X)**

SHIELD: No

LENGTH: 10 feet

CONNECTOR TYPE: RJ 45

PORT: Laptop and router

\*\*\*\*\*

## AC LINE CORDS

\*\*\*\*\*

DEVICE TYPE: Power supply plug in type (**DC side**)

SHIELD: No

LENGTH: 8 feet ferrite

CONNECTOR TYPE: miniplug

\*\*\*\*\*