



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

Code of Federal Regulations 47 Part 15 – Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.247

Operation within the bands 902 - 928 MHz,
2400 - 2483.5 MHz, 5725 - 5875 MHz,
and 24.0 - 24.25 GHz.

And

Industry Canada Spectrum Management and Telecommunications

Radio Standards Specification

RSS-210 Issue 8 December 2010

PART I – 10 MHz Bandwidth Data

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

Formal Name: PMP450AP 5.7 GHz MIMO/Combo Radio

Kind of Equipment: Point-to-Multipoint Digital Transmission Transceiver

Frequency Range: **5730 to 5845 MHz (10 MHz bandwidth) (in this report)**
5735 to 5840 MHz (20 MHz bandwidth) (in Part II report)
5740 to 5835 MHz (FSK) (in Part III report)

Test Configuration: Stand-alone

Model Number(s): C054045A002A

Model(s) Tested: C054045A002A

Serial Number(s): 0A003EA00157 (test unit 1), 0A003EA00154 (test unit 2),
0A003EA00145 (test unit 3)

Date of Tests: May 15th to May 31st, 2012

Test Conducted For: Cambium Networks
1299 E. Algonquin Road.
Schaumburg, IL 60196, USA

NOTICE: “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 – 2012, D.L.S. Electronic Systems, Inc.

COPYRIGHT NOTICE



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.

SIGNATURE PAGE

Tested By:

A handwritten signature in black ink that reads "Craig Brandt". The signature is written in a cursive, flowing style.

Craig Brandt
Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf". The signature is written in a cursive, flowing style.

William Stumpf
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson". The signature is written in a cursive, flowing style.

Brian Mattson
General Manager



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Table of Contents

i. Cover Page	1
ii. Signature Page	2
iii. Table of Contents	3
iv. NVLAP Certificate of Accreditation	5
1.0 Summary of Test Report	6
2.0 Introduction	7
3.0 Test Facilities	7
4.0 Description of Test Sample	7
5.0 Test Equipment	9
6.0 Test Arrangements	10
7.0 Test Conditions	10
8.0 Modifications Made To EUT for Compliance	11
9.0 Additional Descriptions	11
10.0 Results	11
11.0 Conclusion	11
Appendix A – Measurement Data	12
A1.0 26 dB Emission Bandwidth - Conducted	12
A1.0a - Channel A	13
A1.0b - Channel B	22
A2.0 Emission Bandwidth – 6 dB bandwidth - Conducted	31
A2.0a - Channel A	32
A2.0b - Channel B	41
A3.0 Fundamental Emission Output Power - Conducted	50
A3.0a - Channel A_ Matrix A	51
A3.0ab - Channel A_ Matrix B	60
A3.0b - Channel B_ Matrix B	69
A3.0bb - Channel B_ Matrix B	78
A4.0 Maximum Power Spectral Density – Conducted	87
A4.0a – Channel A	88
A4.0b – Channel B	97
A5.0 Maximum Unwanted Emission Levels – Conducted	106
A5.0aa – Channel A, 16QAM	107
A5.0ab – Channel A, 64QAM	125
A5.0ac – Channel A, QPSK	143
A5.0ba – Channel B, 16QAM	161
A5.0bb – Channel B, 64QAM	179
A5.0bc – Channel B, QPSK	197



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

A6.0	Maximum Unwanted Emission Levels into Restricted Frequency Bands – Radiated	215
A6.0a	– Radiated, 30 to 1000 MHz.....	216
A6.0b	– Radiated, 1 to 18 GHz.....	222
A6.0c	– Radiated, 18 to 26 GHz.....	228
A6.0d	– Radiated, 26 to 40 GHz.....	234
A7.0	Maximum Unwanted Emission Levels – Conducted Band-Edge	240
A7.0a	– Channel A.....	241
A7.0b	– Channel B.....	253
A8.0	Duty Cycle of Test Unit.....	265
A8.0a	– Channel A.....	266
A8.0b	– Channel B.....	269
A9.0	AC Line Conducted Emissions.....	272




166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:

Cambium Networks
C054045A002A
17897

United States Department of Commerce
National Institute of Standards and Technology

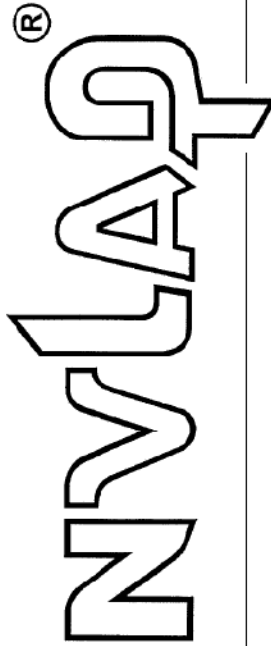

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).



2011-10-01 through 2012-09-30

Effective dates

Dolly S. Bruce
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2009-01-28)



Company: Cambium Networks
 Model Tested: C054045A002A
 Report Number: 17897

166 South Carter, Genoa City, WI 53128

1.0 Summary of Test Report

It was determined that the Cambium Networks PMP450AP 5.7 GHz MIMO/Combo Radio, Model C054045A002A, complies with the requirements of CFR 47 Part 15 Subpart C Section 15.247 and Industry Canada RSS-210 Issue 8. FCC limits & procedures were used to show compliance with Industry Canada regulations.

Applicable Technical Requirements Tested:

Section	Description	Procedure	Note	Compliant?
Informative	26 dB Emission Bandwidth	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Section 5.1.1	1	NA
15.247(a)(2) & RSS-210 A8.2(a)	6 dB Emission Bandwidth	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Section 5.1.1	1	Yes
15.247(b)(3) & RSS-210 A8.4(3)(5)	Fundamental Emission Output Power – Average	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Section 5.2.2.1-AVG1	1	Yes
15.247(e) & RSS-210 A8.2(b)	Maximum Power Spectral Density Level in the Fundamental Emission - Average	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Section 5.3.2-AVGPSD	1	Yes
15.247(d) & RSS-210 A8.5	Maximum Unwanted Emission Levels – RF Conducted	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Sections 5.4.1 & 5.4.2	1	Yes
15.247 (d), 15.205 & RSS-210 A8.5 RSS-Gen 7.2.2	Unwanted Emissions into Restricted Frequency Bands - Radiated	ANSI C63.10-2009 Sections 6.5 & 6.6	2	Yes
15.247(d) & RSS-210 A8.5	Band Edge Measurements	FCC Publication KDB 558074 D01 DTS Meas Guidance v01 Sections 5.4.1 & 5.4.2	1	Yes
15.35(c) & RSS-Gen 7.2.3	Duty Cycle of Test Unit	ANSI C63.10-2009 Section 7.5	1	NA
15.207(a) & RSS-Gen 7.2.4	AC Line Conducted Emissions	ANSI C63.10-2009 Section 6.2		Yes

Note 1: RF conducted measurement.

Note 2: Radiated emission measurement.



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

2.0 Introduction

From May 15th through May 31st, 2012 the PMP450AP 5.7 GHz MIMO/Combo Radio, Model C054045A002A, as provided from Cambium Networks, was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.247 and Industry Canada RSS-210 Issue 8. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc.
166 S. Carter Street
Genoa City, Wisconsin 53128

Wheeling Test Facility:

D.L.S. Electronic Systems, Inc.
1250 Peterson Drive
Wheeling, IL 60090

4.0 Description of Test Sample

Description:

Point-to-Multipoint 5.7 GHz DTS/UNII Transceiver with either OMNI (13 dBi) or Sector (17 dBi) external antenna with 10 MHz or 20 MHz channel bandwidth. The Sector Antenna housing includes the 17 dBi Dipole Sector Antenna and 10.5 dBi Dual Patch Antenna. The 17 dBi antenna operates with OFDM modulation, and the 10.5 dBi Dual Patch Antenna operates with FSK modulation. An external 10 dBi OMNI antenna can operate with the FSK modulation as well.

Type of Equipment / Frequency Range:

Stand-Alone / 5730 to 5845 MHz (10 MHz bandwidth)	(in this report)
5735 to 5840 MHz (20 MHz bandwidth)	(in Part II report)
5740 to 5835 MHz (FSK)	(in Part III report)

Physical Dimensions of Equipment Under Test:

Length: 9 in. Width: 9 in. Height: 3 in.

Power Source:

29 VDC (Power Over Ethernet to Radio)
120 Vac, 60 Hz using Phihong power supply model: PSA15A-295 (MOT)



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

Internal Frequencies:

150 kHz, 75 kHz (Switching Power Supply Frequencies)
40 MHz, 25 MHz, 20 MHz

Transmit Frequencies Used For Test Purpose:

10 MHz Channel Bandwidth: **Low channel: 5730 MHz, Middle channel: 5800 MHz, High channel: 5845 MHz (in this report)**

20 MHz Channel Bandwidth: Low channel: 5735 MHz, Middle channel: 5800 MHz, High channel: 5840 MHz

FSK: Low channel: 5740 MHz, Middle channel: 5800 MHz, High channel: 5835 MHz

Type of Modulations:

OFDM: **QPSK, 16 QAM, & 64 QAM (in this report)**

FSK: 2-level & 4-level

Description of Circuit Board(s) / Part Number:

Cambium Networks PC Board	84010120001 Issue A
17 dBi Dipole Sector antenna with 10.5 dBi Dual Patch antenna in antenna housing	SKM540045-17
Connector	09010084001
Cables x 3	30009406002
OMNI 13 dBi antenna	AMO-5G13
OMNI 10 dBi antenna	M26310100015



Company: Cambium Networks
 Model Tested: C054045A002A
 Report Number: 17897

166 South Carter, Genoa City, WI 53128

5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

D.L.S. Wisconsin

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Dates	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	4/12	4/13
Preamplifier	Rohde & Schwarz	TS-PR10	032001/004	9 kHz – 1 GHz	1/12	1/13
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	9/10	9/12
Antenna	EMCO	3146	1205	200 MHz – 1 GHz	9/10	9/12
Preamp	Ciao	CA118-4010	101	1GHz-18GHz	2/12	2/13
Horn Antenna	EMCO	3115	9903-5731	1-18GHz	6/11	6/13
Low Pass Filter	Mini-Circuits	VLFX-1125	RUU9260009 20	DC-1125MHz	8/11	8/12
Preamp	Miteq	AMF-8B- 180265-40-10P- H/S	438727	18GHz-26GHz	8/11	8/12
Horn Antenna	EMCO	3116	2549	18 – 40GHz	8/10	8/12
High Pass Filter	Planar Filter Co.	HP8G-7G8-CD- SFF	PF1225/0728	7.5 GHz – 18 GHz	8/11	8/12
High Pass Filter	Planar Filter Co.	CL22600-9000- CD-SS	PF1230/0728	16.2 GHz – 40 GHz	8/11	8/12
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	7/11	7/12
LISN	Solar	9252-50-R- 24-BNC	961019	9 kHz – 30 MHz	5/12	5/13
Filter- High-Pass	SOLAR	7930-120	090702	120 kHz – 30 MHz	1/12	1/13
Limiter	Electro-Metrics	EM-7600	706	9 kHz – 30 MHz	1/12	1/13
20 dB attenuator	Aeroflex/weinsche 1	75A-20-12	1071	DC – 40 GHz	6/11	6/12
Preamp	Rohde & Schwarz	TS-PR40	052002/025	26 GHz – 40 GHz	6/11	6/12
50 Ohm Load	Pasternack	PE6039	DLS #527	DC – 18 GHz	NA	NA
50 Ohm Load	Pasternack	PE6095	NA	DC – 18 GHz	NA	NA



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

6.0 Test Arrangements

Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix A – Measurement Data. **See the separate exhibit for photos of the test set up.**

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

RF Conducted Emissions Measurement Arrangement:

All RF conducted emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to FCC Publication KDB 558074 D01 DTS Meas Guidance v01 and ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix A – Measurement Data. **See the separate exhibit for additional photos of the test set up.**

7.0 Test Conditions

Normal Test Conditions:

Temperature and Humidity:

72°F at 42% RH

Supply Voltage:

29 VDC (Power Over Ethernet to Radio)
120 Vac, 60 Hz using Phihong power supply model: PSA15A-295 (MOT)



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

8.0 Modifications Made To EUT for Compliance

No modifications were needed for the OFDM transmitters.

All modifications made to EUT for compliance were for the FSK transmitter. These changes are listed in the Part III – FSK Data report (Report Number 17898a).

9.0 Additional Descriptions

Mode of operation: Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Emission Designators: 10M0X1D, 20M0X1D

10.0 Results

Measurements were performed in accordance with FCC Publication KDB 558074 D01 DTS Meas Guidance v01 and ANSI C63.10-2009. Graphical and tabular data can be found in Appendix A at the end of this report.

11.0 Conclusion

The PMP450AP 5.7 GHz MIMO/Combo Radio, Model C054045A002A, as provided from Cambium Networks tested from May 15th to May 31st, 2012 **meets** the requirements of CFR 47 Part 15 Subpart C Section 15.247 and Industry Canada RSS-210 Issue 8.

Note: FCC limits & procedures were used to show compliance with Industry Canada regulations.



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A1.0 26 dB Emission Bandwidth - Conducted

Rule Section: Informative

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.1.1

Description: RBW = 1-5% of EBW
VBW $\geq 3 \times$ RBW
Detector = Peak
Trace mode = max hold
Sweep = auto couple

Measure the maximum width of the emission between the lower and upper frequencies that measure 26 dB below the maximum level of the in-band emission.

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.


Limit: Informative

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

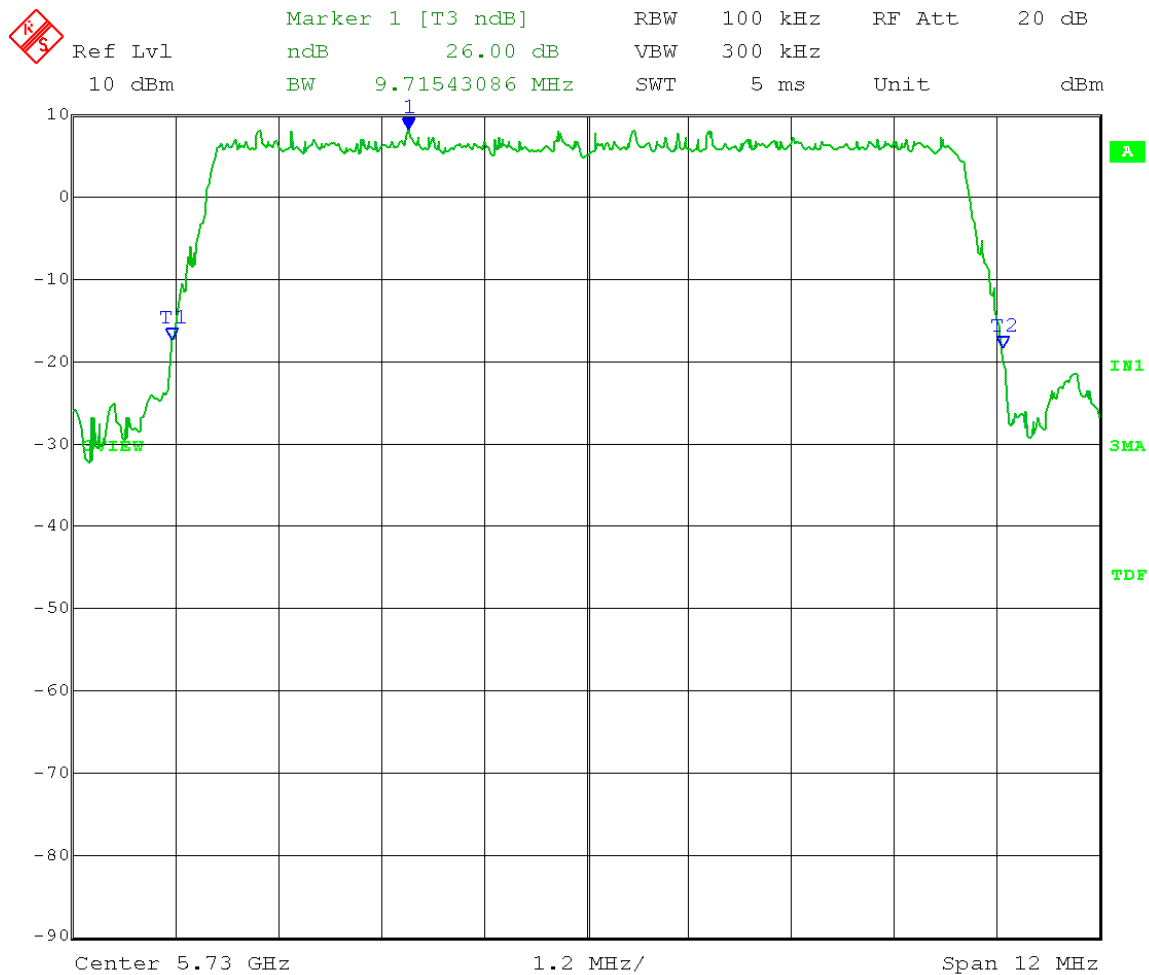


Date: 16.MAY.2012 13:32:00

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

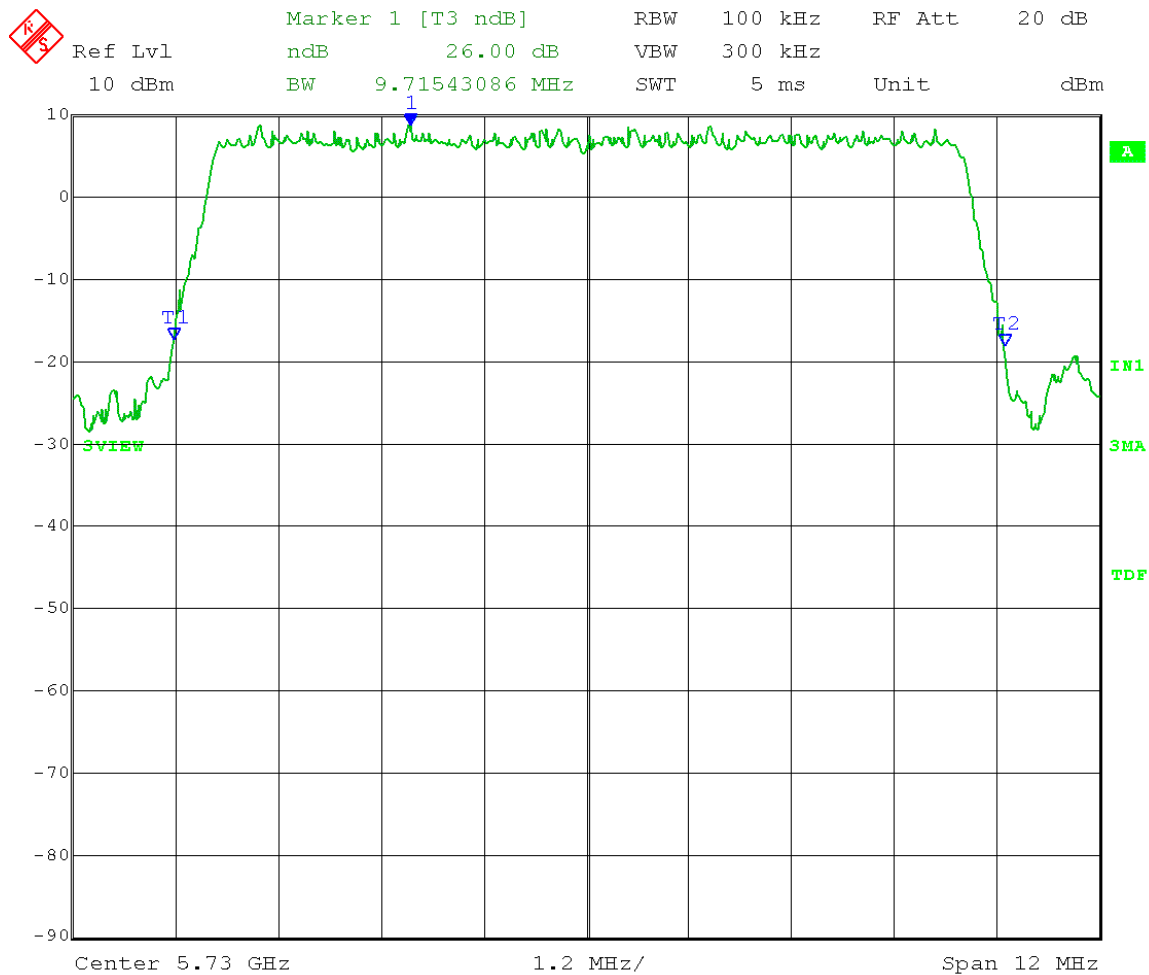


Date: 17.MAY.2012 08:22:51

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 731D
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.72 MHz

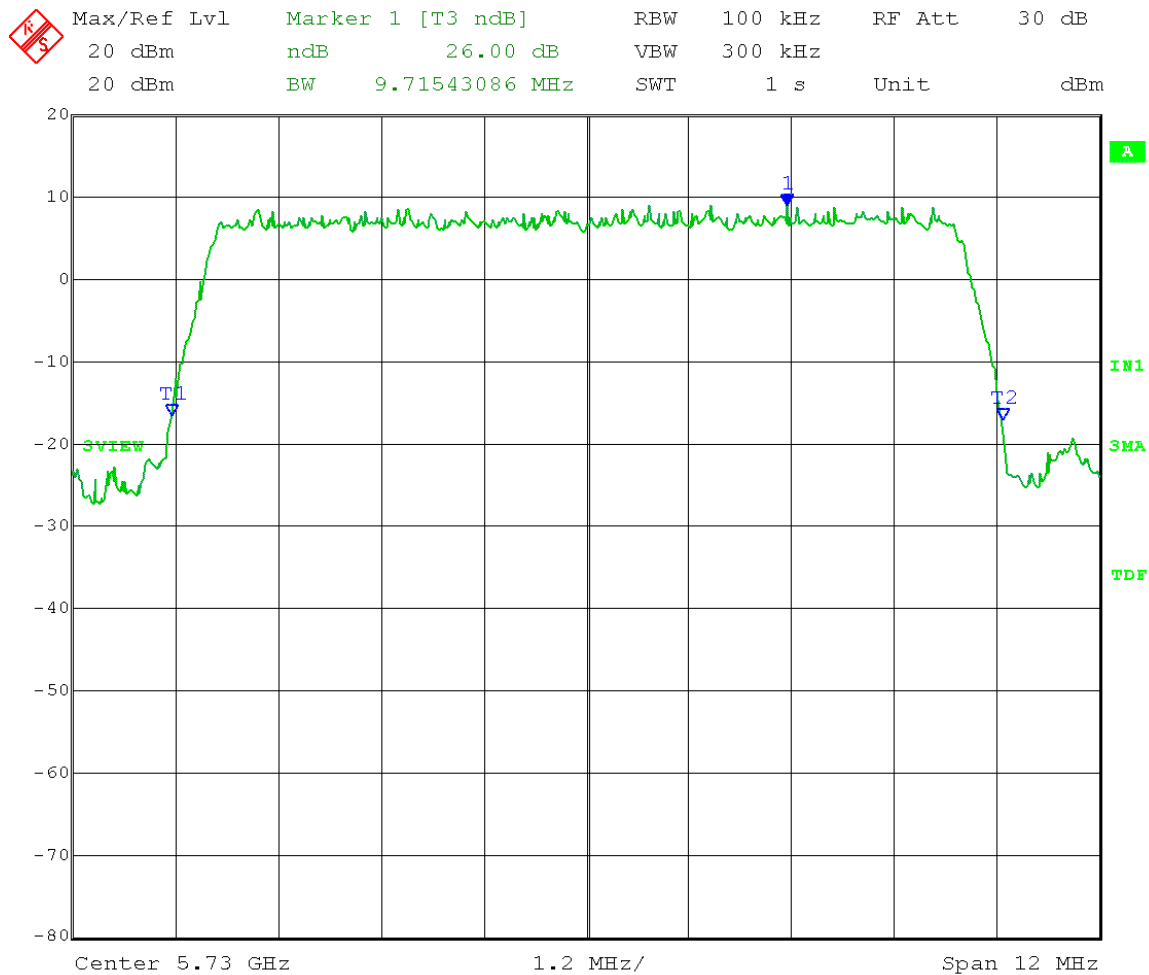


Date: 16.MAY.2012 09:49:21

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

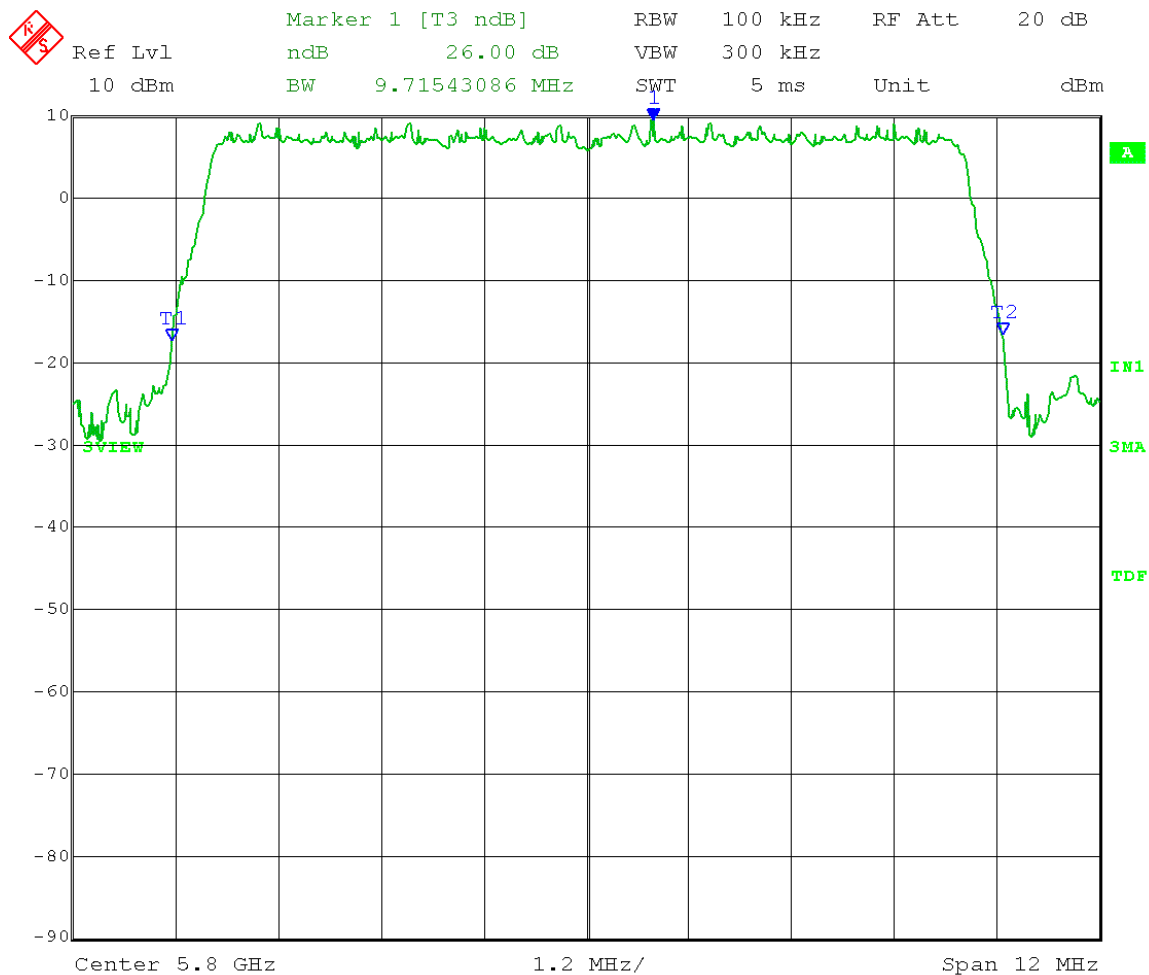


Date: 16.MAY.2012 12:50:47

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Emission Bandwidth – 26 dB bandwidth – conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.1.1
 Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
 Detector = Peak; Trace mode = max hold
 Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
 Output port: Channel A; Channel Frequency: 5.8 GHz
 Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

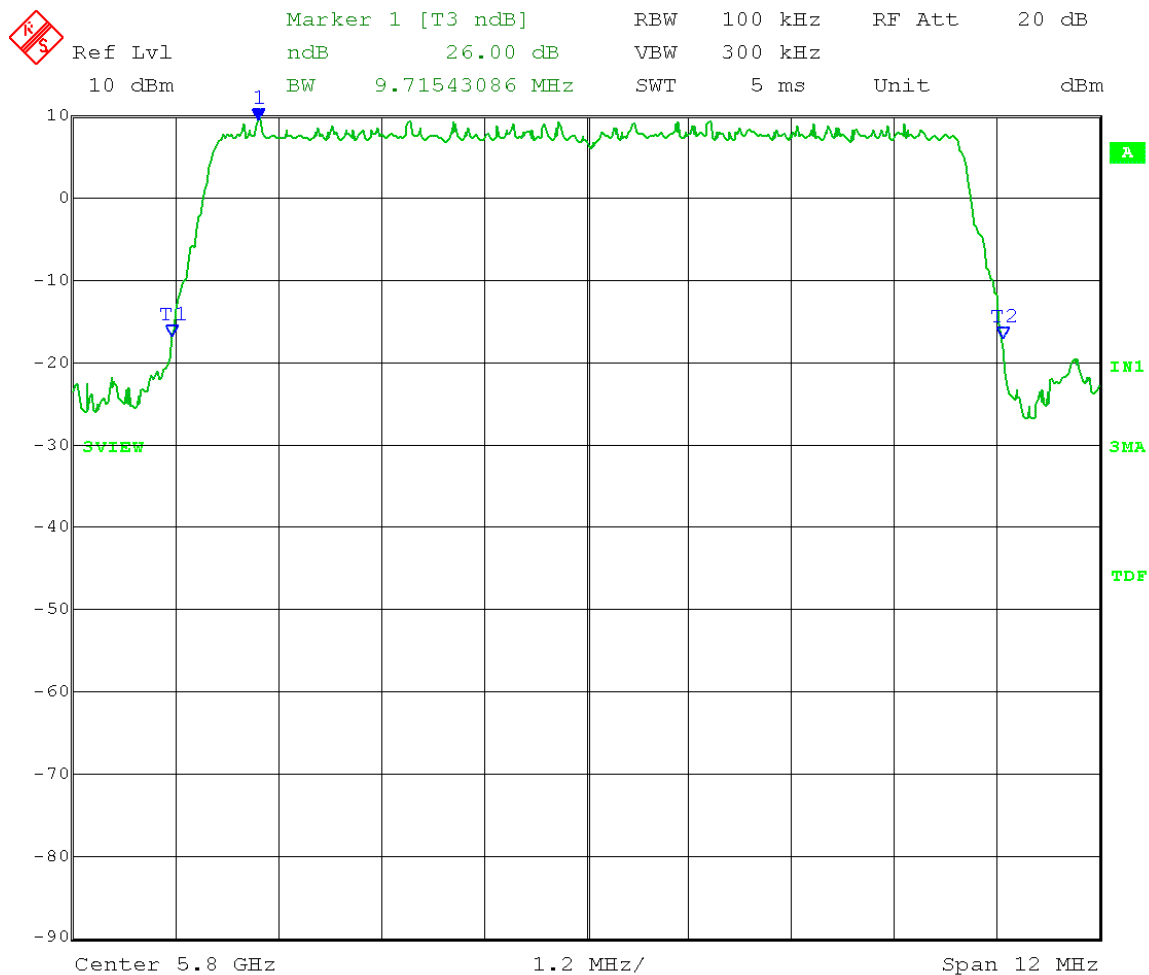


Date: 16.MAY.2012 15:36:27

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.72 MHz

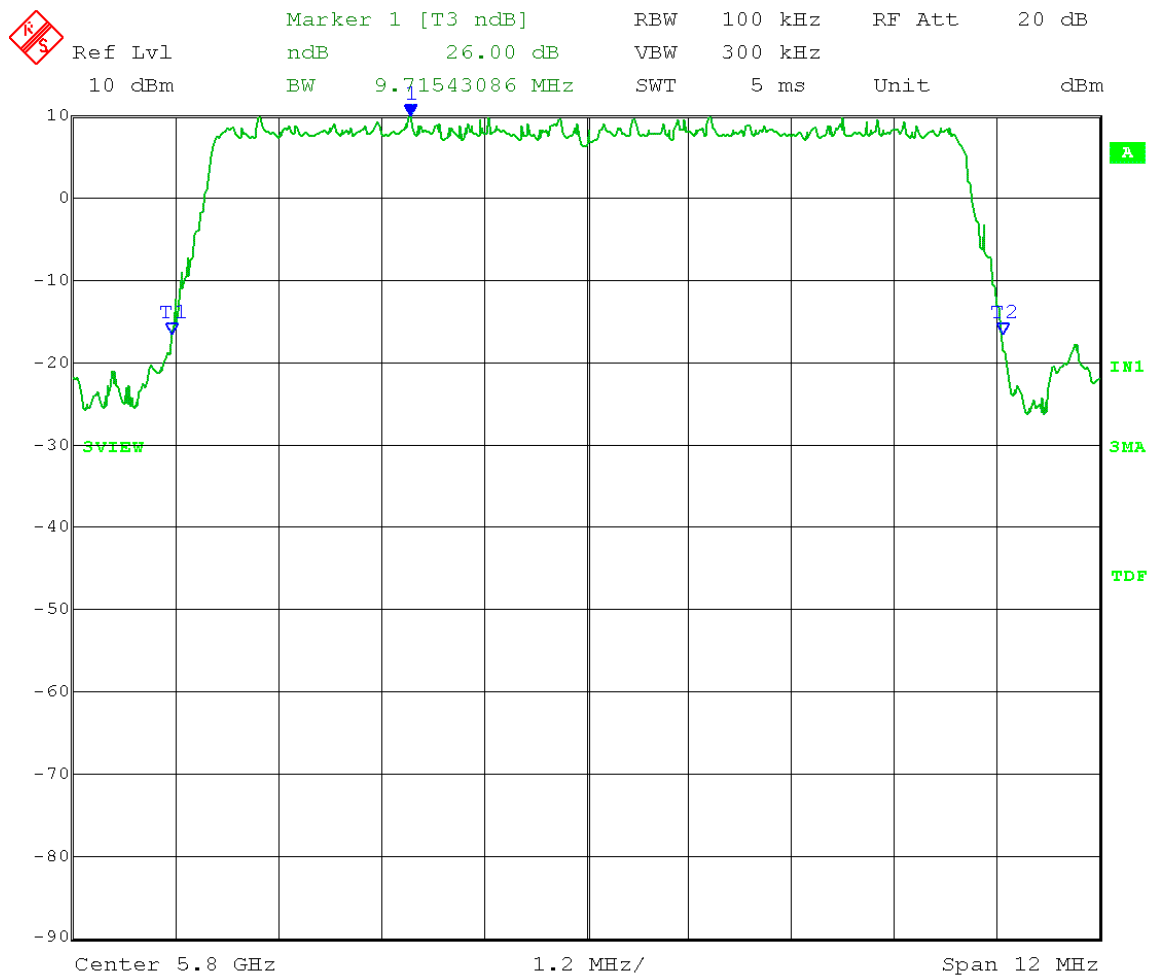


Date: 16.MAY.2012 09:01:18

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

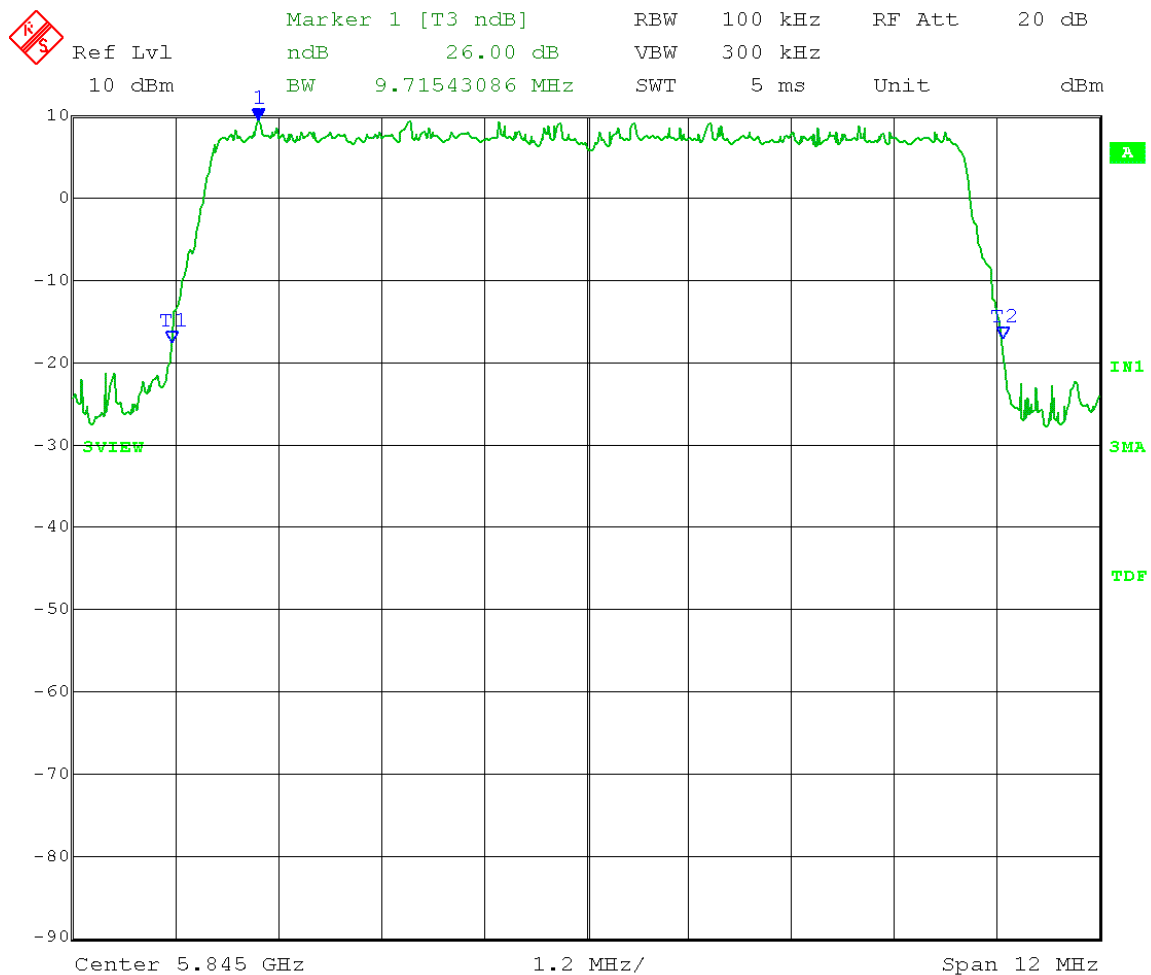


Date: 16.MAY.2012 14:04:41

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

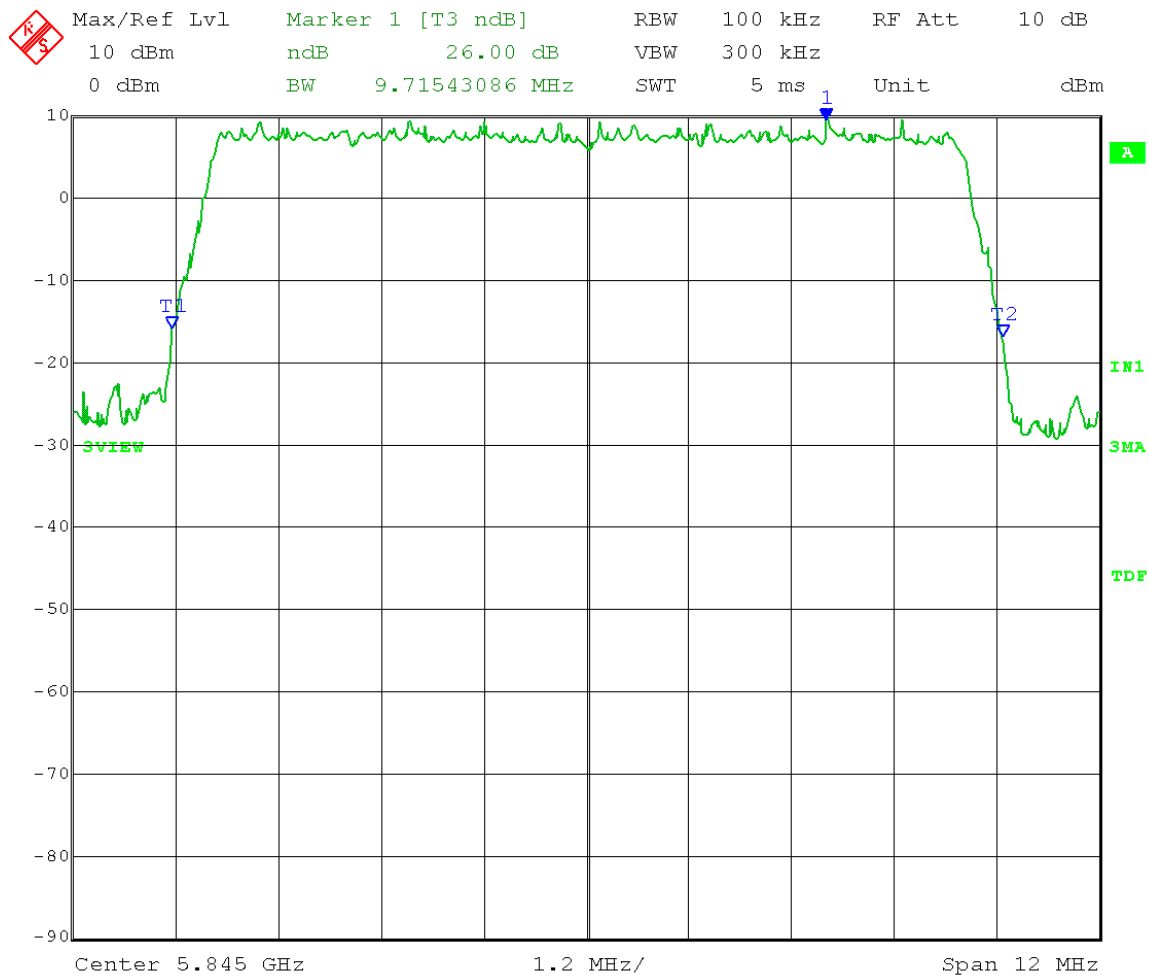


Date: 17.MAY.2012 09:21:13

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.72 MHz

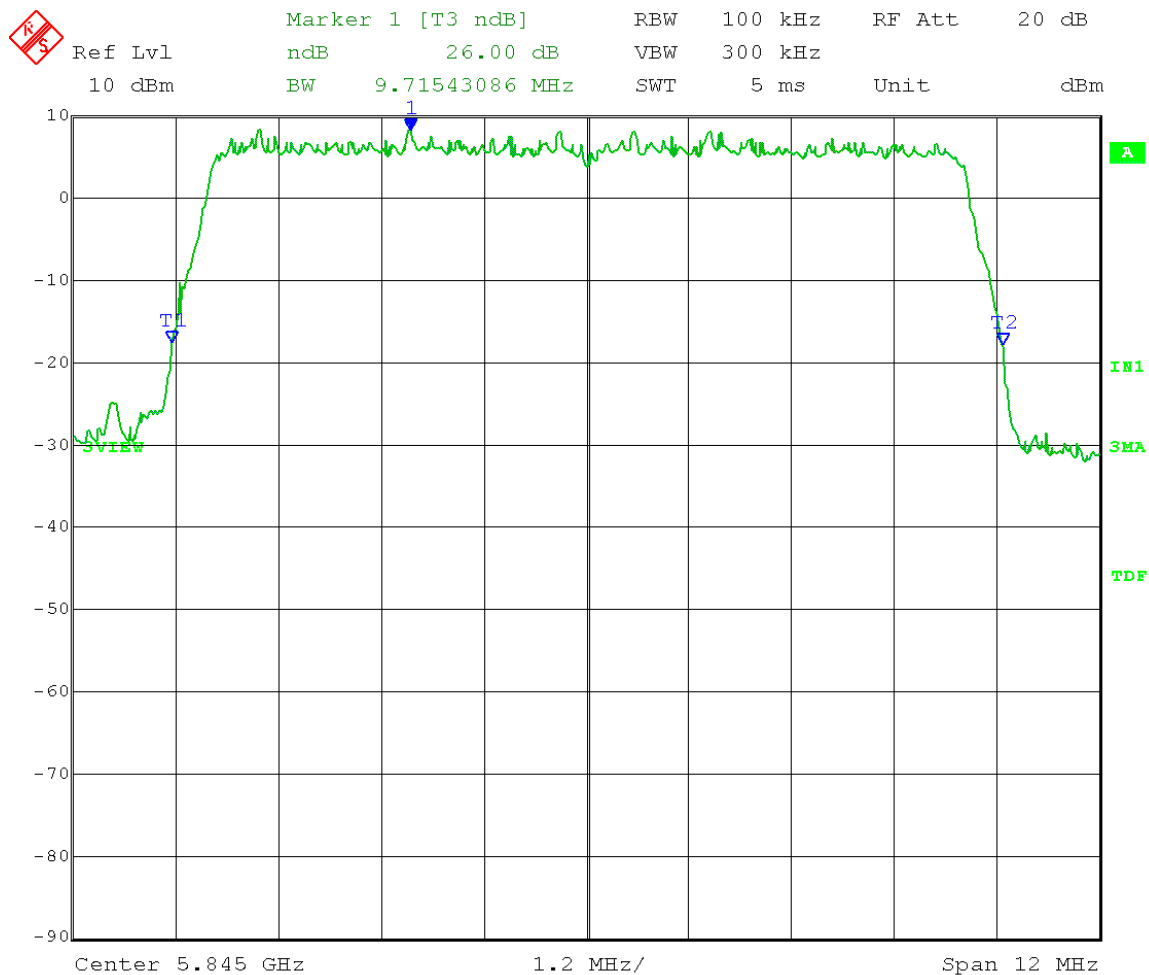


Date: 16.MAY.2012 11:22:23

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

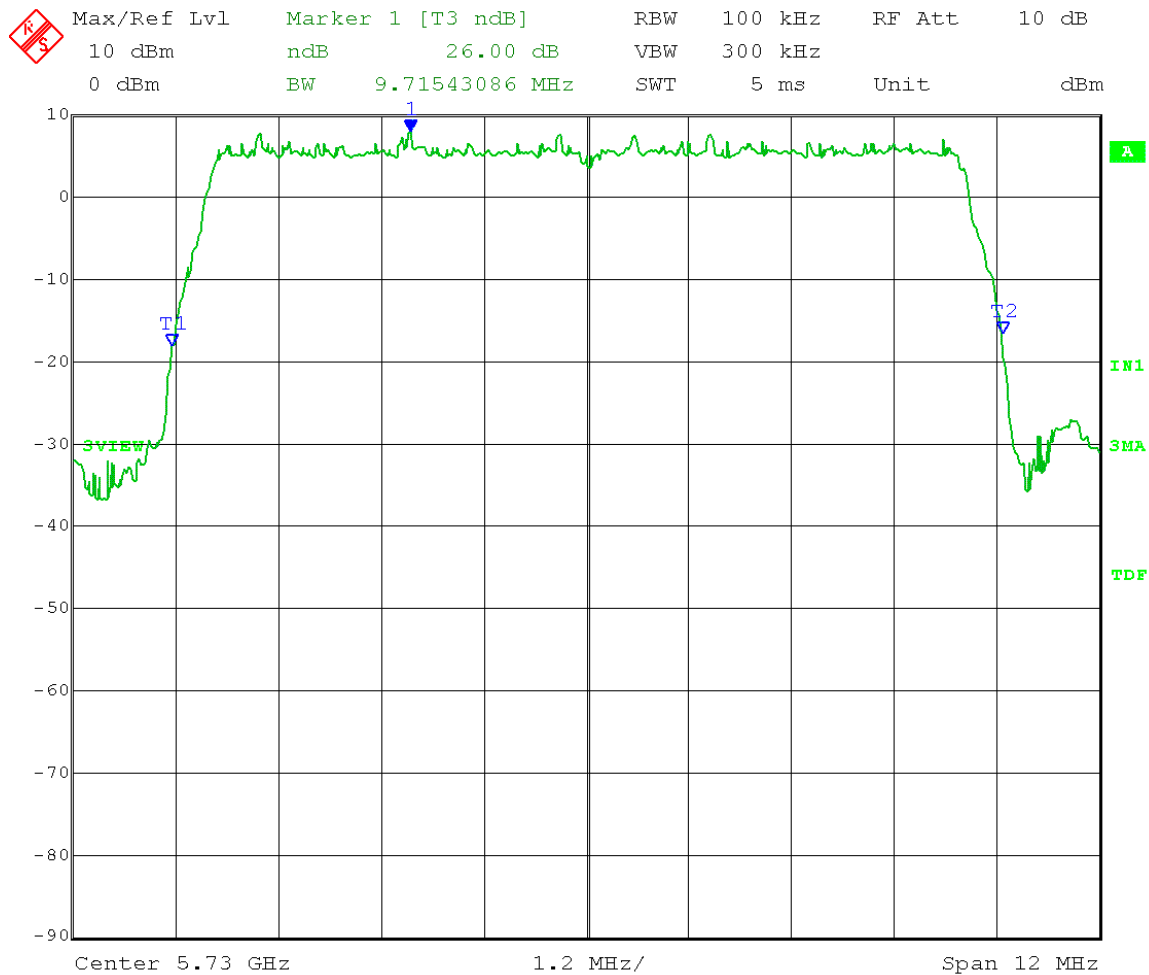


Date: 17.MAY.2012 11:04:36

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

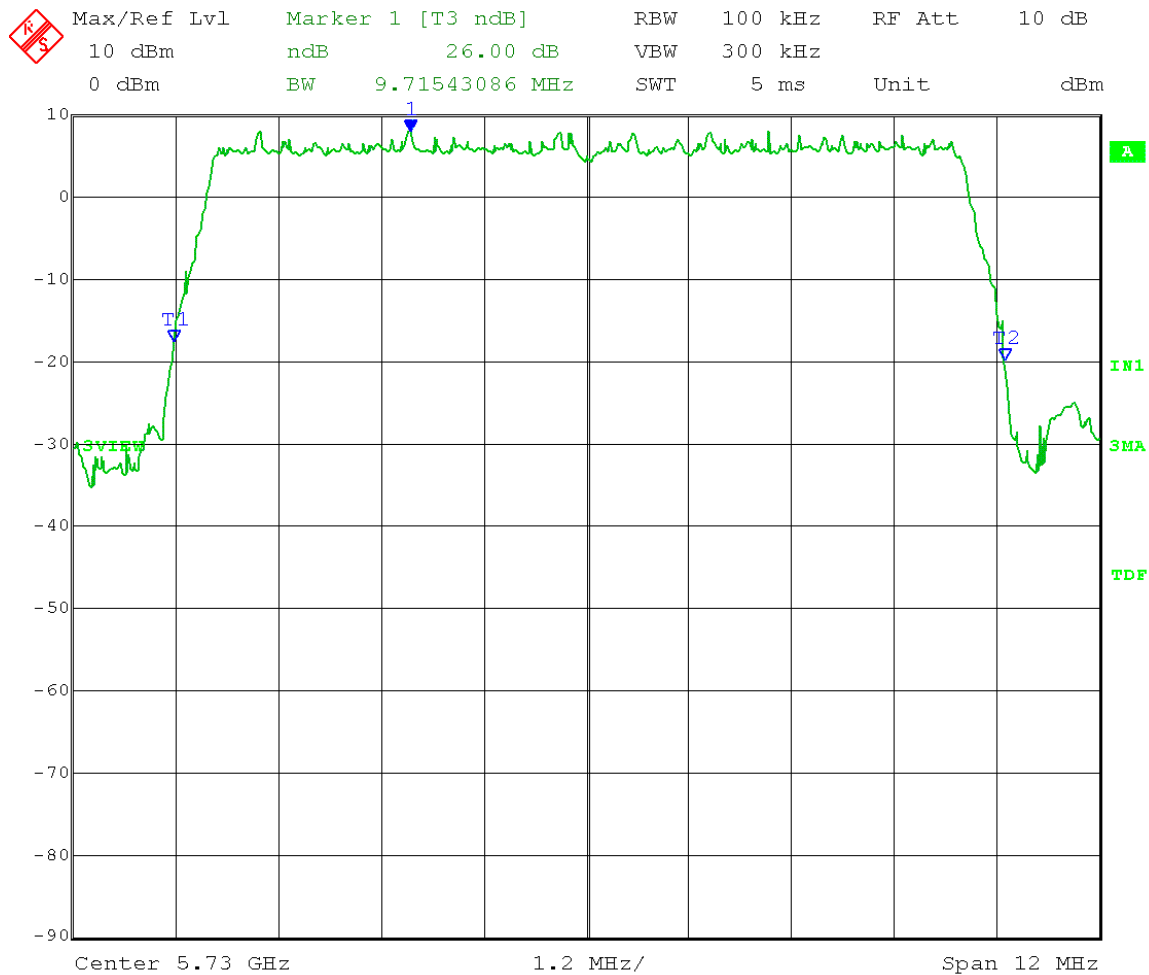


Date: 17.MAY.2012 13:43:26

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.72 MHz

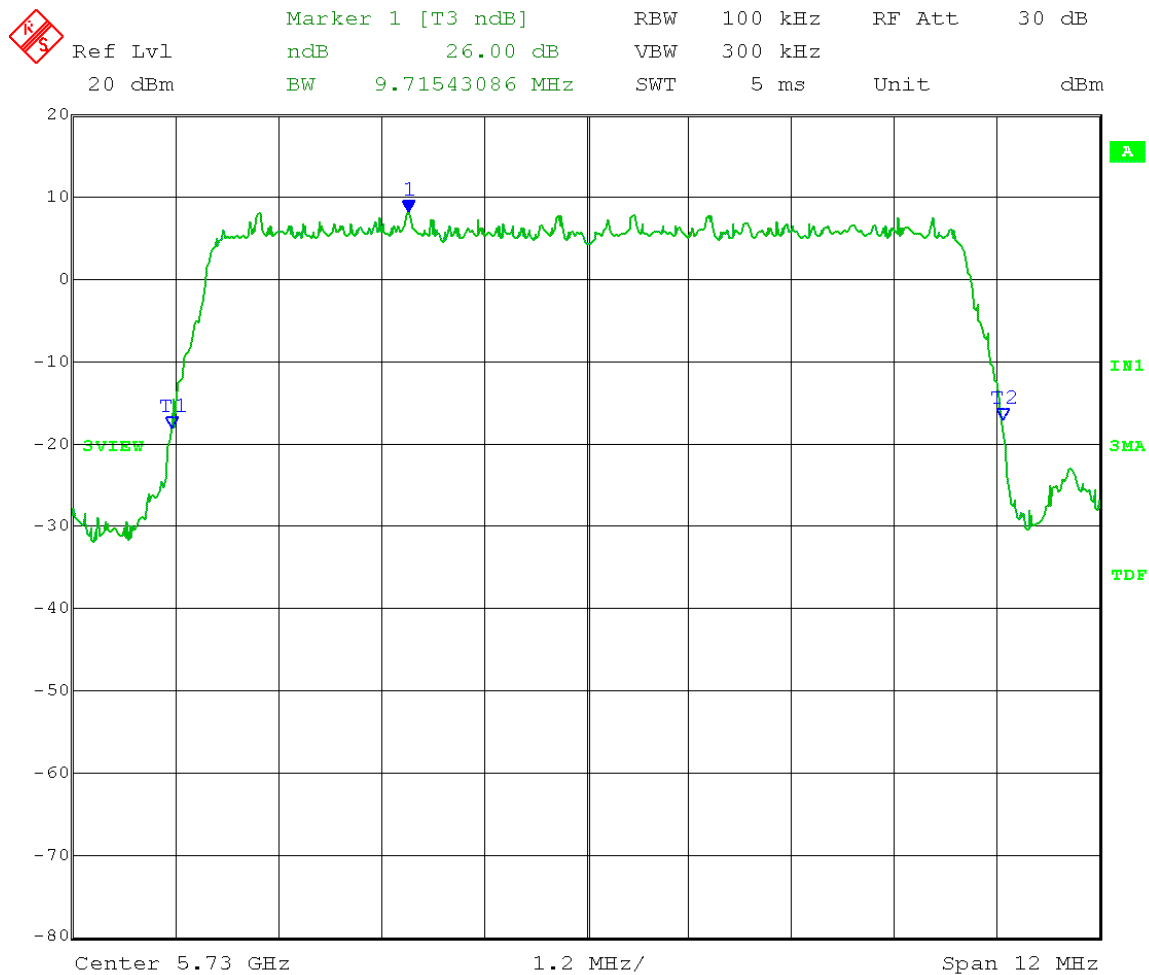


Date: 15.MAY.2012 14:13:35

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

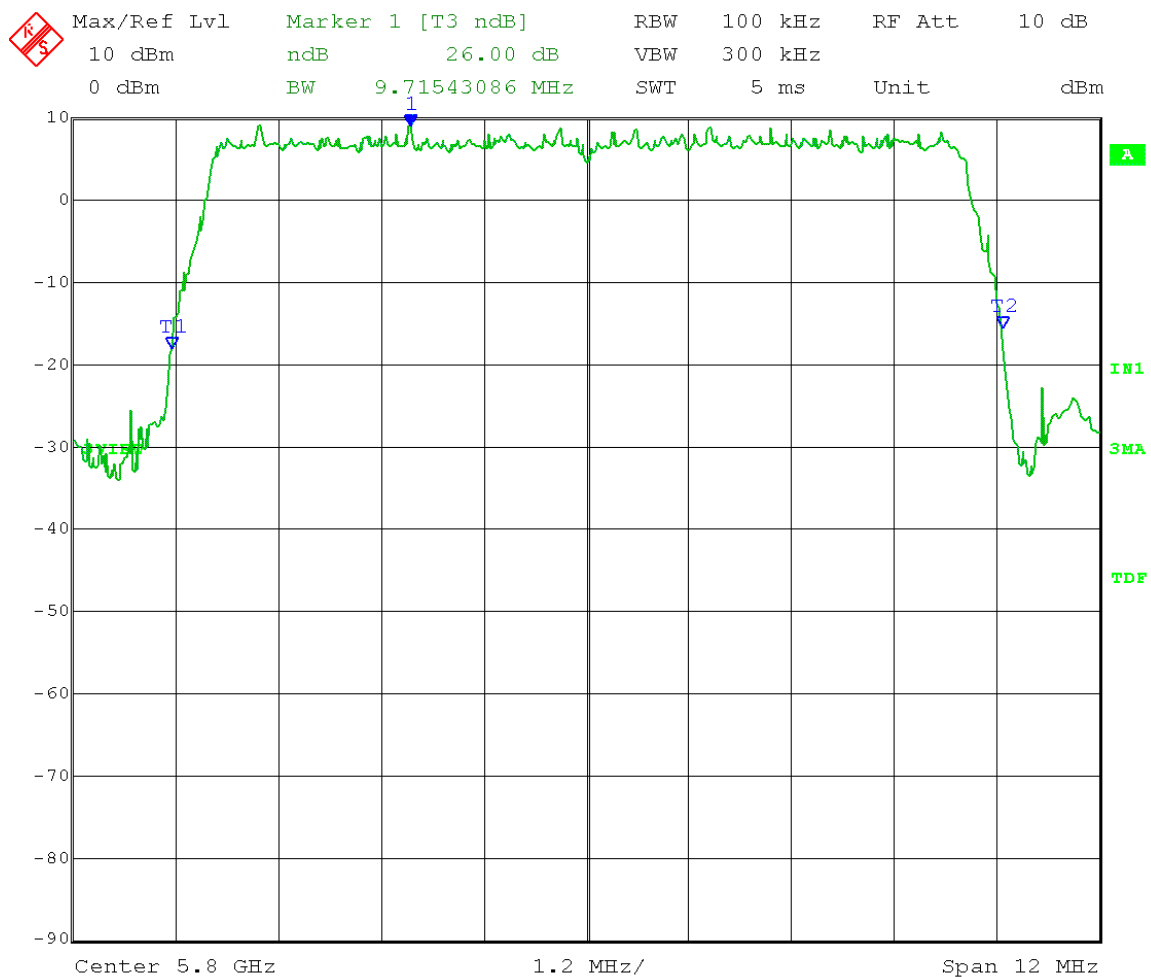


Date: 17.MAY.2012 10:08:08

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

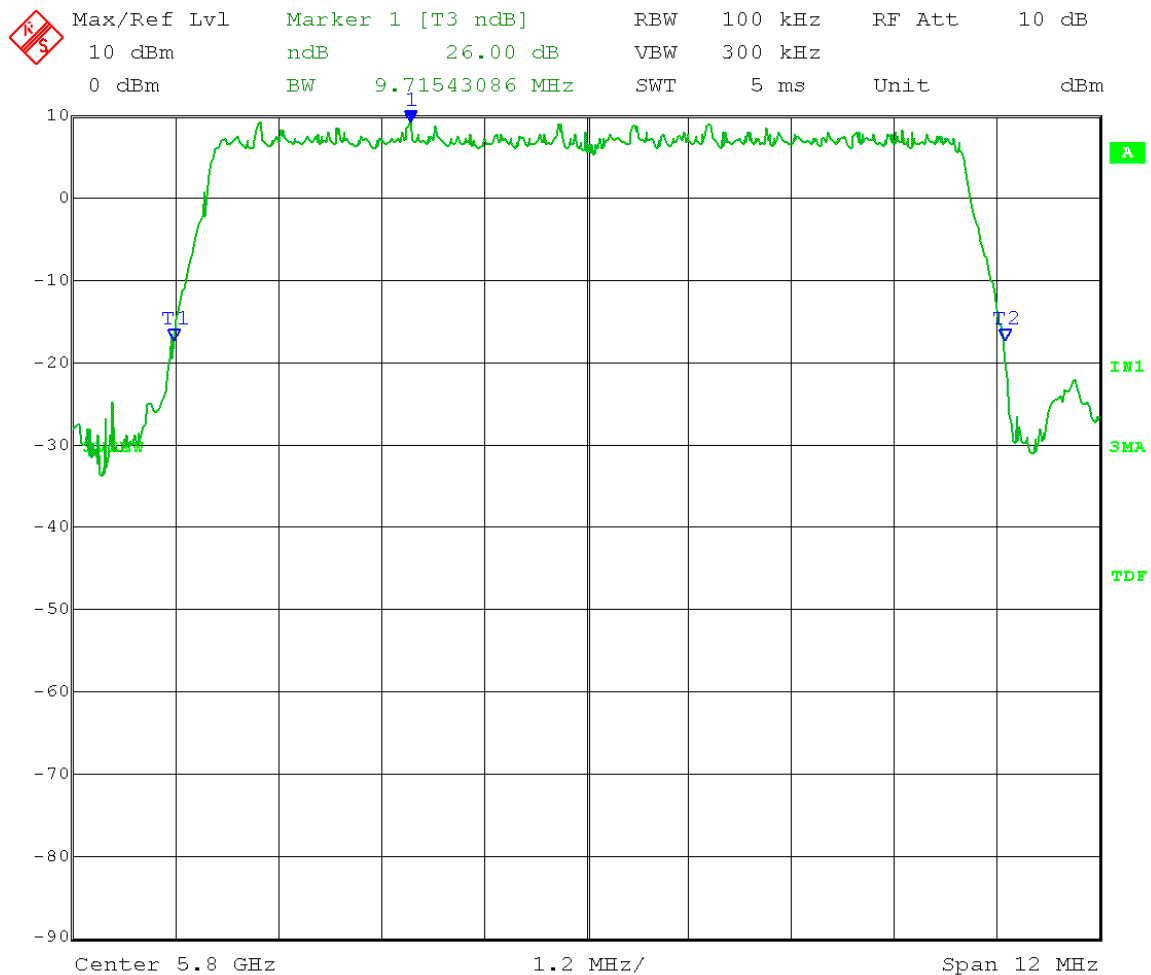


Date: 17.MAY.2012 13:11:35

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.74 MHz

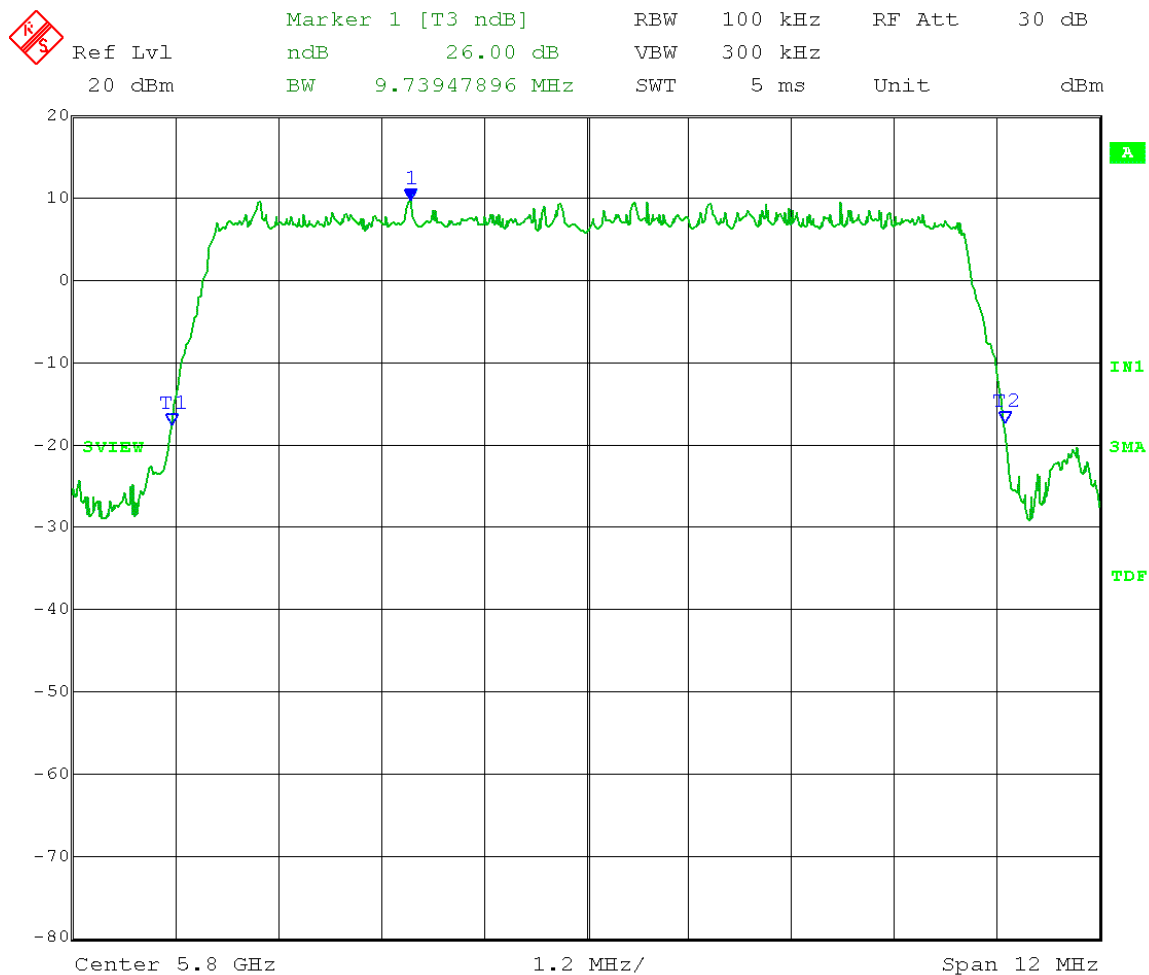


Date: 15.MAY.2012 11:07:48

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

26 dB Emission Bandwidth = 9.72 MHz

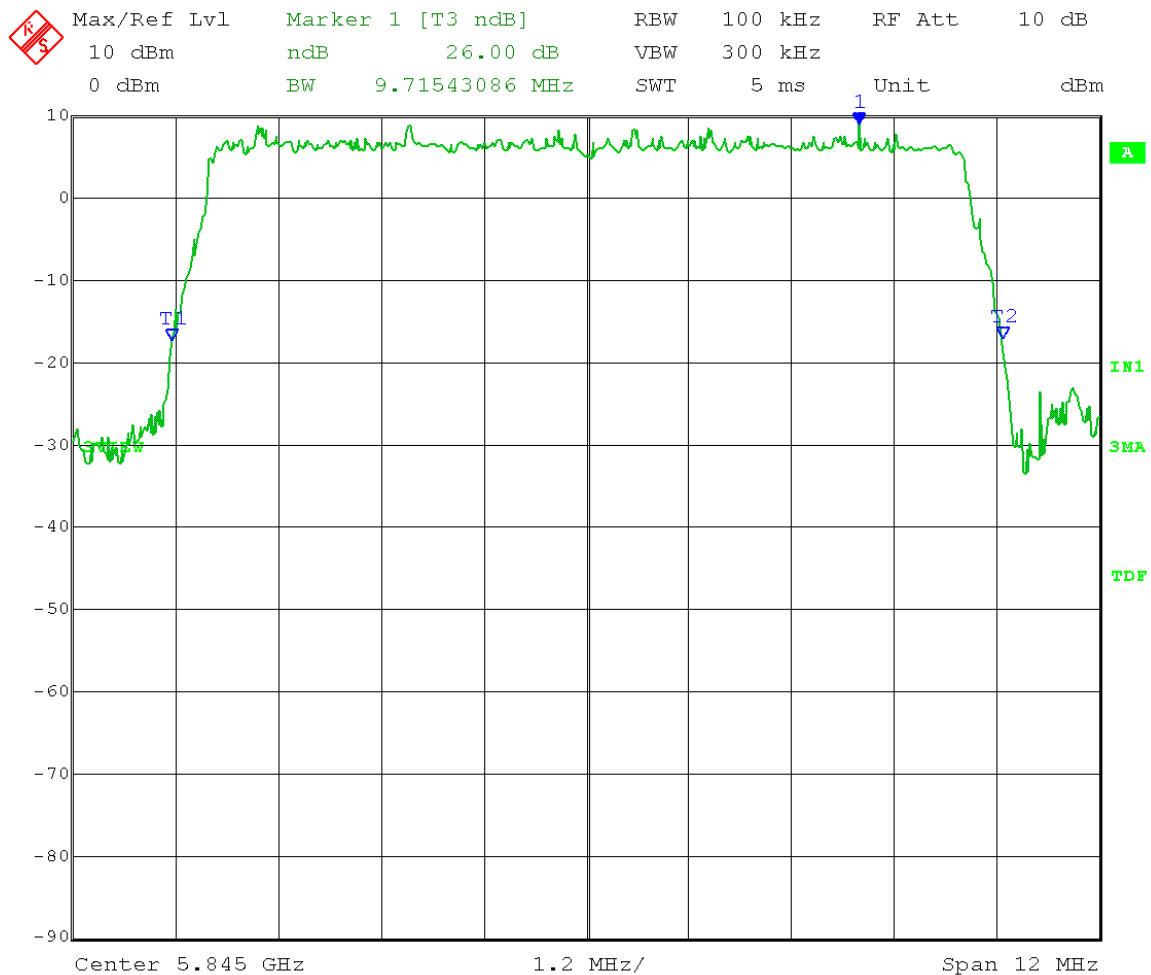


Date: 17.MAY.2012 11:34:16

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 26 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

26 dB Emission Bandwidth = 9.72 MHz

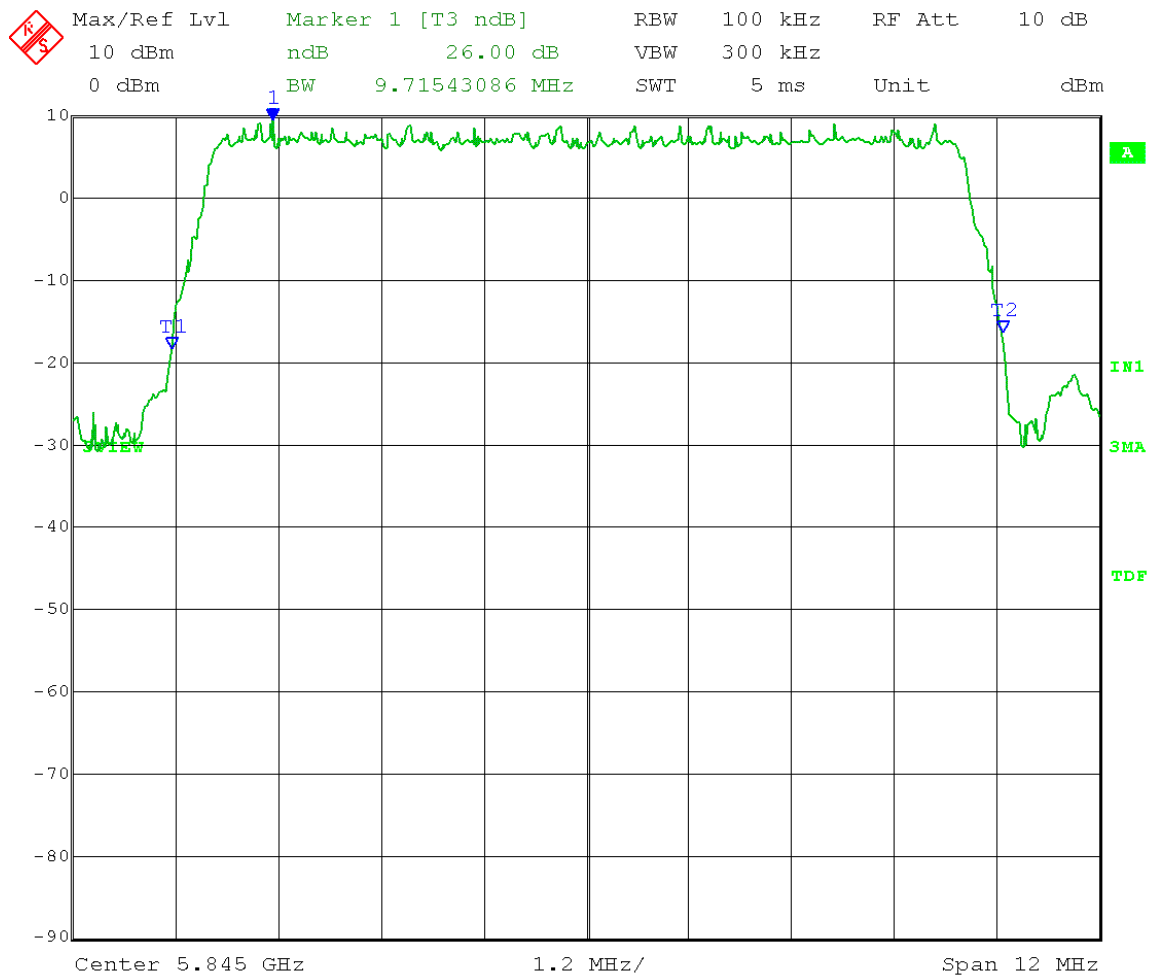


Date: 17.MAY.2012 14:09:15

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Emission Bandwidth – 26 dB bandwidth – conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.1.1
 Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
 Detector = Peak; Trace mode = max hold
 Sweep = auto couple

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: QPSK

26 dB Emission Bandwidth = 9.72 MHz

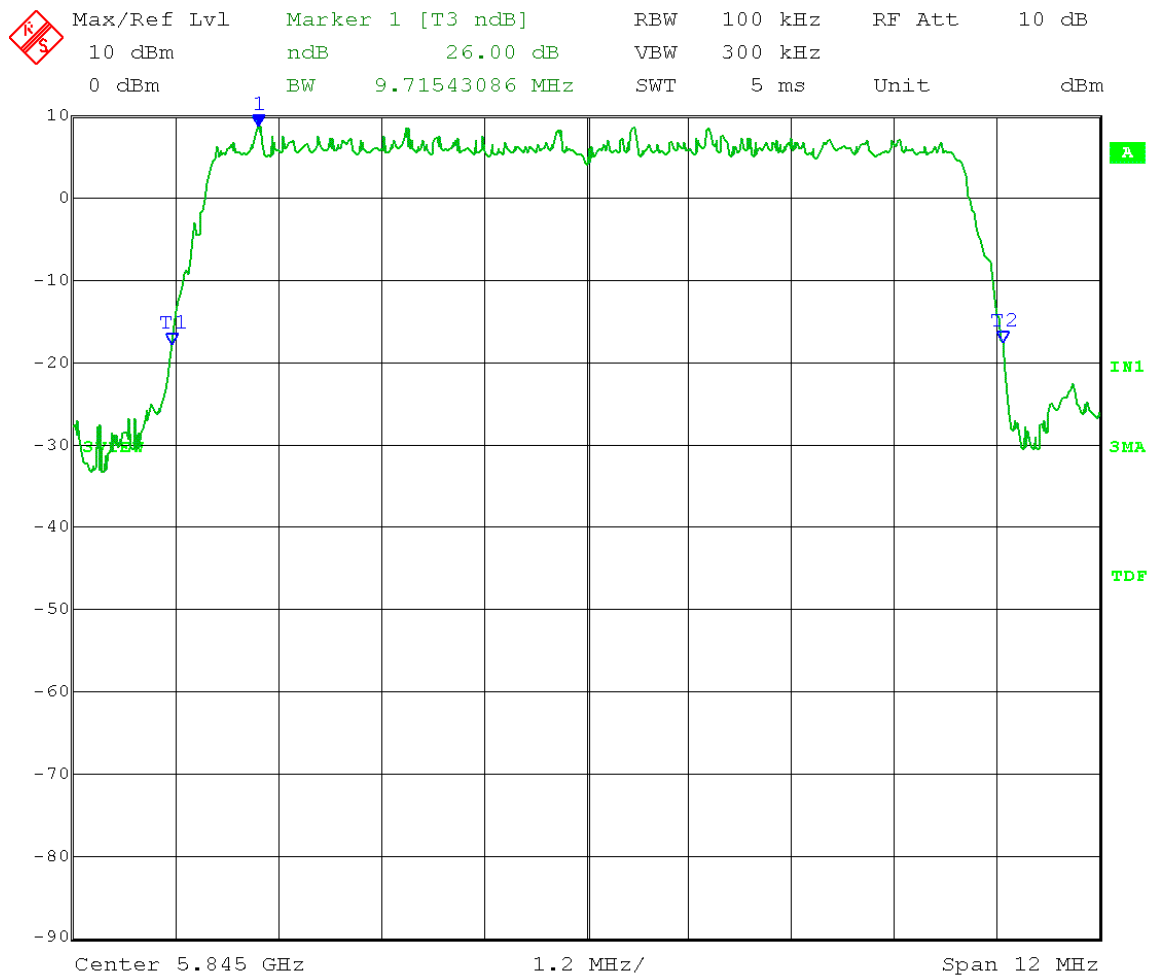

Date: 15.MAY.2012 15:12:28



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A2.0 Emission Bandwidth – 6 dB bandwidth - Conducted

Rule Section: Section 15.247(a)(2)
RSS-210 A8.2(a)

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.1.1

Description: RBW = 1-5% of EBW
VBW $\geq 3 \times$ RBW
Detector = Peak
Trace mode = max hold
Sweep = auto couple

Measure the maximum width of the emission between the lower and upper frequencies that measure 6 dB below the maximum level of the in-band emission.

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Limit: 6 dB bandwidth shall be at least 500 kHz


Results: Passed

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.87 MHz

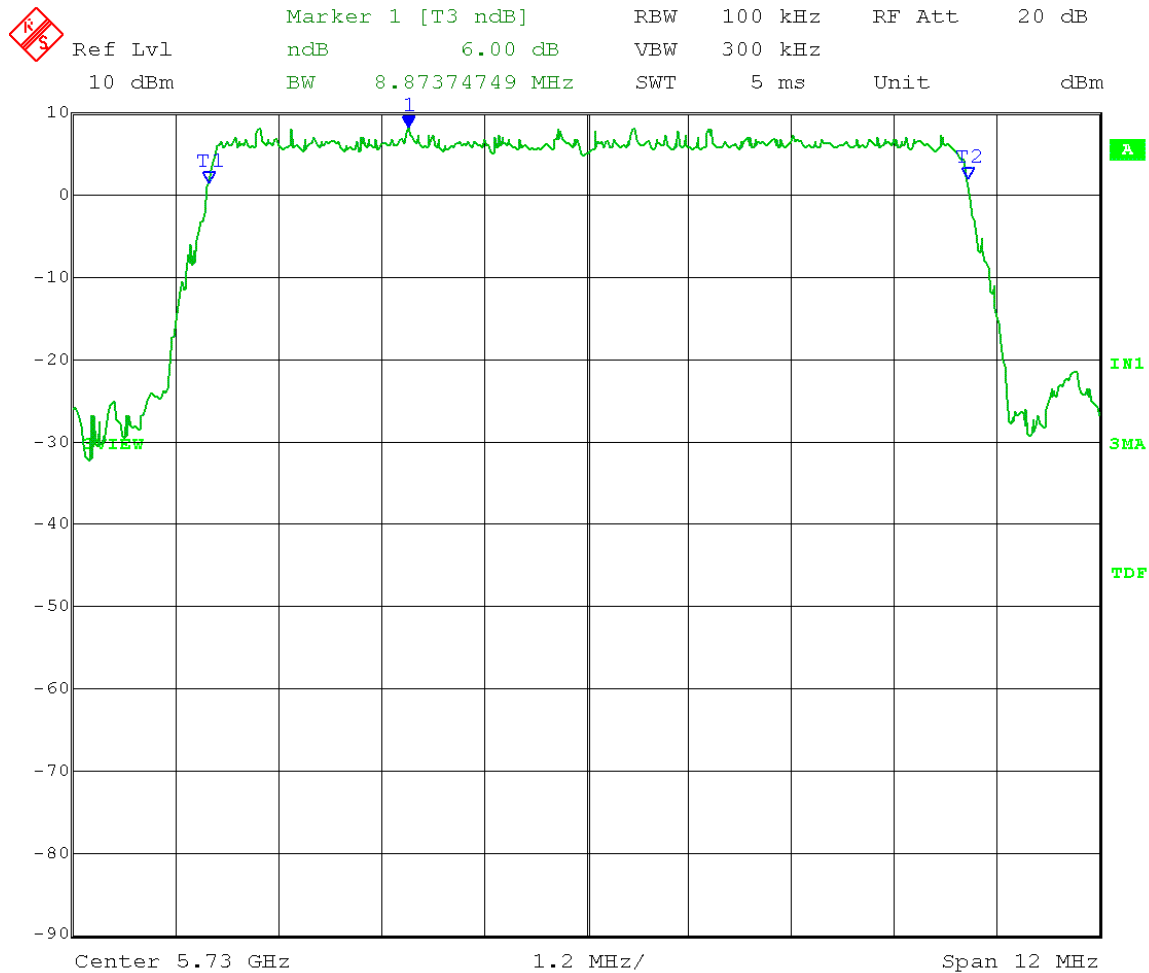


Date: 16.MAY.2012 13:33:16

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.87 MHz

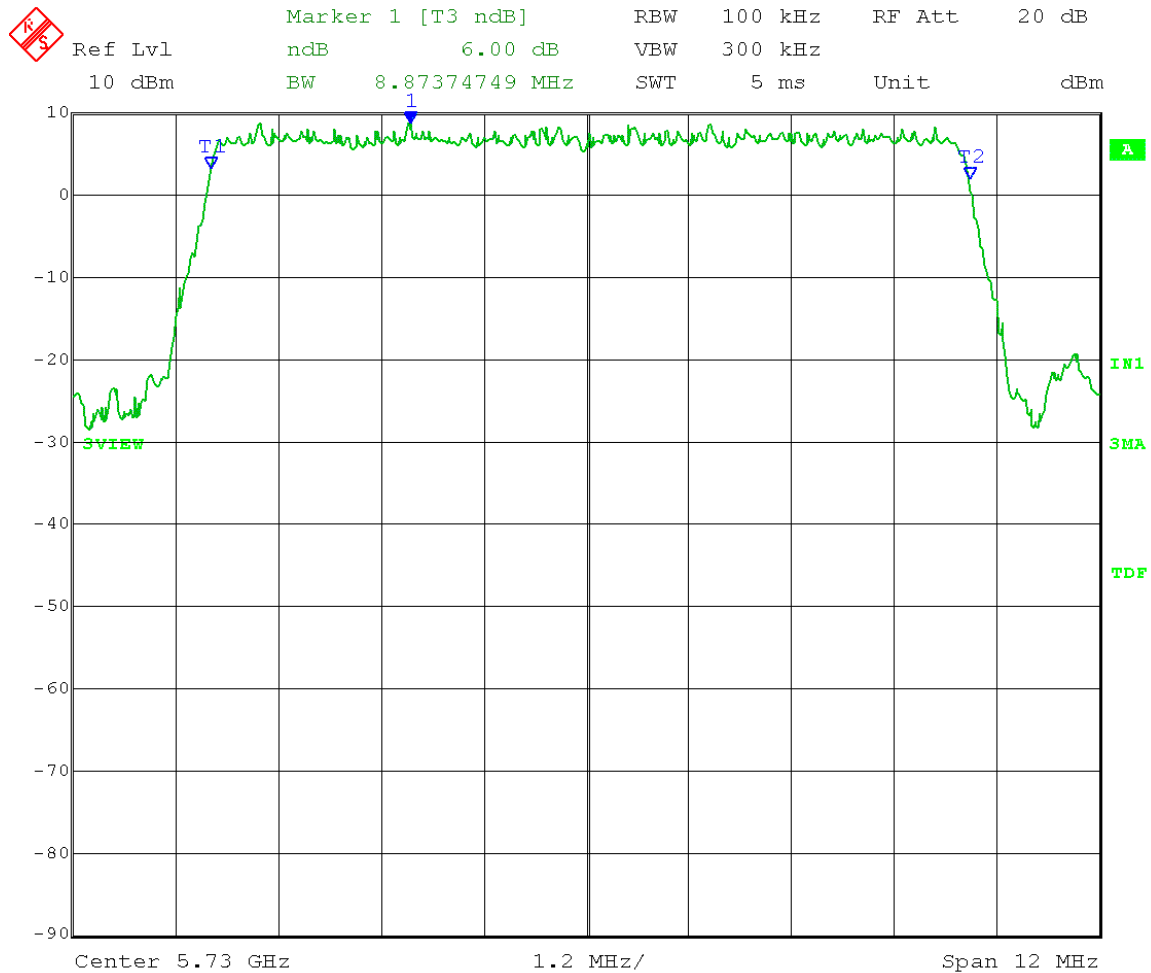


Date: 17.MAY.2012 08:24:09

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 731D
Output port: Channel A; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

6 dB Bandwidth = 8.87 MHz

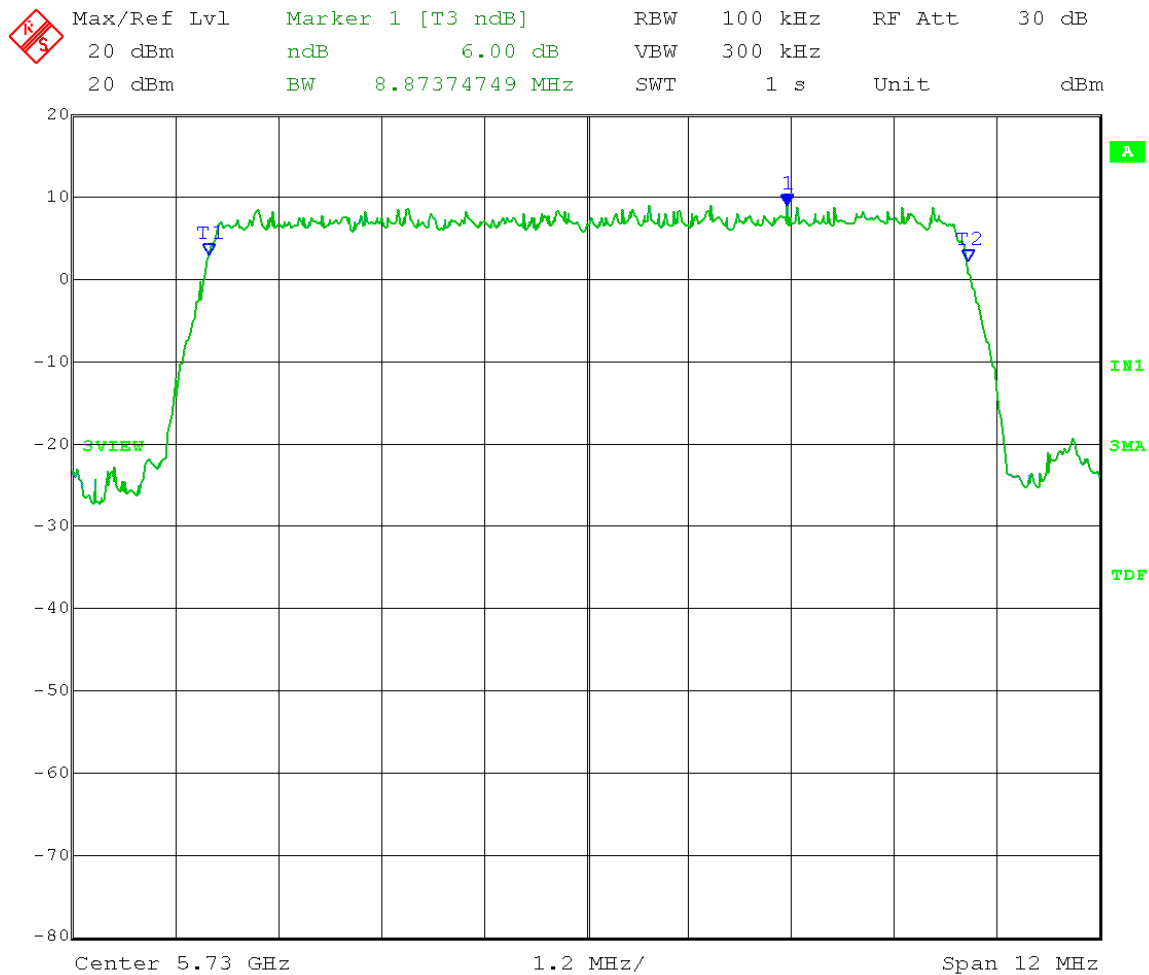


Date: 16.MAY.2012 09:50:43

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.87 MHz

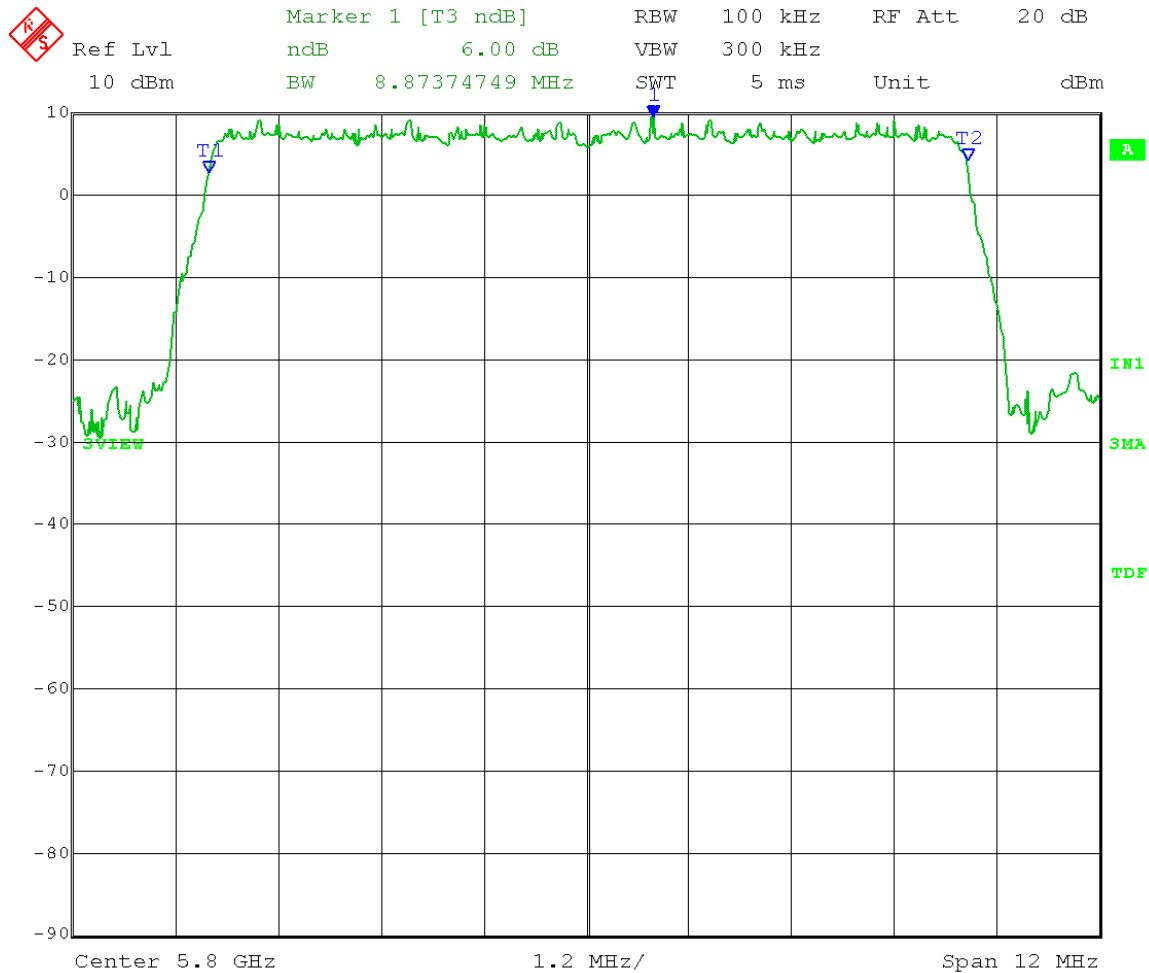


Date: 16.MAY.2012 12:52:09

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.87 MHz

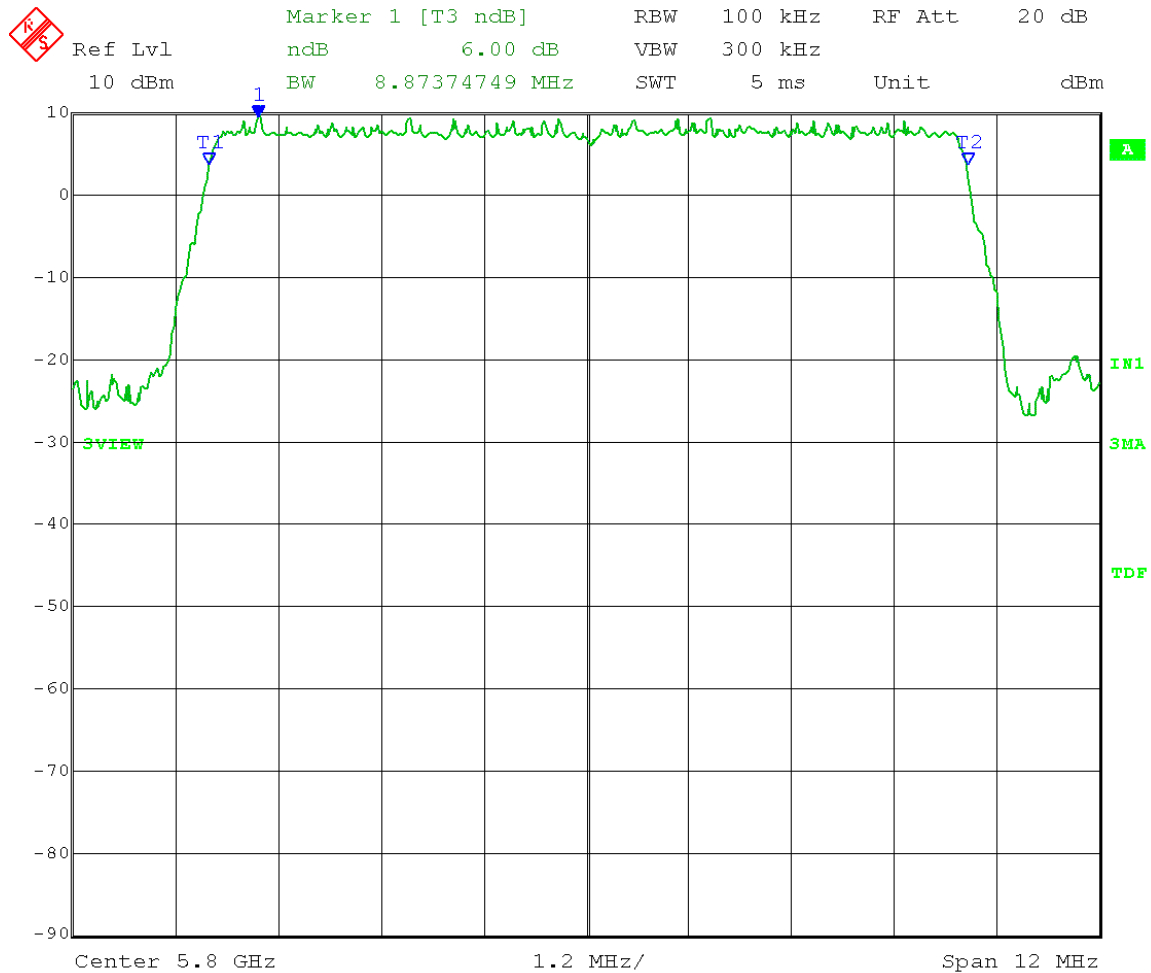


Date: 16.MAY.2012 15:37:56

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: QPSK

6 dB Bandwidth = 8.87 MHz

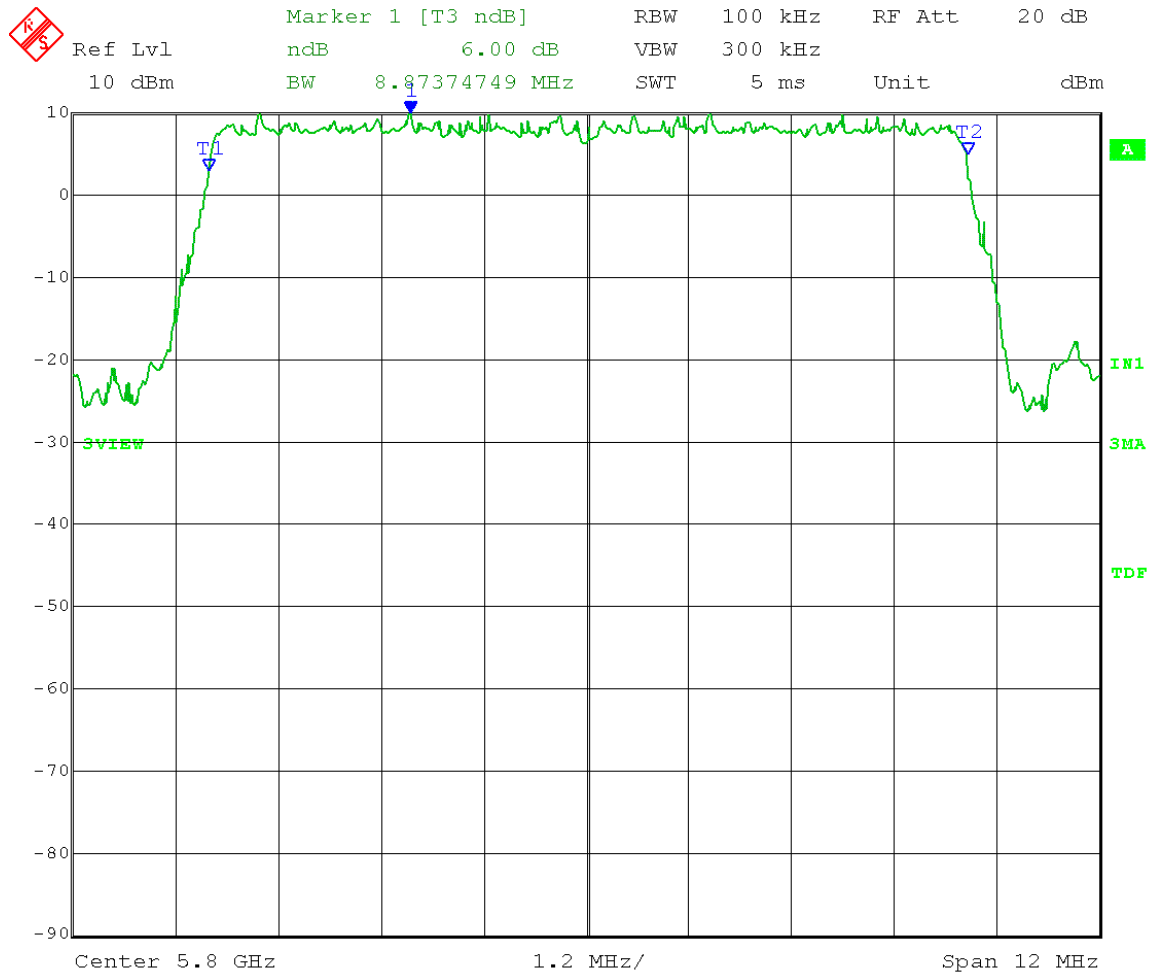


Date: 16.MAY.2012 09:02:50

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.87 MHz

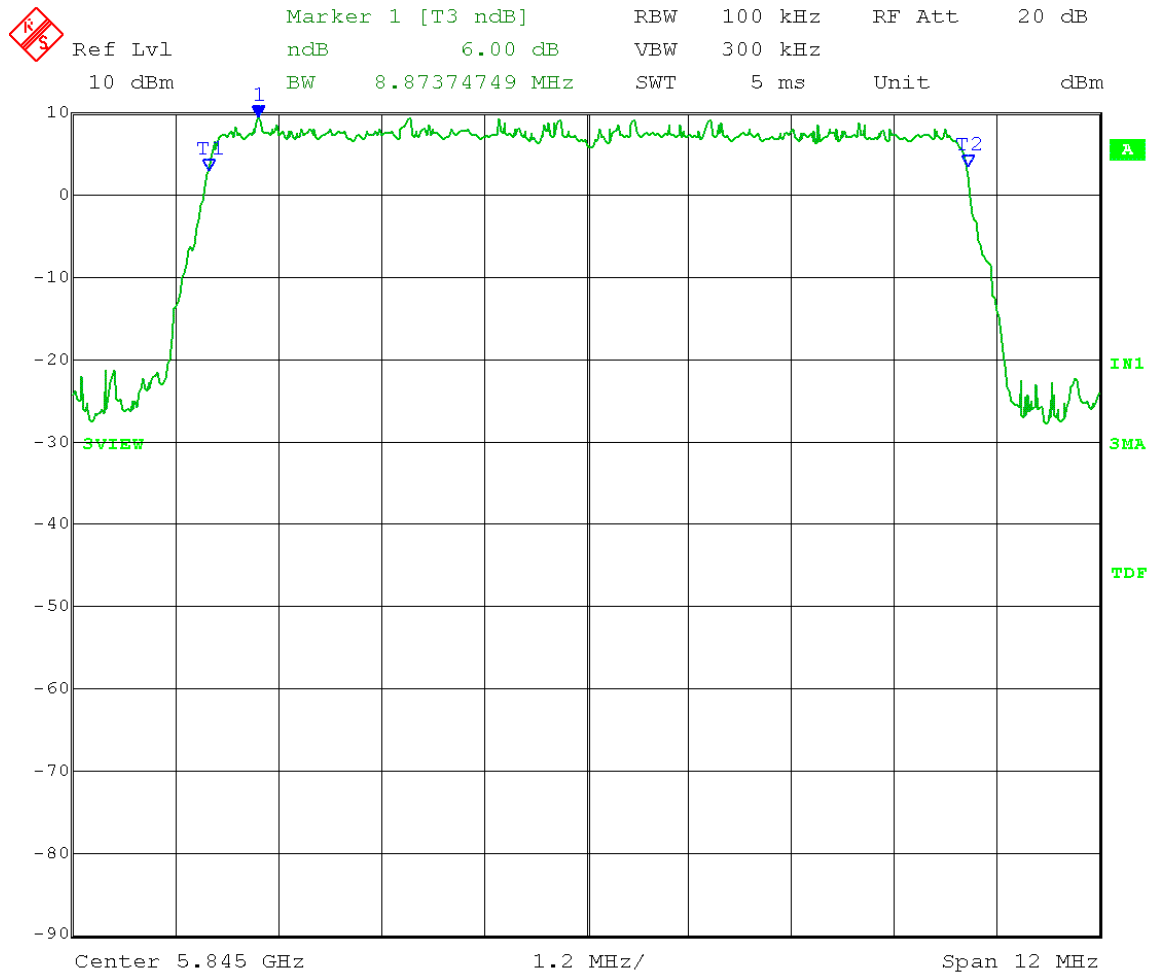


Date: 16.MAY.2012 14:06:40

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.85 MHz

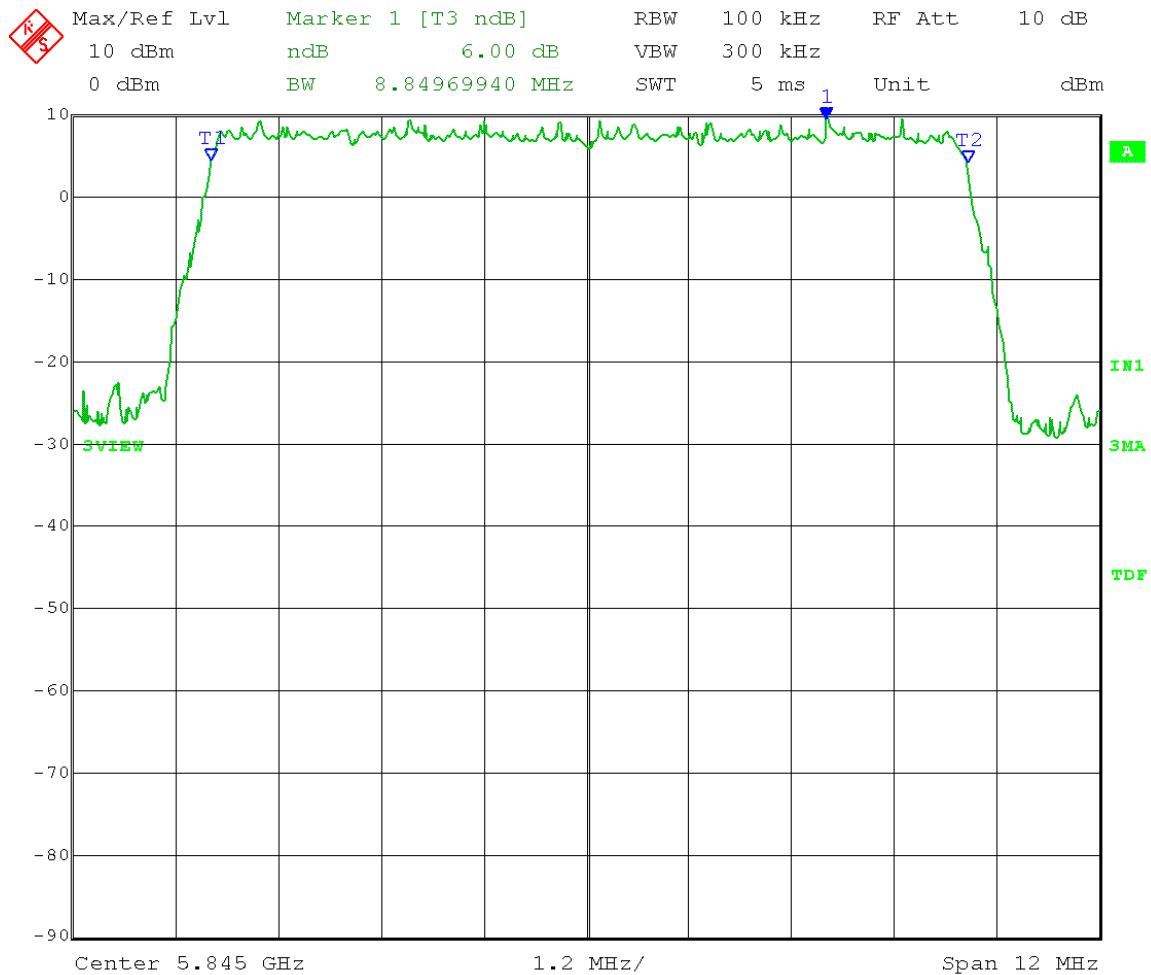


Date: 17.MAY.2012 09:22:24

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

6 dB Bandwidth = 8.87 MHz

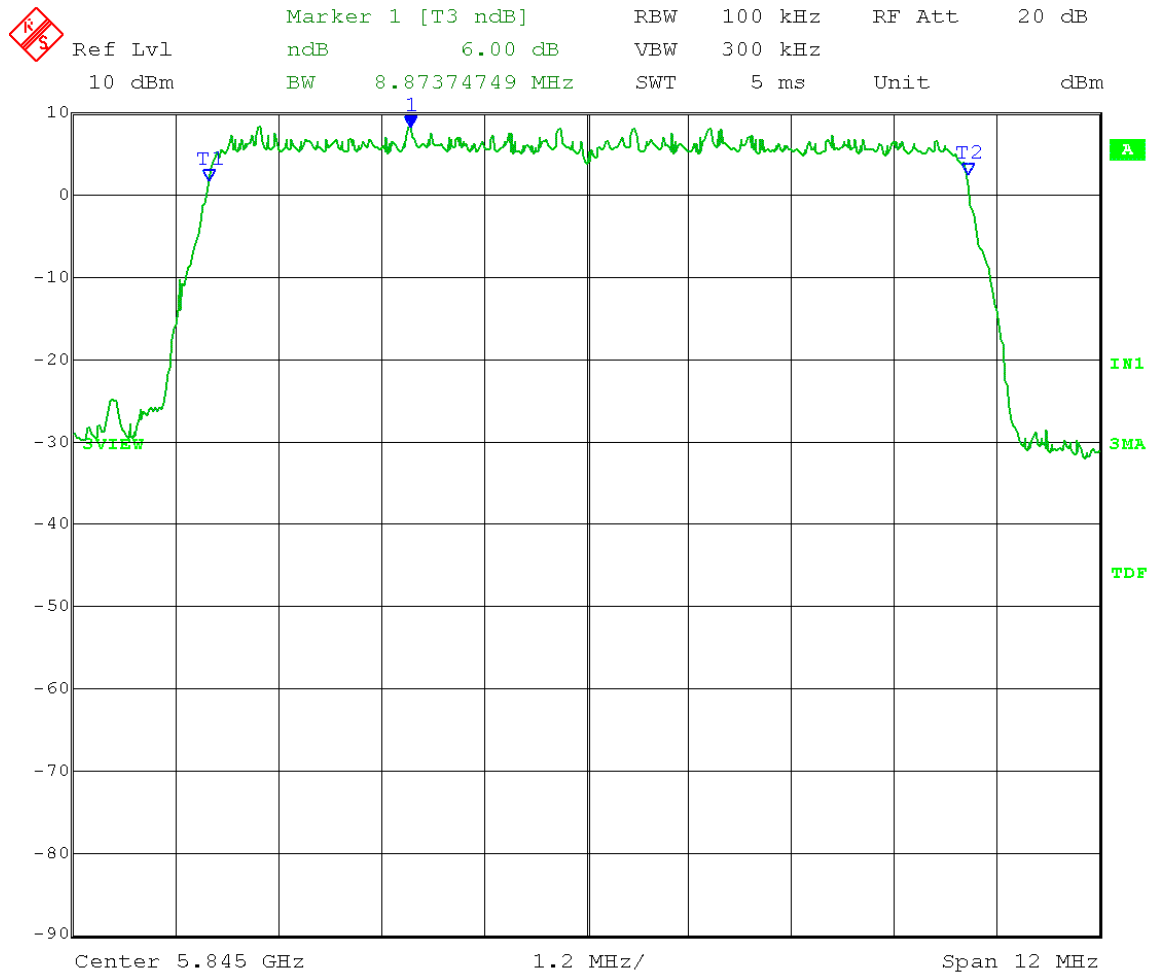


Date: 16.MAY.2012 11:23:39

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.85 MHz

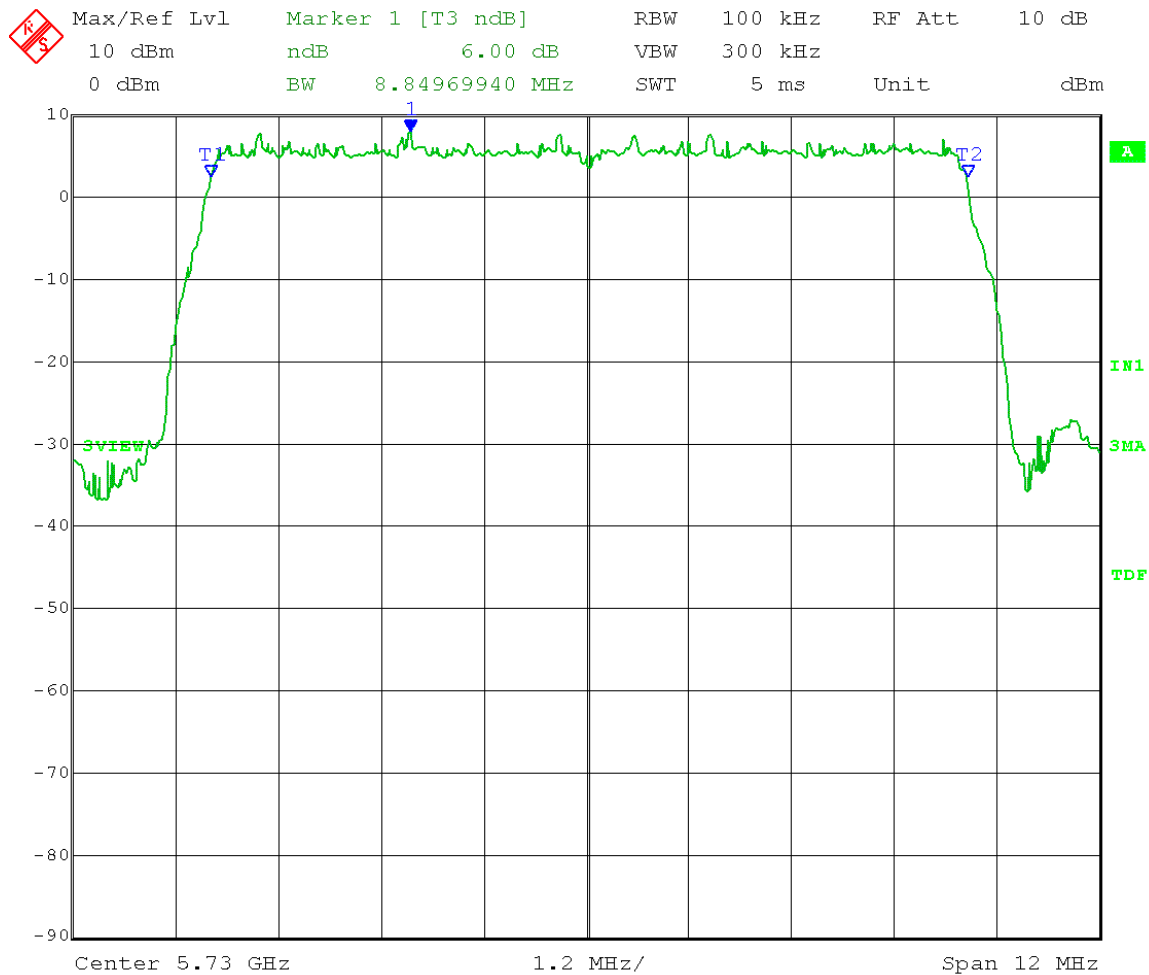


Date: 17.MAY.2012 11:07:18

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.85 MHz

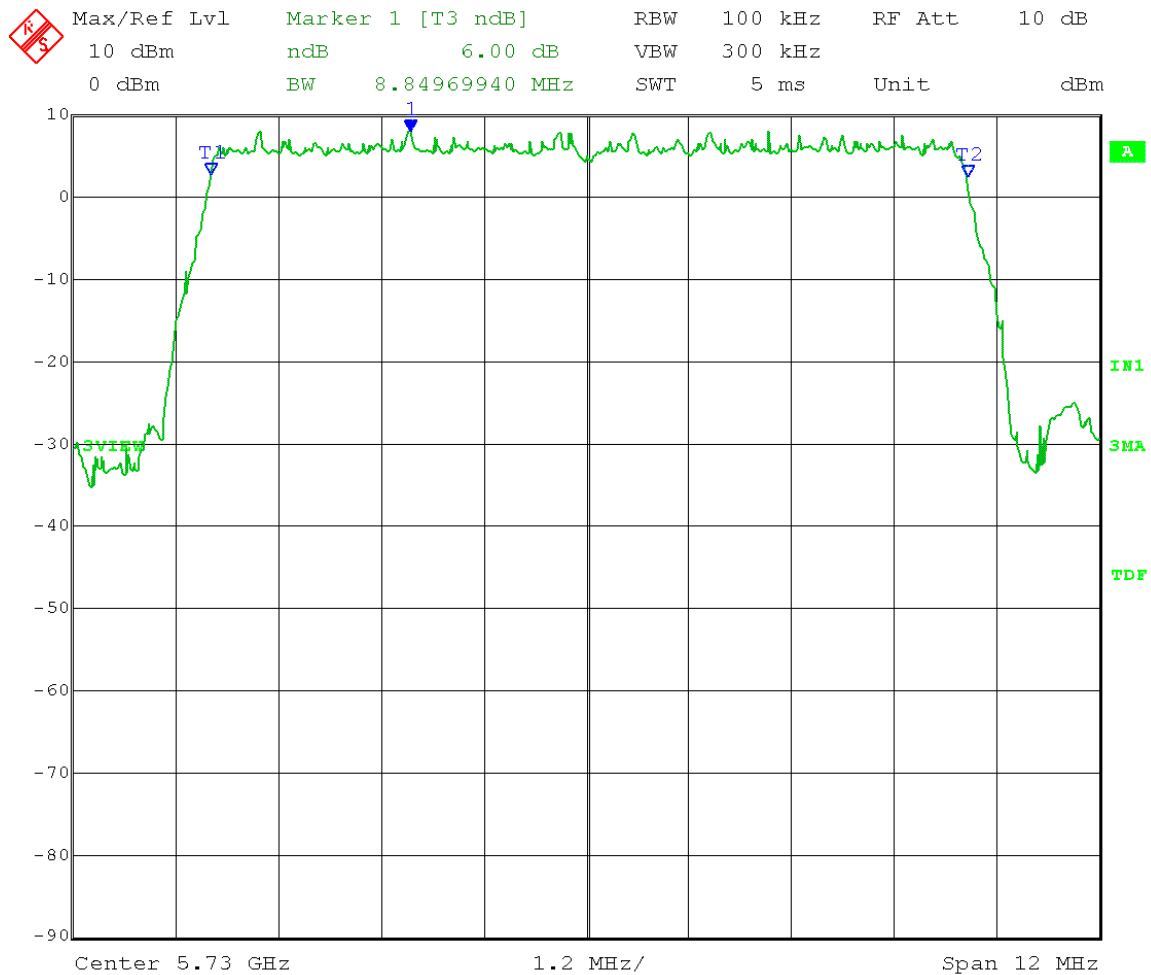


Date: 17.MAY.2012 13:44:40

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

6 dB Bandwidth = 8.87 MHz

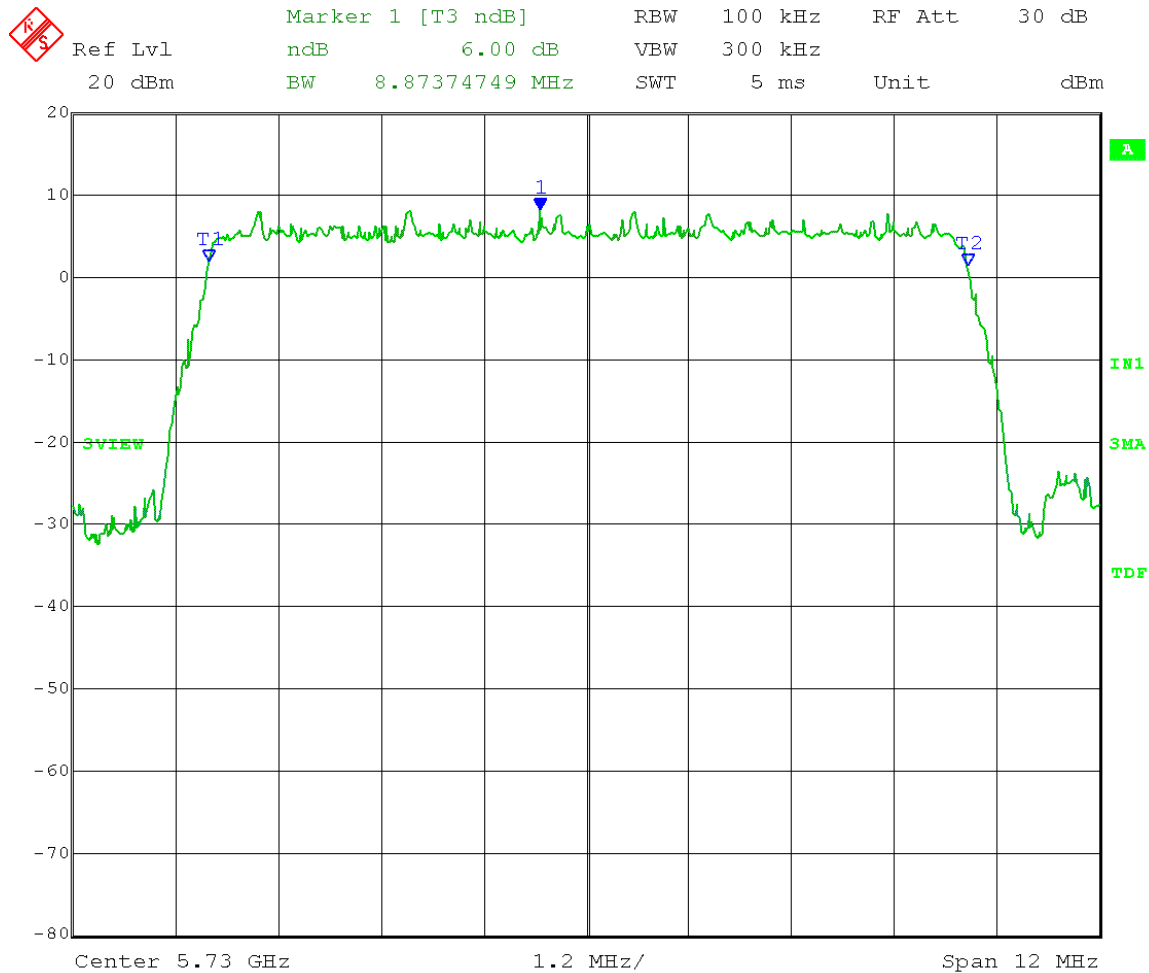


Date: 15.MAY.2012 14:15:42

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.85 MHz

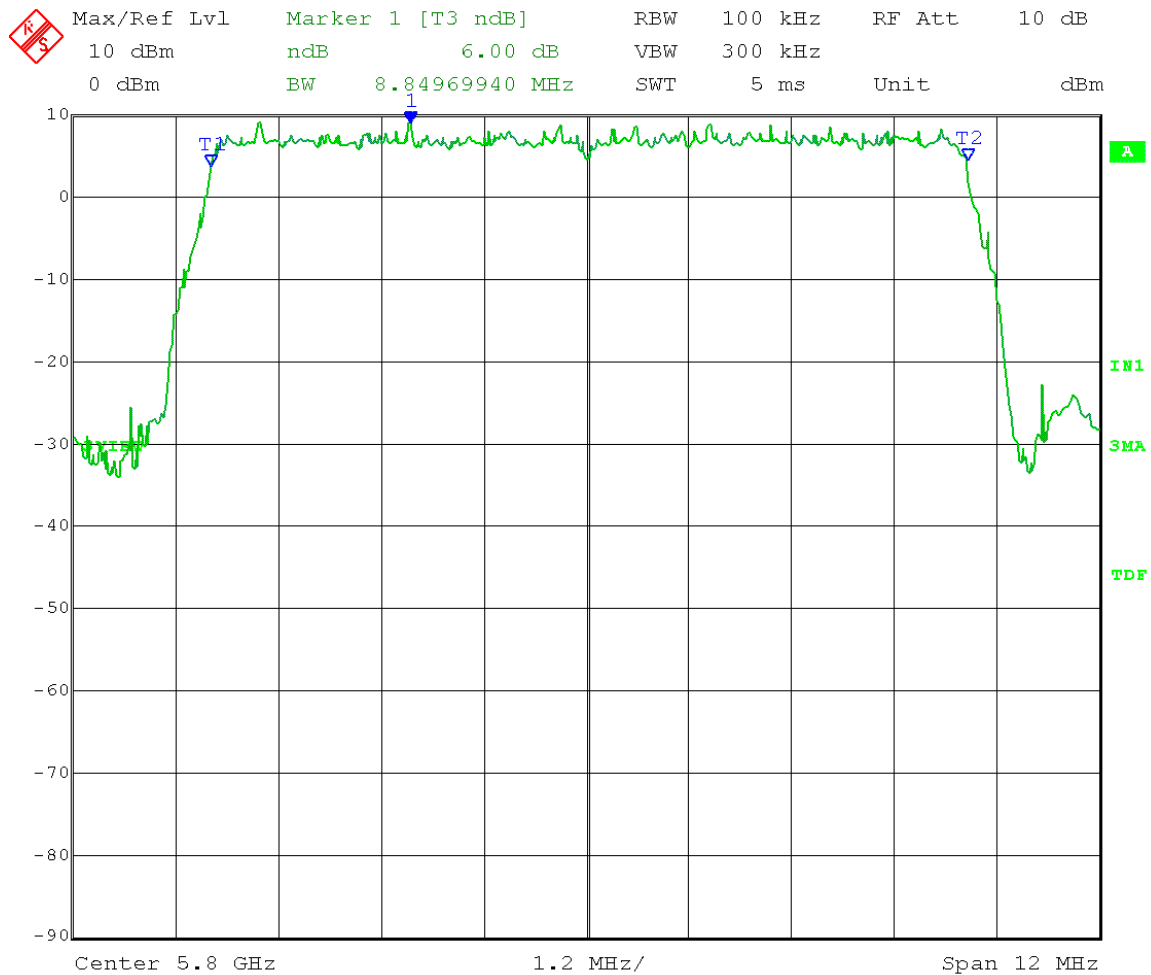


Date: 17.MAY.2012 10:10:08

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.8 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.87 MHz

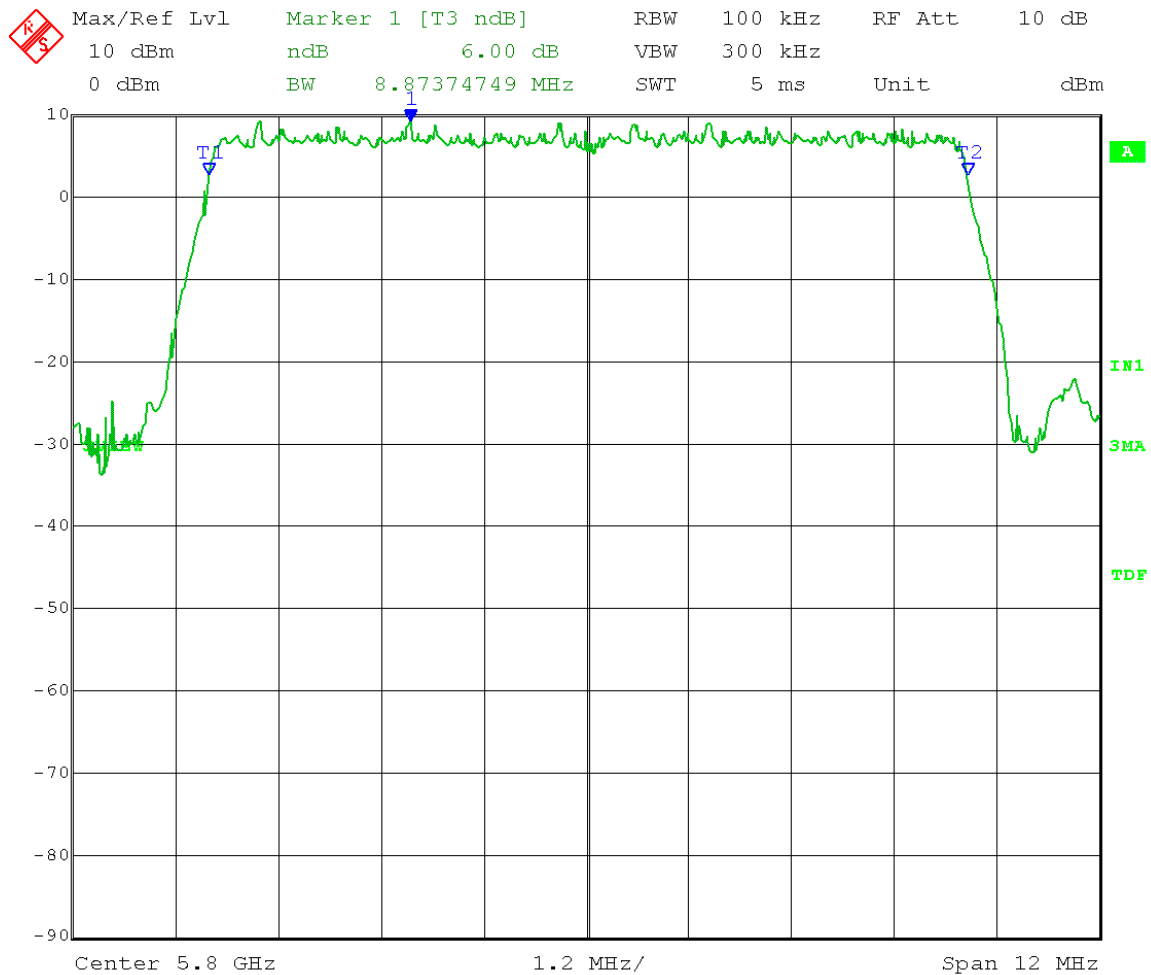

Date: 17.MAY.2012 13:12:50


Date: 15.MAY.2012 13:36:26

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

6 dB Bandwidth = 8.87 MHz

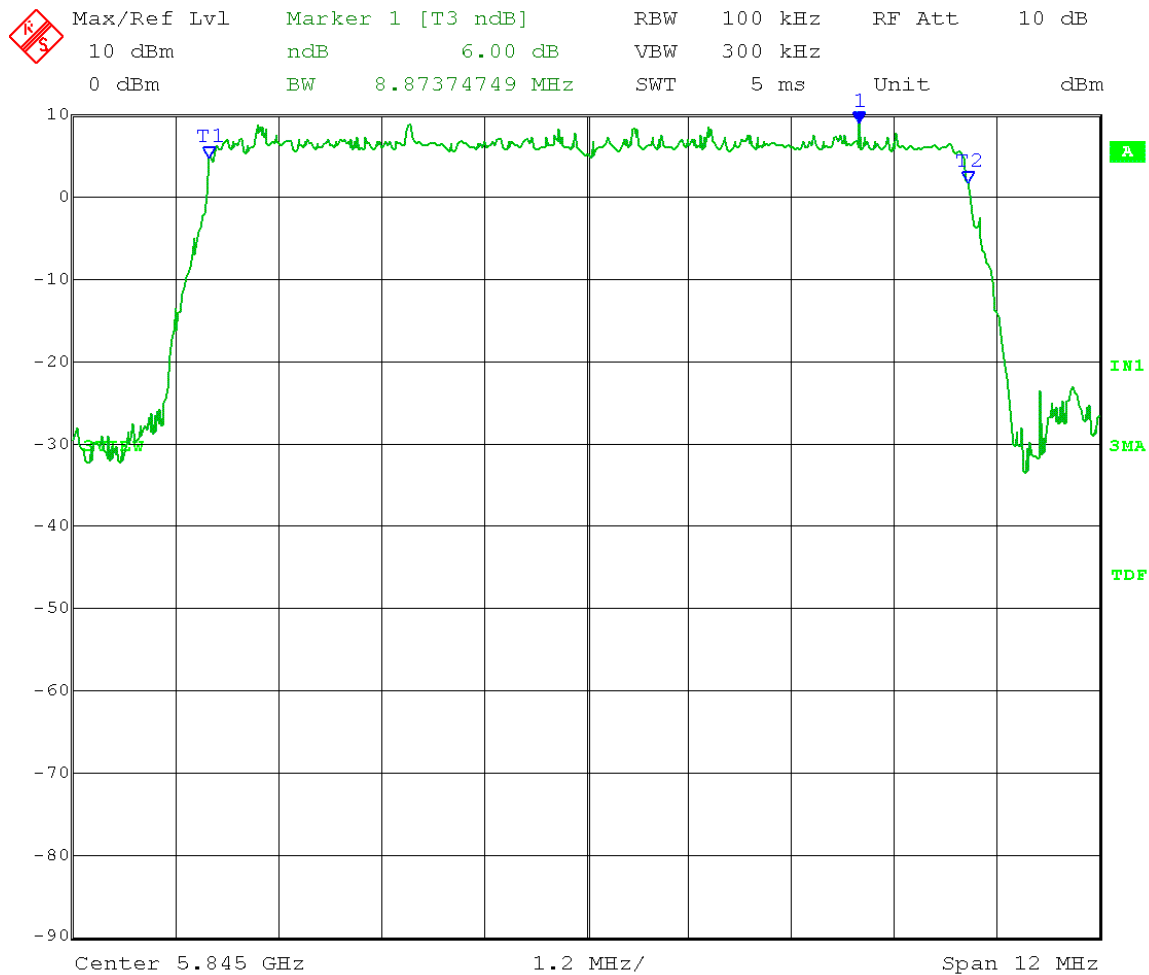


Date: 17.MAY.2012 11:35:35

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

6 dB Bandwidth = 8.87 MHz

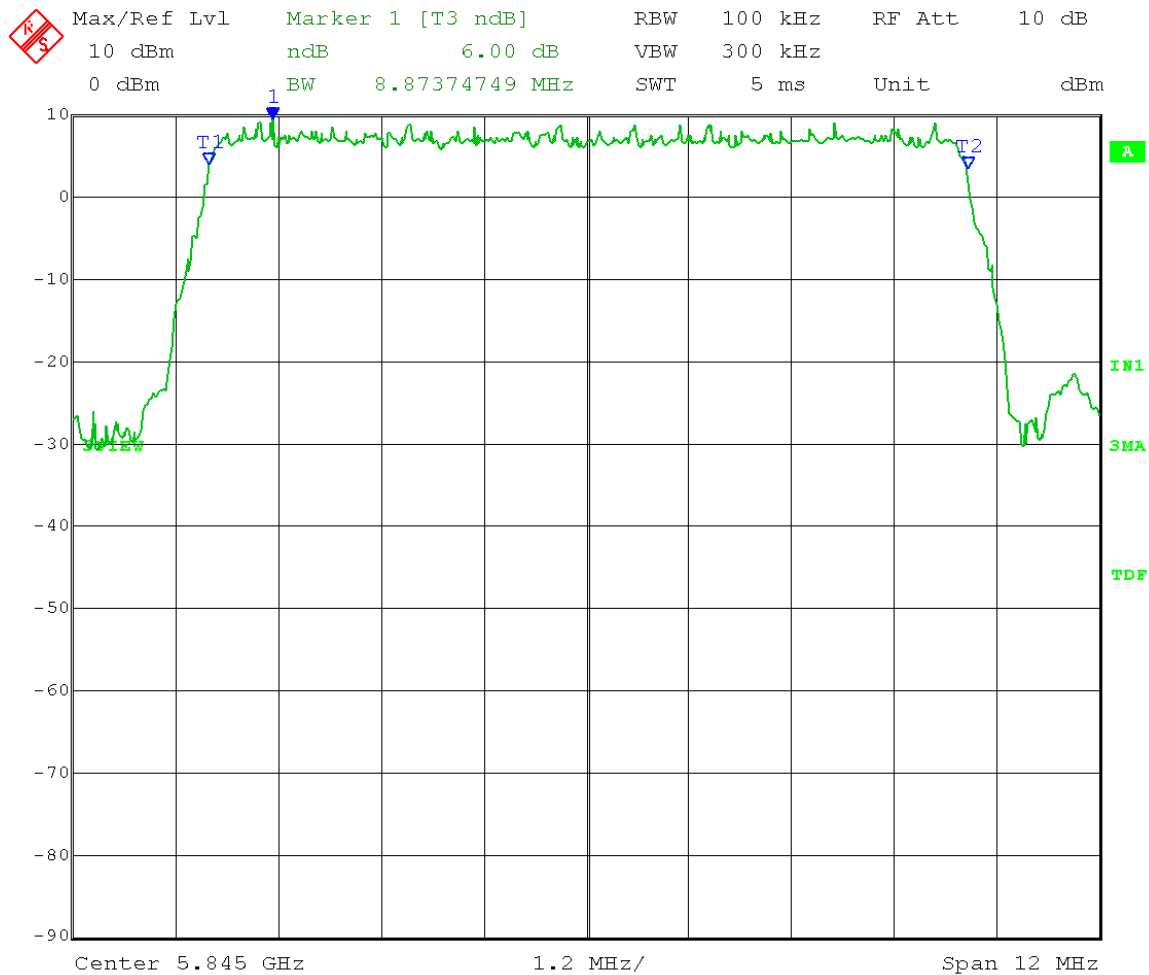


Date: 17.MAY.2012 14:10:37

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Emission Bandwidth – 6 dB bandwidth – conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.1.1
Operator: Craig B

RBW = 1-5% of EBW; VBW $\geq 3 \times$ RBW
Detector = Peak; Trace mode = max hold
Sweep = auto couple
Limit: [15.247(a)(2)]: 6 dB bandwidth shall be at least 500 kHz

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

6 dB Bandwidth = 8.87 MHz

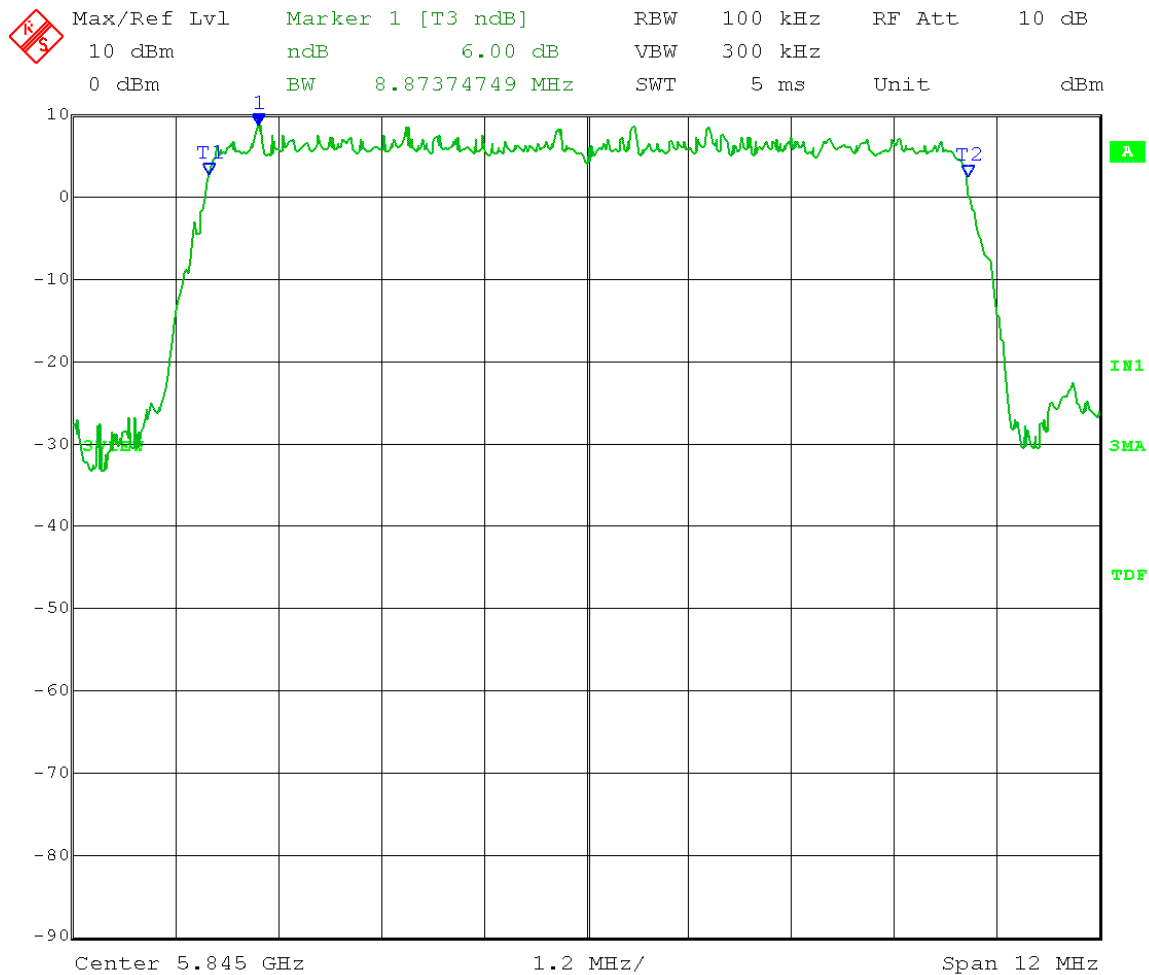

Date: 15.MAY.2012 15:13:22



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A3.0 Fundamental Emission Output Power - Conducted

Rule Section:	Section 15.247(b)(3) RSS-210 A8.4(4) – allowing Average Measurements & RSS-210 A8.4(5) – Point-to-Point (unlimited EIRP)
Test Procedure:	FCC KDB 558074 D01 DTS Meas Guidance v01 – <i>Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247</i> Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
Description:	Span = 5-30% greater than the EBW RBW = 1 MHz; Detector = power average (RMS) VBW \geq 3 MHz Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$ Sweep time: $\geq 10 \times (\text{number of measurement points}) \times$ (transmission symbol period) Trace mode: single sweep Use analyzer band power function with band limits set to EBW band edges. Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.
Limit:	1 Watt (30 dBm); 19 dBm (see note below)
Results:	Passed
Notes:	Antenna gain is 17 dBi. Therefore, the RF conducted power limit was reduced by 11 dB to 19 dBm (the amount by which the antenna gain exceeds 6 dBi). Measurements were made for MIMO Matrix A mode & MIMO Matrix B mode. Because the EUT is software defined radio, Matrix A was tested as correlated in case future operating modes combine correlated techniques with uncorrelated techniques.

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7329
 Output port: Channel A; Middle Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.60 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.80 dBm = **76 mW**

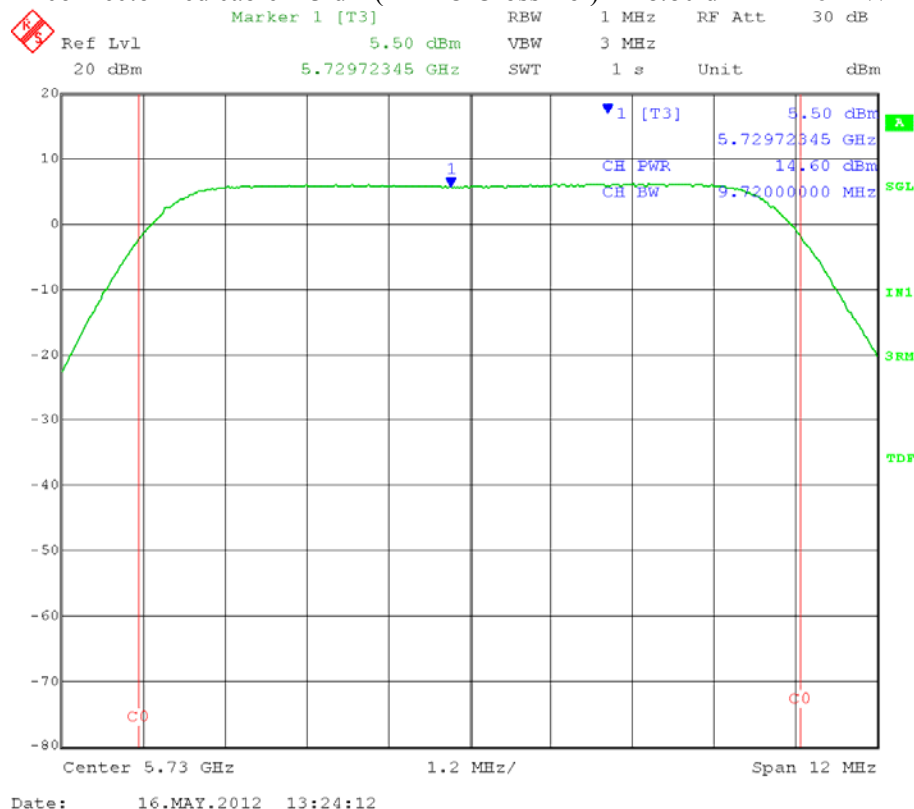

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 732B
 Output port: Channel A; Middle Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.68 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.88 dBm = **77 mW**

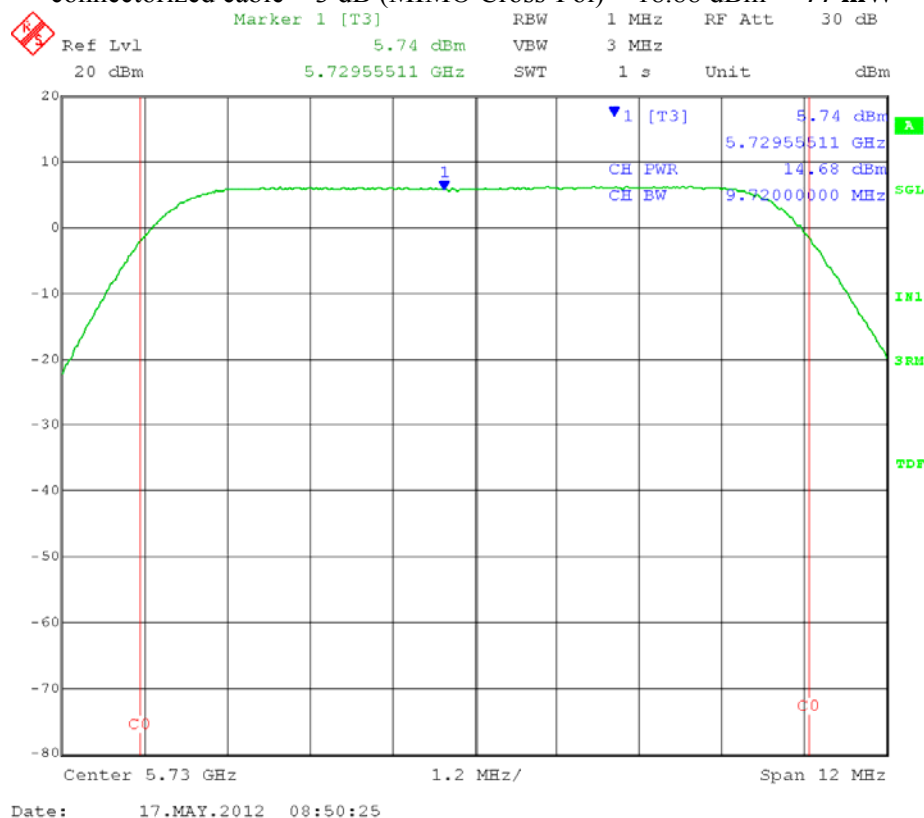

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7329
 Output port: Channel A; Middle Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.78 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.98 dBm = **76 mW**

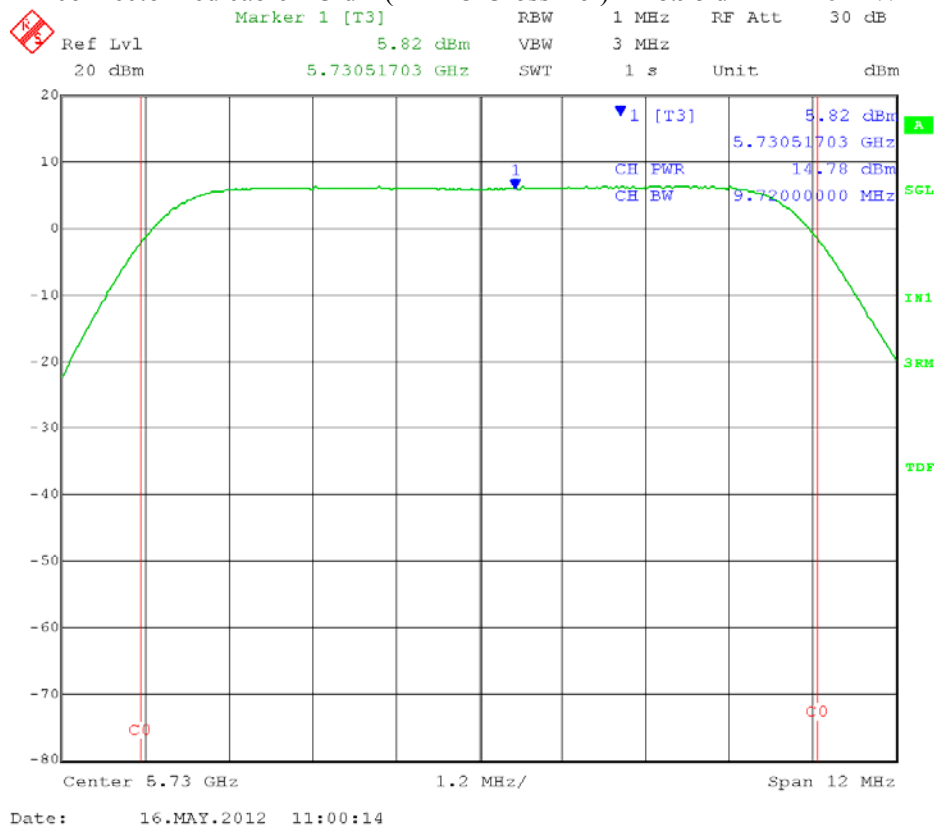

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Fundamental Emission Output Power – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
Detector = power average (RMS); VBW \geq 3 MHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep
Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7330
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 16; Modulation Type: 16QAM
26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = $14.56 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks
connectorized cable + 3 dB (MIMO Cross-Pol) = $18.76 \text{ dBm} = 75 \text{ mW}$

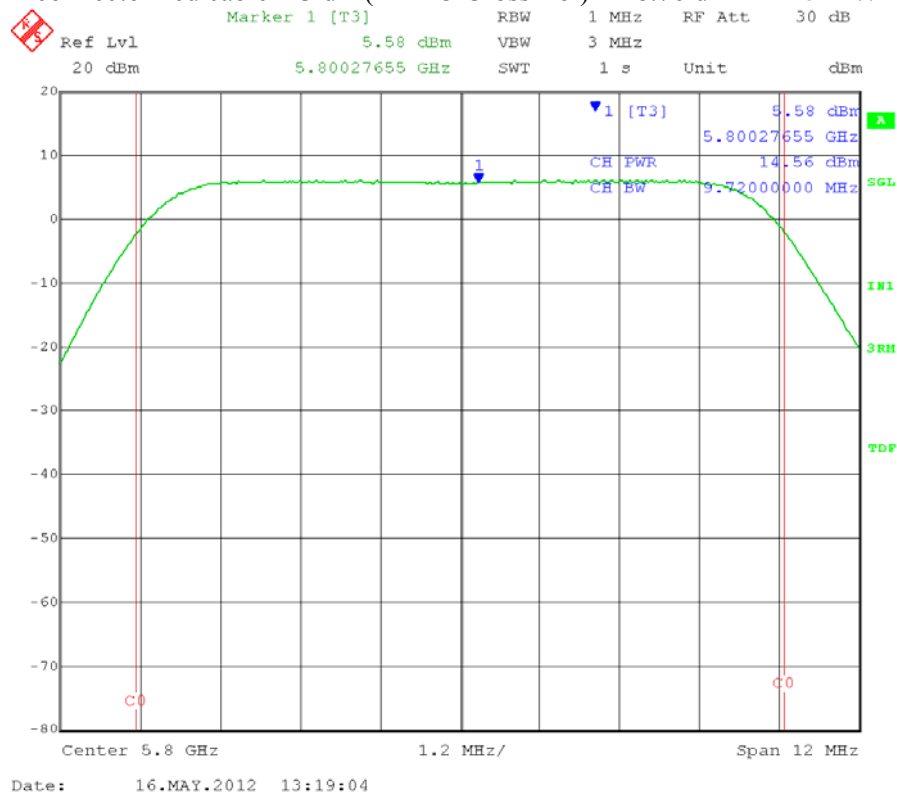

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 732F
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 16; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = $14.65 \text{ Bm} + 1.2 \text{ dB}$ for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = $18.85 \text{ dBm} = 77 \text{ mW}$

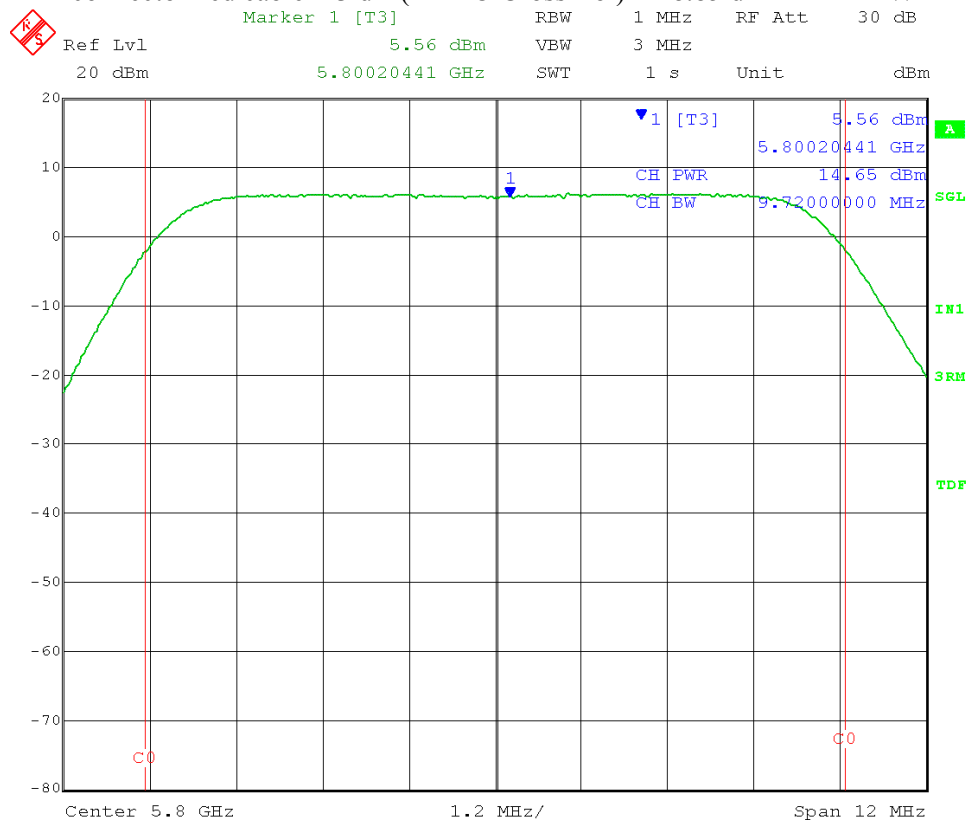

Date: 16.MAY.2012 15:59:38

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7331
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.63 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.83 dBm = **76 mW**

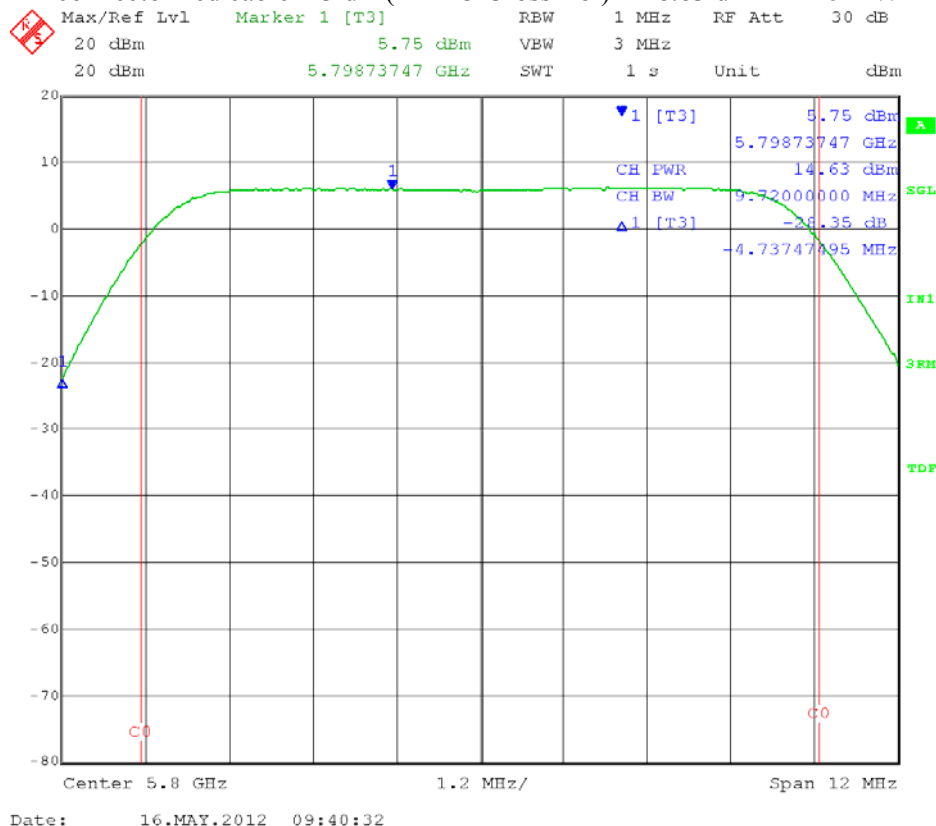

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 732D
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 16; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.67 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.87 dBm = **77 mW**

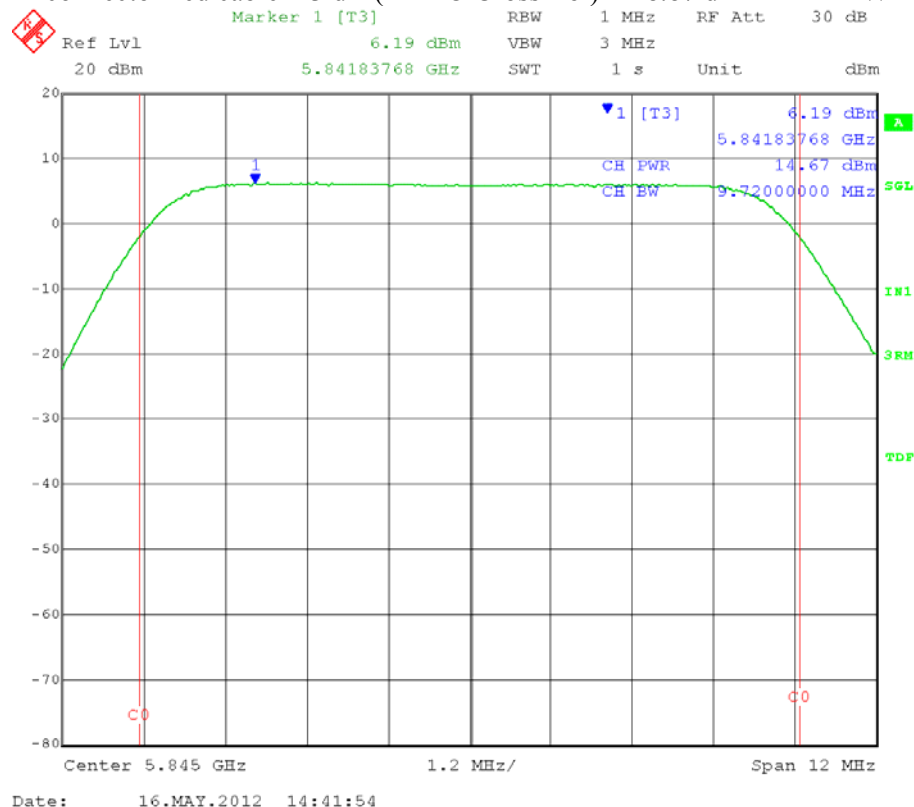

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Fundamental Emission Output Power – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
Detector = power average (RMS); VBW \geq 3 MHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep
Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7331
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 16; Modulation Type: 64QAM
26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.60 dBm + 1.2 dB for Cambium Networks
connectorized cable + 3 dB (MIMO Cross-Pol) = 18.80 dBm = **76 mW**

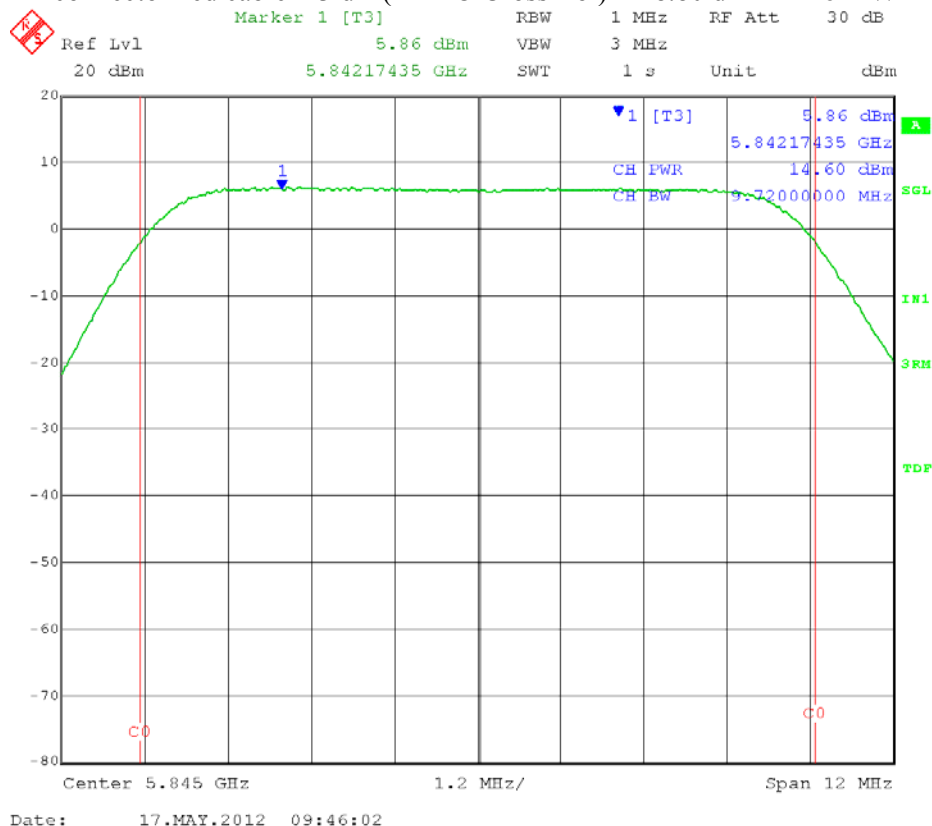

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 732F
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.64 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.84 dBm = **76 mW**

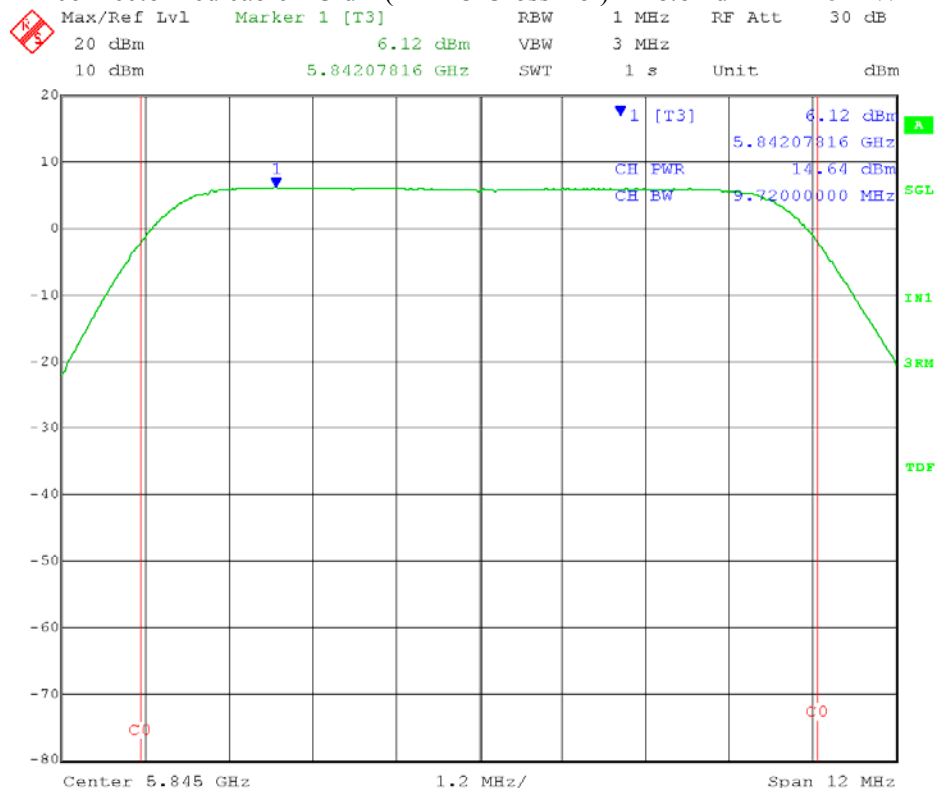

Date: 16.MAY.2012 11:52:31

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 16.54 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 17.74 dBm = **59 mW**

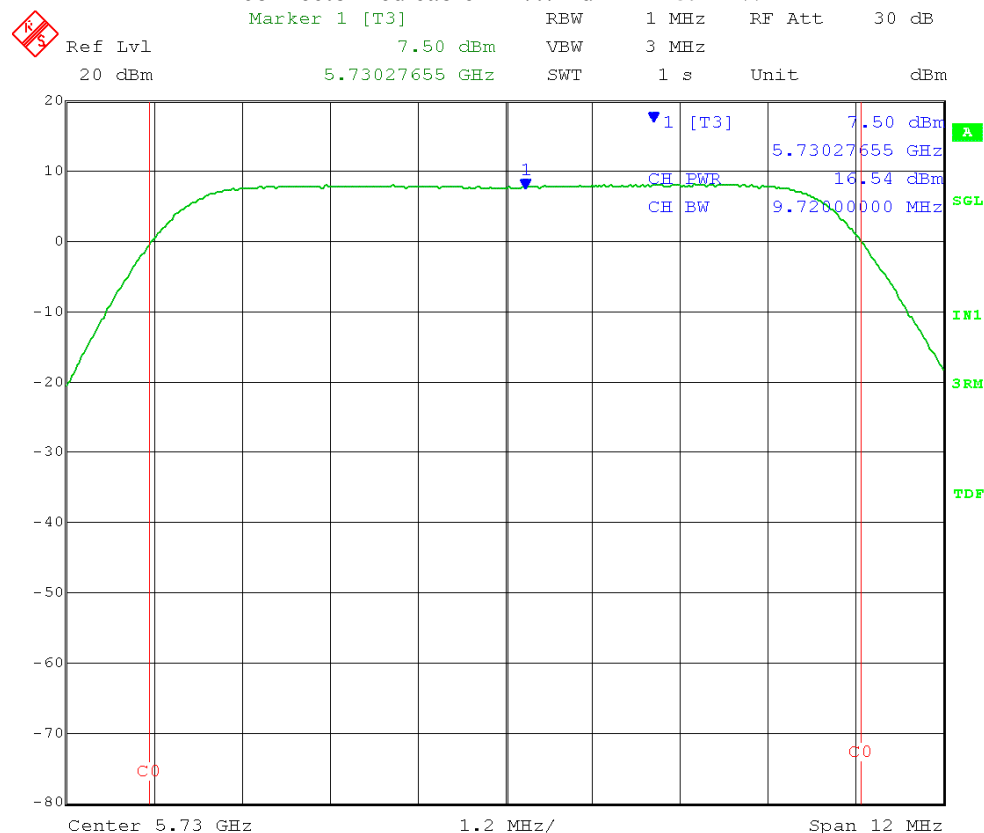

Date: 16.MAY.2012 13:27:44

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.39 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.59 dBm = **72 mW**

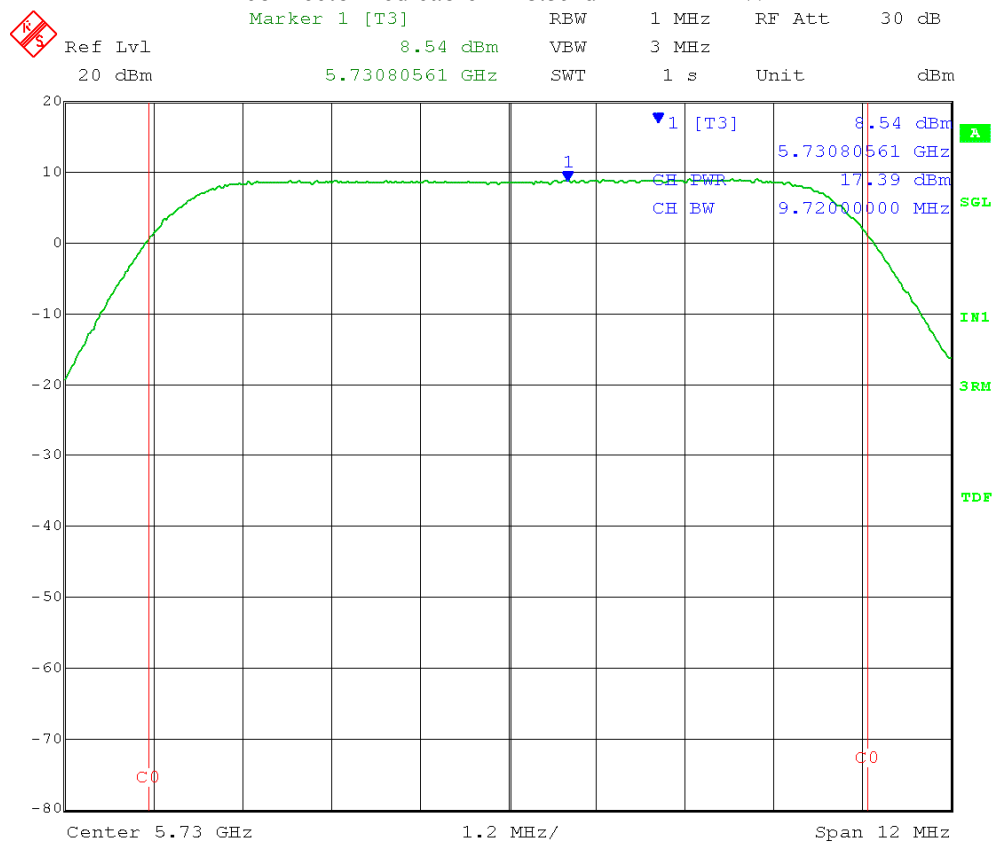

Date: 17.MAY.2012 08:16:29


Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):
 Fundamental Emission AVERAGE Output Power = 16.81 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.01 dBm = **63 mW**

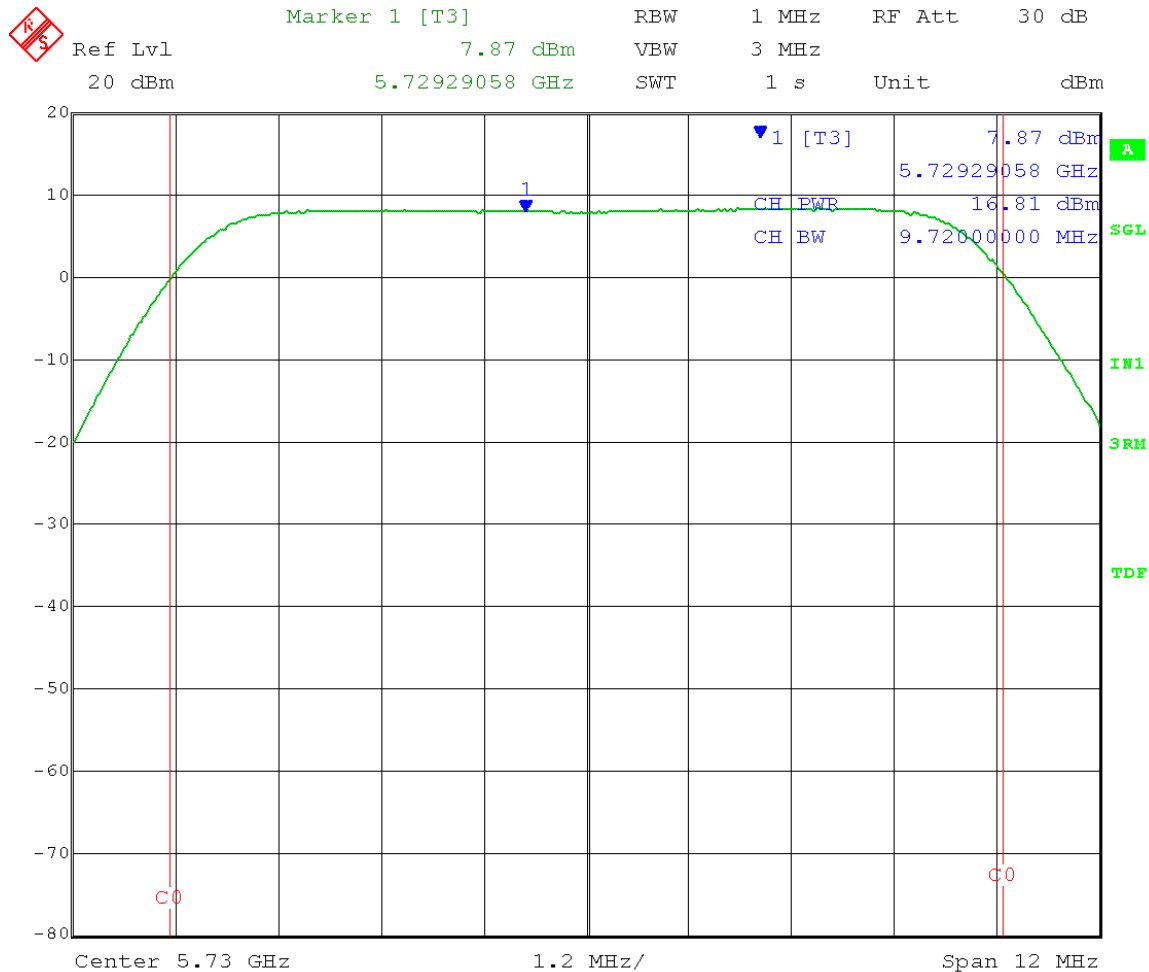

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.50 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.70 dBm = **74 mW**

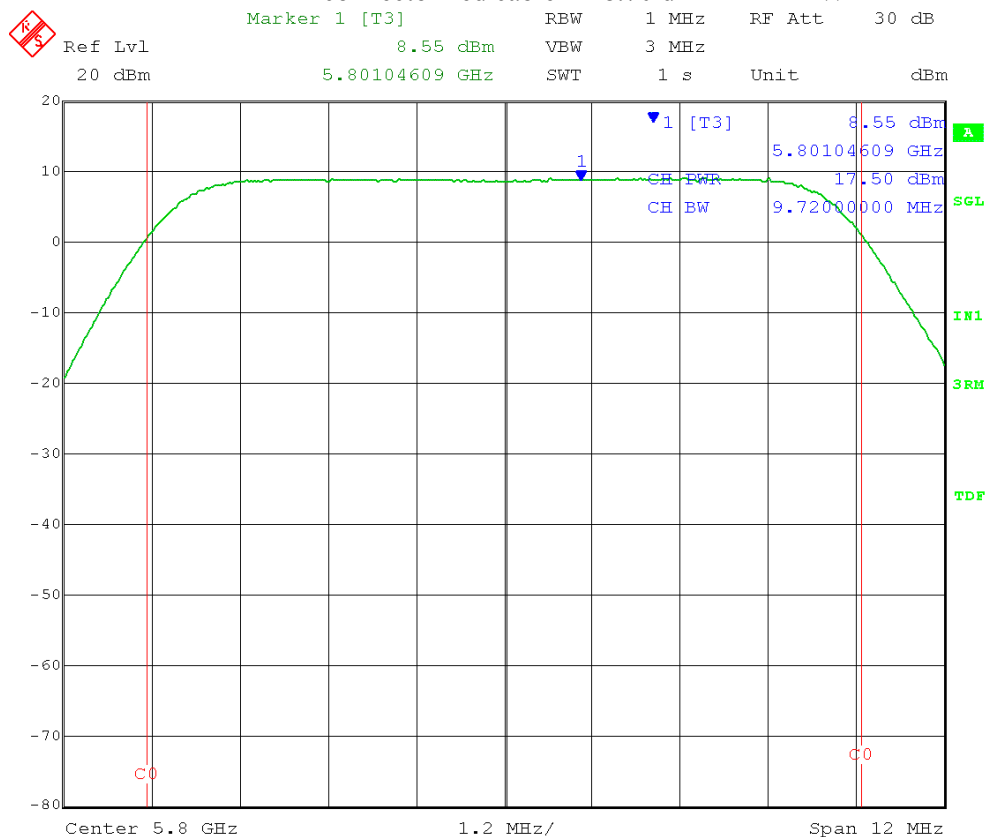

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.67 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.87 dBm = **77 mW**

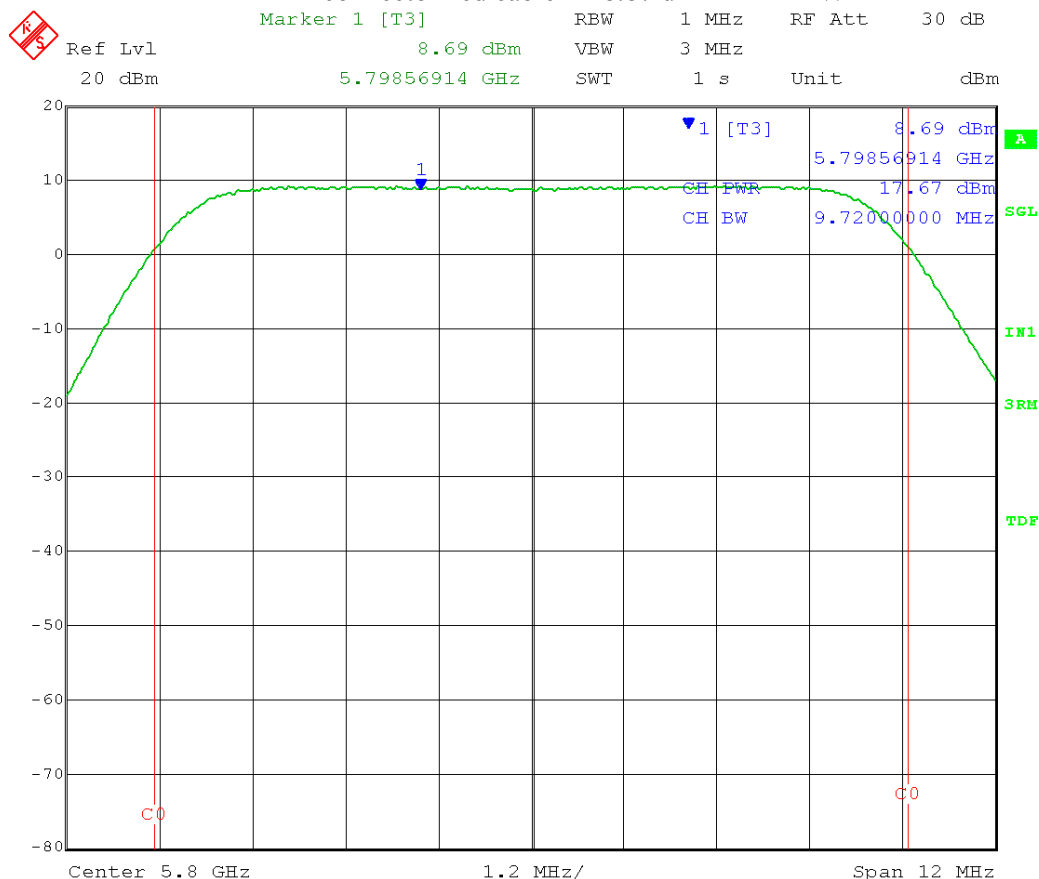

Date: 16.MAY.2012 15:30:50


Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Fundamental Emission Output Power – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
Detector = power average (RMS); VBW \geq 3 MHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep
Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK
26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):
Fundamental Emission AVERAGE Output Power = 17.76 dBm + 1.2 dB for Cambium Networks
connectorized cable = 18.96 dBm = **79 mW**

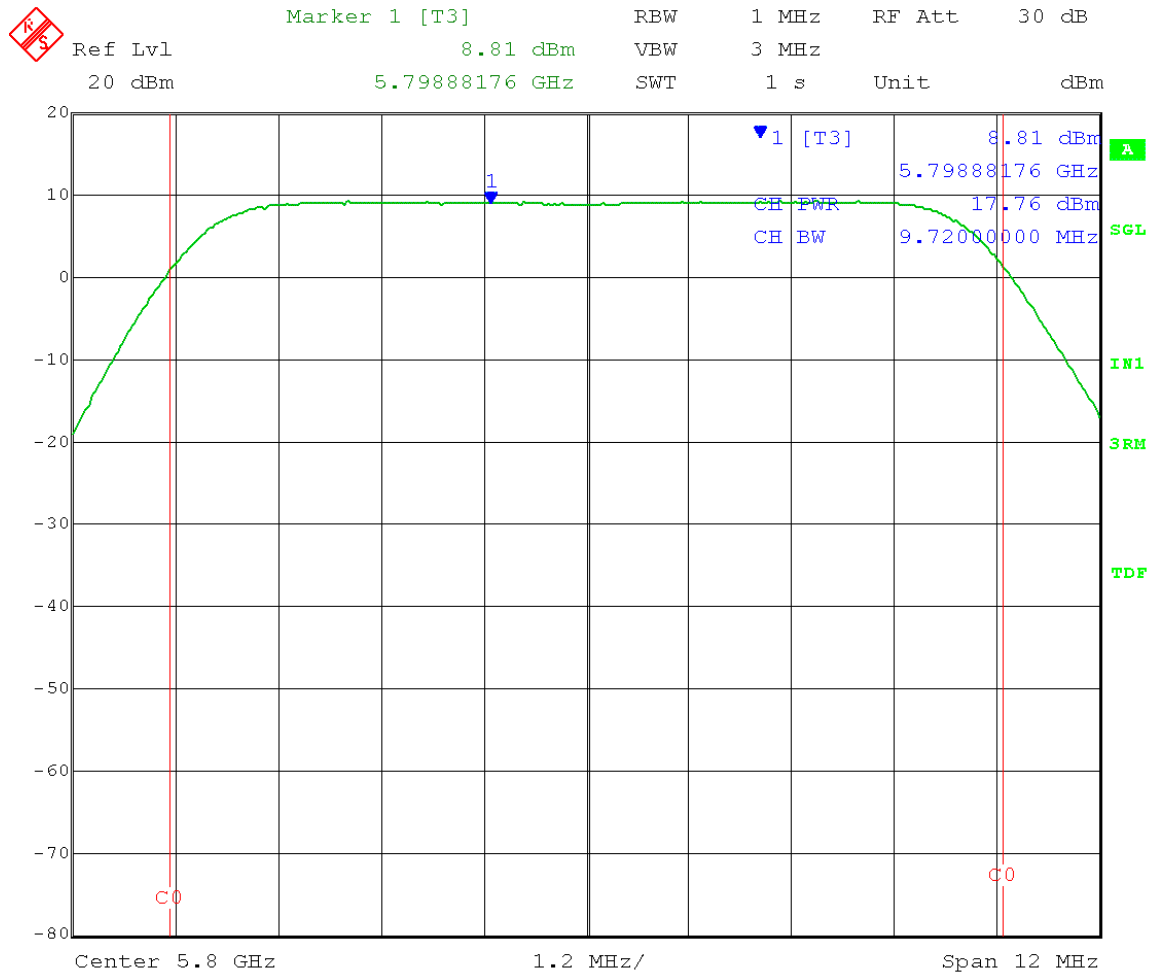

Date: 16.MAY.2012 09:11:14

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispwrite 7320
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.68 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.88 dBm = **77 mW**

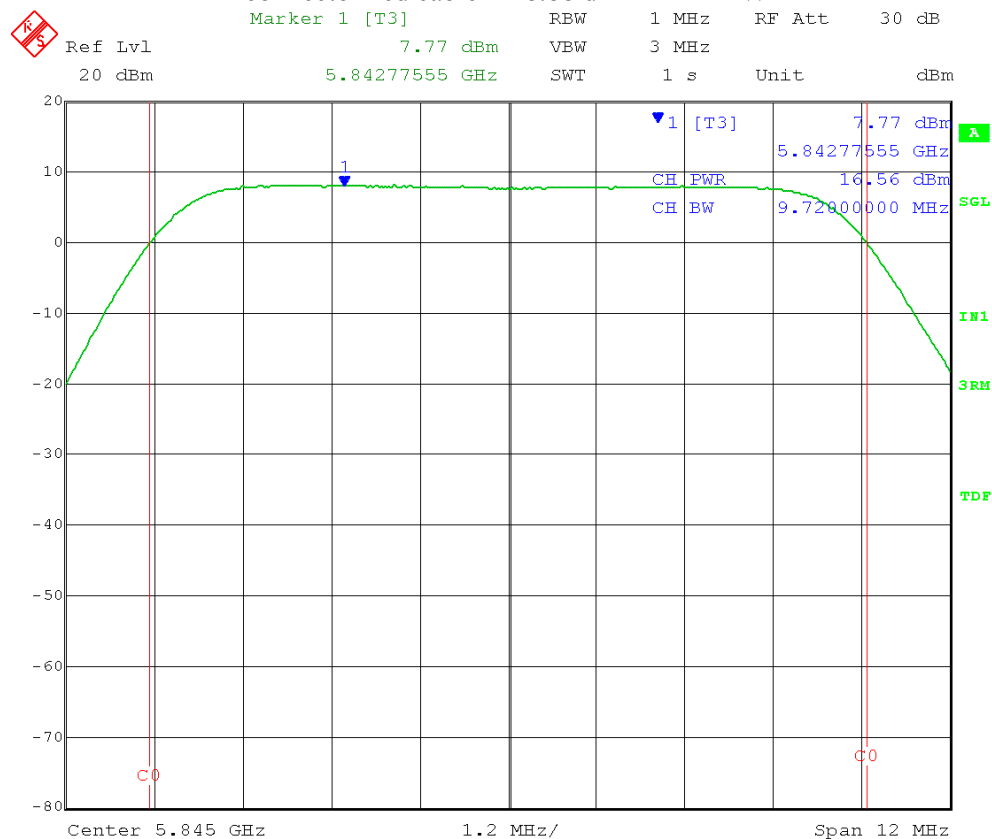

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.72 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.92 dBm = **78 mW**

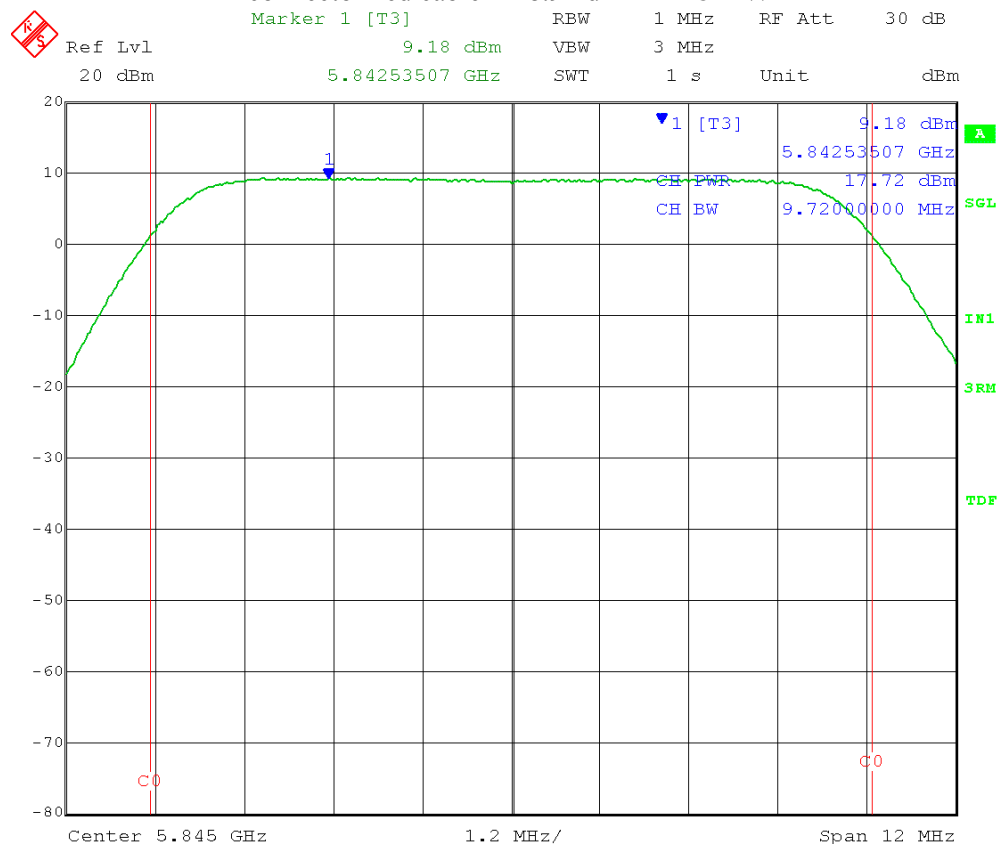

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 16.56 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 17.76 dBm = **60 mW**

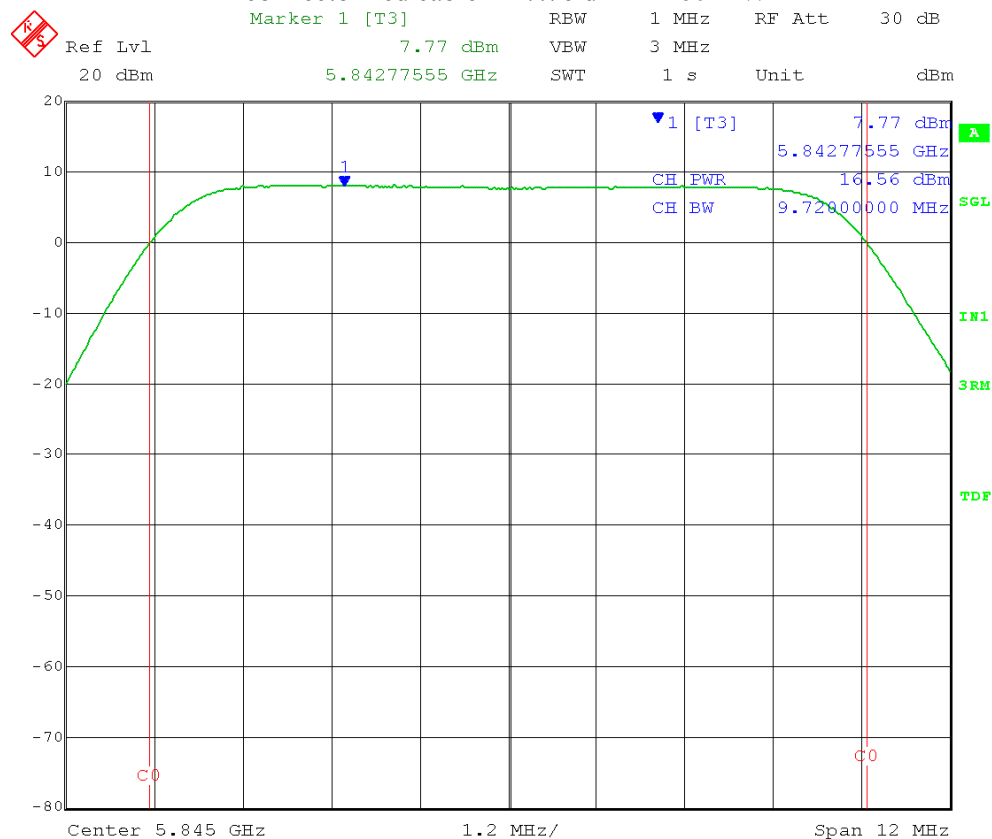

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7532
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 13.40 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 17.60 dBm = **58 mW**

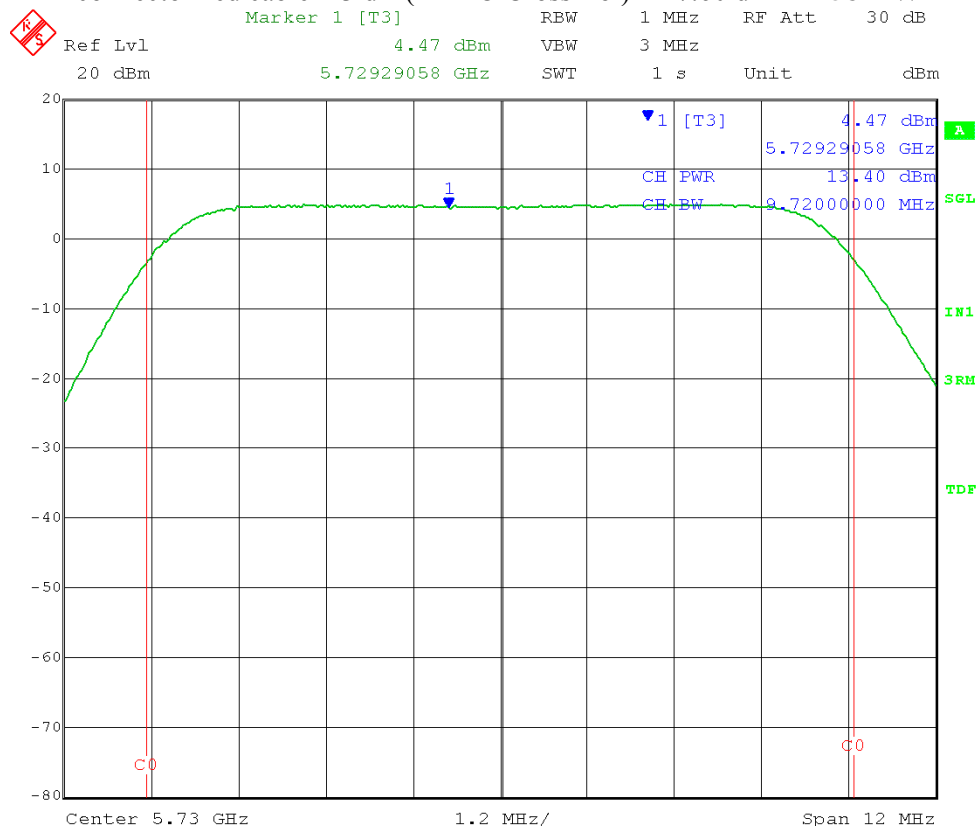

Date: 17.MAY.2012 10:50:39

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7531
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 13.41 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 17.61 dBm = **58 mW**

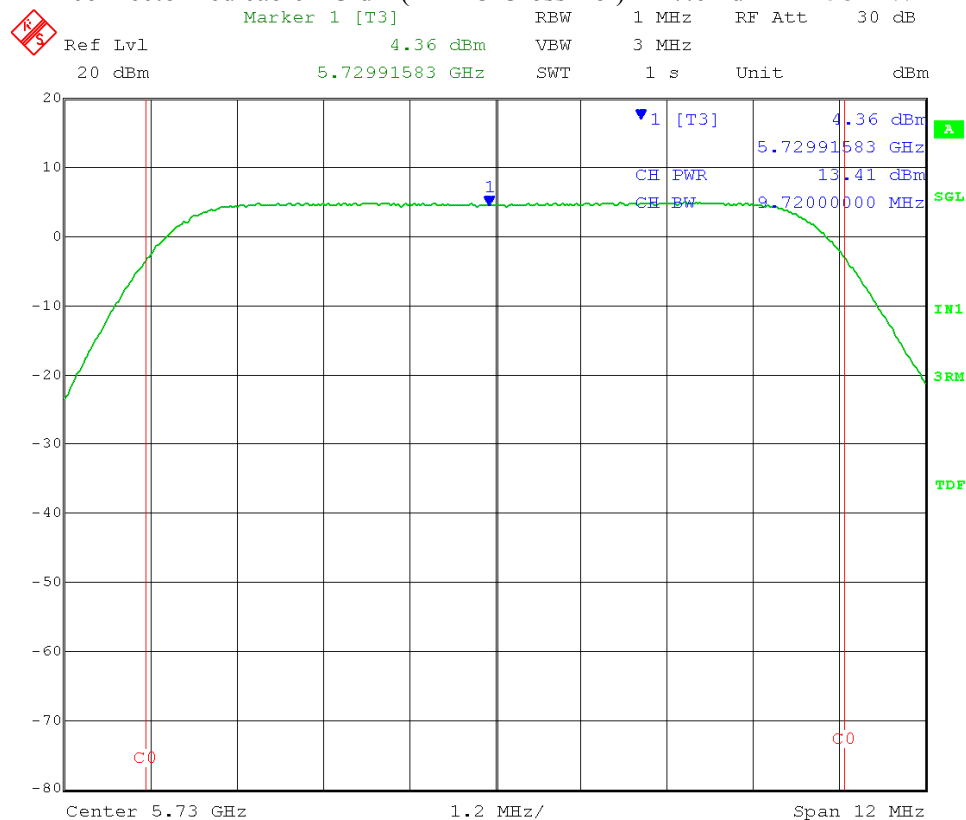

Date: 17.MAY.2012 13:36:48

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 13.37 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 17.57 dBm = **57 mW**

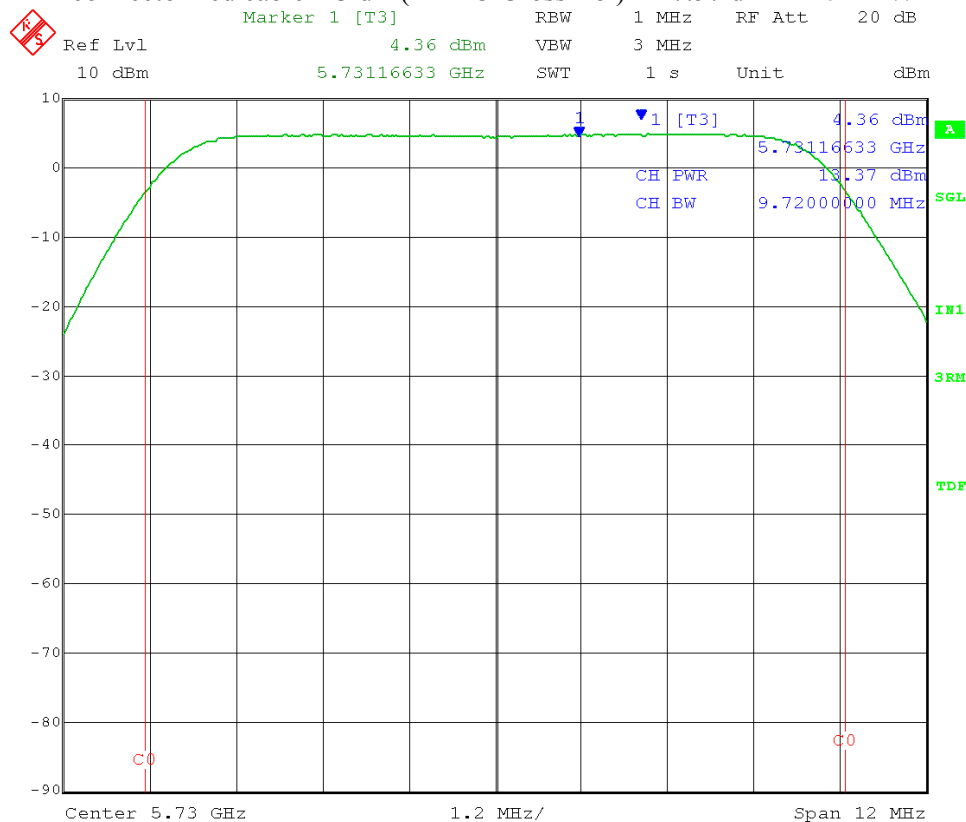

Date: 15.MAY.2012 14:47:25

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B


Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep
 Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7532
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 16; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.57 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.77 dBm = **75 mW**

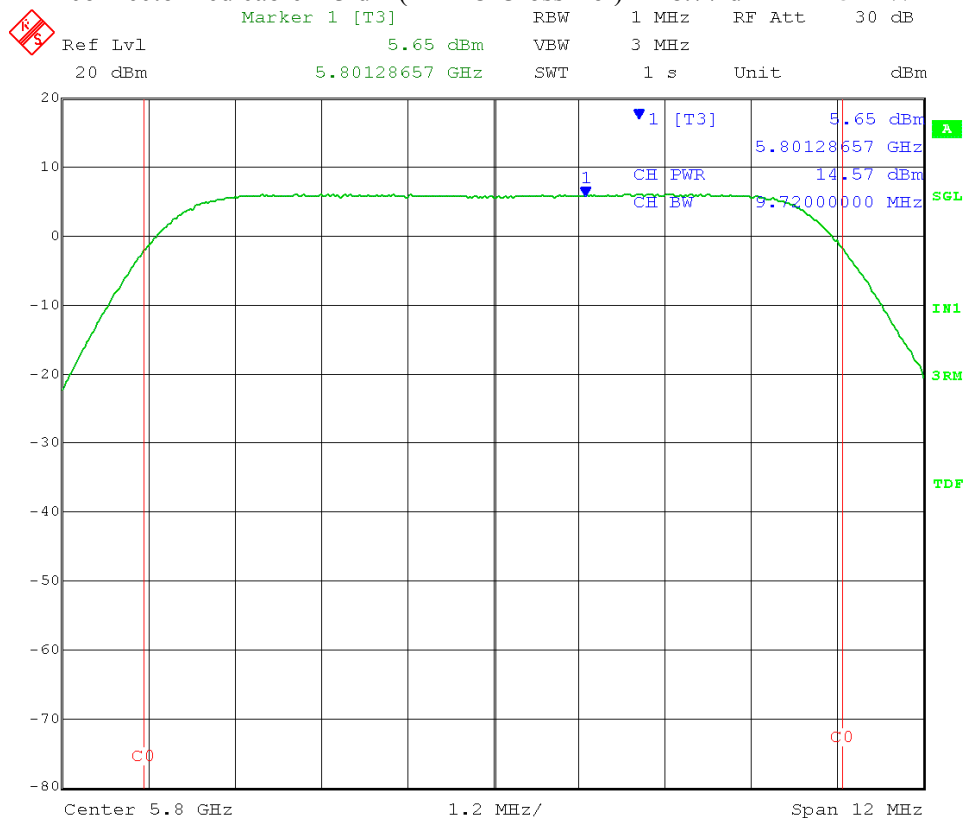

Date: 17.MAY.2012 10:43:10

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7531
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 16; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.61 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.81 dBm = **76 mW**

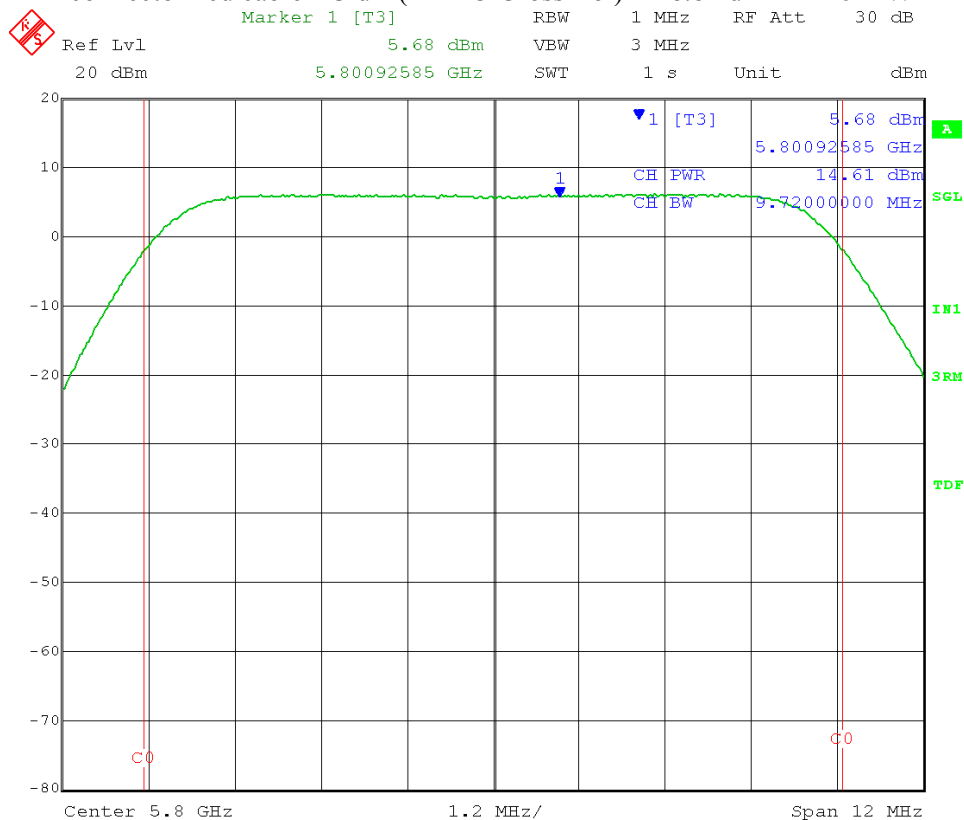

Date: 17.MAY.2012 13:33:46

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.74 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.77 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.97 dBm = **79 mW**

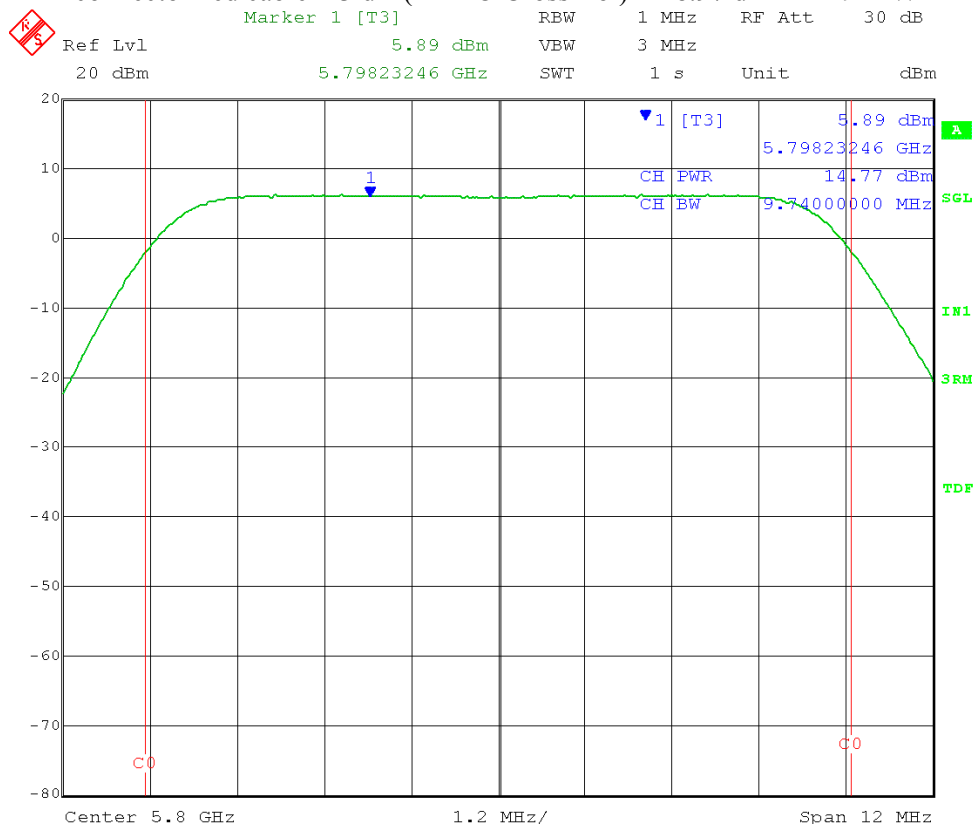

Date: 15.MAY.2012 12:53:19

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7531
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 16; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.61 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.81 dBm = **76 mW**

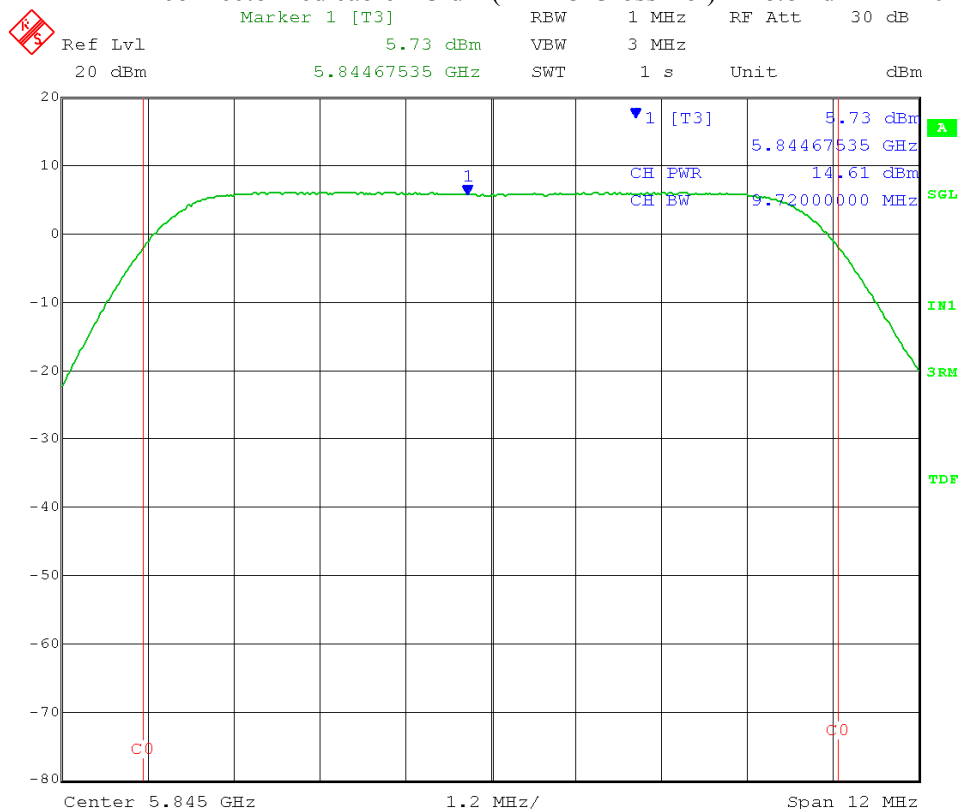

Date: 17.MAY.2012 11:57:47

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7531
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 16; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.35 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.55 dBm = **72 mW**

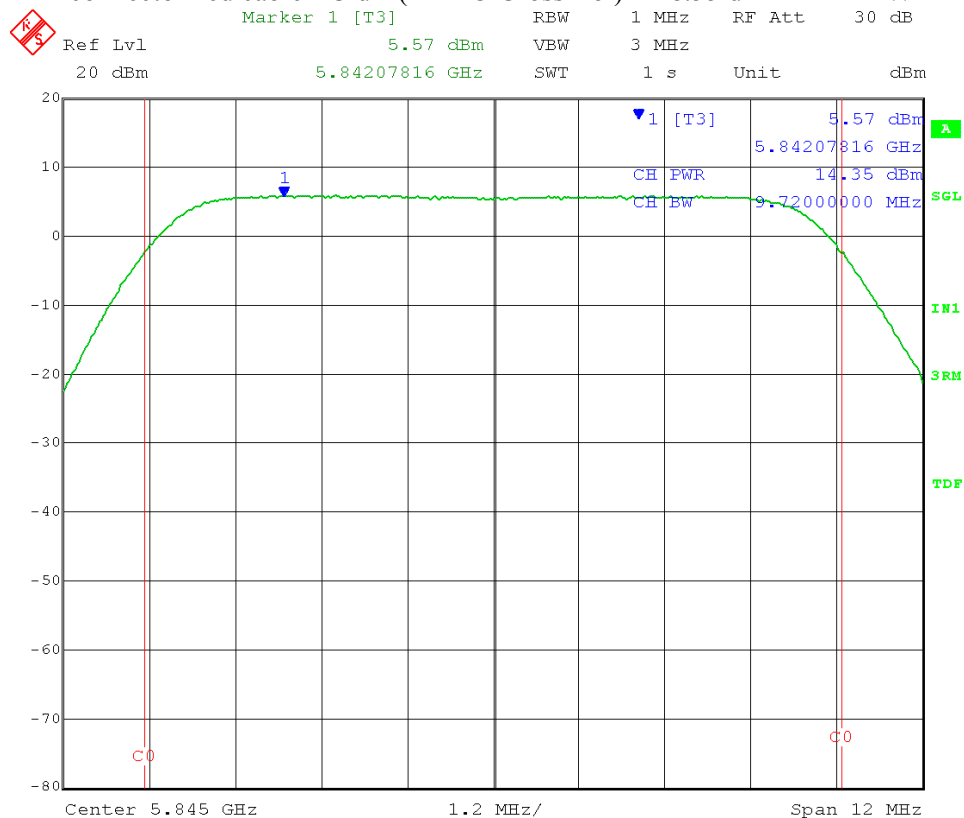

Date: 17.MAY.2012 14:36:02

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 16; Modulation Type: QPSK
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Fundamental Emission AVERAGE Output Power = 14.02 dBm + 1.2 dB for Cambium Networks
 connectorized cable + 3 dB (MIMO Cross-Pol) = 18.22 dBm = **66 mW**

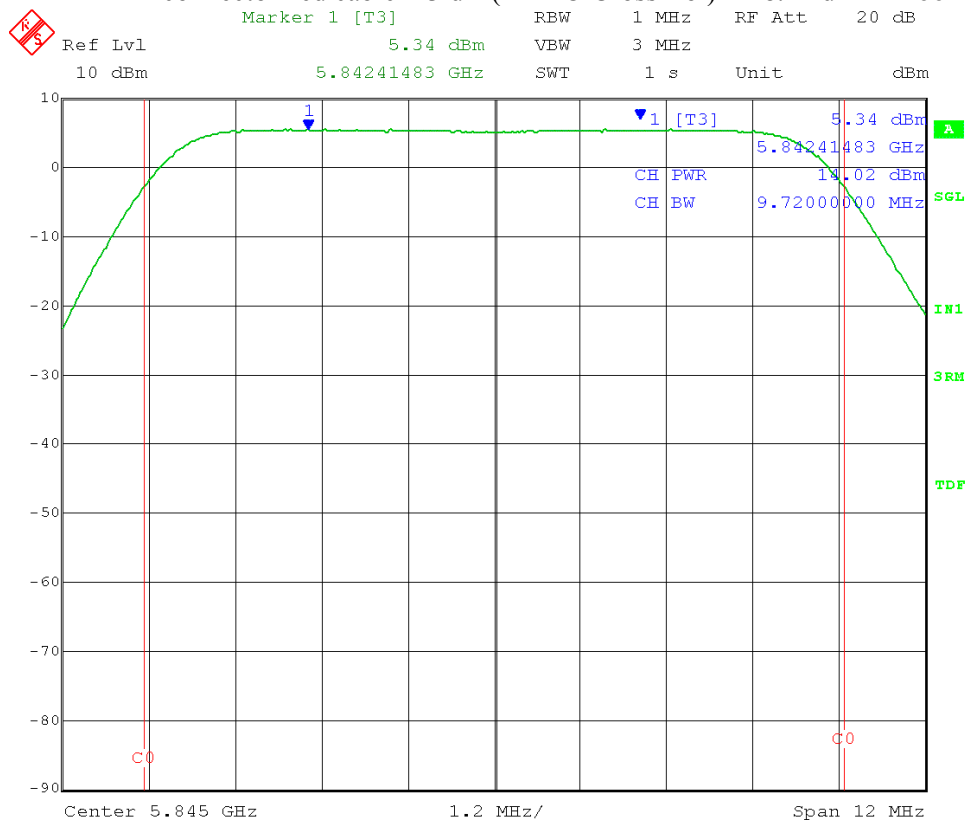

Date: 15.MAY.2012 15:33:36

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 16.16 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 17.36 dBm = **54 mW**

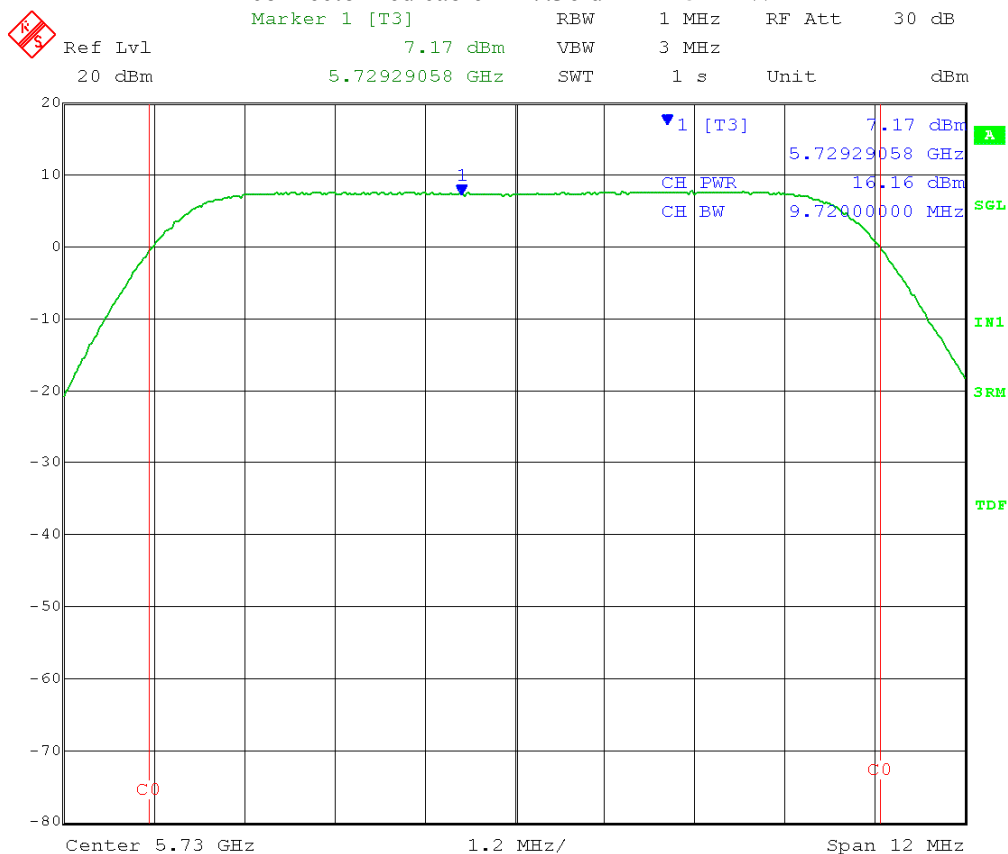

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 16.30 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 17.50 dBm = **56 mW**

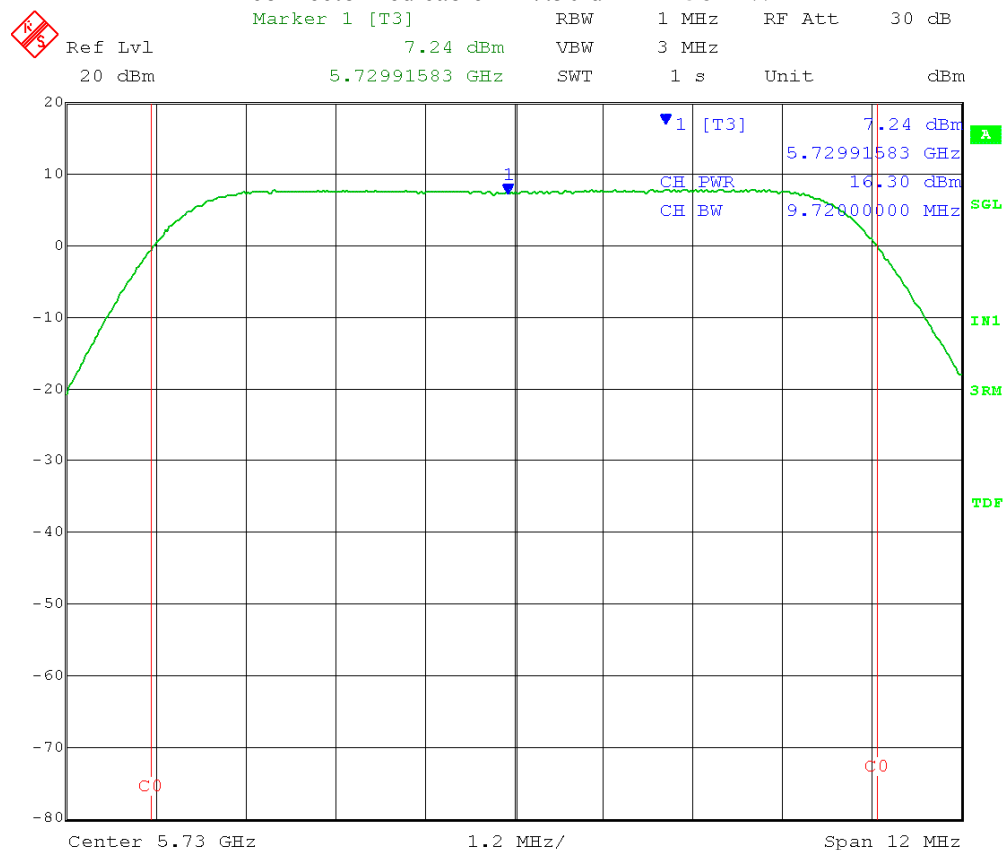

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep

Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B;
 Output power setting: 19;
 26 dB EBW: 9.72 MHz


Low Channel Frequency: 5.730 GHz
 Modulation Type: QPSK

adspiwrite no change

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 16.18 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 17.38 dBm = **55 mW**

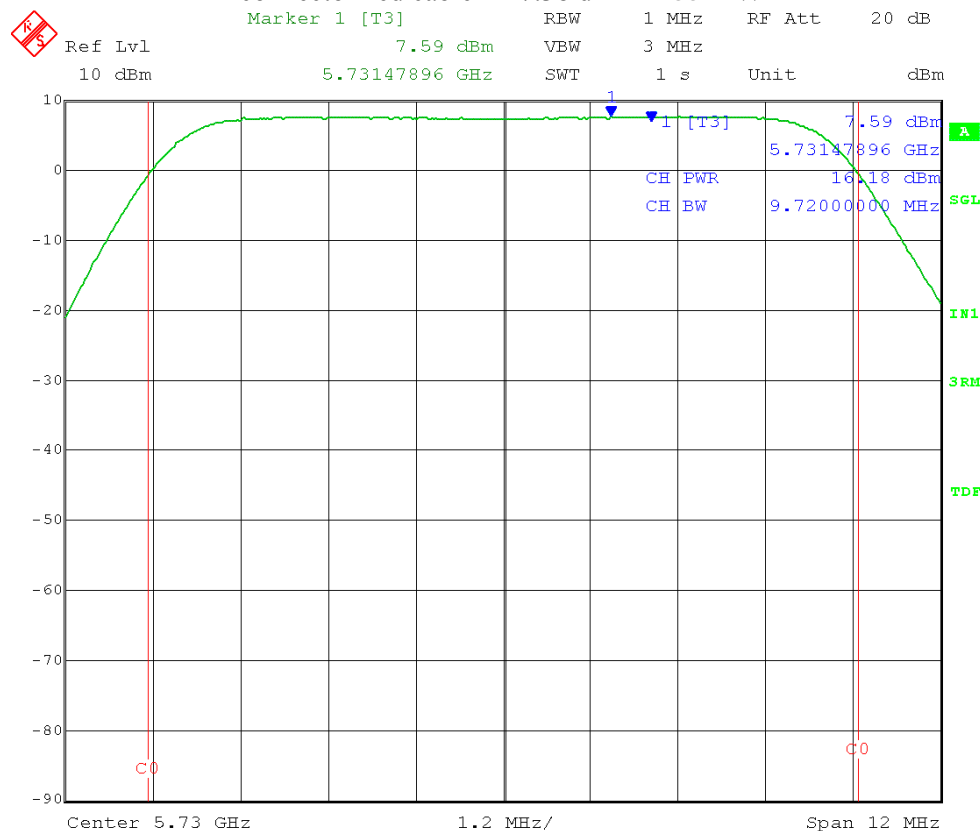

Date: 15.MAY.2012 14:42:10

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW \geq 3 MHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.38 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.58 dBm = **72 mW**

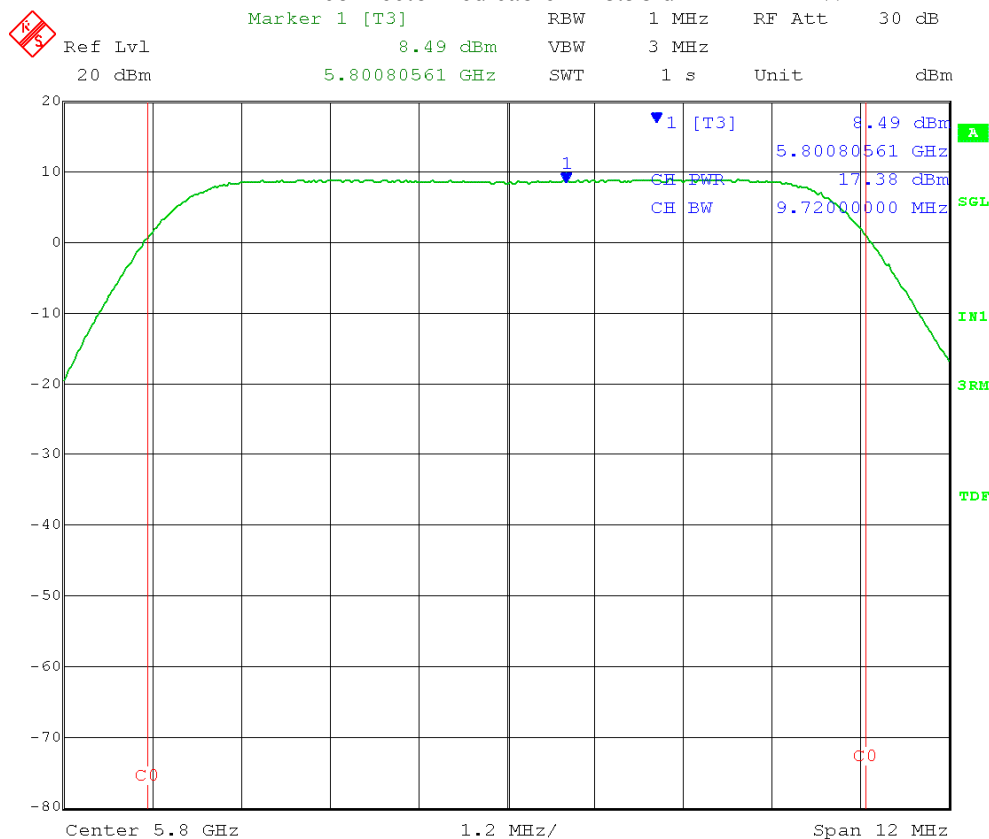

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.56 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.76 dBm = **75 mW**

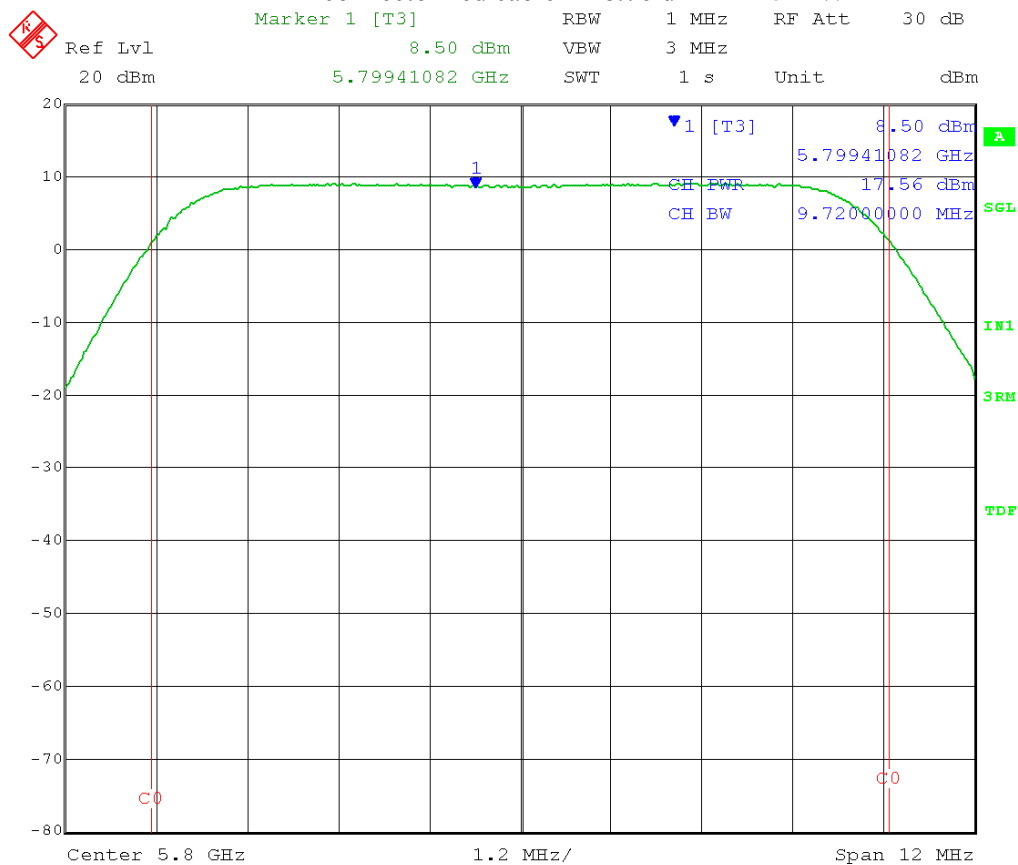

Date: 17.MAY.2012 13:07:28

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: QPSK
 26 dB EBW: 9.74 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.76 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.96 dBm = **79 mW**

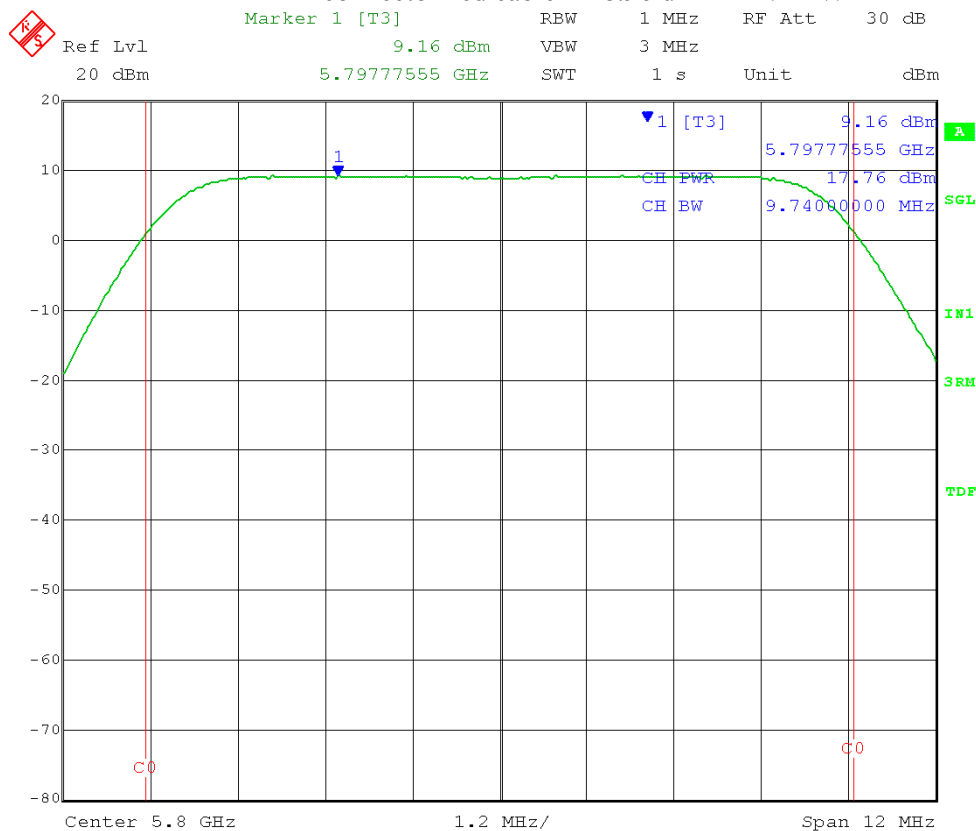

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep

Use band power function with band limits set to EBW band edges.


EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 16QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.15 dBm + 1.2 dB for Cambium Networks

connectorized cable = 18.35 dBm = **68 mW**

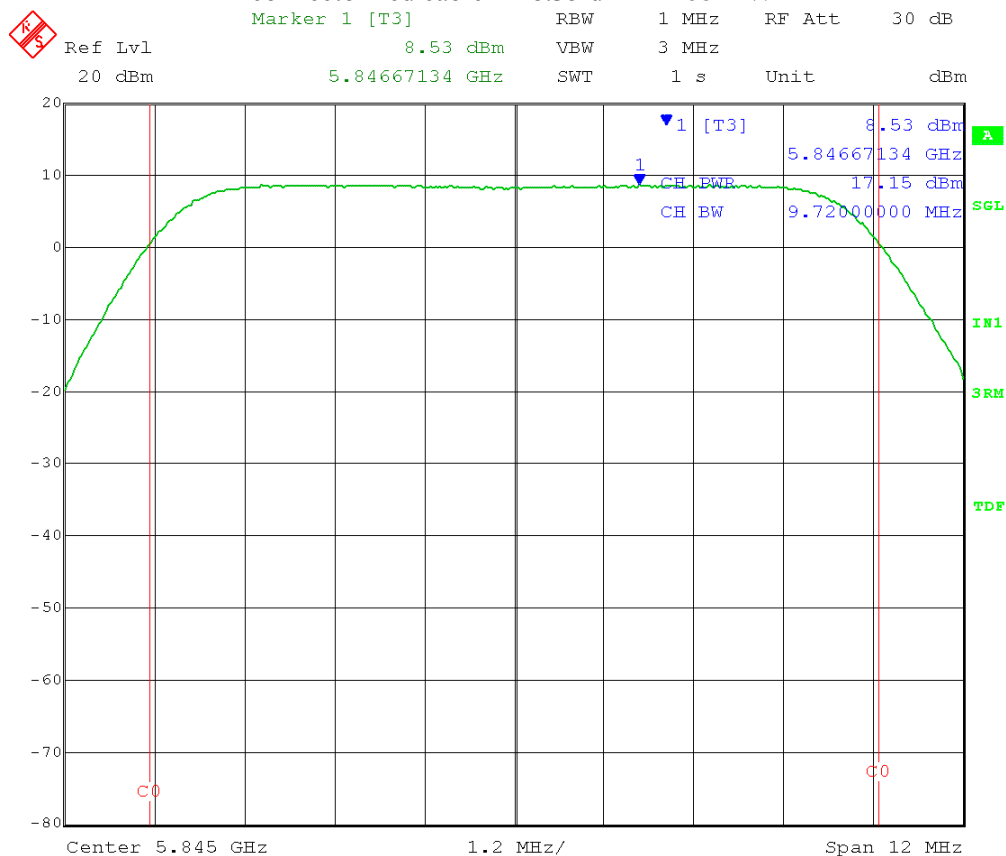

Date: 17.MAY.2012 11:30:50

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Fundamental Emission Output Power – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.2.2.1 – AVG1 (power averaging over the EBW with slow sweep speed)
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 1 MHz
 Detector = power average (RMS); VBW ≥ 3 MHz
 Number of measurement points in sweep ≥ 2 x (span/RBW)
 Sweep time: ≥ 10 x (number of measurement points) x (transmission symbol period)
 = 10 x 500 x 28 μs = 0.14 sec

Trace mode: single sweep


Use band power function with band limits set to EBW band edges.

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 64QAM
 26 dB EBW: 9.72 MHz

Limit: [15.247(b)(3)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX B (completely uncorrelated signals):

Fundamental Emission AVERAGE Output Power = 17.30 dBm + 1.2 dB for Cambium Networks
 connectorized cable = 18.50 dBm = **71 mW**

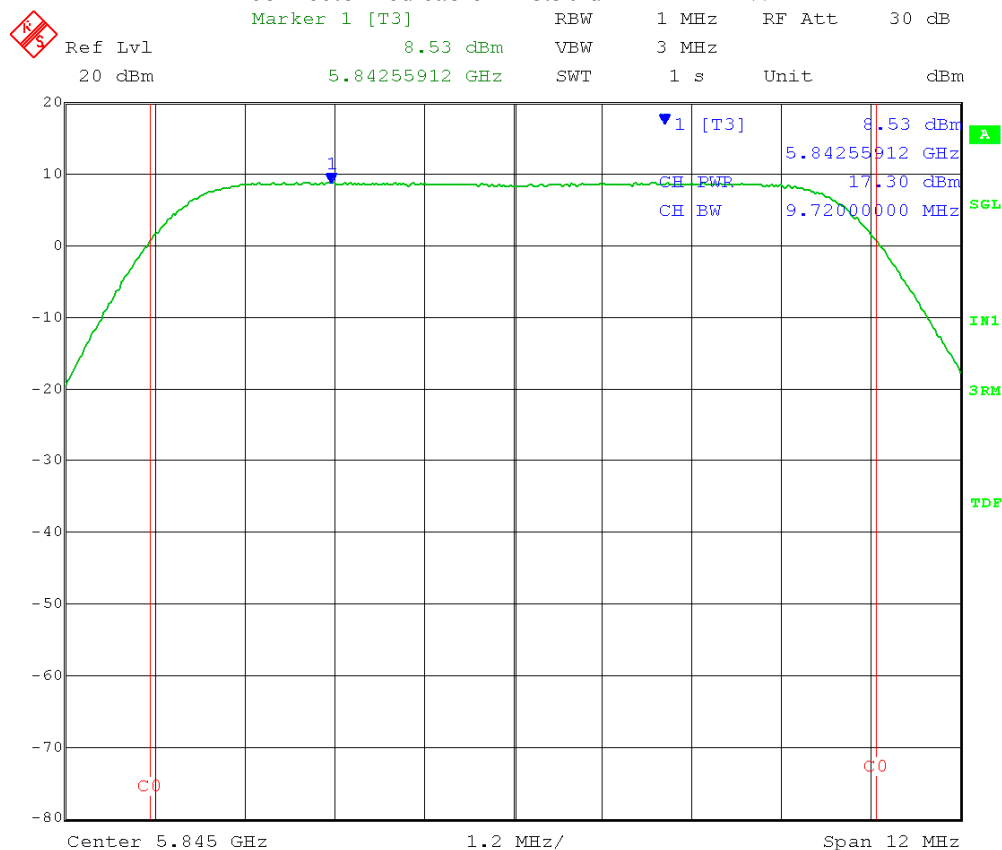

Date: 17.MAY.2012 14:03:48

Date: 15.MAY.2012 15:23:58



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A4.0 Maximum Power Spectral Density – Conducted

Rule Section: Section 15.247(e)
RSS-210 A8.2(b)

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.3.2 – AVGPSD (Average output power procedure was used to measure the fundamental emission power)

Description: Span = 5-30% greater than the EBW
RBW = 100 kHz
VBW \geq 300 kHz
Detector = power average (RMS)
Number of measurement points in sweep $\geq 2 \times (\text{span/RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times$ (transmission symbol period)
Trace mode: single sweep

Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Limit: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Results: Passed

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.75 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.45 \text{ dBm} - 15.2 \text{ dB} = -12.75 \text{ dBm}$

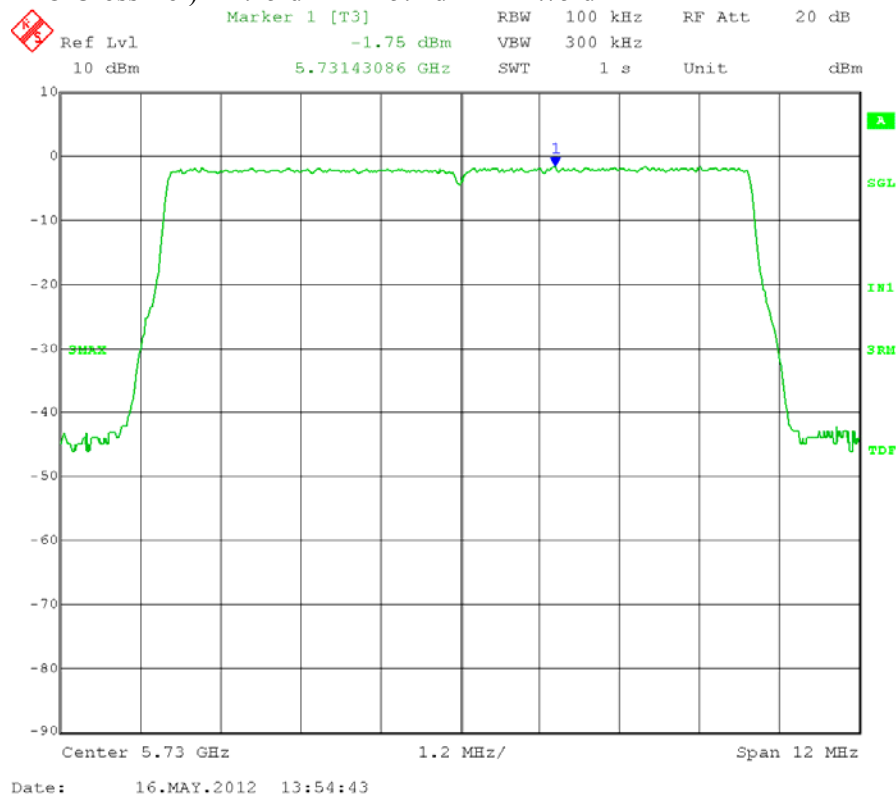

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: AVERAGE Maximum Power Spectral Density – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.3.2 – AVGPSD
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
 Detector = power average (RMS); VBW \geq 300 kHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
 Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10 \log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.11 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.09 \text{ dBm} - 15.2 \text{ dB} = -12.11 \text{ dBm}$

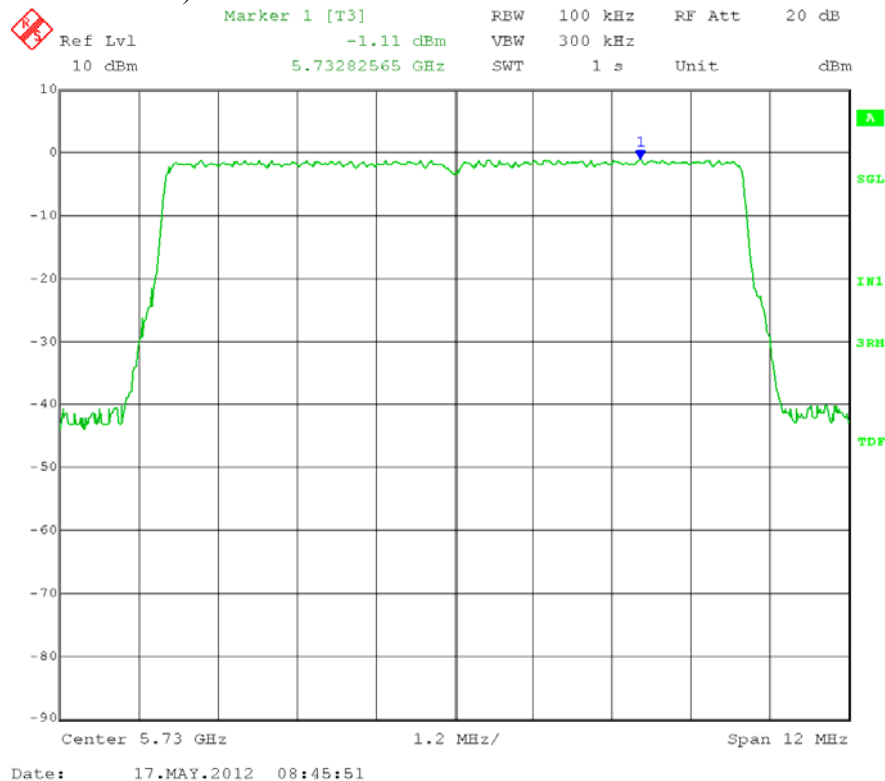

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.51 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.69 \text{ dBm} - 15.2 \text{ dB} = -12.51 \text{ dBm}$

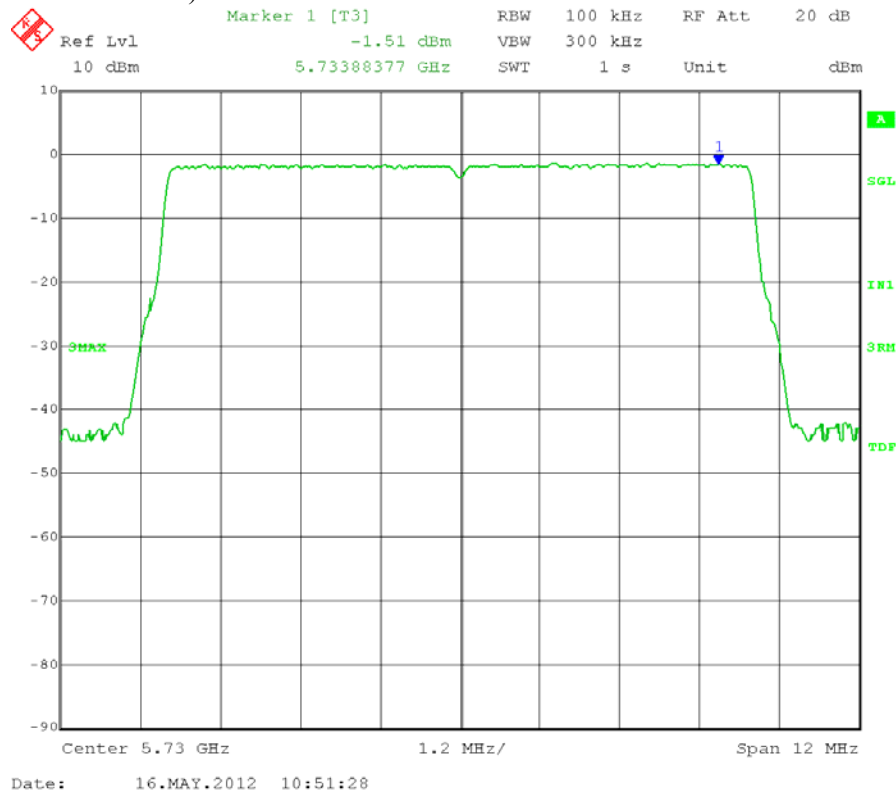

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.86 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.34 \text{ dBm} - 15.2 \text{ dB} = -11.86 \text{ dBm}$

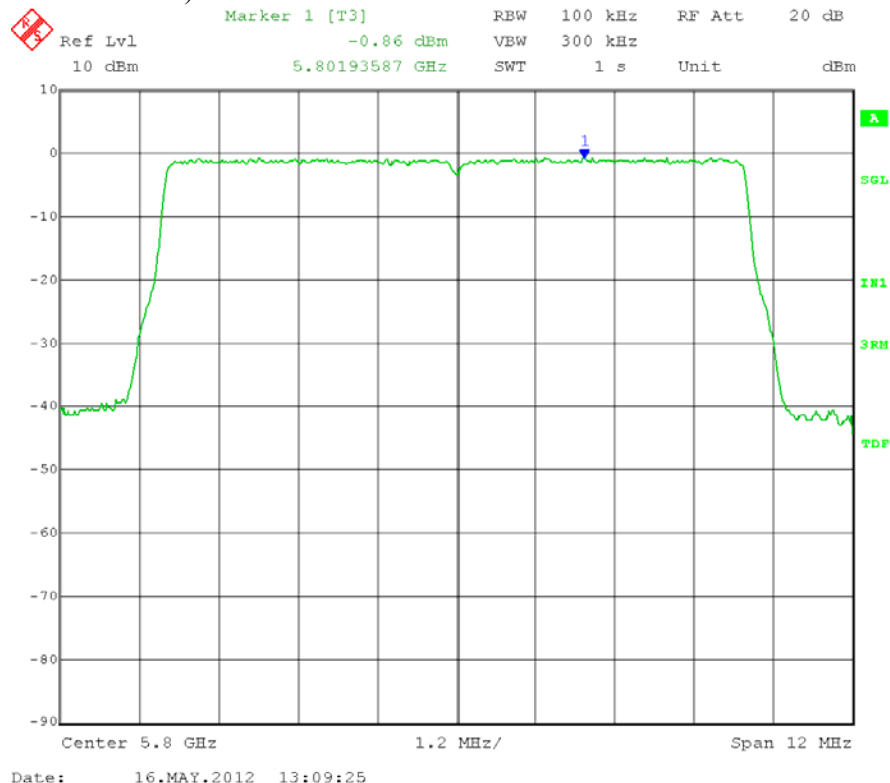

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.36 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.84 \text{ dBm} - 15.2 \text{ dB} = -11.36 \text{ dBm}$

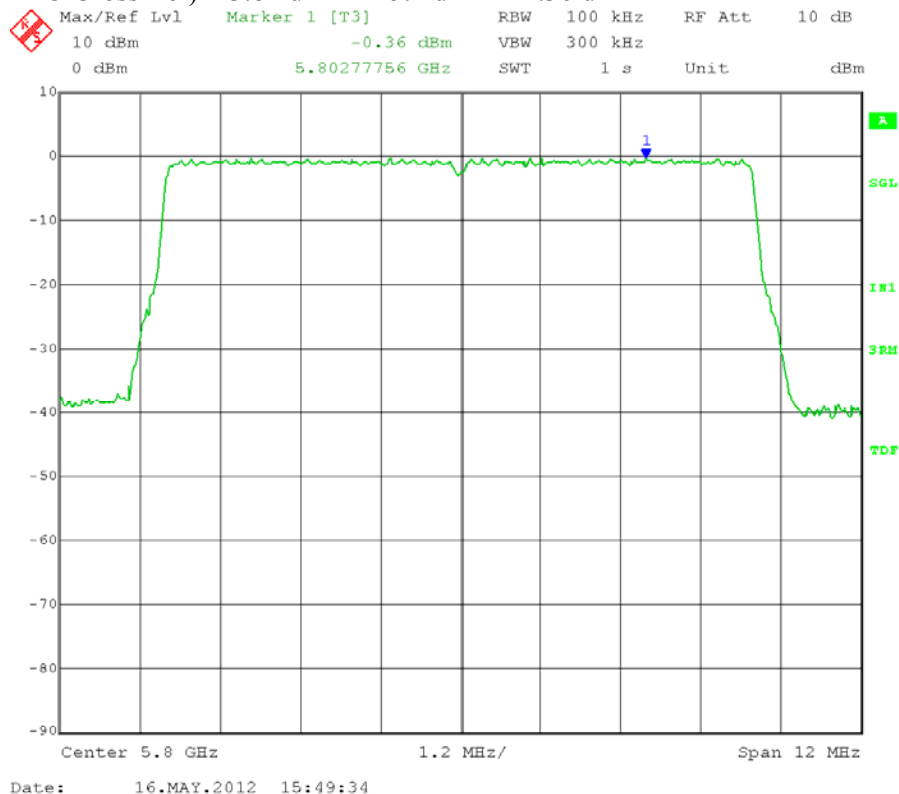

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPSD
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10 \log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.44 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.76 \text{ dBm} - 15.2 \text{ dB} = -11.44 \text{ dBm}$

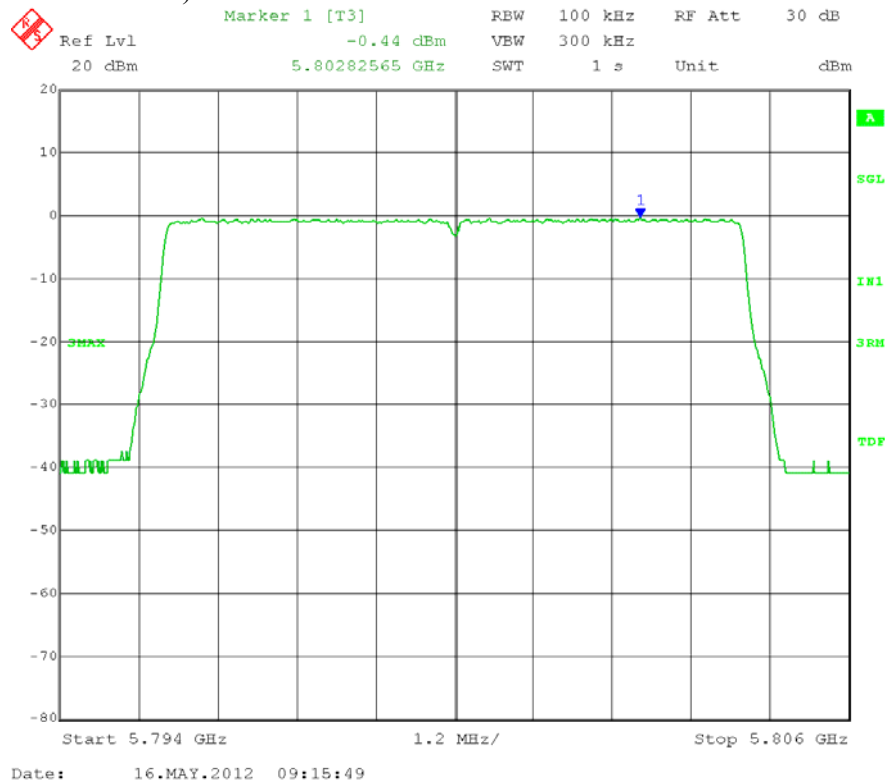

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.52 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.68 \text{ dBm} - 15.2 \text{ dB} = -11.52 \text{ dBm}$

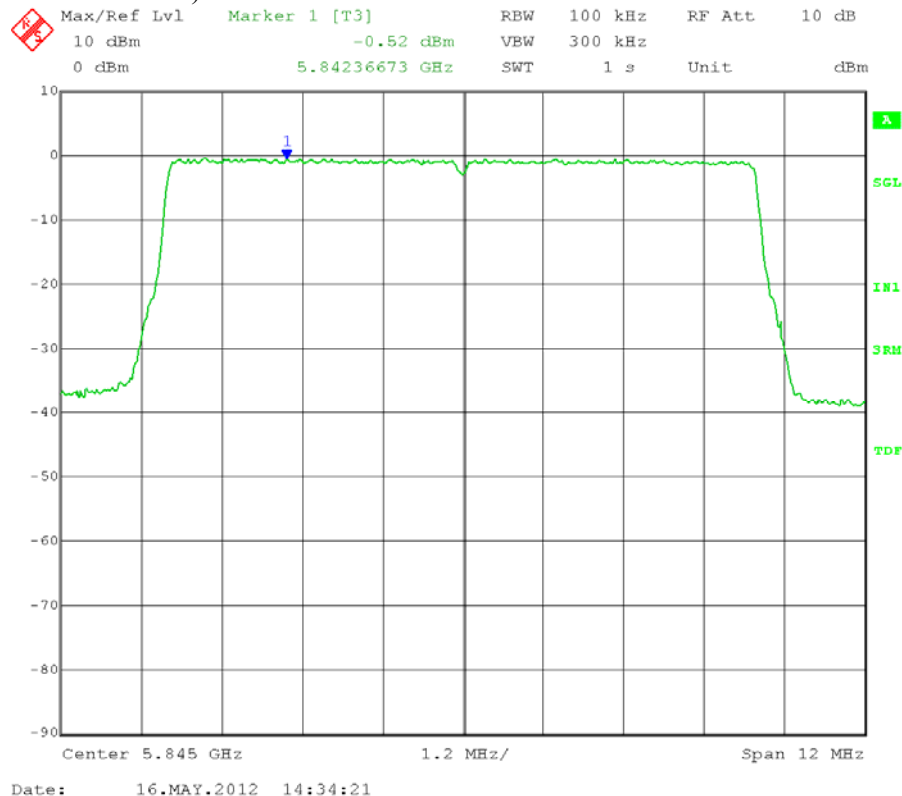

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.55 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.65 \text{ dBm} - 15.2 \text{ dB} = -11.55 \text{ dBm}$

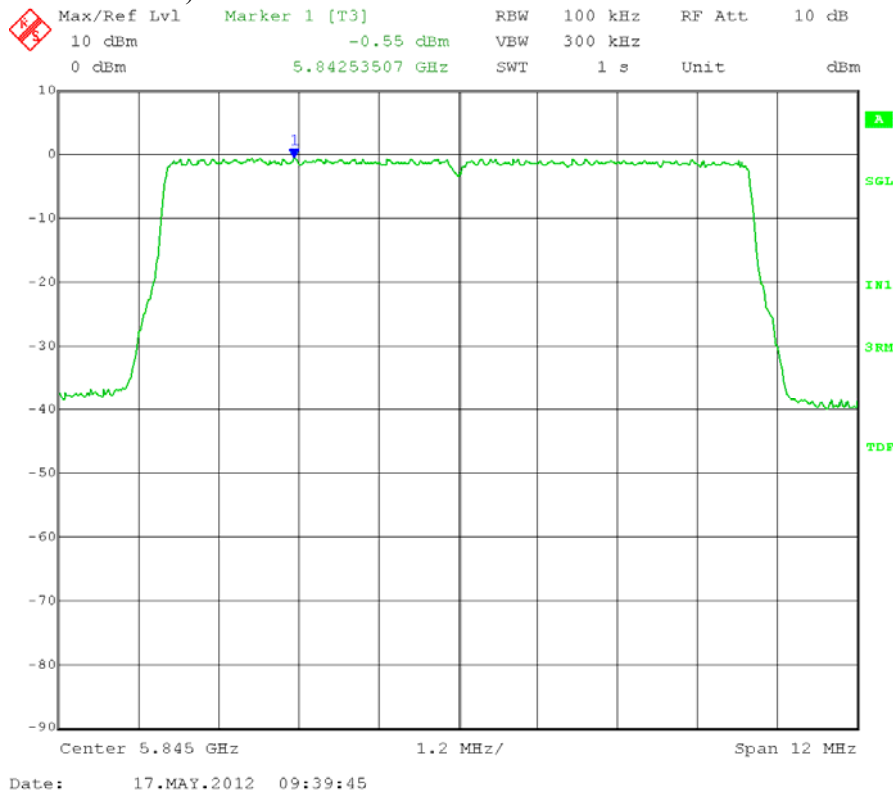

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.56 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.64 \text{ dBm} - 15.2 \text{ dB} = -12.36 \text{ dBm}$

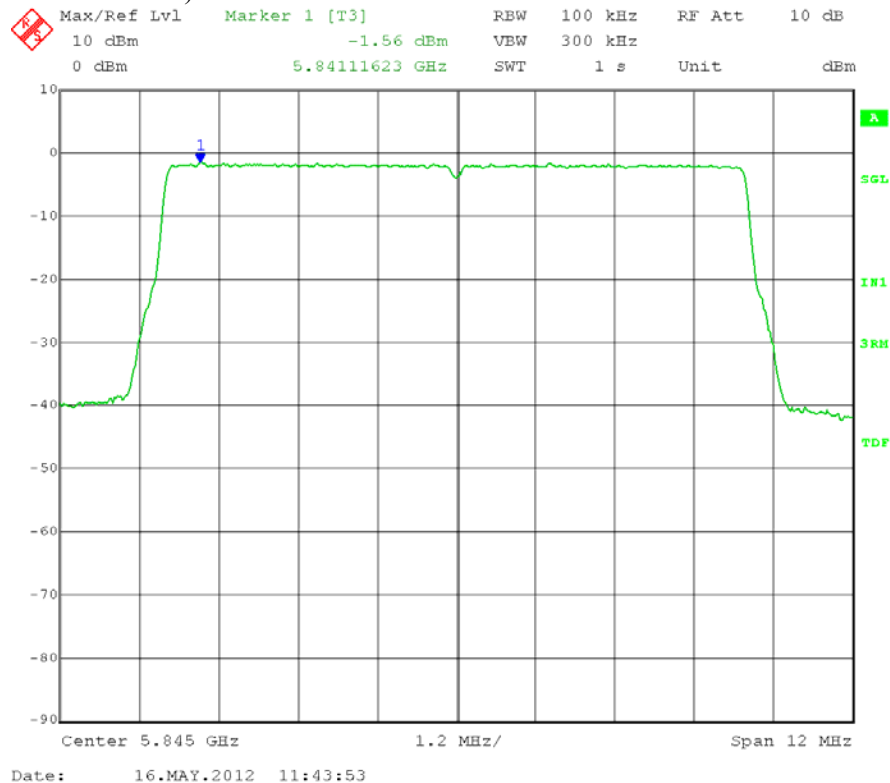

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPSD
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-2.32 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $1.88 \text{ dBm} - 15.2 \text{ dB} = -13.32 \text{ dBm}$

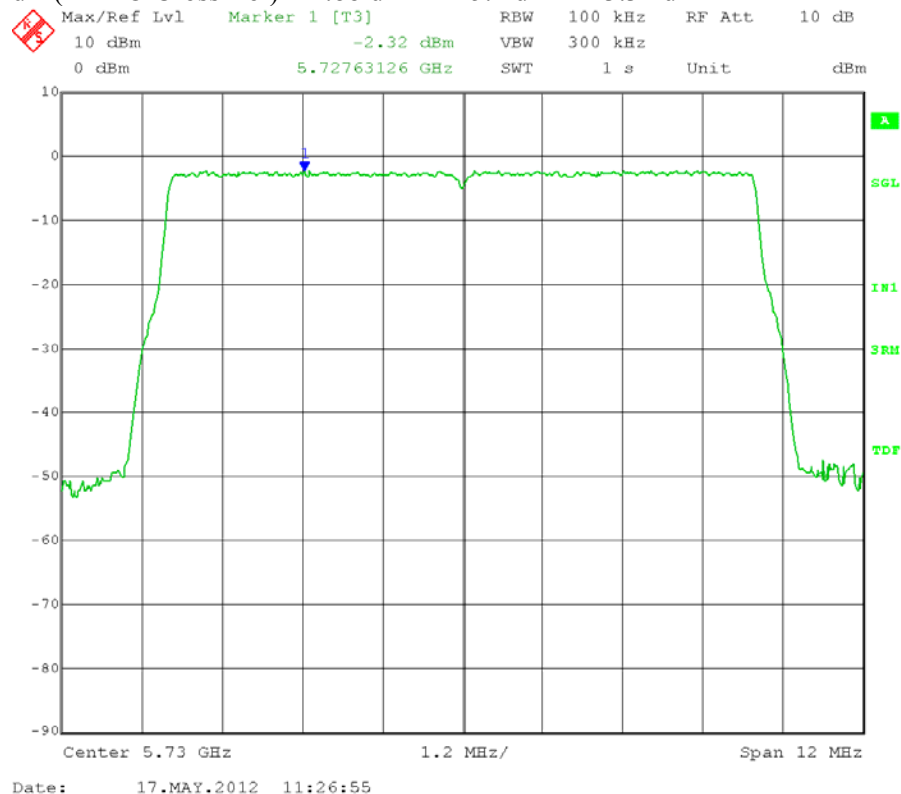

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPSD
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.93 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.27 \text{ dBm} - 15.2 \text{ dB} = -12.93 \text{ dBm}$

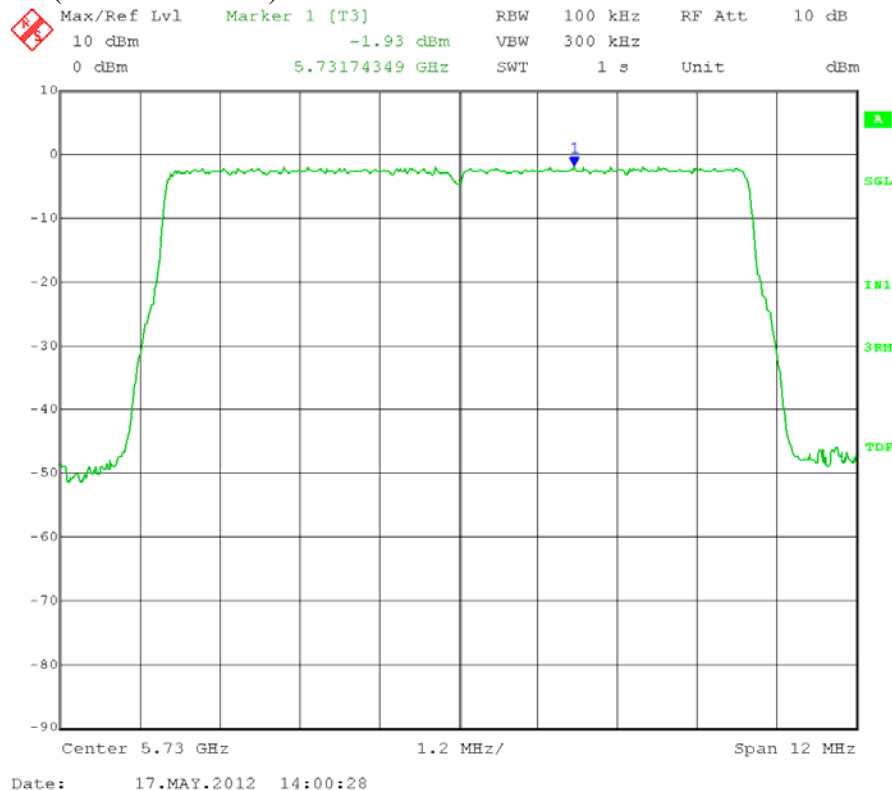

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: AVERAGE Maximum Power Spectral Density – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.3.2 – AVGPSPD
 Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
 Detector = power average (RMS); VBW \geq 300 kHz
 Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
 Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
 Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
 Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
 Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-2.06 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.14 \text{ dBm} - 15.2 \text{ dB} = -13.06 \text{ dBm}$

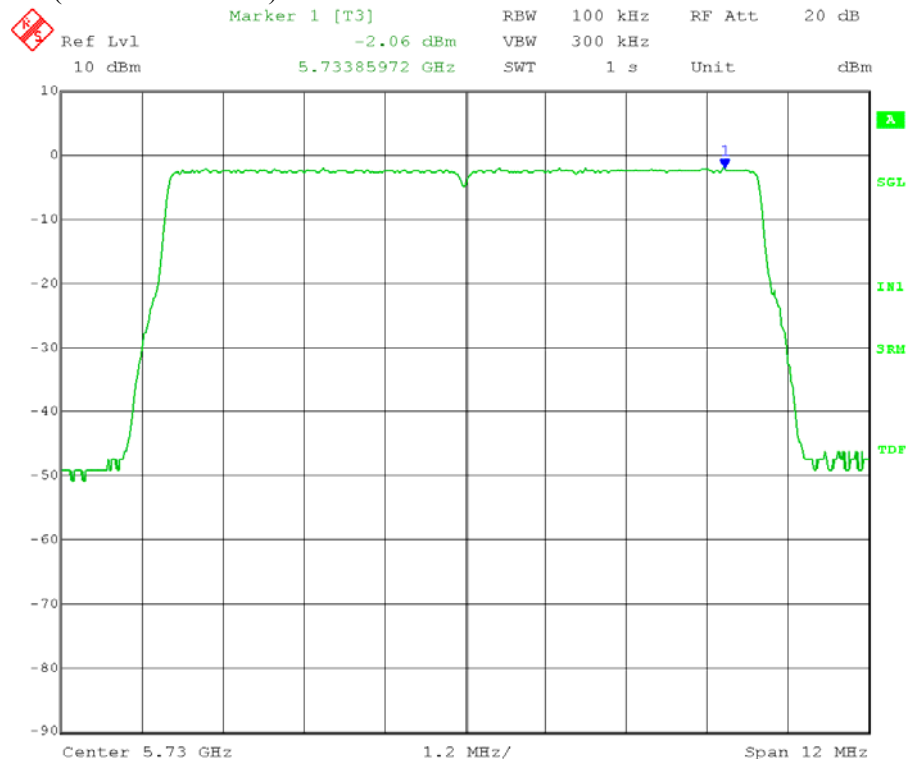

Date: 15.MAY.2012 14:36:45

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPSD
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.08 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.12 \text{ dBm} - 15.2 \text{ dB} = -12.08 \text{ dBm}$

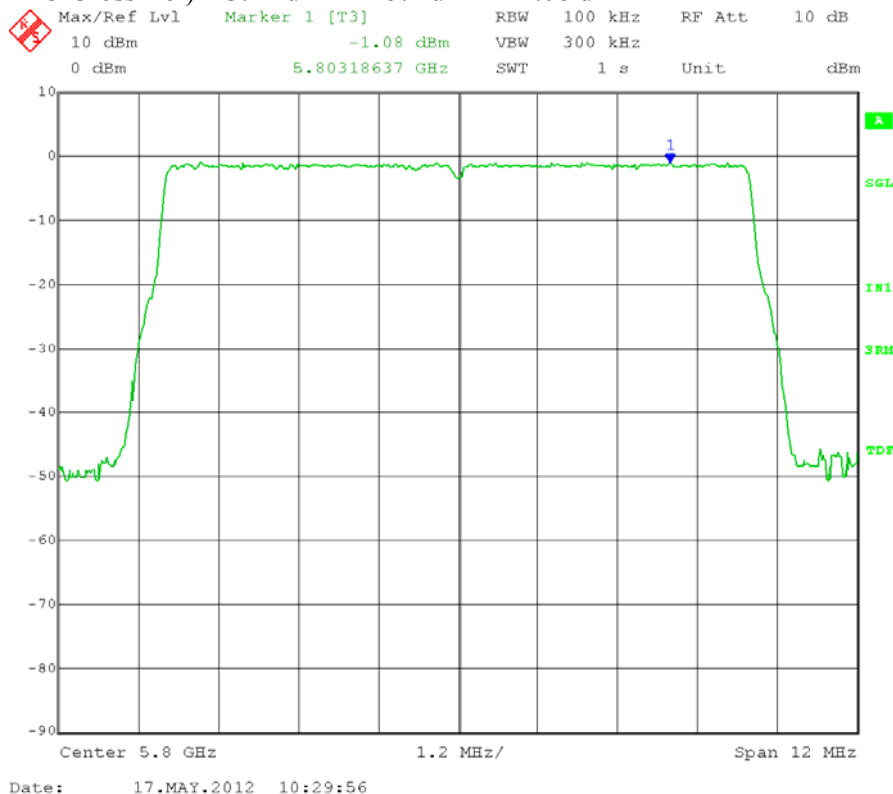

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPSD
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-0.80 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.40 \text{ dBm} - 15.2 \text{ dB} = -11.8 \text{ dBm}$

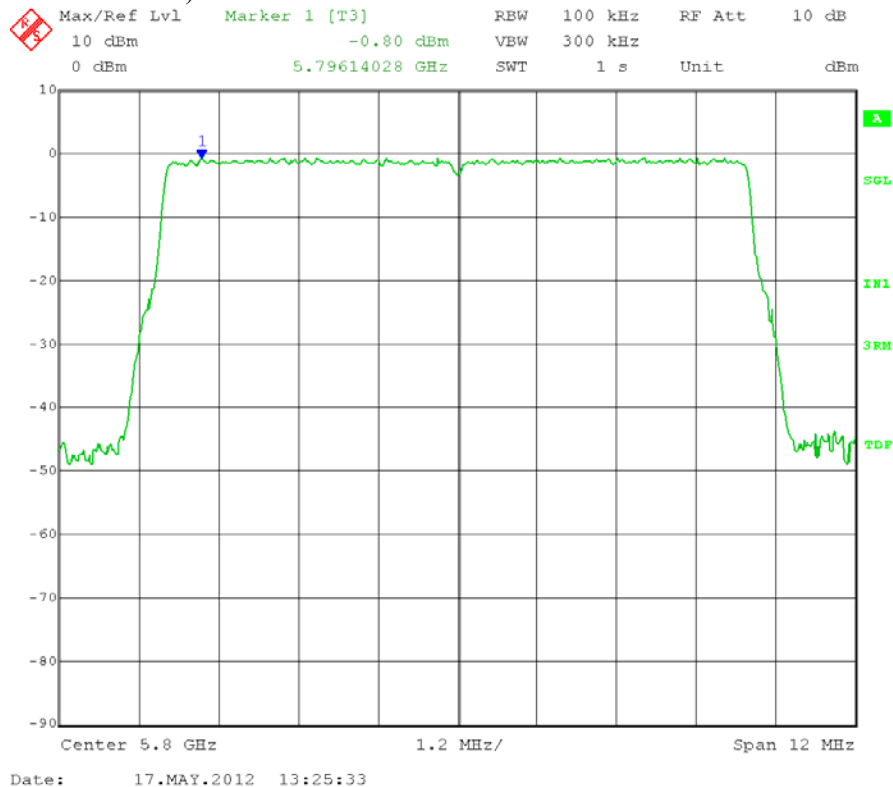

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.05 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.15 \text{ dBm} - 15.2 \text{ dB} = -12.05 \text{ dBm}$

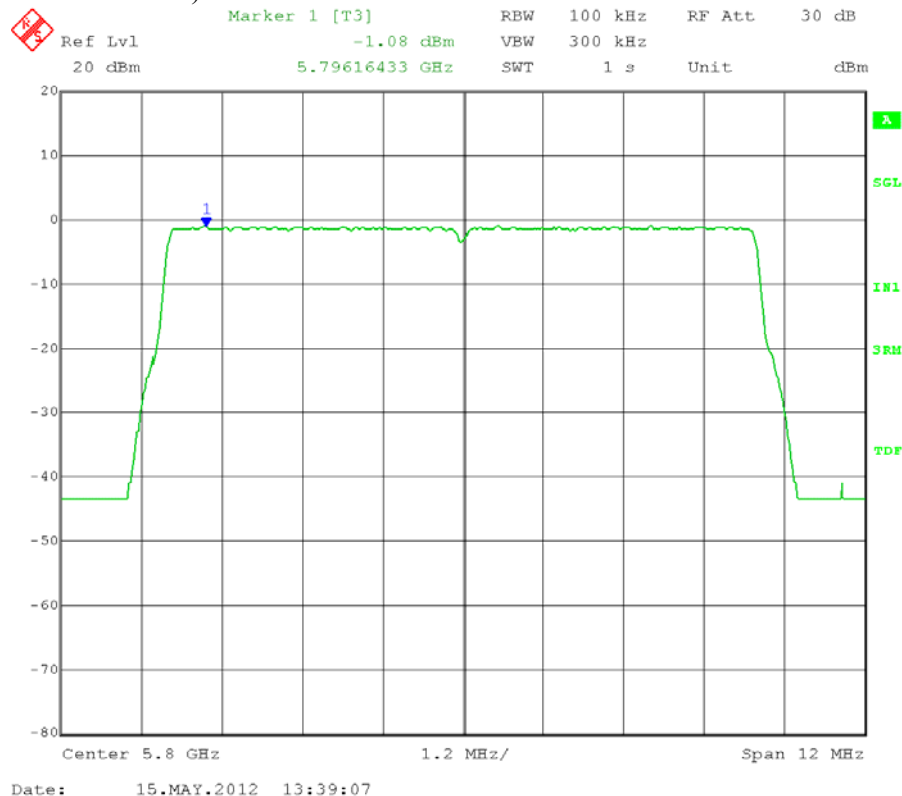

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N)$ dB, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.31 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.89 \text{ dBm} - 15.2 \text{ dB} = -12.31 \text{ dBm}$

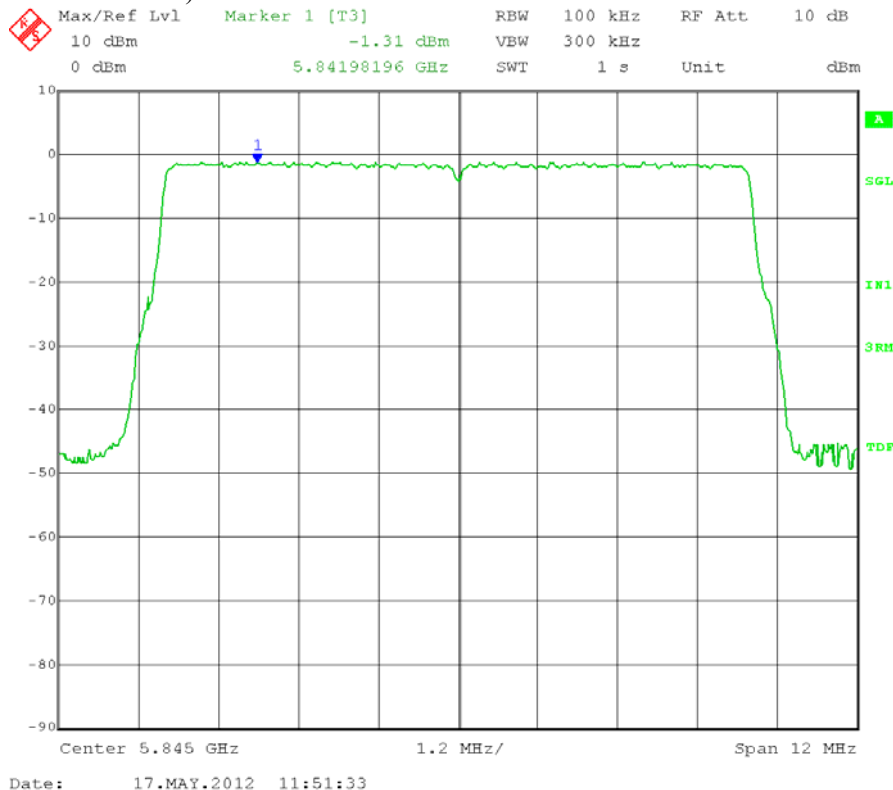

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.08 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $3.12 \text{ dBm} - 15.2 \text{ dB} = -12.08 \text{ dBm}$

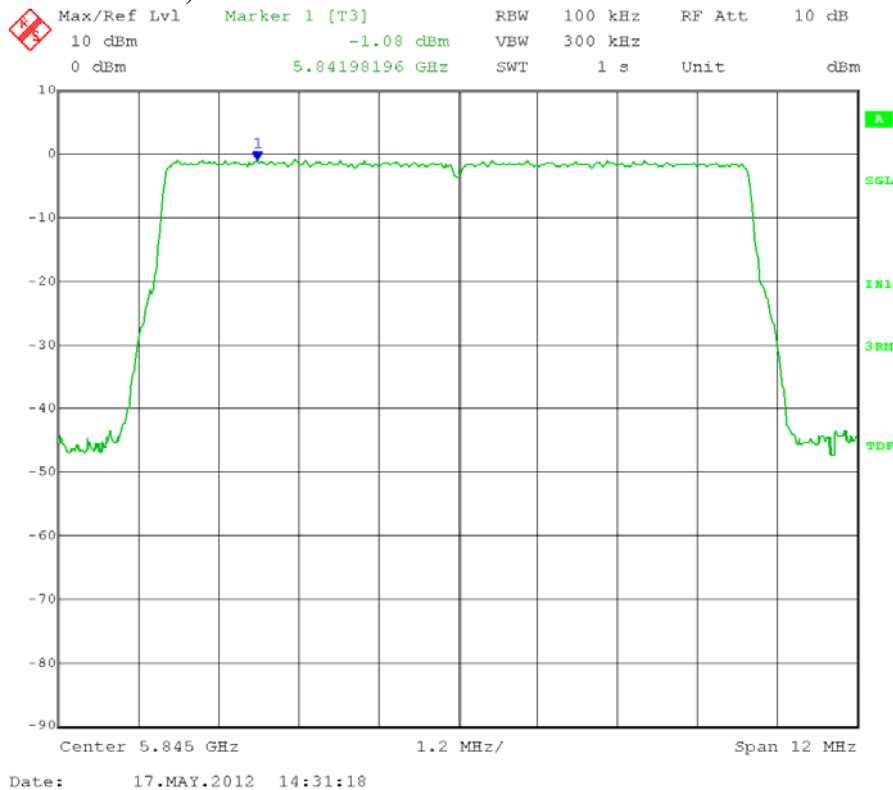

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: AVERAGE Maximum Power Spectral Density – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.3.2 – AVGPS
Operator: Craig B

Span = 5-30% greater than the EBW; RBW = 100 kHz
Detector = power average (RMS); VBW \geq 300 kHz
Number of measurement points in sweep $\geq 2 \times (\text{span}/\text{RBW})$
Sweep time: $\geq 10 \times (\text{number of measurement points}) \times (\text{transmission symbol period})$
 $= 10 \times 500 \times 28 \mu\text{s} = 0.14 \text{ sec}$
Trace mode: single sweep


Set marker to maximum level within the fundamental EBW.
Scale the observed power level to an equivalent level in 3 kHz by reducing the measured power by 15.2 dB (bandwidth correction factor = $10\log(3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$)

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(e)]: 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

Measure-and-sum technique for MIMO with Cross-Polarized antenna:
Measure and add $10 \log(N) \text{ dB}$, where N is the number of outputs.
 $= 10 \log(2) = 3 \text{ dB}$

Maximum PSD = $-1.46 \text{ dBm} + 1.2 \text{ dB}$ for Cambium Networks connectorized cable + 3 dB (MIMO Cross-Pol) = $2.74 \text{ dBm} - 15.2 \text{ dB} = -12.46 \text{ dBm}$

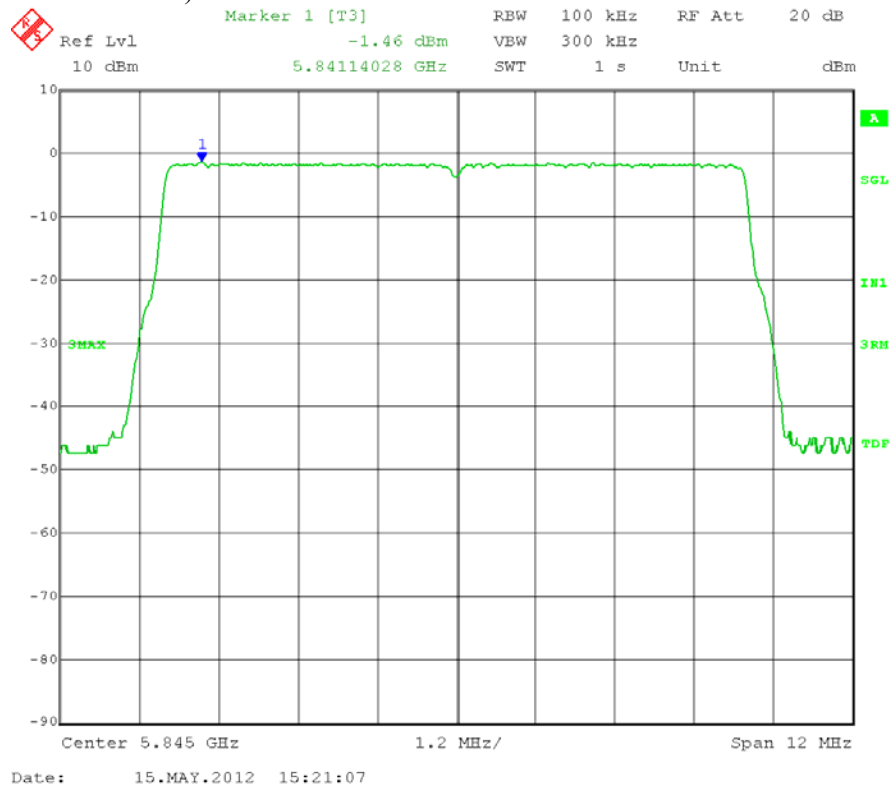



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A5.0 Maximum Unwanted Emission Levels – Conducted

Rule Section: Section 15.247(d)
RSS-210 A8.5

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.4.1.2 – Unwanted Emissions

Description: RBW = 100 kHz
VBW \geq 300 kHz
Span = spectrum to be examined – (Unwanted Emissions)
Detector = peak
Sweep = auto couple
Trace mode = max hold

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Limit: 30 dB below maximum in-band average PSD level (maximum level in any 100 kHz band). Average output power procedure was used to measure the fundamental emission power


Results: Passed

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

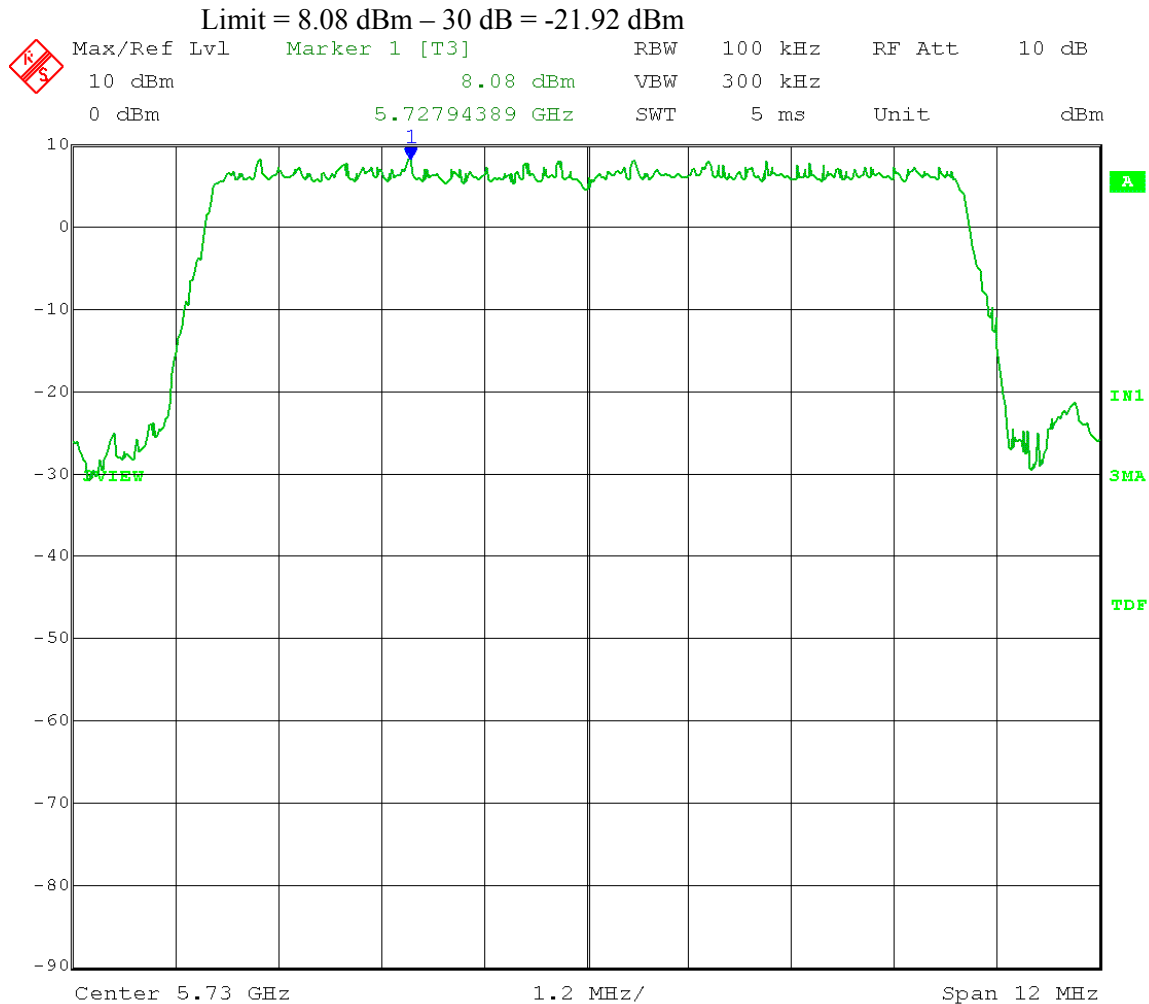


Date: 16.MAY.2012 13:36:48

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

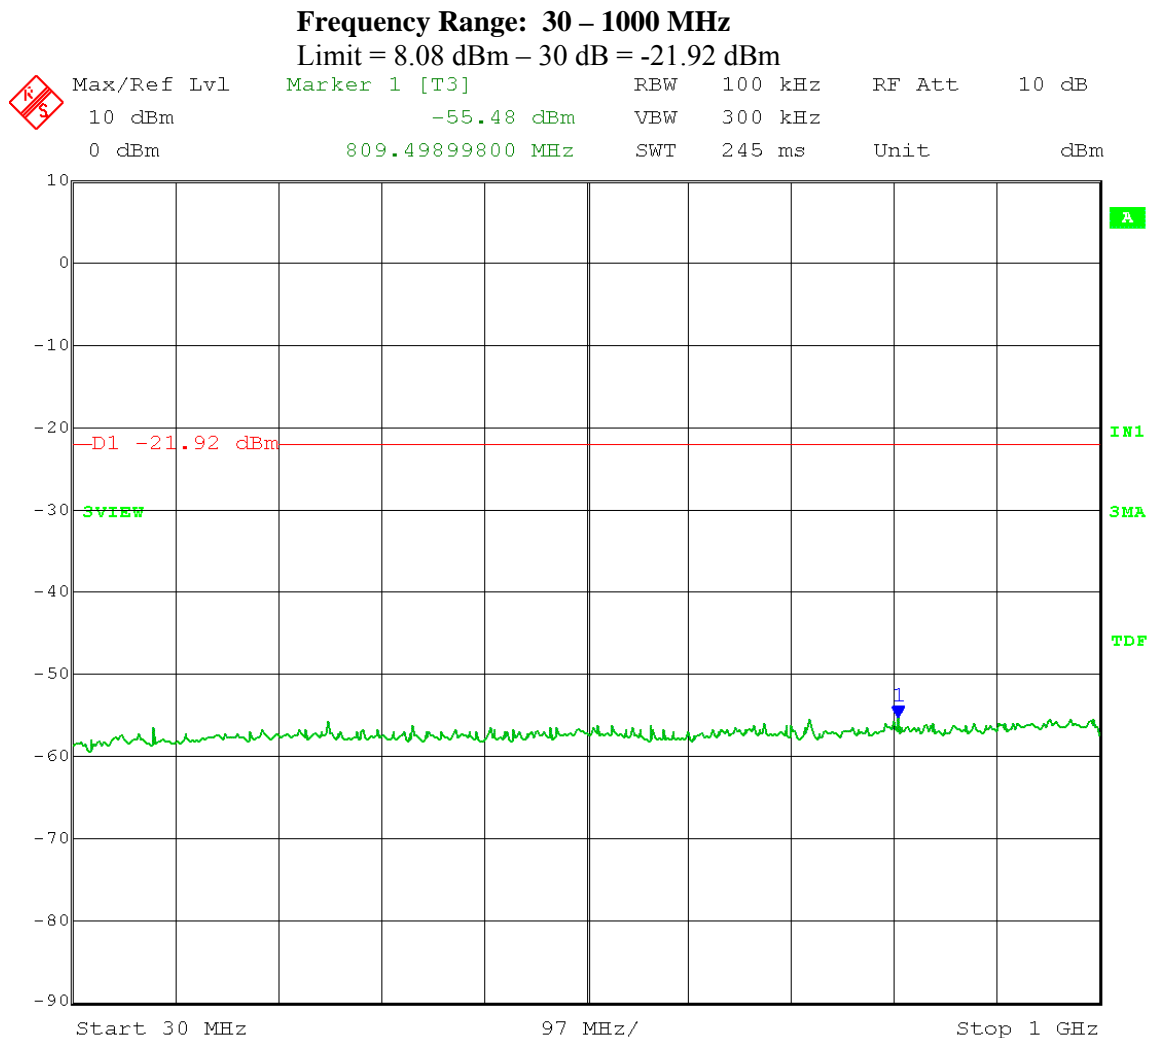


Date: 16.MAY.2012 13:52:01

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

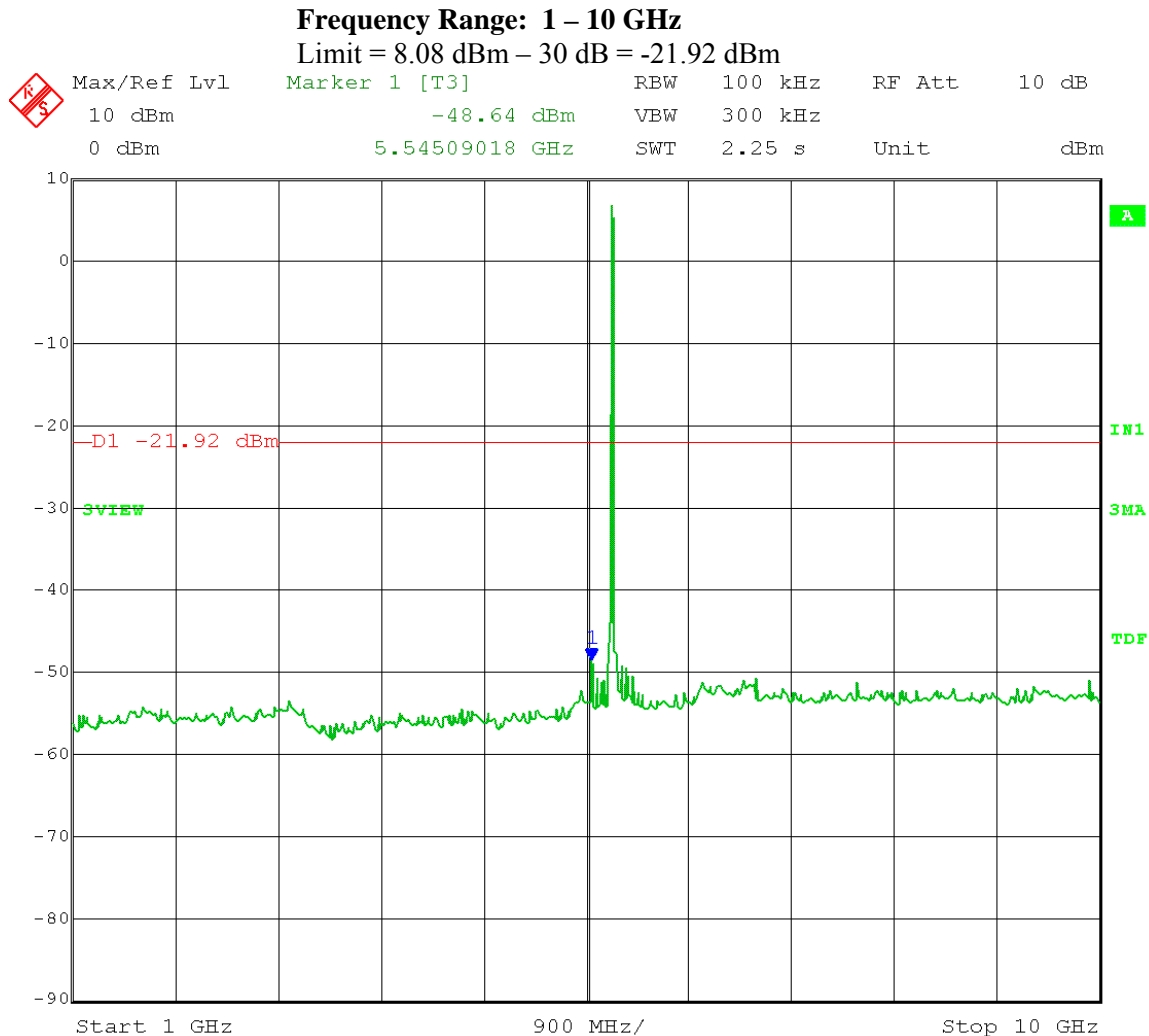


Date: 16.MAY.2012 13:42:43

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

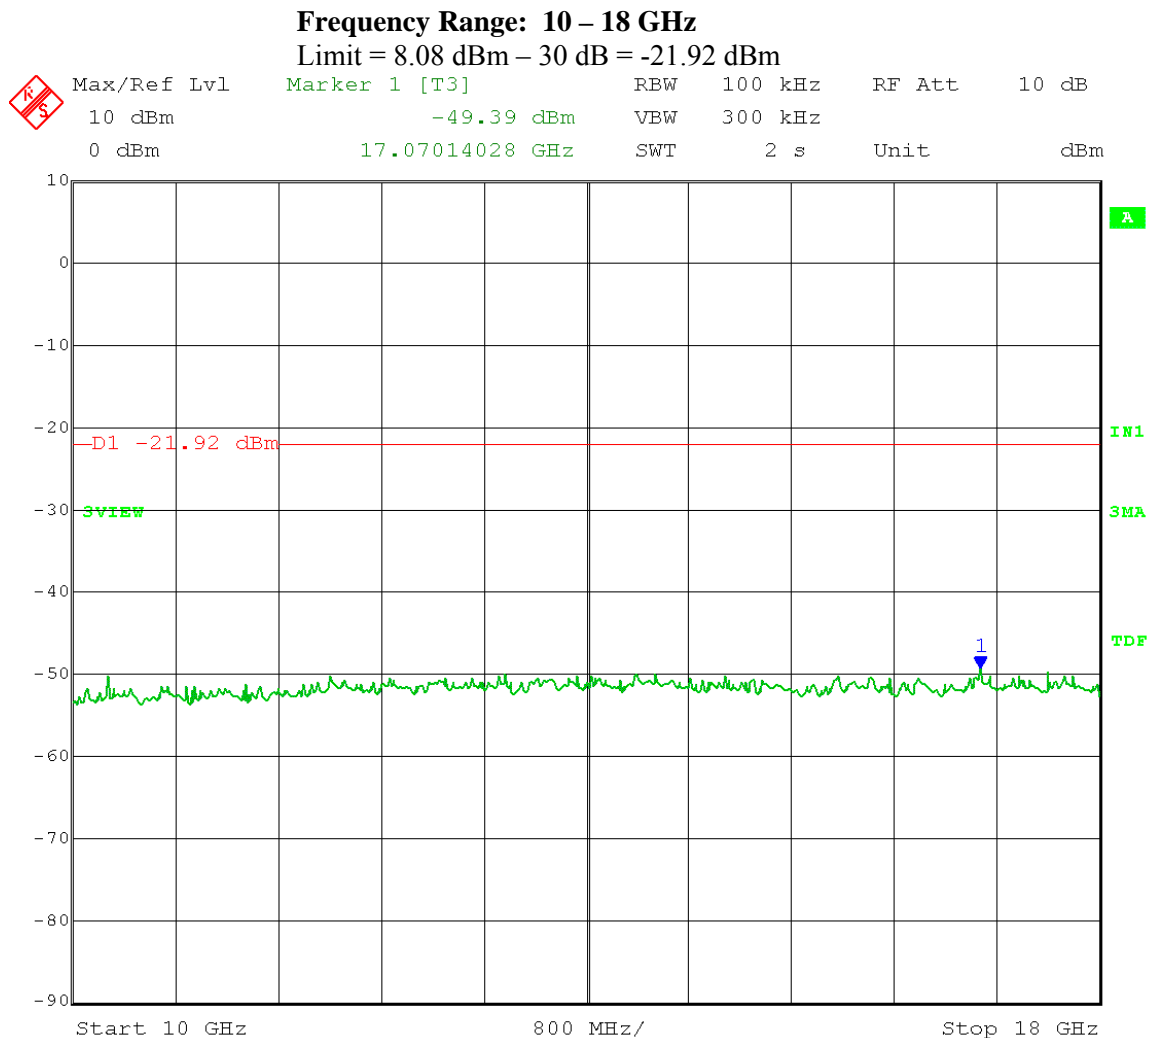


Date: 16.MAY.2012 13:43:53

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

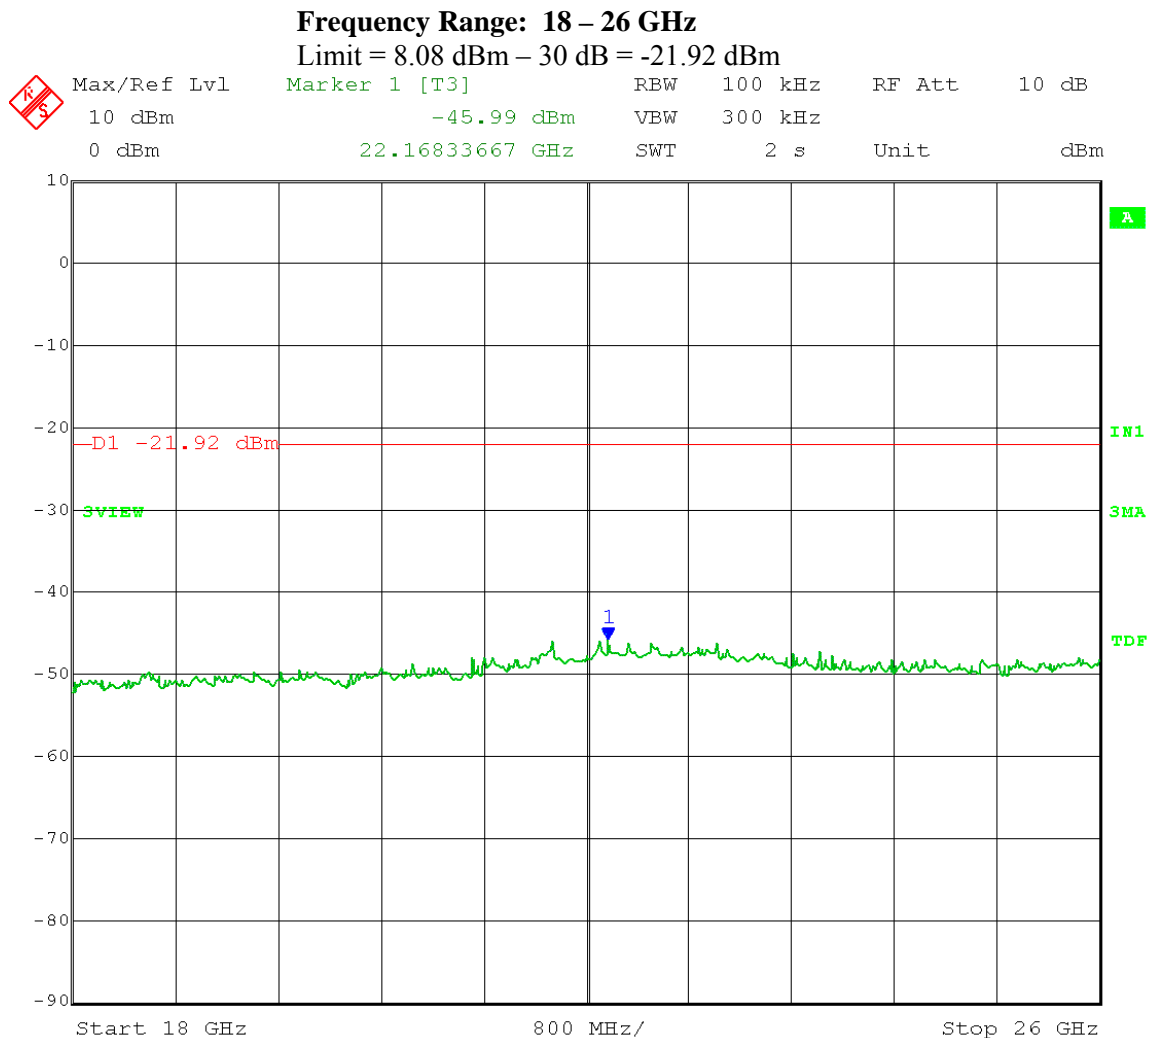


Date: 16.MAY.2012 13:45:18

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

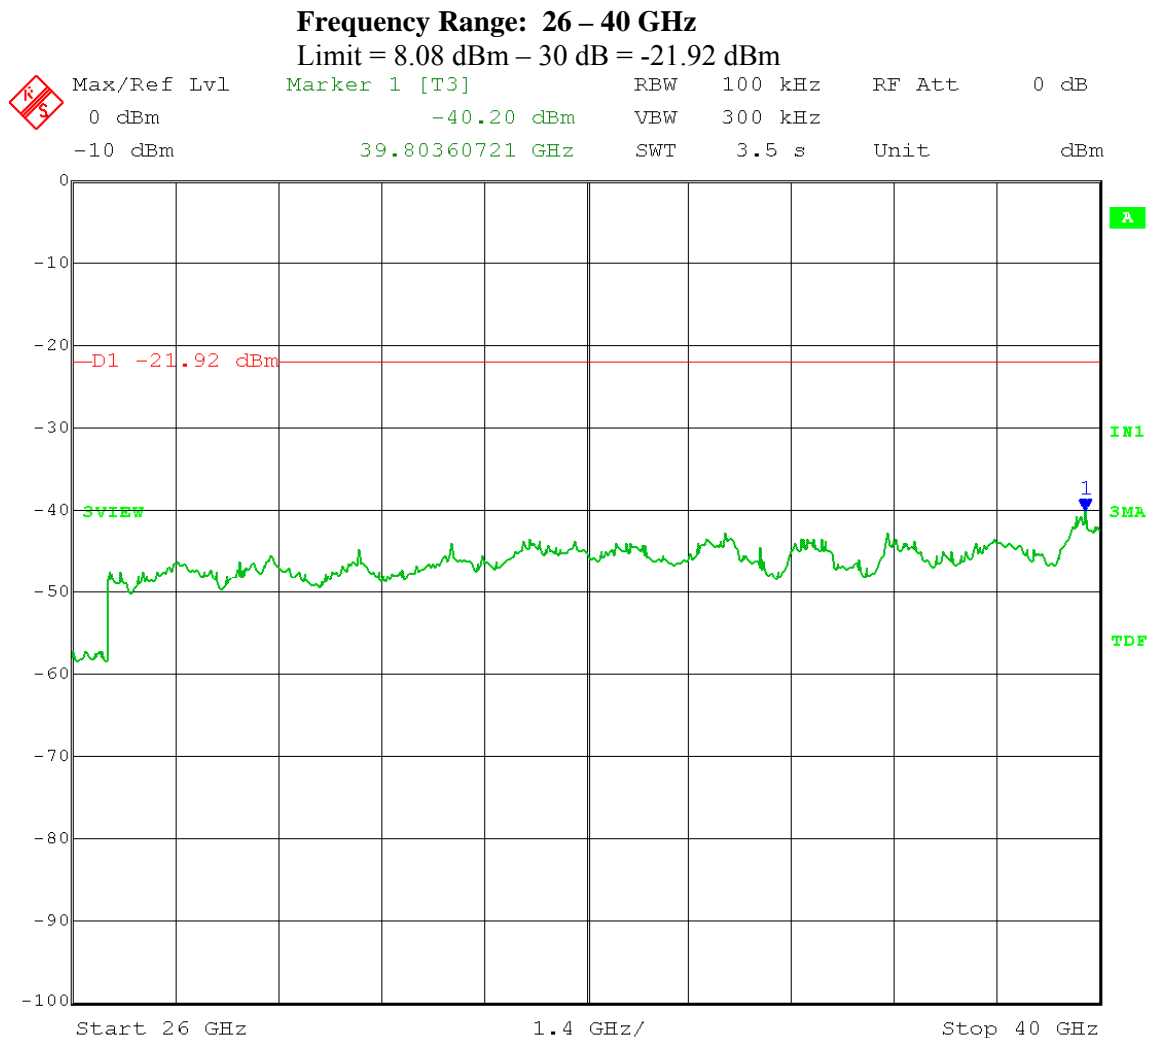


Date: 16.MAY.2012 13:49:03

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

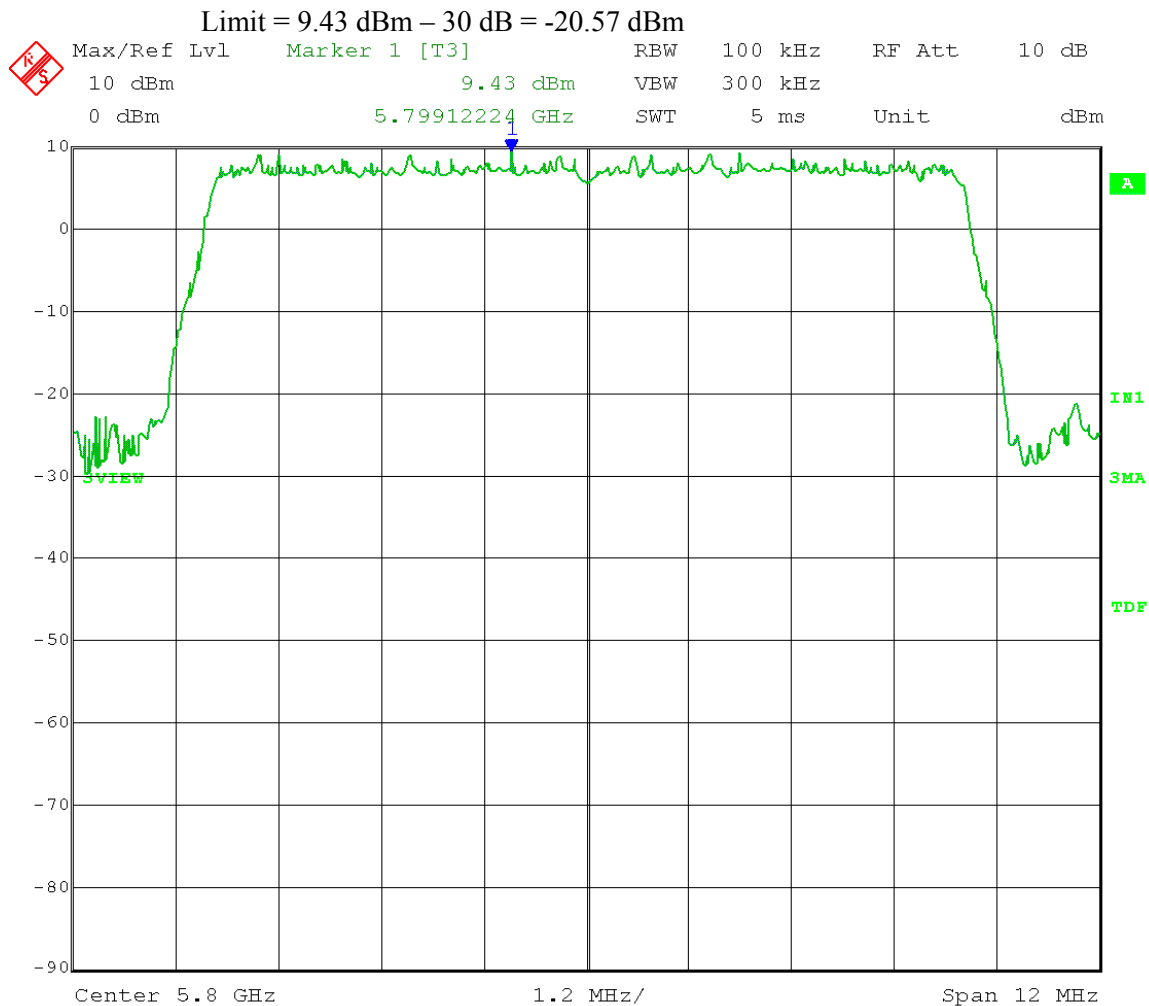


Date: 16.MAY.2012 12:54:46

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

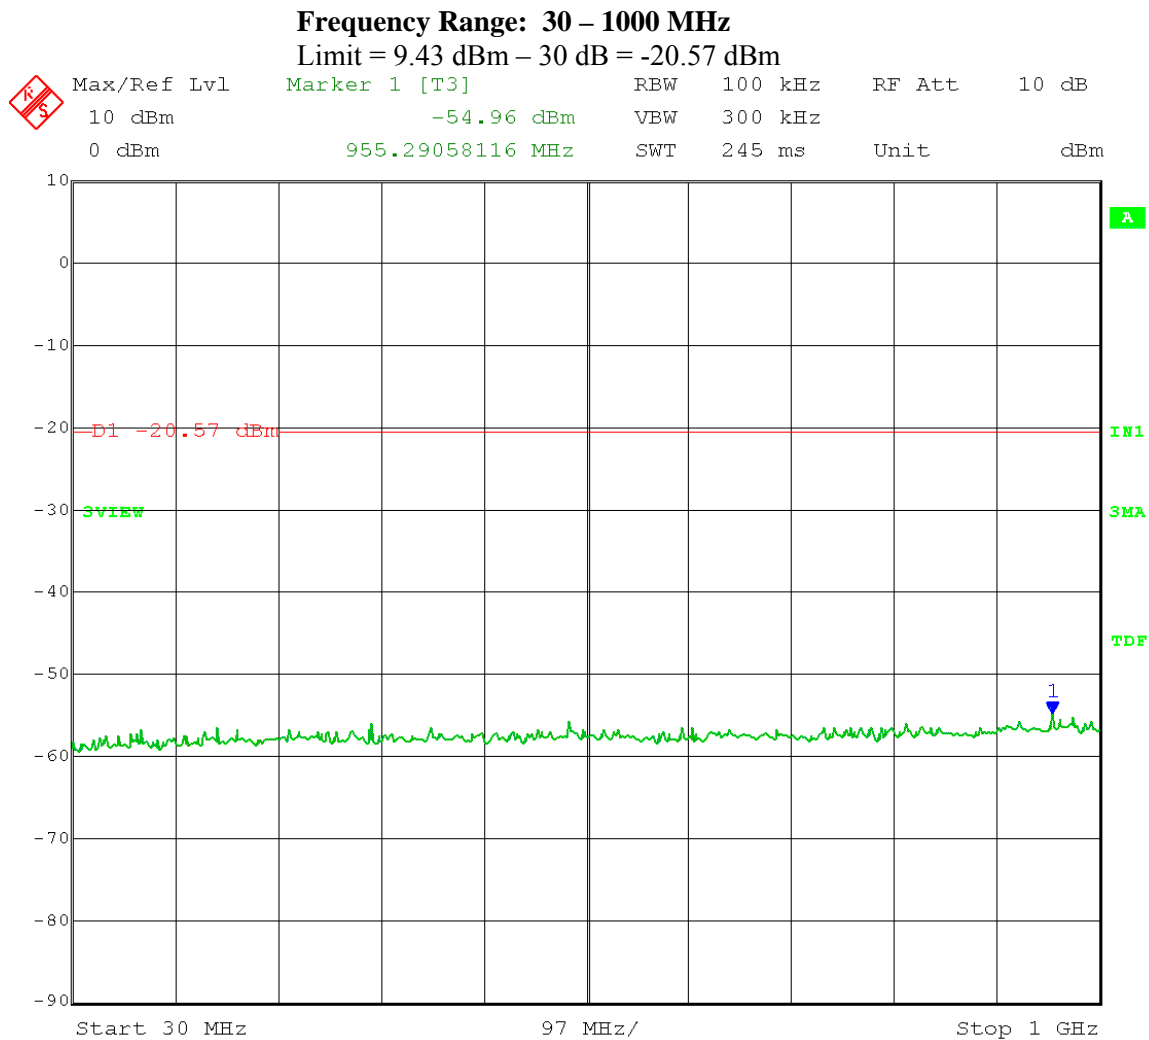


Date: 16.MAY.2012 13:02:33

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

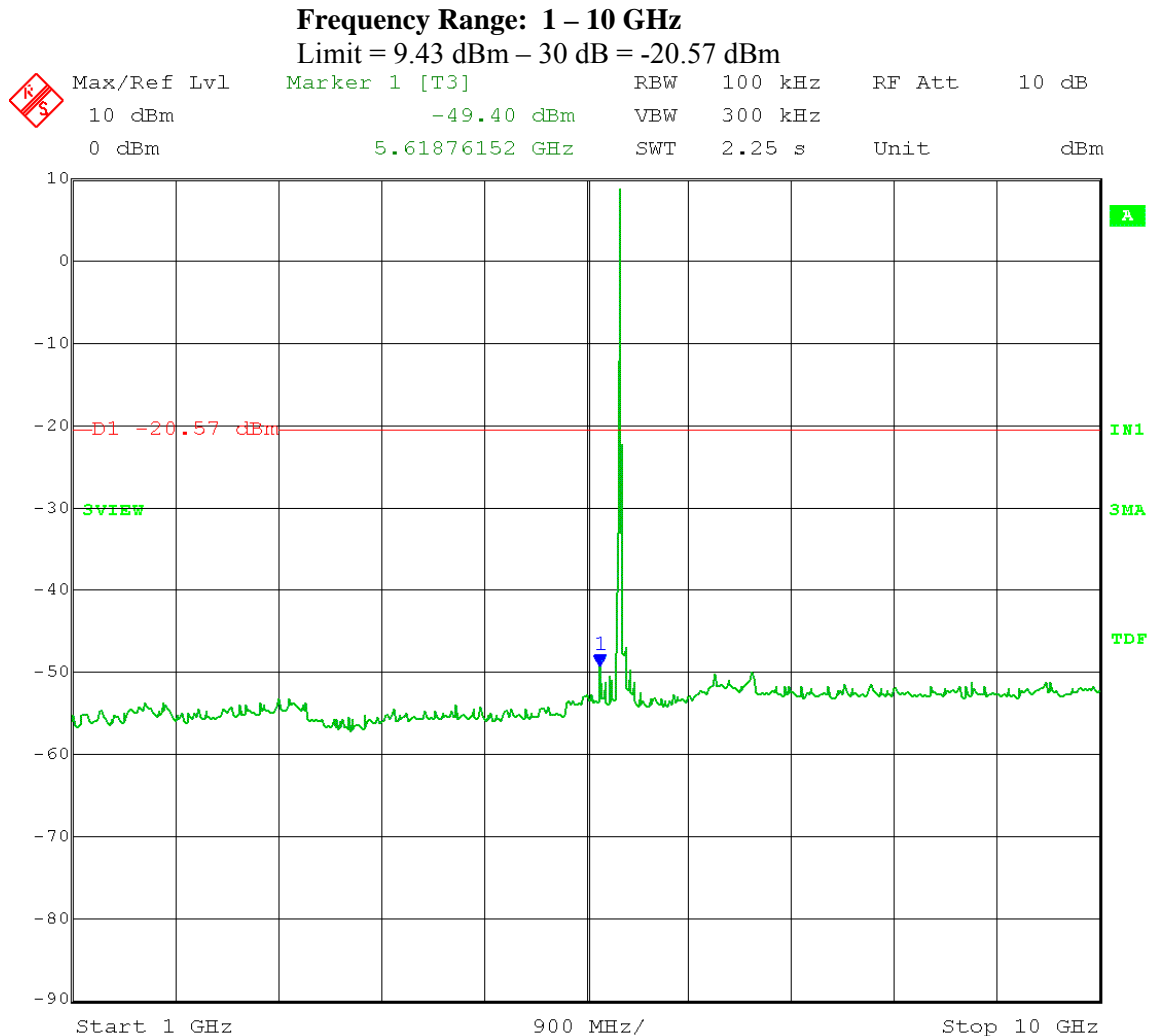


Date: 16.MAY.2012 12:57:25

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

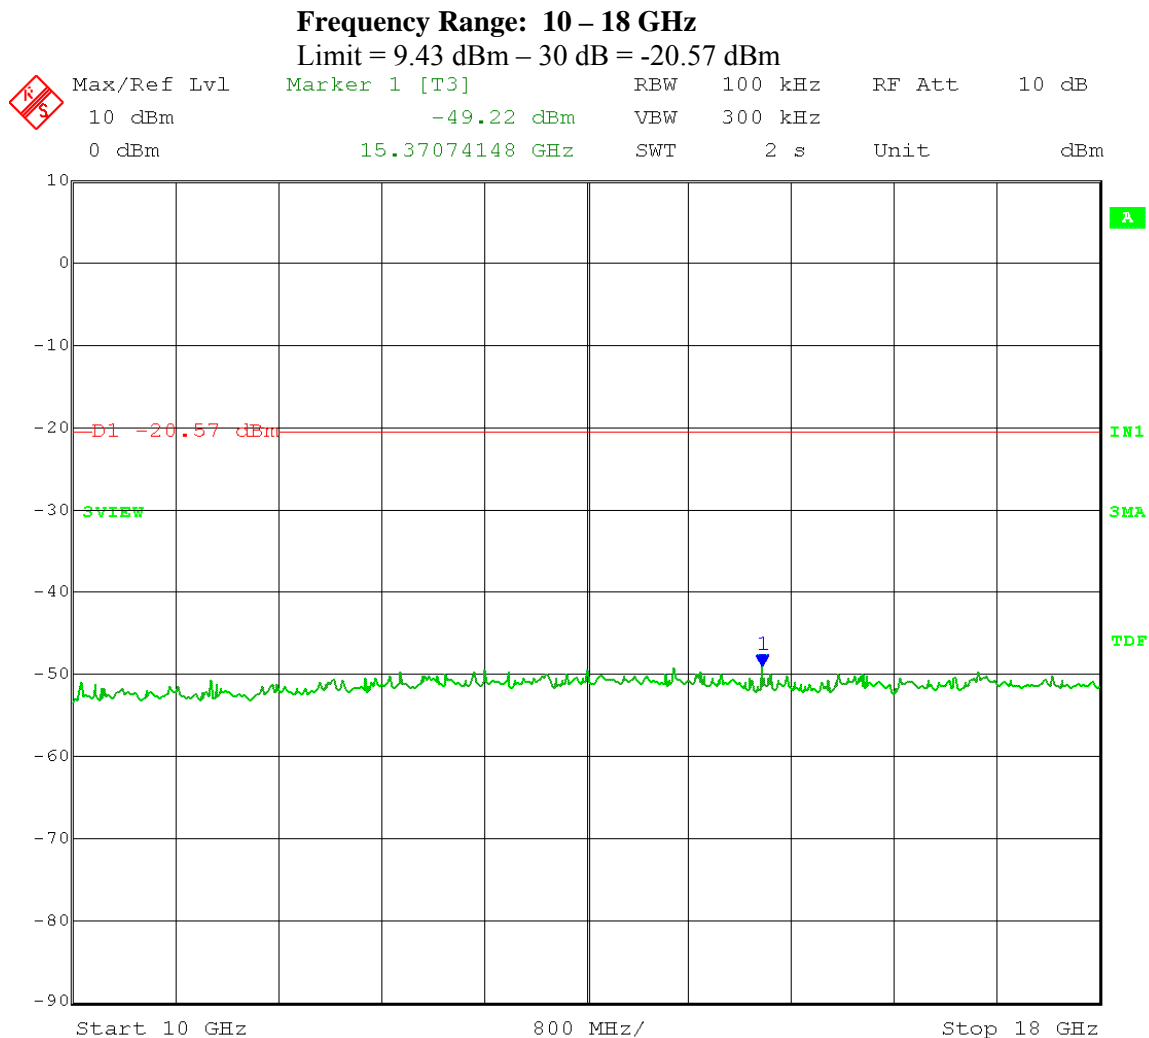


Date: 16.MAY.2012 12:58:45

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adspiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

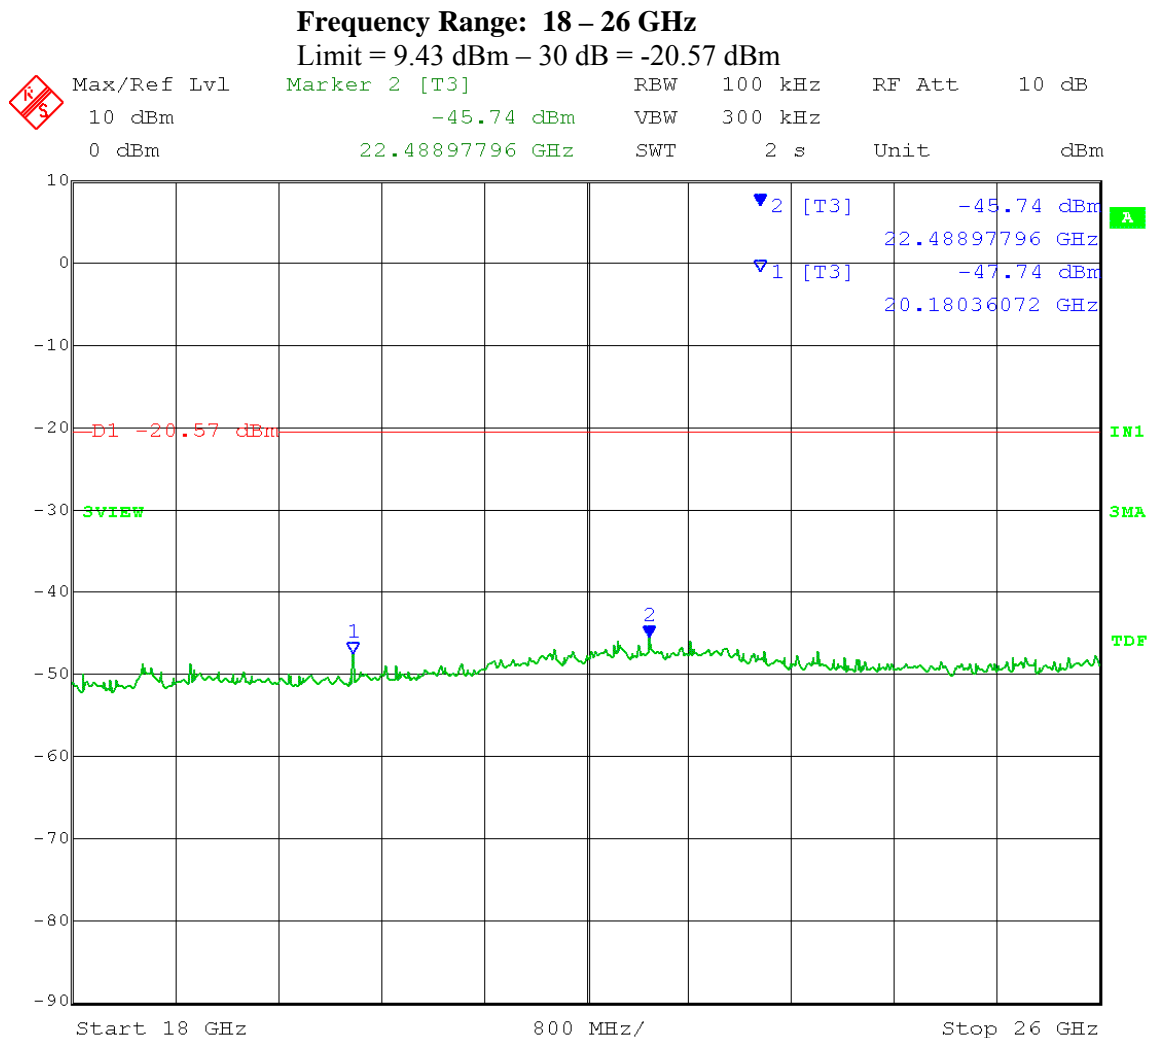


Date: 16.MAY.2012 12:59:59

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

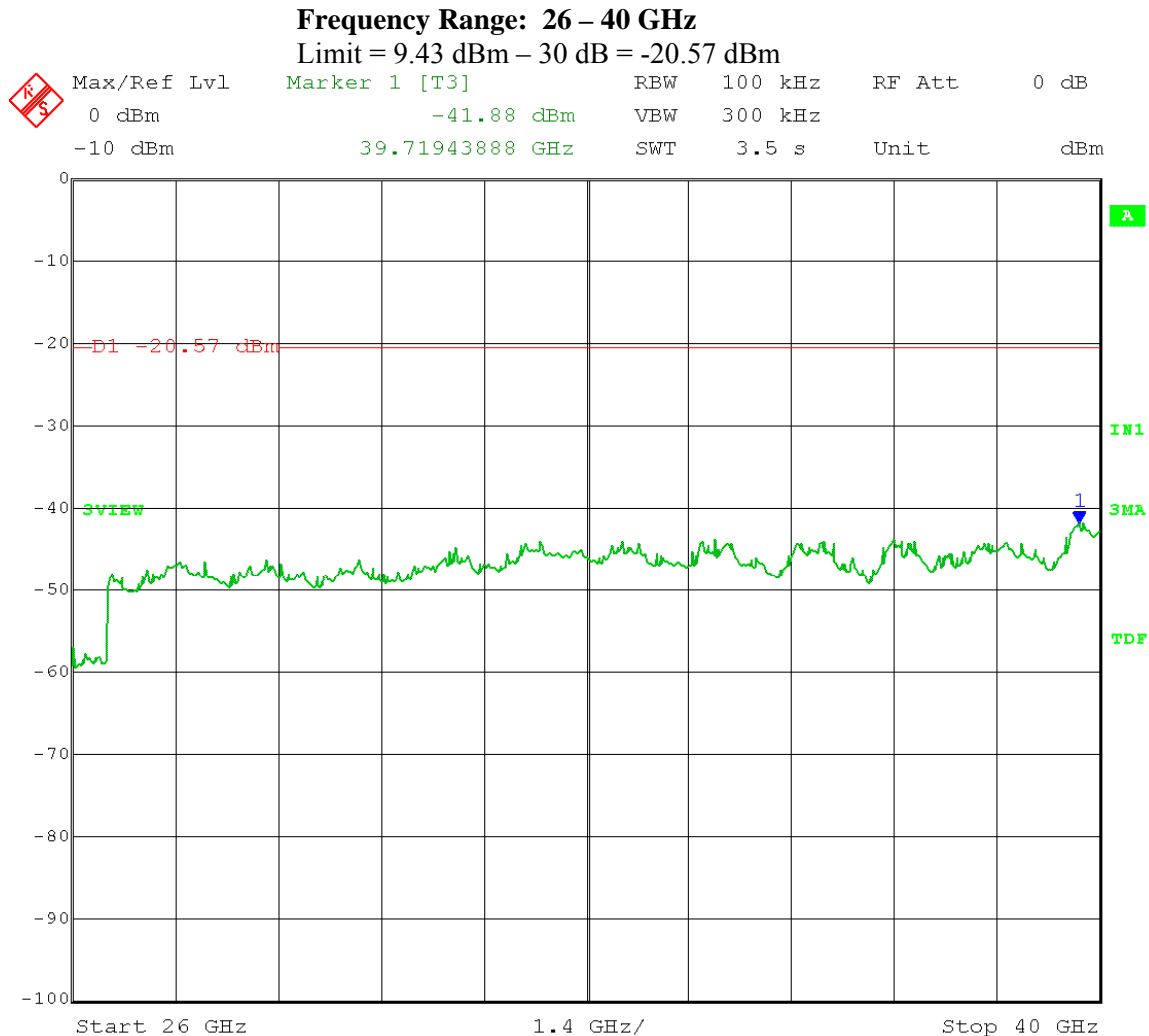


Date: 16.MAY.2012 13:01:15

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

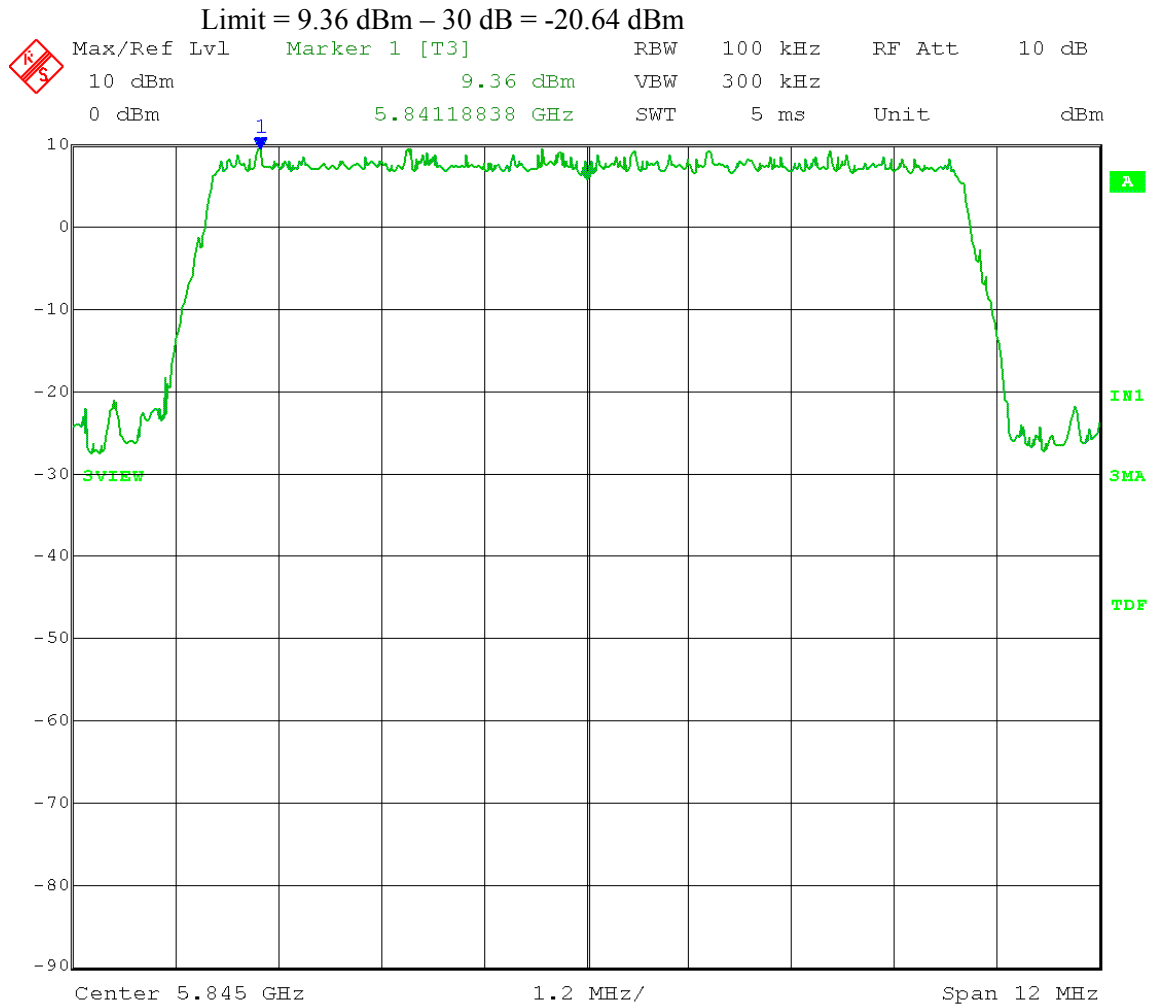


Date: 16.MAY.2012 14:09:33

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

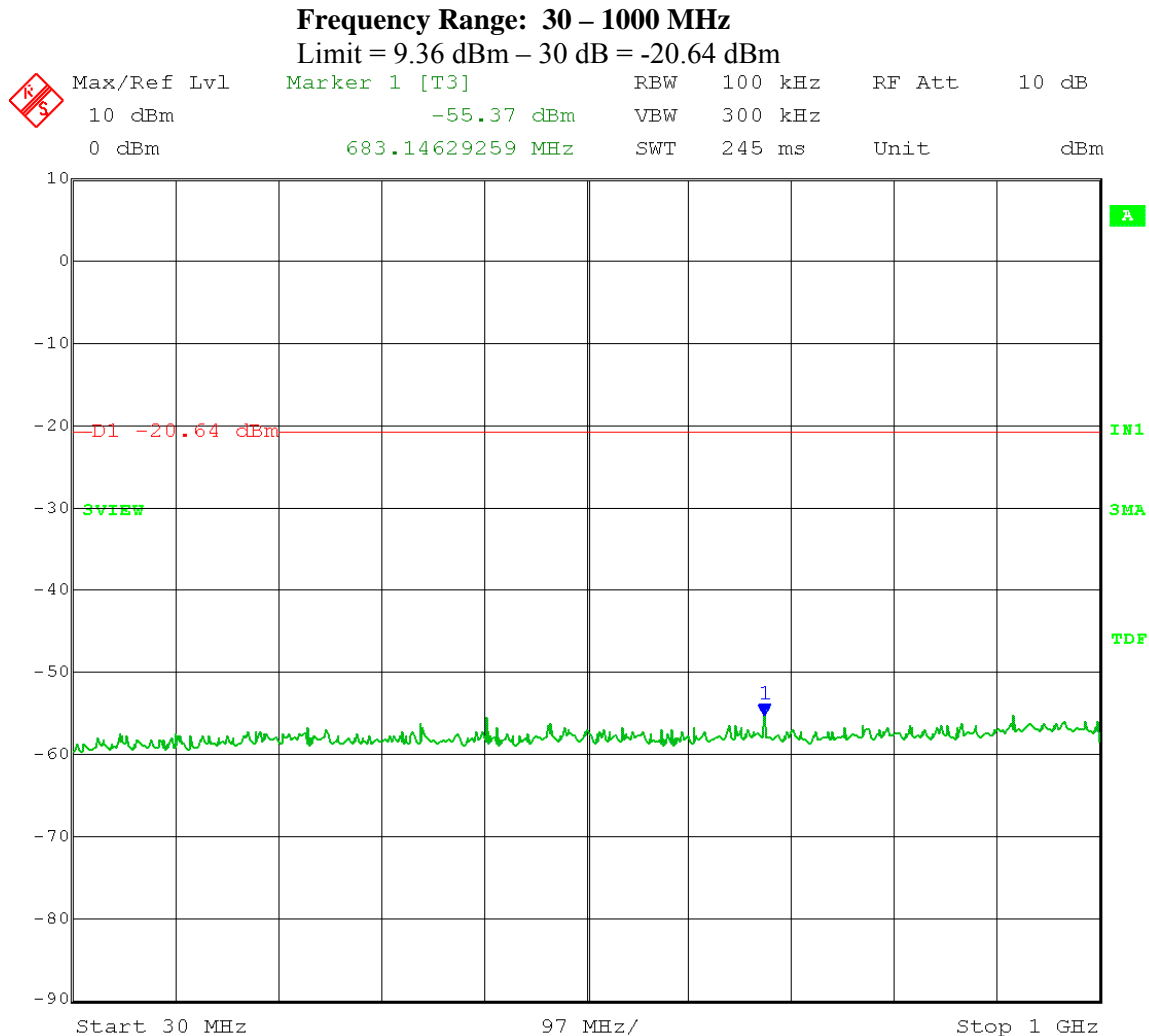


Date: 16.MAY.2012 14:32:12

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

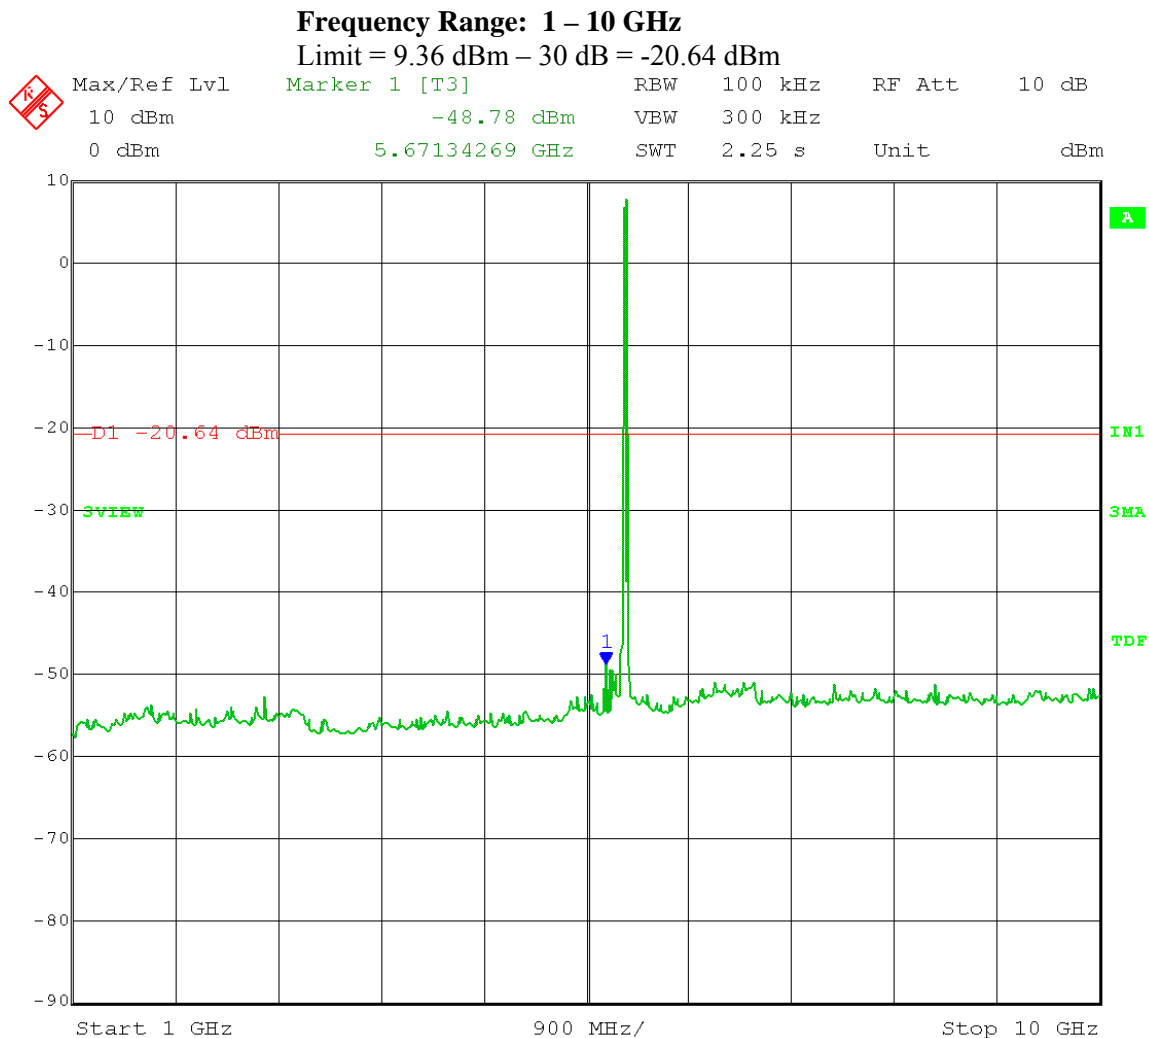


Date: 16.MAY.2012 14:23:35

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

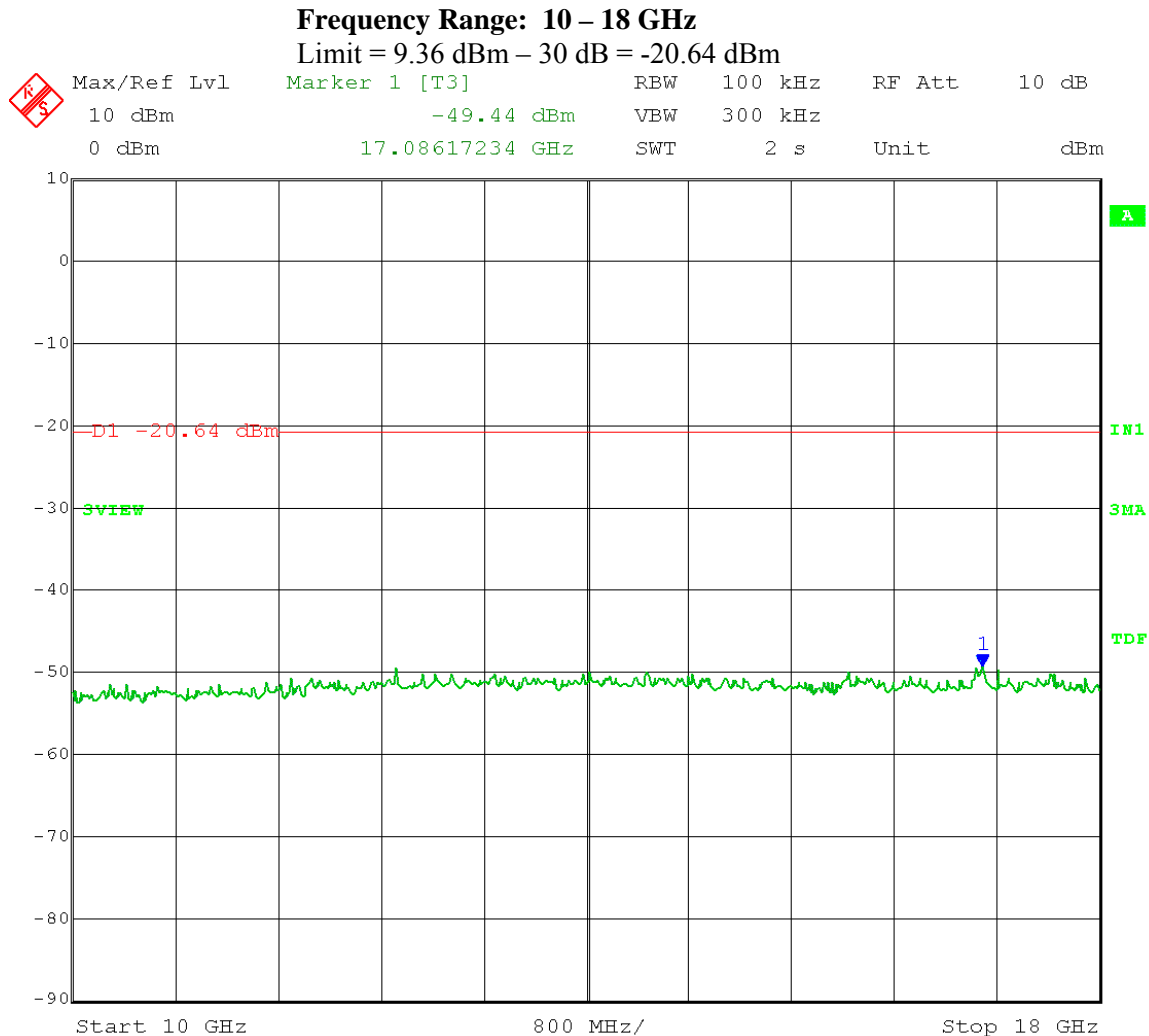


Date: 16.MAY.2012 14:24:55

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

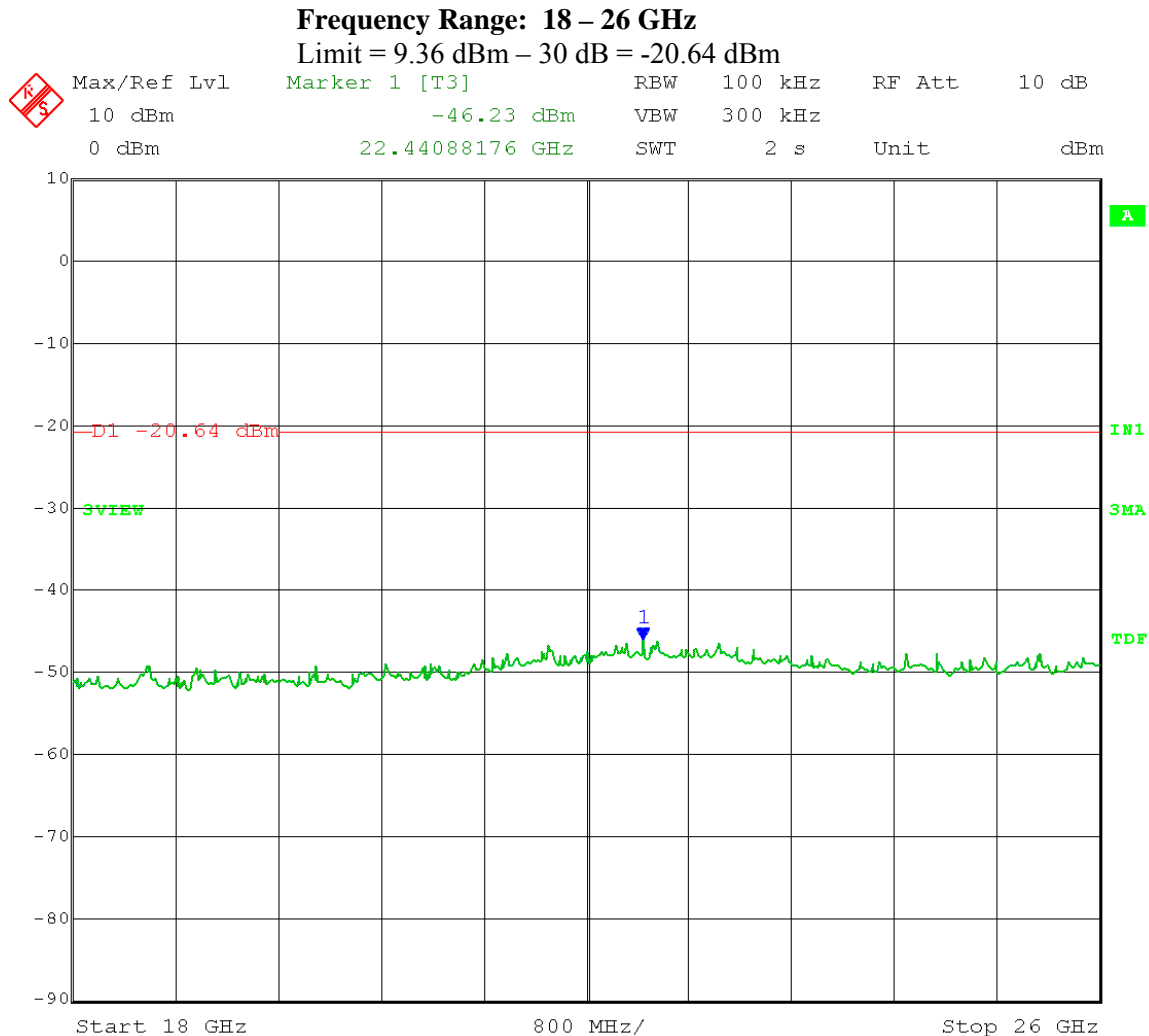


Date: 16.MAY.2012 14:26:11

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

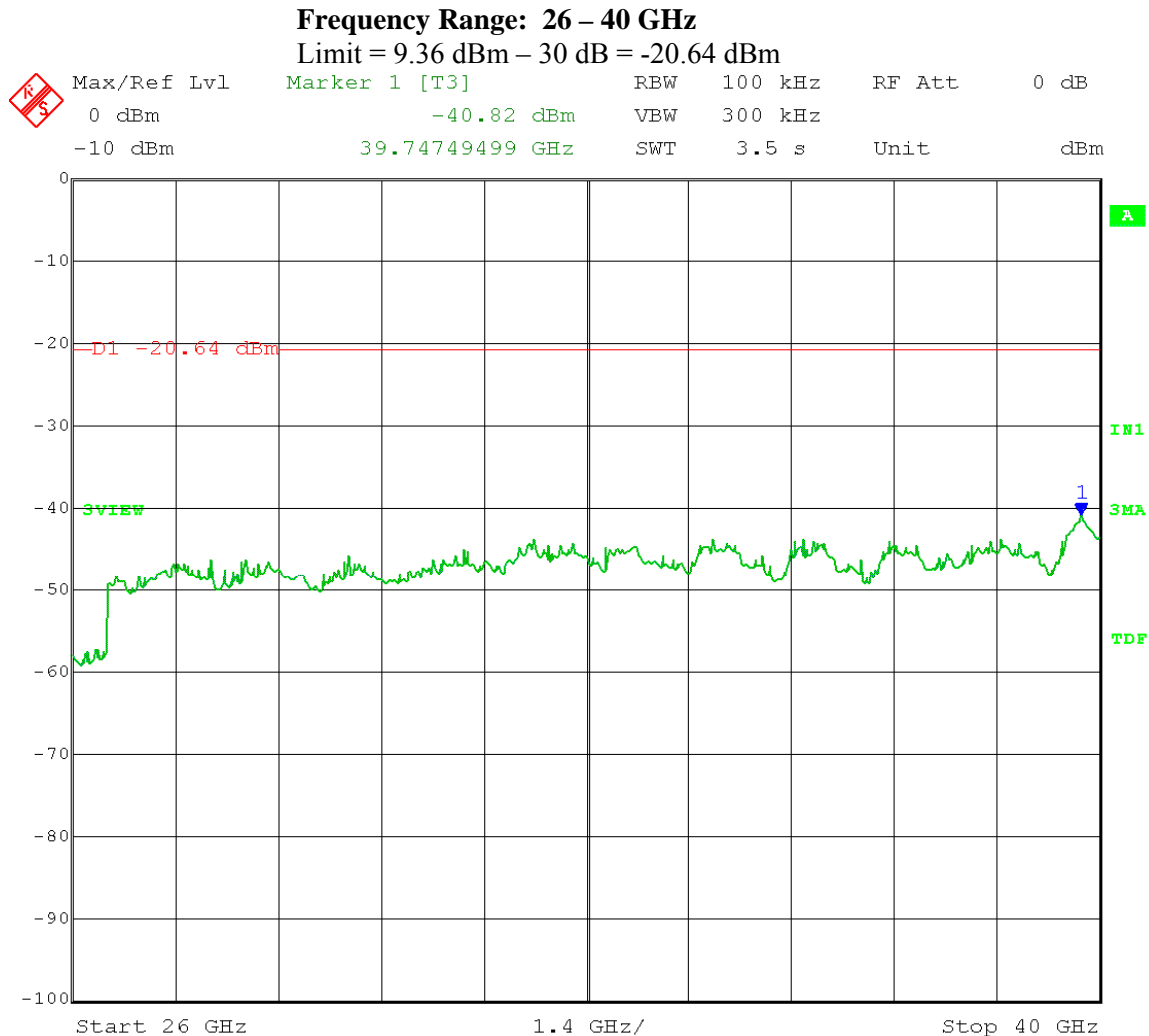


Date: 16.MAY.2012 14:27:52

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

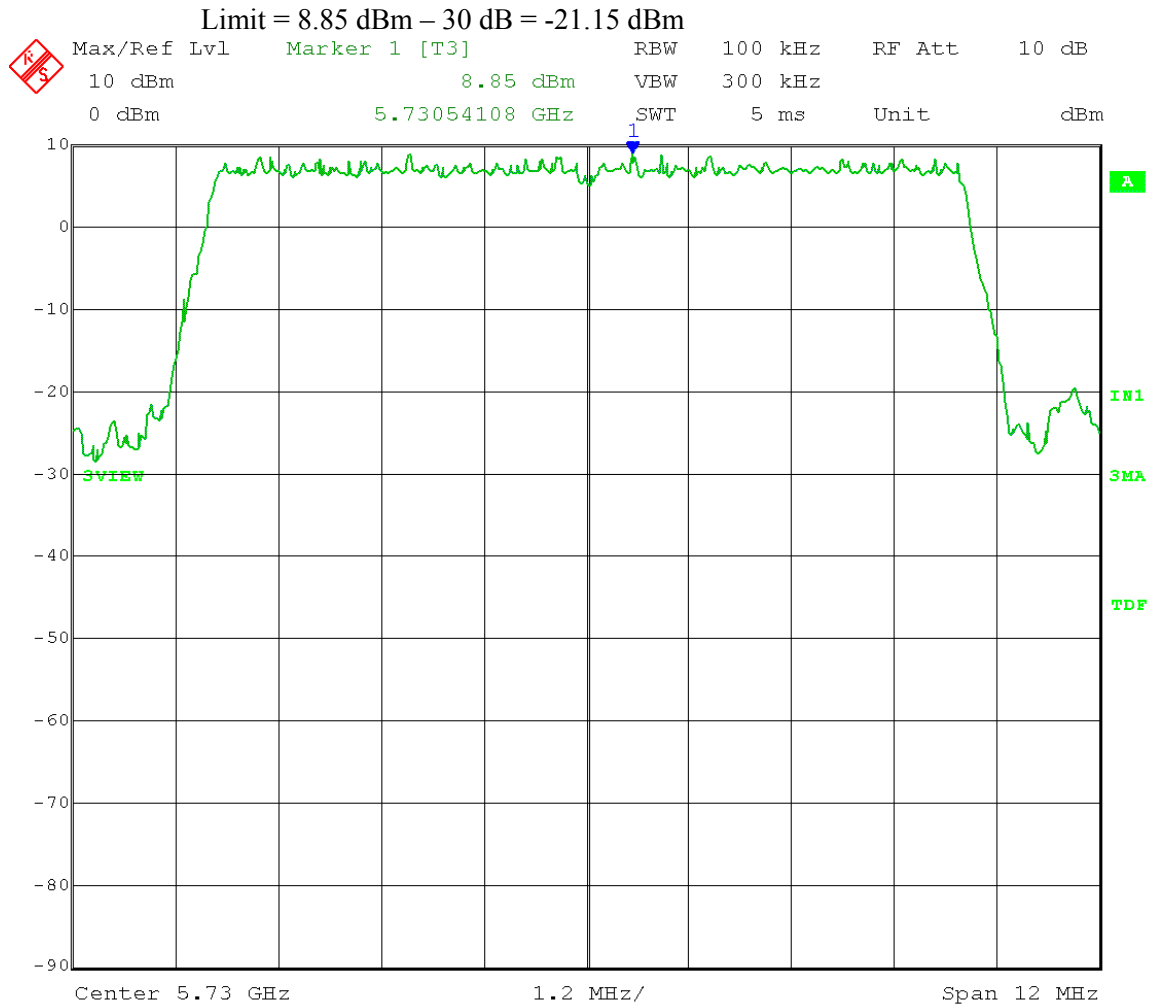


Date: 17.MAY.2012 08:26:36

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

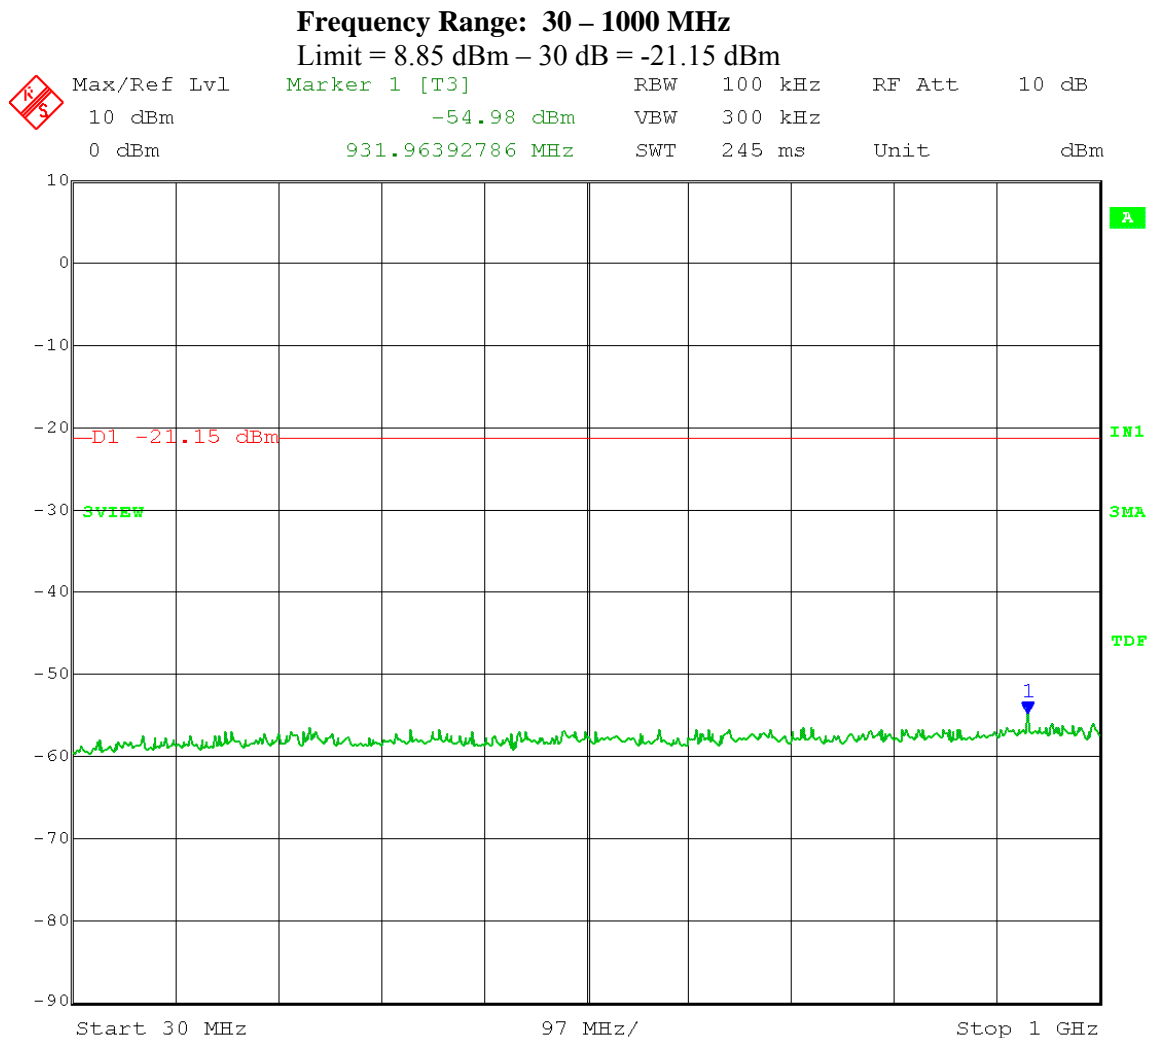


Date: 17.MAY.2012 08:43:32

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

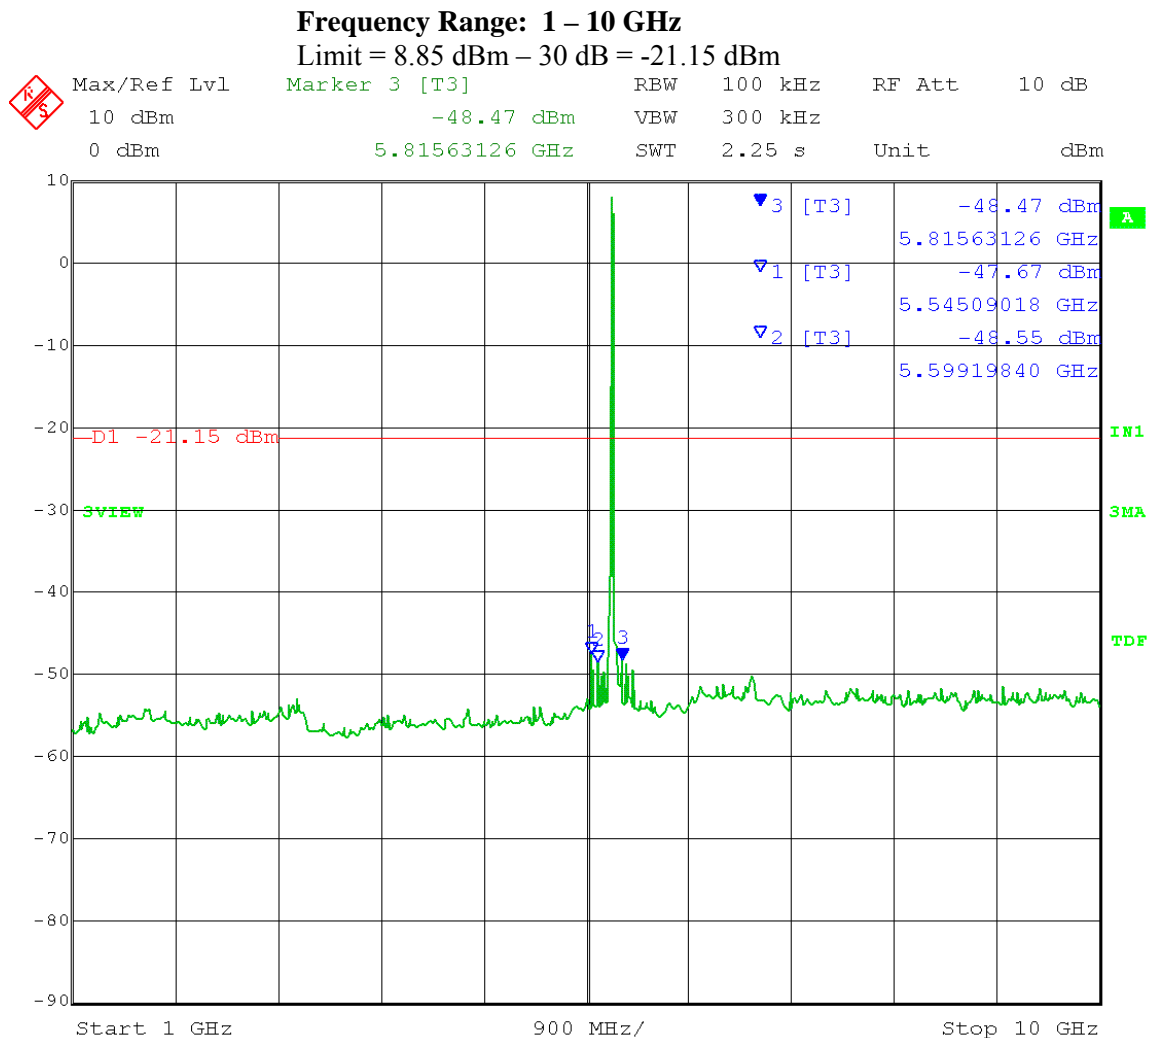


Date: 17.MAY.2012 08:36:35

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

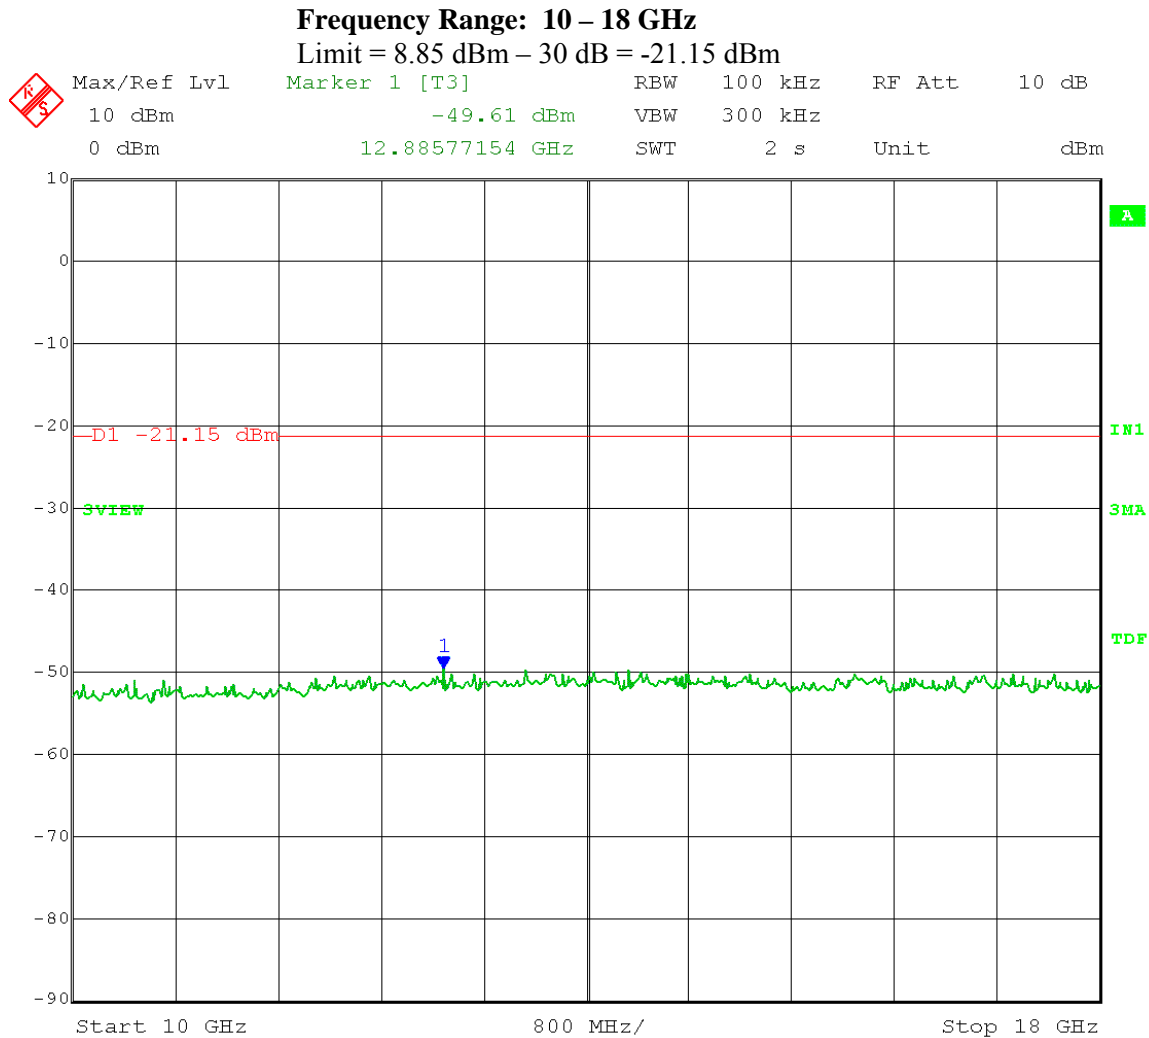


Date: 17.MAY.2012 08:39:30

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

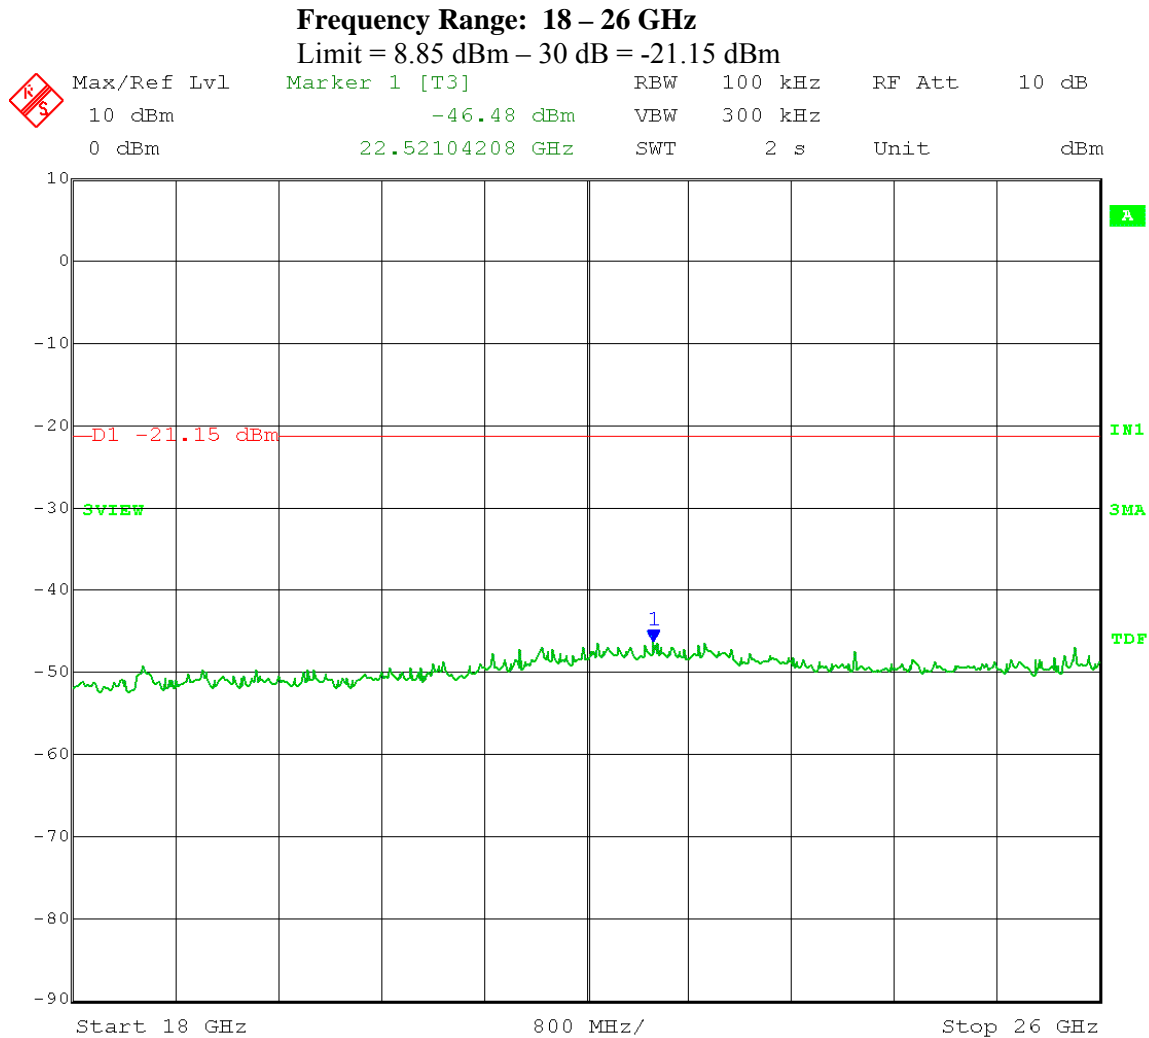


Date: 17.MAY.2012 08:40:39

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

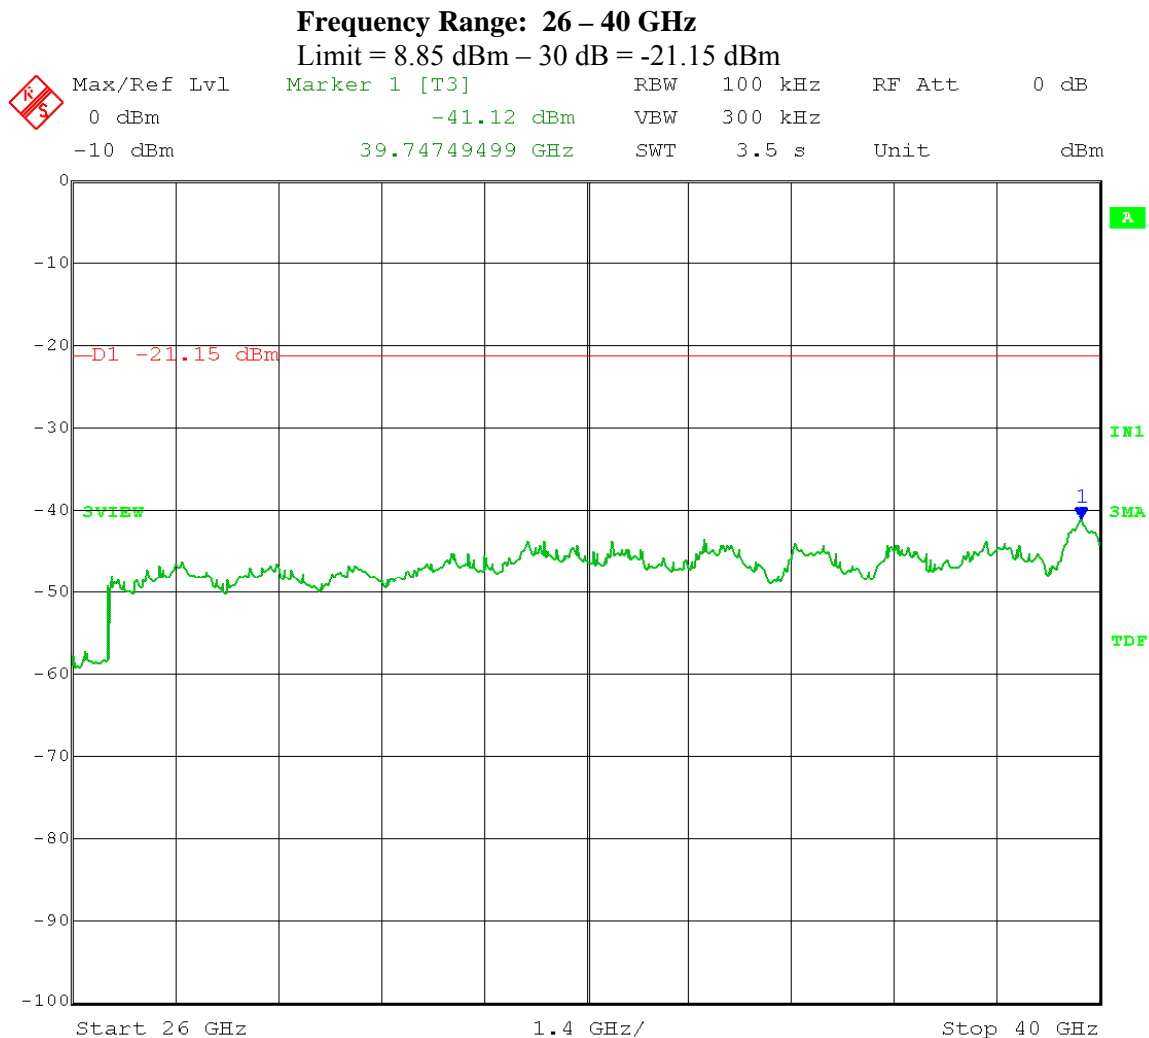


Date: 17.MAY.2012 08:42:09

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

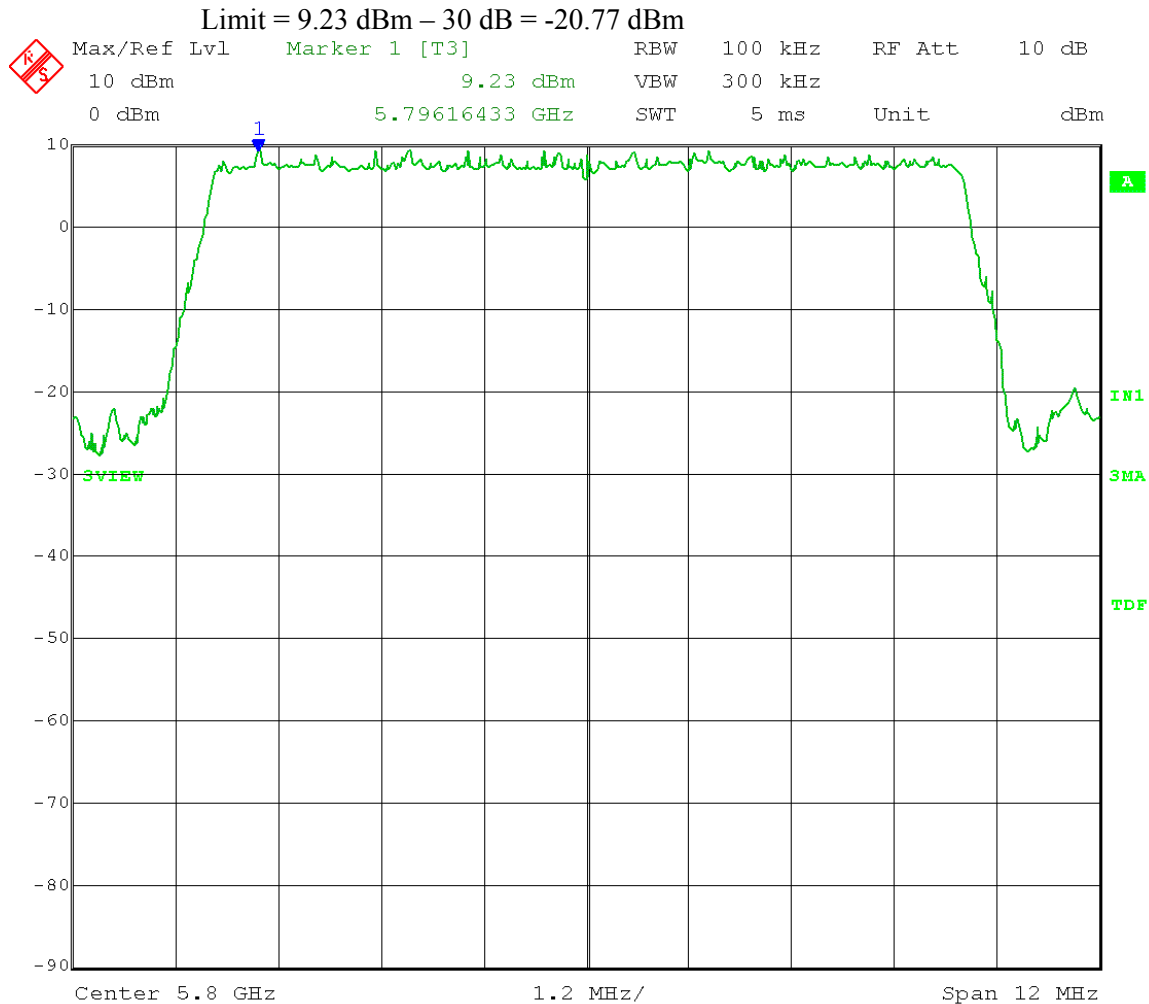


Date: 16.MAY.2012 15:40:13

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

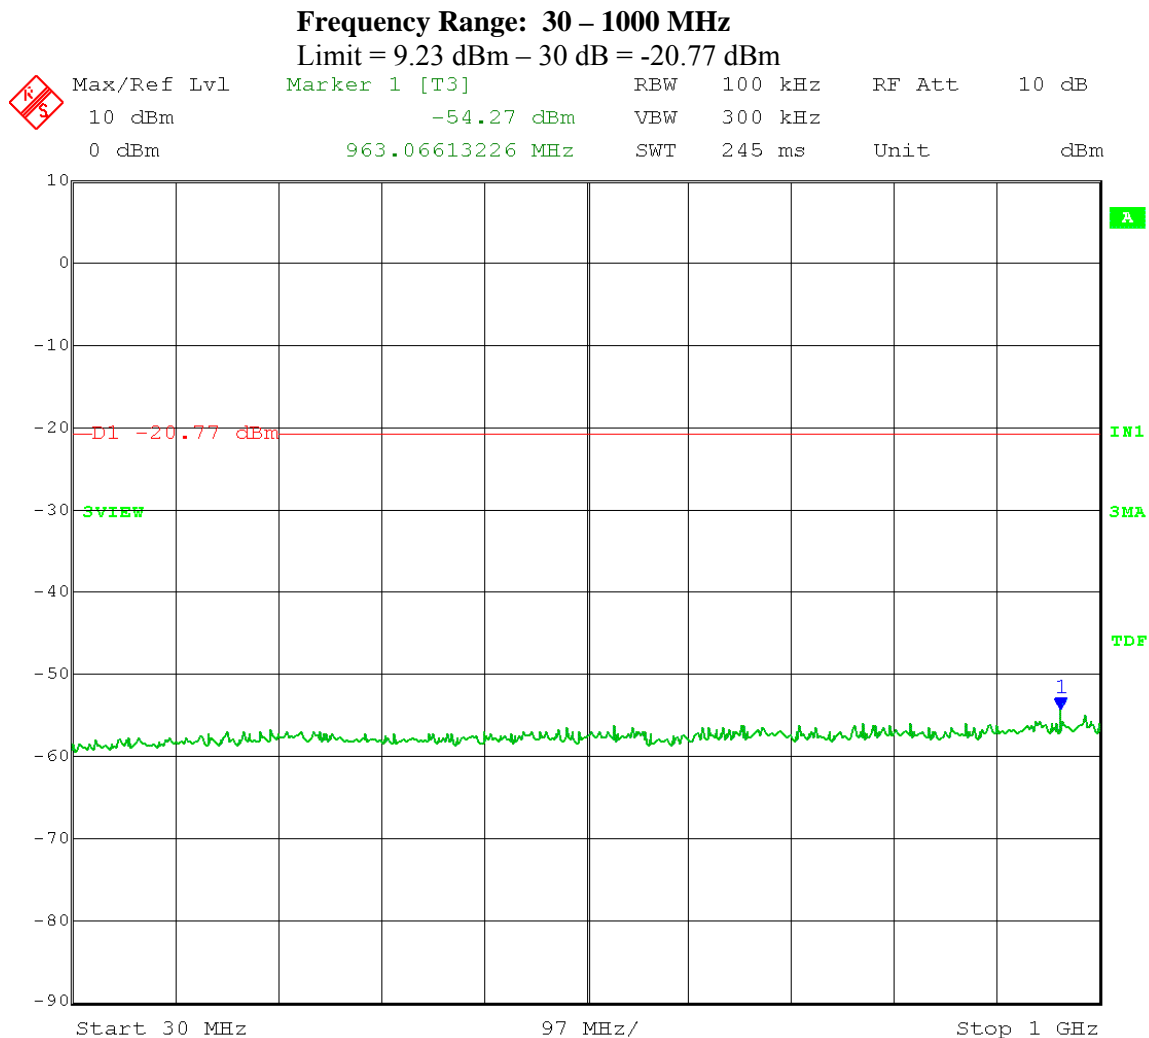


Date: 16.MAY.2012 15:47:34

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
 Output port: Channel A; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

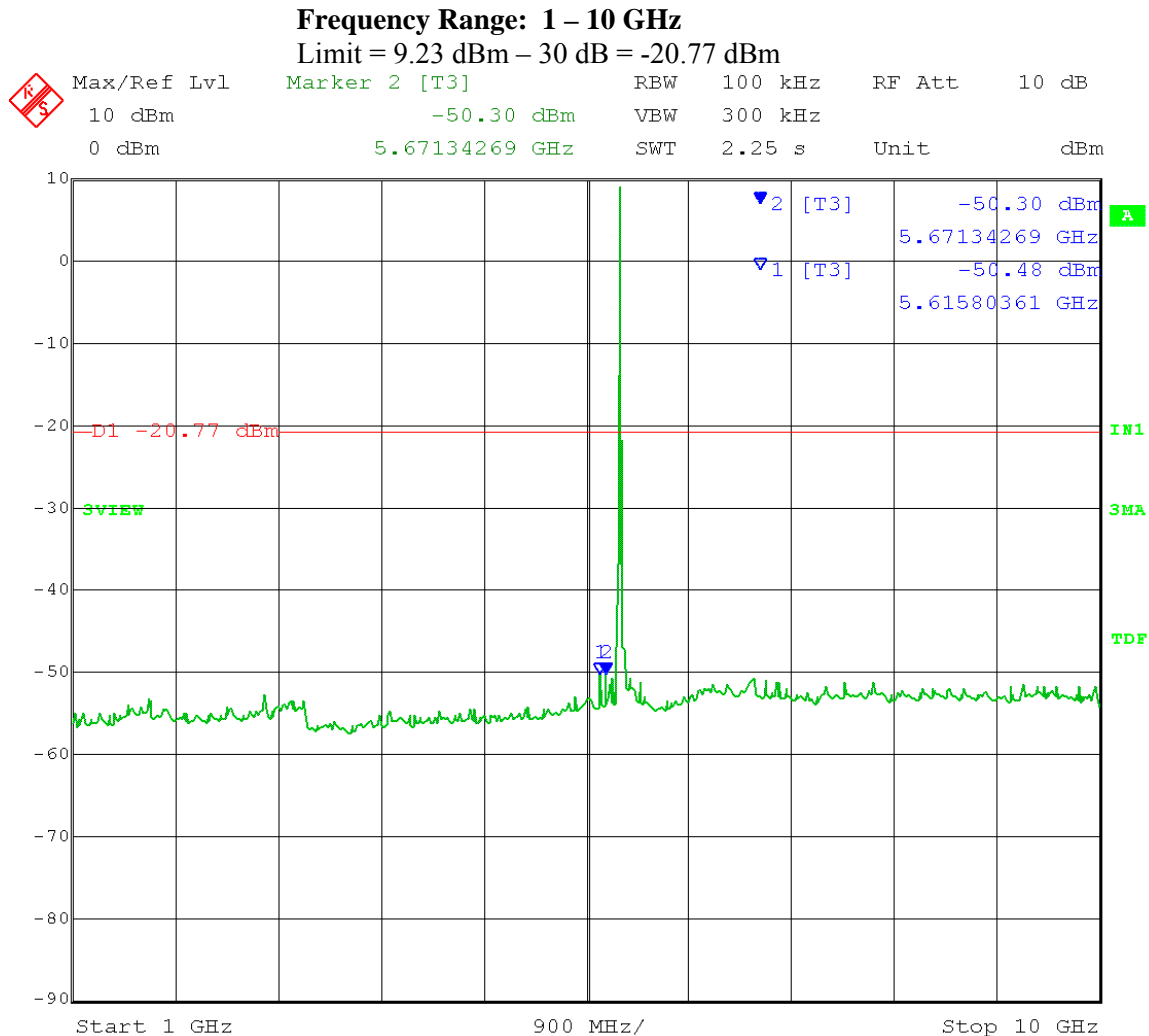


Date: 16.MAY.2012 15:42:43

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

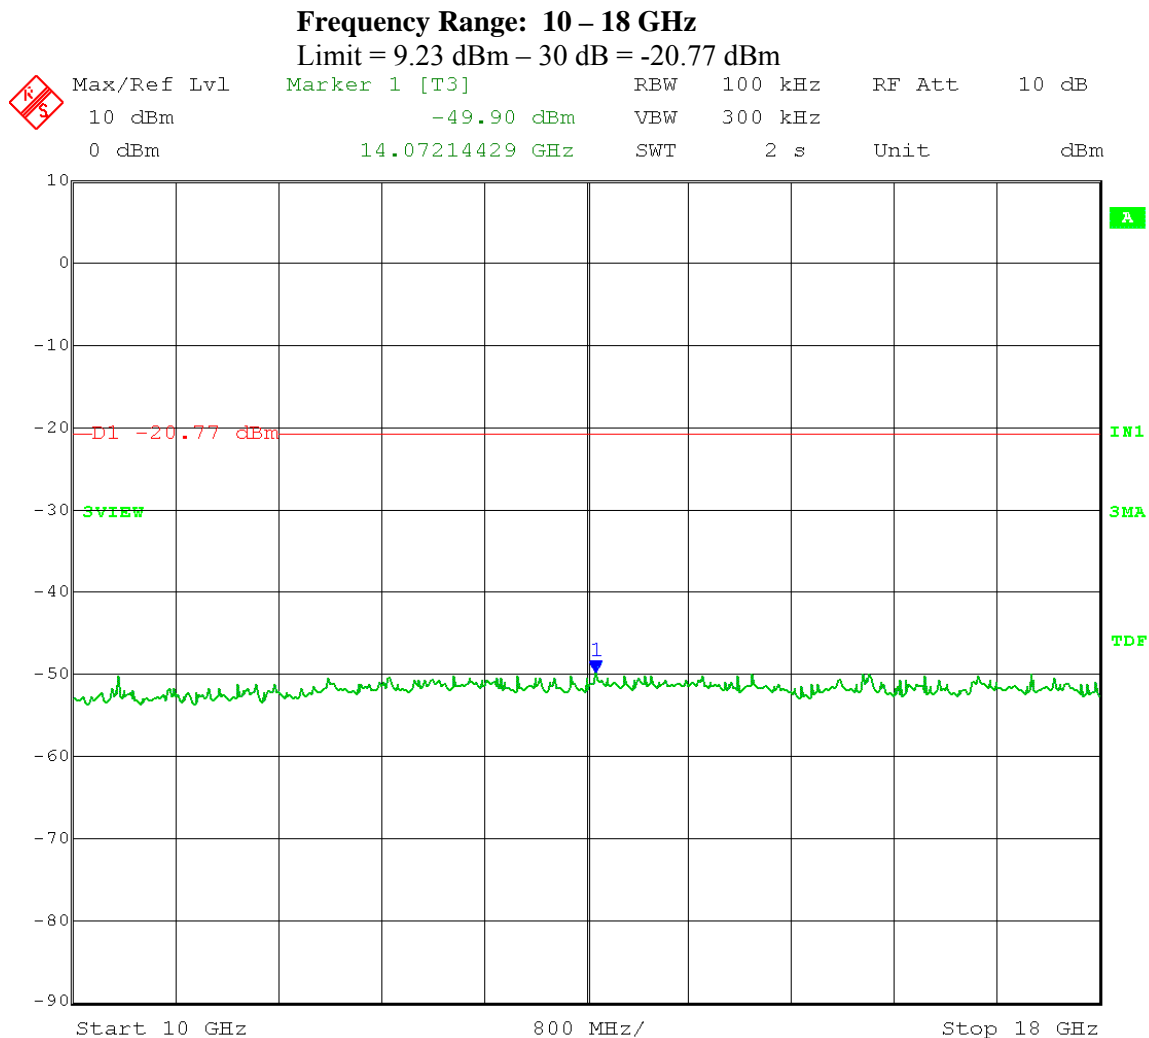


Date: 16.MAY.2012 15:44:04

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

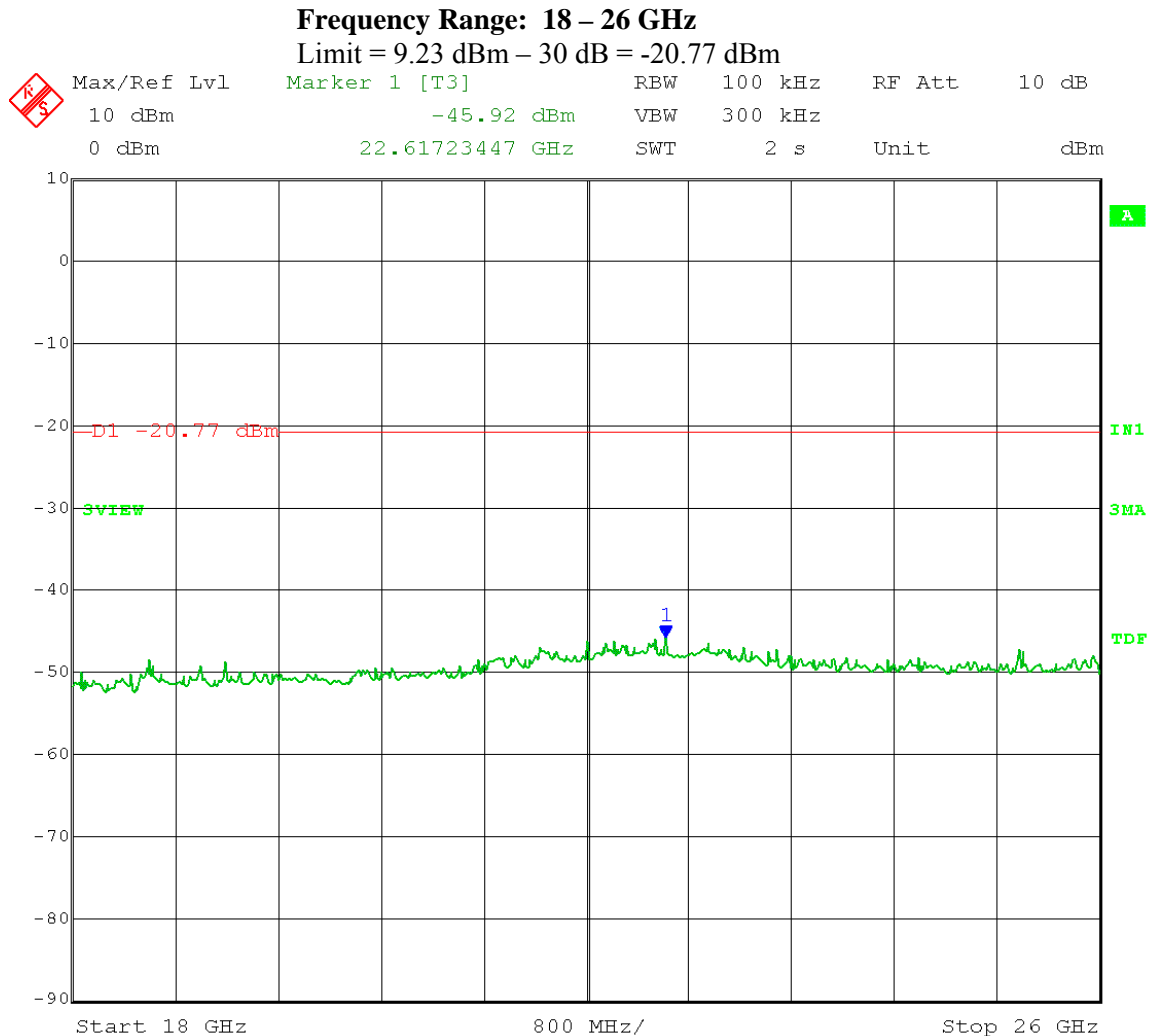


Date: 16.MAY.2012 15:45:11

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7322
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

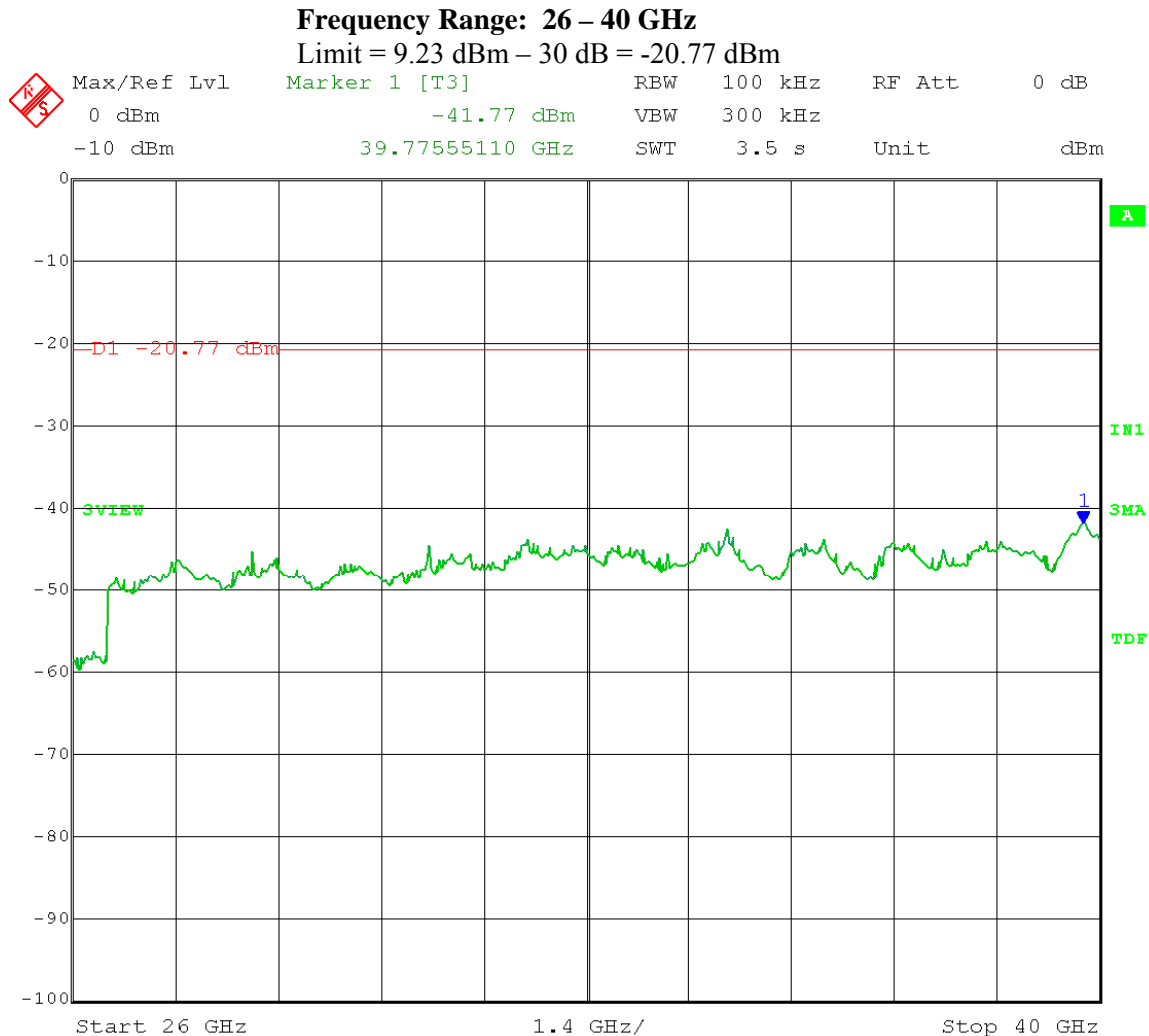


Date: 16.MAY.2012 15:46:22

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

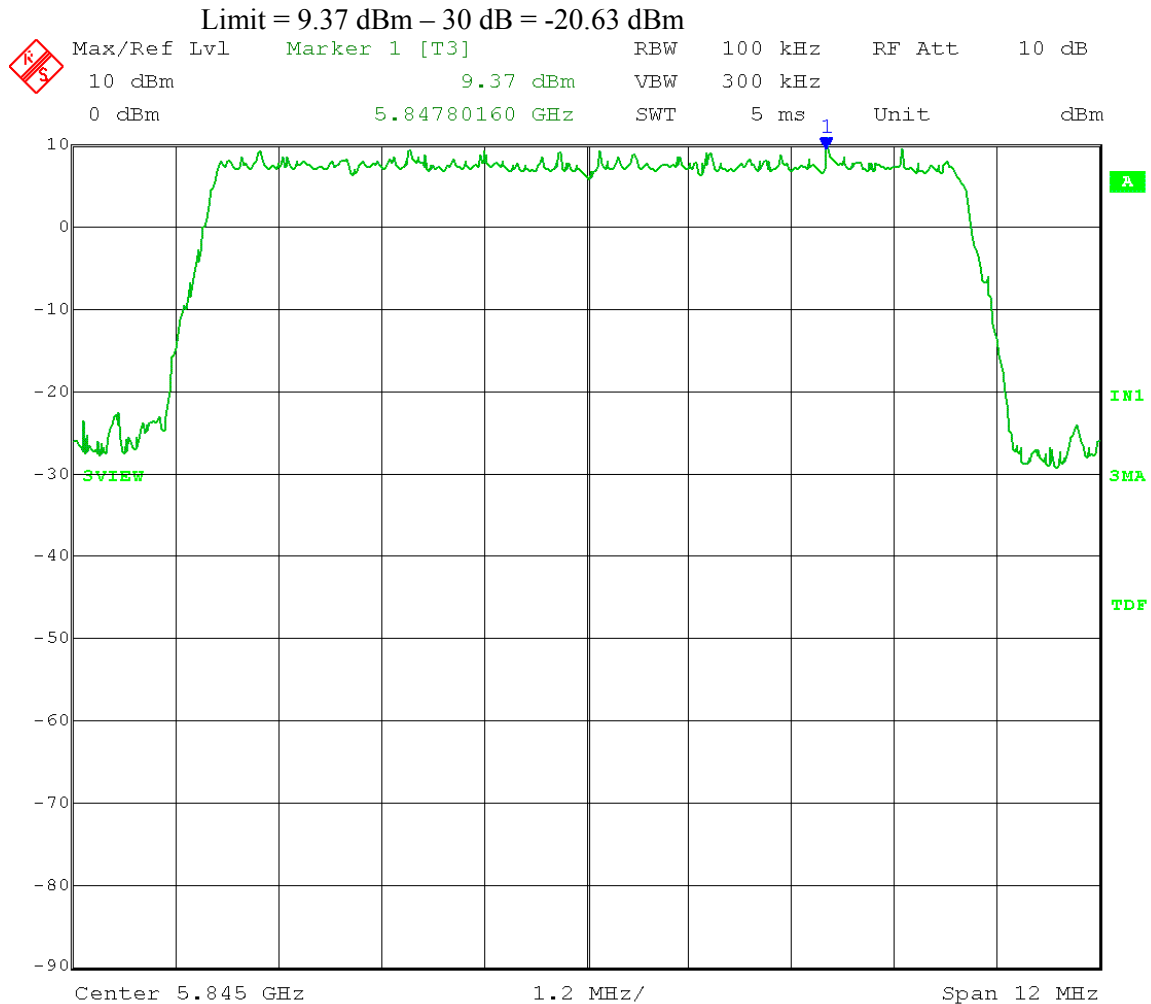


Date: 17.MAY.2012 09:24:10

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

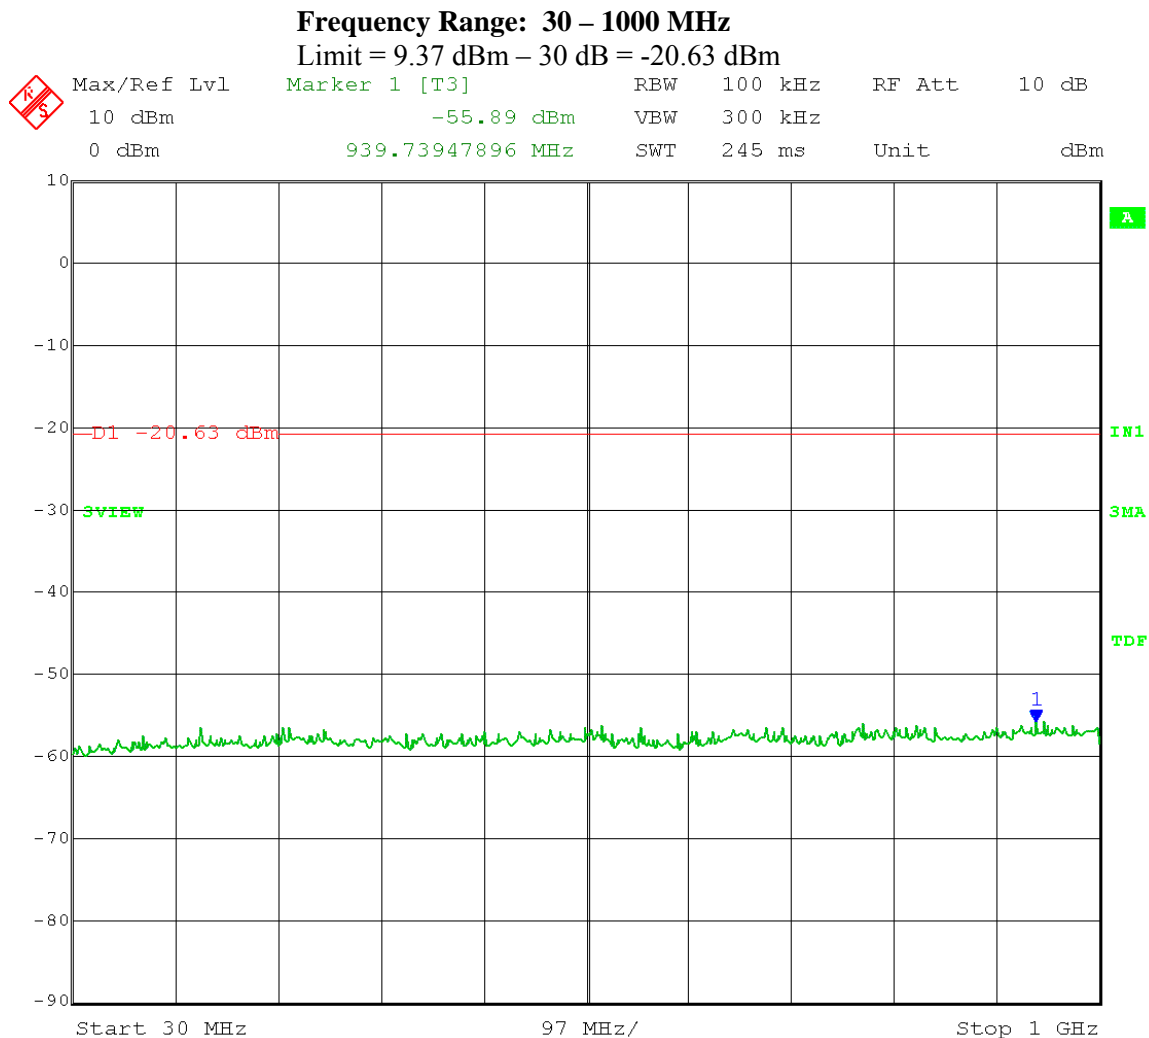


Date: 17.MAY.2012 09:36:53

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

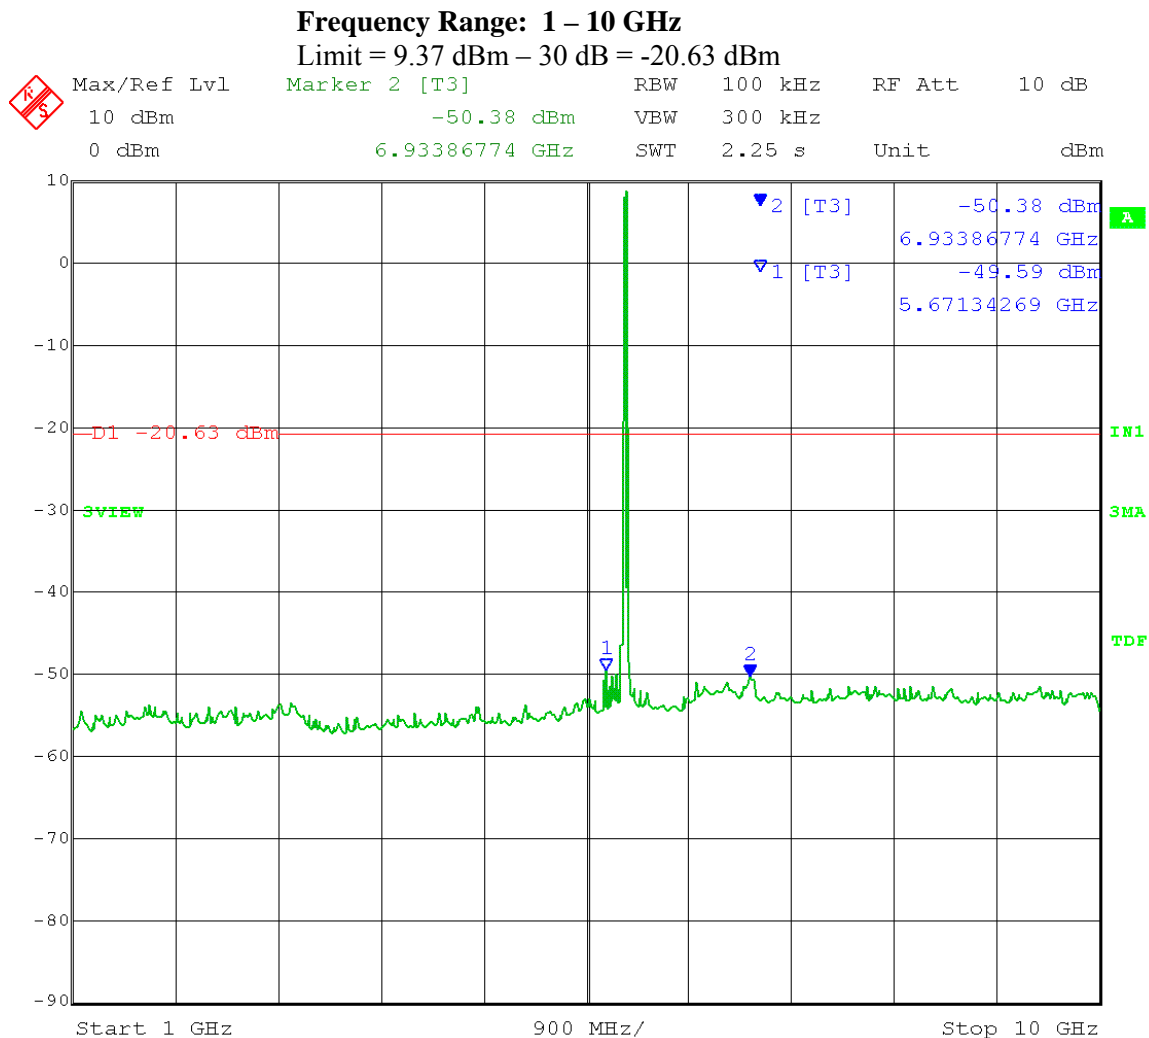


Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

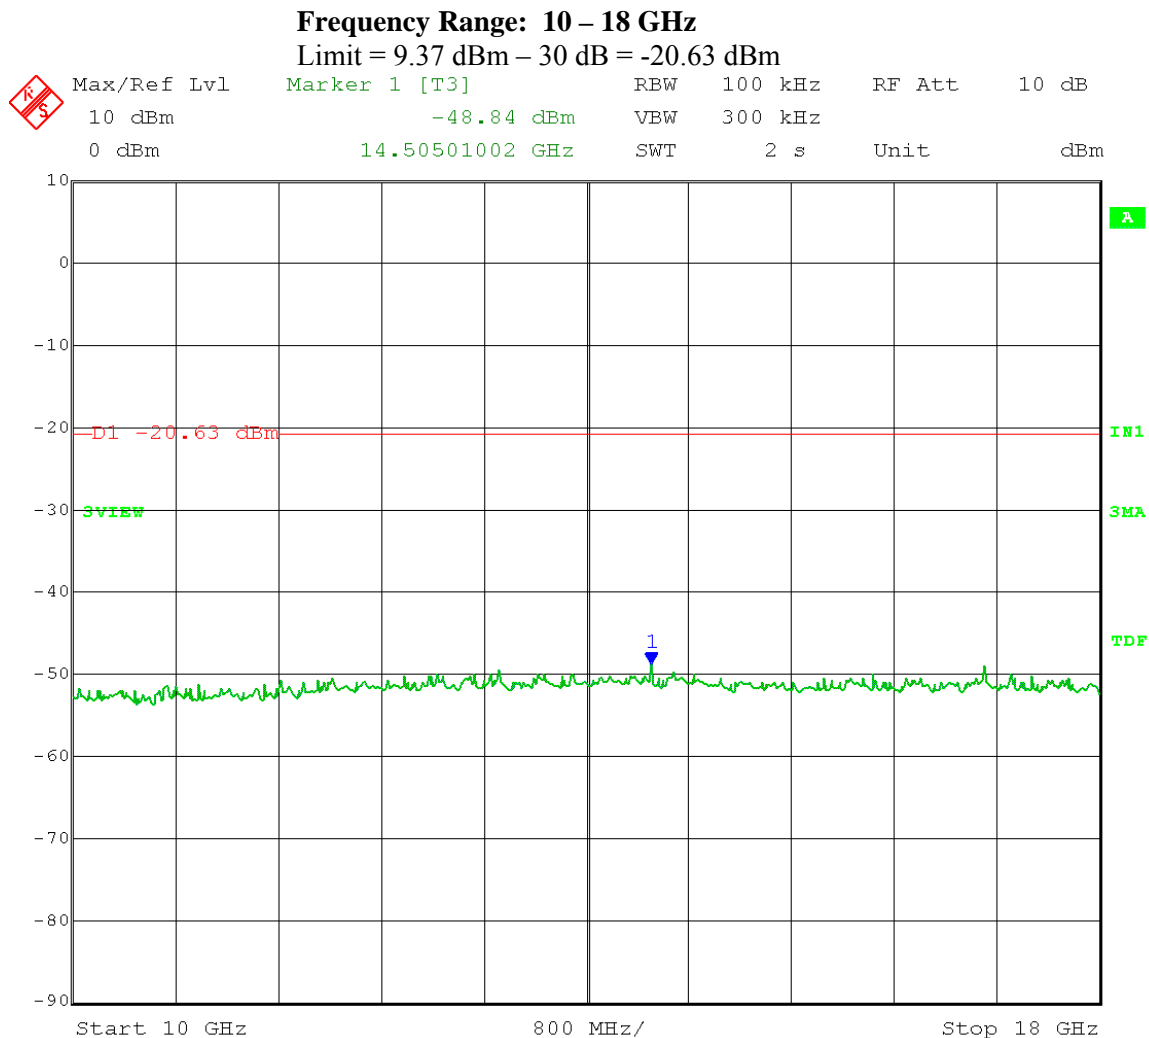


Date: 17.MAY.2012 09:31:40

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

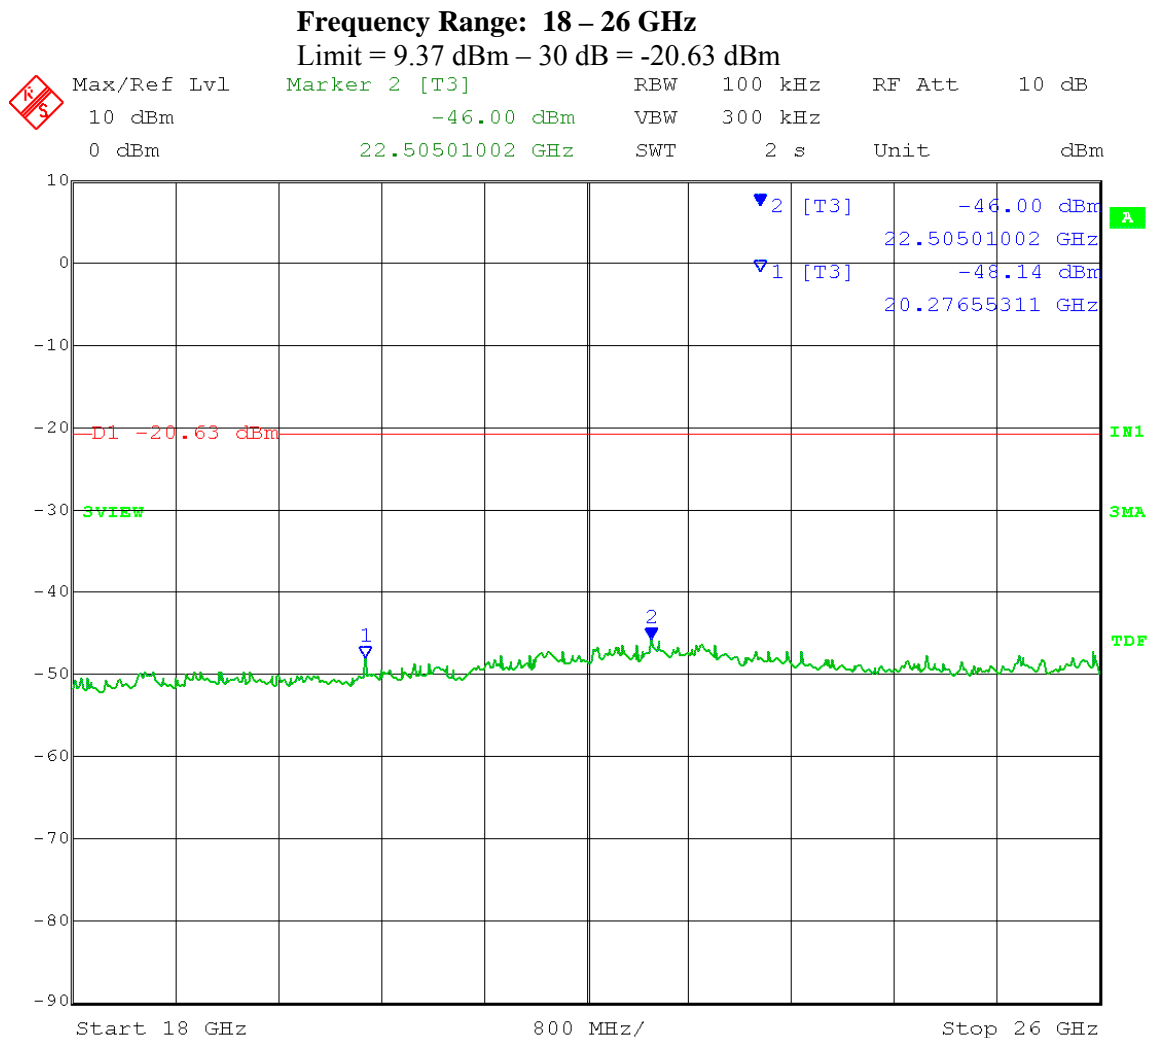


Date: 17.MAY.2012 09:33:11

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

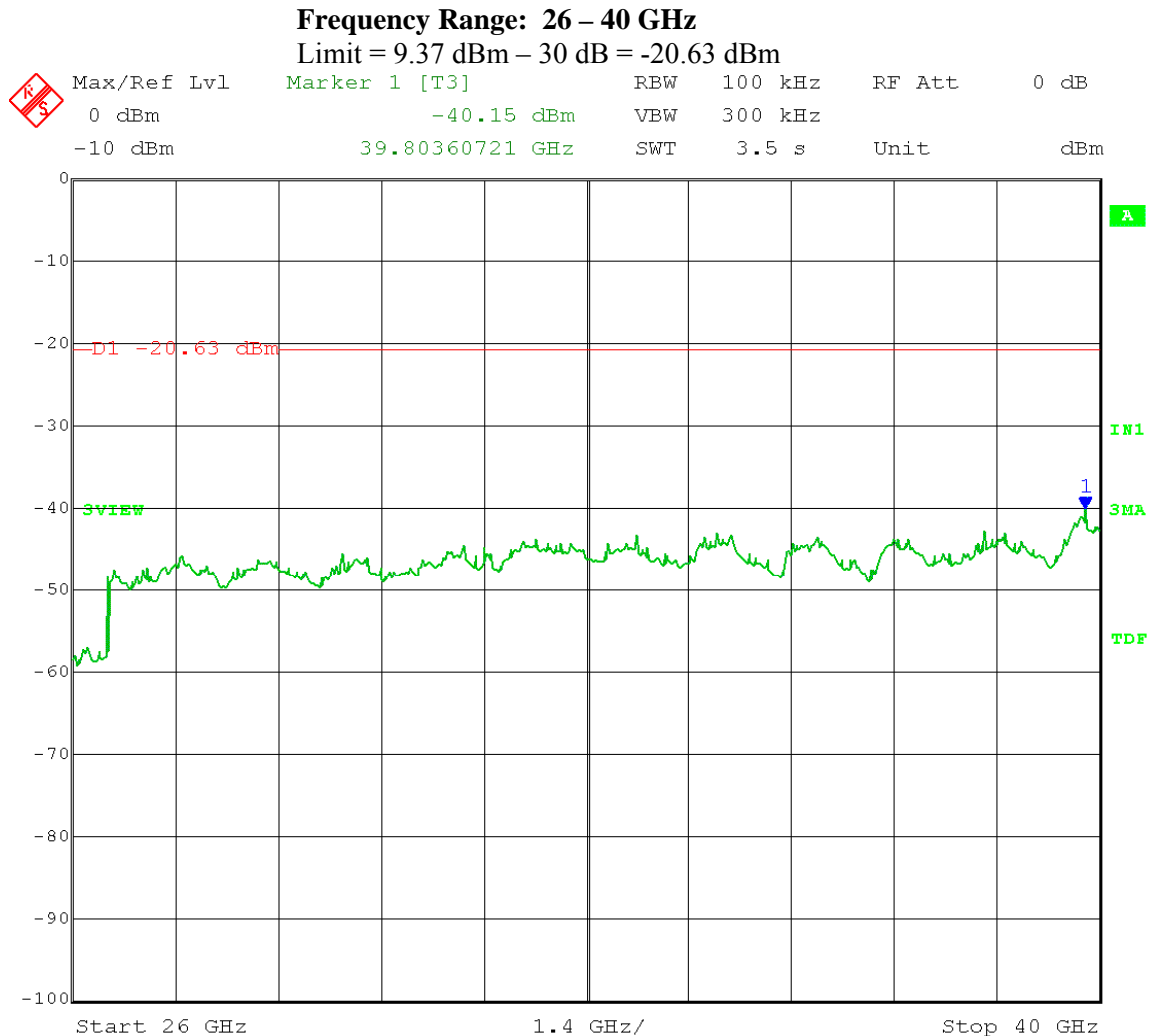


Date: 17.MAY.2012 09:35:15

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

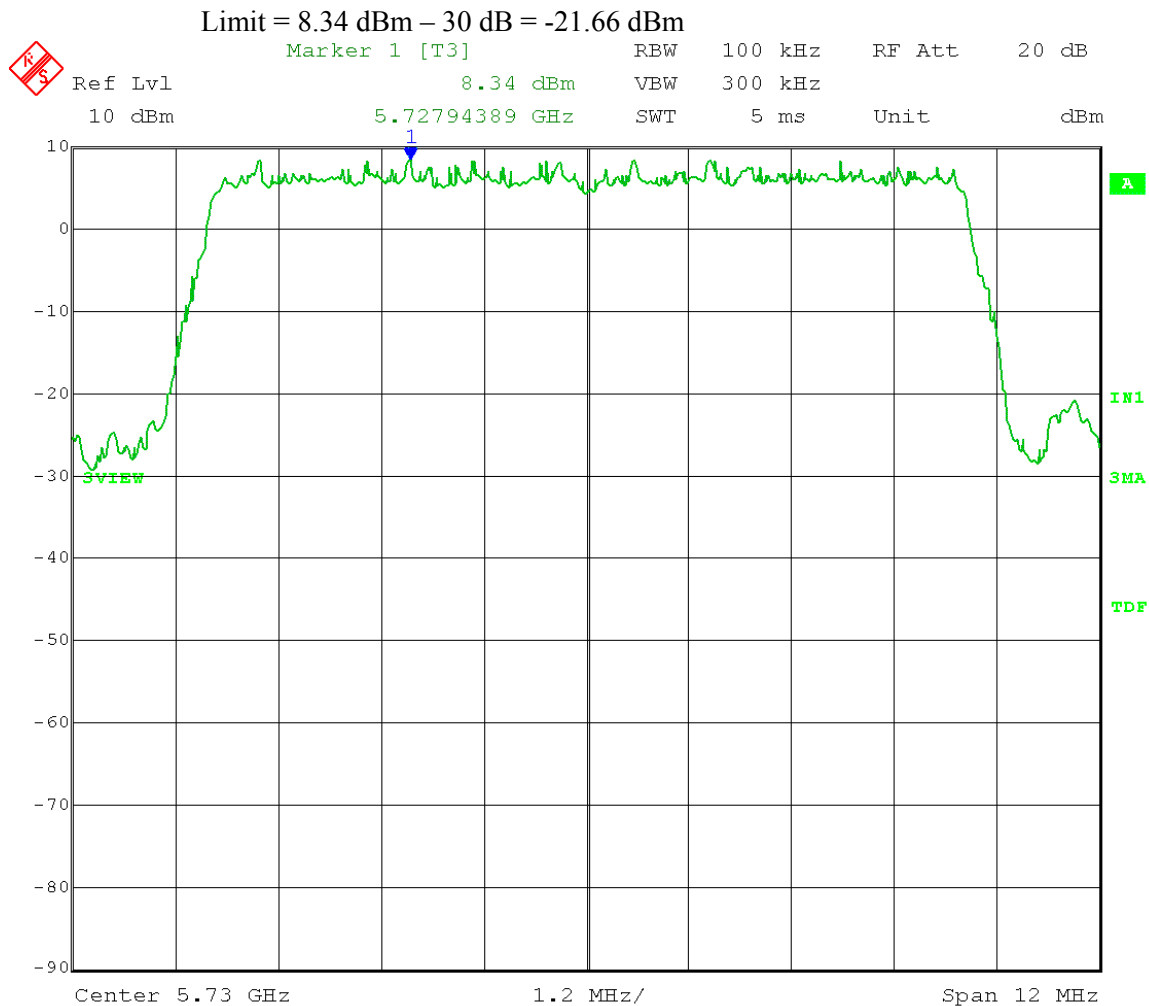


Date: 16.MAY.2012 10:28:55

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

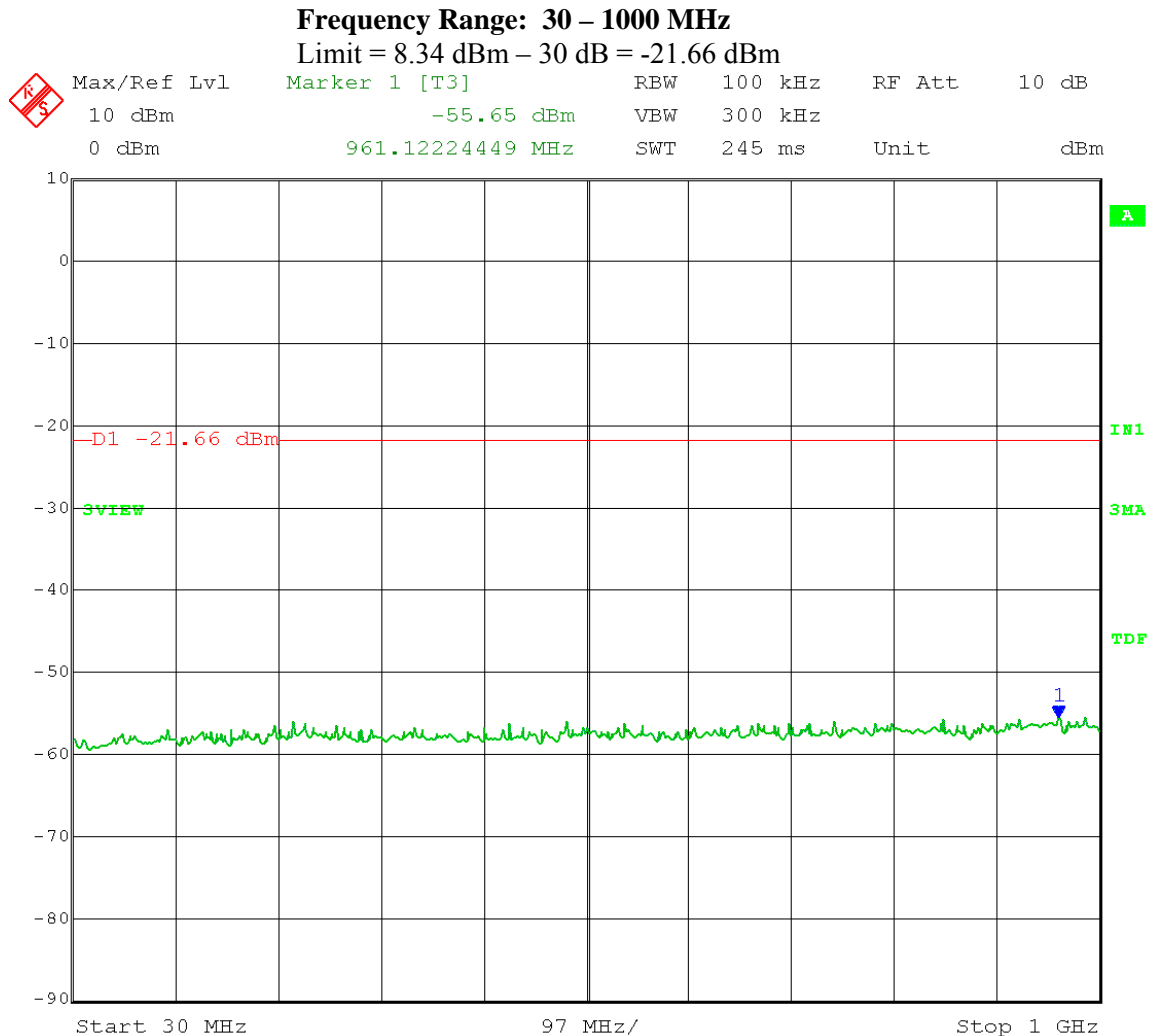


Date: 16.MAY.2012 10:43:22

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

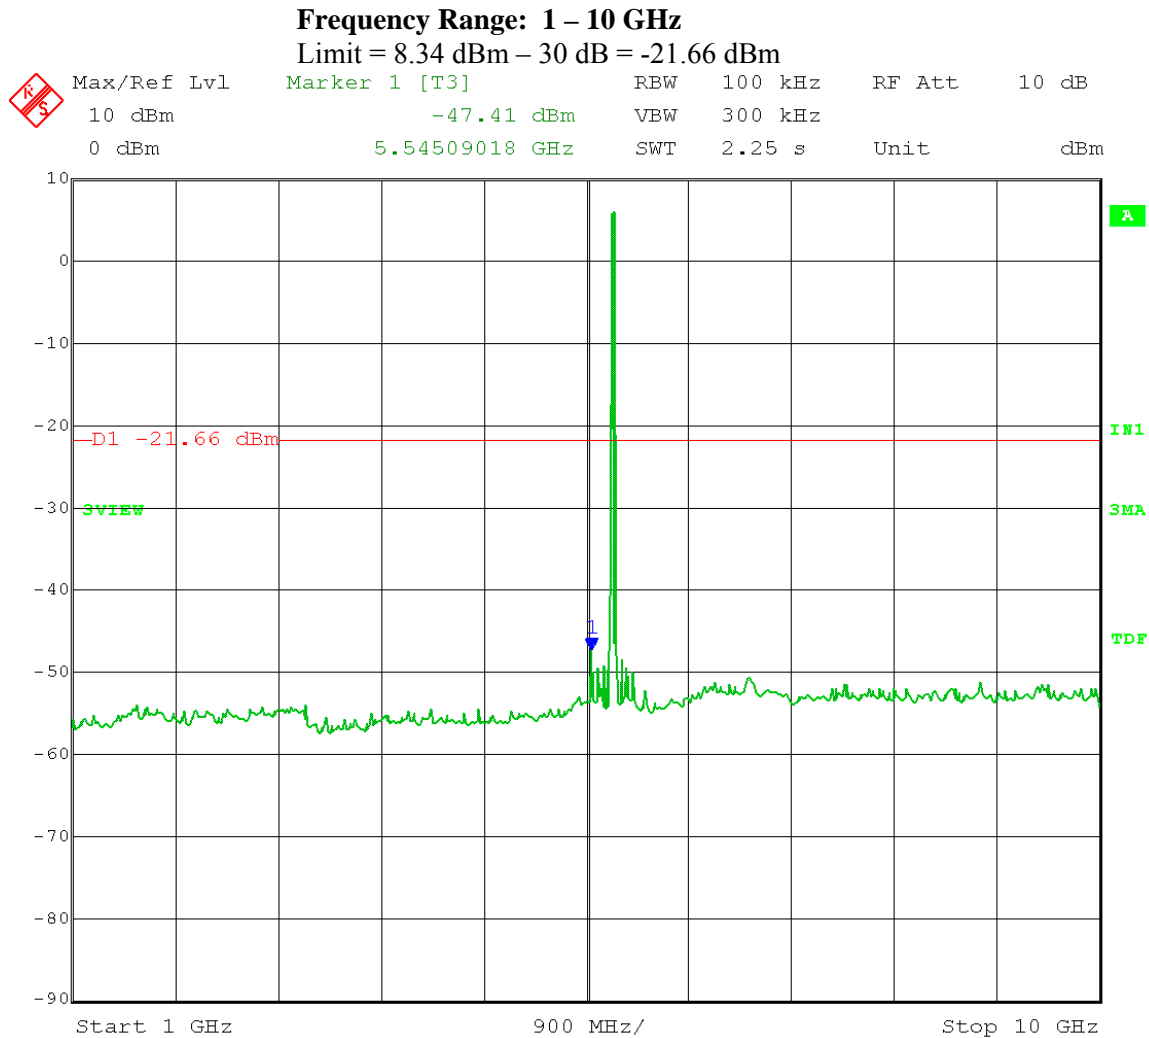


Date: 16.MAY.2012 10:42:09

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

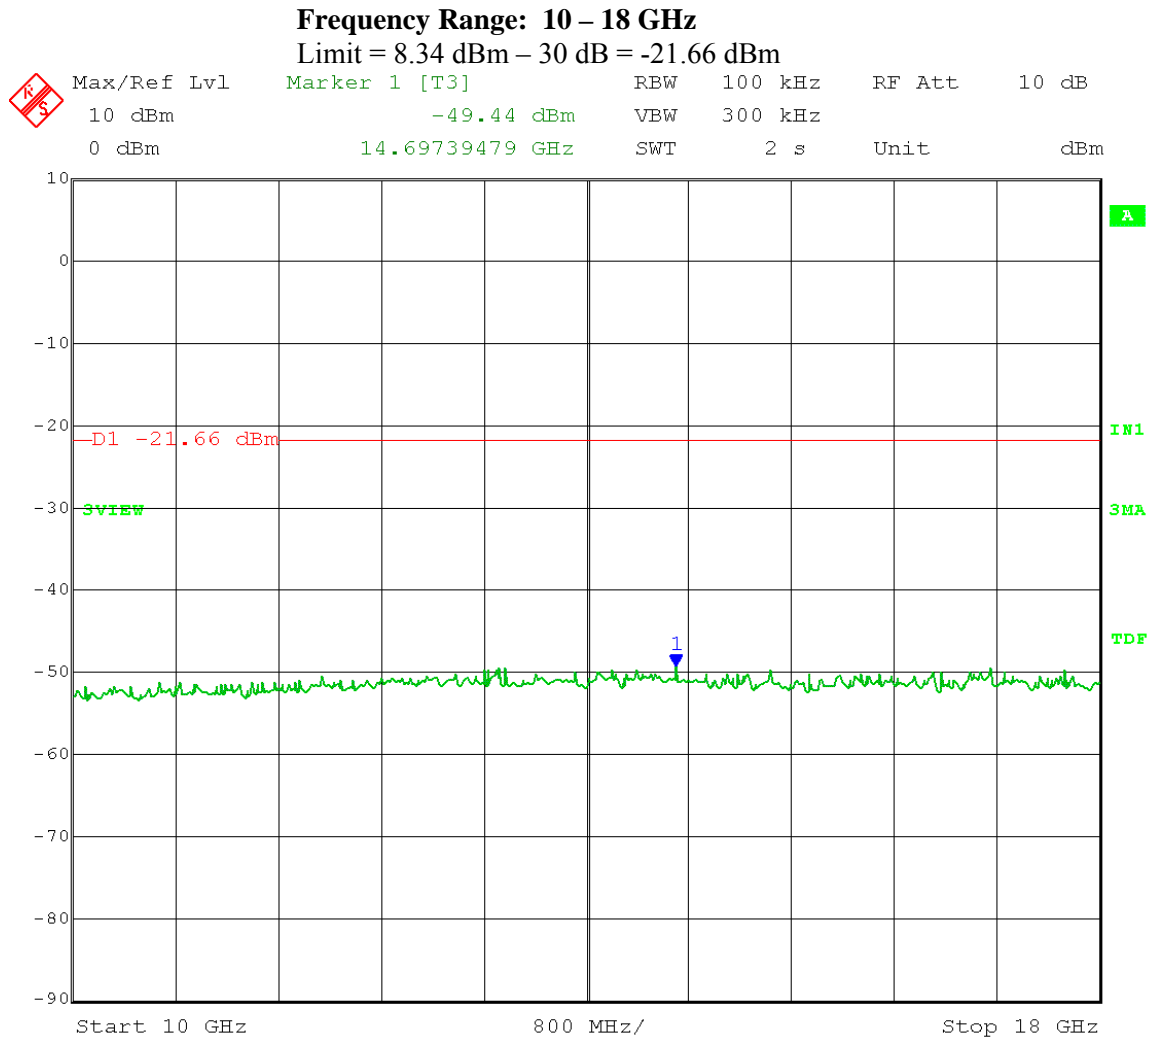


Date: 16.MAY.2012 10:44:55

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

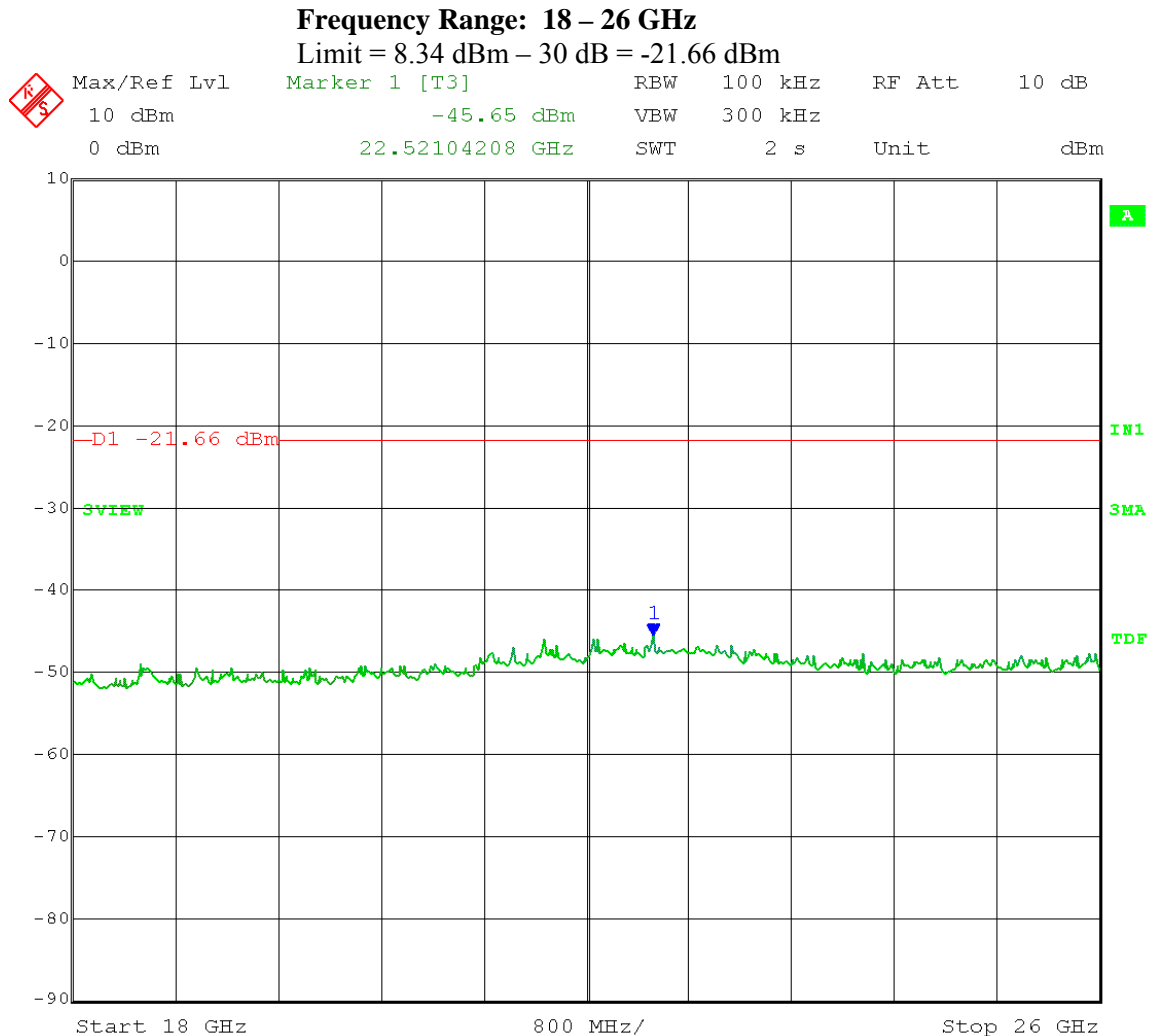


Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

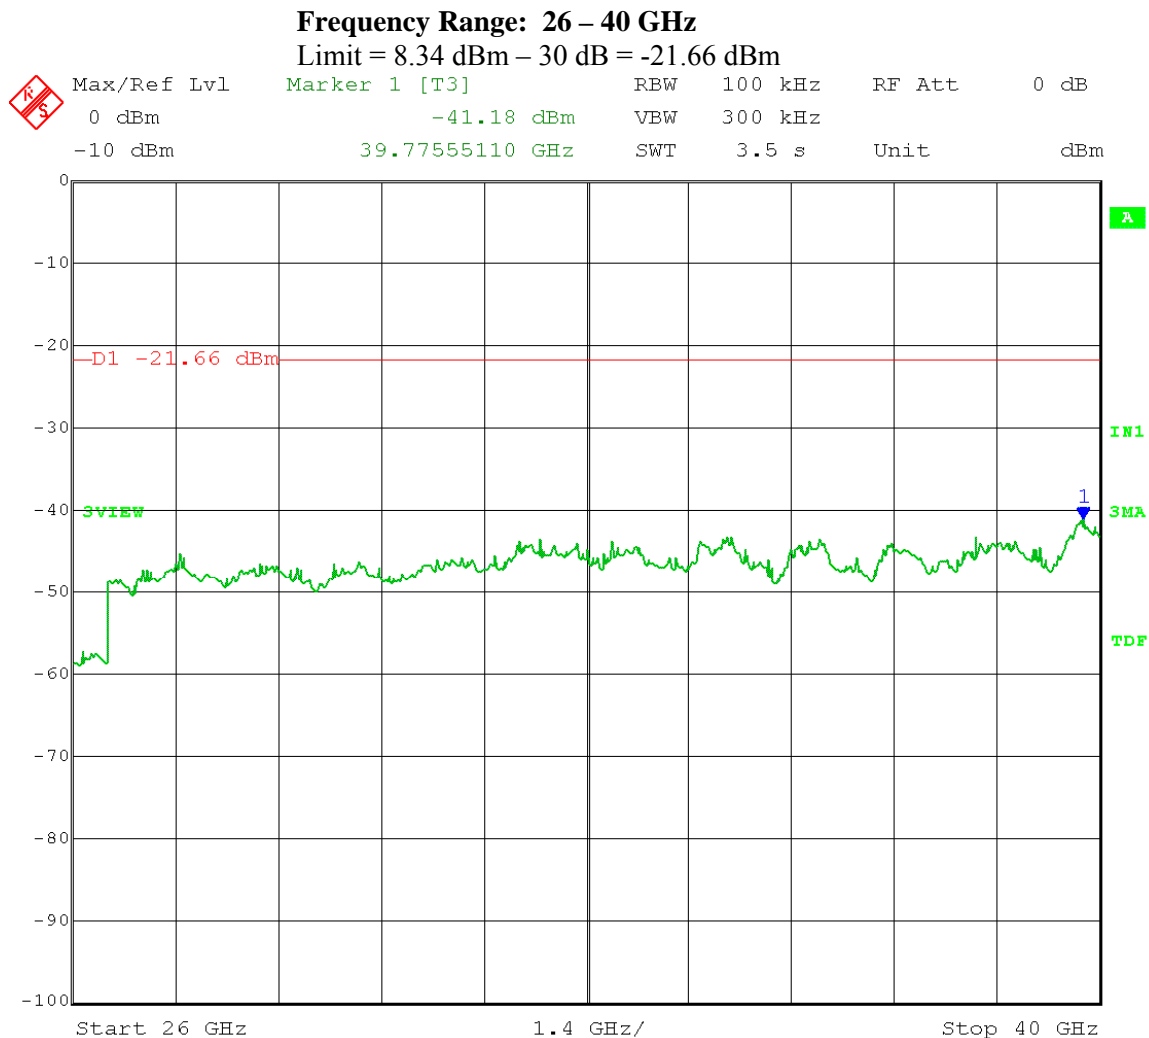


Date: 16.MAY.2012 10:47:14

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

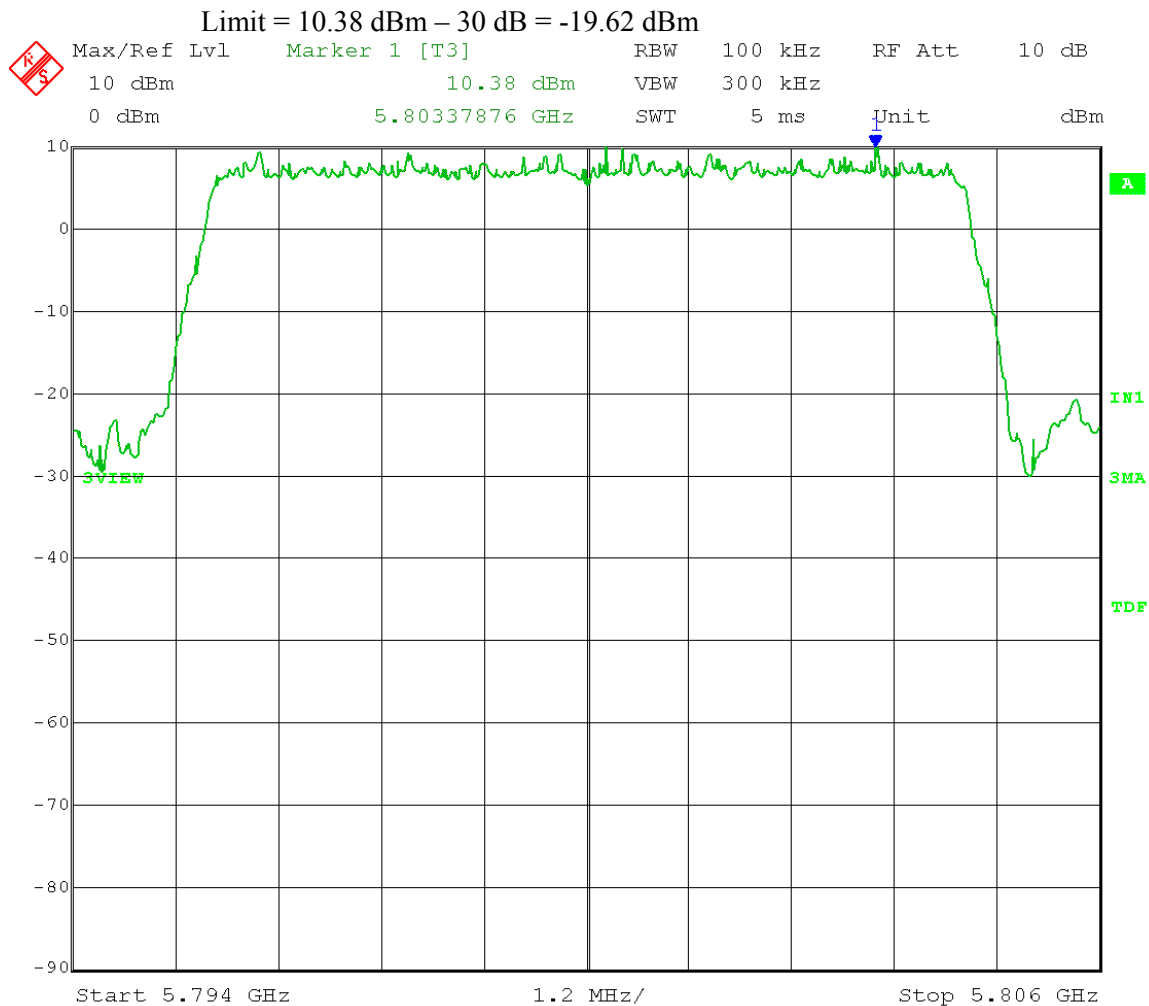


Date: 16.MAY.2012 09:19:20

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

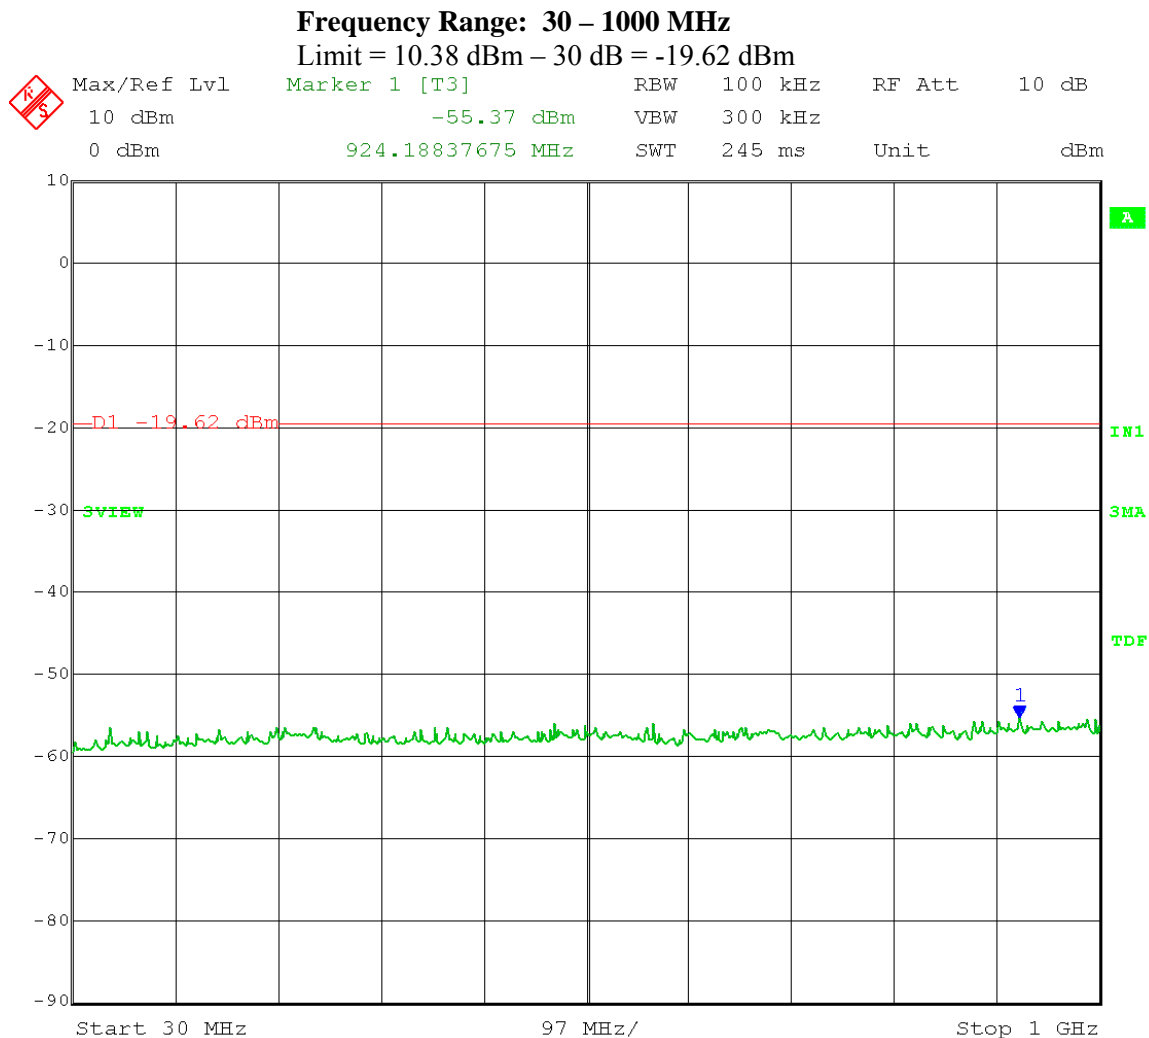


Date: 16.MAY.2012 09:28:21

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

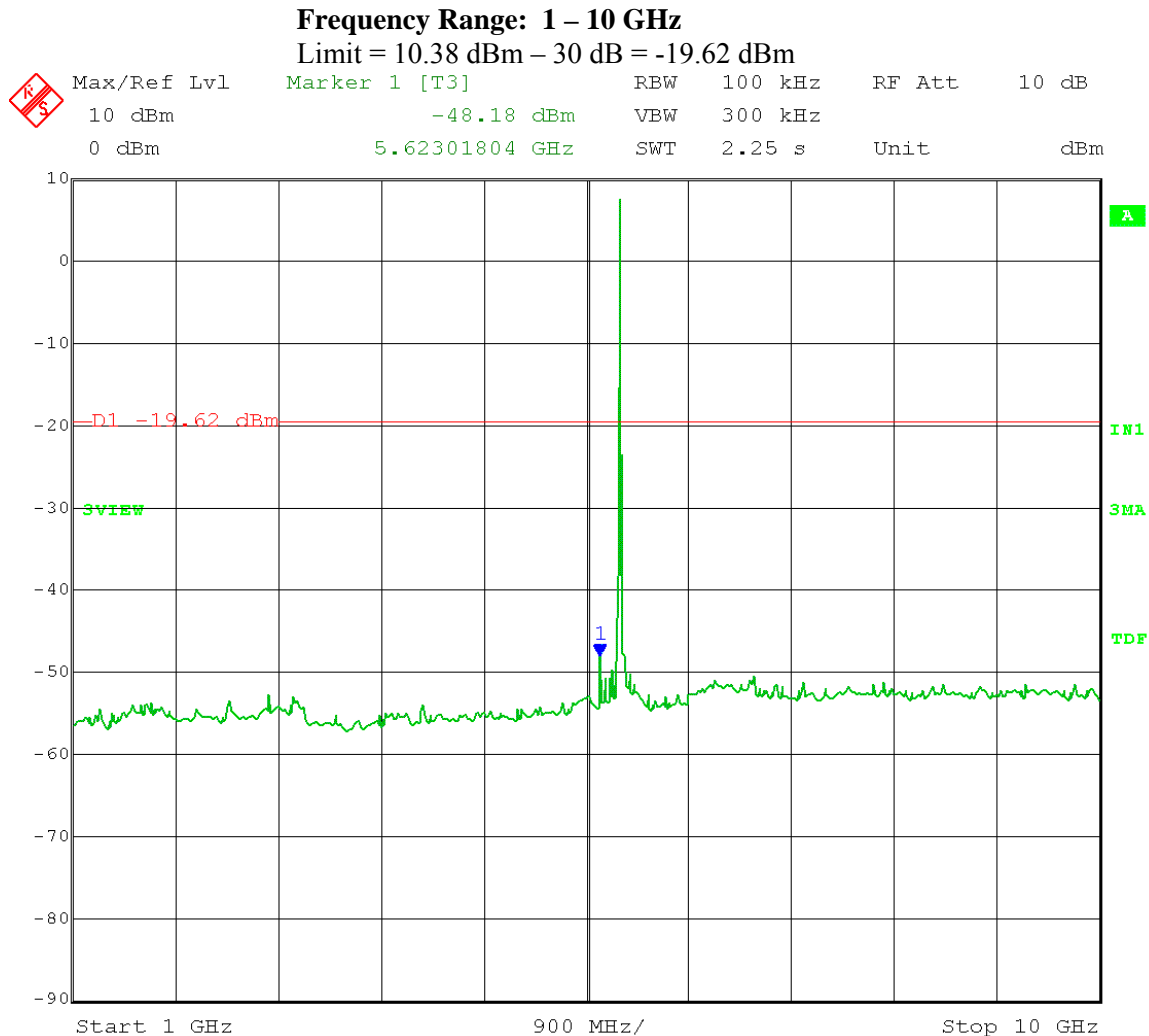


Date: 16.MAY.2012 09:23:34

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

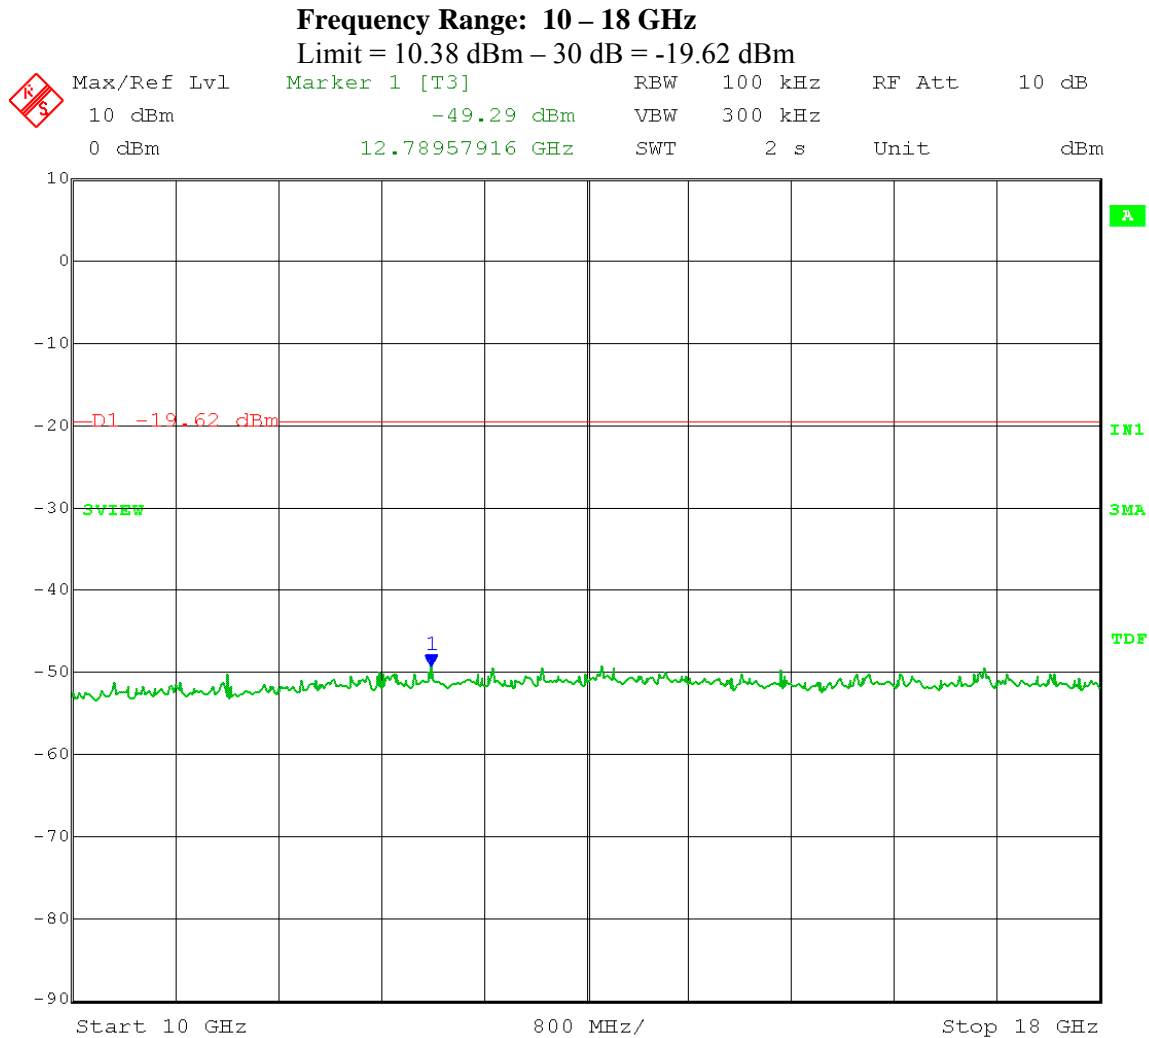


Date: 16.MAY.2012 09:24:55

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

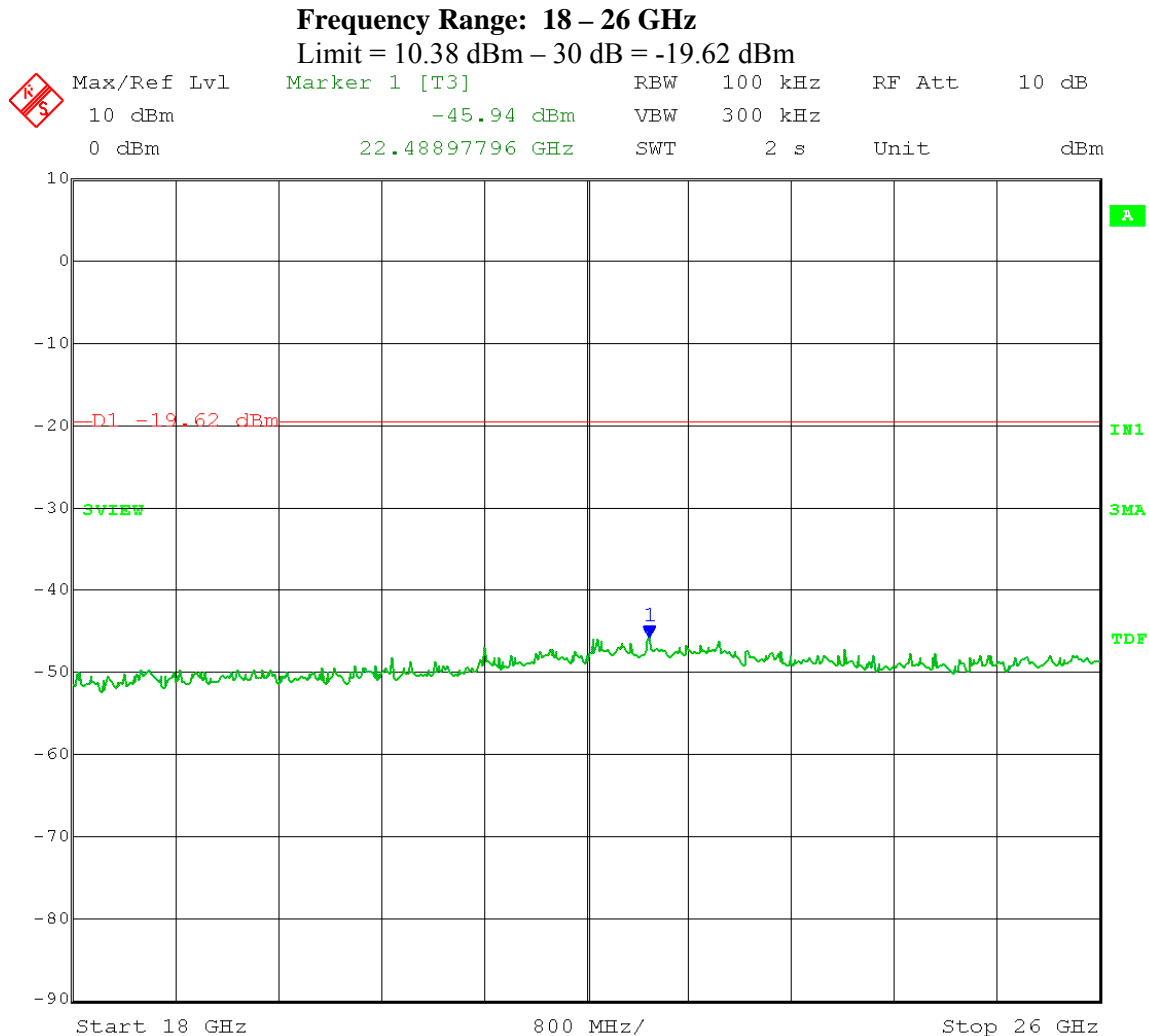


Date: 16.MAY.2012 09:25:58

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

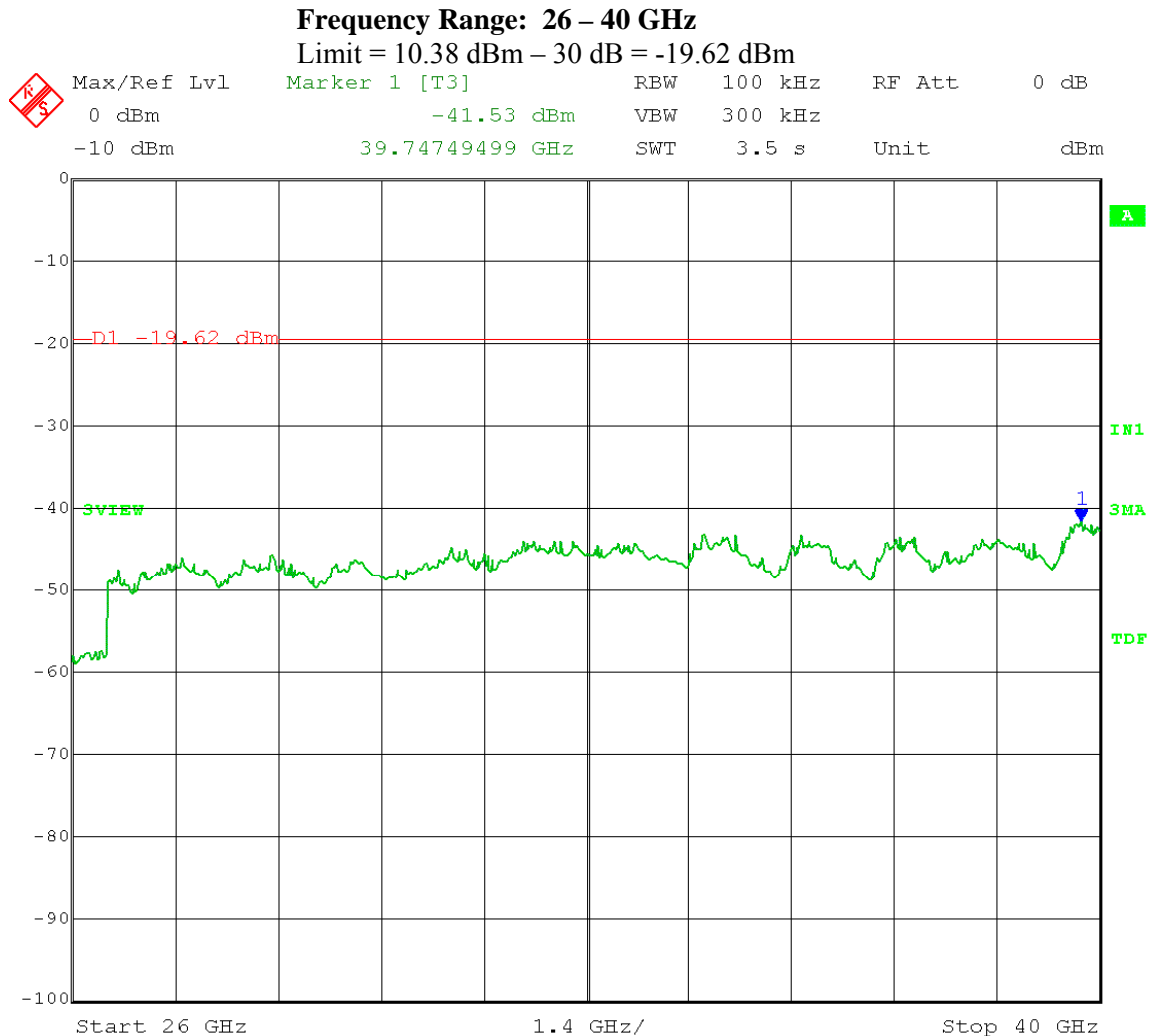


Date: 16.MAY.2012 09:27:13

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

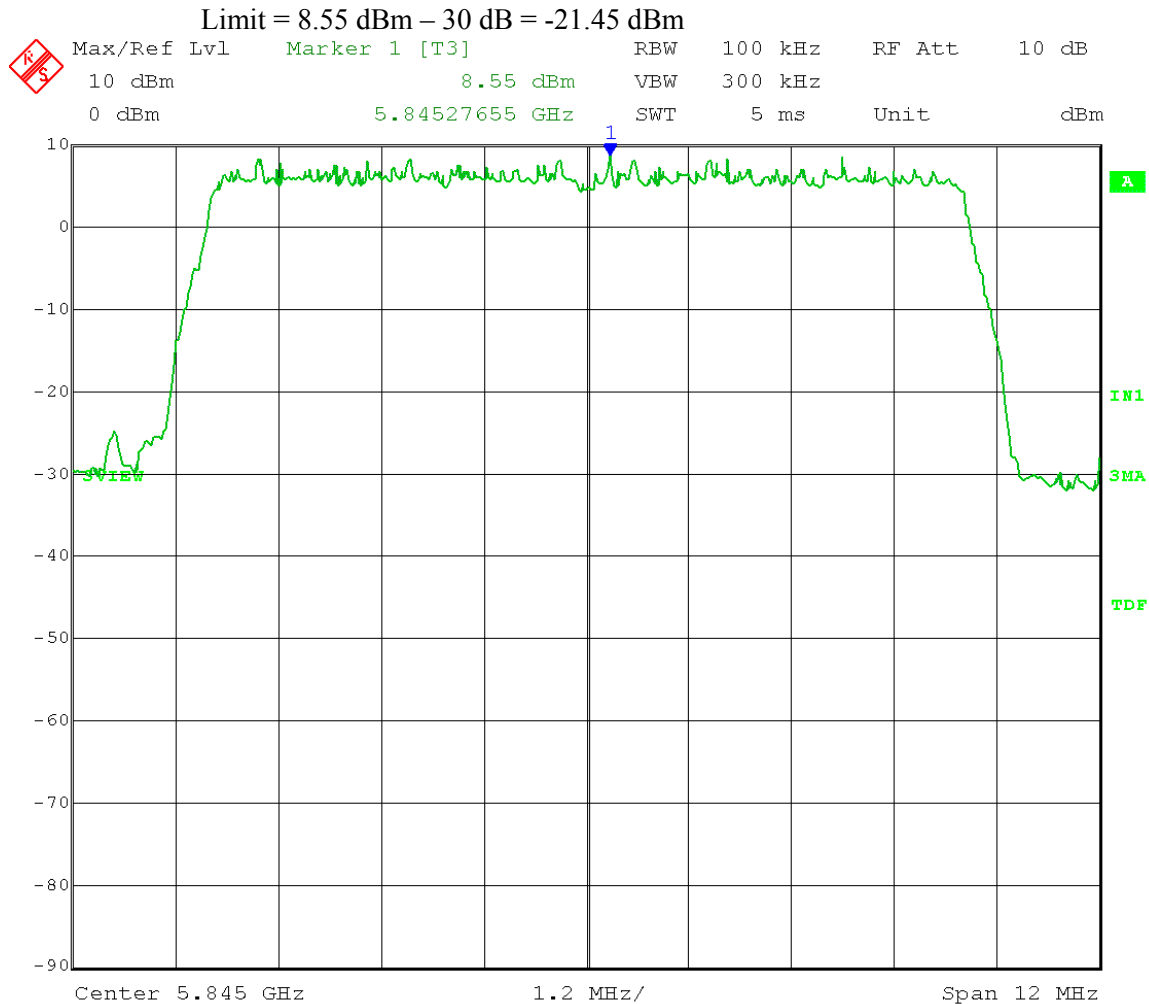


Date: 16.MAY.2012 11:26:38

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

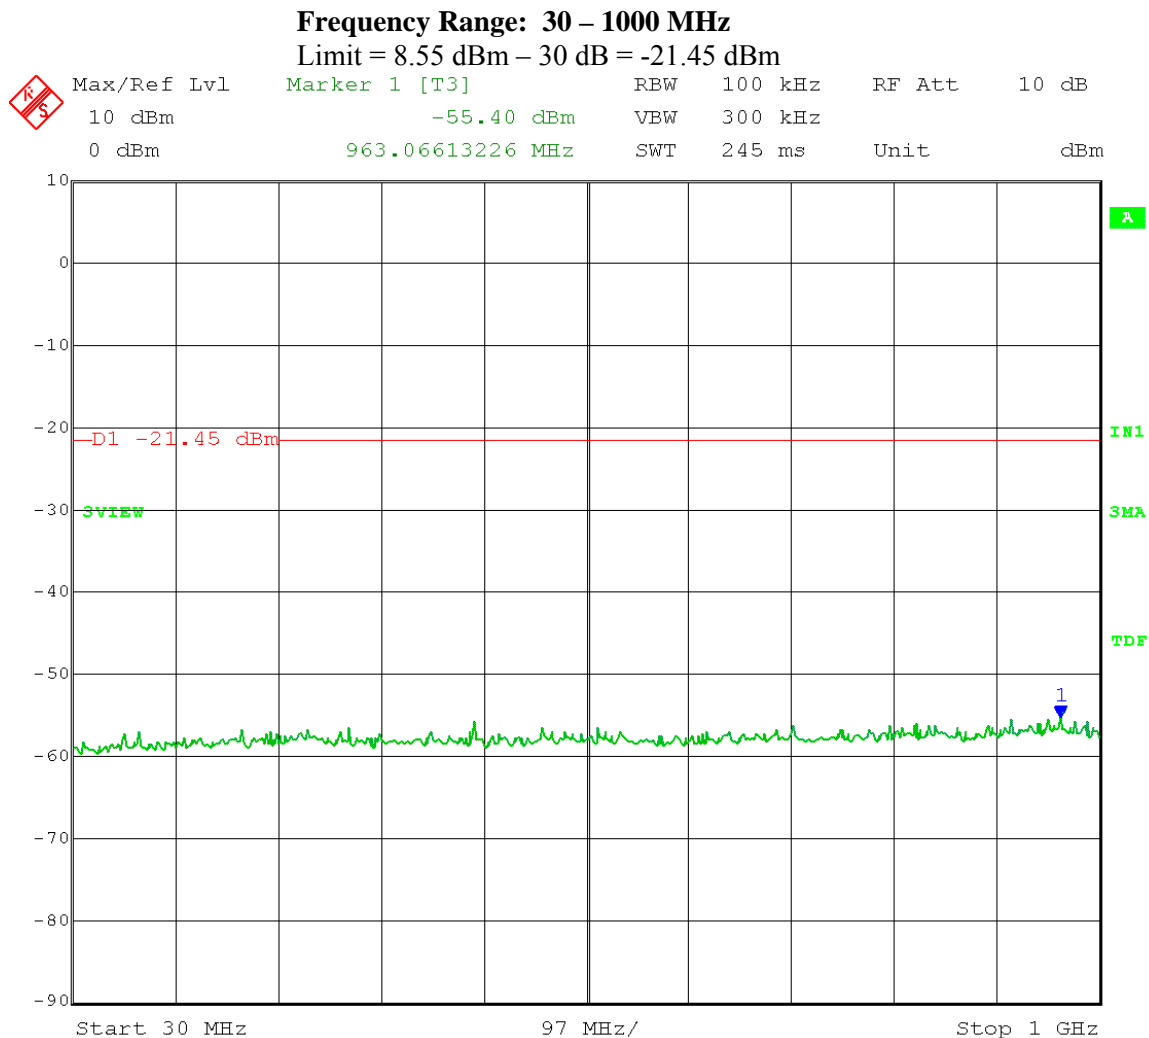


Date: 16.MAY.2012 11:41:13

Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
 Output port: Channel A; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

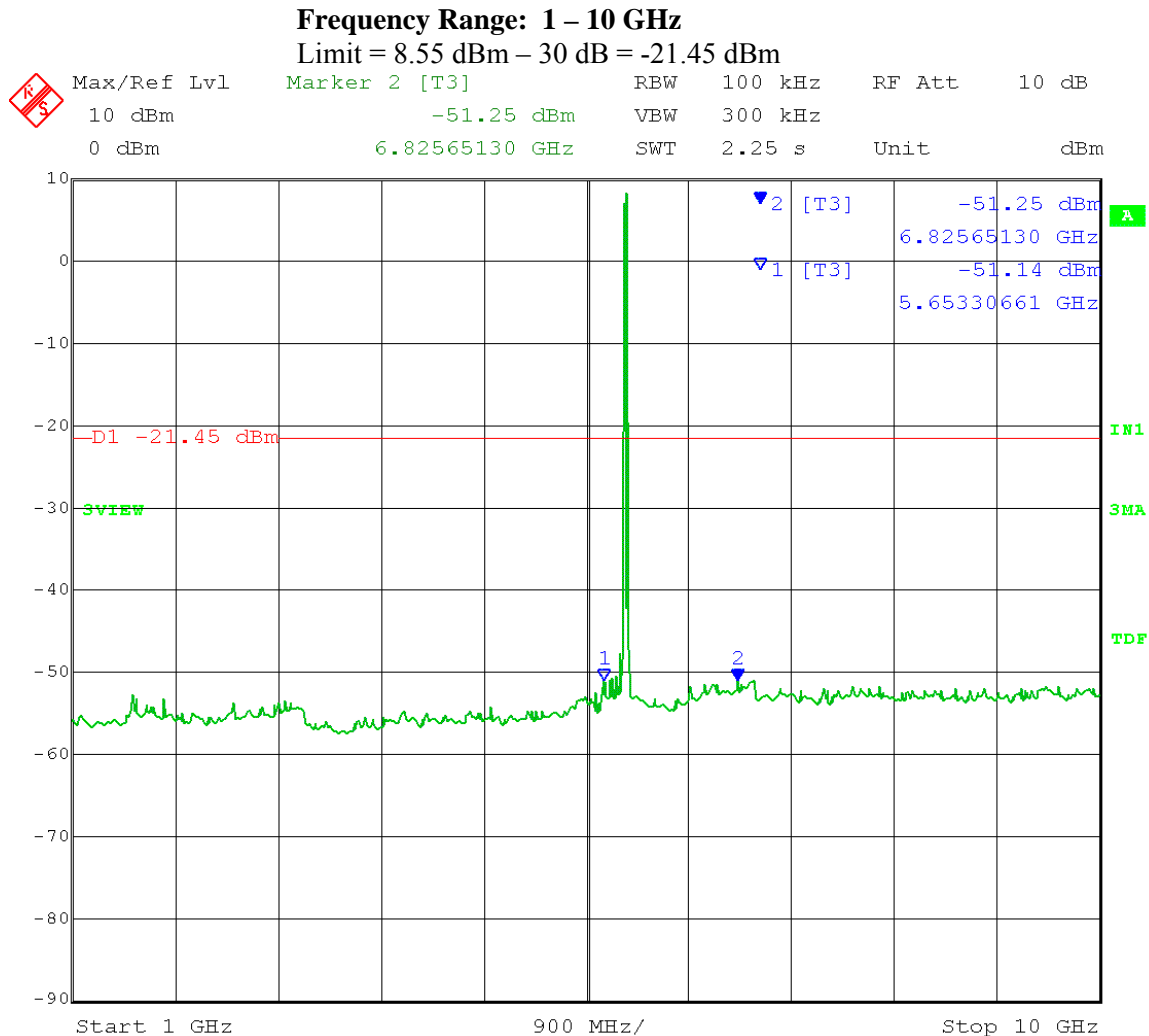


Date: 16.MAY.2012 11:36:11

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

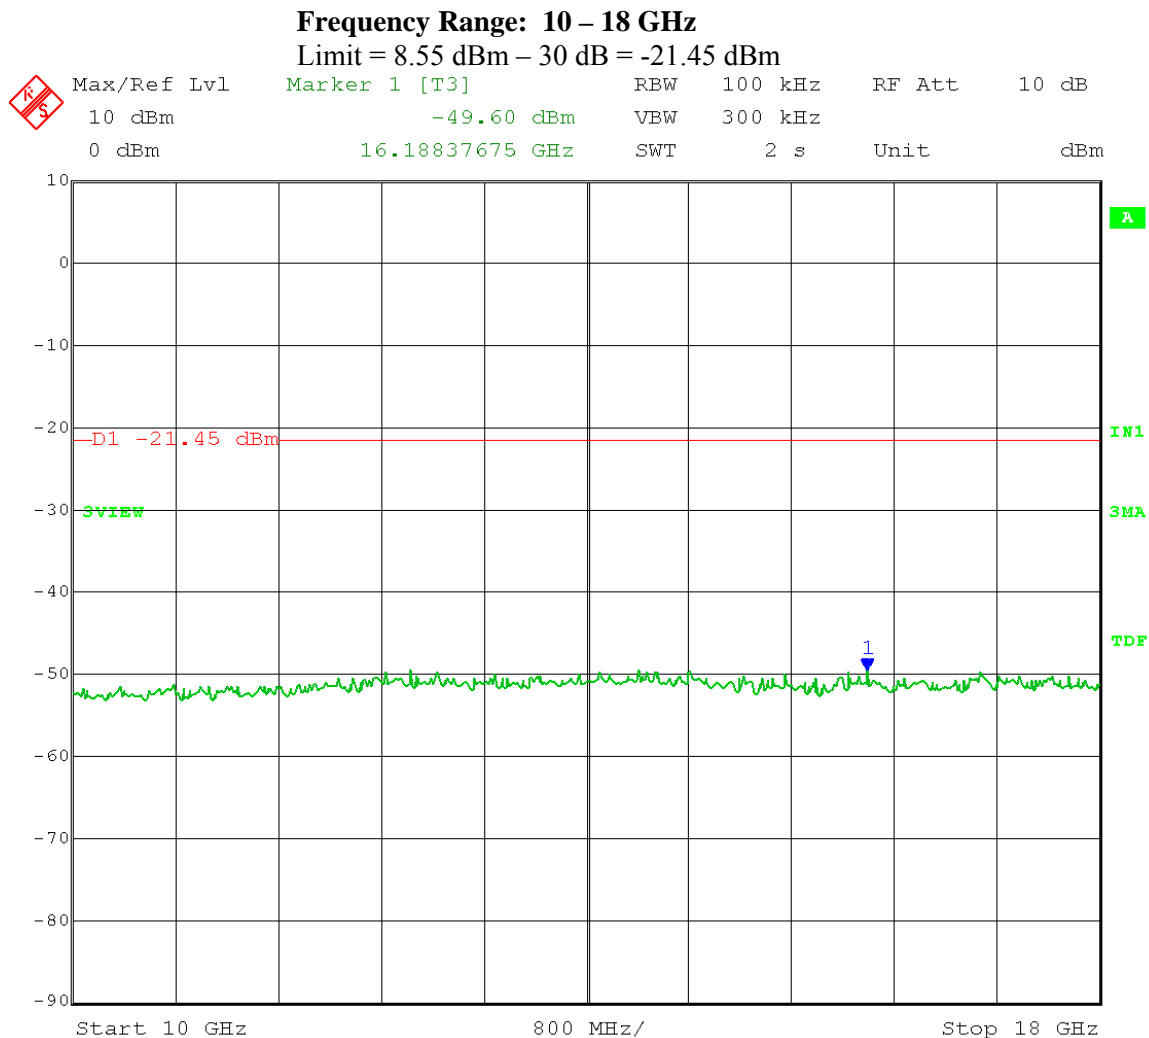


Date: 16.MAY.2012 11:37:44

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

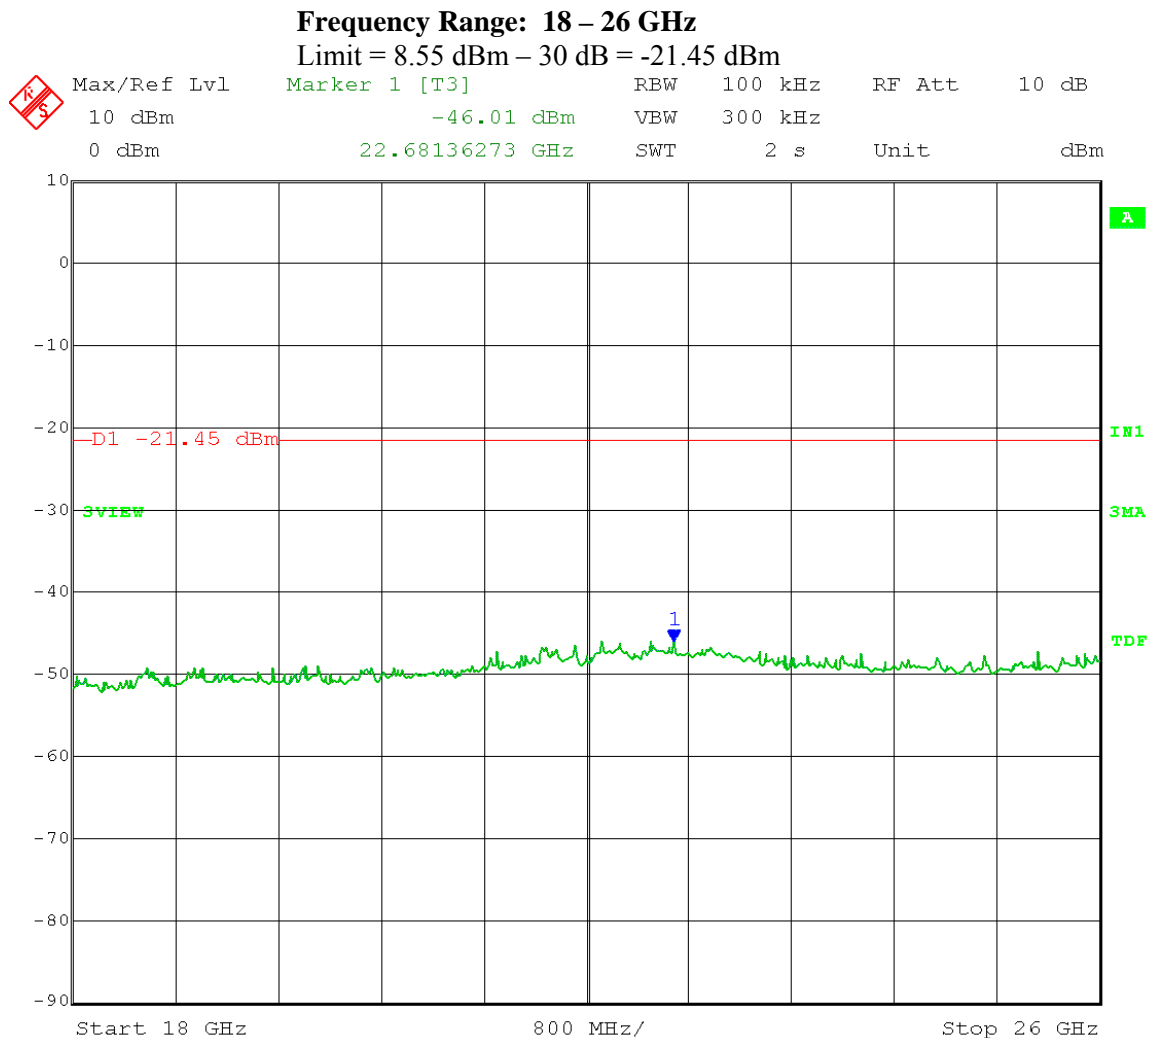


Date: 16.MAY.2012 11:38:48

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

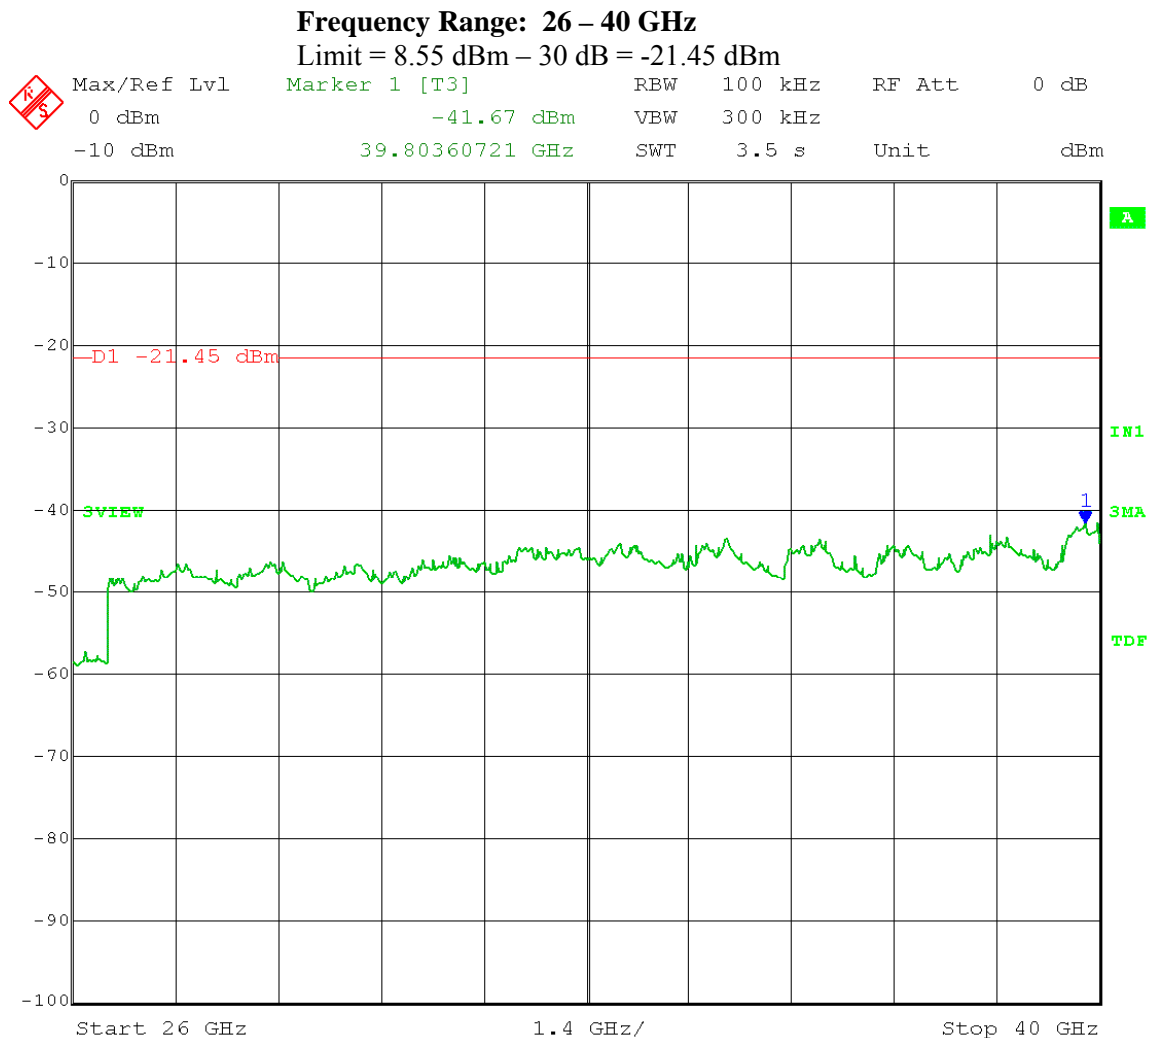


Date: 16.MAY.2012 11:39:56

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

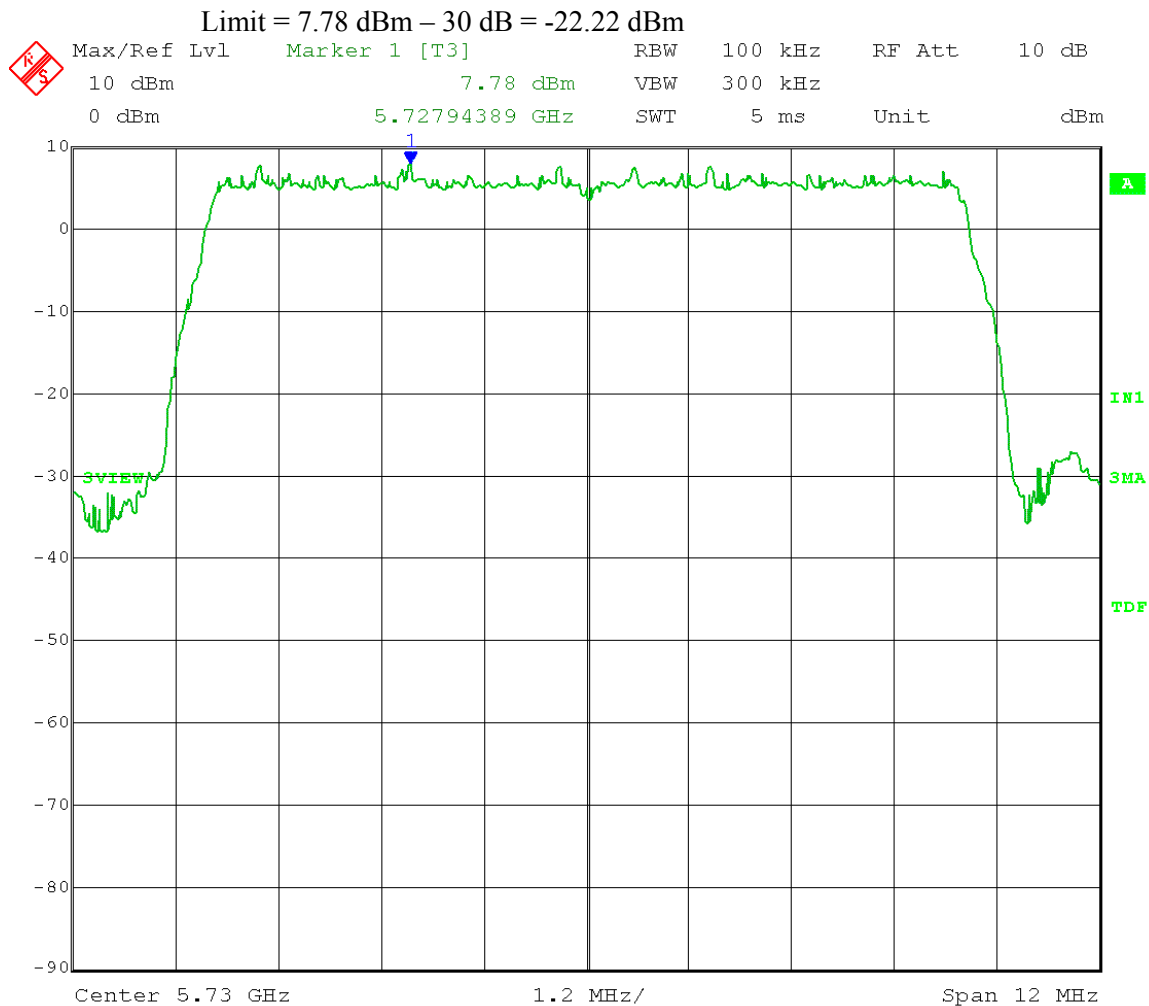


Date: 17.MAY.2012 11:10:06

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

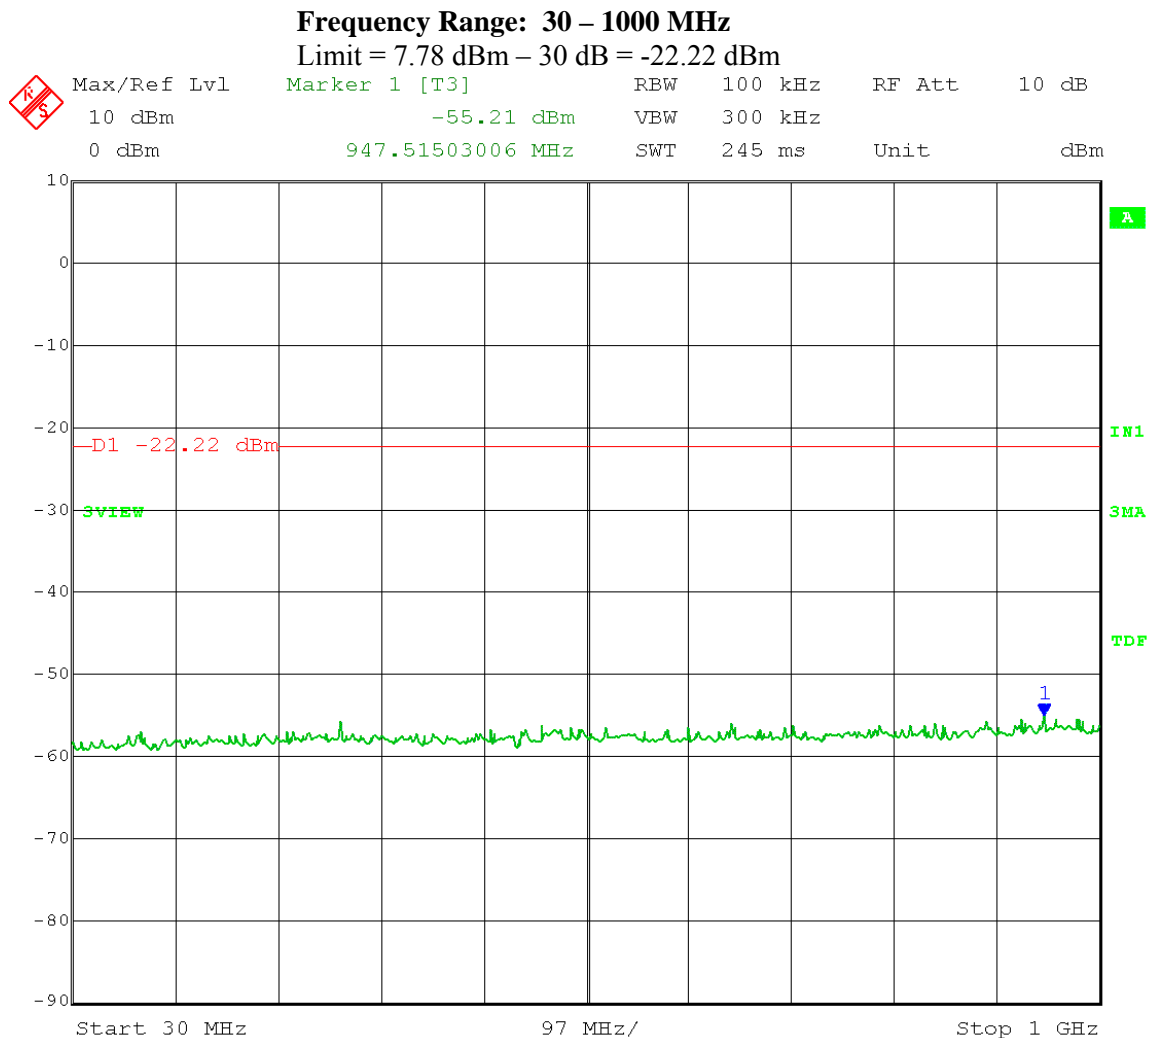


Date: 17.MAY.2012 11:24:24

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

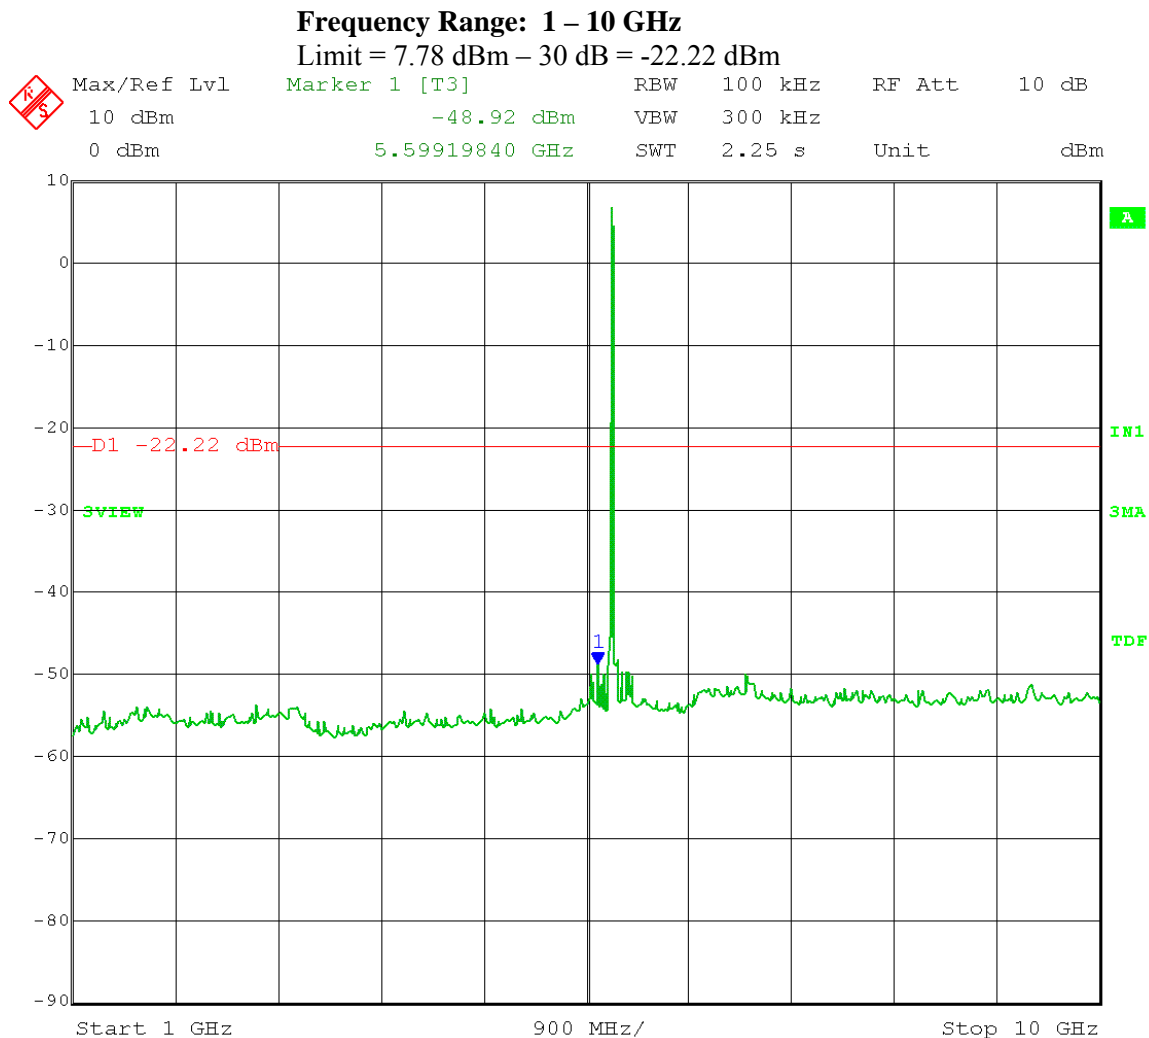


Date: 17.MAY.2012 11:18:43

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

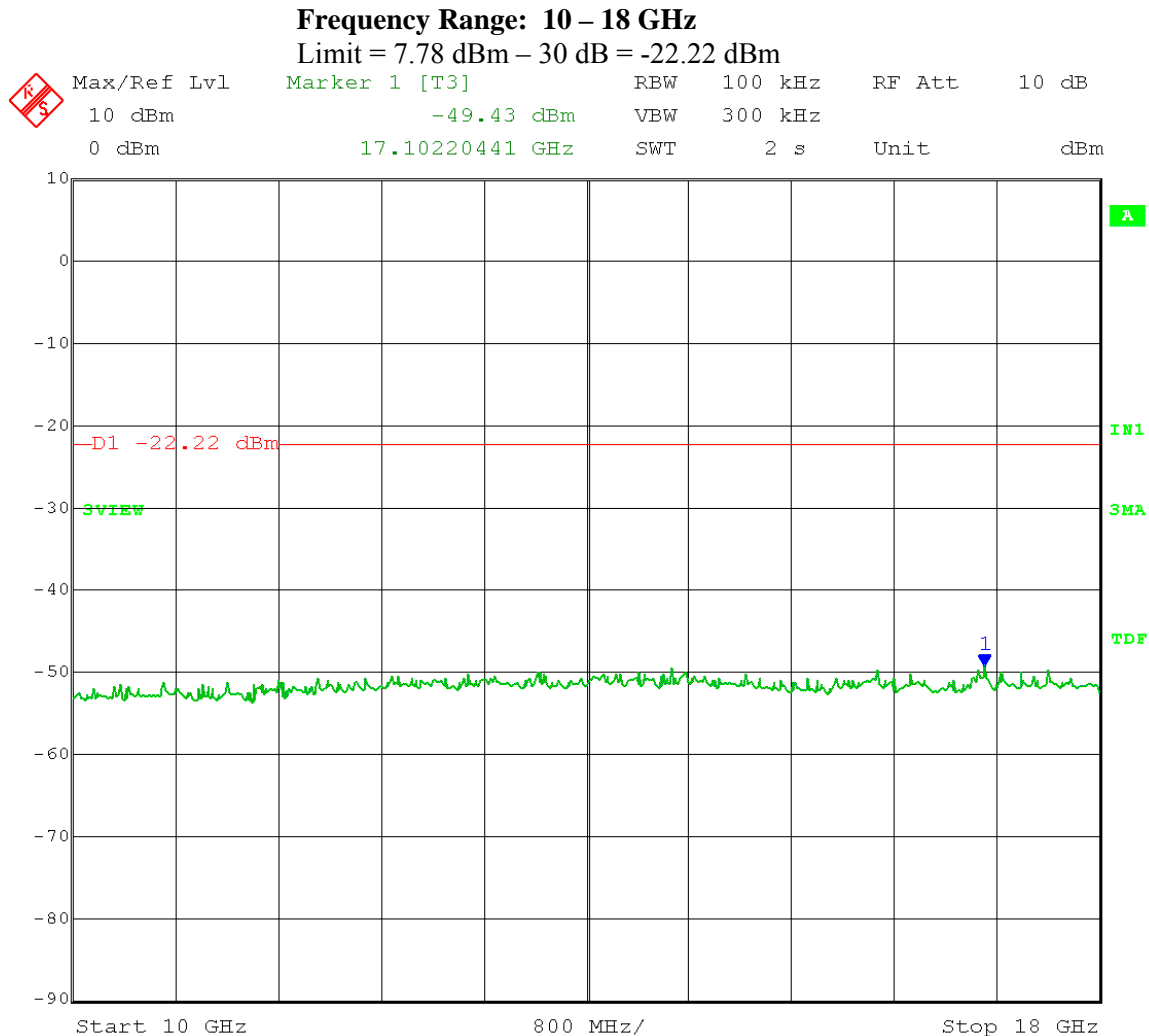


Date: 17.MAY.2012 11:19:47

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

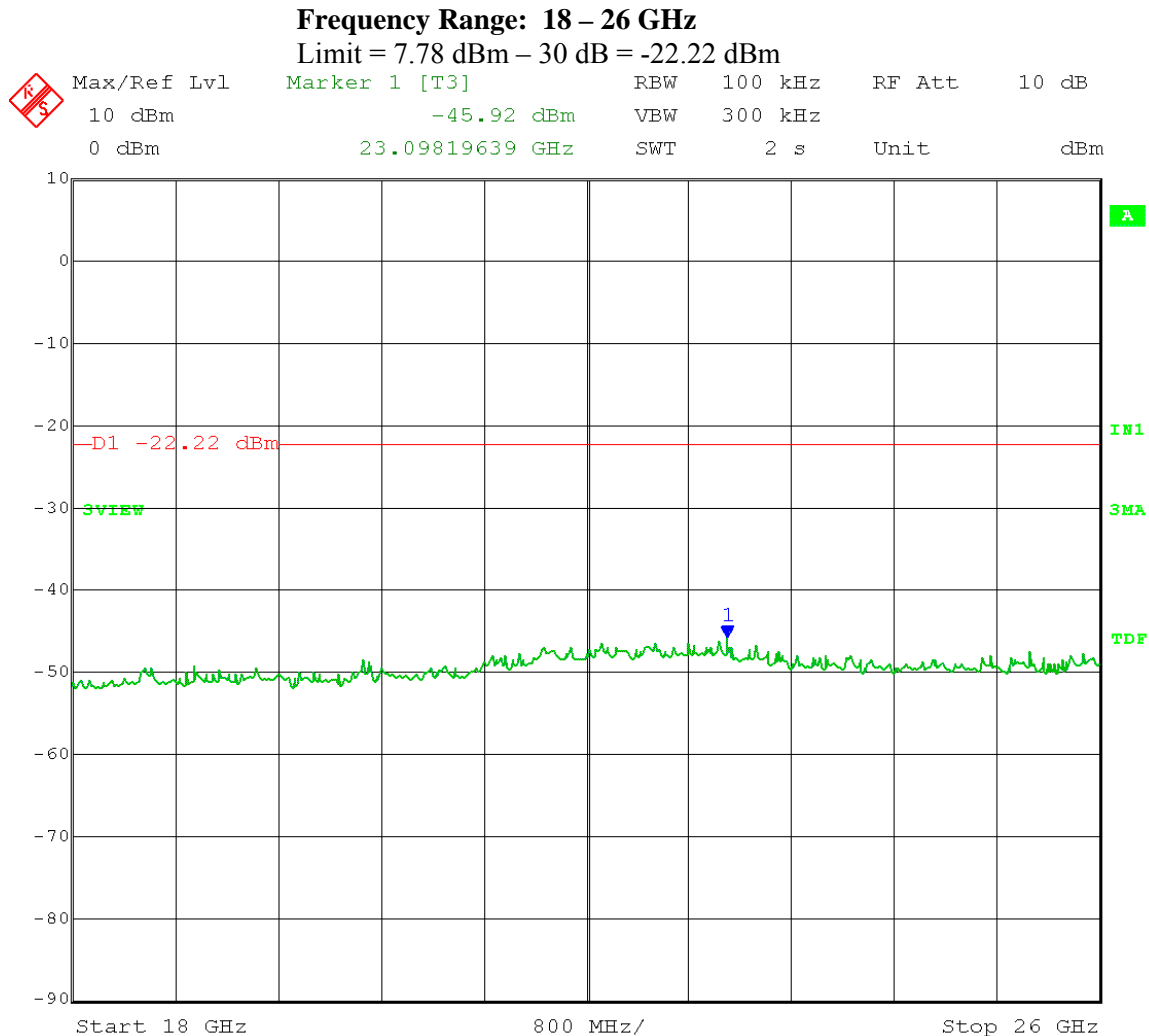


Date: 17.MAY.2012 11:21:37

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

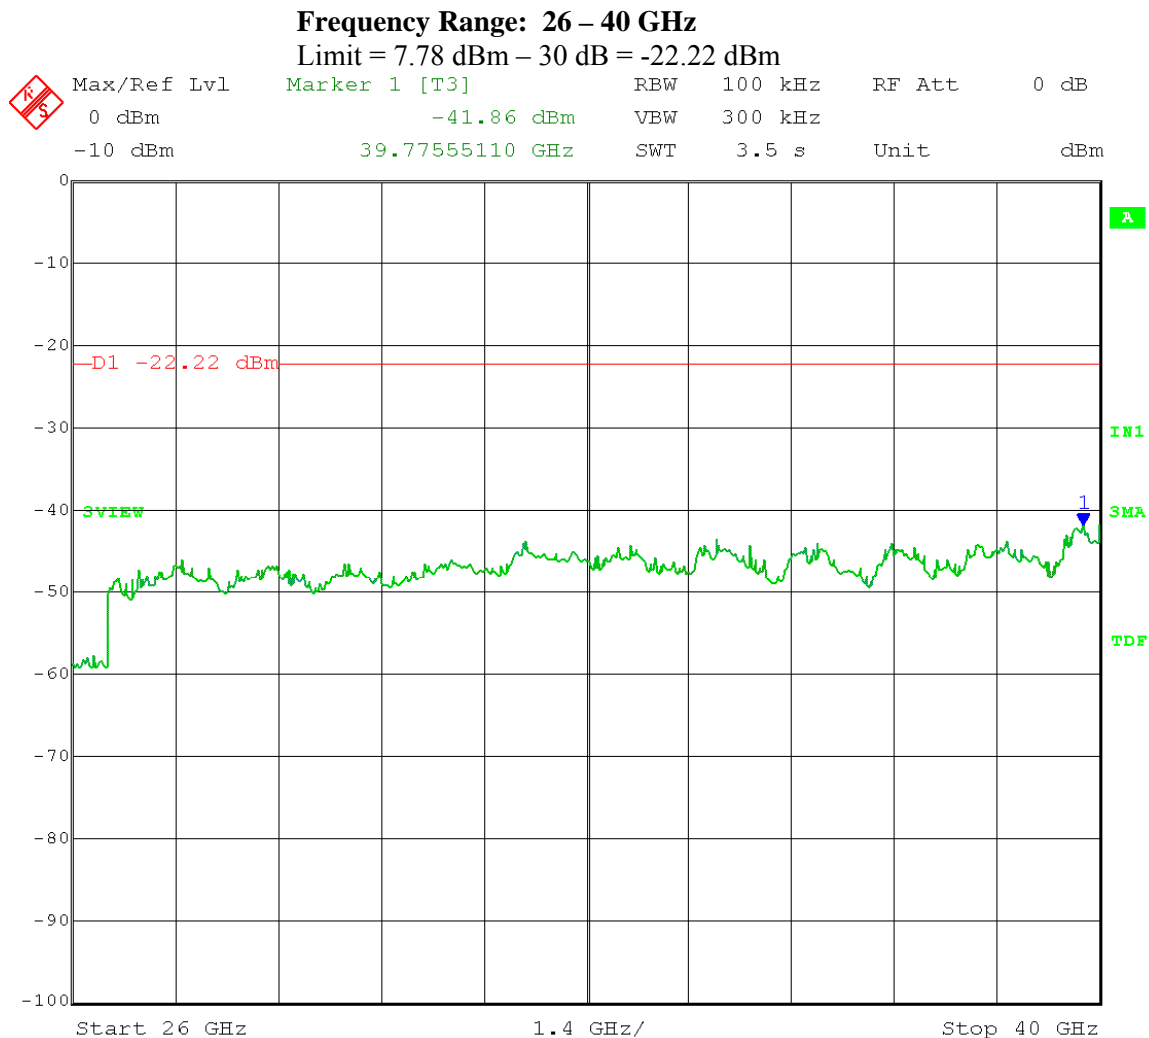


Date: 17.MAY.2012 11:22:50

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

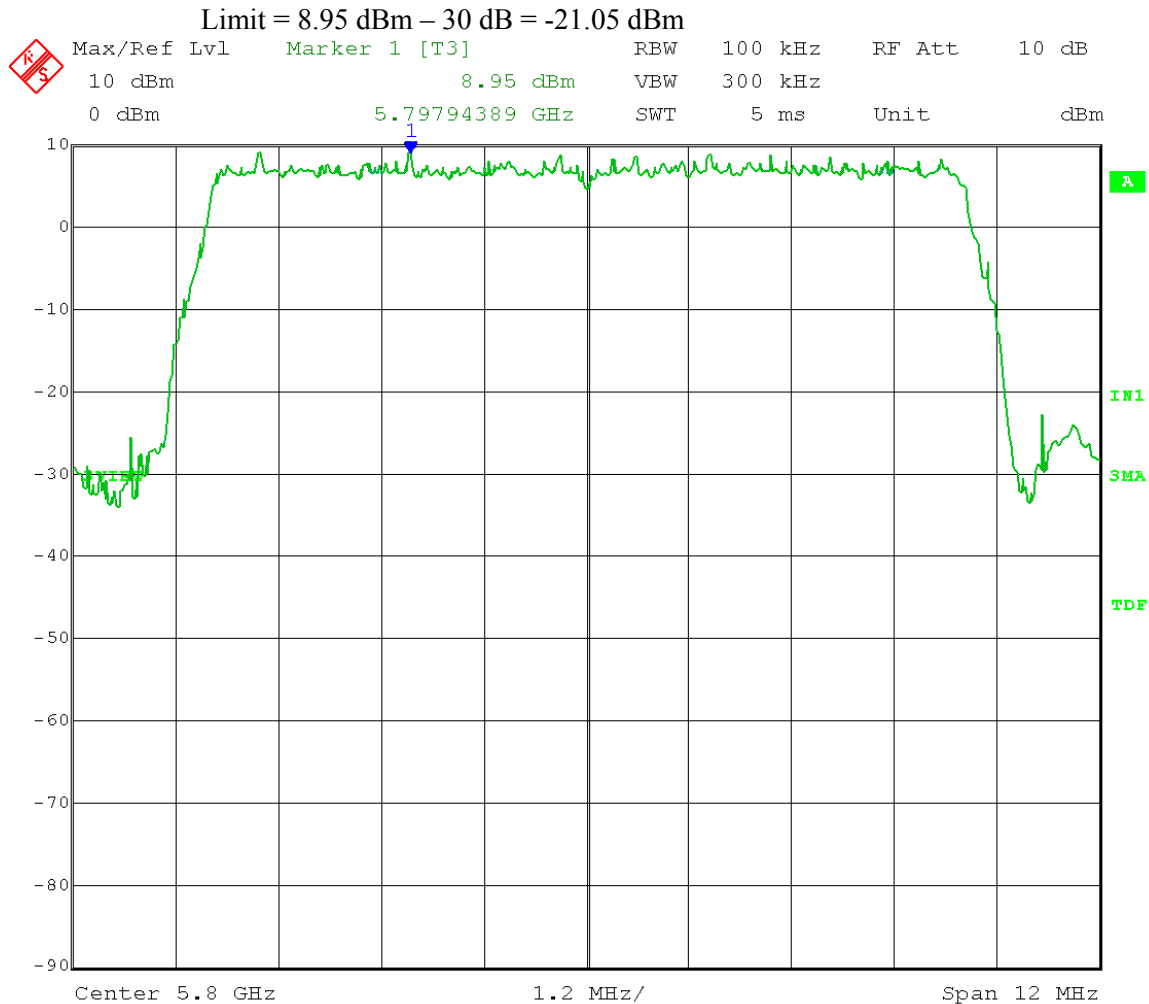


Date: 17.MAY.2012 10:14:16

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

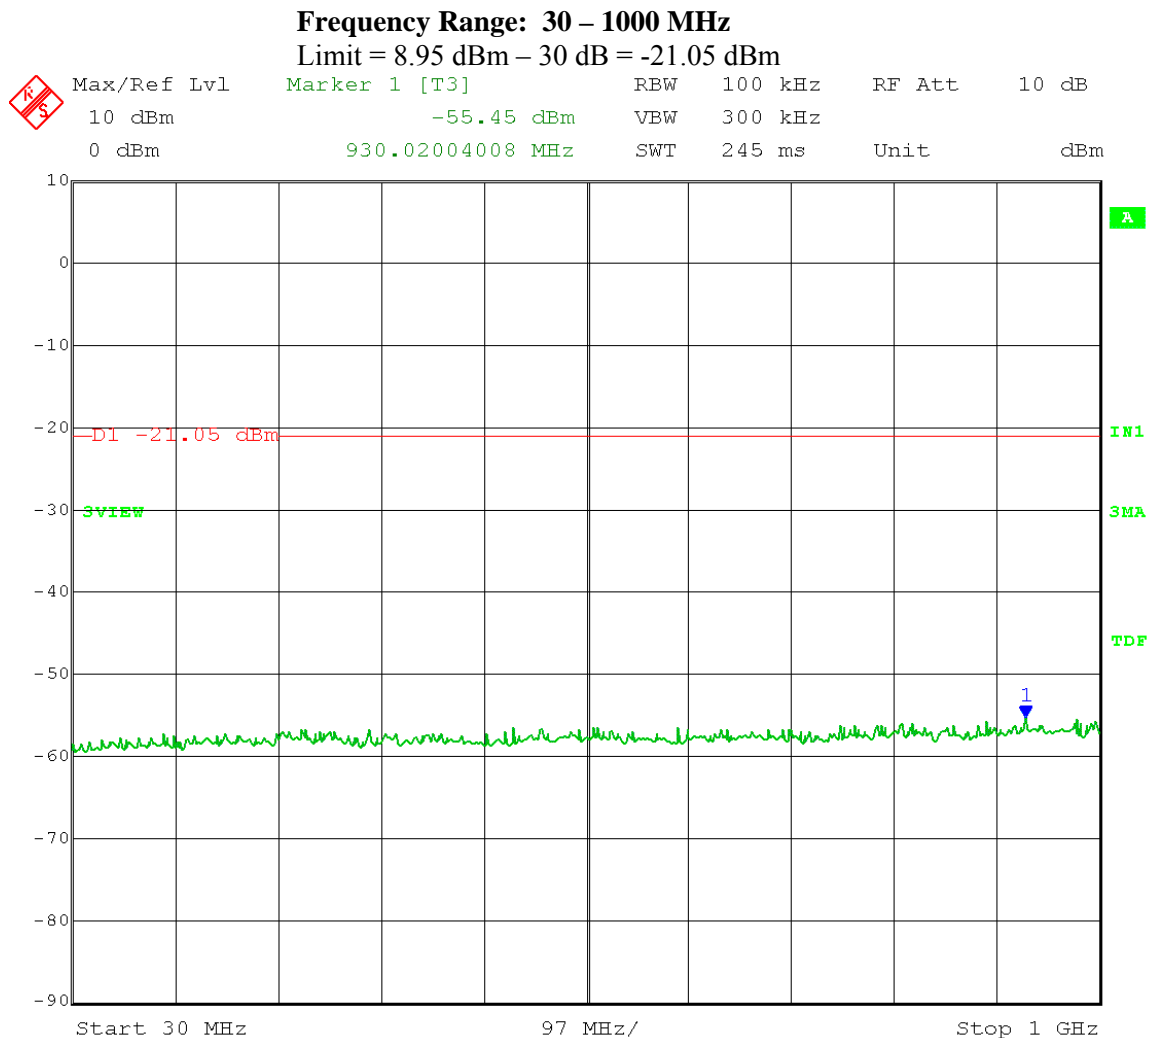


Date: 17.MAY.2012 10:22:00

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

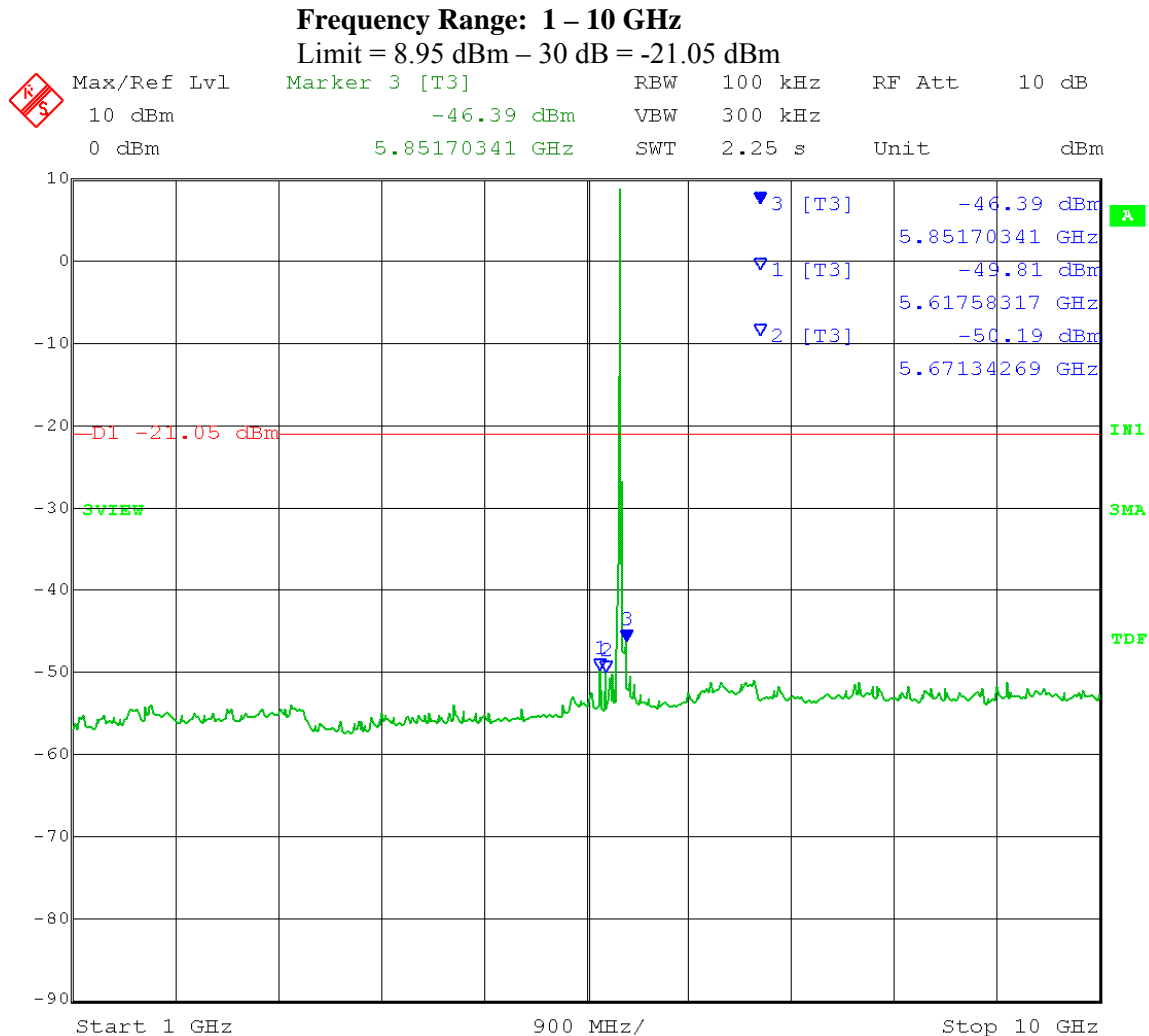


Date: 17.MAY.2012 10:16:55

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

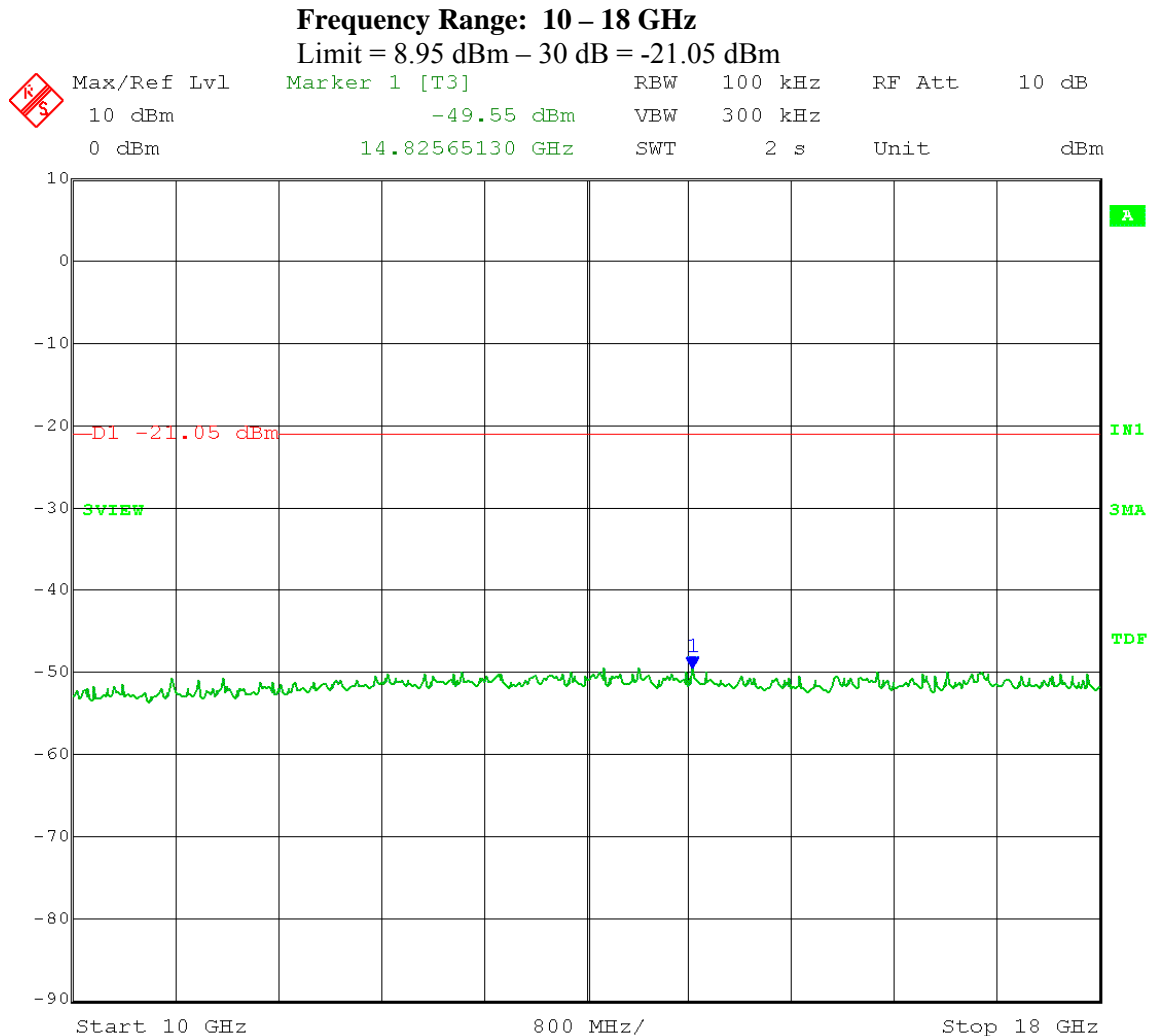

Date: 17.MAY.2012 10:18:09

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B


RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

Frequency Range: 18– 26 GHz

Limit = 8.95 dBm – 30 dB = -21.05 dBm

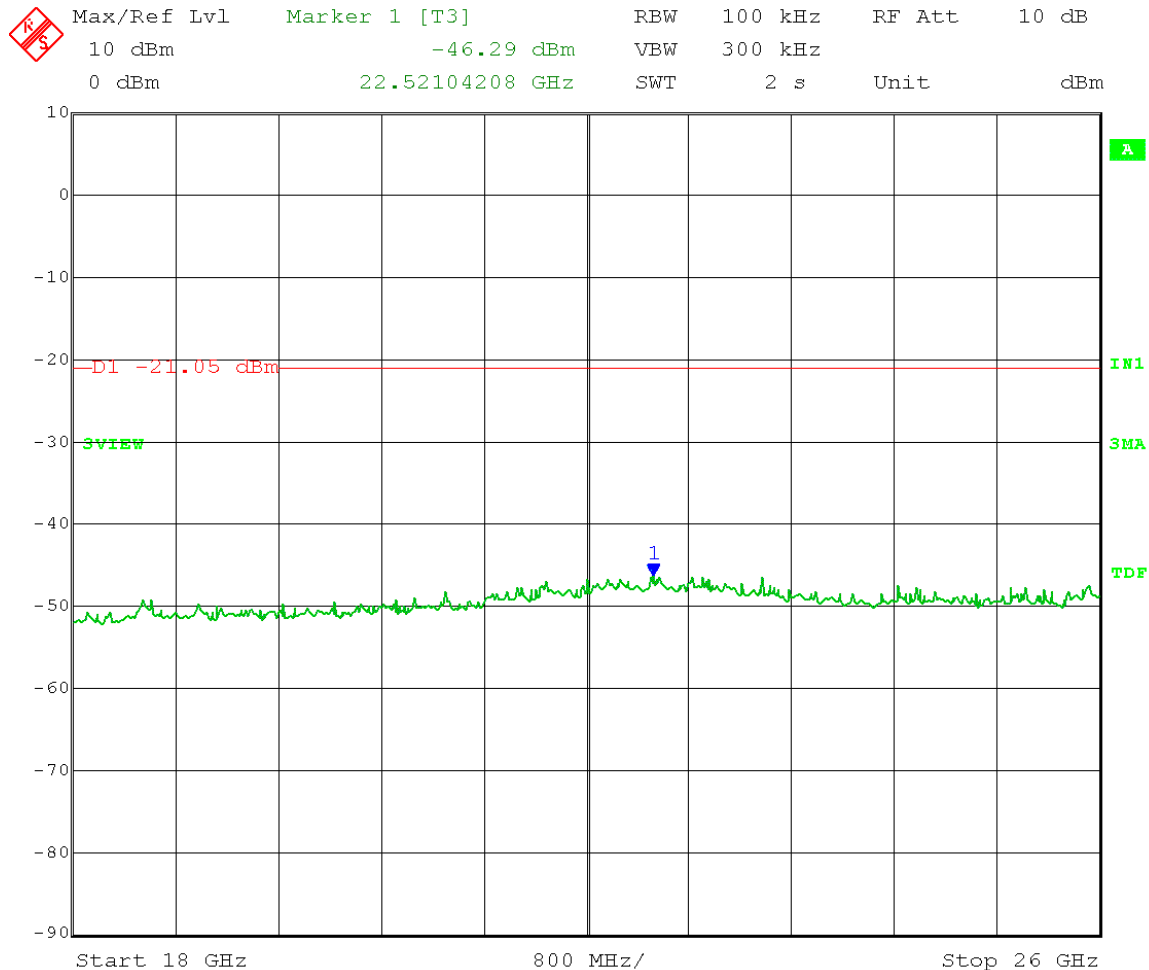


Date: 17.MAY.2012 10:19:18

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

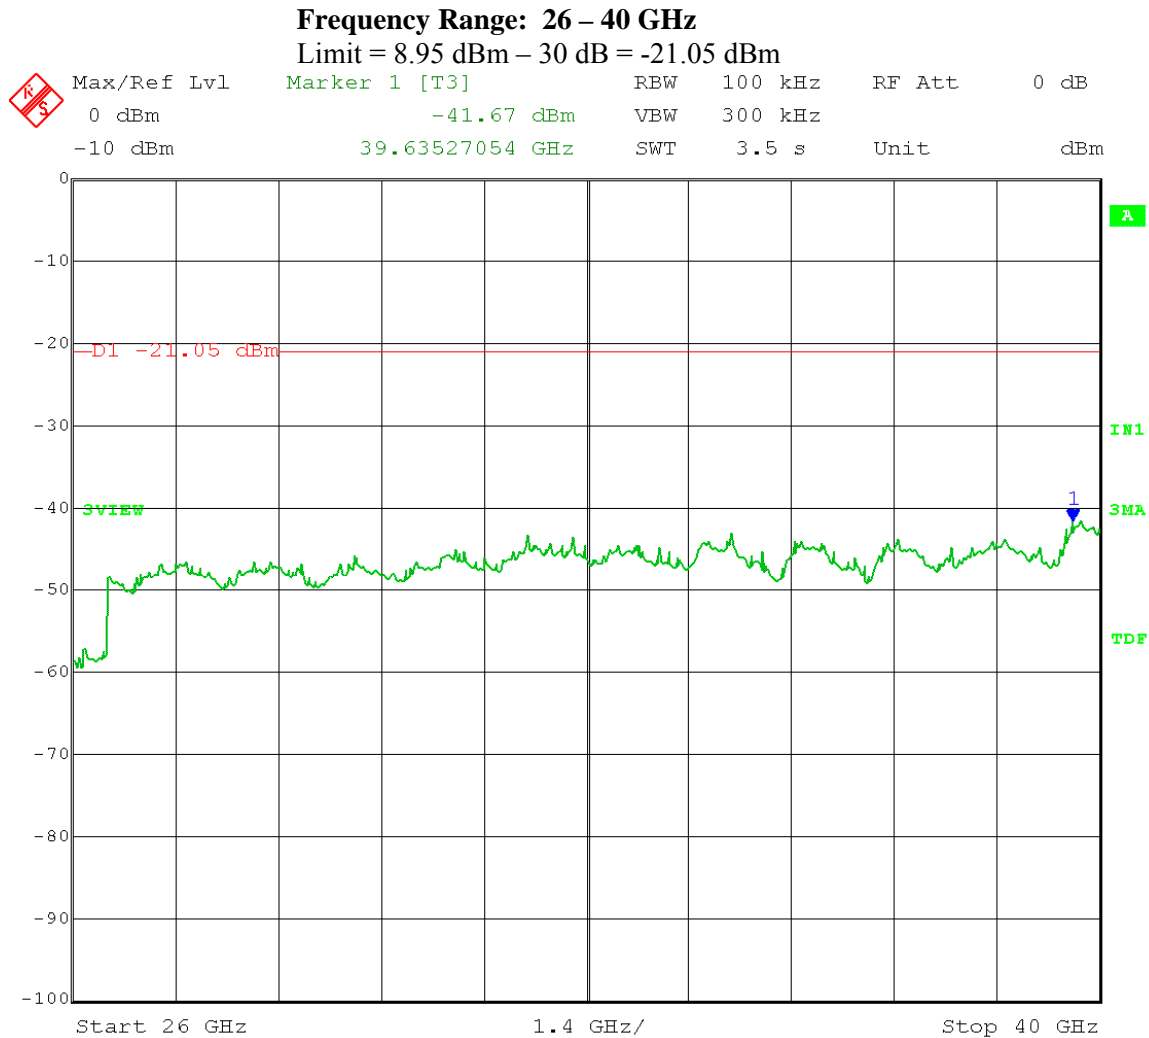


Date: 17.MAY.2012 10:20:38

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

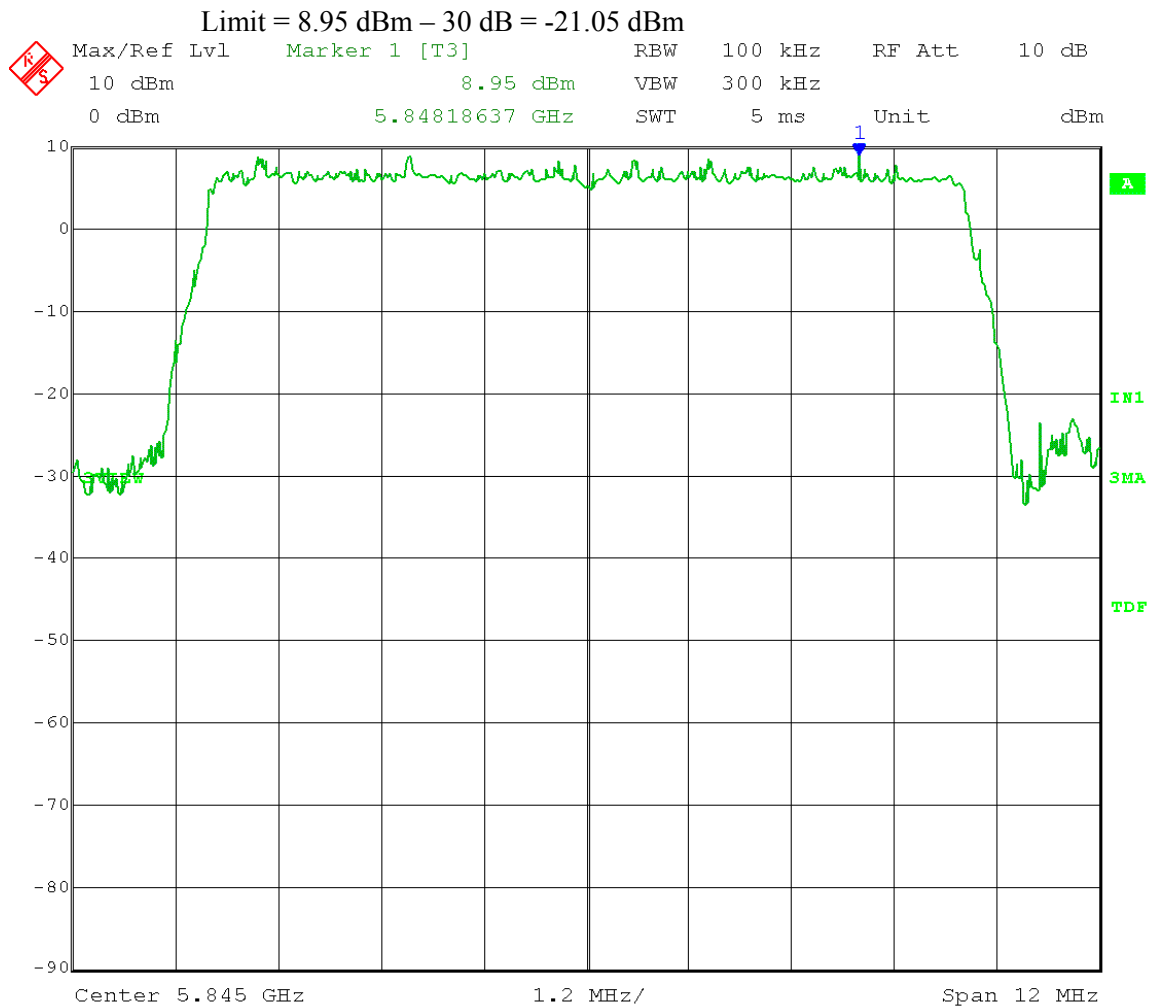


Date: 17.MAY.2012 11:36:52

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

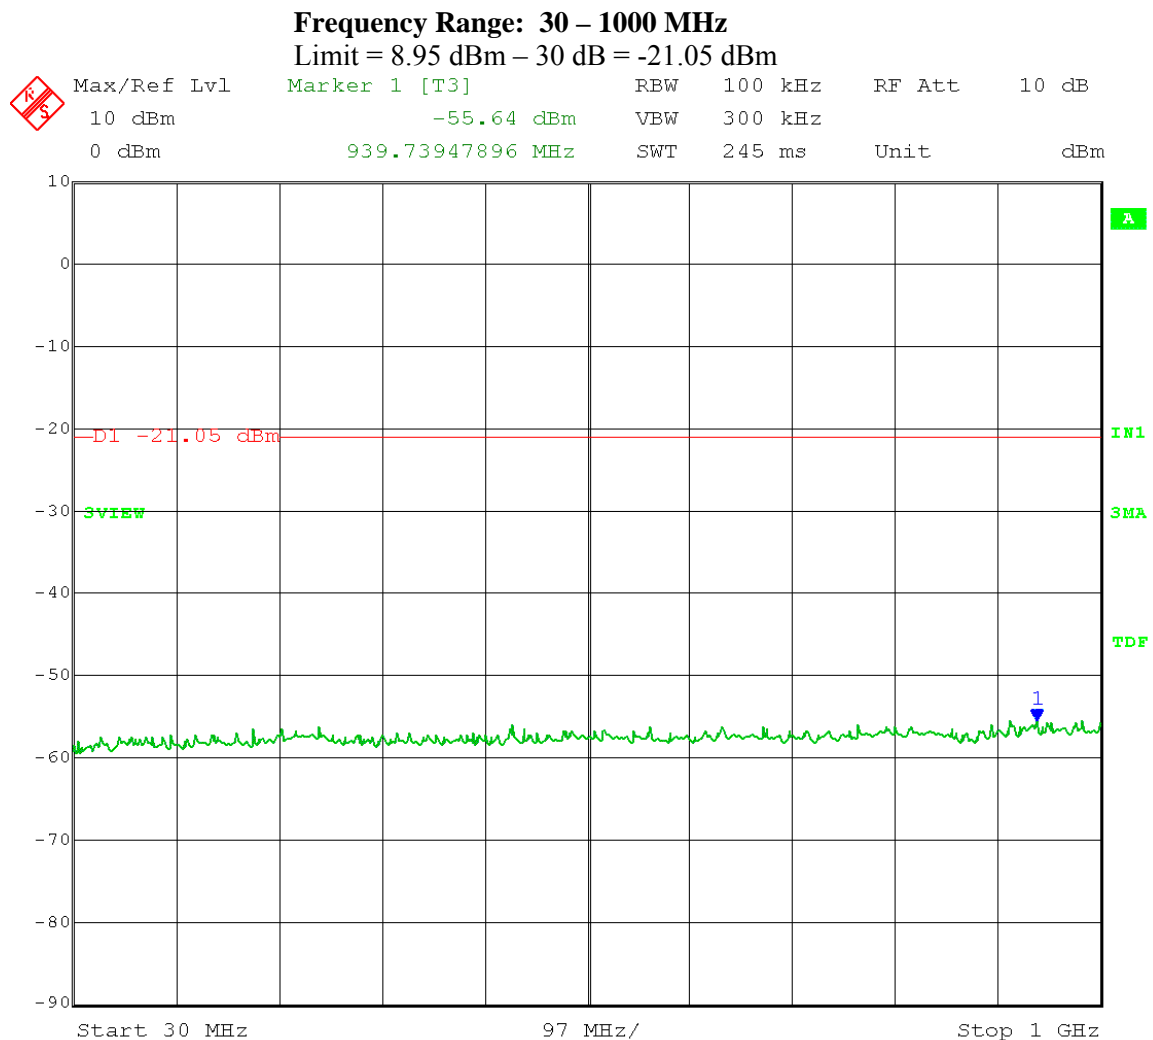


Date: 17.MAY.2012 11:49:48

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

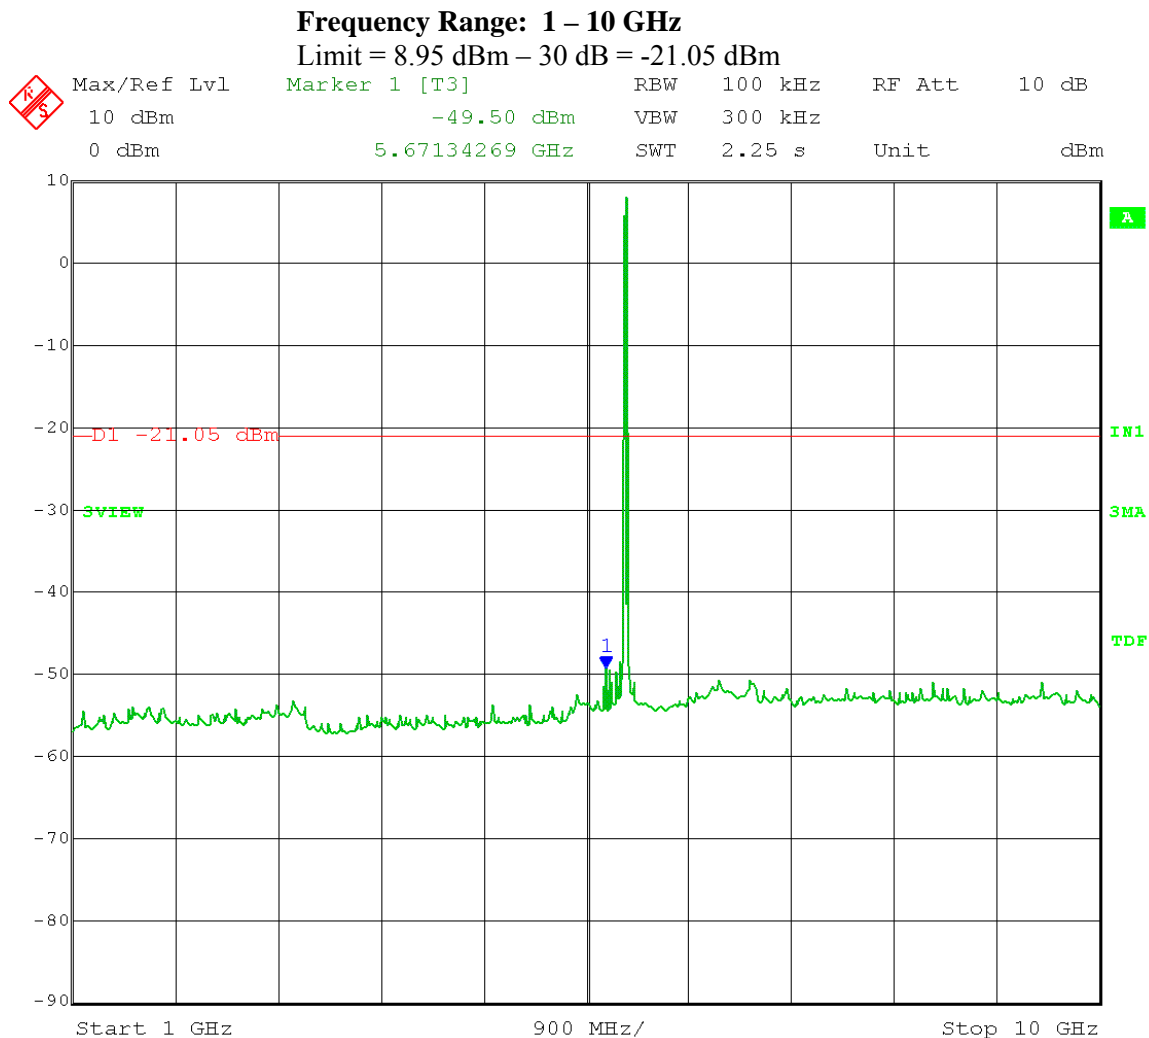


Date: 17.MAY.2012 11:44:20

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

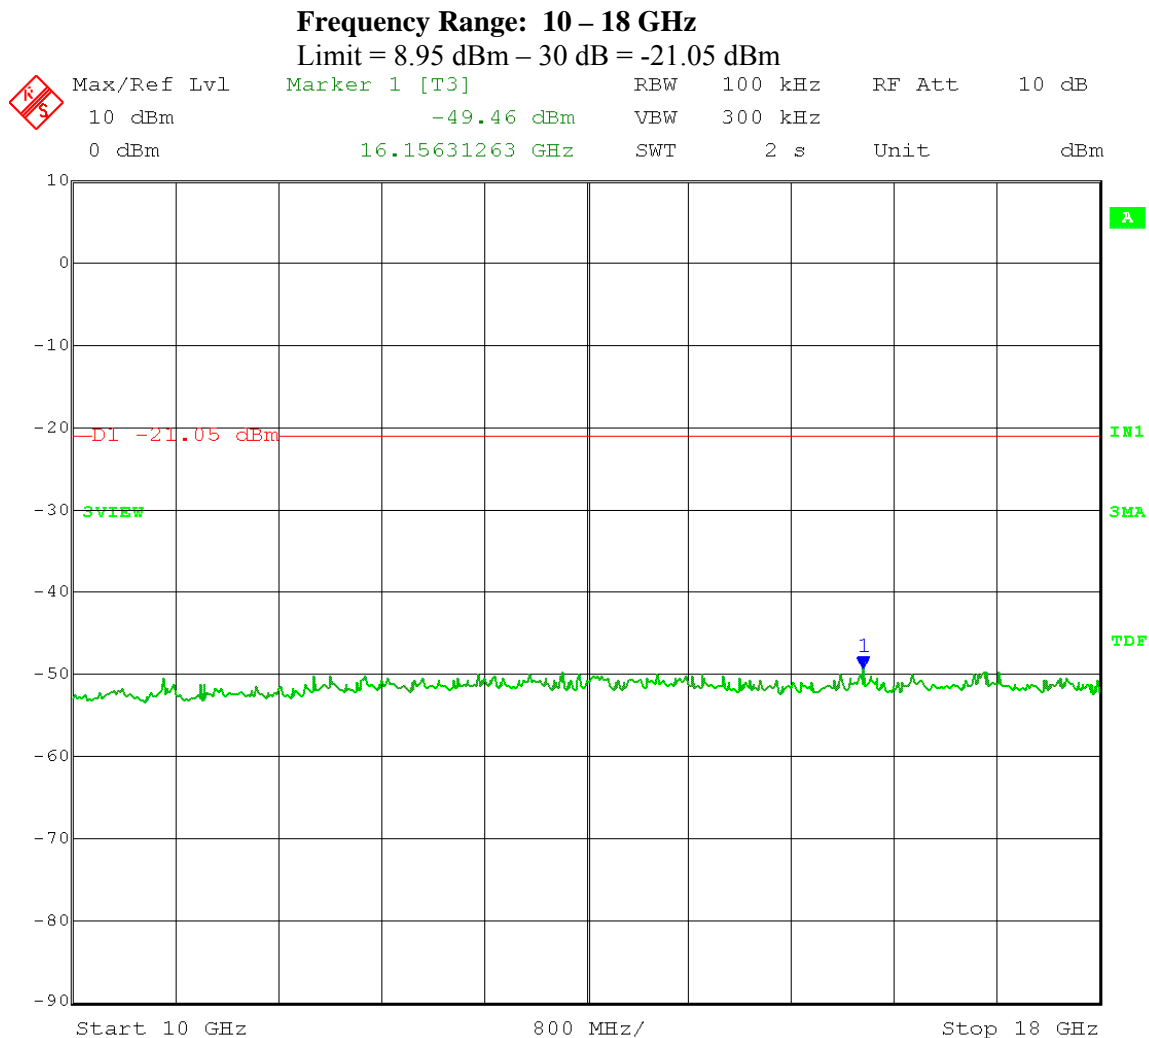


Date: 17.MAY.2012 11:45:35

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

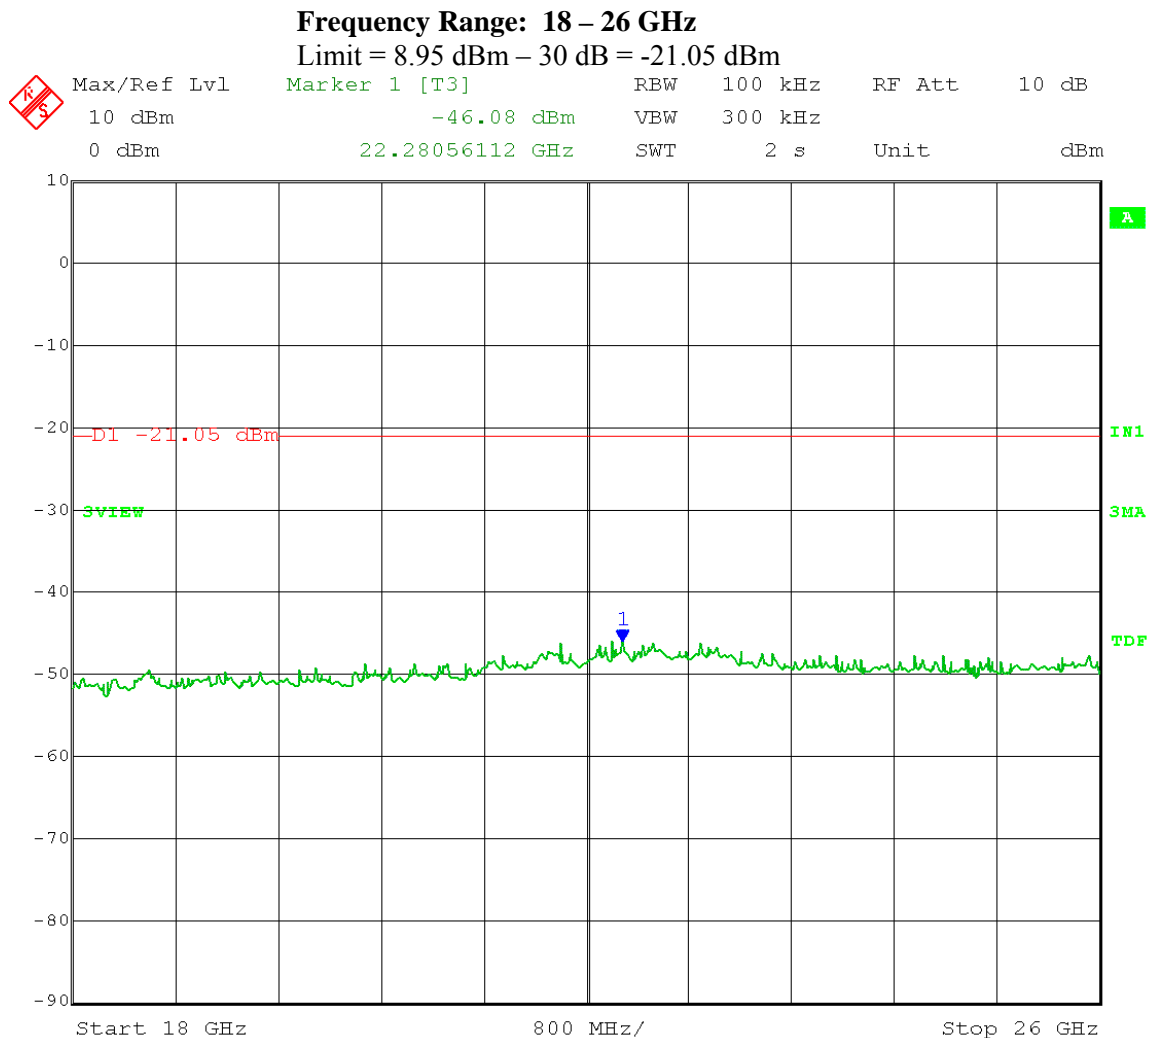


Date: 17.MAY.2012 11:46:52

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

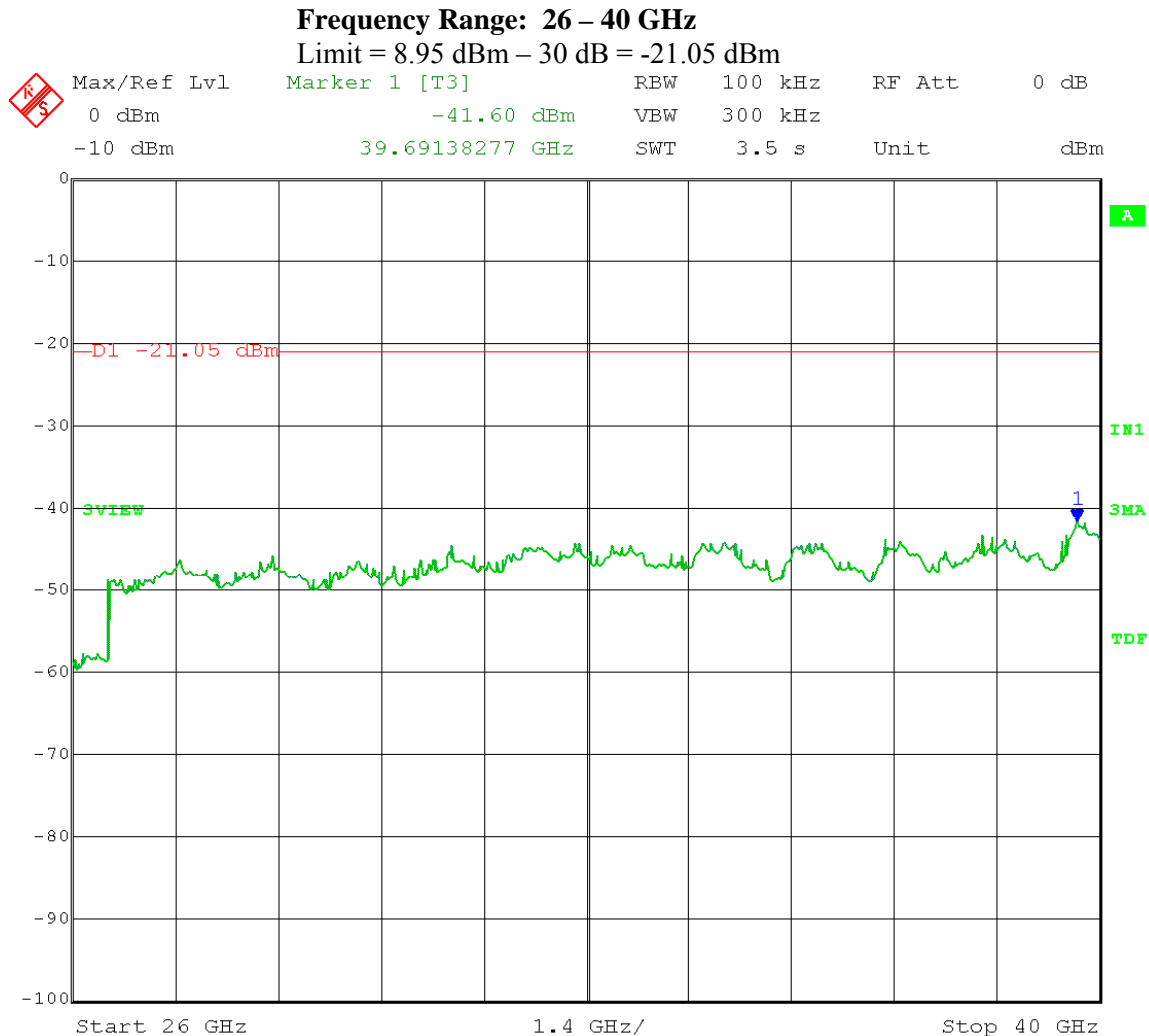


Date: 17.MAY.2012 11:48:11

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

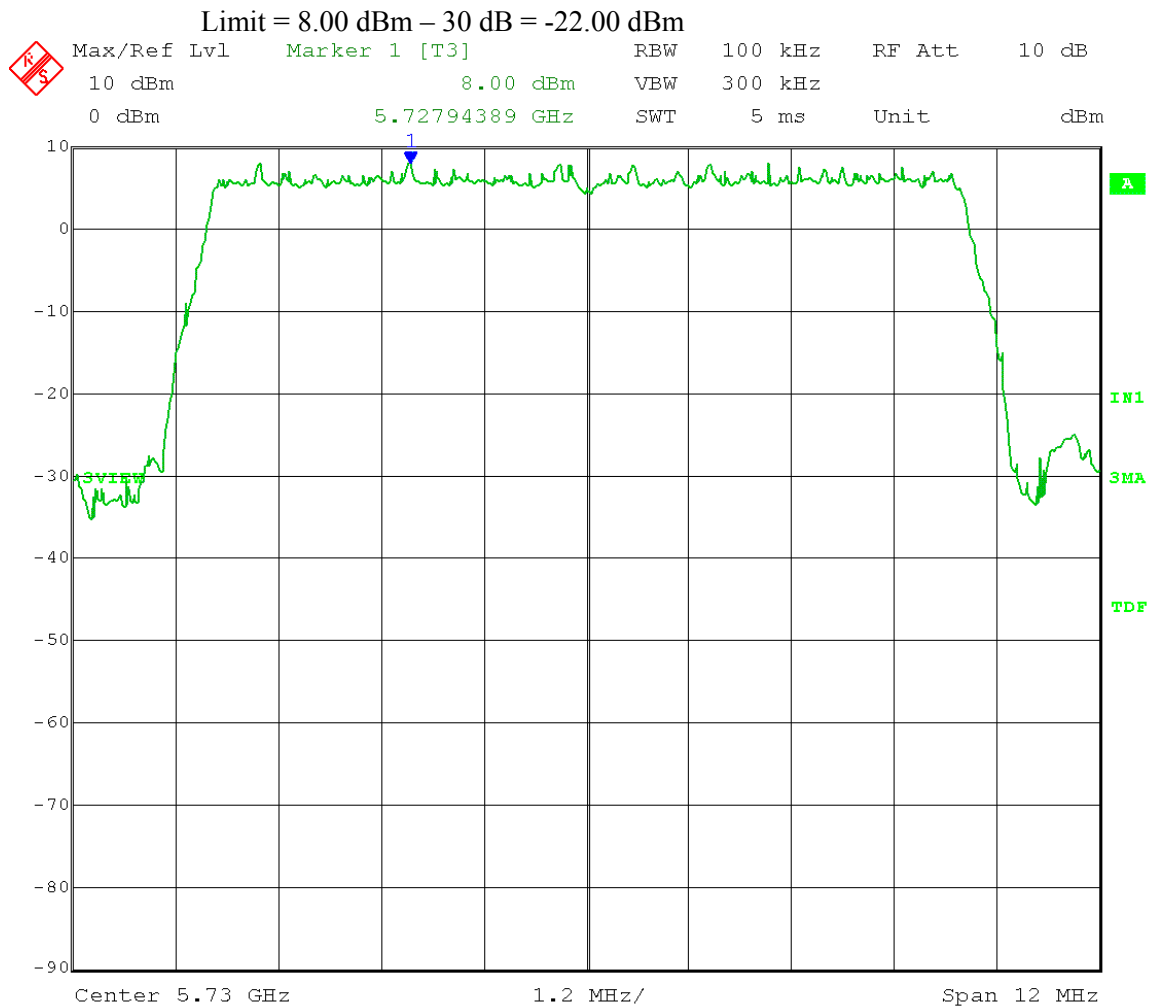


Date: 17.MAY.2012 13:45:48

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

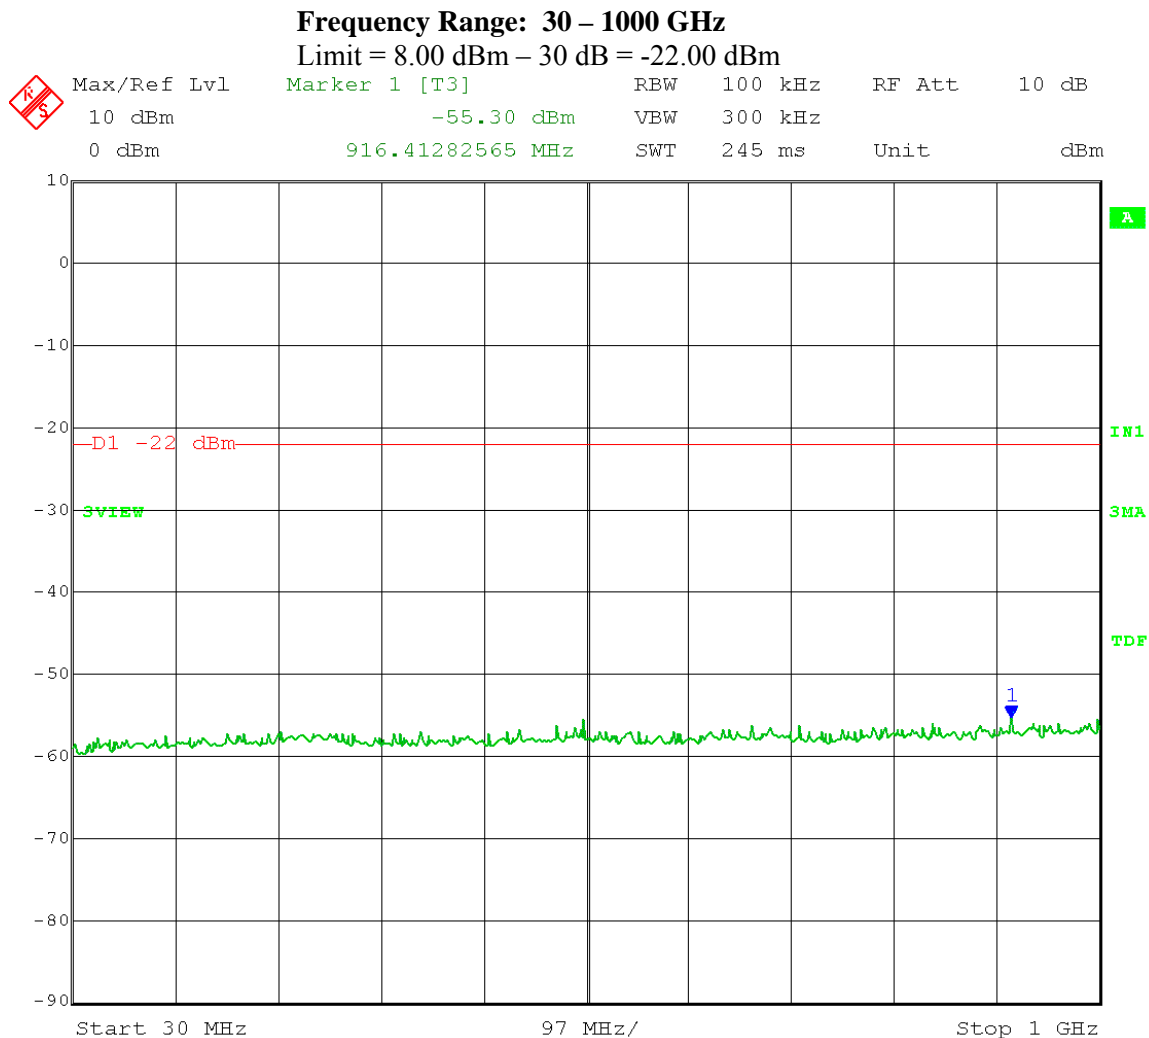


Date: 17.MAY.2012 13:58:38

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

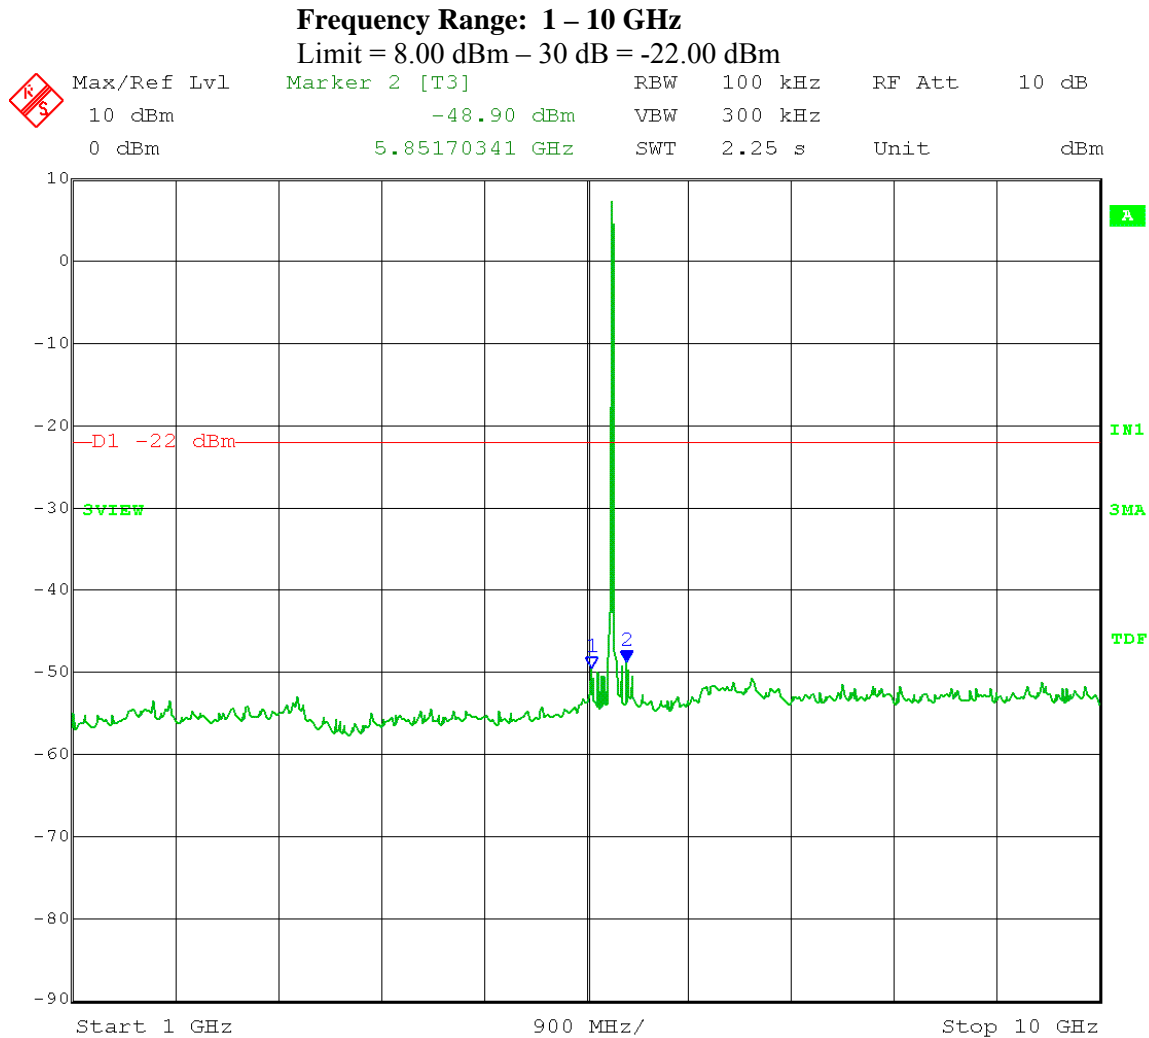


Date: 17.MAY.2012 13:52:37

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

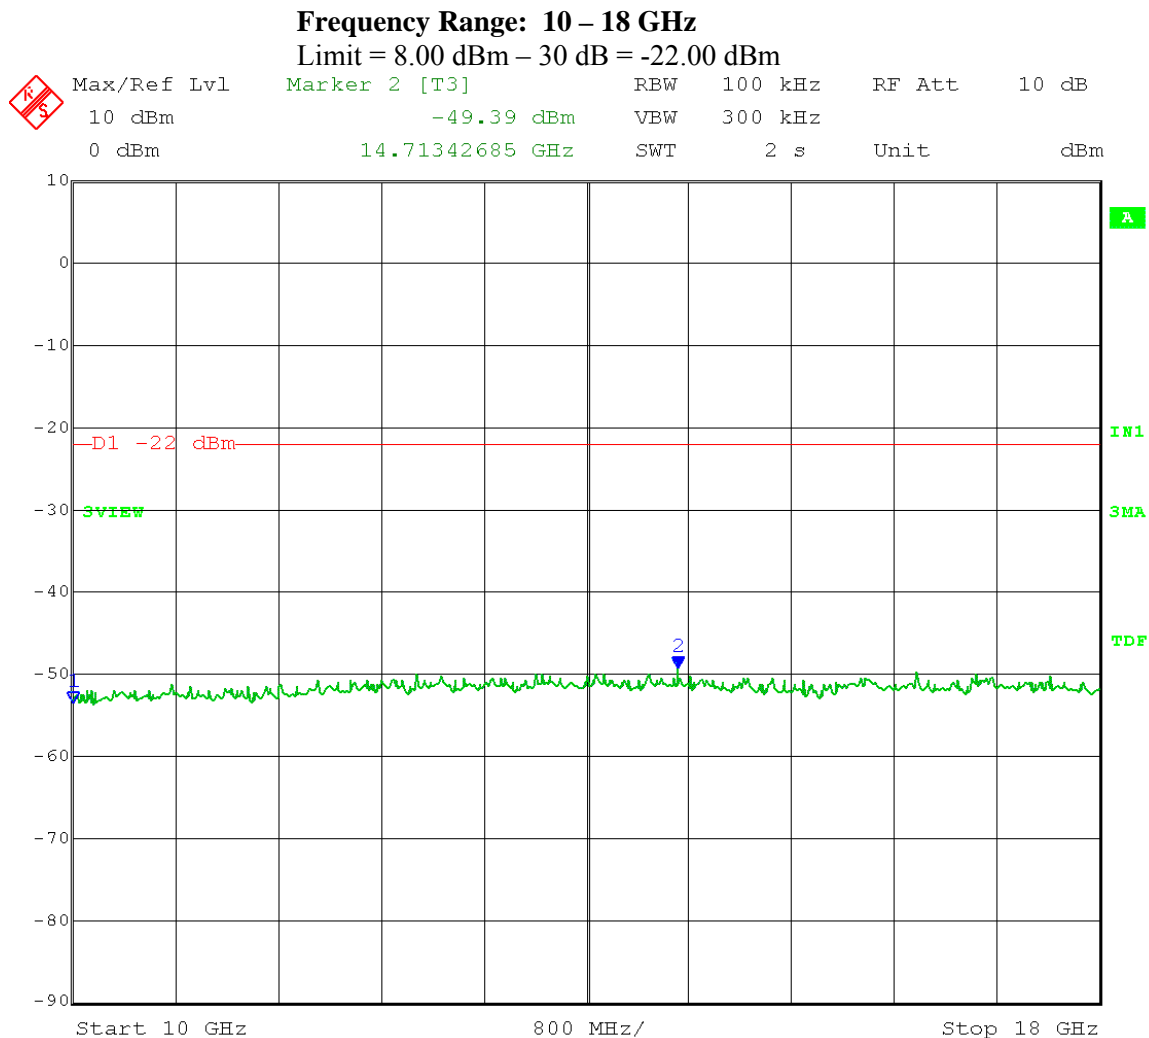


Date: 17.MAY.2012 13:53:48

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

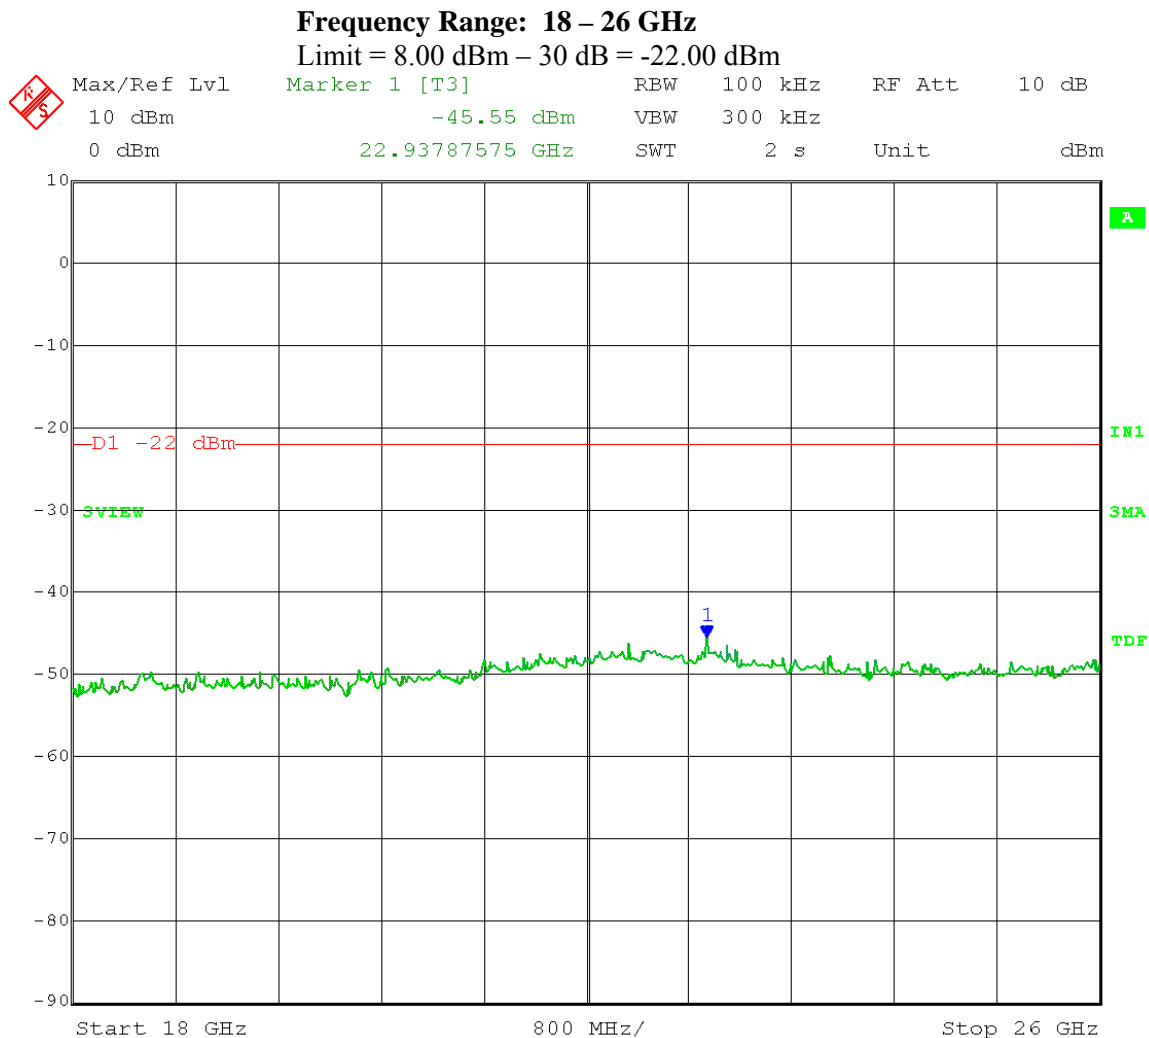


Date: 17.MAY.2012 13:55:43

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

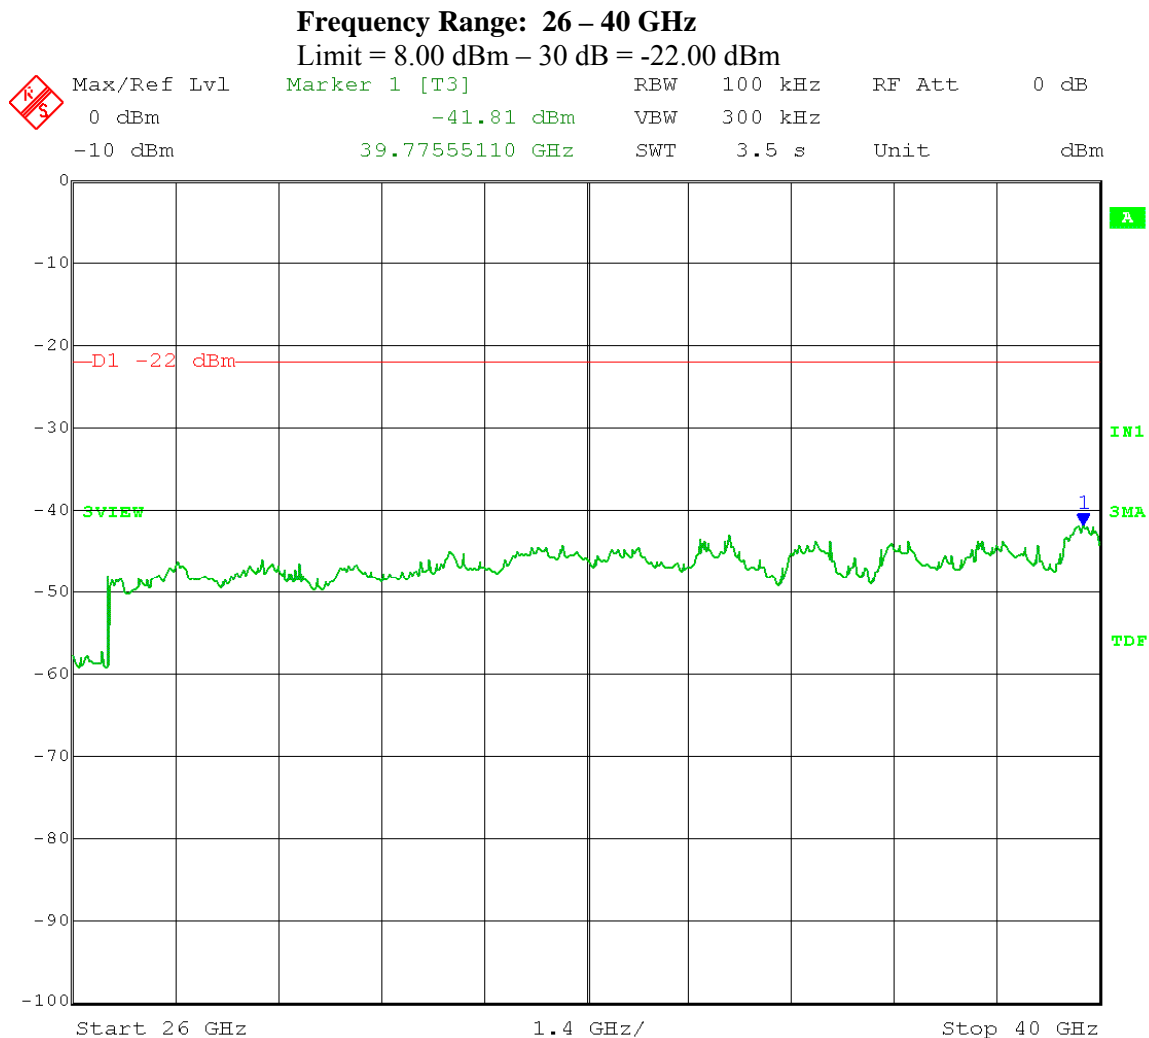


Date: 17.MAY.2012 13:57:16

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

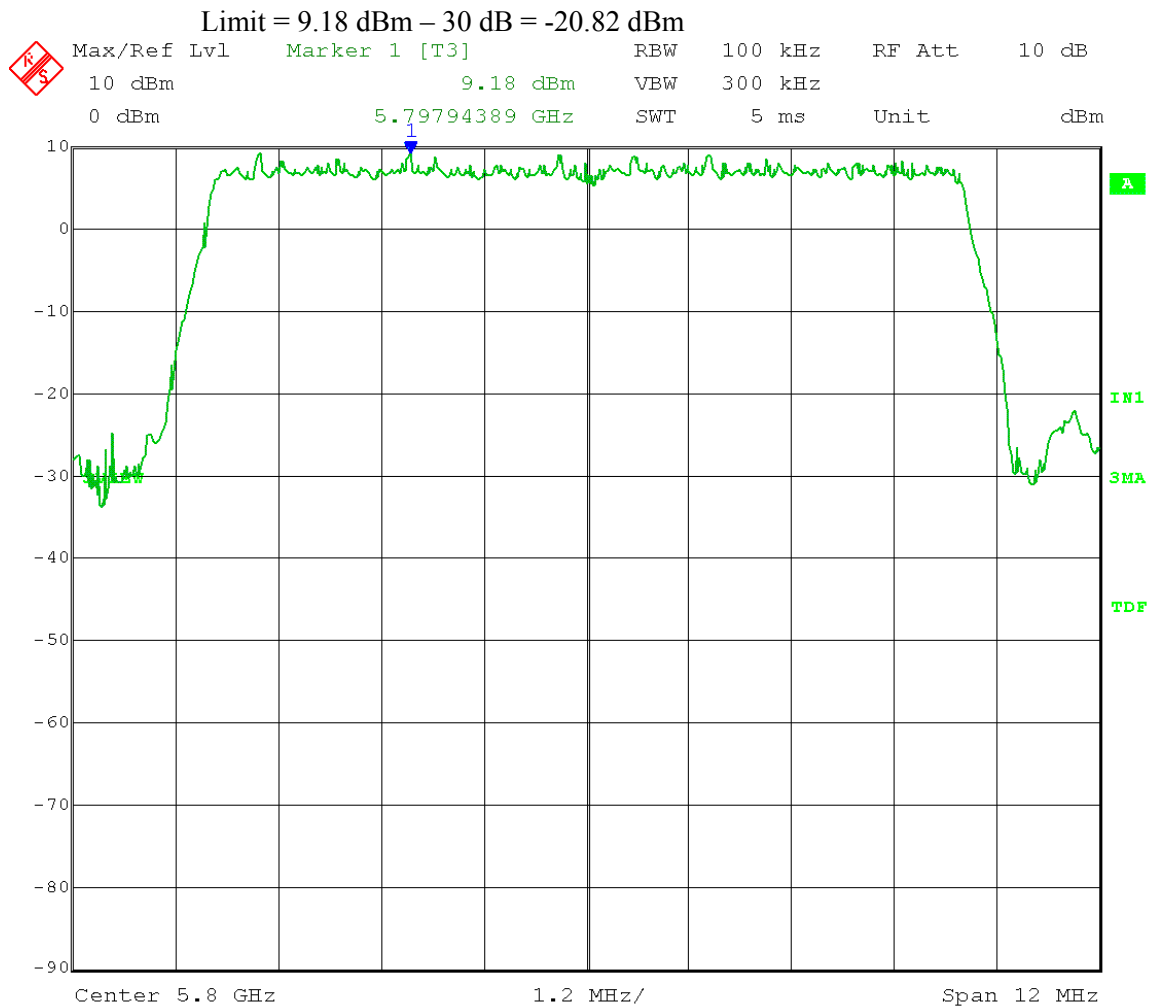


Date: 17.MAY.2012 13:14:46

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

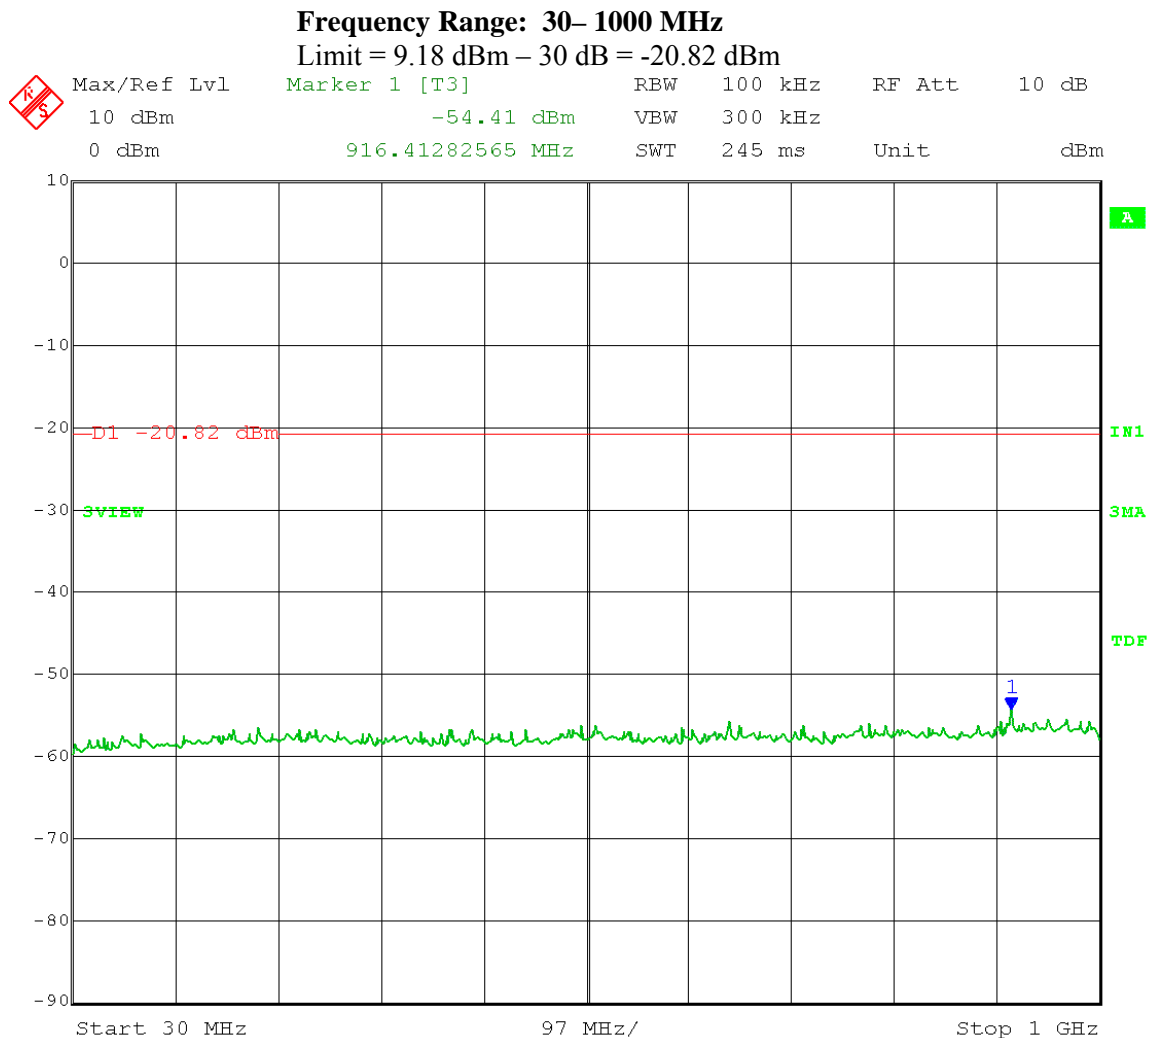


Date: 17.MAY.2012 13:23:17

Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

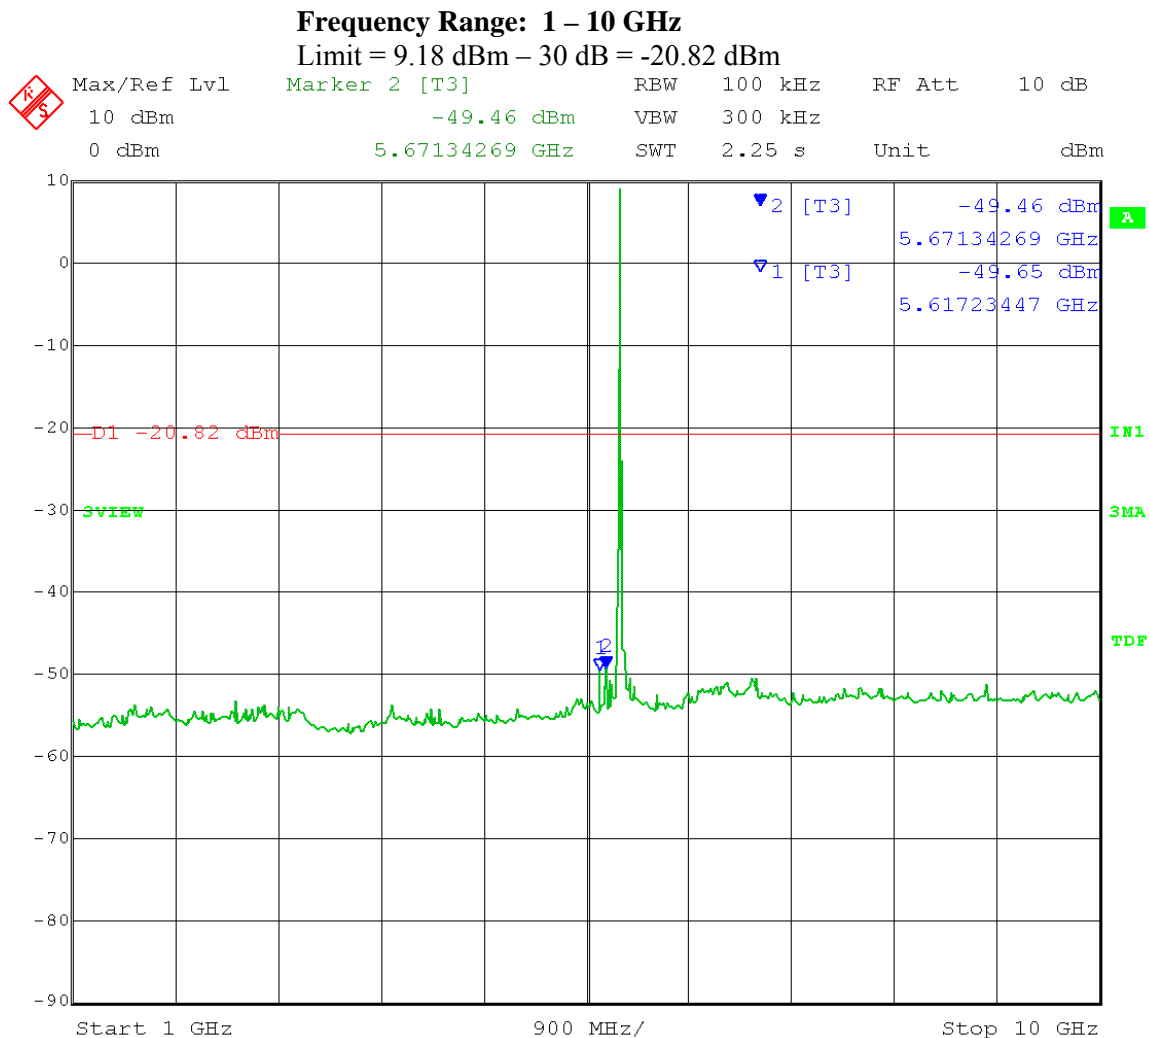


Date: 17.MAY.2012 13:18:23

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

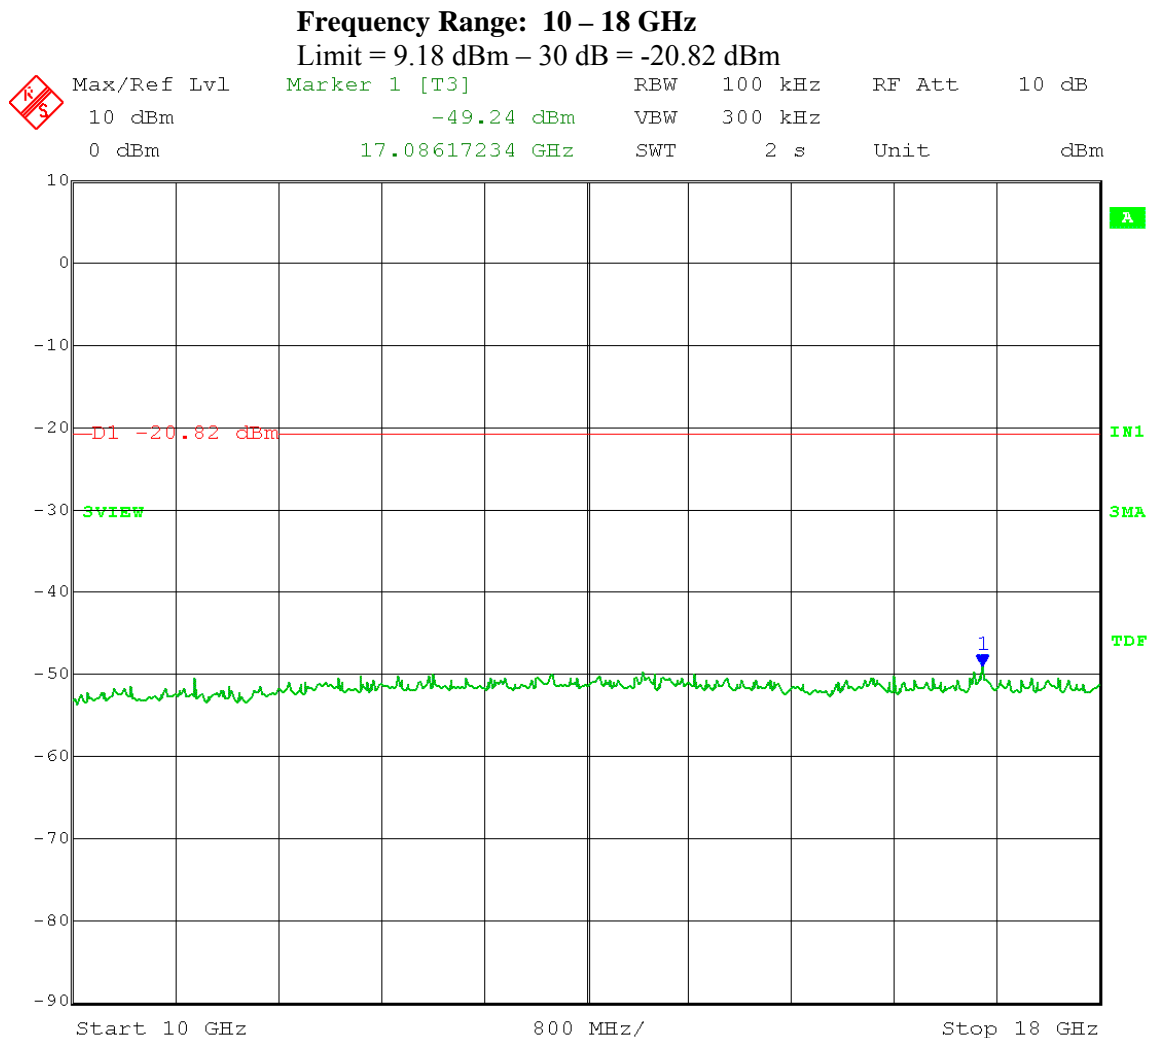


Date: 17.MAY.2012 13:19:35

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

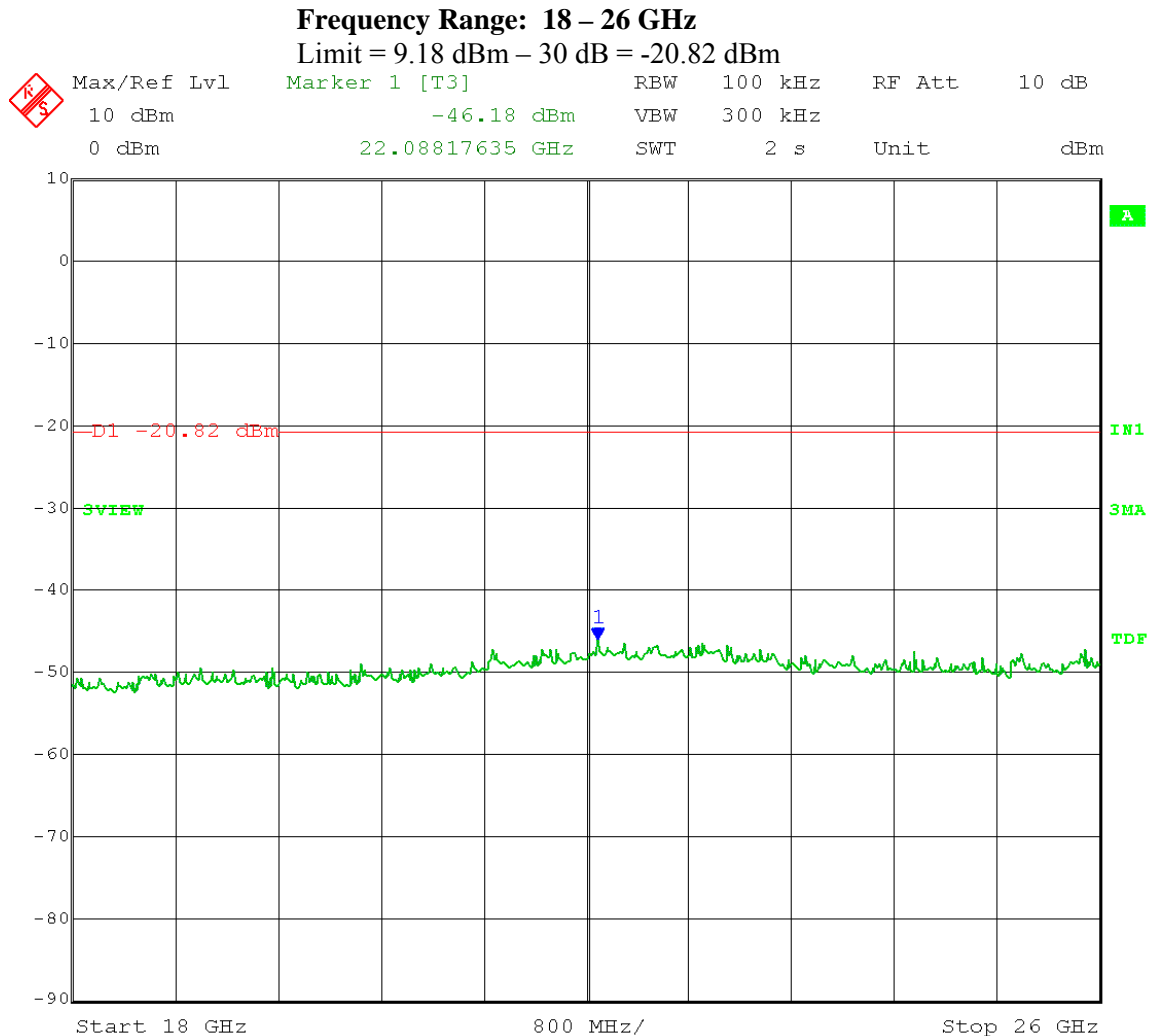


Date: 17.MAY.2012 13:20:36

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

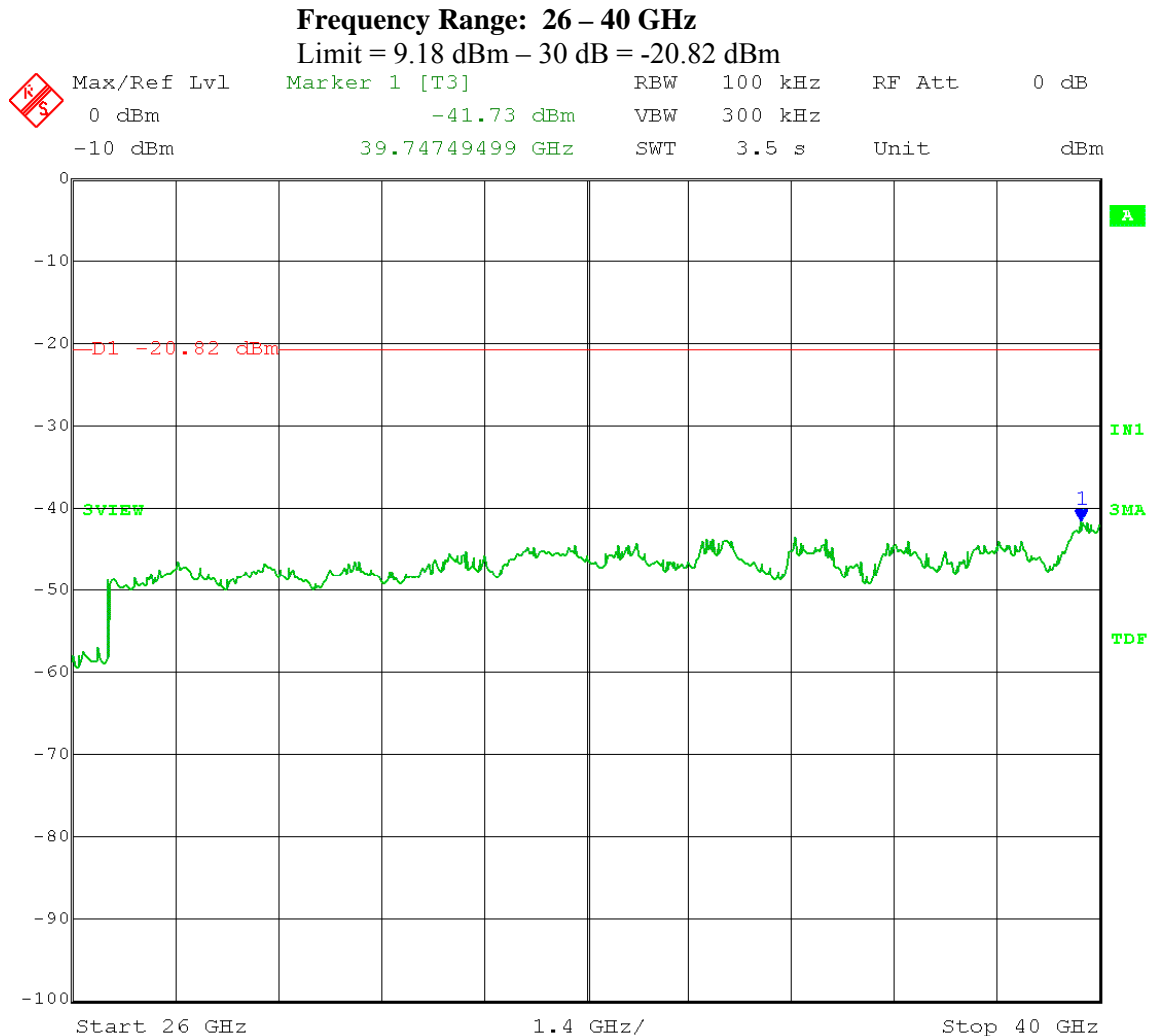


Date: 17.MAY.2012 13:21:45

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

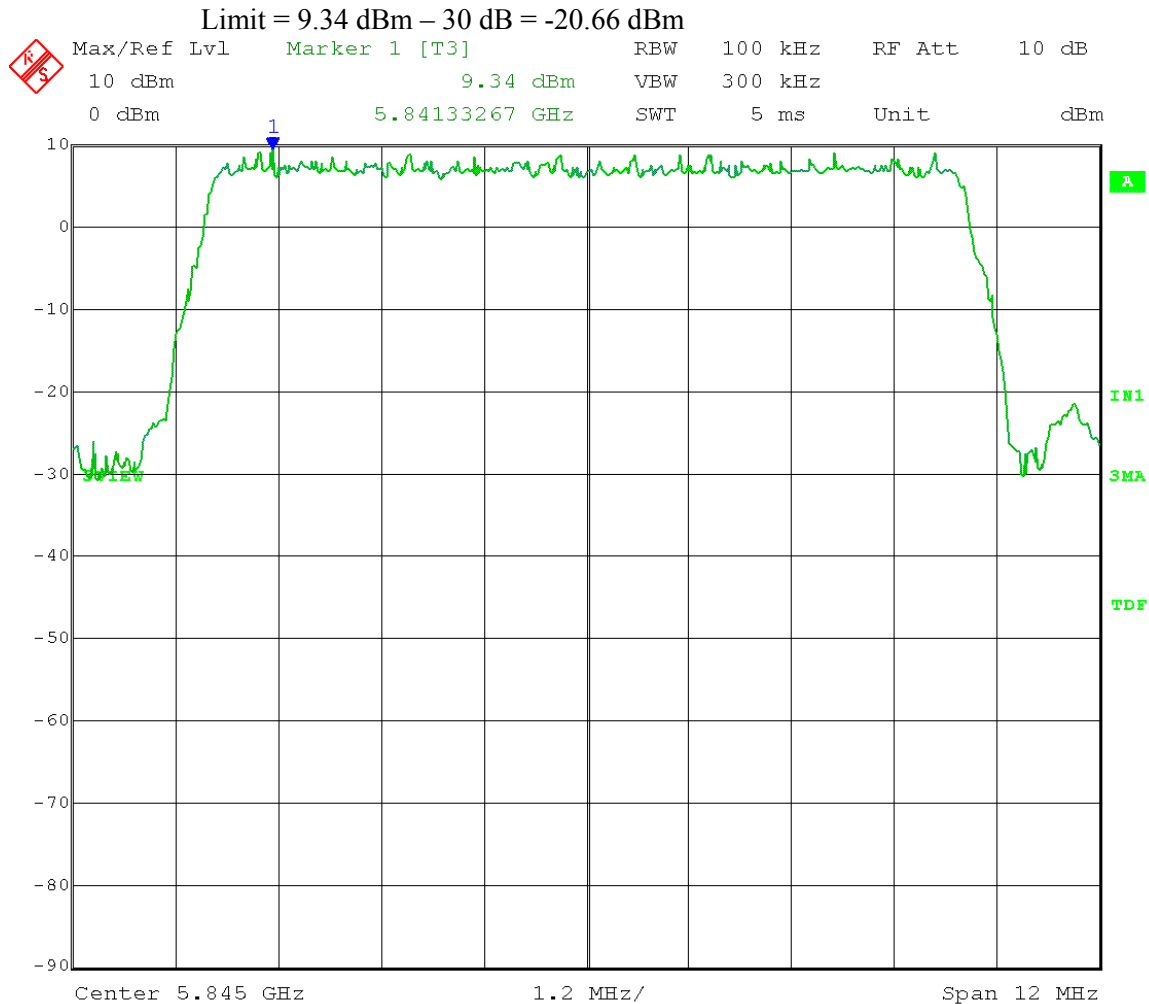


Date: 17.MAY.2012 14:15:51

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

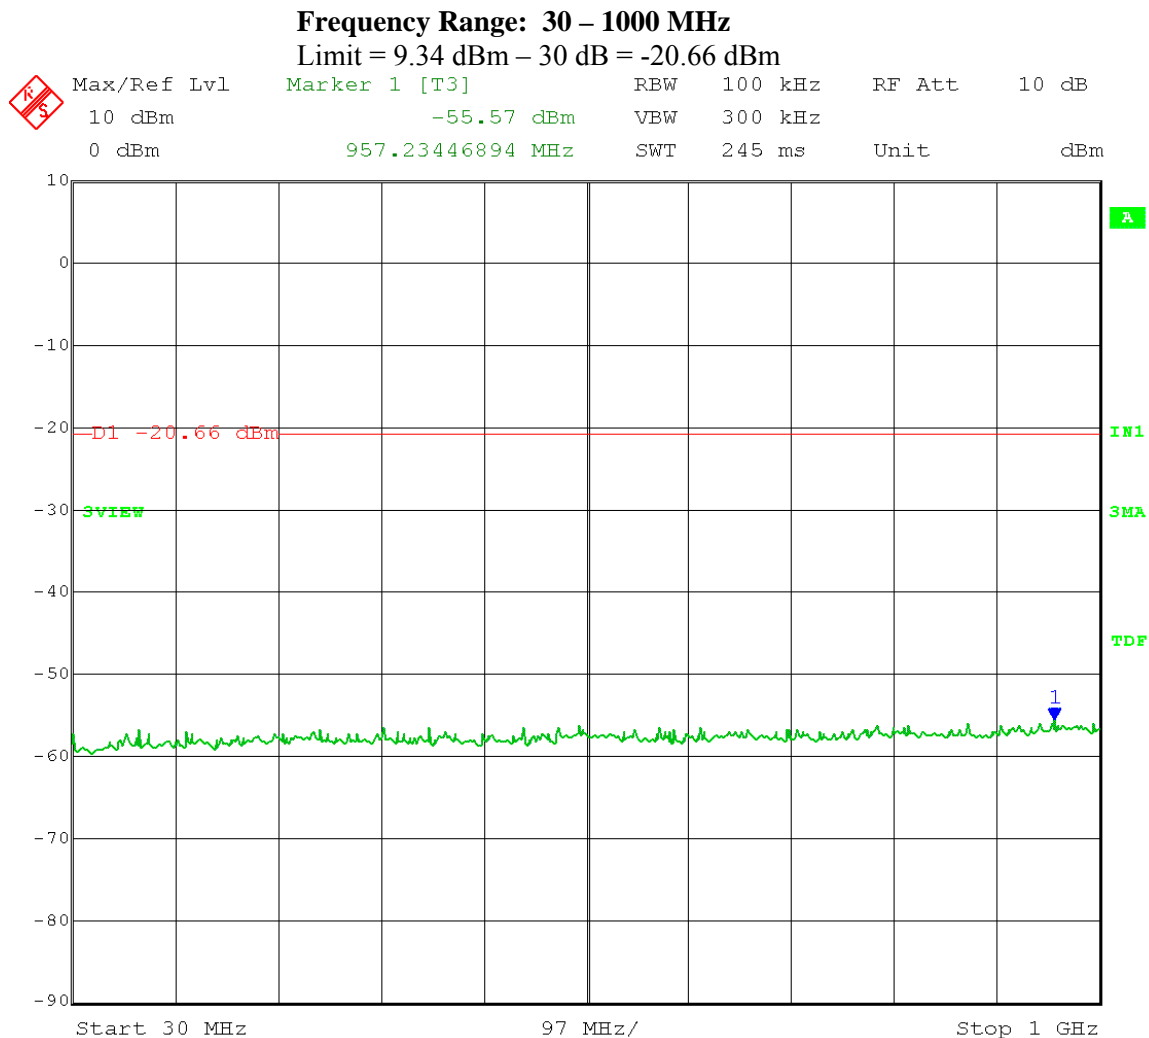


Date: 17.MAY.2012 14:29:05

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

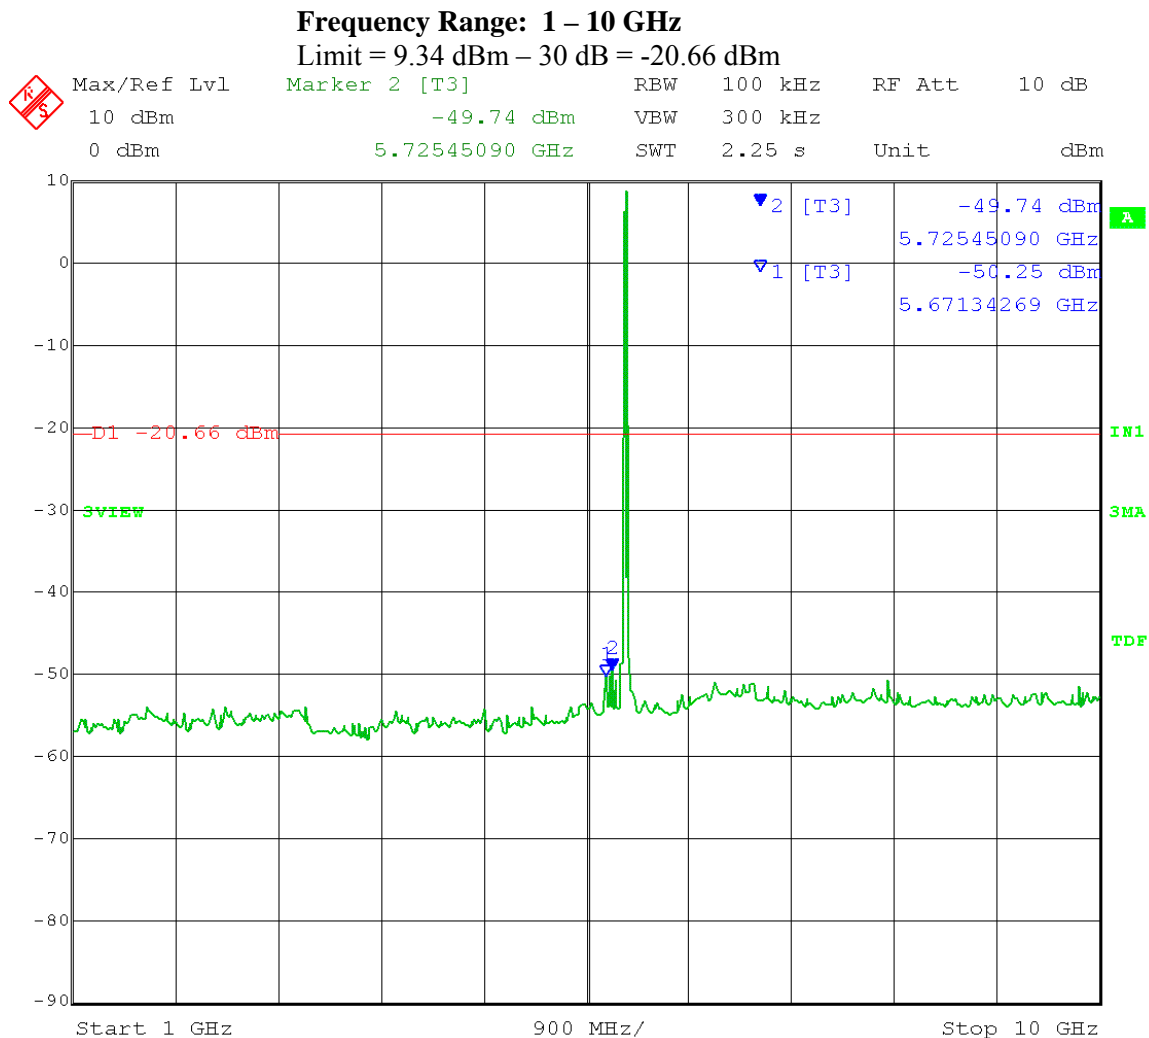


Date: 17.MAY.2012 14:23:15

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

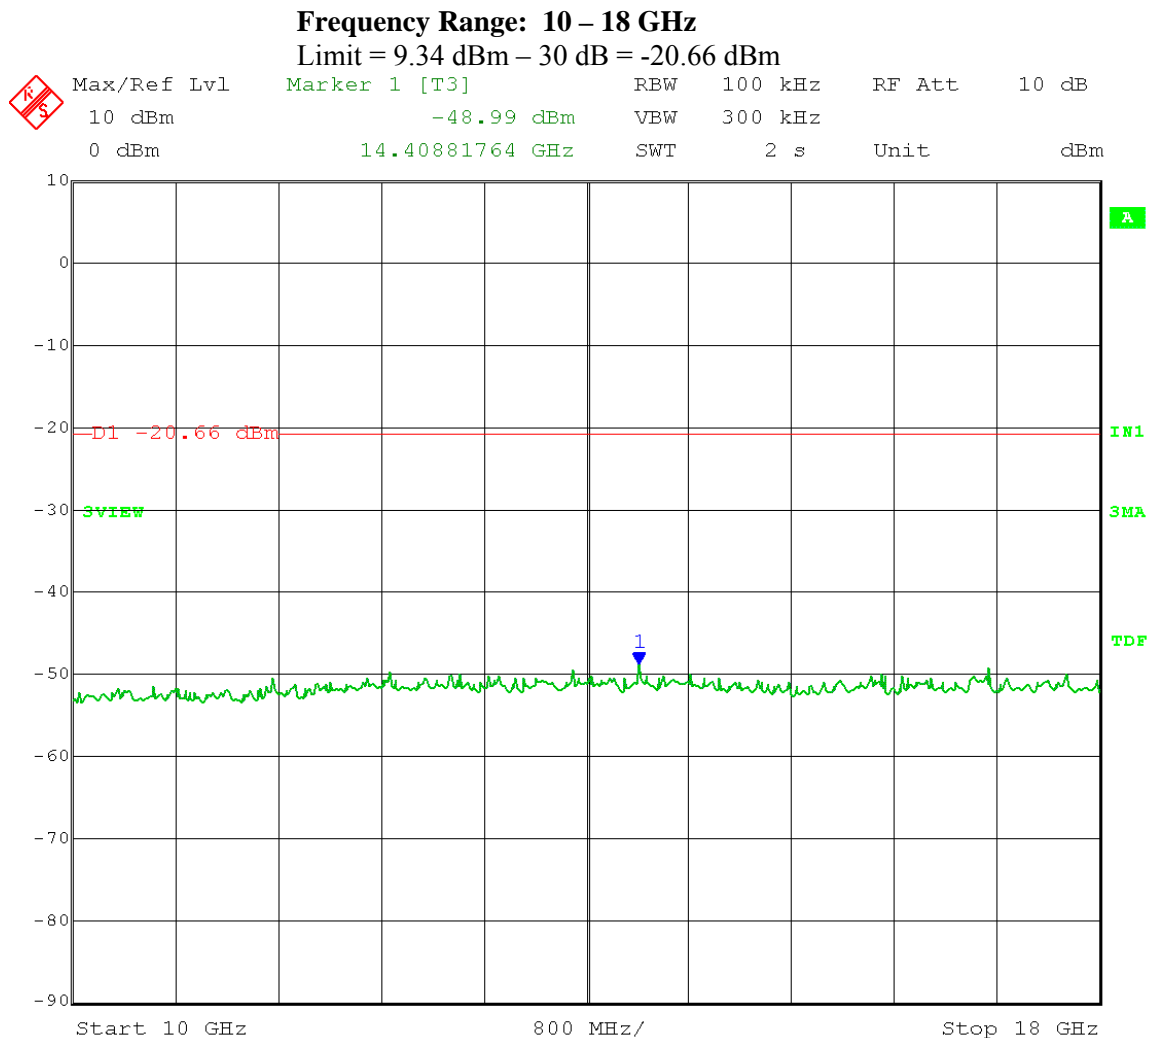


Date: 17.MAY.2012 14:24:31

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

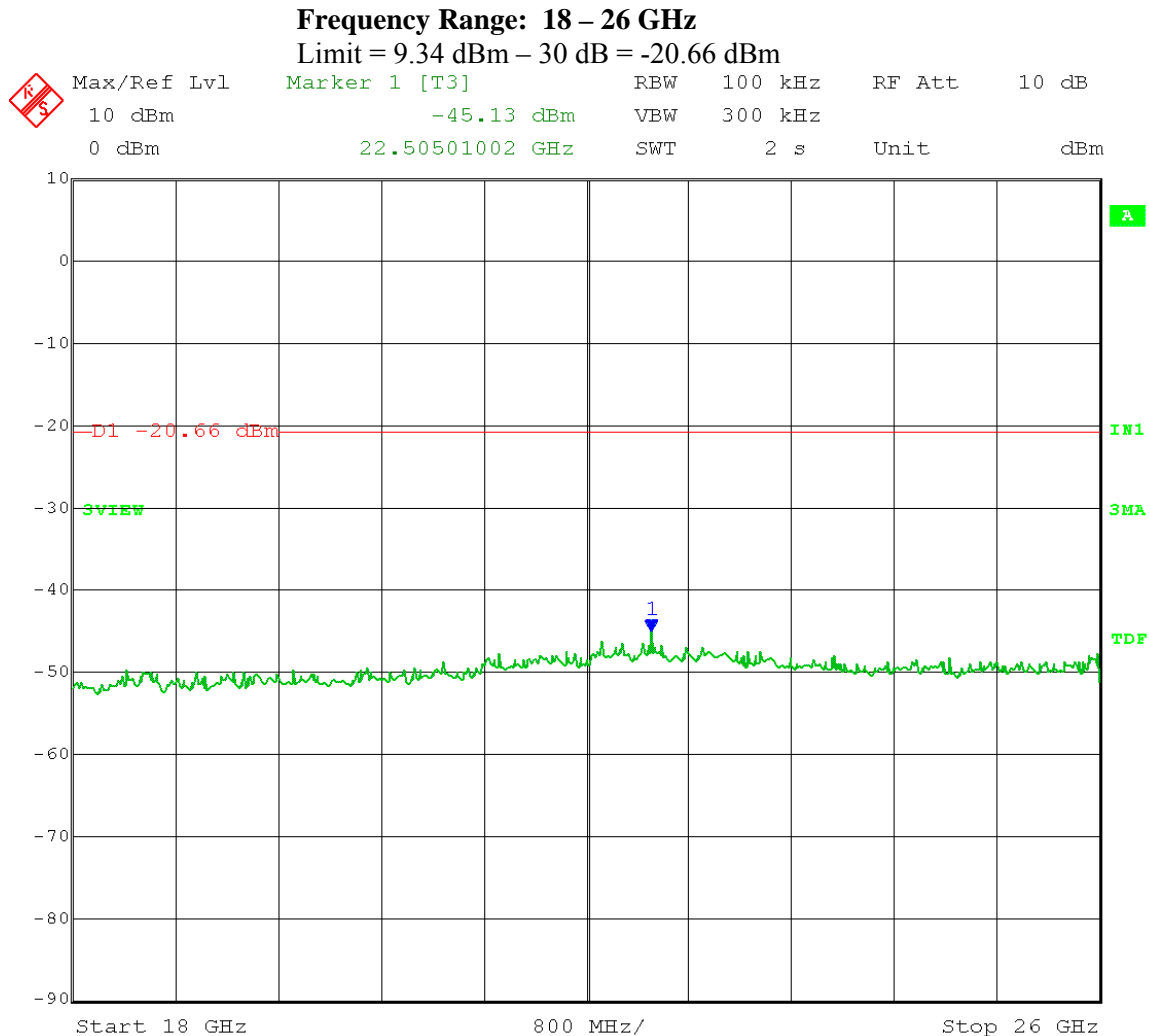


Date: 17.MAY.2012 14:25:50

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

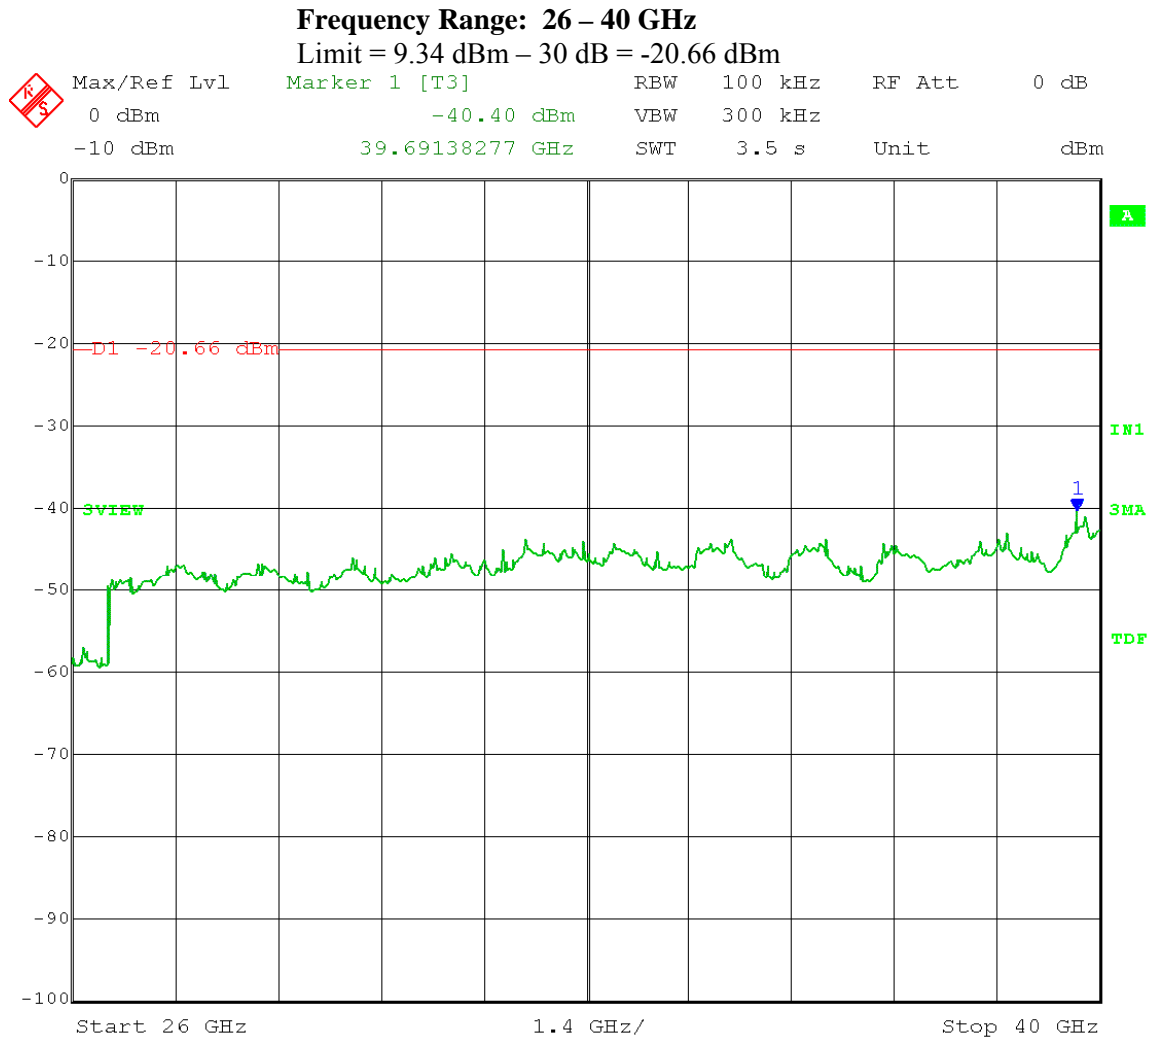


Date: 17.MAY.2012 14:27:30

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

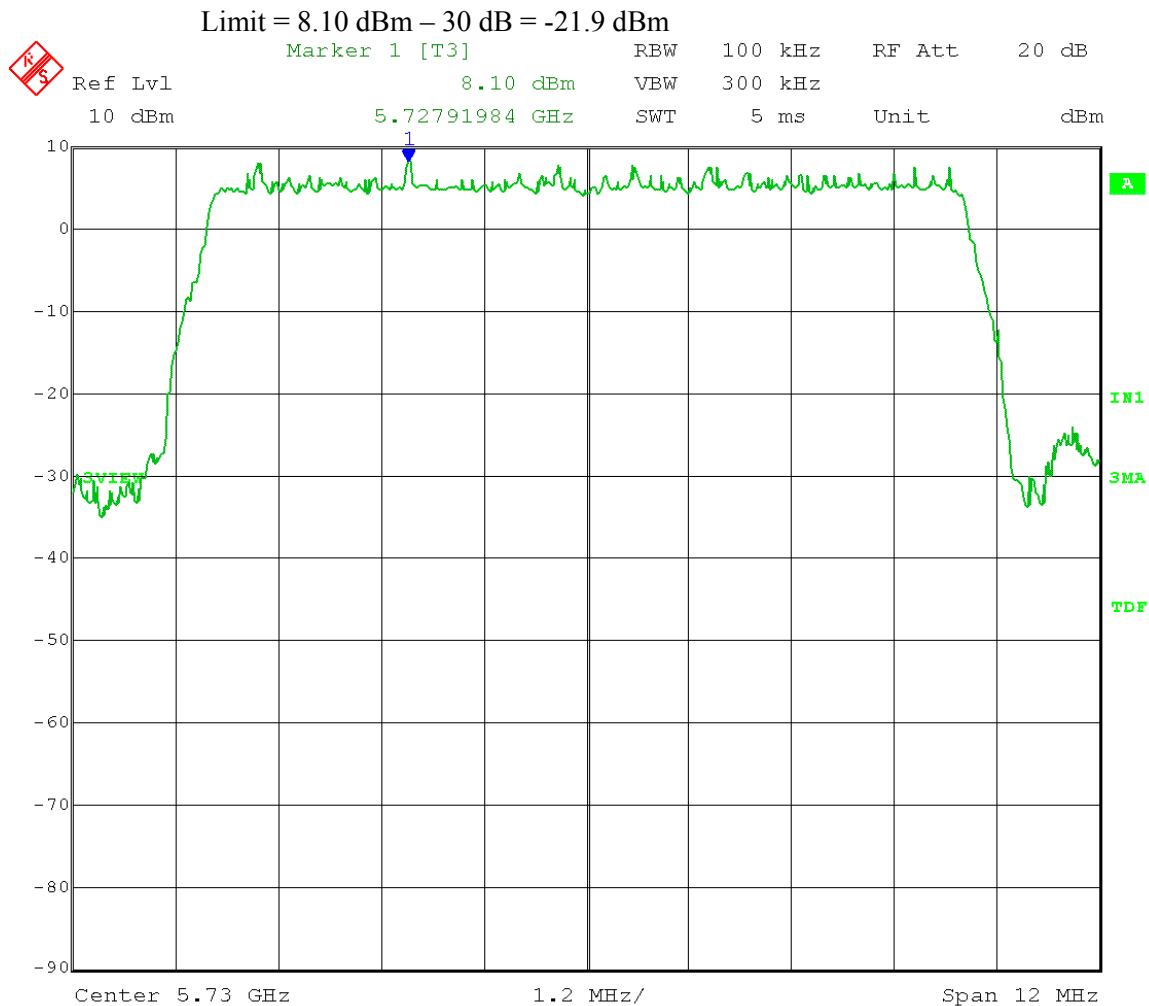


Date: 15.MAY.2012 14:19:15

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

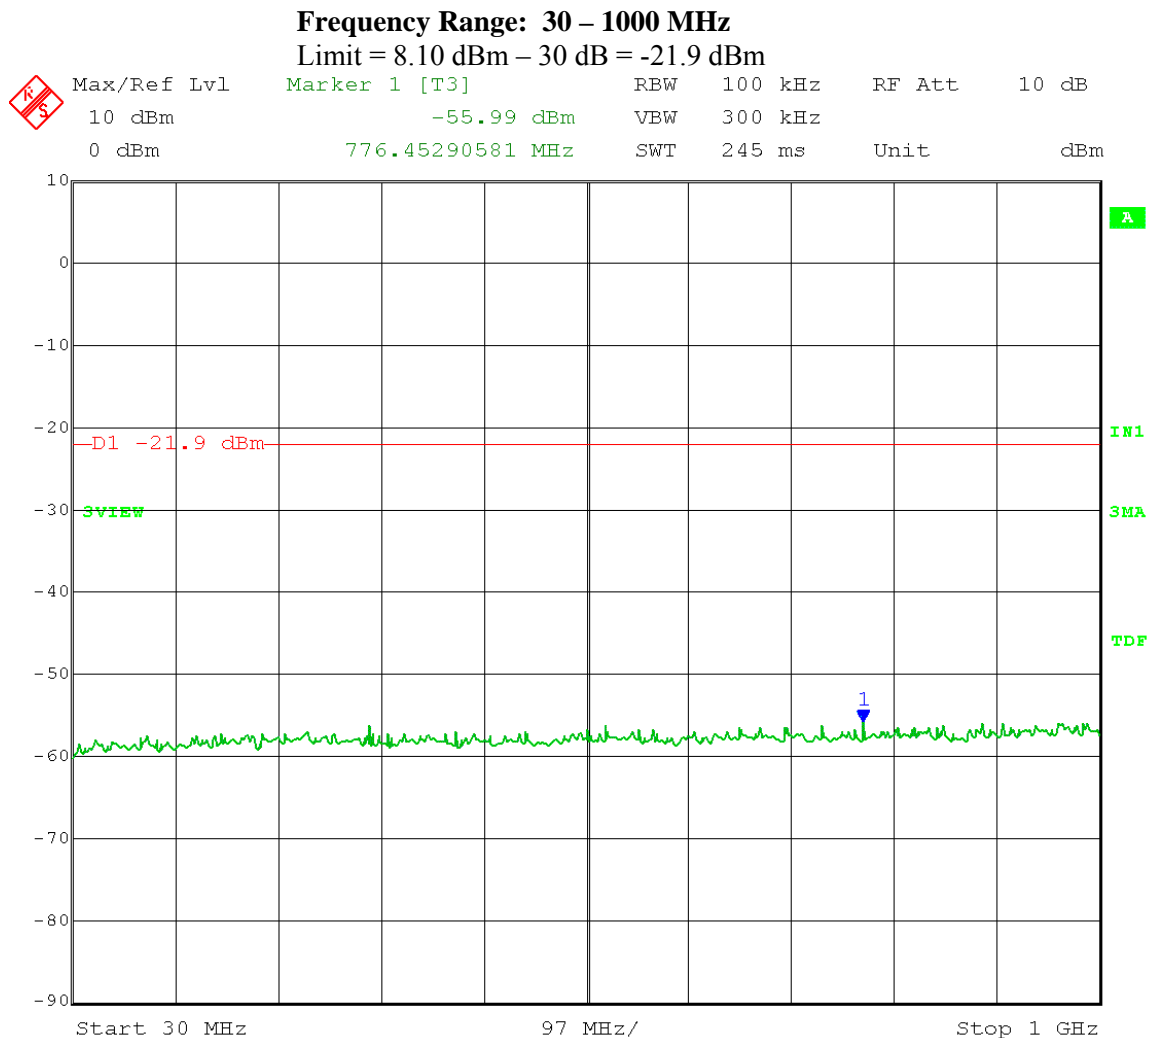


Date: 15.MAY.2012 14:28:32

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

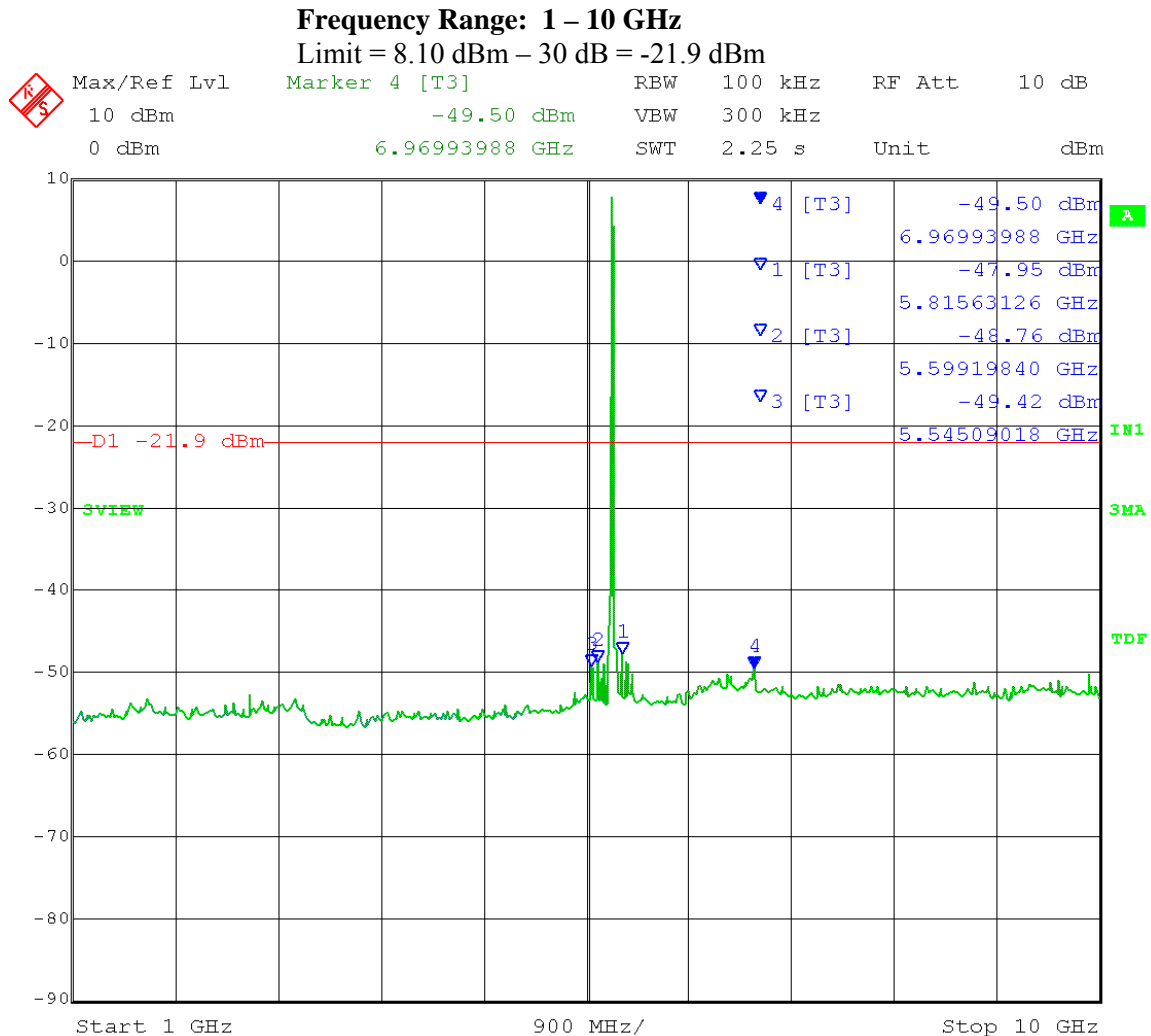

Date: 15.MAY.2012 14:23:34


Date: 15.MAY.2012 14:24:46

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

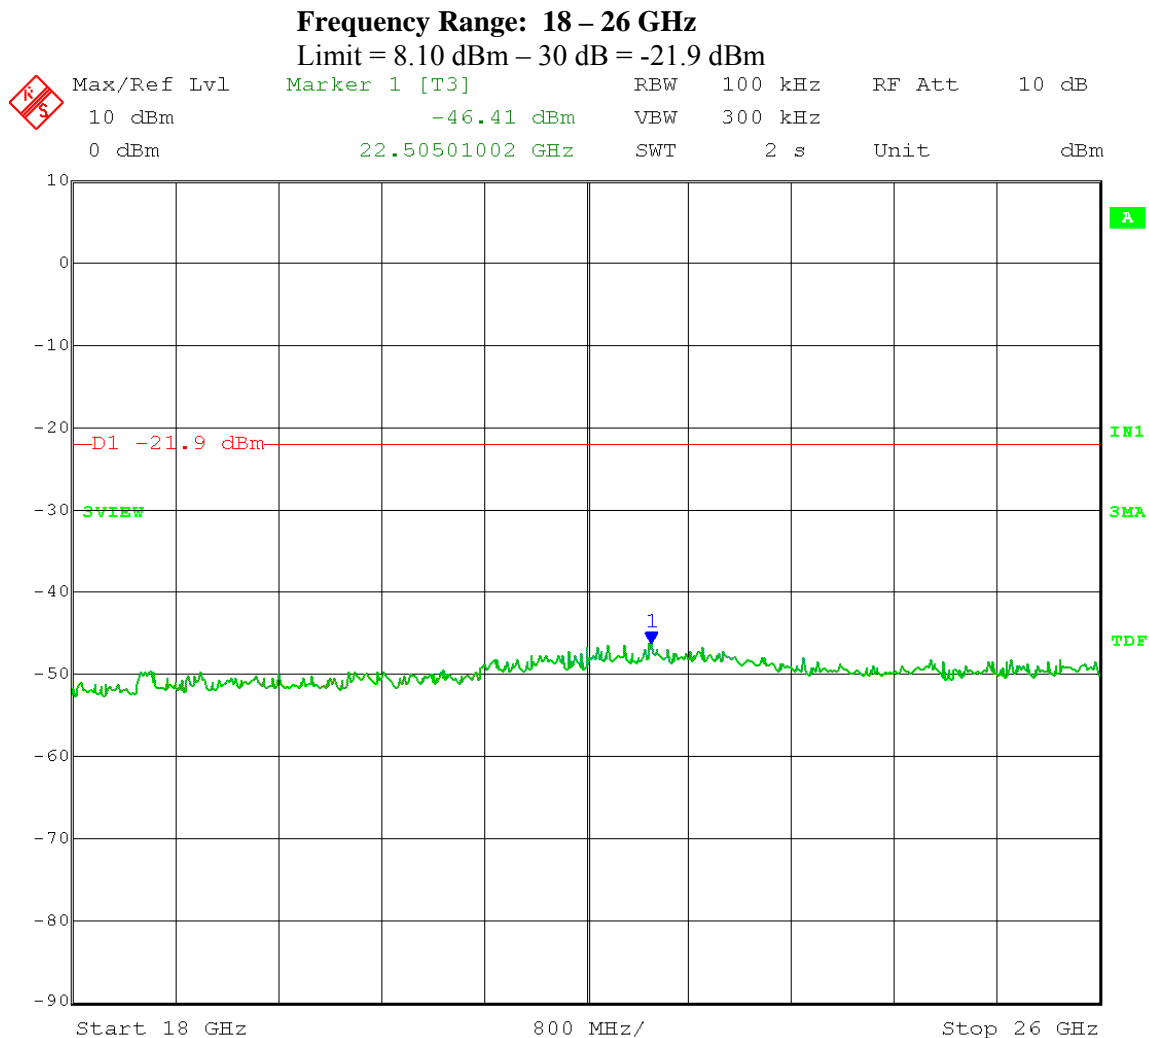


Date: 15.MAY.2012 14:25:53

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

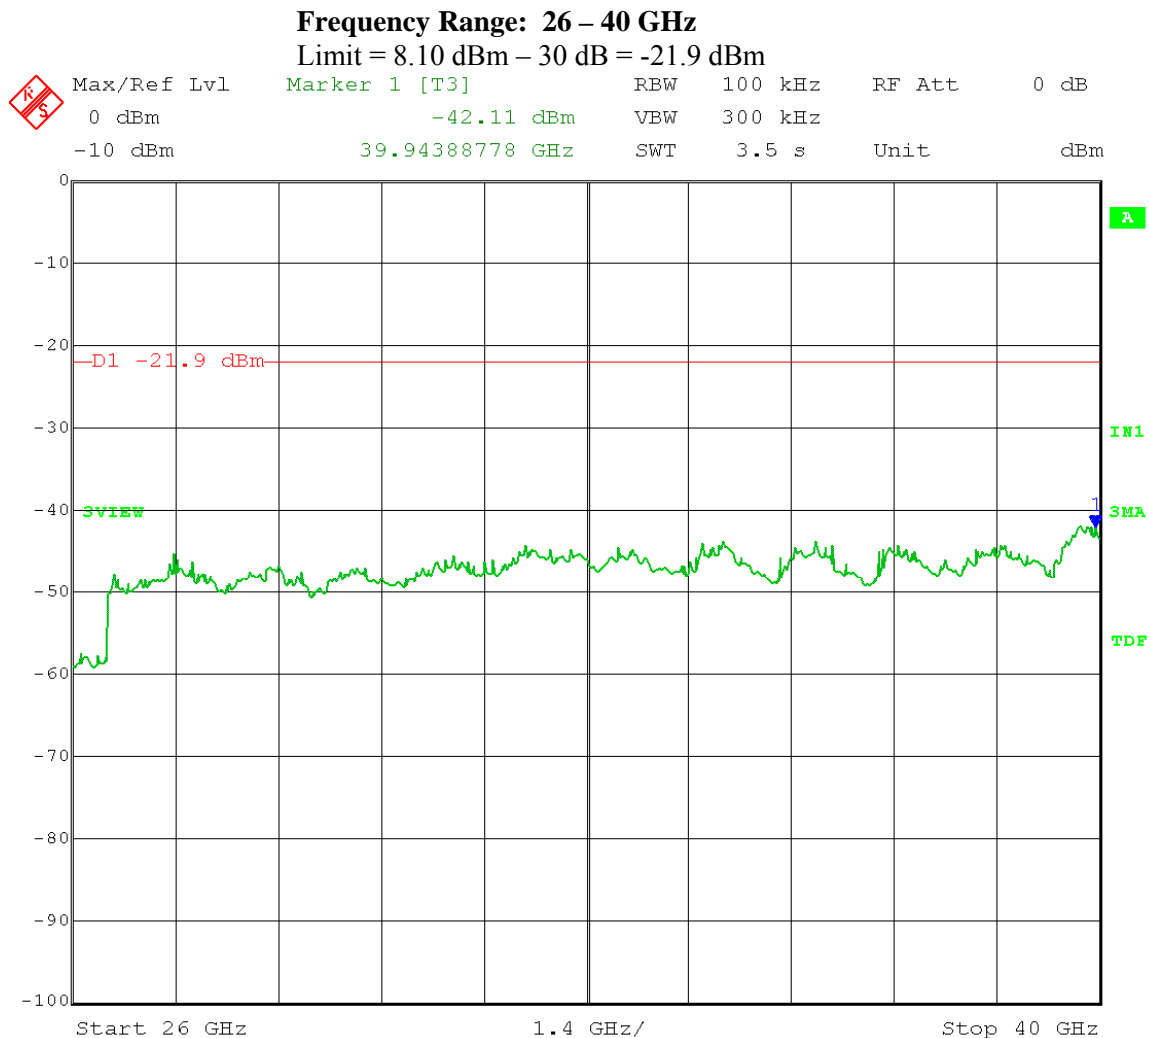


Date: 15.MAY.2012 14:27:19

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

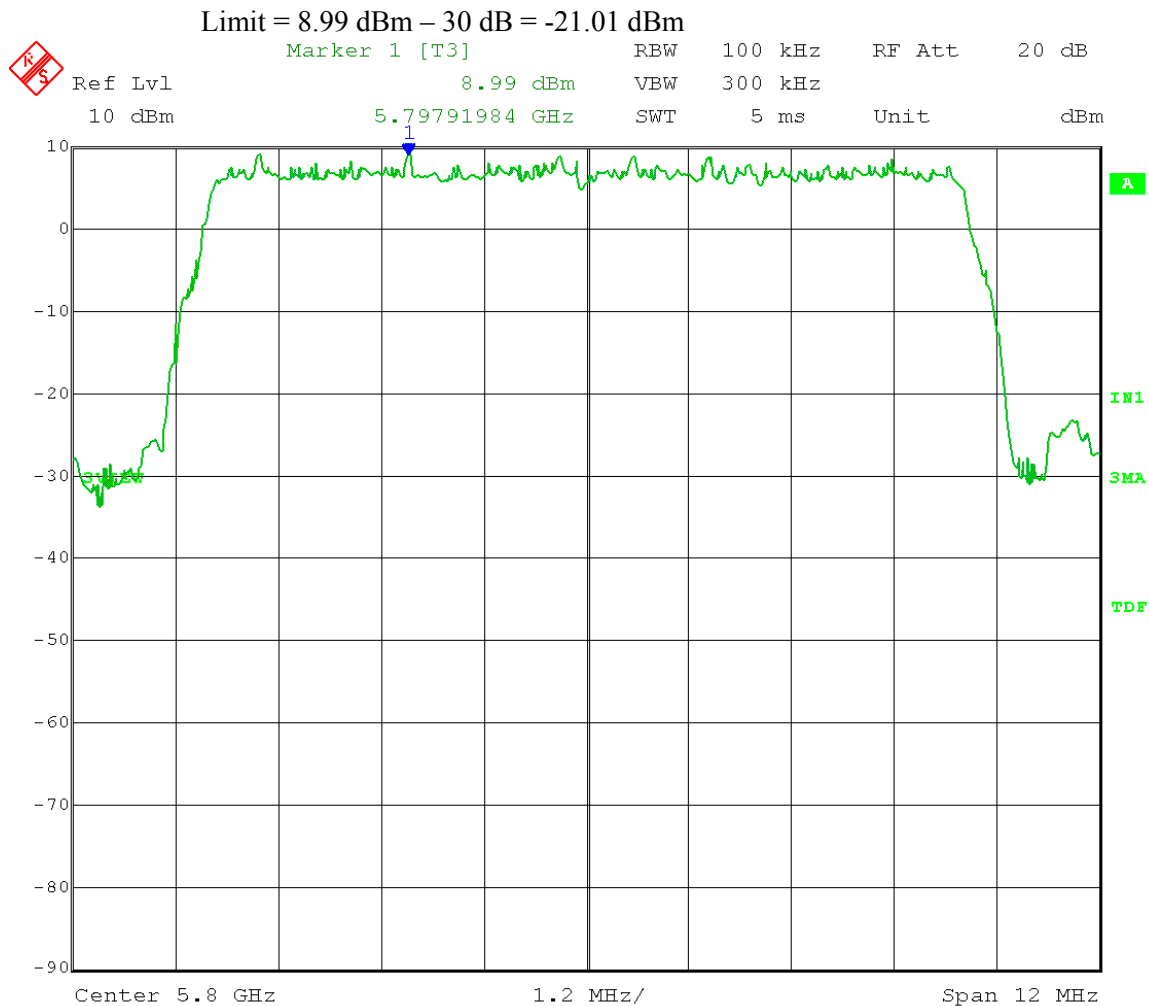


Date: 15.MAY.2012 13:45:59

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

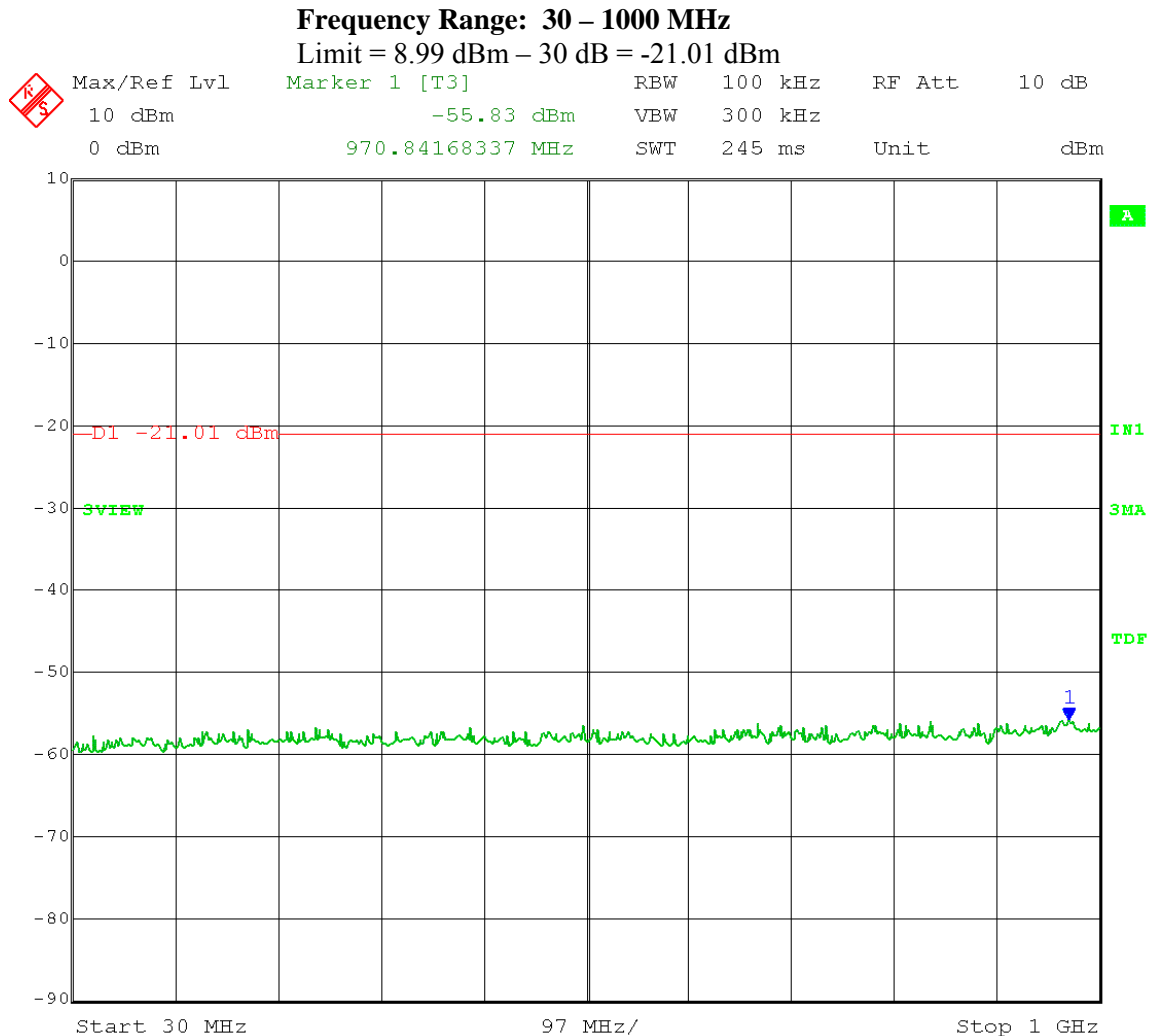


Date: 15.MAY.2012 13:59:01

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

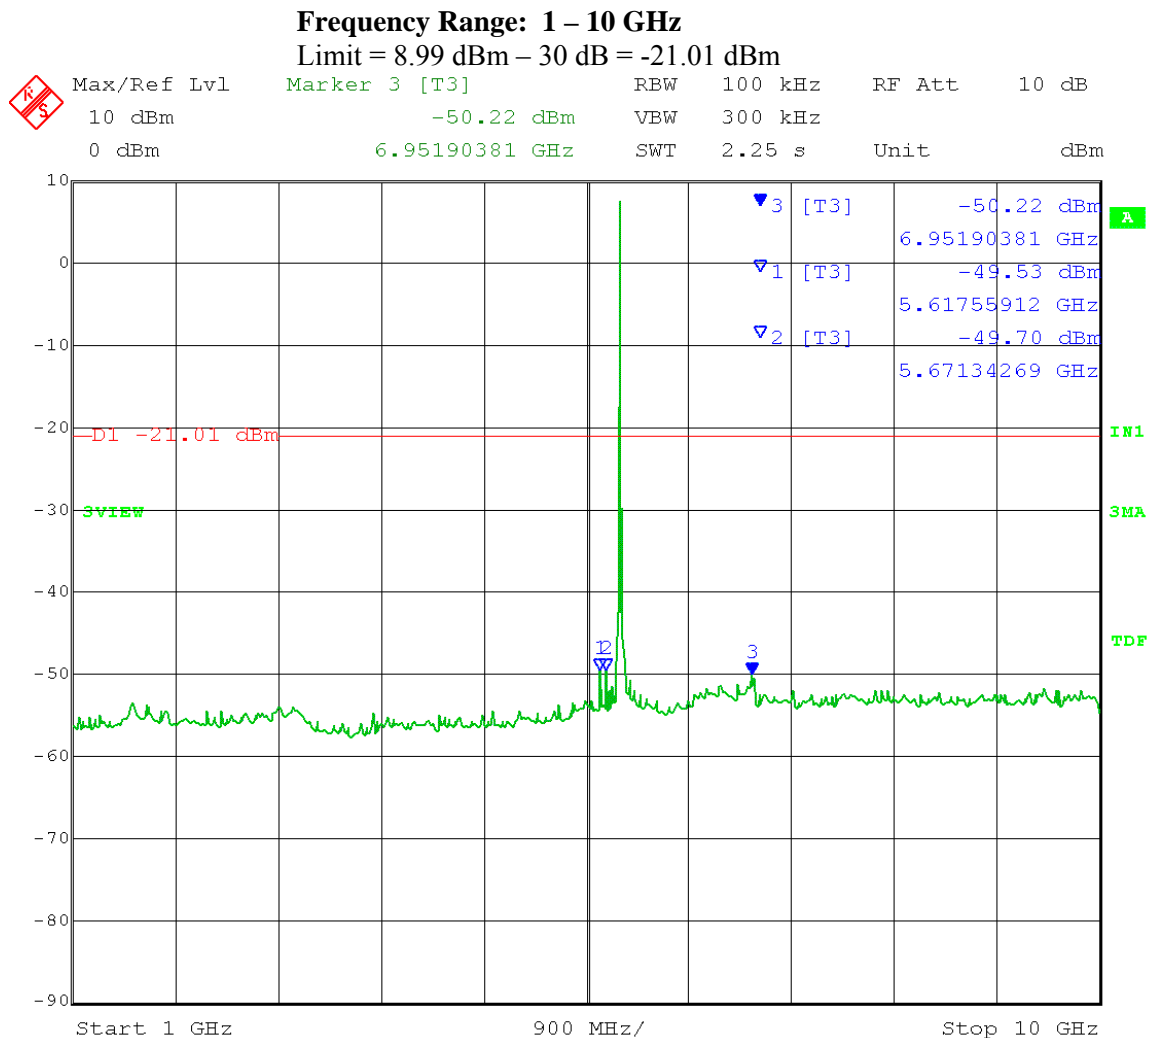


Date: 15.MAY.2012 13:50:46

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

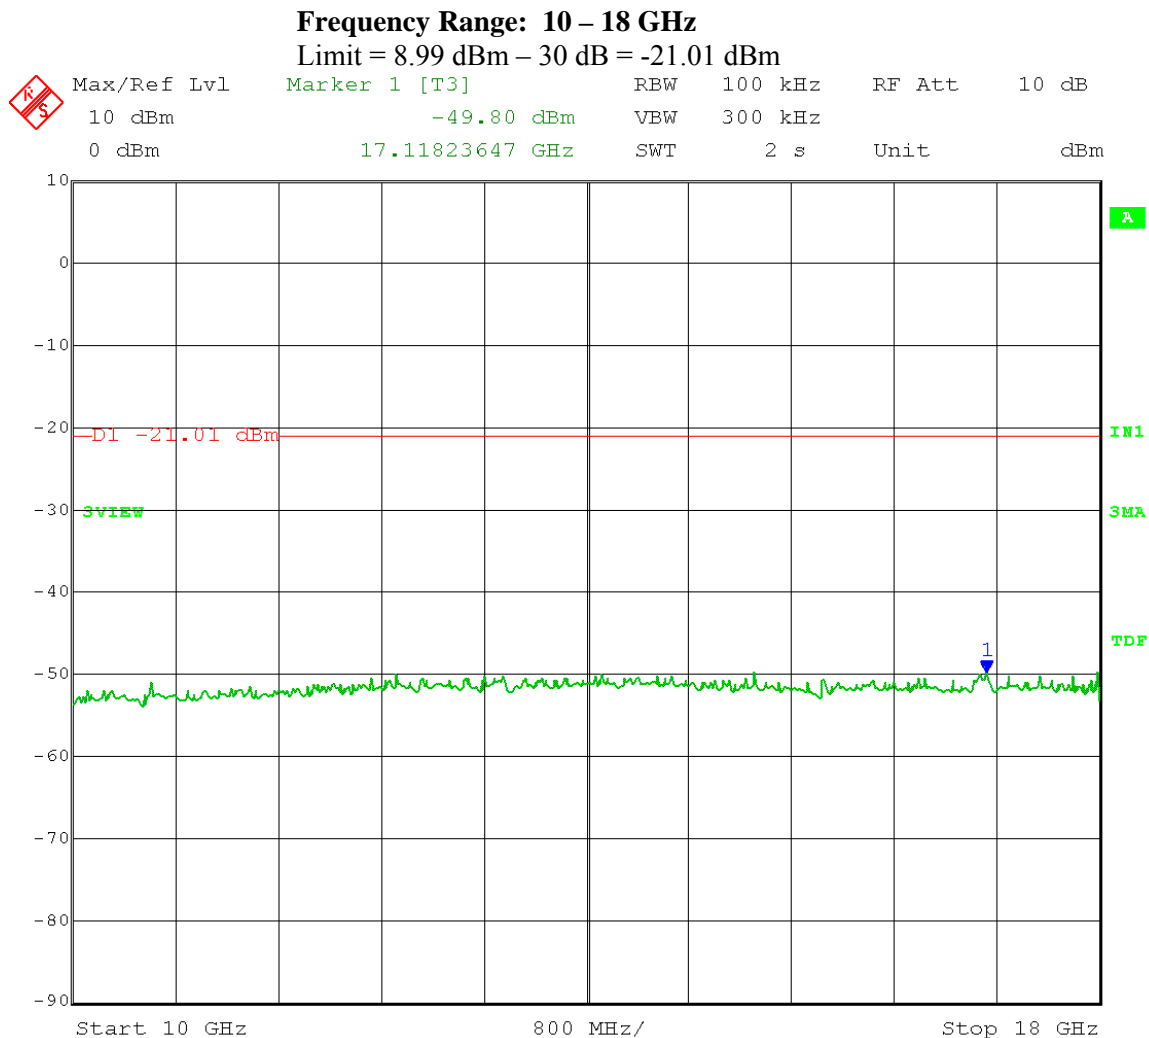


Date: 15.MAY.2012 13:52:16

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

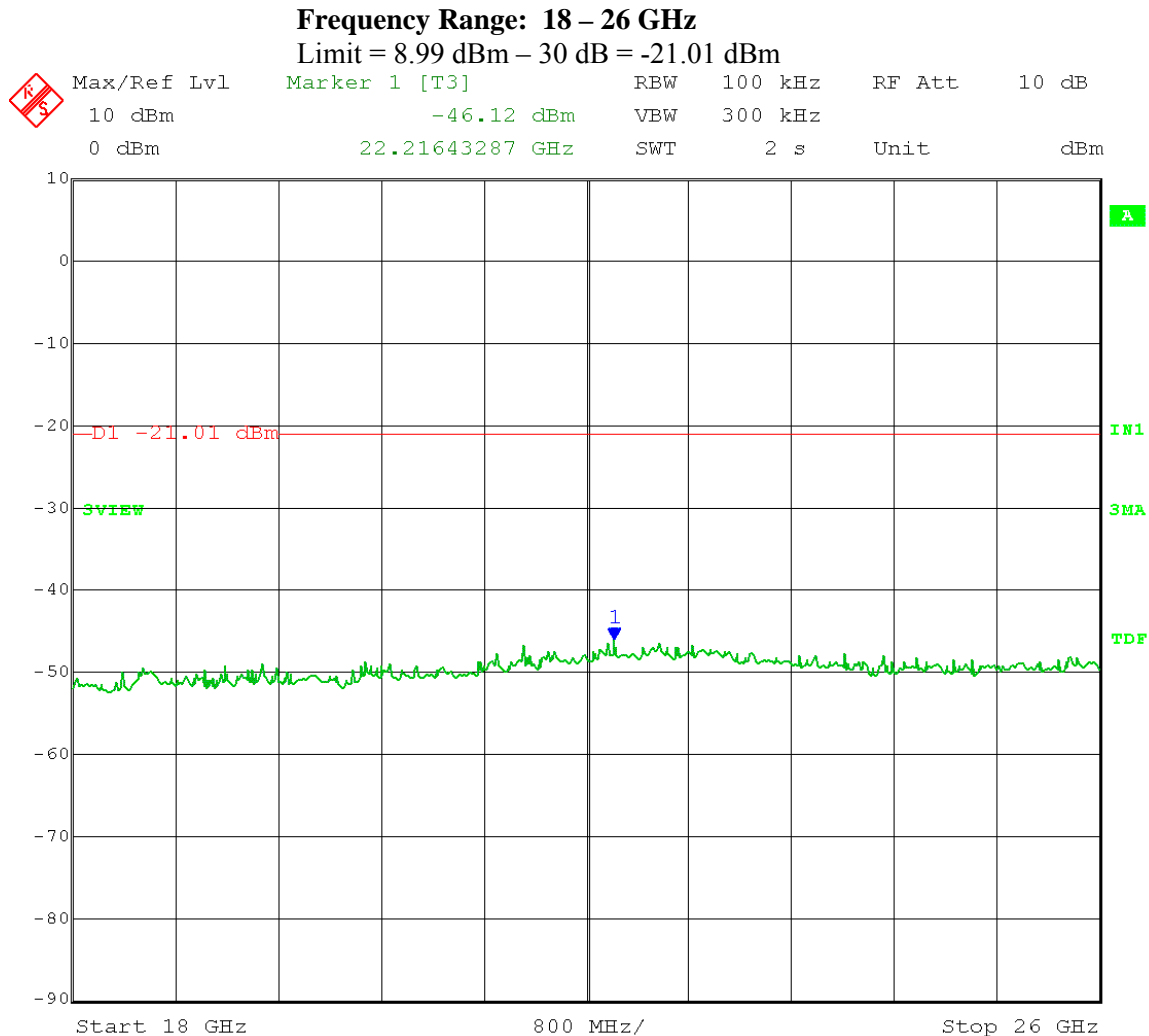


Date: 15.MAY.2012 13:53:45

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Middle Channel Frequency: 5.800 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

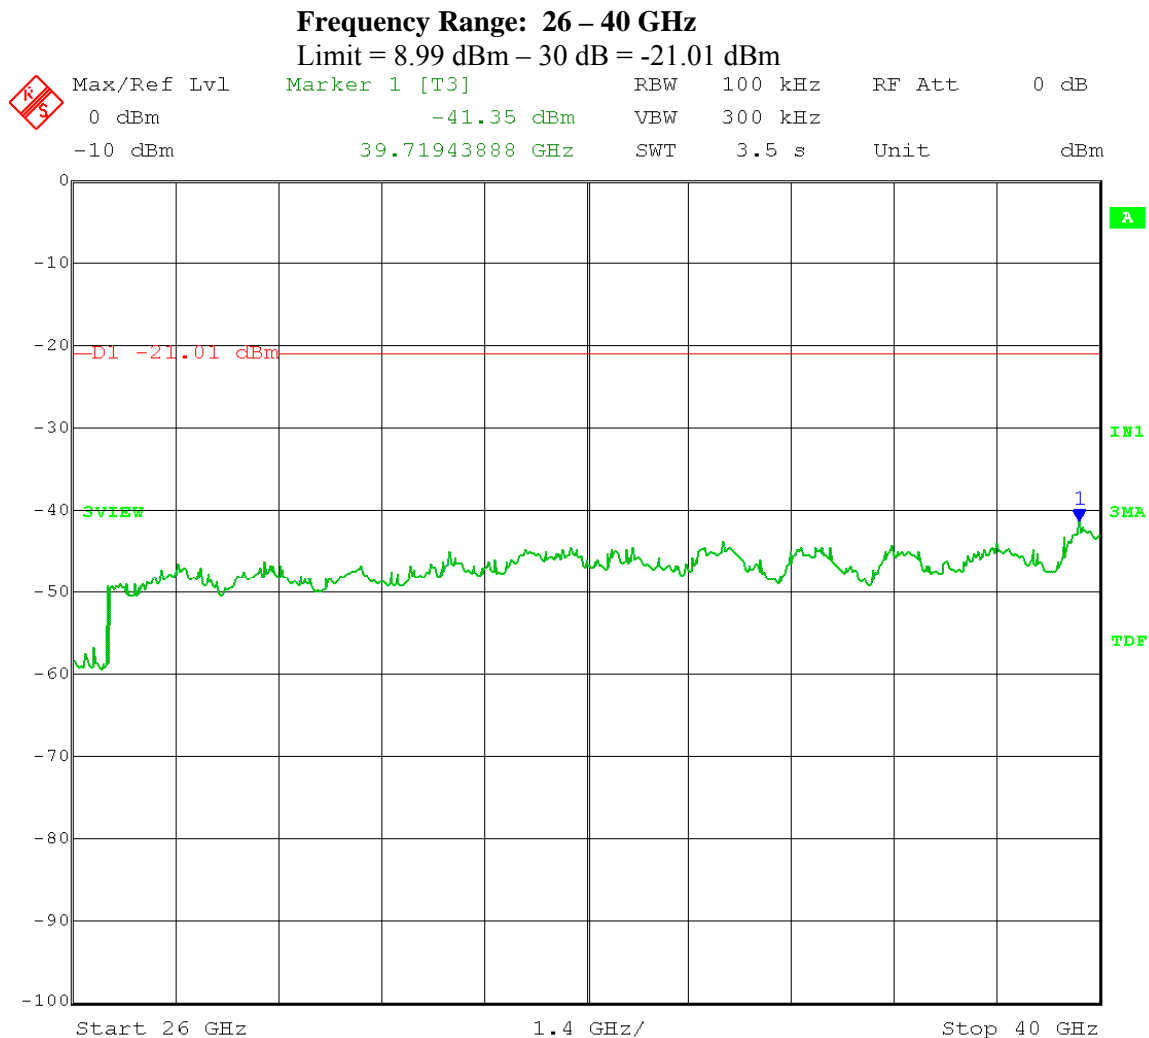


Date: 15.MAY.2012 13:55:54

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

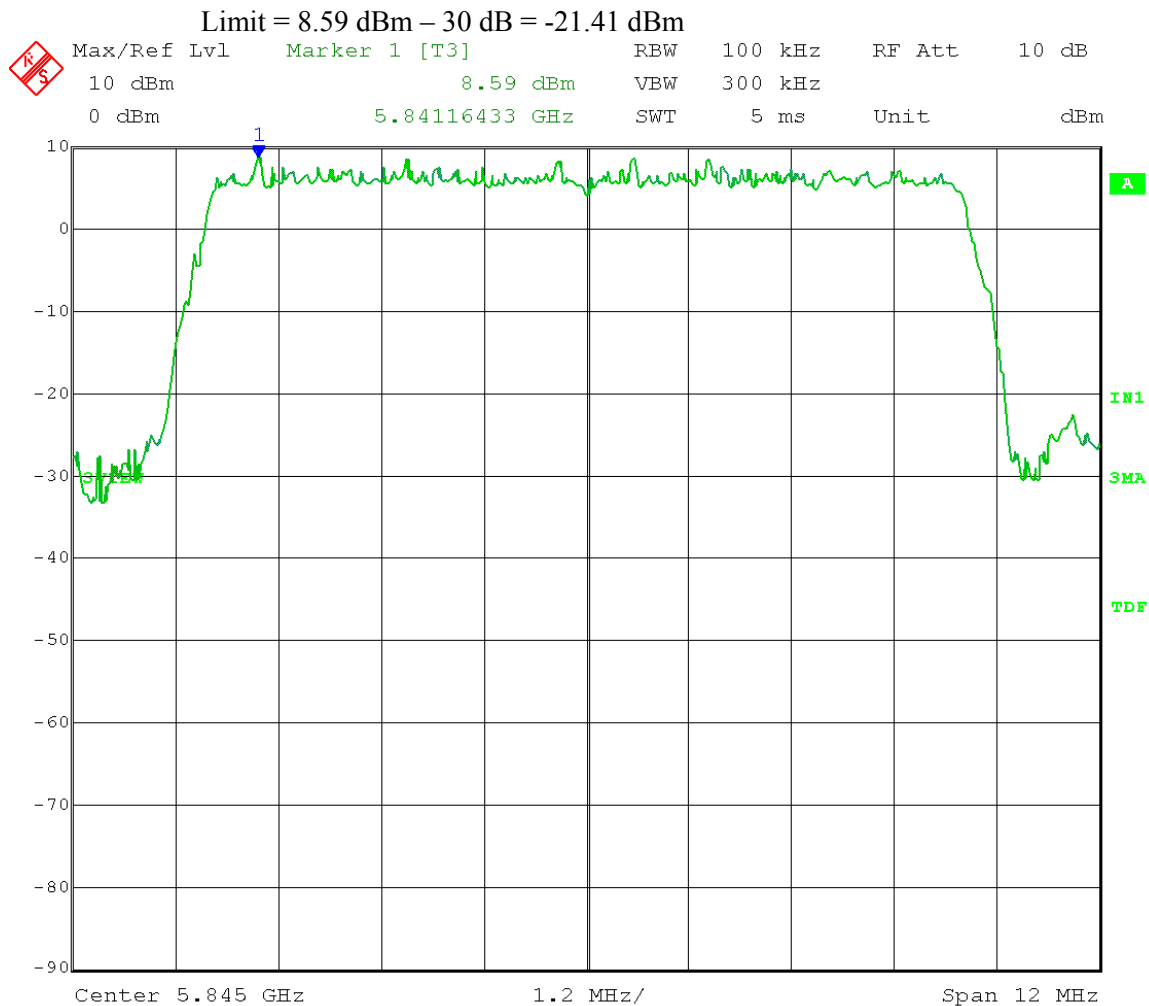


Date: 15.MAY.2012 15:09:30

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

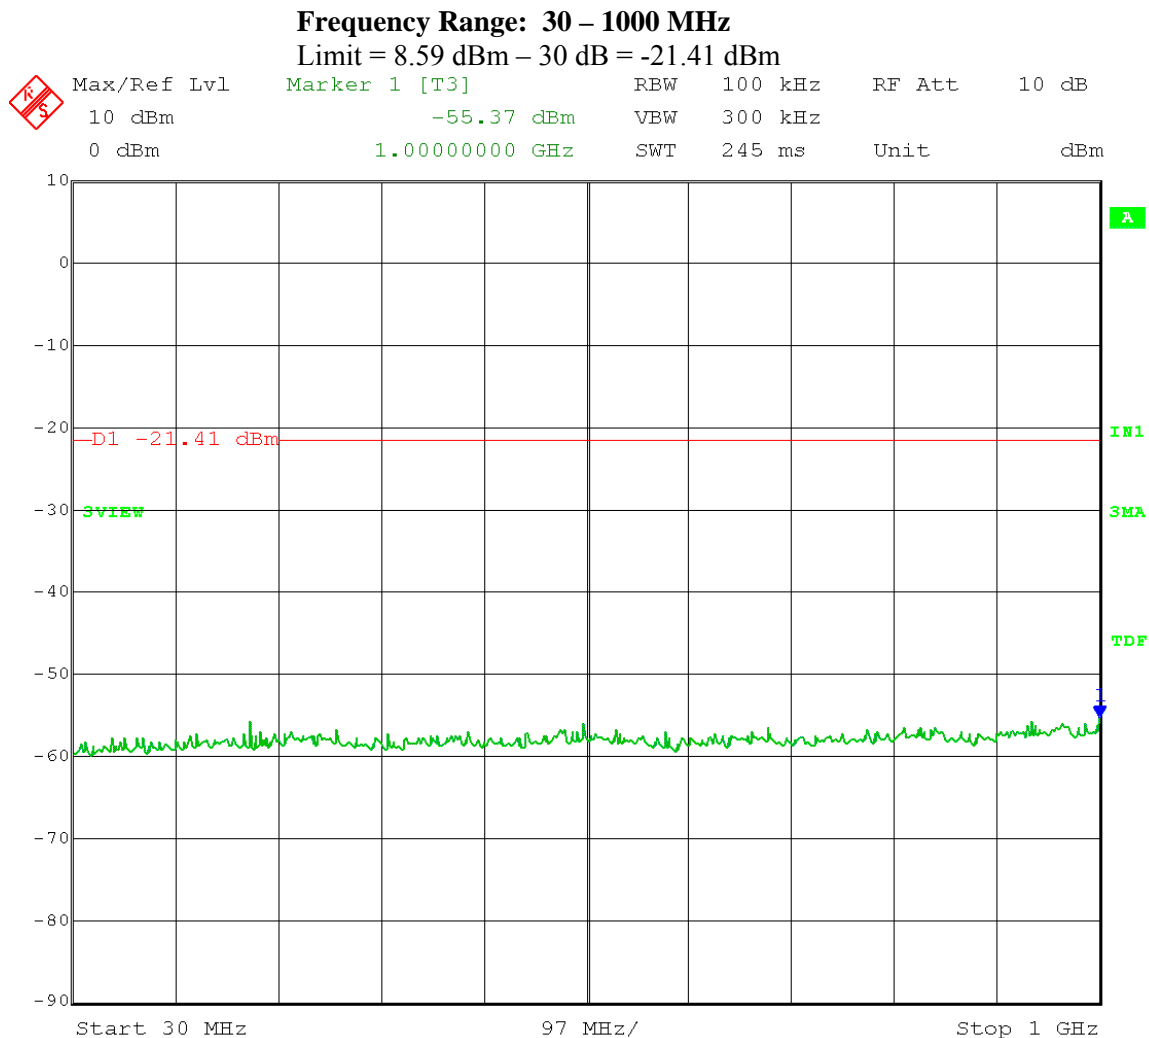


Date: 15.MAY.2012 15:19:06

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

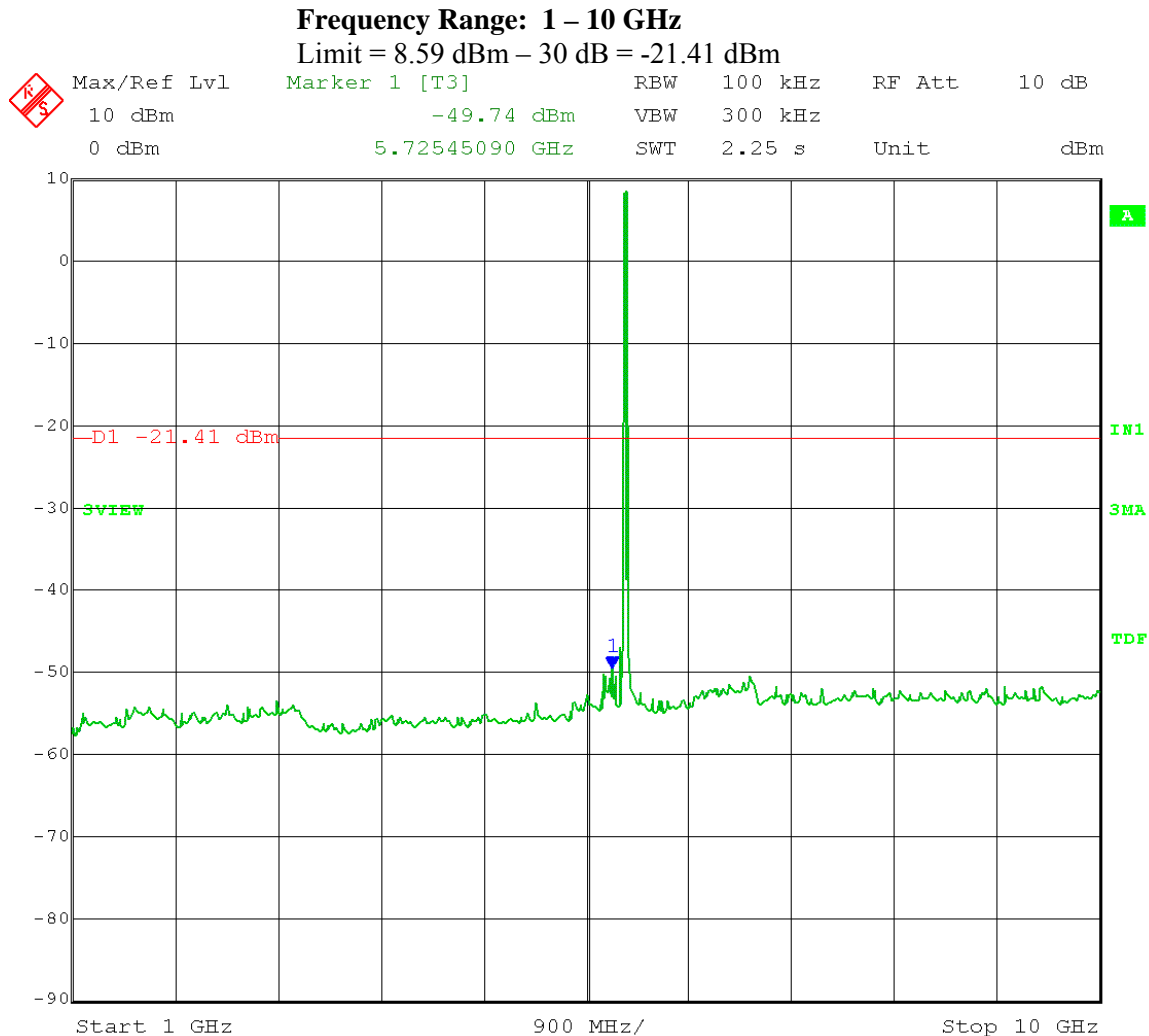


Date: 15.MAY.2012 15:14:49

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

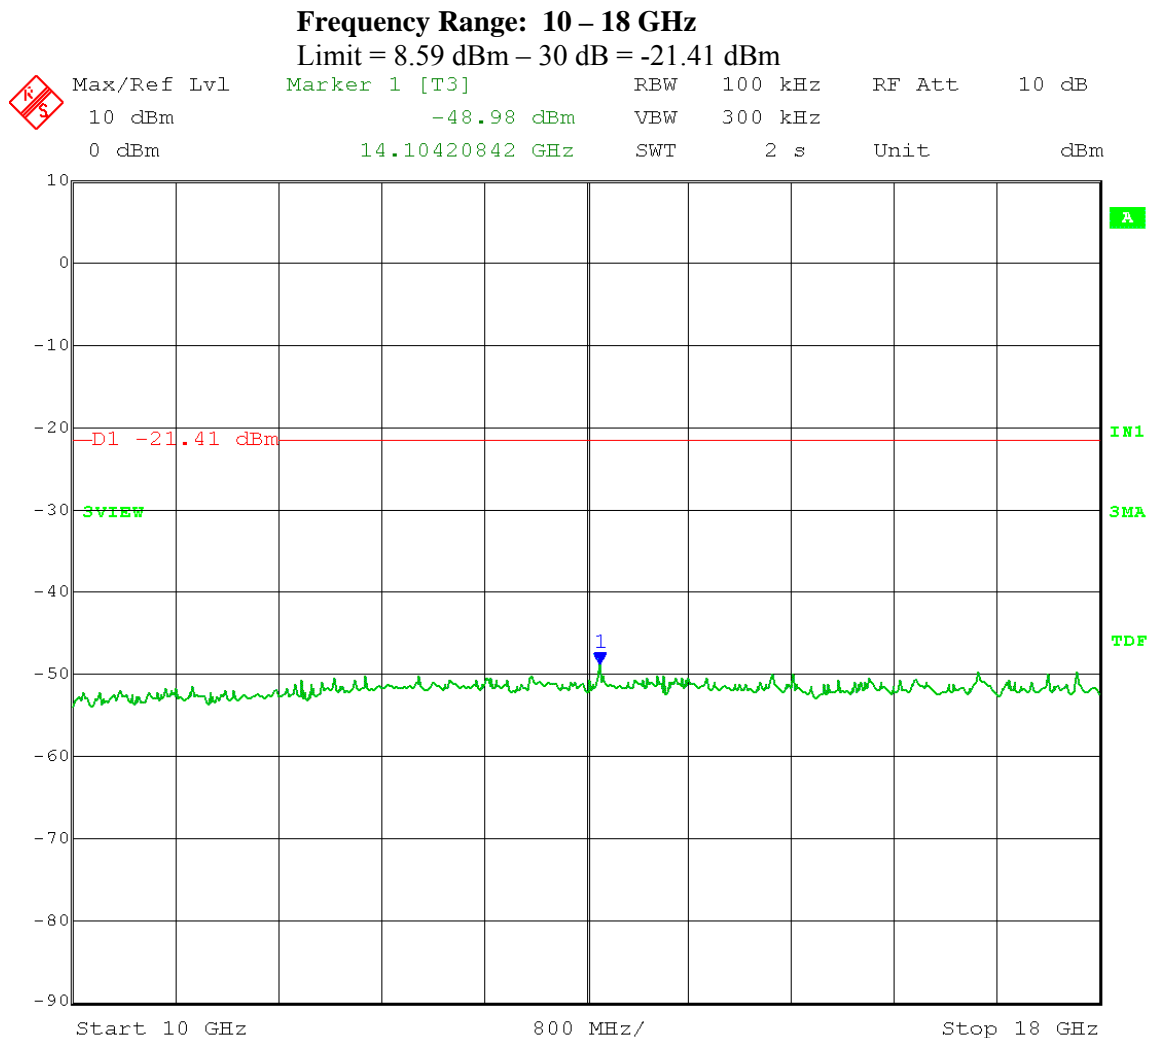


Date: 15.MAY.2012 15:15:49

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite no change
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

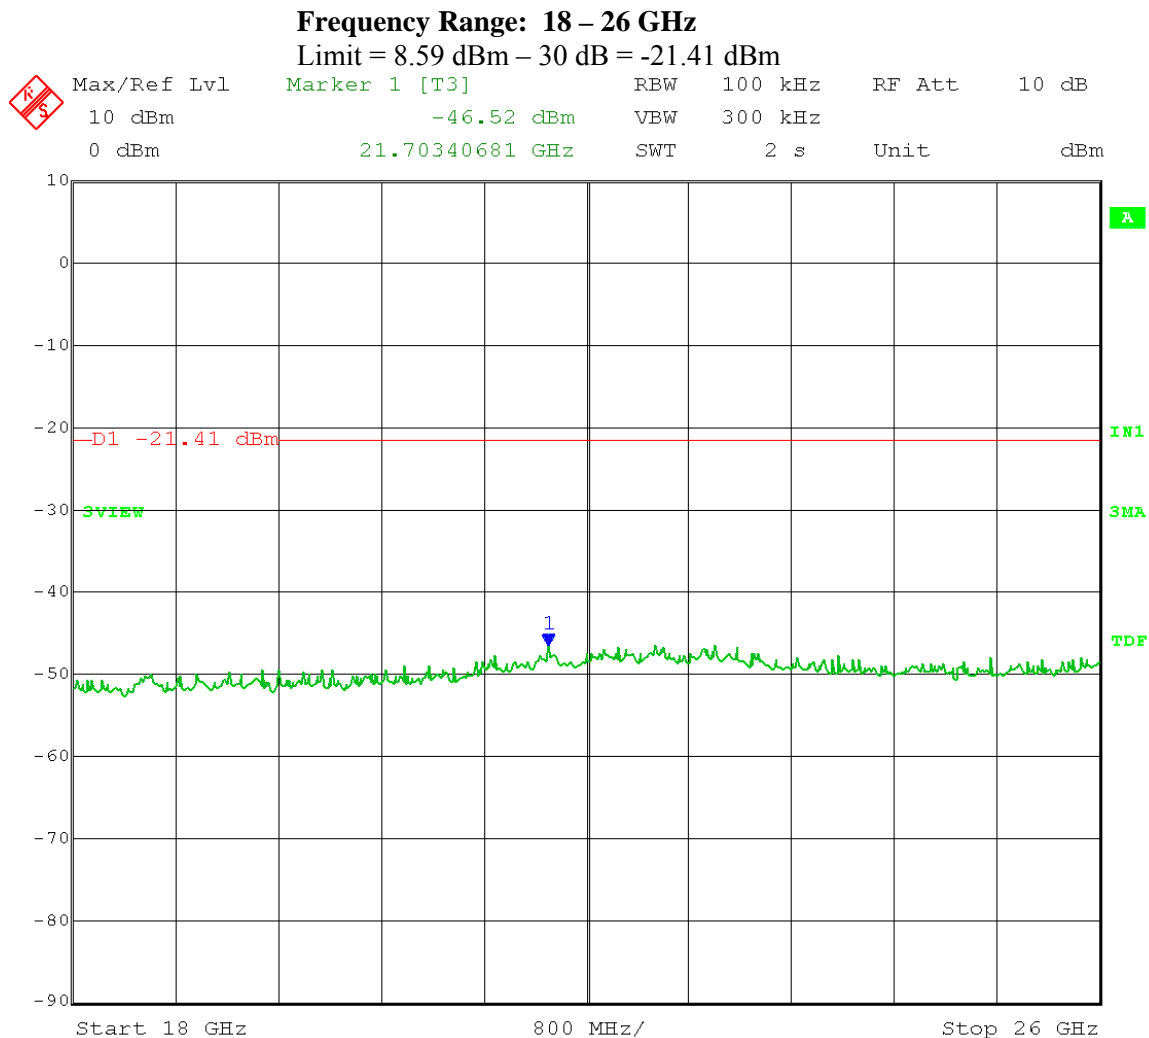


Date: 15.MAY.2012 15:17:00

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

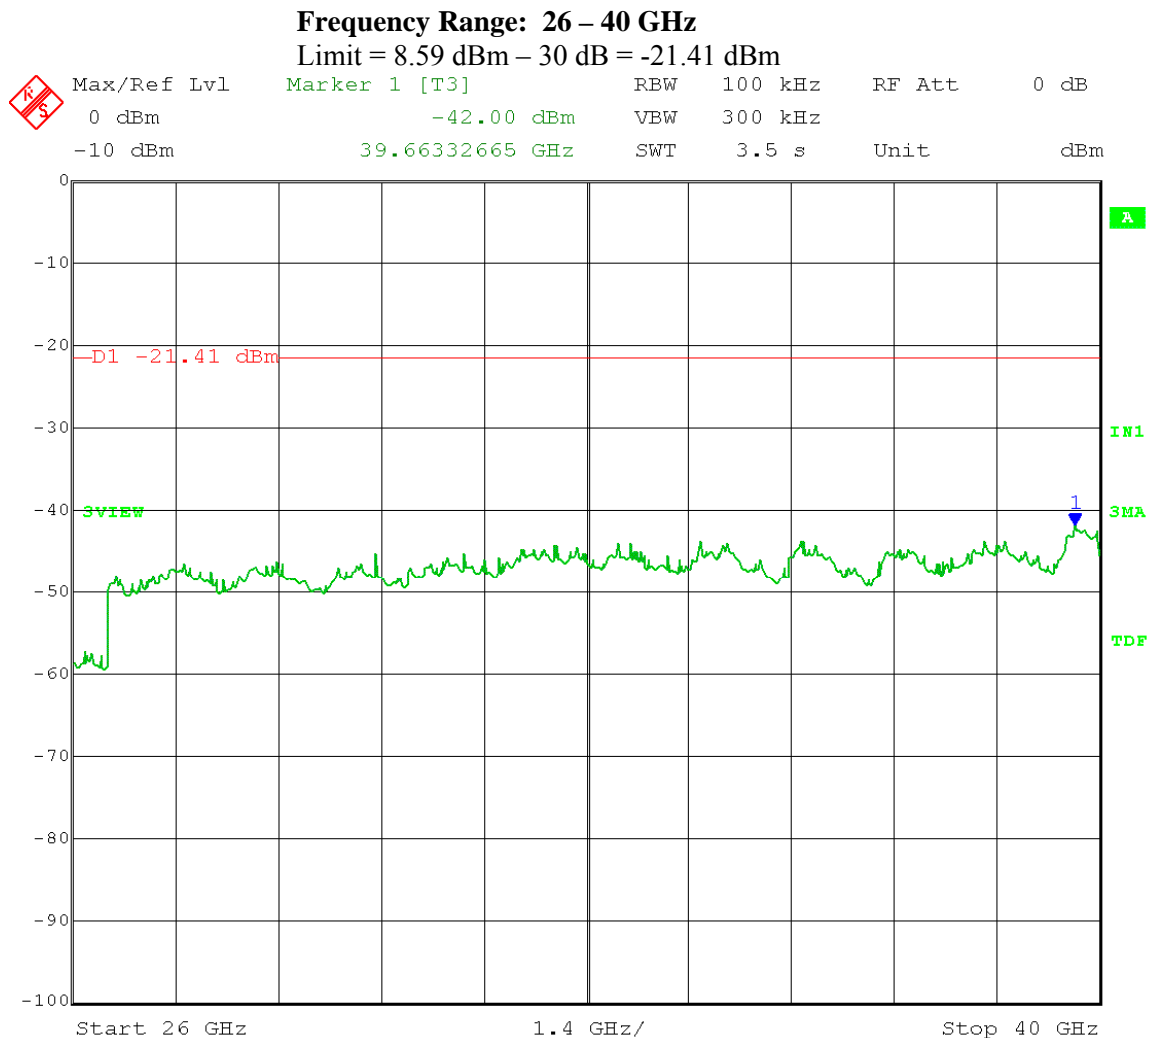

Date: 15.MAY.2012 15:17:59



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A6.0 Maximum Unwanted Emission Levels into Restricted Frequency Bands – Radiated

Rule Section: Section 15.247(d)
RSS-210 A8.5
RSS-Gen 7.2.2

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.4.2 – Unwanted Emissions into Restricted Frequency Bands

ANSI C63.10:2009 – Sections 6.5 and 6.6

Description: This test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. Canada: RSS-Gen 7.2.2 Table 3.

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Limit: FCC Part 15.209, Canada: RSS-Gen 7.2.5 Table 5

Results: Passed

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 68 deg. F; 42% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: OFDM 10 & 20 MHz channel bandwidths; FSK (with dual patch & omni antennas); Low, Mid, and High channels
Date: 05-30-2012


TEXT: "Horz 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

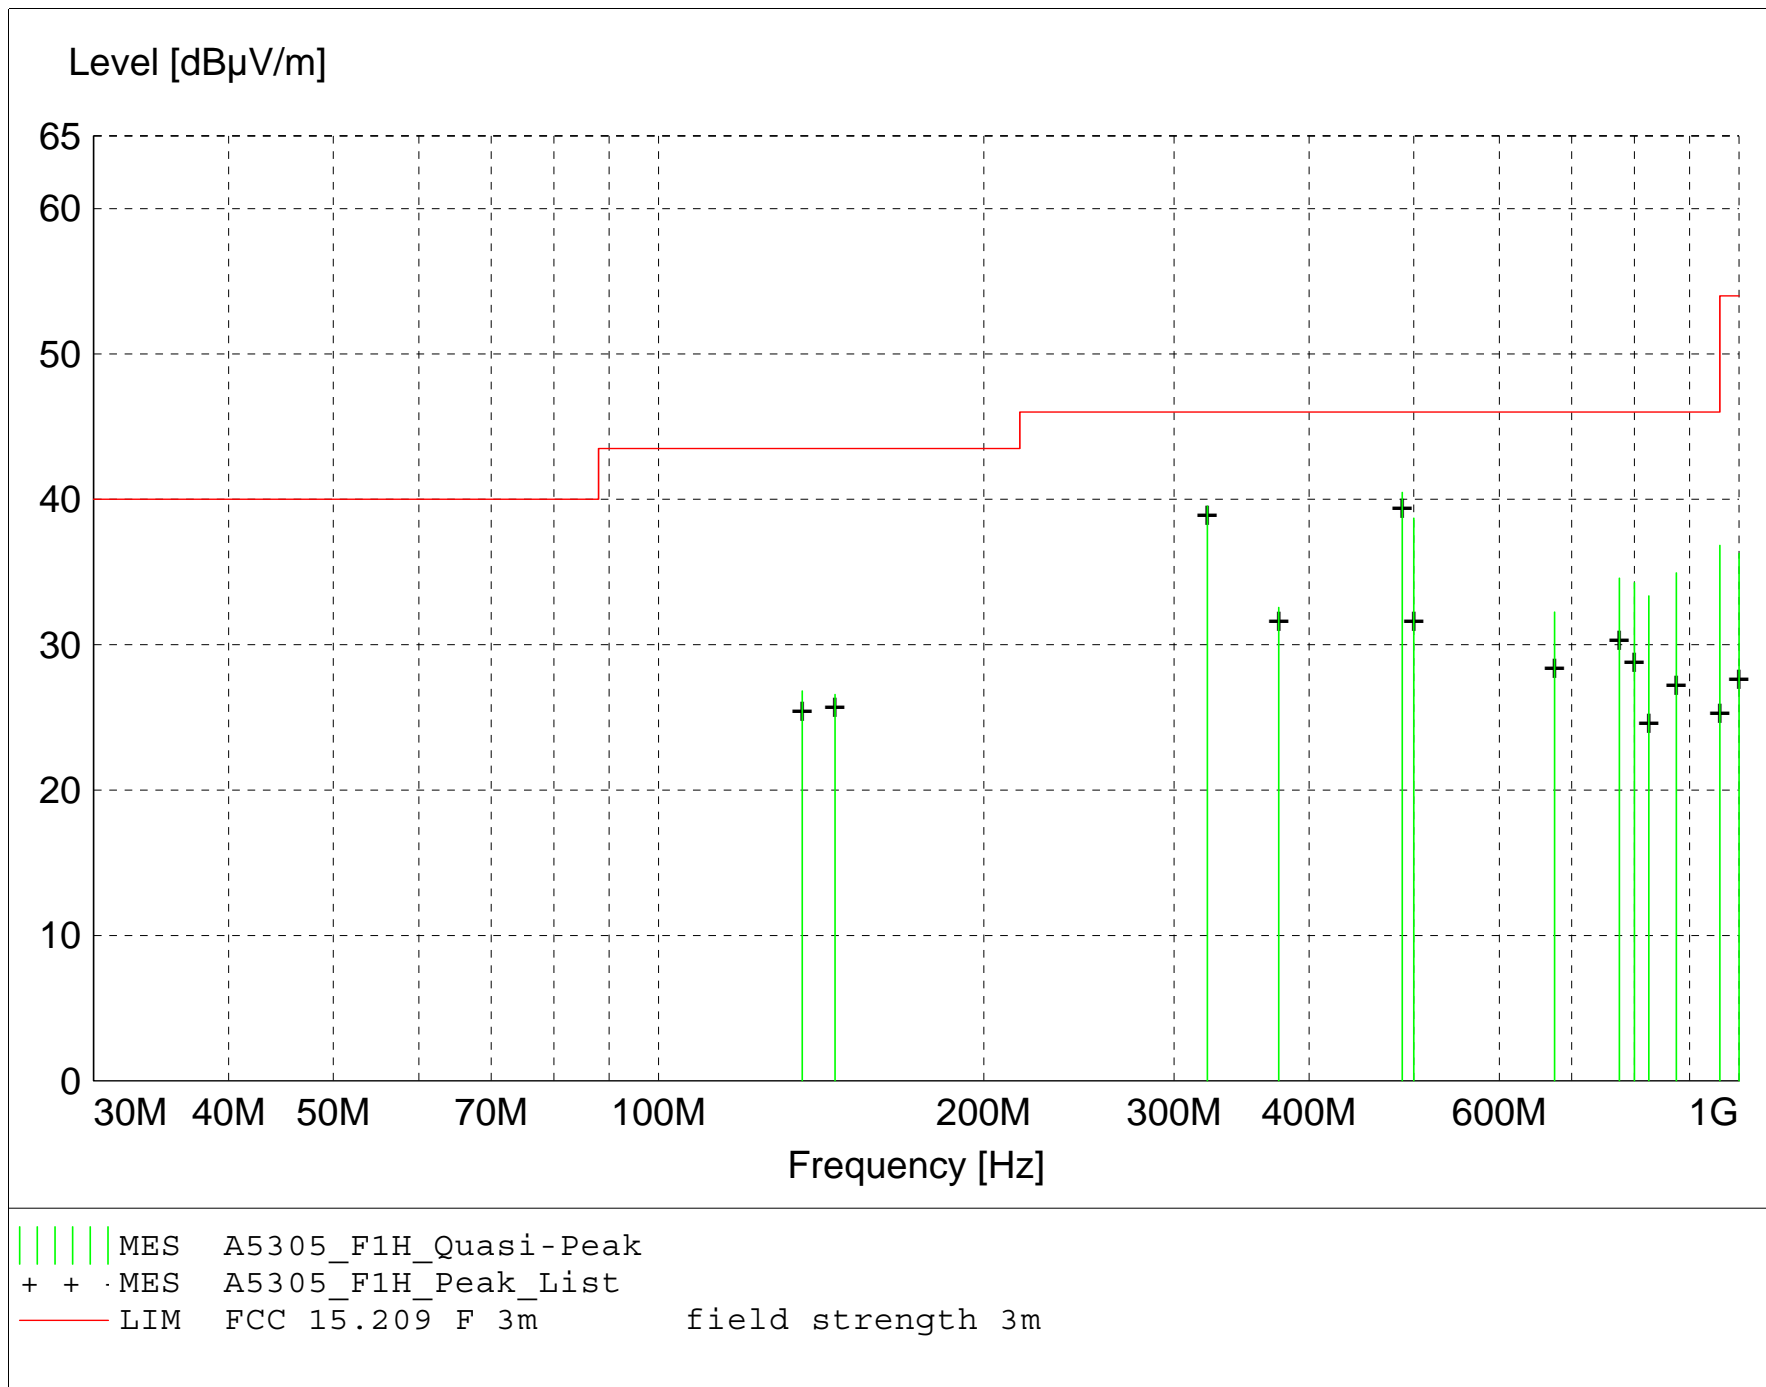

MEASUREMENT RESULT: "A5305_F1H_Final"

5/30/2012 1:33PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
487.800000	42.97	17.64	-20.1	40.5	46.0	5.5	1.10	0	QUASI-PEAK	broadband
322.000000	45.92	14.76	-21.1	39.5	46.0	6.5	2.00	280	QUASI-PEAK	broadband
500.000000	40.44	18.20	-19.9	38.7	46.0	7.3	1.10	15	QUASI-PEAK	None
960.000000	29.62	23.90	-16.7	36.8	46.0	9.2	2.10	220	QUASI-PEAK	None
875.000000	29.33	23.20	-17.6	34.9	46.0	11.1	1.00	180	QUASI-PEAK	None
774.980000	30.72	21.60	-17.8	34.6	46.0	11.4	1.10	180	QUASI-PEAK	None
774.980000	30.72	21.60	-17.8	34.6	46.0	11.4	1.10	180	QUASI-PEAK	None
800.000000	30.24	21.70	-17.7	34.3	46.0	11.7	1.30	165	QUASI-PEAK	None
825.000000	28.23	22.20	-17.1	33.4	46.0	12.6	1.00	170	QUASI-PEAK	None
375.000000	37.87	15.30	-20.6	32.6	46.0	13.4	1.60	220	QUASI-PEAK	None
675.000000	30.13	21.10	-19.0	32.2	46.0	13.8	1.30	195	QUASI-PEAK	None
135.810000	36.42	12.50	-22.1	26.8	43.5	16.7	3.30	90	QUASI-PEAK	broadband
145.665000	36.69	12.07	-22.2	26.6	43.5	16.9	1.30	270	QUASI-PEAK	broadband
1000.000000	28.01	24.50	-16.2	36.3	54.0	17.7	1.30	180	QUASI-PEAK	None

FCC Part 15.205/15.209 Sprios Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 68 deg. F; 42% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: OFDM 10 & 20 MHz channel bandwidths; FSK (with dual patch & omni antennas); Low, Mid, and High channels
Date: 05-30-2012


TEXT: "Vert 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average dector
Final maximized level using Peak detector

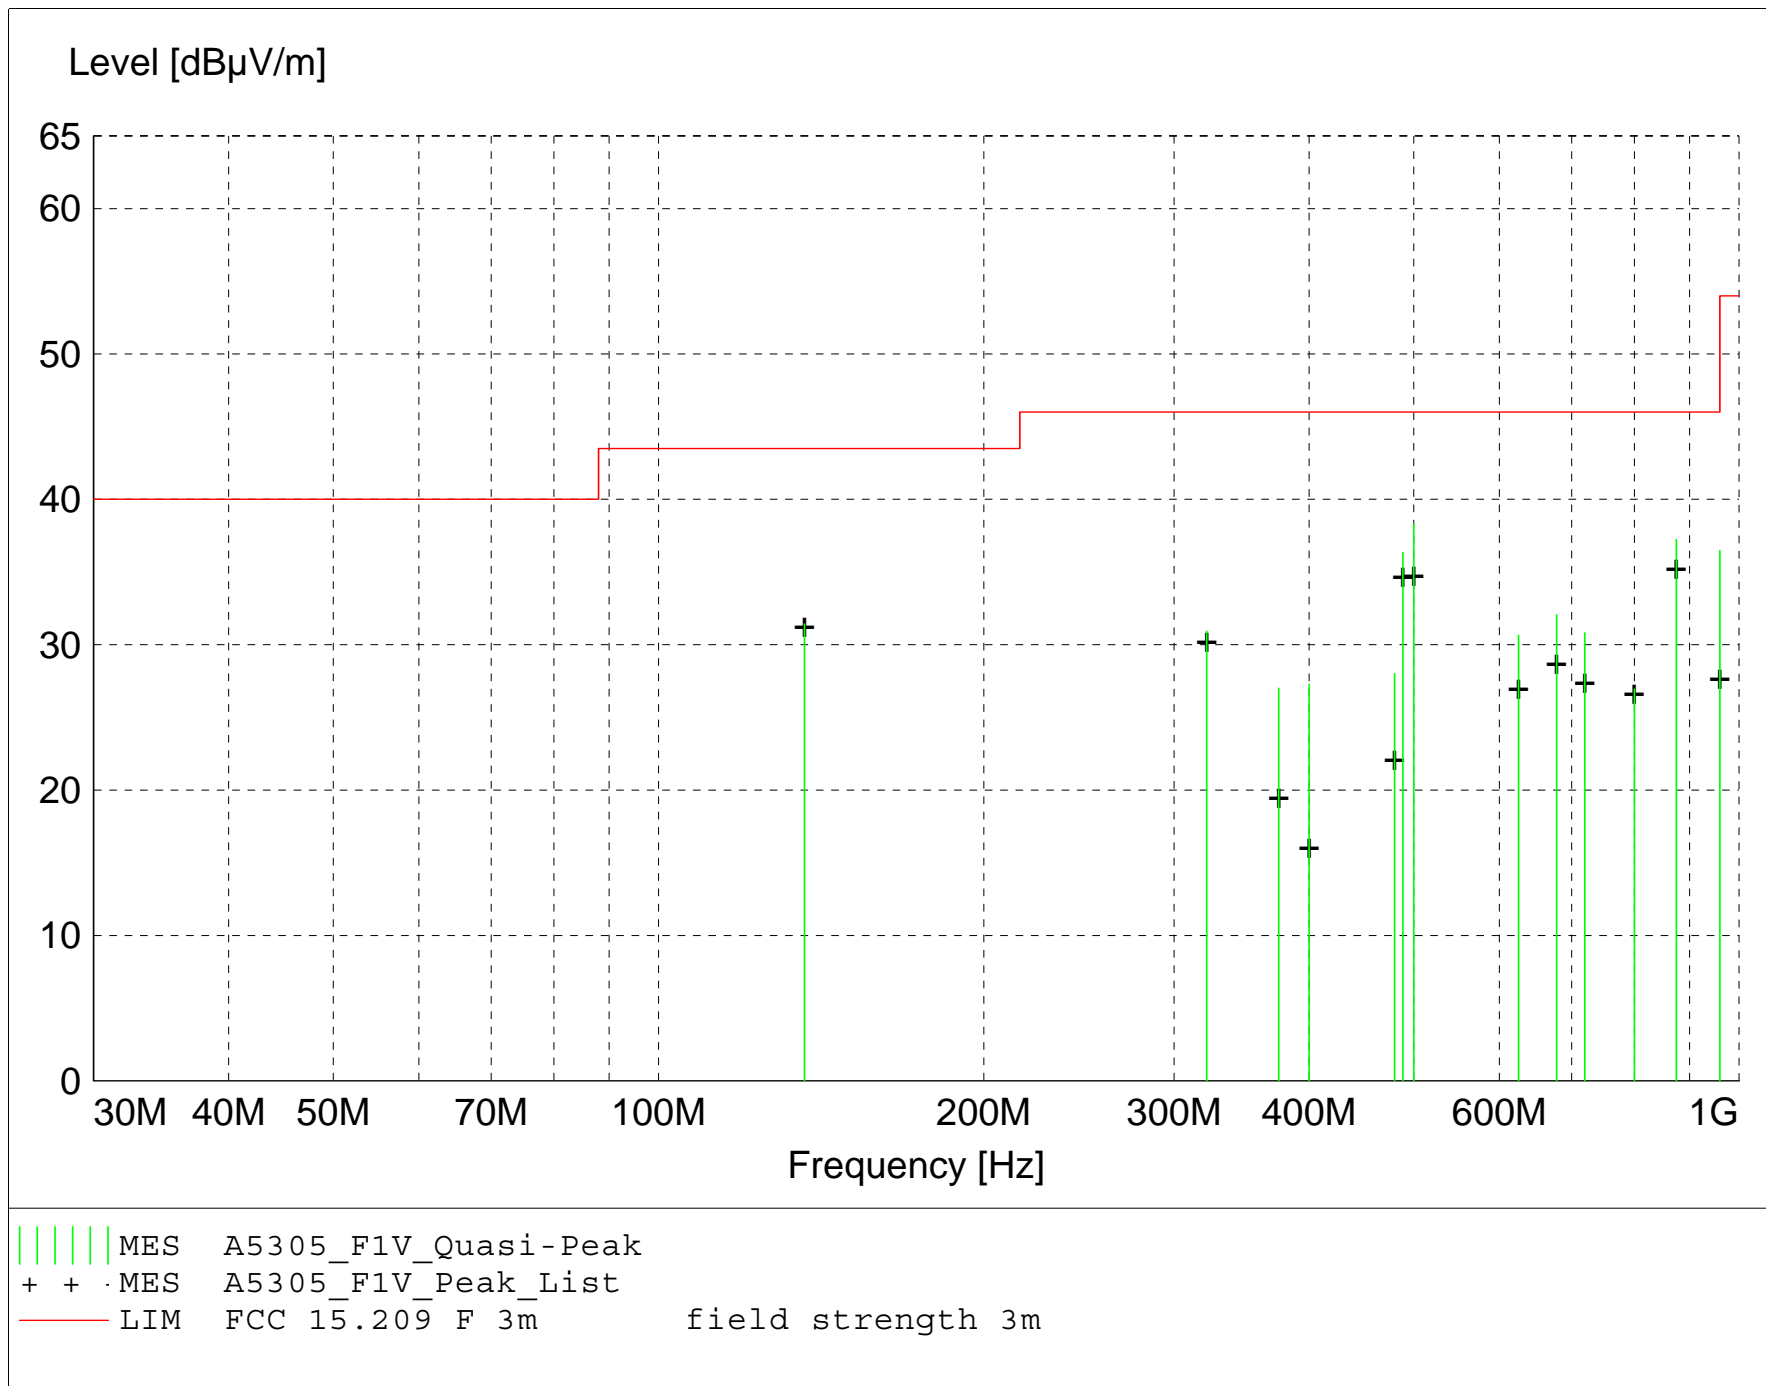

MEASUREMENT RESULT: "A5305_F1V_Final"

5/30/2012 1:09PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
500.000000	40.06	18.20	-19.9	38.3	46.0	7.7	1.60	190	QUASI-PEAK	None
875.000000	31.62	23.20	-17.6	37.2	46.0	8.8	2.00	190	QUASI-PEAK	None
960.000000	29.27	23.90	-16.7	36.5	46.0	9.5	1.20	135	QUASI-PEAK	None
488.530000	38.83	17.63	-20.1	36.3	46.0	9.7	1.00	225	QUASI-PEAK	broadband
136.470000	41.15	12.41	-22.1	31.4	43.5	12.1	2.50	270	QUASI-PEAK	broadband
677.850000	30.01	21.04	-19.0	32.1	46.0	13.9	1.20	180	QUASI-PEAK	broadband
321.620000	37.31	14.77	-21.1	30.9	46.0	15.1	1.00	180	QUASI-PEAK	broadband
720.000000	28.39	21.30	-18.9	30.8	46.0	15.2	1.70	180	QUASI-PEAK	None
625.000000	30.44	19.50	-19.3	30.6	46.0	15.4	1.10	165	QUASI-PEAK	None
480.000000	30.68	17.70	-20.4	28.0	46.0	18.0	1.00	210	QUASI-PEAK	None
400.000000	31.97	16.00	-20.7	27.3	46.0	18.7	1.00	180	QUASI-PEAK	None
375.000000	32.31	15.30	-20.6	27.0	46.0	19.0	1.40	45	QUASI-PEAK	None
800.000000	22.94	21.70	-17.7	27.0	46.0	19.0	1.10	30	QUASI-PEAK	None

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F; 44% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: 10 MHz channel bandwidth; Low, Mid, and High channels
Date: 05-24-2012


TEXT: "Horz 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

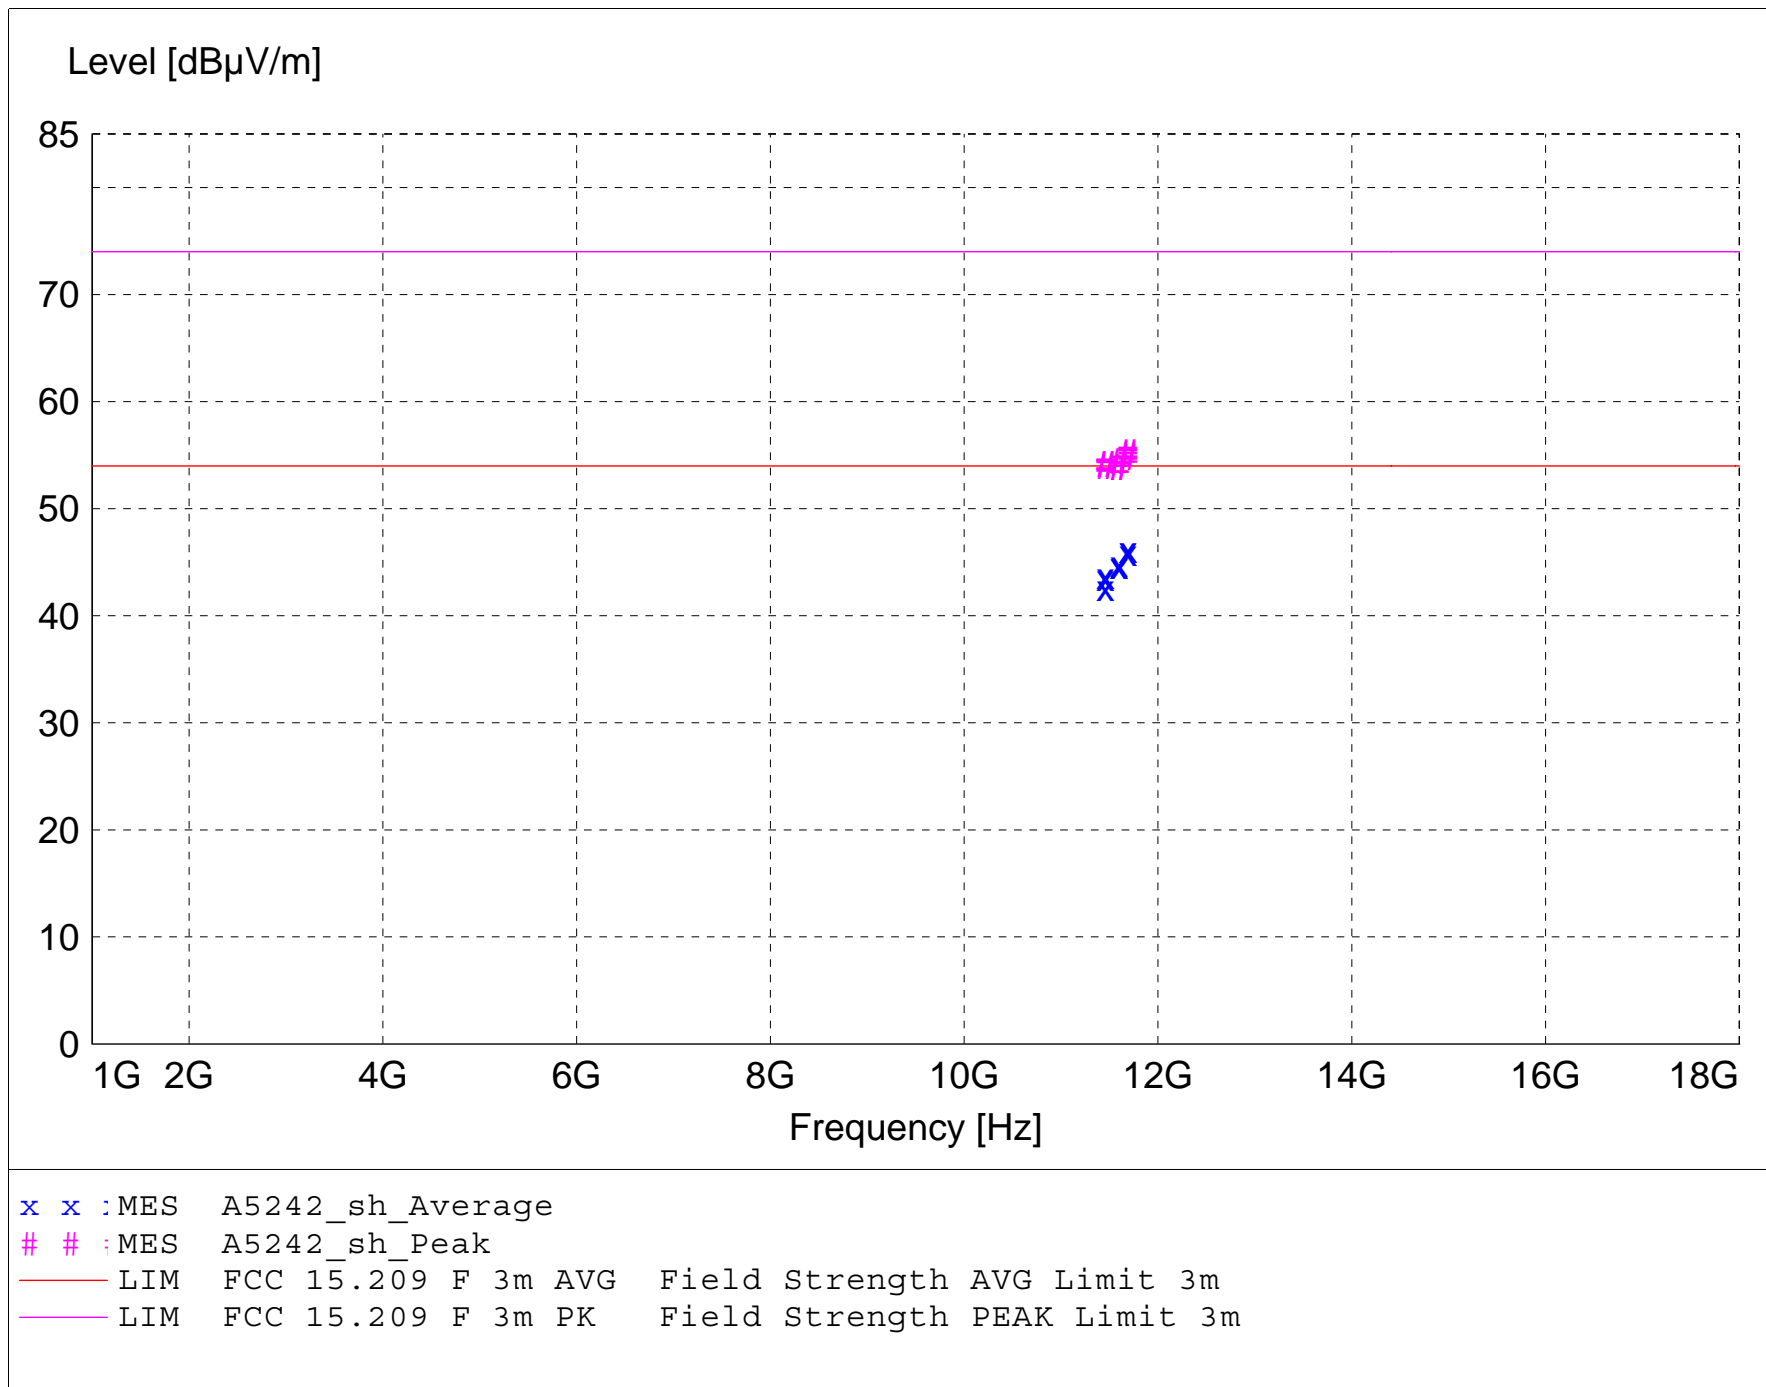

MEASUREMENT RESULT: "A5242_sh_Final"

5/24/2012 2:17PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
11459.970000	38.41	40.65	-35.3	43.7	54.0	10.3	1.30	225	AVERAGE	Low ch; 16QAM
11459.970000	38.19	40.65	-35.3	43.5	54.0	10.5	1.30	170	AVERAGE	Low ch; 64QAM
11459.970000	37.23	40.65	-35.3	42.5	54.0	11.5	1.10	130	AVERAGE	Low ch; QPSK
11599.960000	39.59	40.64	-35.5	44.8	54.0	9.2	1.00	135	AVERAGE	Mid ch; QPSK
11599.970000	39.49	40.64	-35.5	44.7	54.0	9.3	1.00	170	AVERAGE	Mid ch; 16QAM
11599.970000	39.49	40.64	-35.5	44.7	54.0	9.3	1.00	135	AVERAGE	Mid ch; 64QAM
11689.980000	40.96	40.49	-35.3	46.1	54.0	7.9	1.00	140	AVERAGE	High ch; 16QAM
11689.980000	40.92	40.49	-35.3	46.1	54.0	7.9	1.00	135	AVERAGE	High ch; 64QAM
11689.980000	40.67	40.49	-35.3	45.8	54.0	8.2	1.00	135	AVERAGE	High ch; QPSK
11459.970000	48.82	40.65	-35.3	54.1	74.0	19.9	1.30	170	MAX PEAK	Low ch; 64QAM
11459.970000	48.82	40.65	-35.3	54.1	74.0	19.9	1.30	225	MAX PEAK	Low ch; 16QAM
11459.970000	48.69	40.65	-35.3	54.0	74.0	20.0	1.10	130	MAX PEAK	Low ch; QPSK
11599.960000	48.69	40.64	-35.5	53.9	74.0	20.1	1.00	135	MAX PEAK	Mid ch; QPSK
11599.970000	49.23	40.64	-35.5	54.4	74.0	19.6	1.00	170	MAX PEAK	Mid ch; 16QAM
11599.970000	48.69	40.64	-35.5	53.9	74.0	20.1	1.00	135	MAX PEAK	Mid ch; 64QAM
11689.980000	50.07	40.49	-35.3	55.2	74.0	18.8	1.00	140	MAX PEAK	High ch; 16QAM
11689.980000	49.93	40.49	-35.3	55.1	74.0	18.9	1.00	135	MAX PEAK	High ch; 64QAM
11689.980000	49.65	40.49	-35.3	54.8	74.0	19.2	1.00	135	MAX PEAK	High ch; QPSK

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F; 44% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: 10 MHz channel bandwidth; Low, Mid, and High channels
Date: 05-24-2012


TEXT: "Vert 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

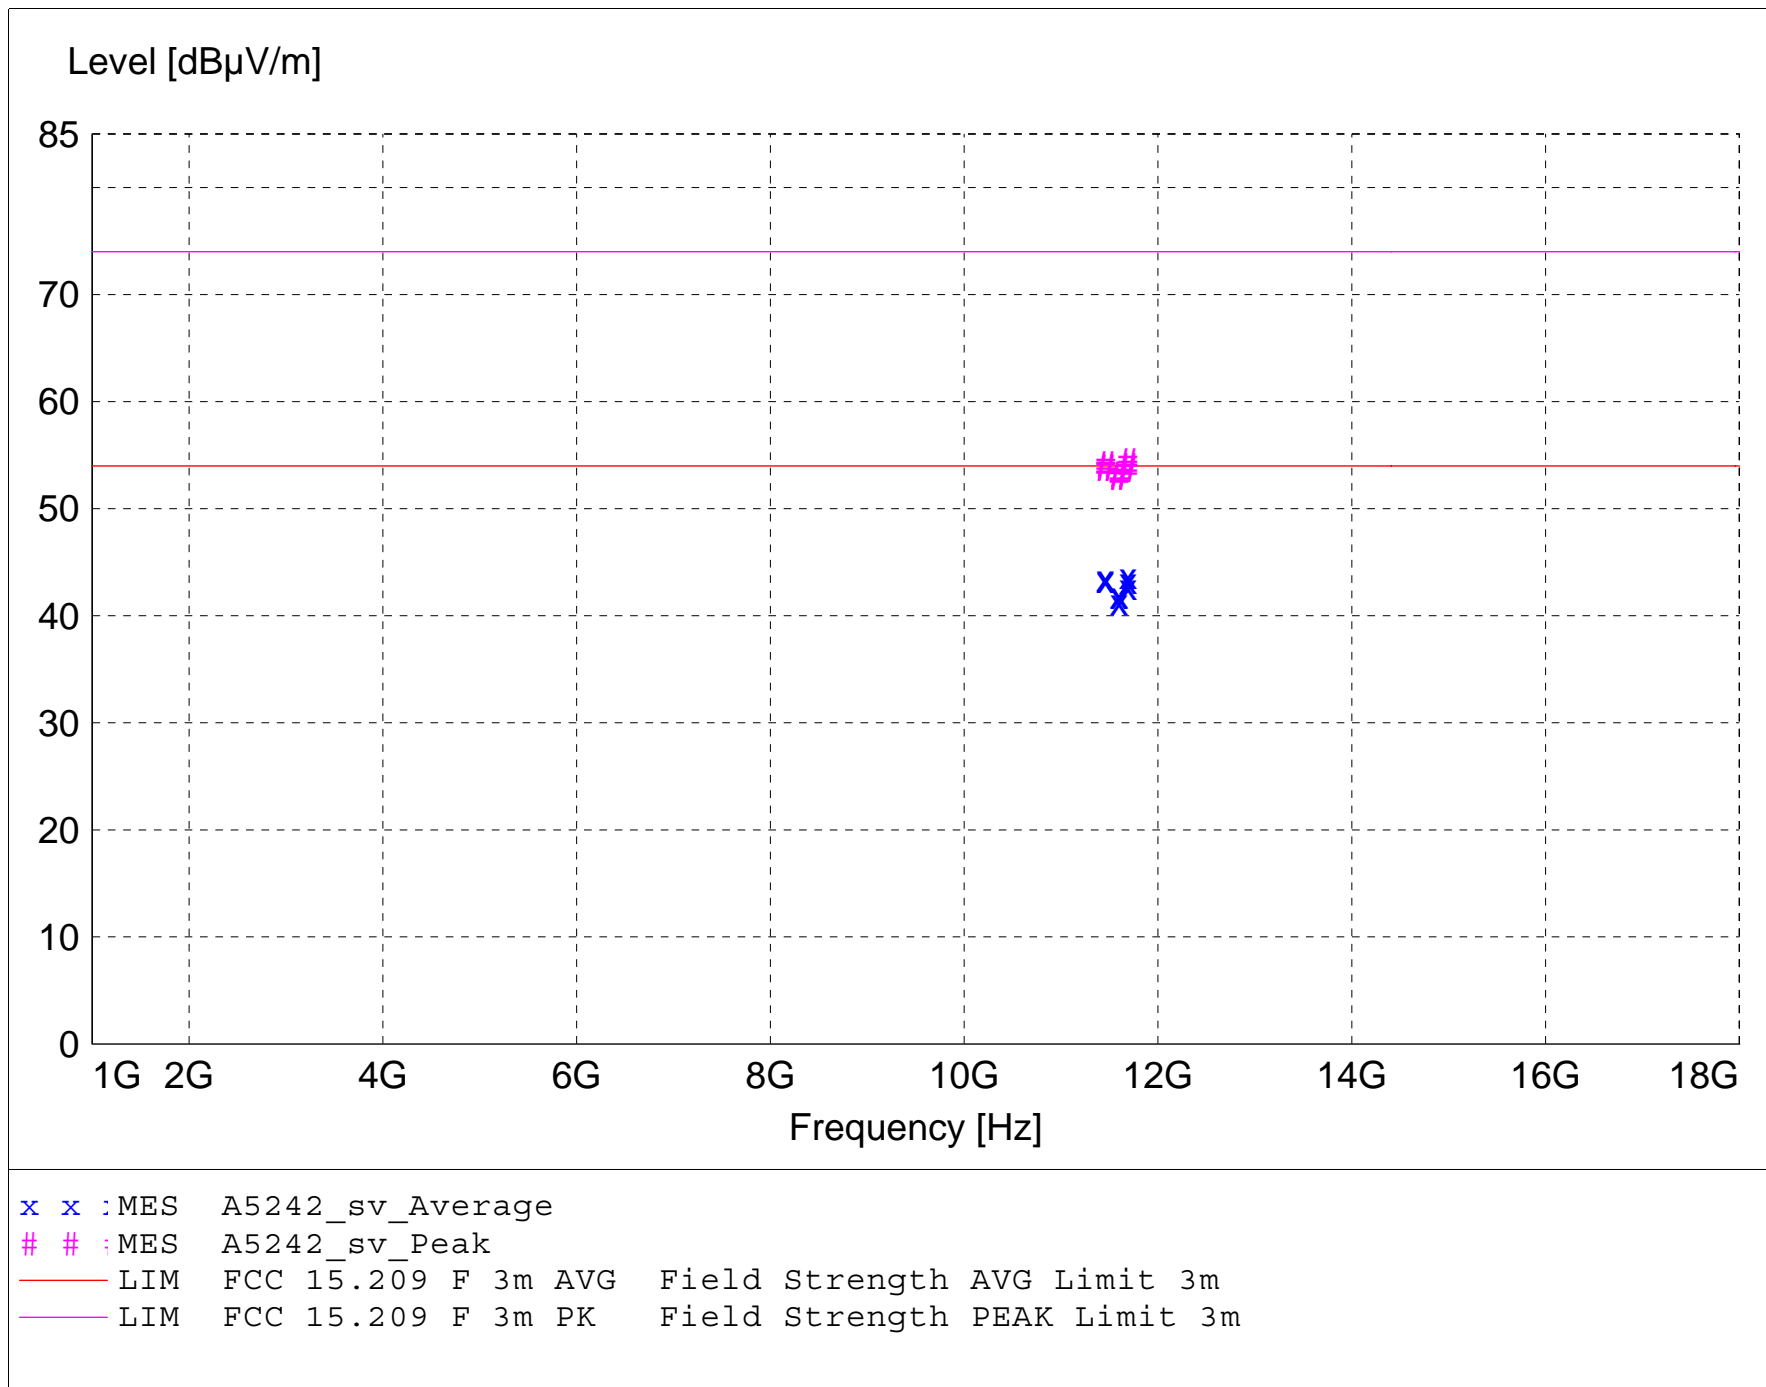

MEASUREMENT RESULT: "A5242_sv_Final"

5/24/2012 2:17PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
11459.960000	38.19	40.65	-35.3	43.5	54.0	10.5	1.30	160	AVERAGE	Low ch; 64QAM
11459.970000	38.13	40.65	-35.3	43.4	54.0	10.6	1.20	170	AVERAGE	Low ch; 16QAM
11459.990000	38.01	40.65	-35.3	43.3	54.0	10.7	1.20	175	AVERAGE	Low ch; QPSK
11599.950000	36.65	40.64	-35.5	41.8	54.0	12.2	1.10	160	AVERAGE	Mid ch; 64QAM
11599.970000	36.09	40.64	-35.5	41.3	54.0	12.7	1.20	225	AVERAGE	Mid ch; 16QAM
11599.990000	36.78	40.64	-35.5	42.0	54.0	12.0	1.10	170	AVERAGE	Mid ch; QPSK
11689.970000	38.52	40.49	-35.3	43.7	54.0	10.3	1.00	140	AVERAGE	High ch; 64QAM
11689.970000	37.54	40.49	-35.3	42.7	54.0	11.3	1.30	220	AVERAGE	High ch; 16QAM
11689.980000	38.07	40.49	-35.3	43.2	54.0	10.8	1.10	160	AVERAGE	High ch; QPSK
11459.960000	48.56	40.65	-35.3	53.9	74.0	20.1	1.30	160	MAX PEAK	Low ch; 64QAM
11459.970000	48.82	40.65	-35.3	54.1	74.0	19.9	1.20	170	MAX PEAK	Low ch; 16QAM
11459.990000	48.42	40.65	-35.3	53.7	74.0	20.3	1.20	175	MAX PEAK	Low ch; QPSK
11599.950000	47.89	40.64	-35.5	53.1	74.0	20.9	1.10	160	MAX PEAK	Mid ch; 64QAM
11599.970000	47.76	40.64	-35.5	52.9	74.0	21.1	1.20	225	MAX PEAK	Mid ch; 16QAM
11599.990000	48.03	40.64	-35.5	53.2	74.0	20.8	1.10	170	MAX PEAK	Mid ch; QPSK
11689.970000	49.23	40.49	-35.3	54.4	74.0	19.6	1.00	140	MAX PEAK	High ch; 64QAM
11689.970000	48.56	40.49	-35.3	53.7	74.0	20.3	1.30	220	MAX PEAK	High ch; 16QAM
11689.980000	48.82	40.49	-35.3	54.0	74.0	20.0	1.10	160	MAX PEAK	High ch; QPSK

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 72 deg. F; 42% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: 10 MHz channel bandwidth; Low, Mid, and High channels
Date: 05-25-2012


TEXT: "Horz 1 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 1 Meters with HORIZONTAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

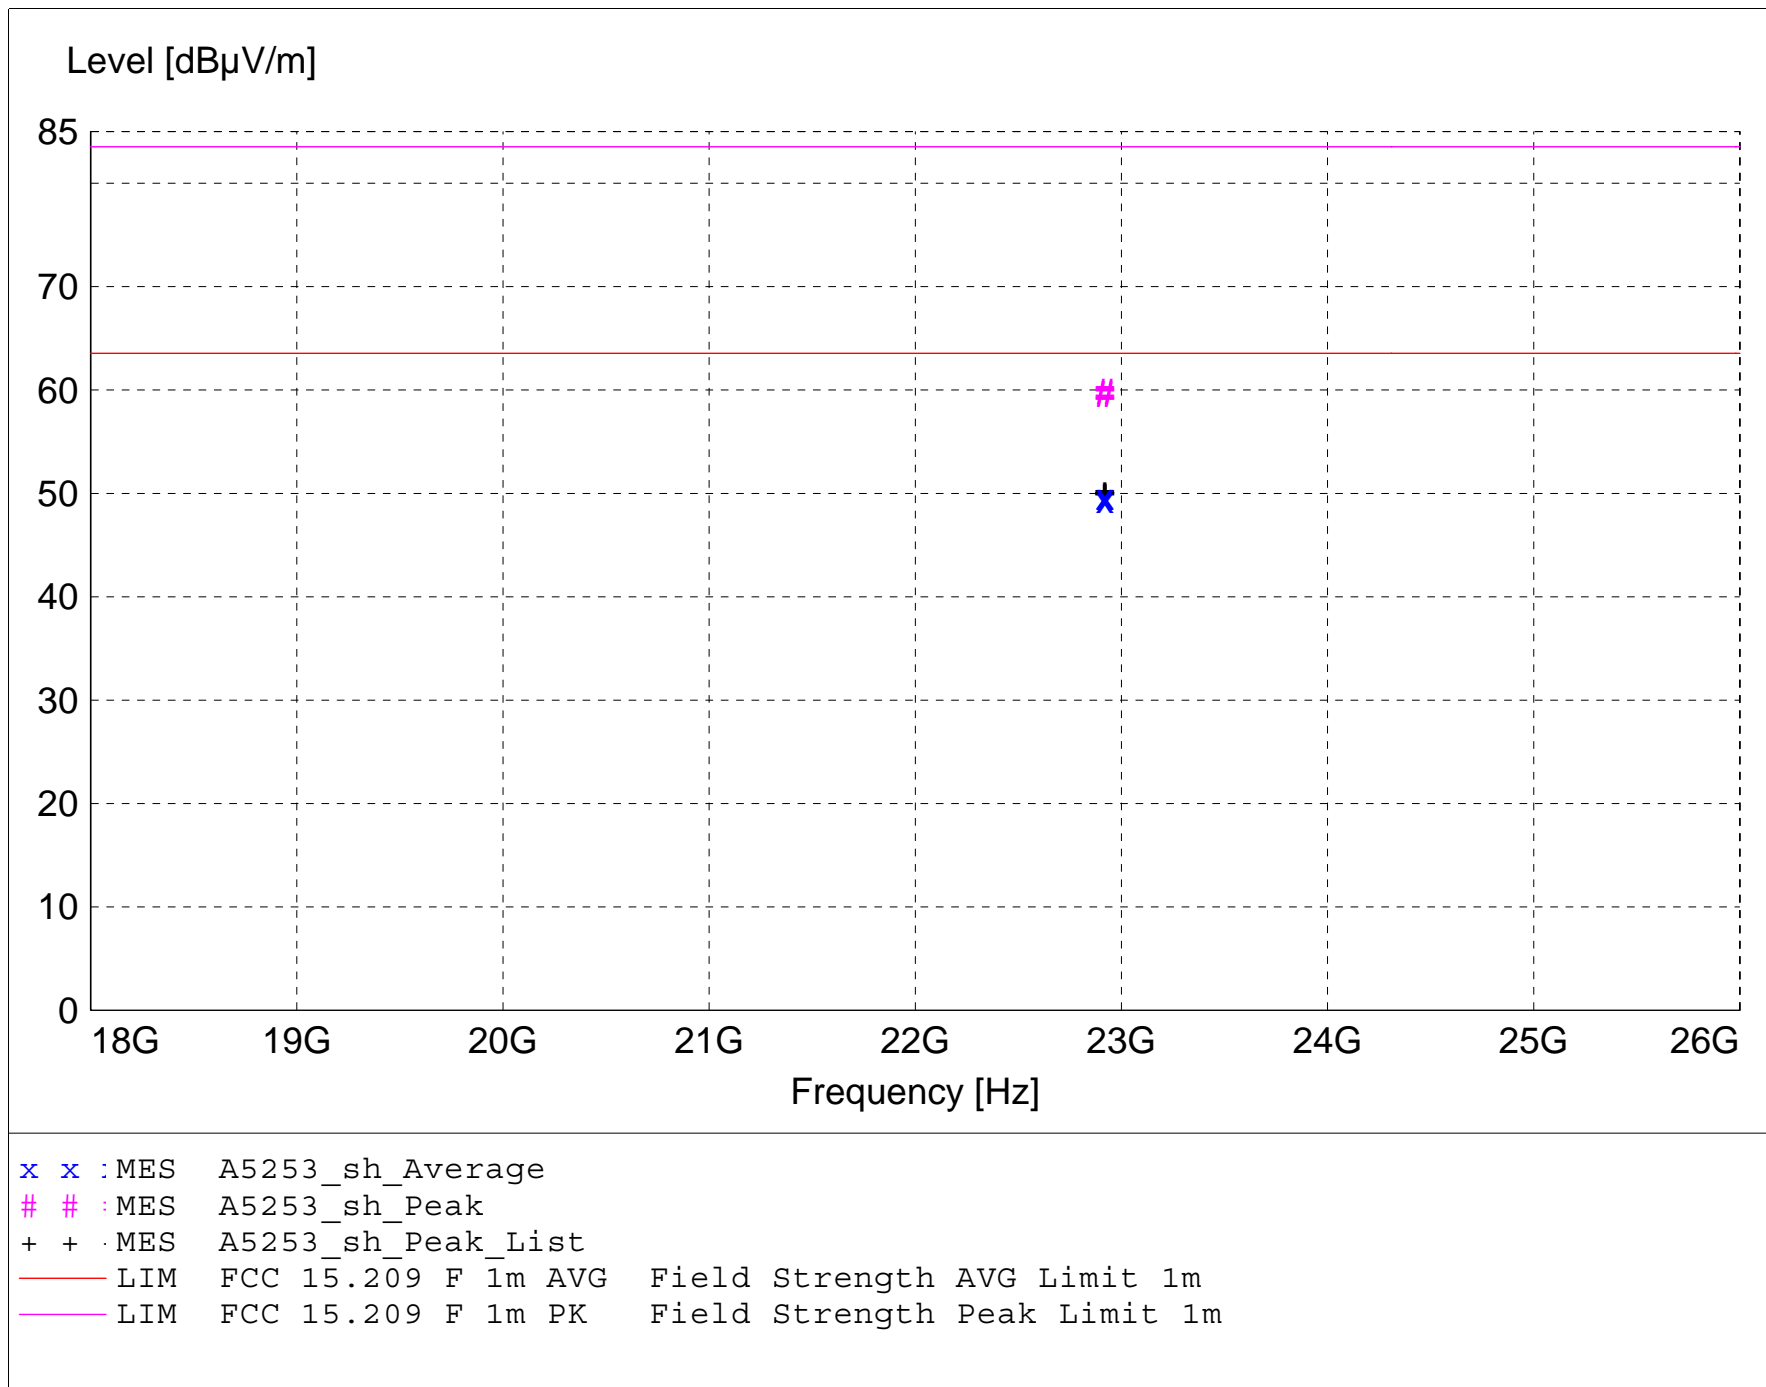

MEASUREMENT RESULT: "A5253_sh_Final"

5/25/2012 3:48PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
22920.000000	46.14	46.37	-42.8	49.7	63.5	13.9	1.30	190	AVERAGE	Low ch; 64QAM
22920.000000	46.12	46.37	-42.8	49.6	63.5	13.9	1.30	190	AVERAGE	Low ch; QPSK
22920.000000	45.75	46.37	-42.8	49.3	63.5	14.3	1.30	190	AVERAGE	Low ch; 16QAM
22920.000000	56.33	46.37	-42.8	59.8	83.5	23.7	1.30	190	MAX PEAK	Low ch; 16QAM
22920.000000	56.20	46.37	-42.8	59.7	83.5	23.8	1.30	190	MAX PEAK	Low ch; 64QAM
22920.000000	56.06	46.37	-42.8	59.6	83.5	24.0	1.30	190	MAX PEAK	Low ch; QPSK

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 72 deg. F; 42% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: 10 MHz channel bandwidth; Low, Mid, and High channels
Date: 05-25-2012


TEXT: "Vert 1 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 1 Meters with VERTICAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

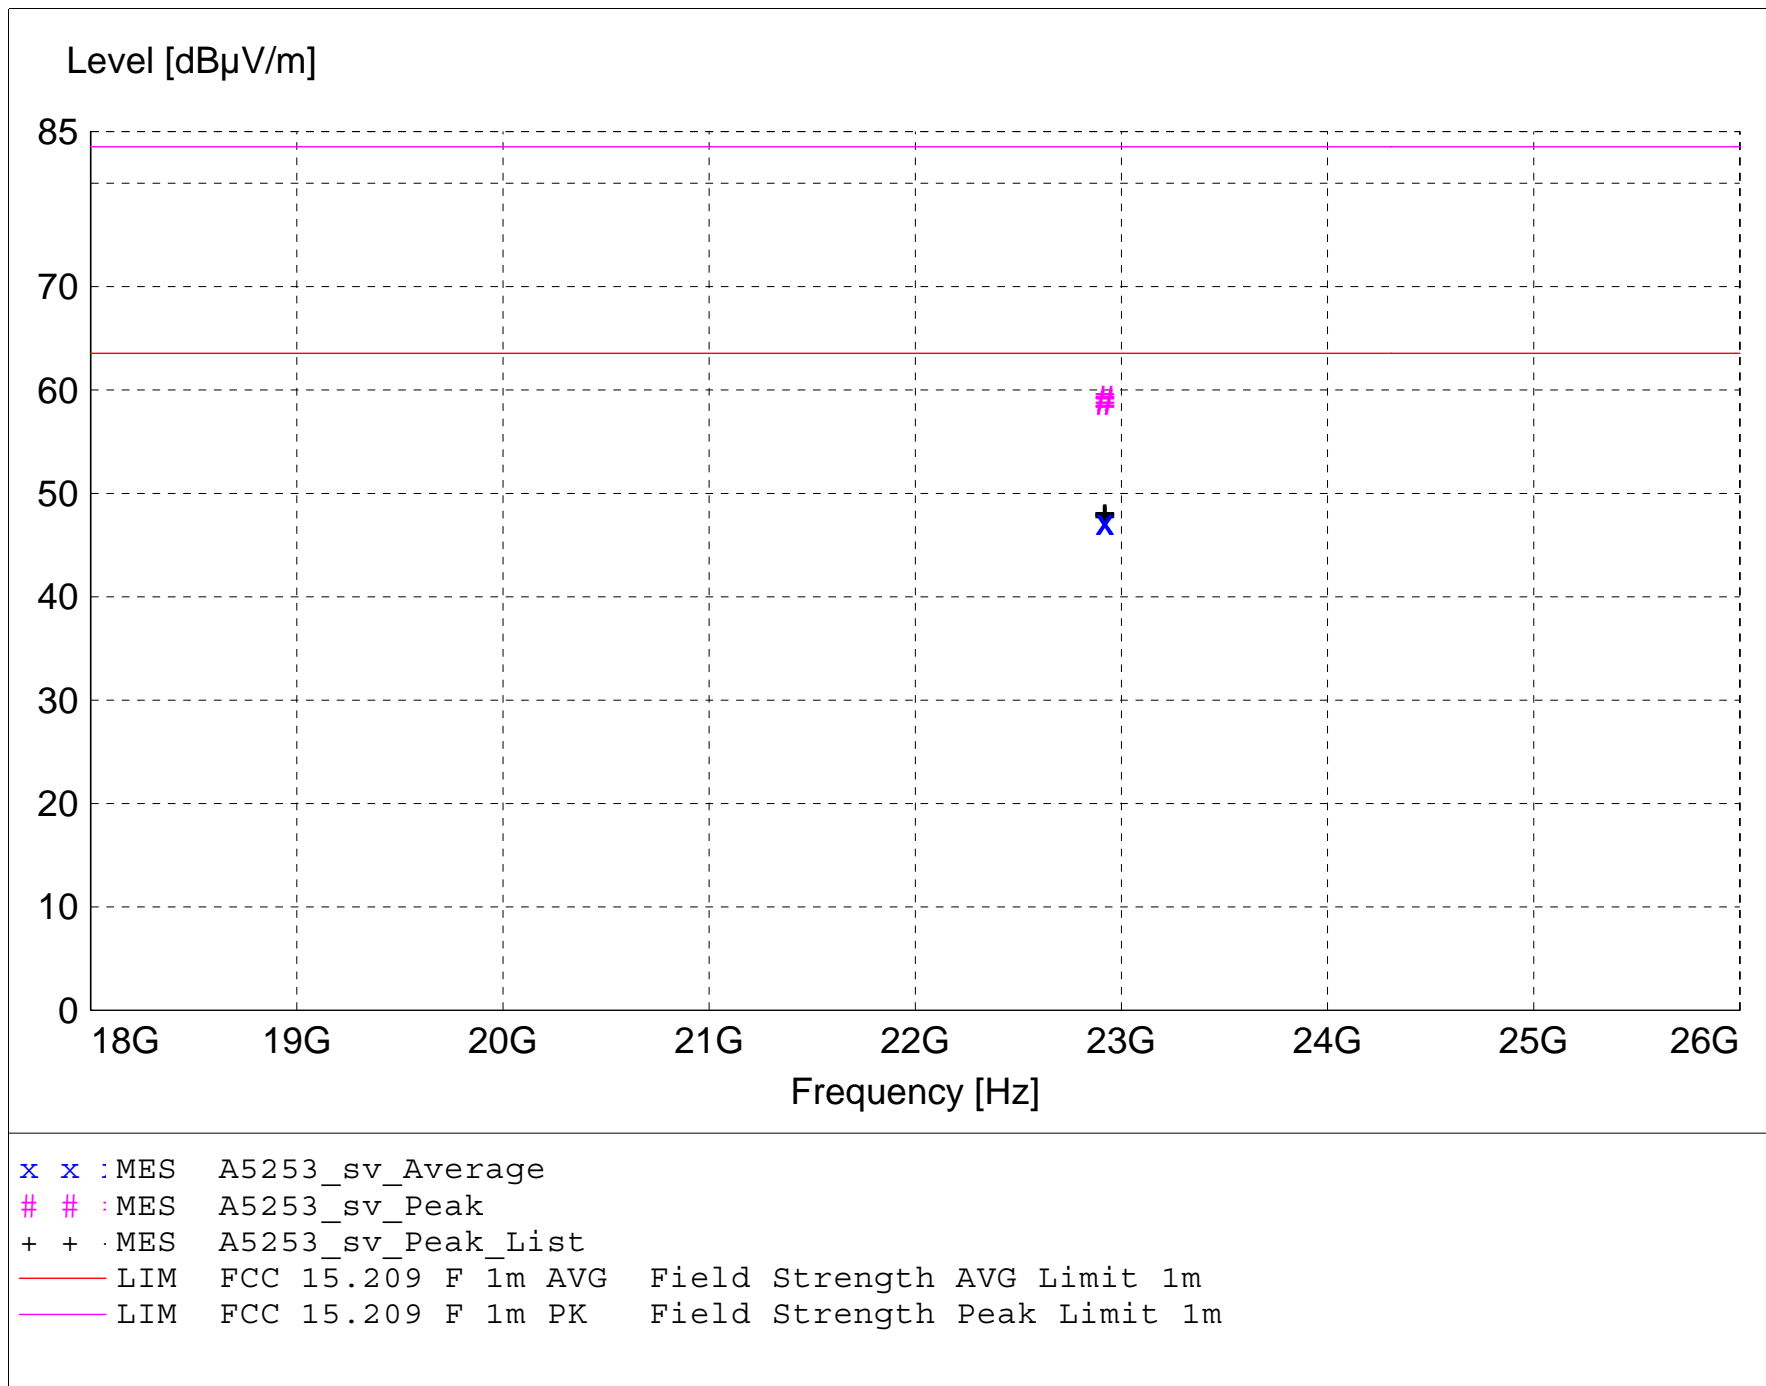

MEASUREMENT RESULT: "A5253_sv_Final"

5/25/2012 3:20PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
22920.000000	43.80	46.37	-42.8	47.3	63.5	16.2	1.30	190	AVERAGE	Low ch; QPSK
22919.990000	43.71	46.37	-42.8	47.2	63.5	16.3	1.40	190	AVERAGE	Low ch; 16QAM
22920.000000	43.68	46.37	-42.8	47.2	63.5	16.3	1.40	190	AVERAGE	Low ch; 64QAM
22919.990000	55.67	46.37	-42.8	59.2	83.5	24.4	1.40	190	MAX PEAK	Low ch; 16QAM
22920.000000	55.40	46.37	-42.8	58.9	83.5	24.6	1.30	190	MAX PEAK	Low ch; QPSK
22920.000000	55.27	46.37	-42.8	58.8	83.5	24.7	1.40	190	MAX PEAK	Low ch; 64QAM

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F; 47% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: OFDM 10 & 20 MHz channel bandwidths; FSK (with dual patch & omni antennas); Low, Mid, and High channels
Date: 05-29-2012


TEXT: "Horz 1 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 1 Meters with HORIZONTAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

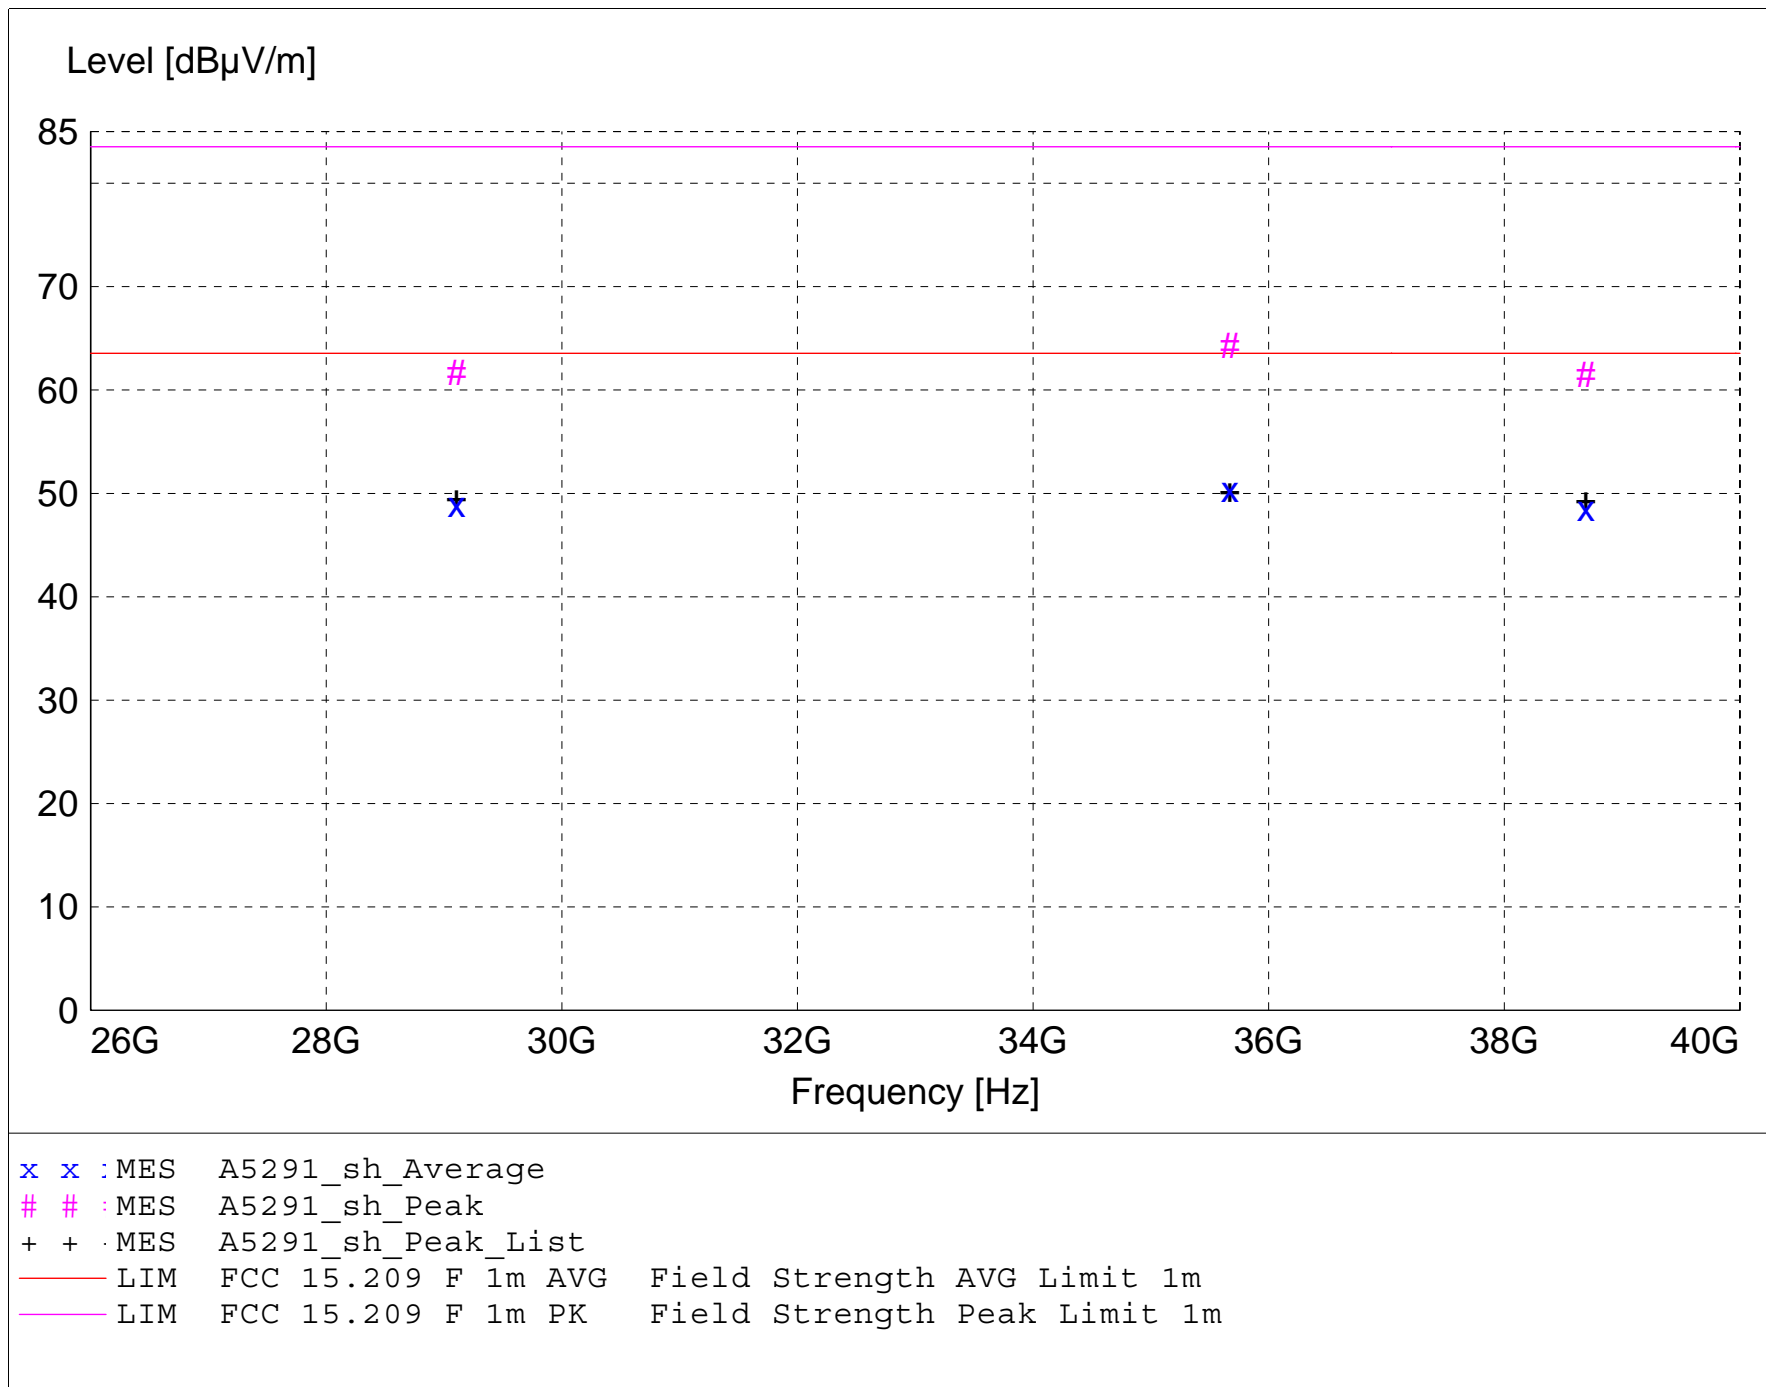

MEASUREMENT RESULT: "A5291_sh_Final"

5/29/2012 8:42AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBµV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBµV/m	dB	dBµV/m	dBµV/m	dB	m	deg		
35671.200000	48.57	48.46	-46.6	50.4	63.5	13.1	1.30	225	AVERAGE	noise floor
29106.600000	50.73	46.64	-48.4	48.9	63.5	14.6	1.30	180	AVERAGE	noise floor
38693.600000	49.24	45.35	-46.0	48.6	63.5	15.0	1.30	180	AVERAGE	noise floor
35671.200000	62.45	48.46	-46.6	64.3	83.5	19.2	1.30	225	MAX PEAK	noise floor
29106.600000	63.52	46.64	-48.4	61.7	83.5	21.8	1.30	180	MAX PEAK	noise floor
38693.600000	62.18	45.35	-46.0	61.5	83.5	22.0	1.30	180	MAX PEAK	noise floor

FCC Part 15.205/15.209 Spurious Emissions in Restricted Bands

Electric Field Strength

EUT: PMP450AP 5.7 GHz MIMO/COMBO
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F; 47% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B
Test Specification: Continuous transmit; Power setting 19; Both channel A and B turned ON
Comment: OFDM 10 & 20 MHz channel bandwidths; FSK (with dual patch & omni antennas); Low, Mid, and High channels
Date: 05-29-2012


TEXT: "Vert 1 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 1 Meters with VERTICAL Antenna Polarization

Equations:
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

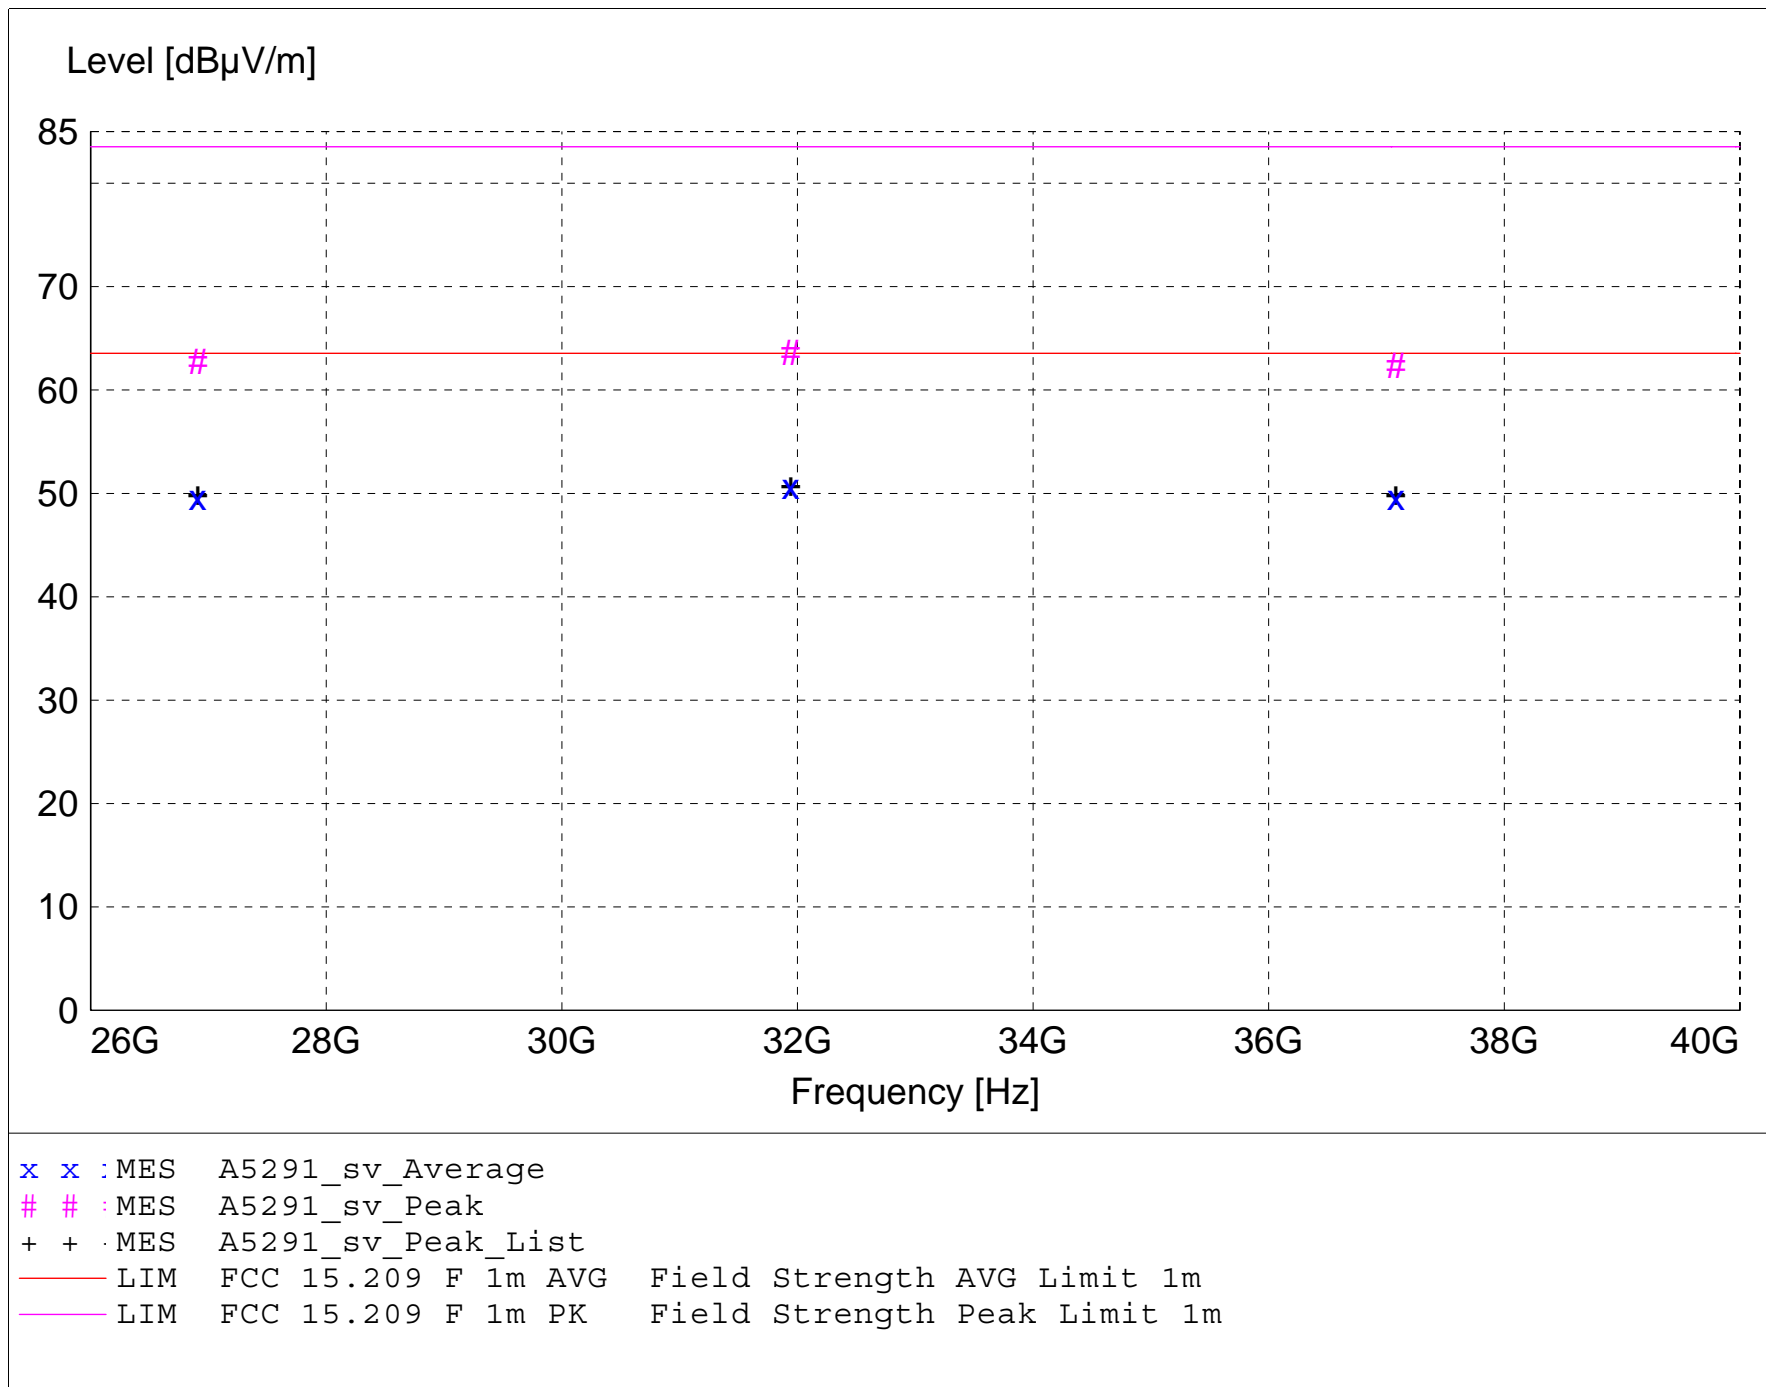

MEASUREMENT RESULT: "A5291_sv_Final"

5/29/2012 9:19AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level			Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m	dB	m	deg		
31941.400000	51.56	48.04	-49.0	50.6	63.5	12.9	1.30	200	AVERAGE	noise floor
37081.200000	50.07	45.94	-46.4	49.6	63.5	13.9	1.30	225	AVERAGE	noise floor
26909.800000	52.09	46.30	-48.8	49.6	63.5	14.0	1.30	315	AVERAGE	noise floor
31941.400000	64.58	48.04	-49.0	63.7	83.5	19.9	1.30	200	MAX PEAK	noise floor
26909.800000	65.24	46.30	-48.8	62.7	83.5	20.8	1.30	315	MAX PEAK	noise floor
37081.200000	62.85	45.94	-46.4	62.4	83.5	21.1	1.30	225	MAX PEAK	noise floor



Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A7.0 Maximum Unwanted Emission Levels – Conducted Band-Edge

Rule Section: Section 15.247(d)
RSS-210 A8.5

Test Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 5.4.1.1 – Reference Level
Section 5.4.1.2 – Unwanted Emissions

Description: RBW = 100 kHz
VBW \geq 300 kHz
Span = 5-30% greater than the EBW – (Reference Level)
Span = spectrum to be examined – (Unwanted Emissions)
Detector = peak
Sweep = auto couple
Trace mode = max hold

Measurements were taken for QPSK, 16-QAM, and 64-QAM modulation types, and at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously (power setting 19 dBm) with 98% duty cycle.

Limit: 30 dB below maximum in-band average PSD level (maximum level in any 100 kHz band). Average output power procedure was used to measure the fundamental emission power.


Results: Passed

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

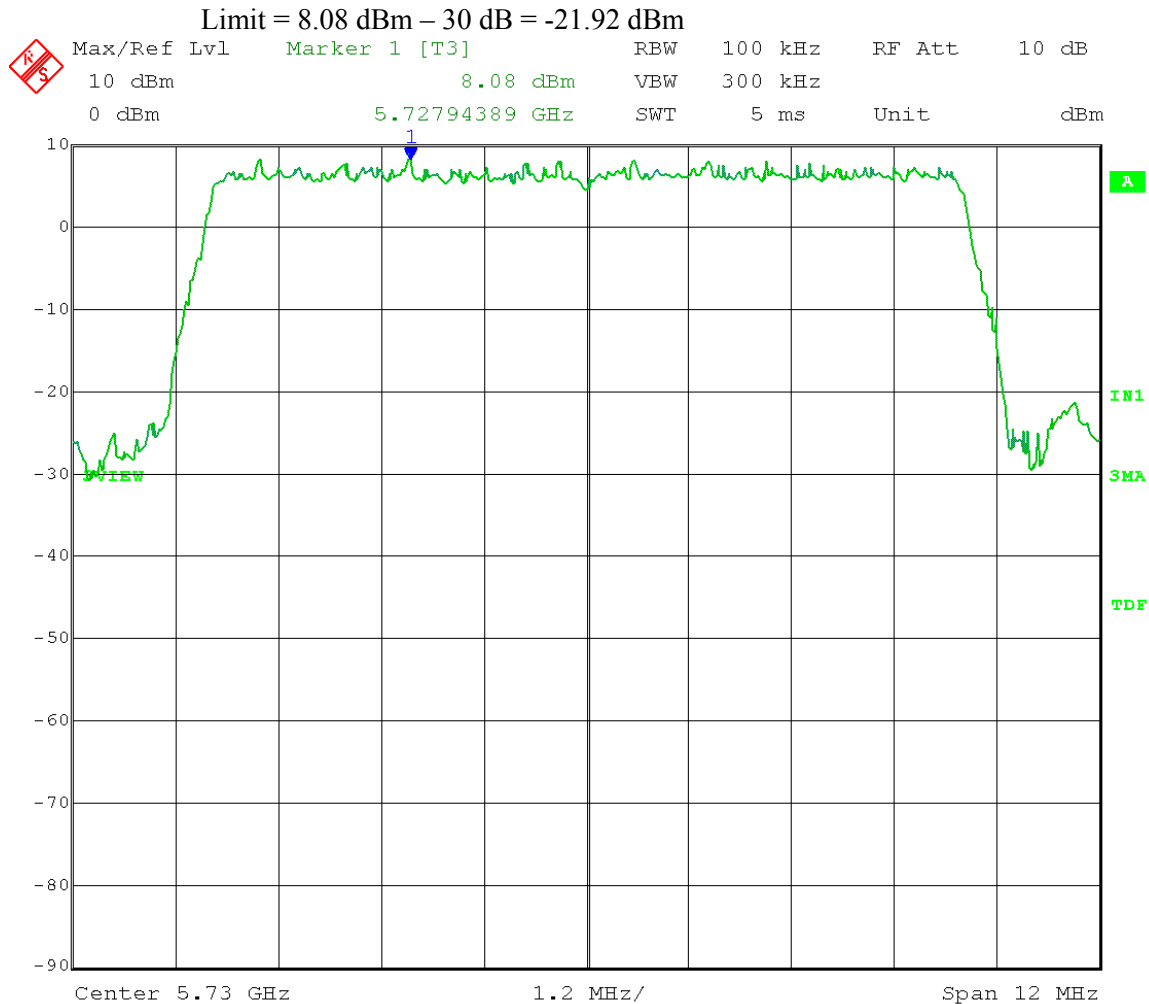

Date: 16.MAY.2012 13:36:48


Test Date: 05-16-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 16QAM

Band-edge frequency: 5.725 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

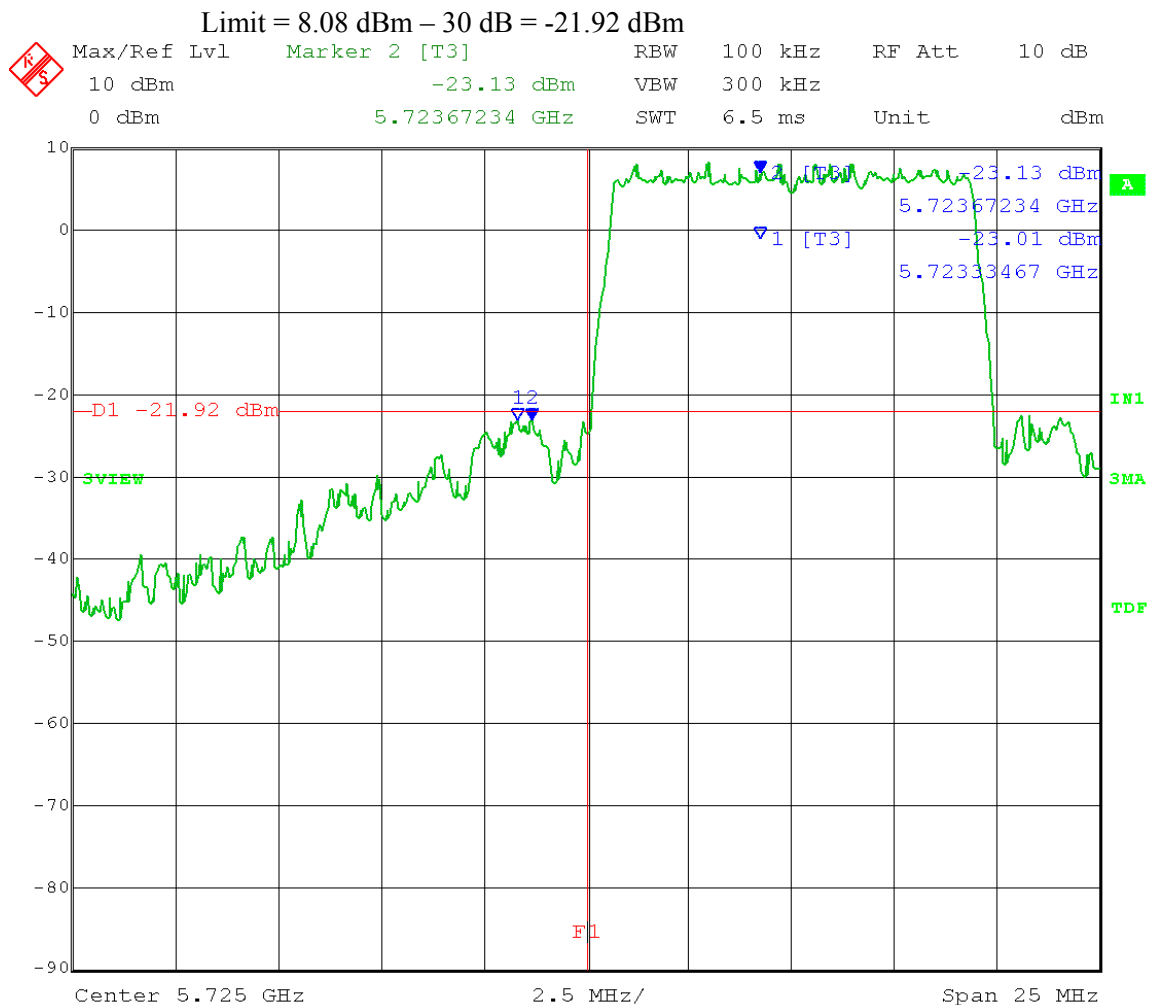


Date: 16.MAY.2012 13:40:10

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

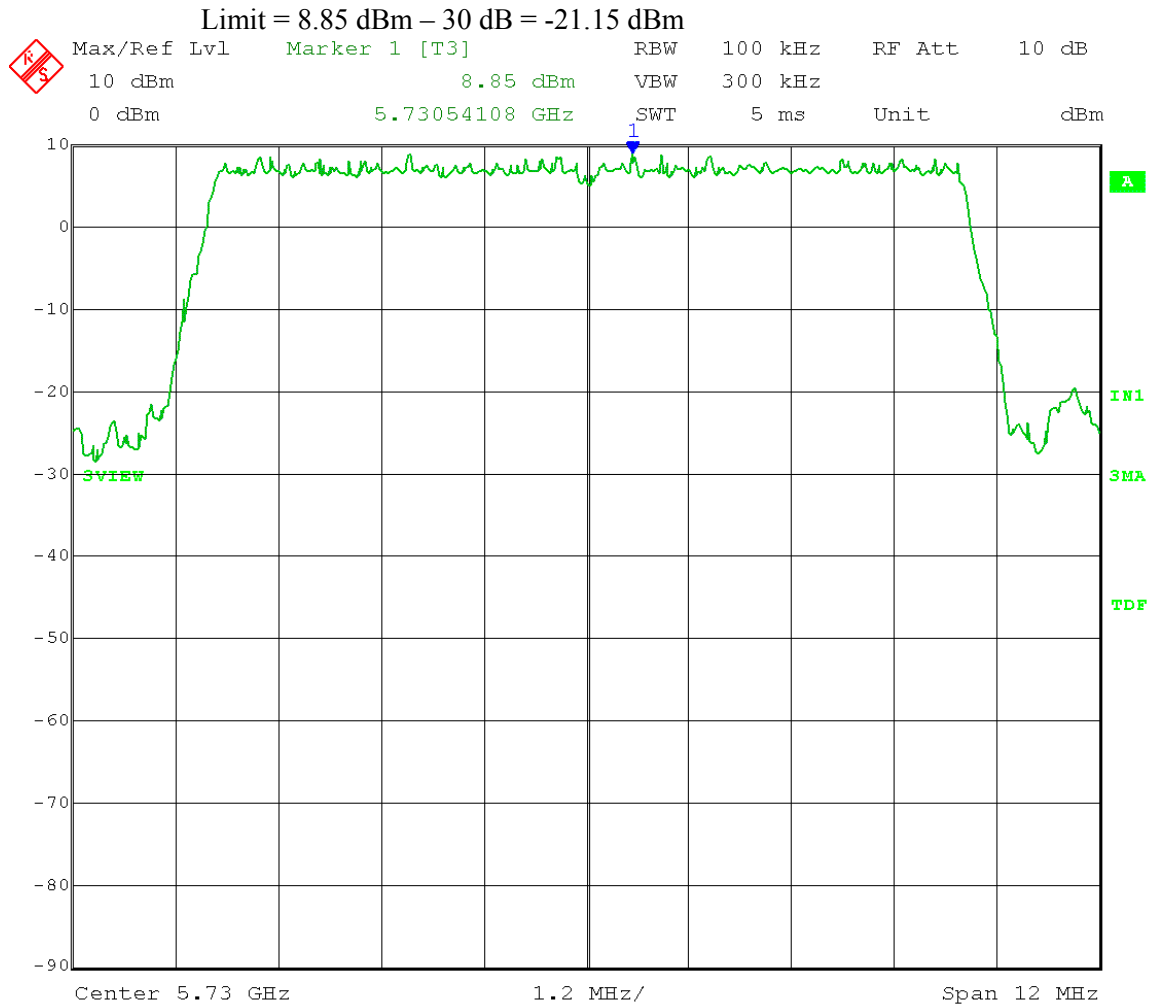

Date: 17.MAY.2012 08:26:36


Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
 Output port: Channel A; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Band-edge frequency: 5.725 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

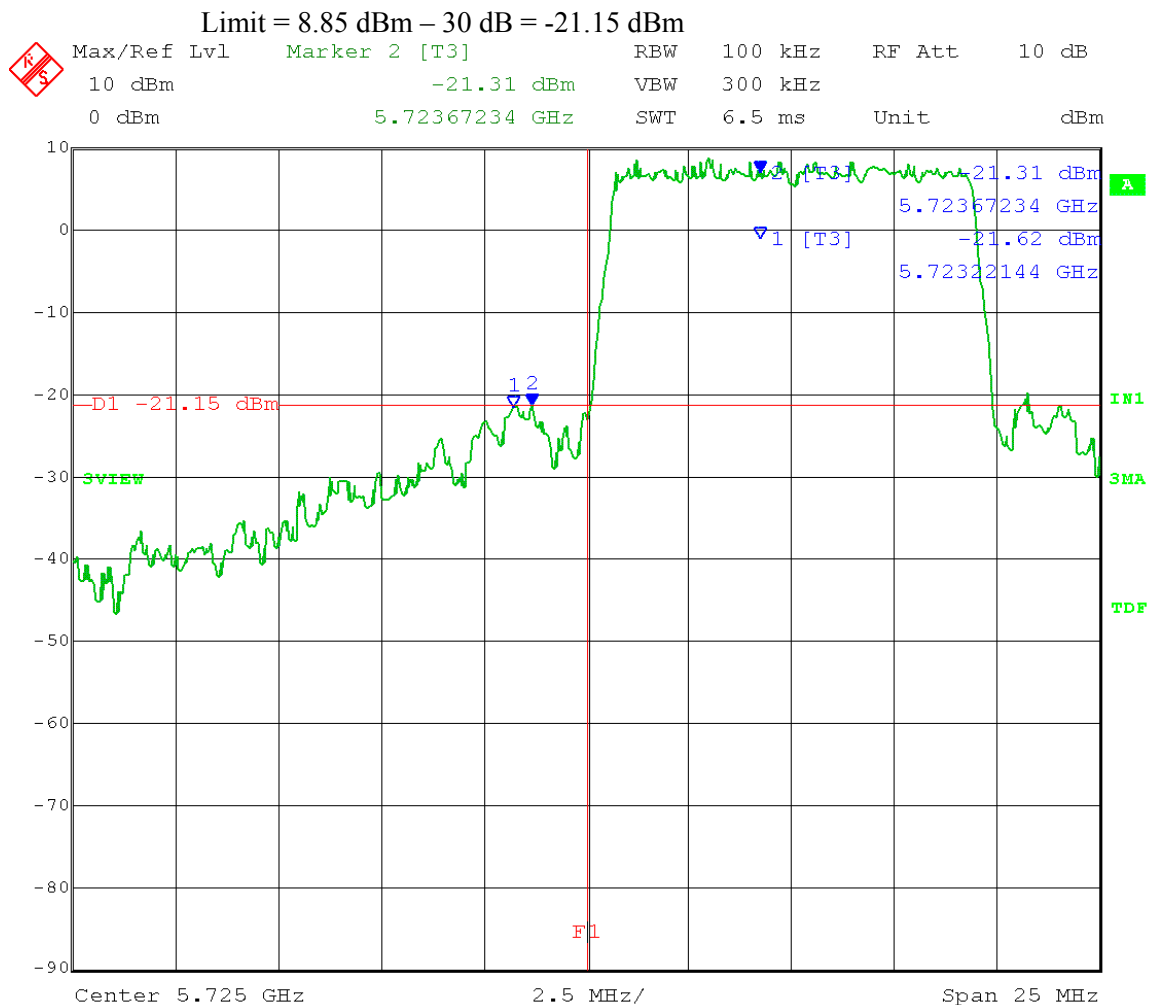


Date: 17.MAY.2012 08:31:28

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

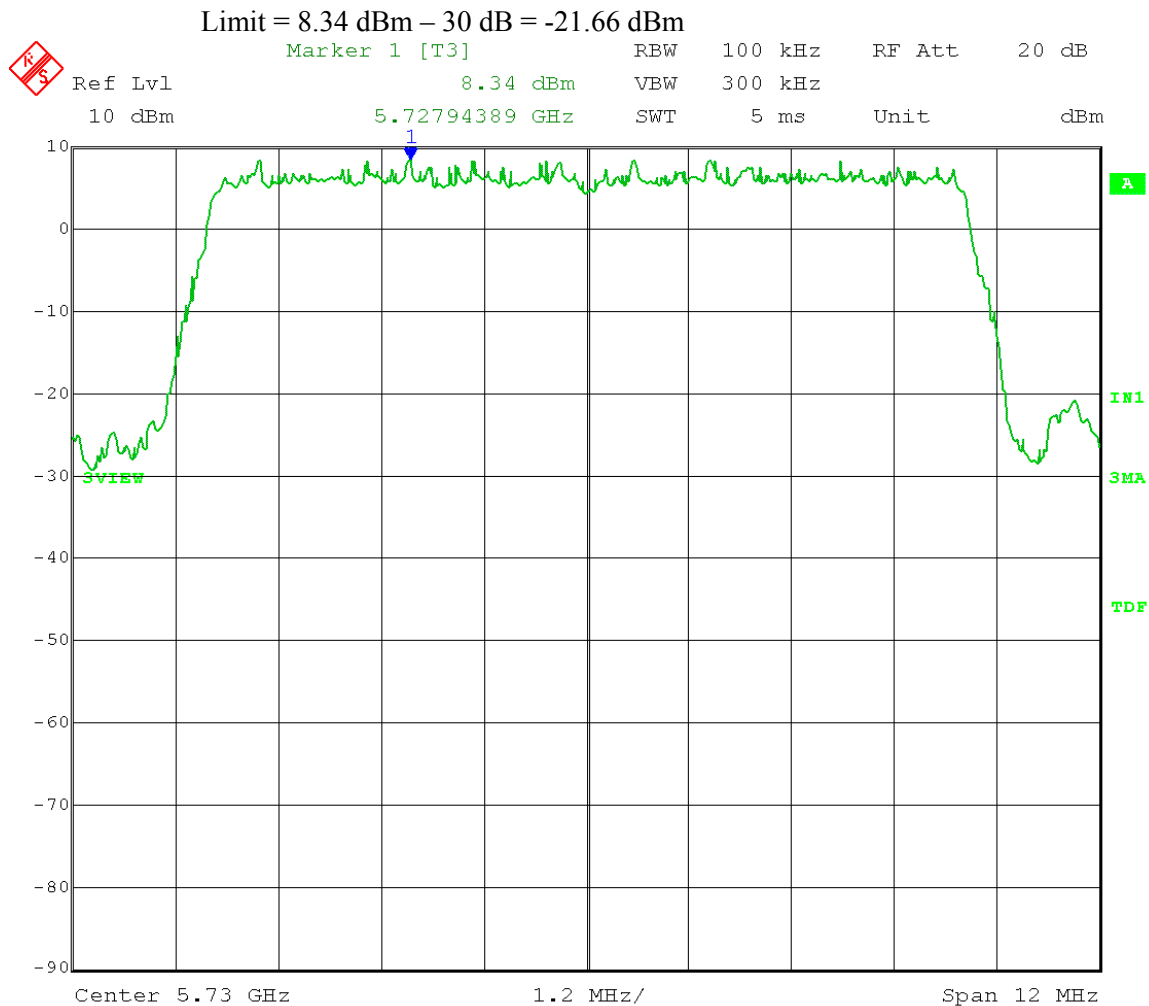

Date: 16.MAY.2012 10:28:55




Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

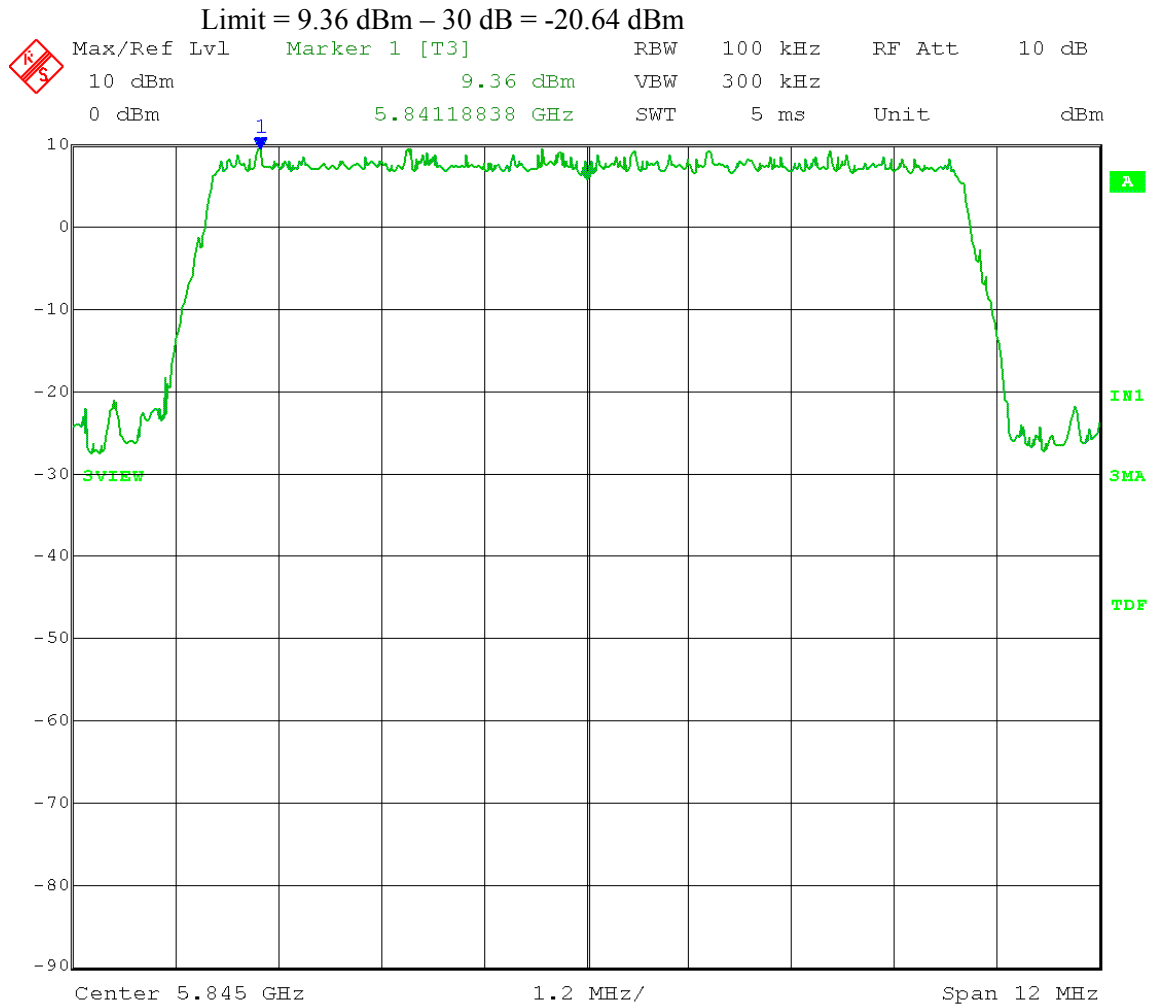

Date: 16.MAY.2012 14:09:33


Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7320
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Band-edge frequency: 5.850 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

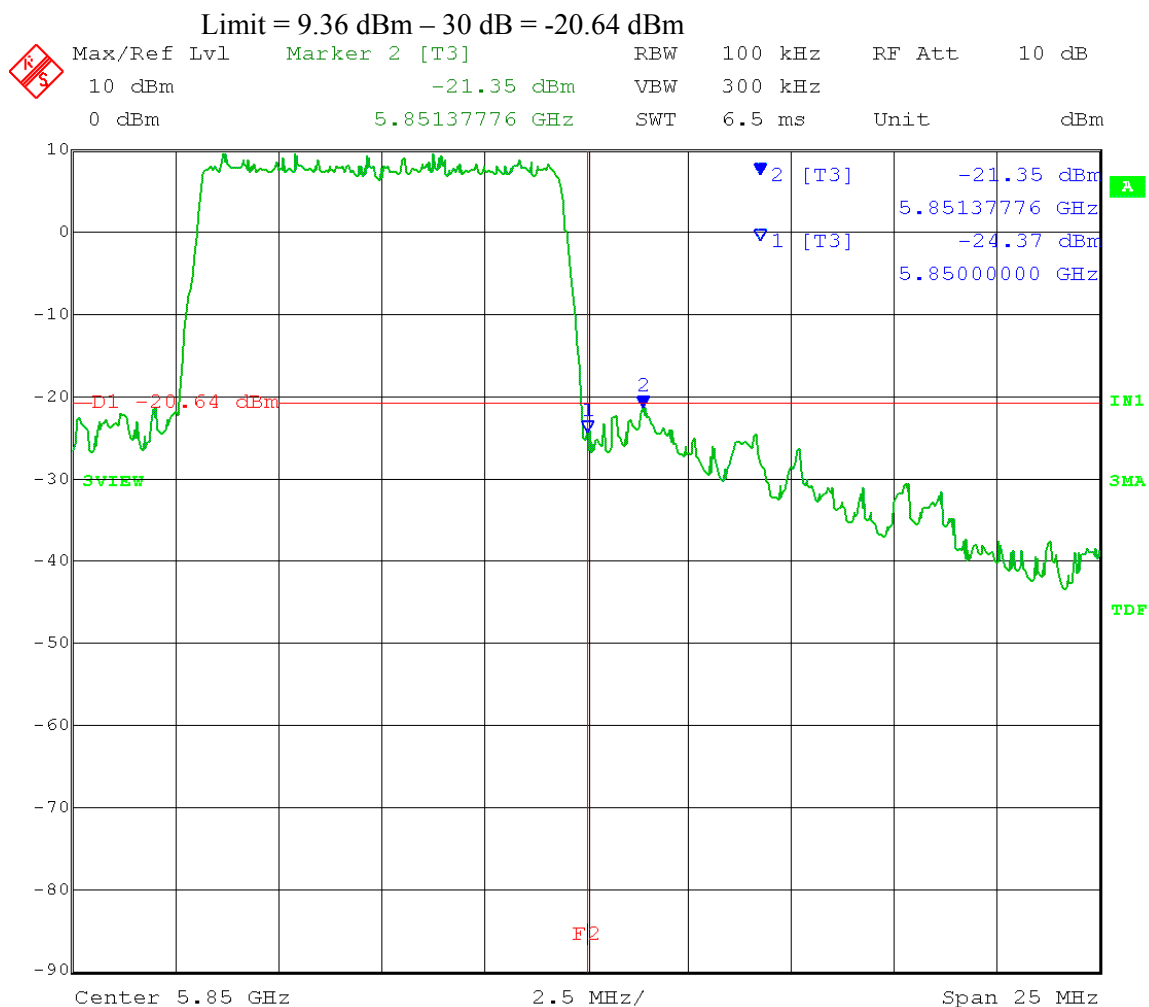


Date: 16.MAY.2012 14:14:34

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7324
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

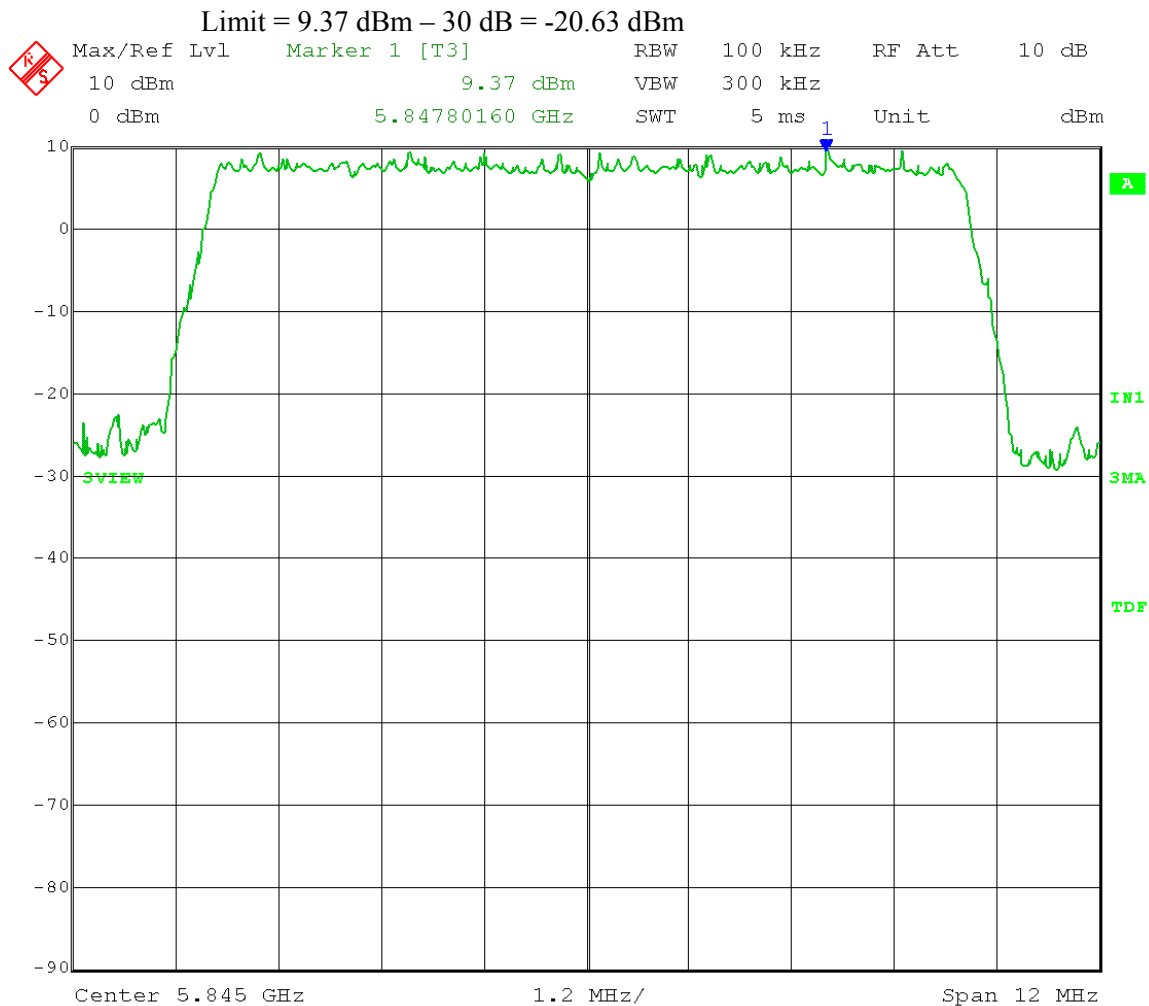

Date: 17.MAY.2012 09:24:10


Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Band-edge frequency: 5.850 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

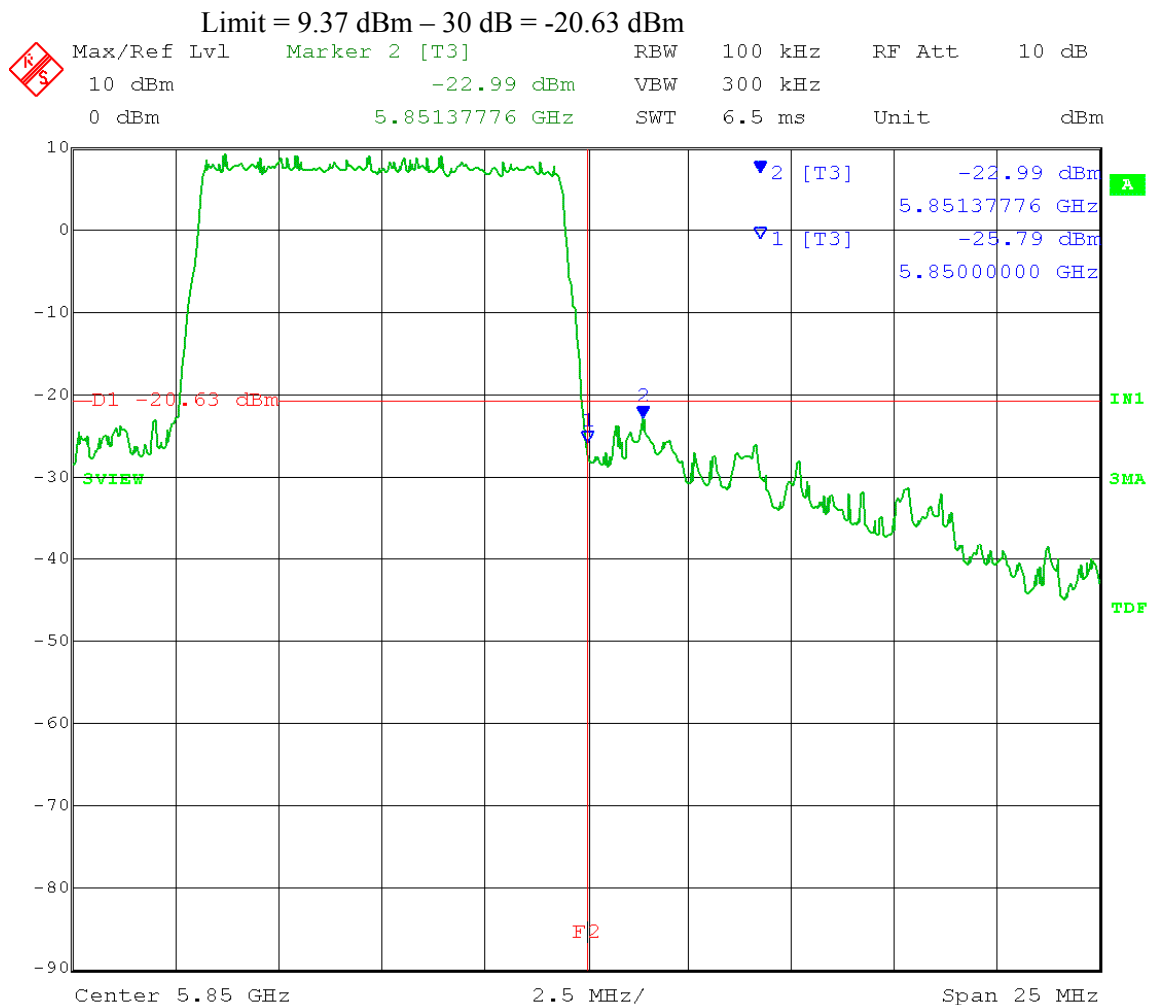


Date: 17.MAY.2012 09:27:32

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7327
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

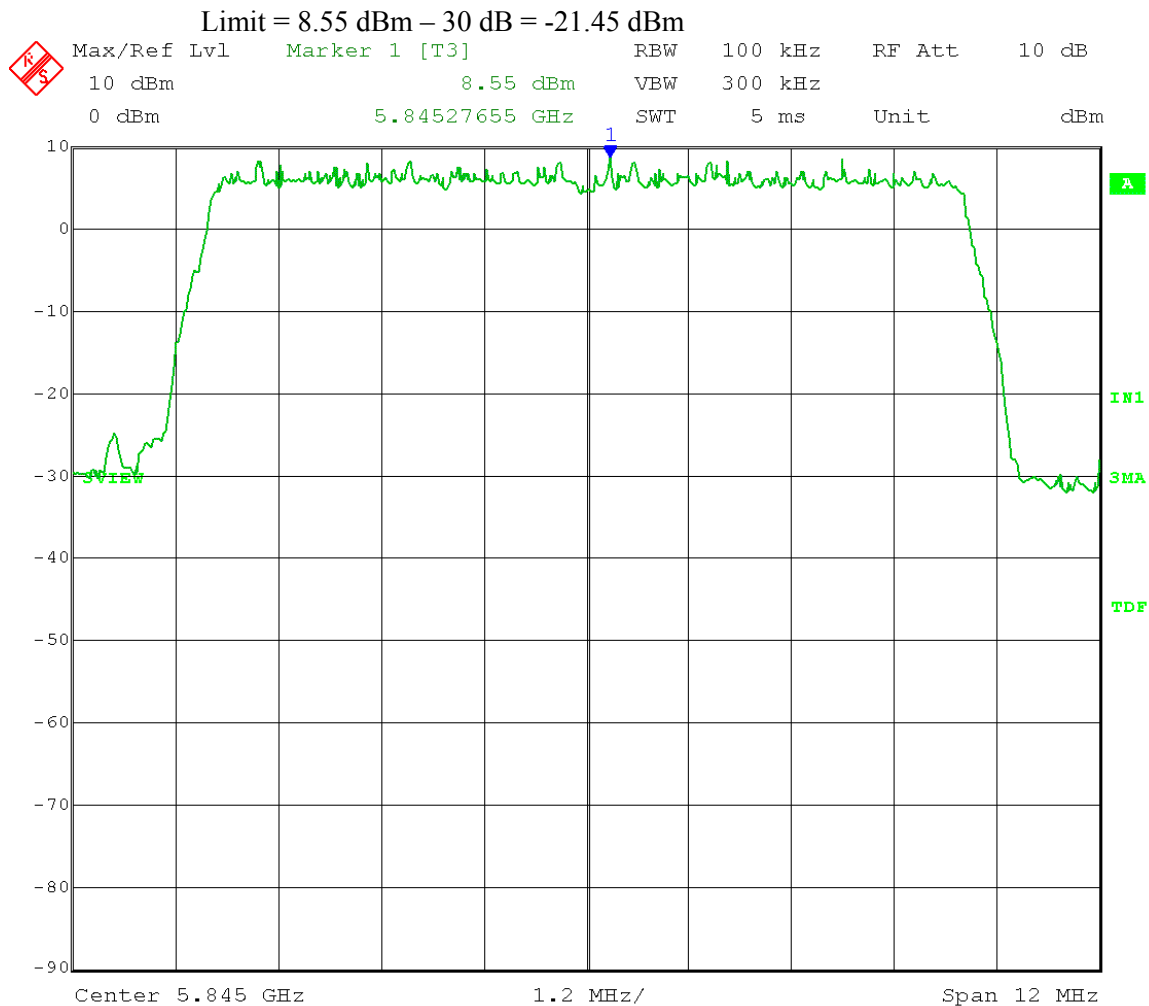

Date: 16.MAY.2012 11:26:38


Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel A; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Band-edge frequency: 5.850 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

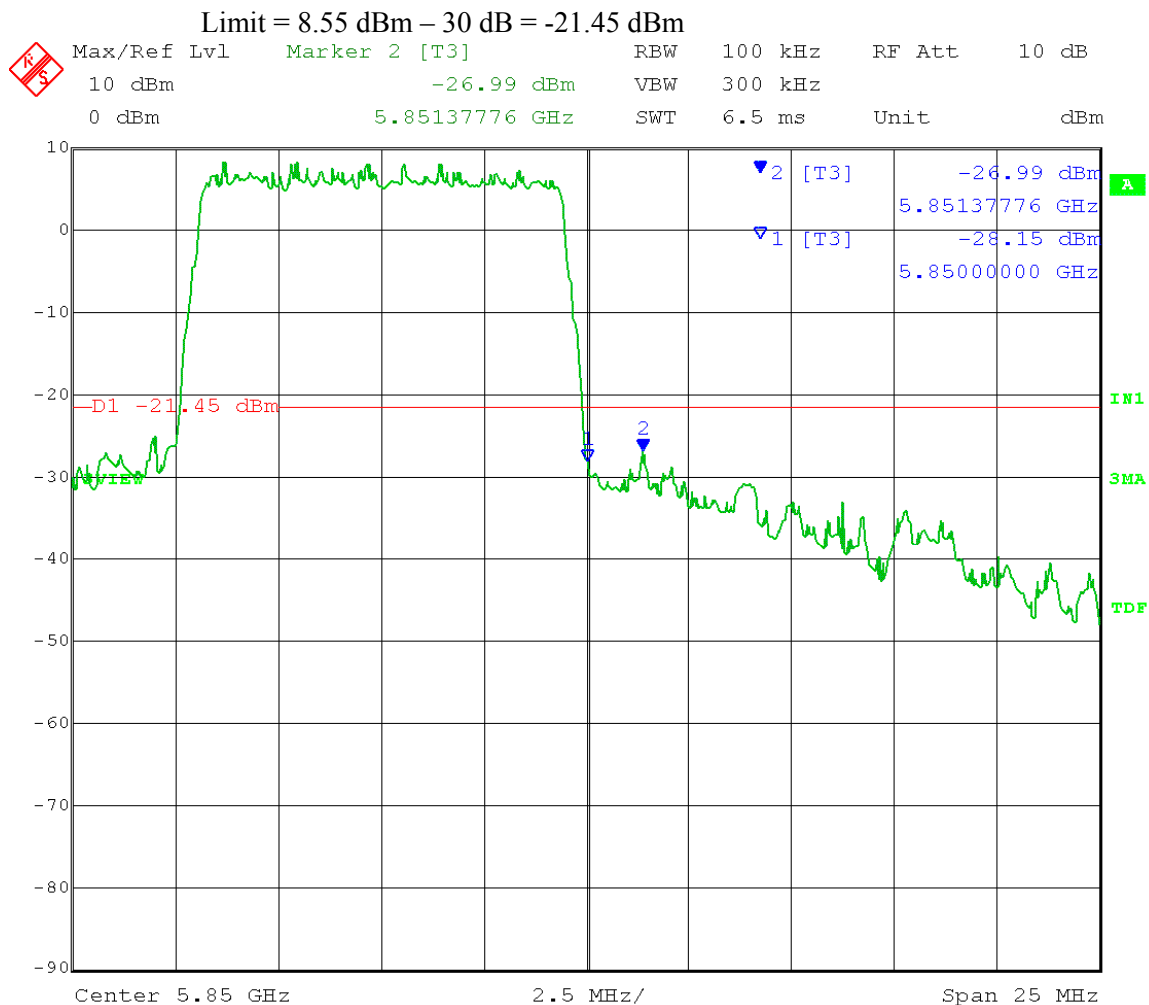


Date: 16.MAY.2012 11:32:49

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

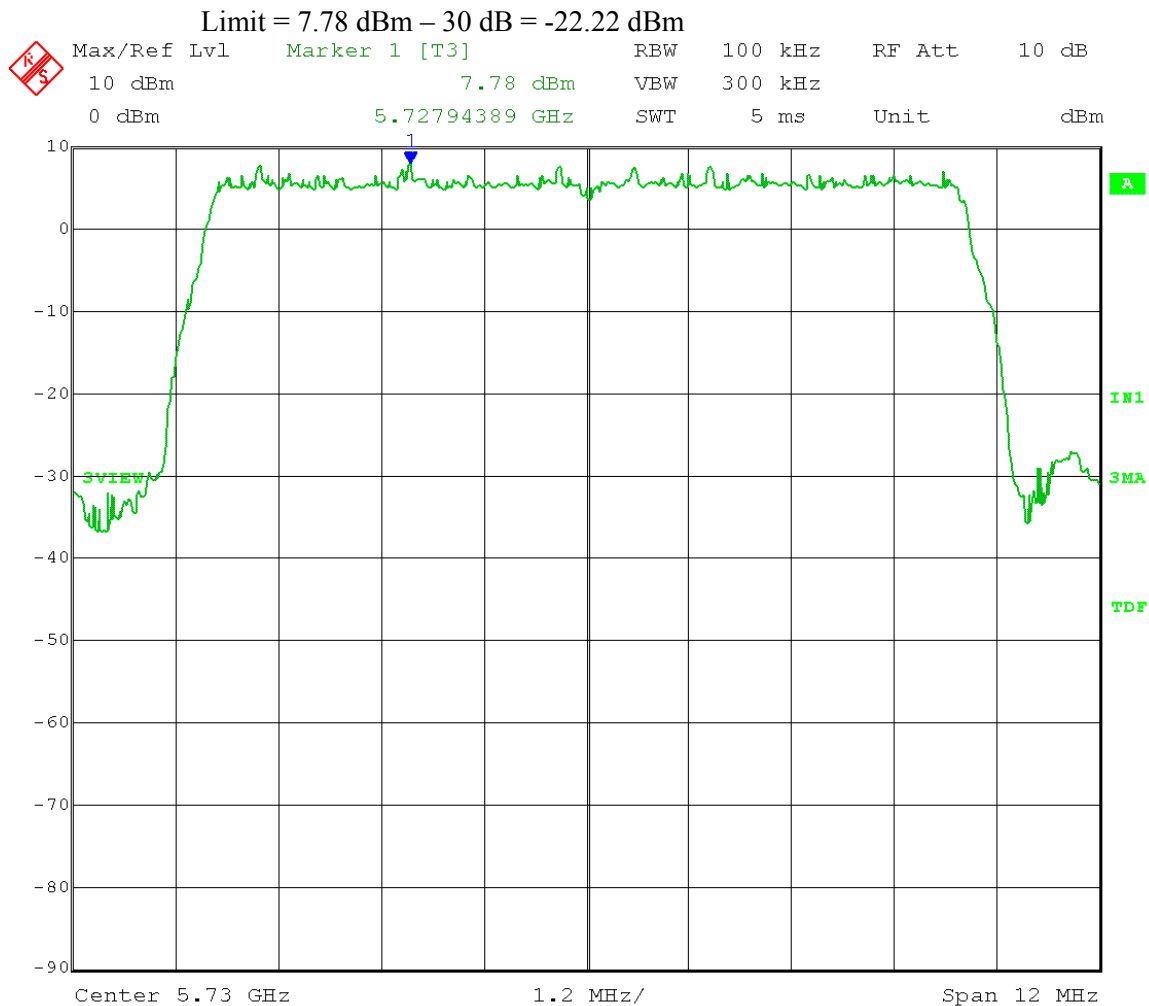

Date: 17.MAY.2012 11:10:06


Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 16QAM

Band-edge frequency: 5.725 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

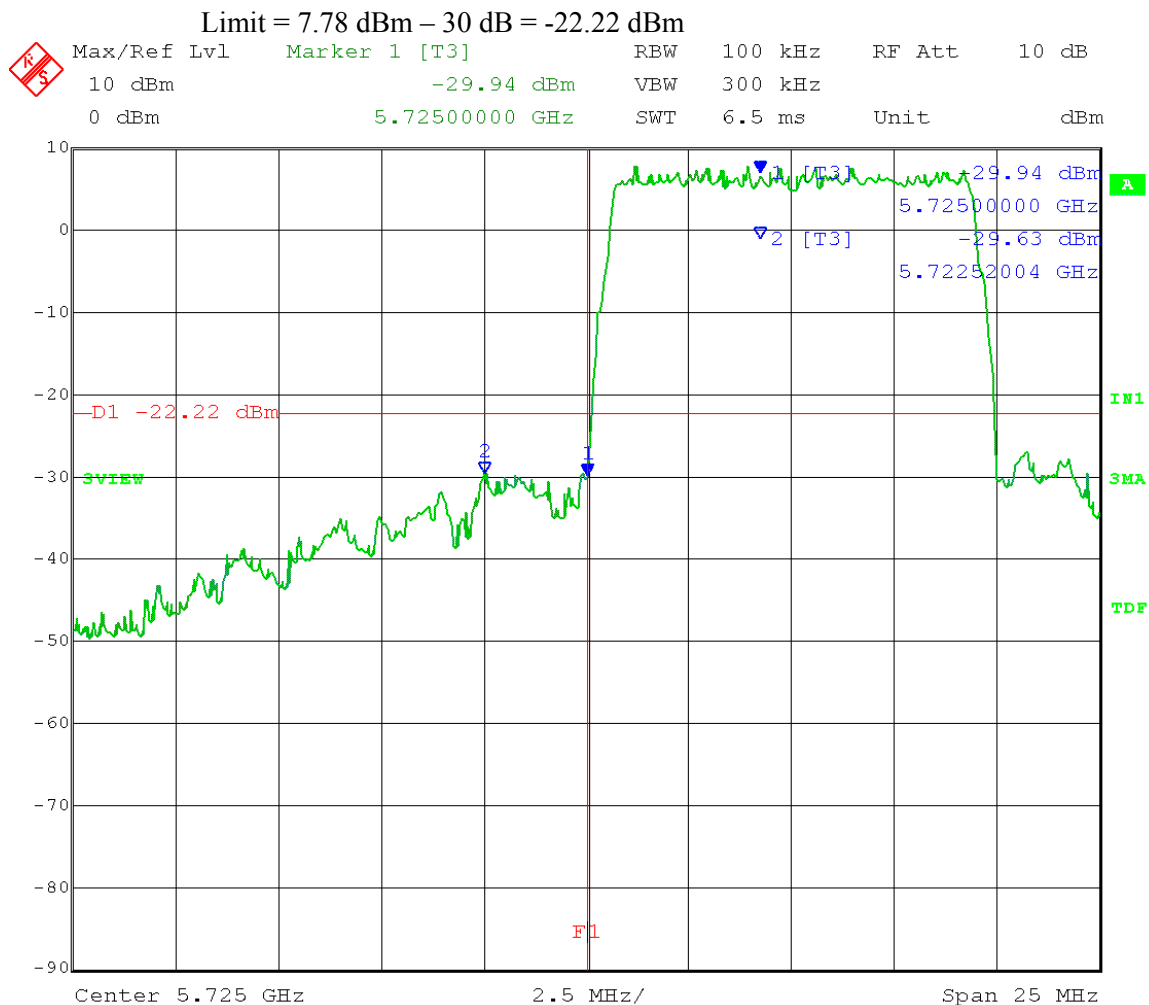


Date: 17.MAY.2012 11:13:29

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; Low Channel Frequency: 5.730 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

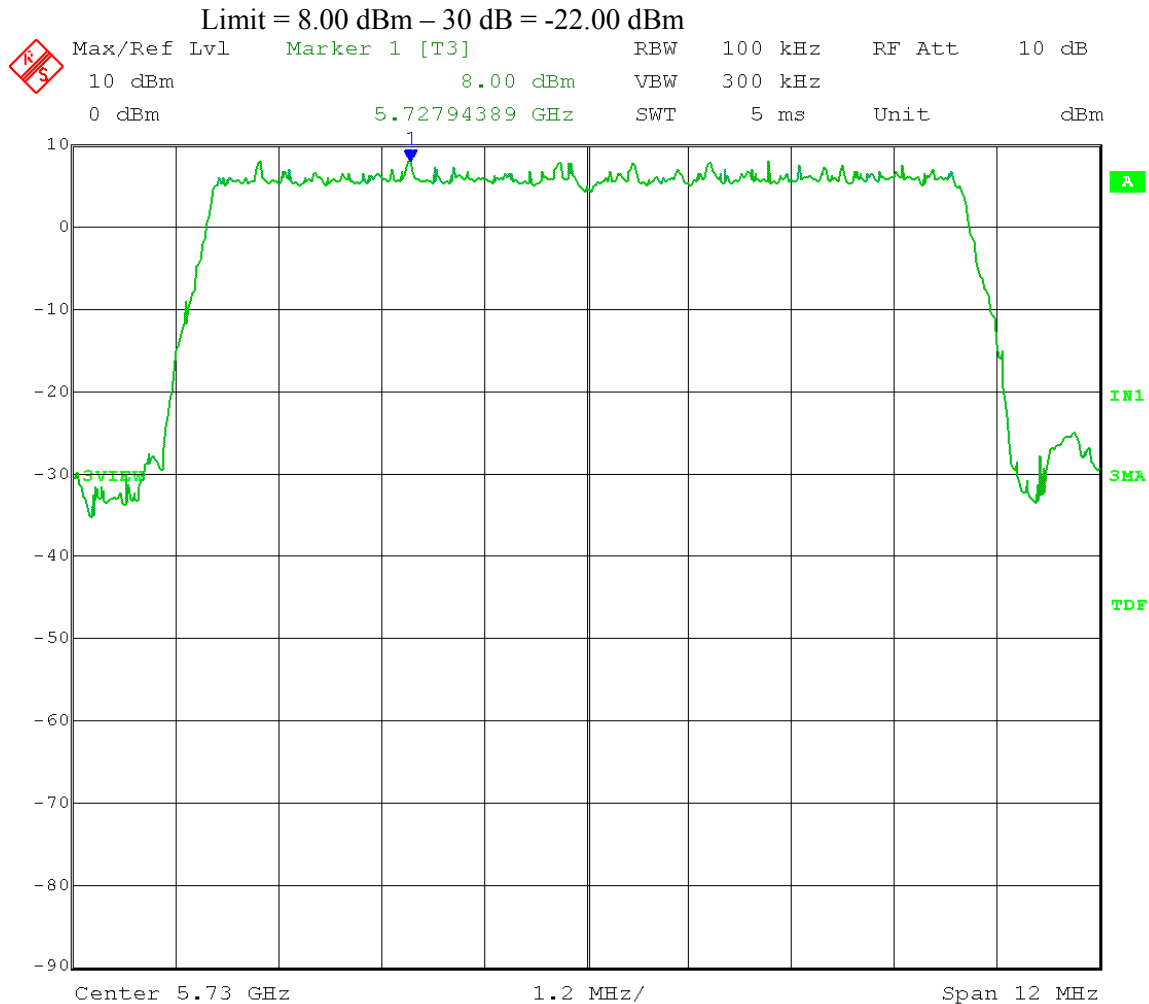

Date: 17.MAY.2012 13:45:48


Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: 64QAM

Band-edge frequency: 5.725 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

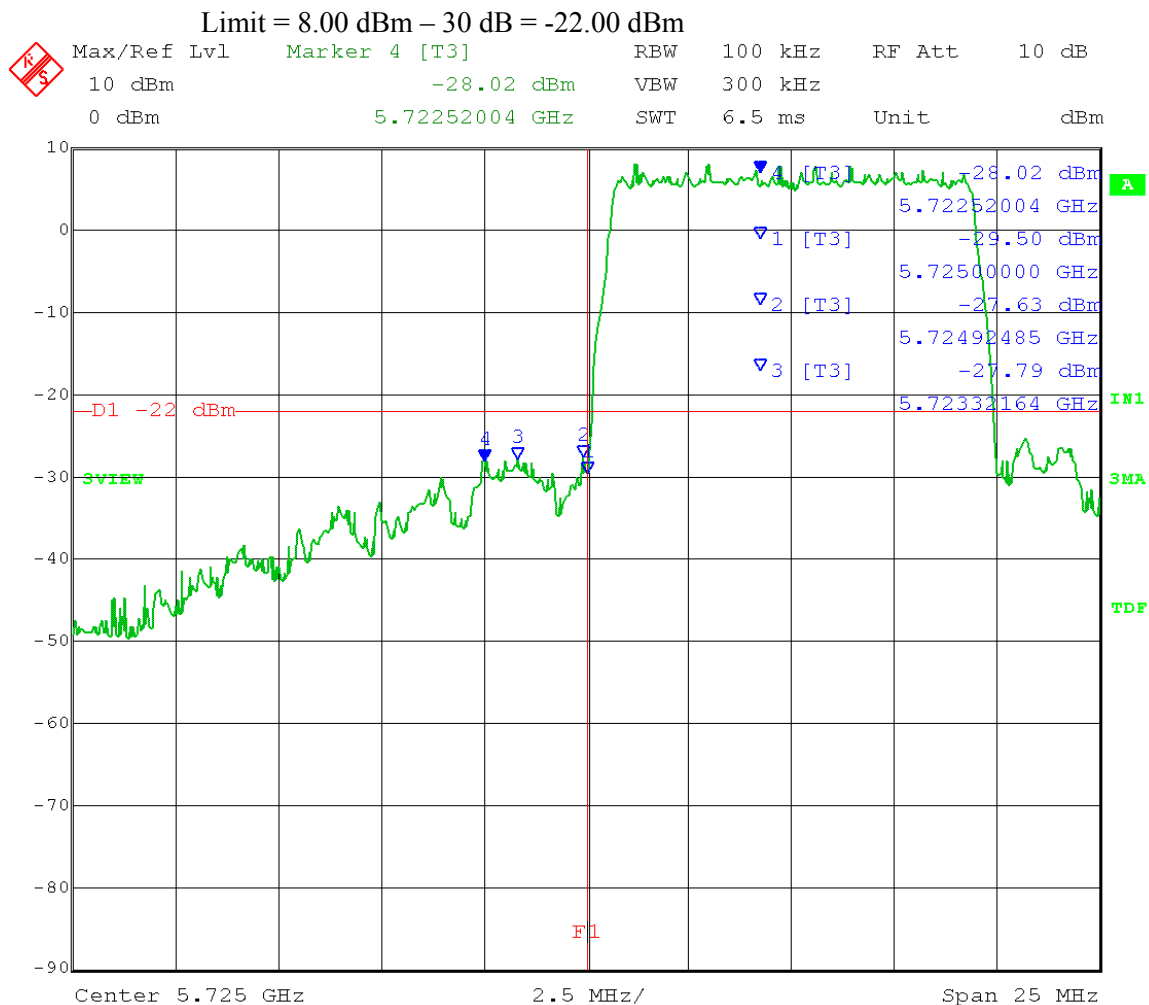


Date: 17.MAY.2012 13:49:17

Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.1 – **Reference Level**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = 5-30% greater than EBW; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

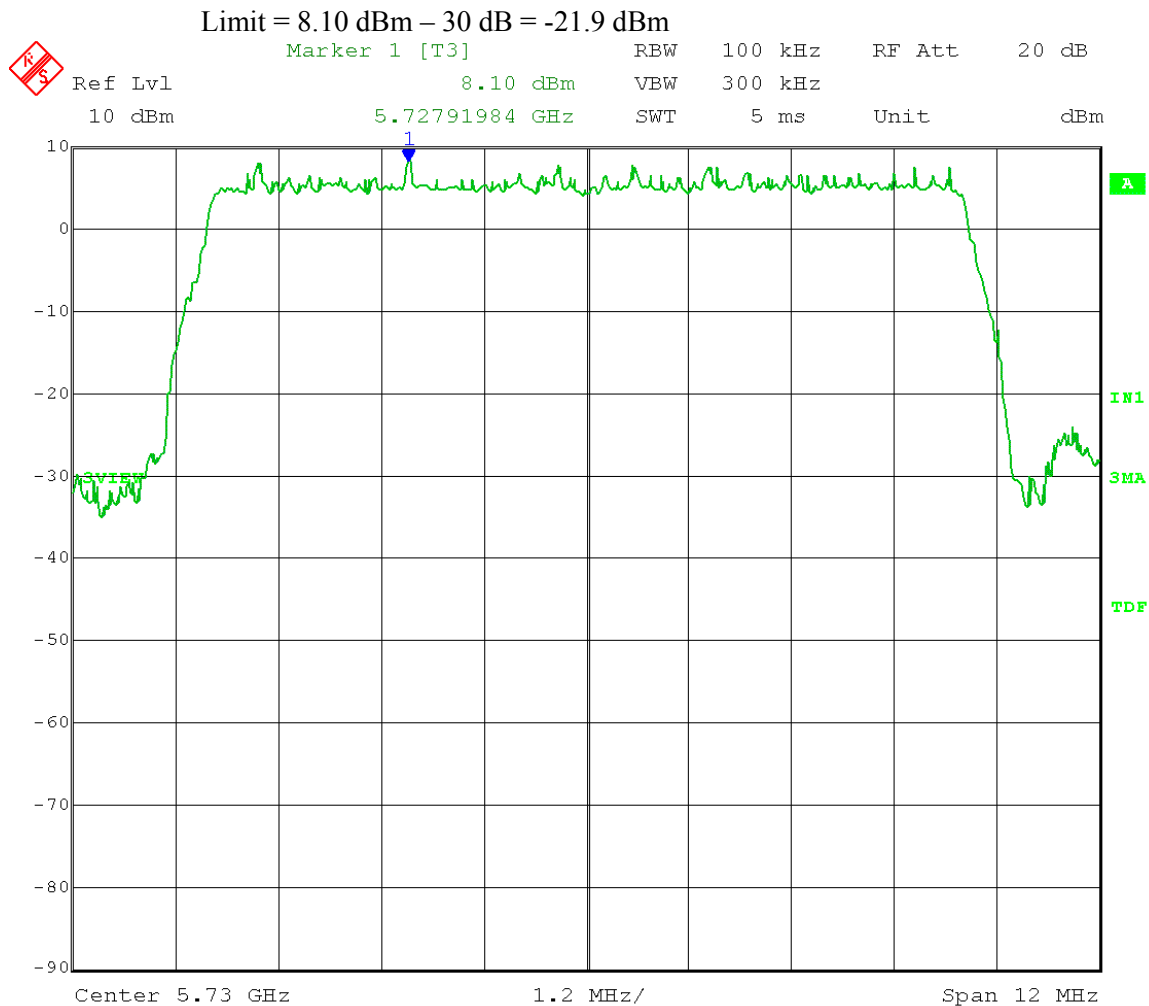

Date: 15.MAY.2012 14:19:15


Test Date: 05-15-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; Low Channel Frequency: 5.730 GHz
 Output power setting: 19; Modulation Type: QPSK

Band-edge frequency: 5.725 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

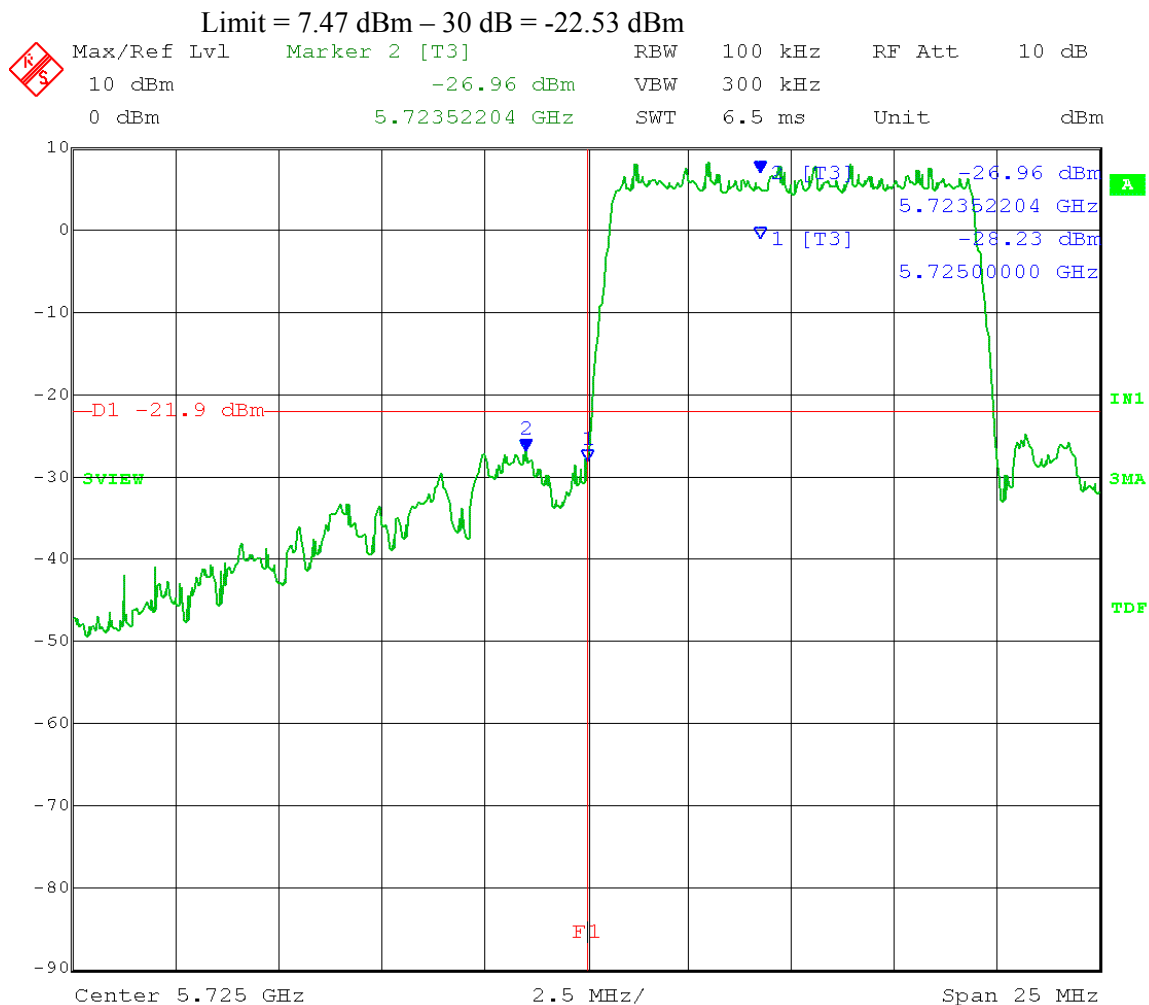


Date: 15.MAY.2012 14:31:13

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 16QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

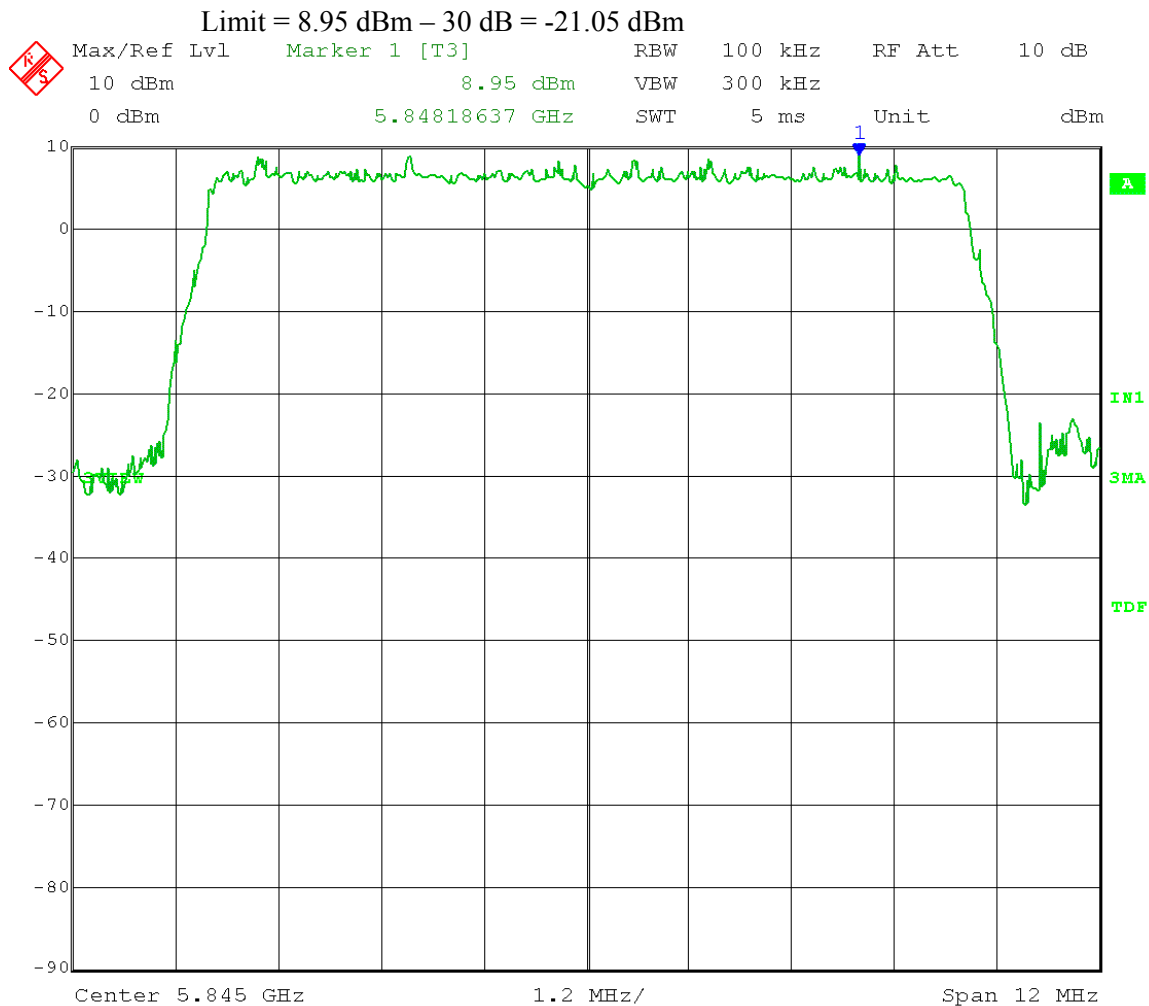

Date: 17.MAY.2012 11:36:52


Test Date: 05-17-2012
 Company: Cambium Networks
 EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
 Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
 Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
 Section 5.4.1.2 – **Unwanted Emissions**
 Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
 Span = spectrum to be examined; Detector = peak;
 Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
 Output port: Channel B; High Channel Frequency: 5.845 GHz
 Output power setting: 19; Modulation Type: 16QAM

Band-edge frequency: 5.850 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

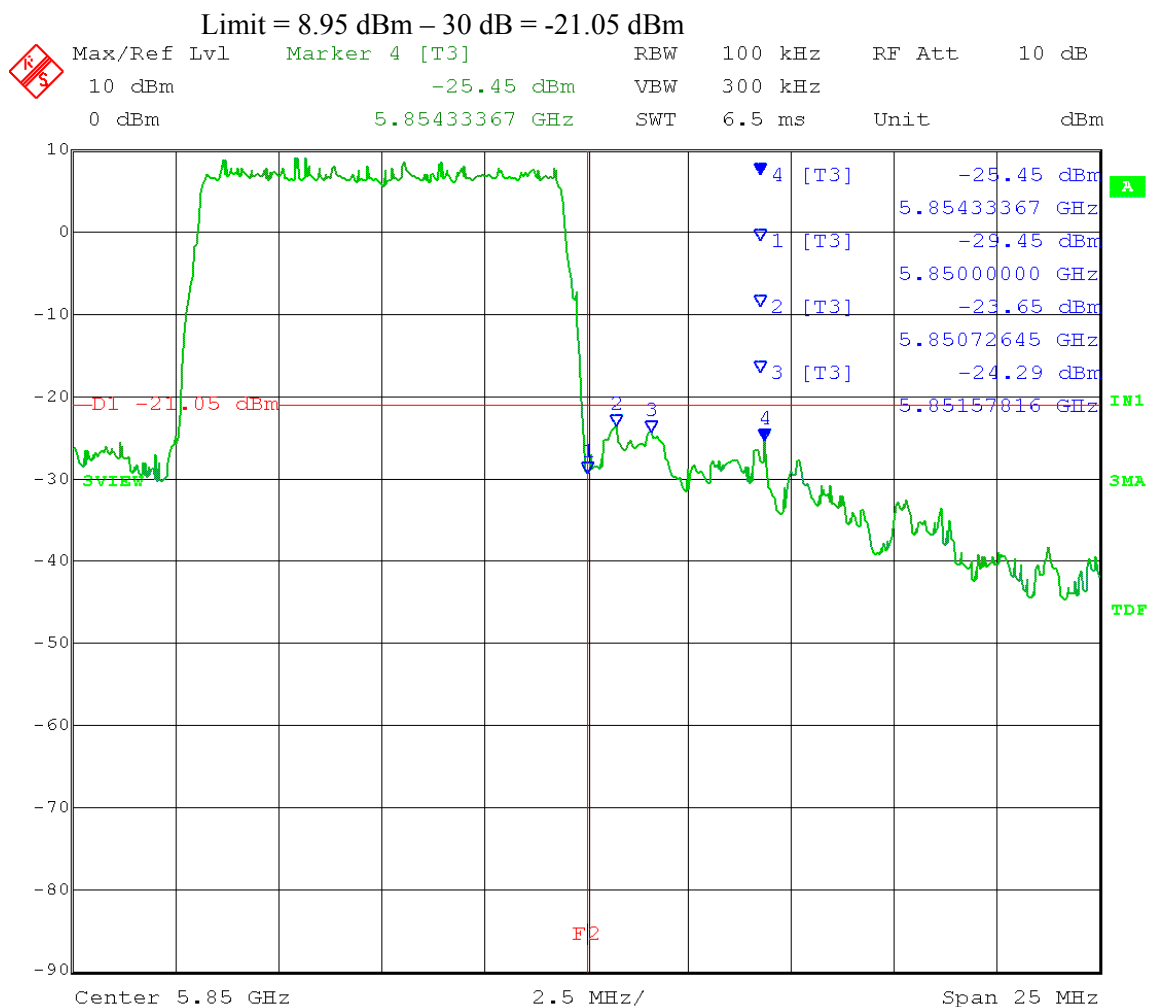


Date: 17.MAY.2012 11:41:15

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz adispiwrite 7525
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

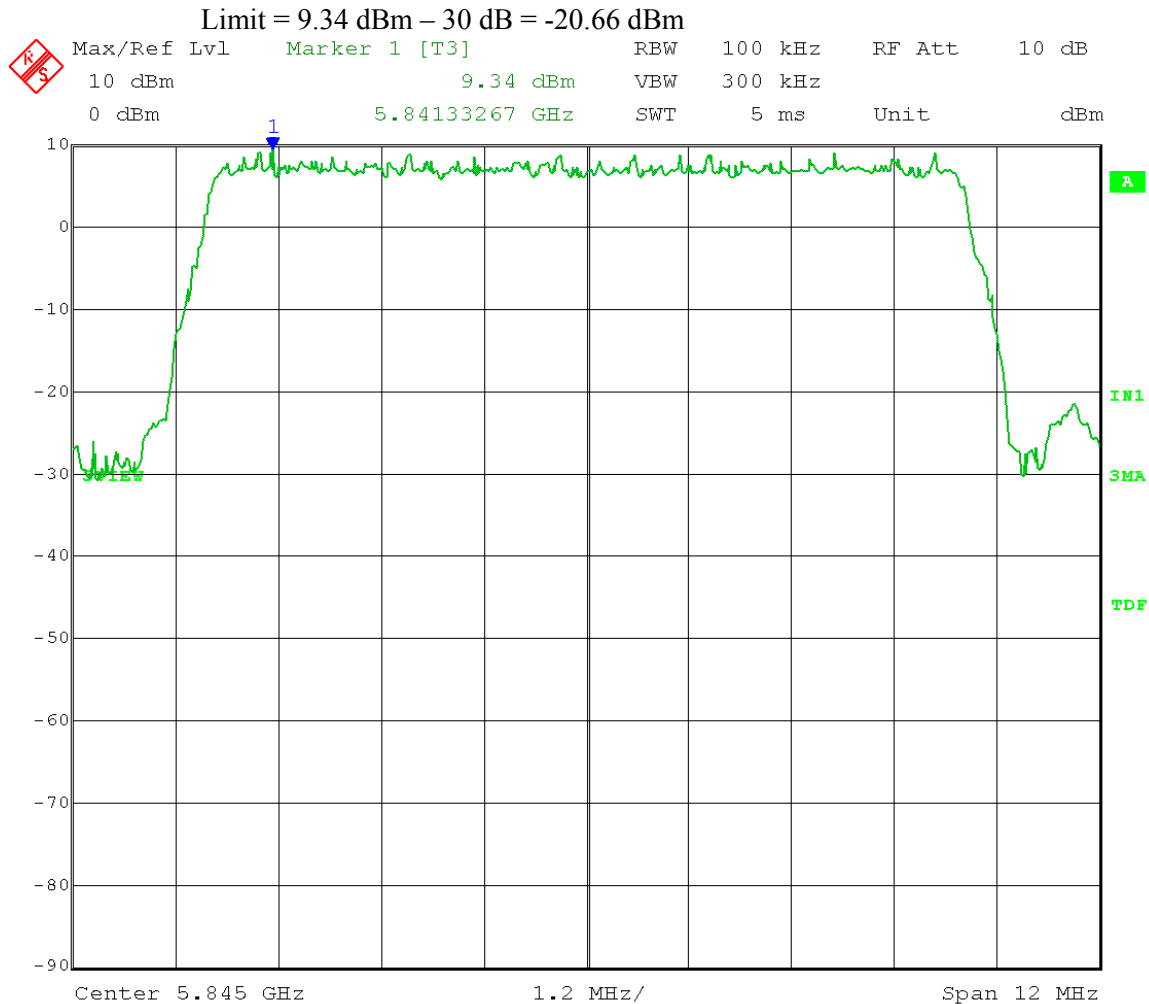


Date: 17.MAY.2012 14:15:51

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: 64QAM

Band-edge frequency: 5.850 GHz
Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

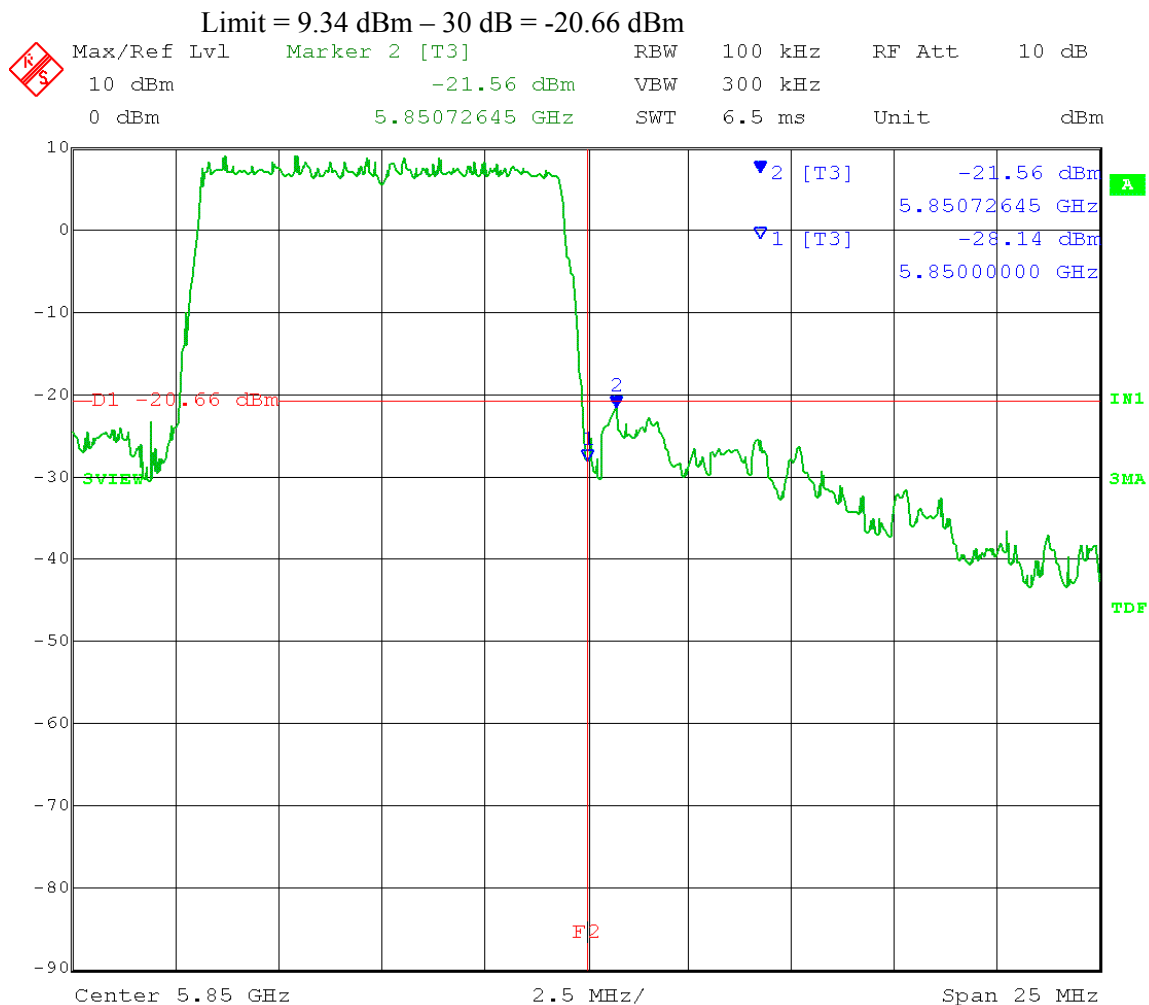


Date: 17.MAY.2012 14:19:12

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.1 – **Reference Level**
Operator: Craig B

RBW = 100 kHz; VBW ≥ 300 kHz
Span = 5-30% greater than EBW; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

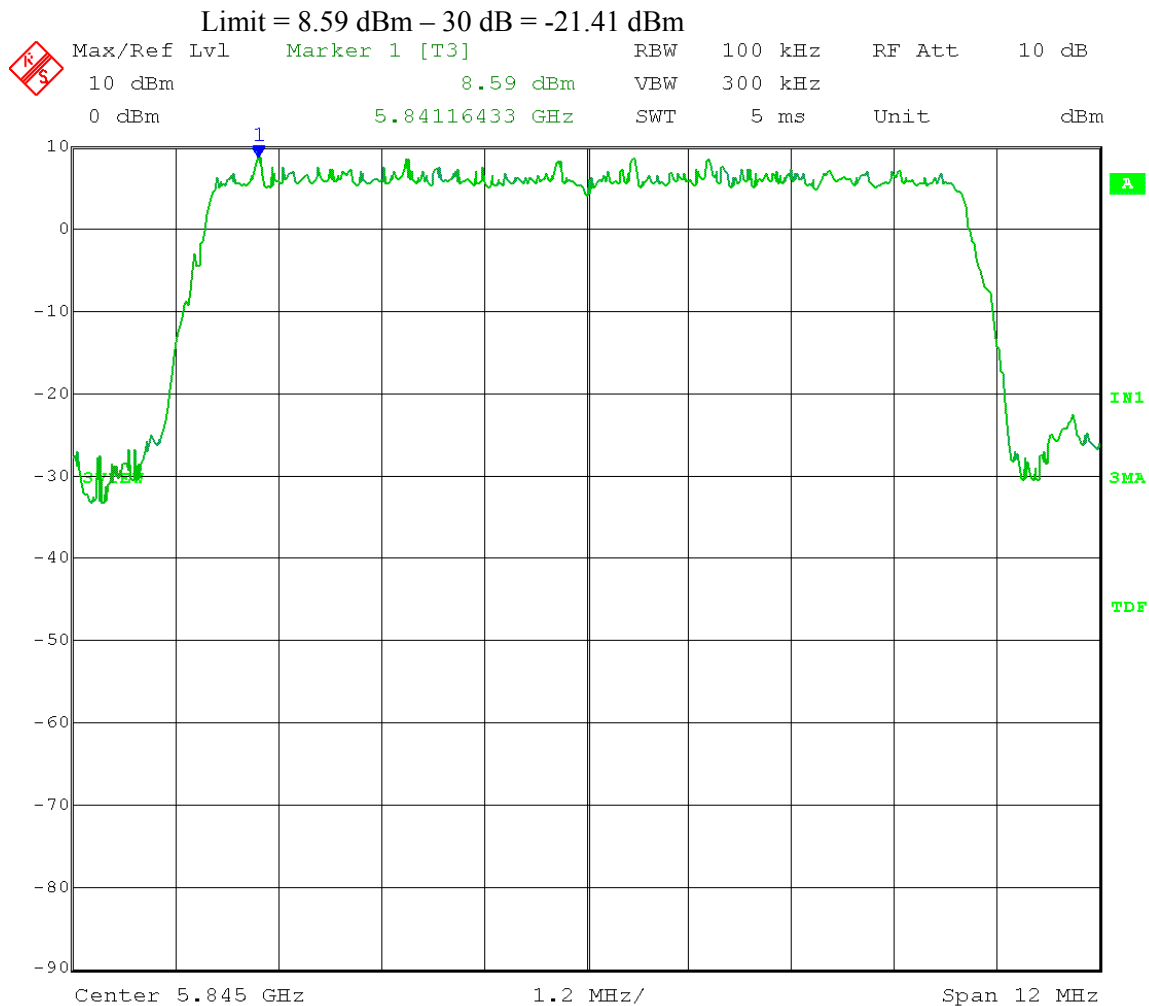

Date: 15.MAY.2012 15:09:30


Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Maximum Unwanted Emission Levels – Conducted Band-Edge
Procedure: FCC KDB 558074 D01 DTS Meas Guidance v01
Section 5.4.1.2 – **Unwanted Emissions**
Operator: Craig B

RBW = 100 kHz; VBW \geq 300 kHz
Span = spectrum to be examined; Detector = peak;
Sweep = auto couple; Trace mode = max hold

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; High Channel Frequency: 5.845 GHz
Output power setting: 19; Modulation Type: QPSK

Band-edge frequency: 5.850 GHz

Limit: [15.247(b)(3)]: 30 dB below maximum in-band average PSD level (Average output power procedure was used to measure the fundamental emission power)

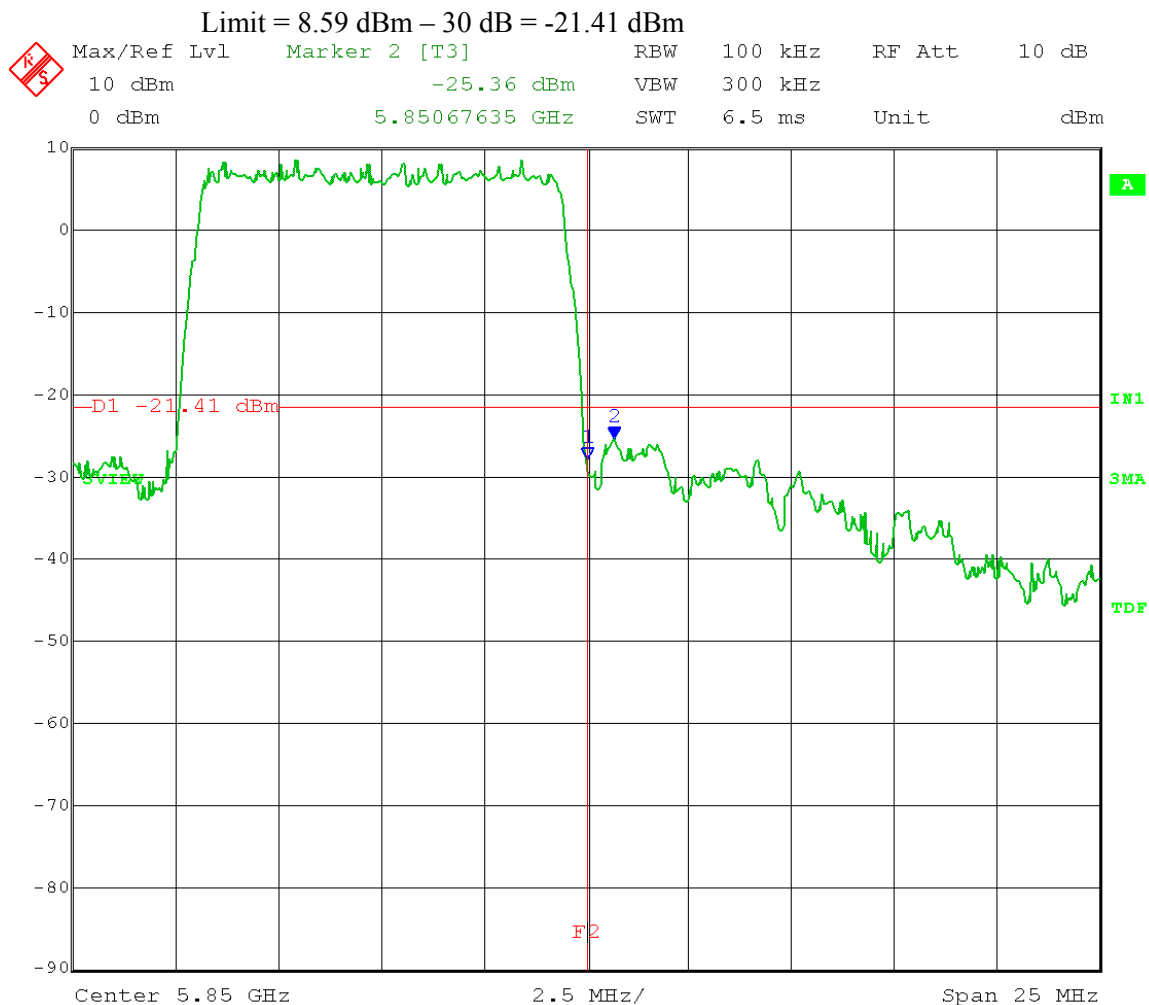

Date: 16.MAY.2012 14:56:55



Company:
Model Tested:
Report Number:

Cambium Networks
C054045A002A
17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A8.0 Duty Cycle of Test Unit

Rule Part: FCC Section 15.35(c)
RSS-Gen 7.2.3

Test Procedure: ANSI C63.10-2009 Section 7.5

Limits: Informative

Results: EUT is continuously transmitting (duty cycle $\geq 98\%$).

Sample Equations: None


Notes: No duty cycle correction factor was applied to measurements for this device.

The EUT was transmitting at a minimum duty cycle of 98%.

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Continuous transmit; 100 ms sweep:

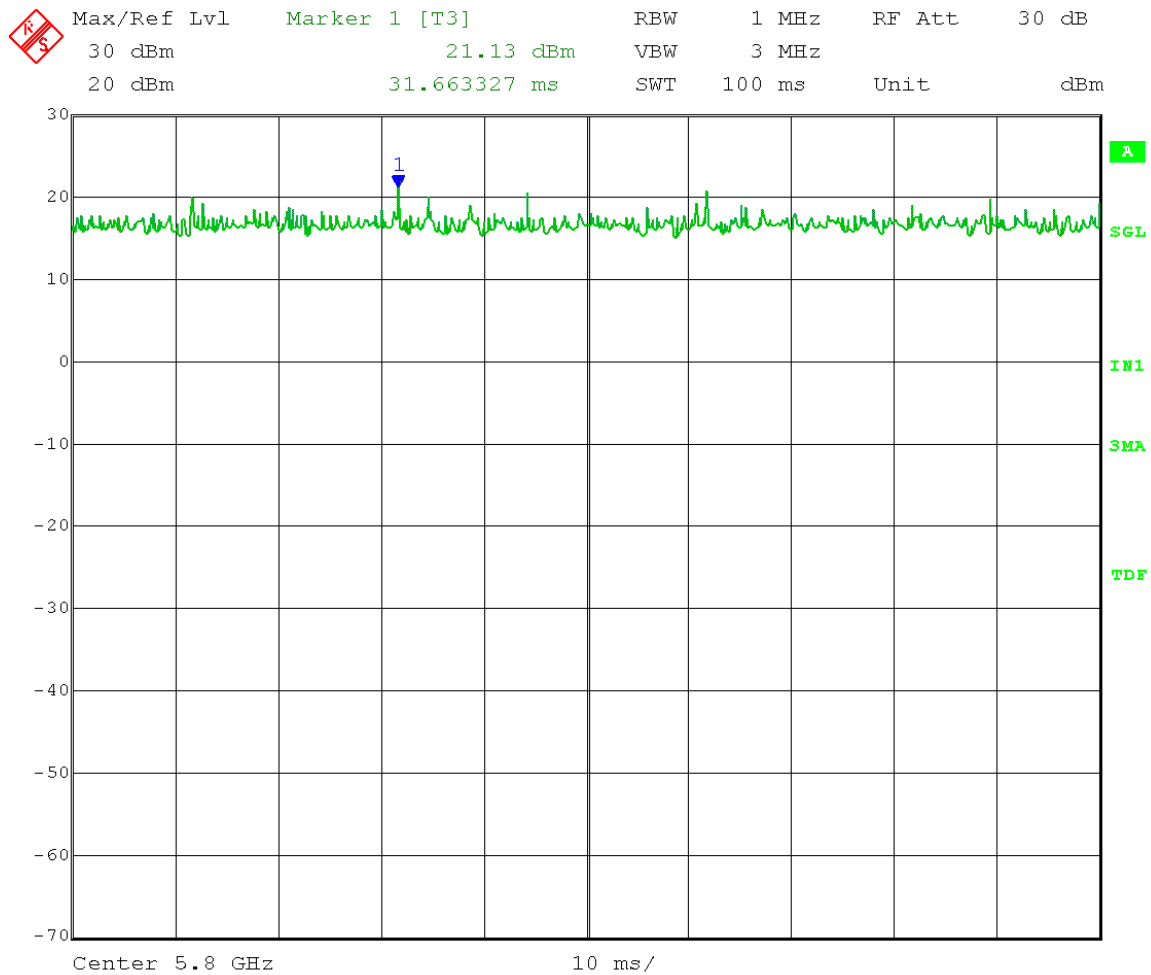


Date: 16.MAY.2012 13:05:47

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Continuous transmit; 100 ms sweep:

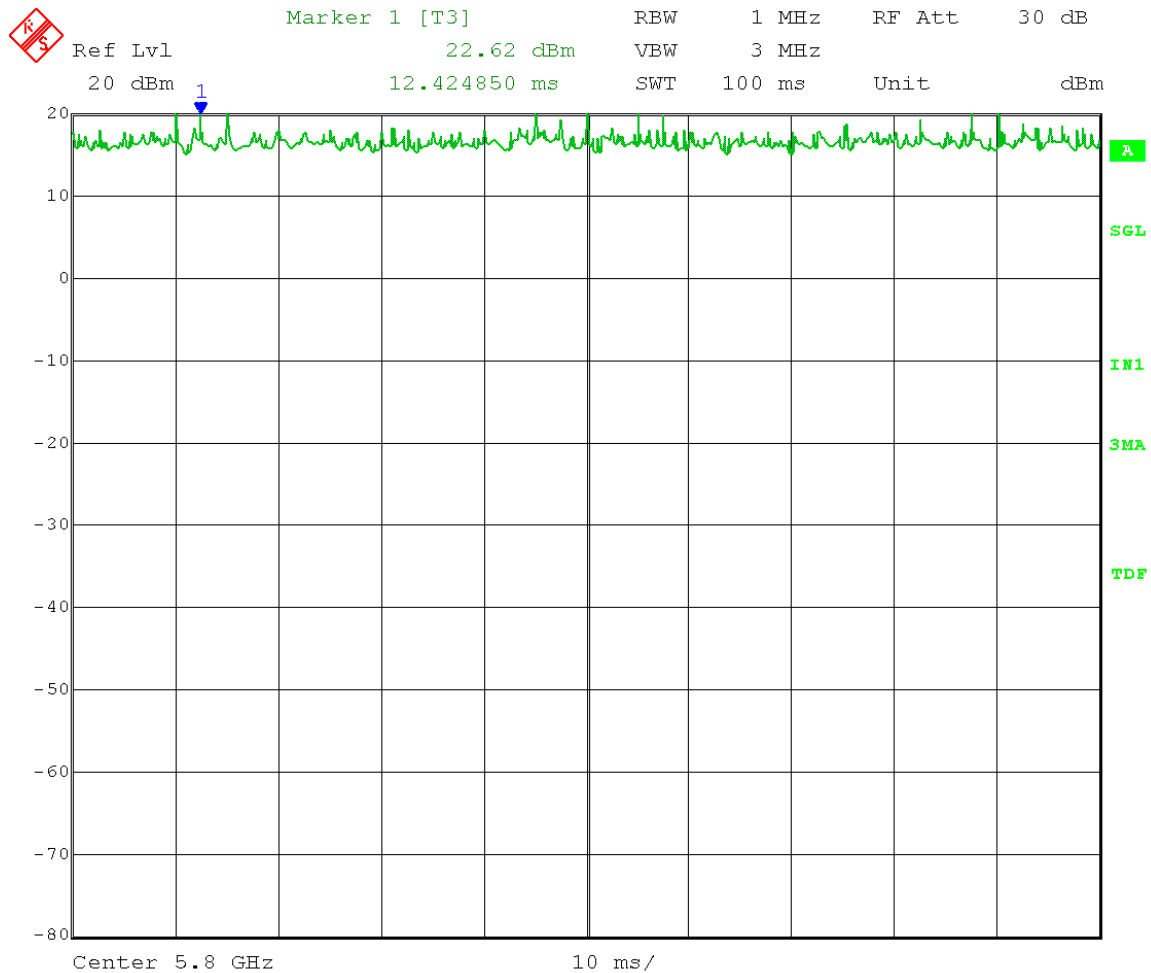


Date: 16.MAY.2012 15:52:17

Test Date: 05-16-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel A; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Continuous transmit; 100 ms sweep:

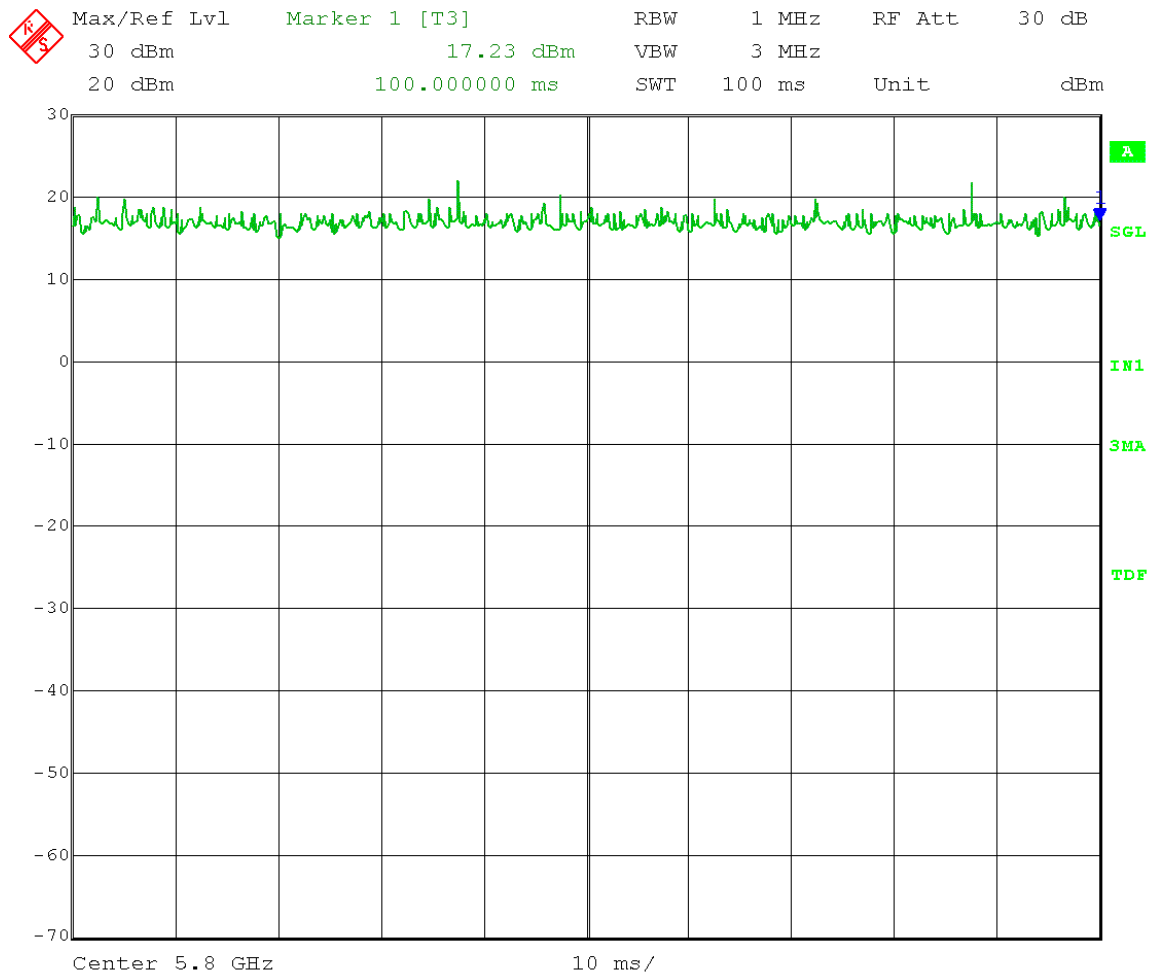


Date: 16.MAY.2012 09:33:55

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 16QAM

Continuous transmit; 100 ms sweep:

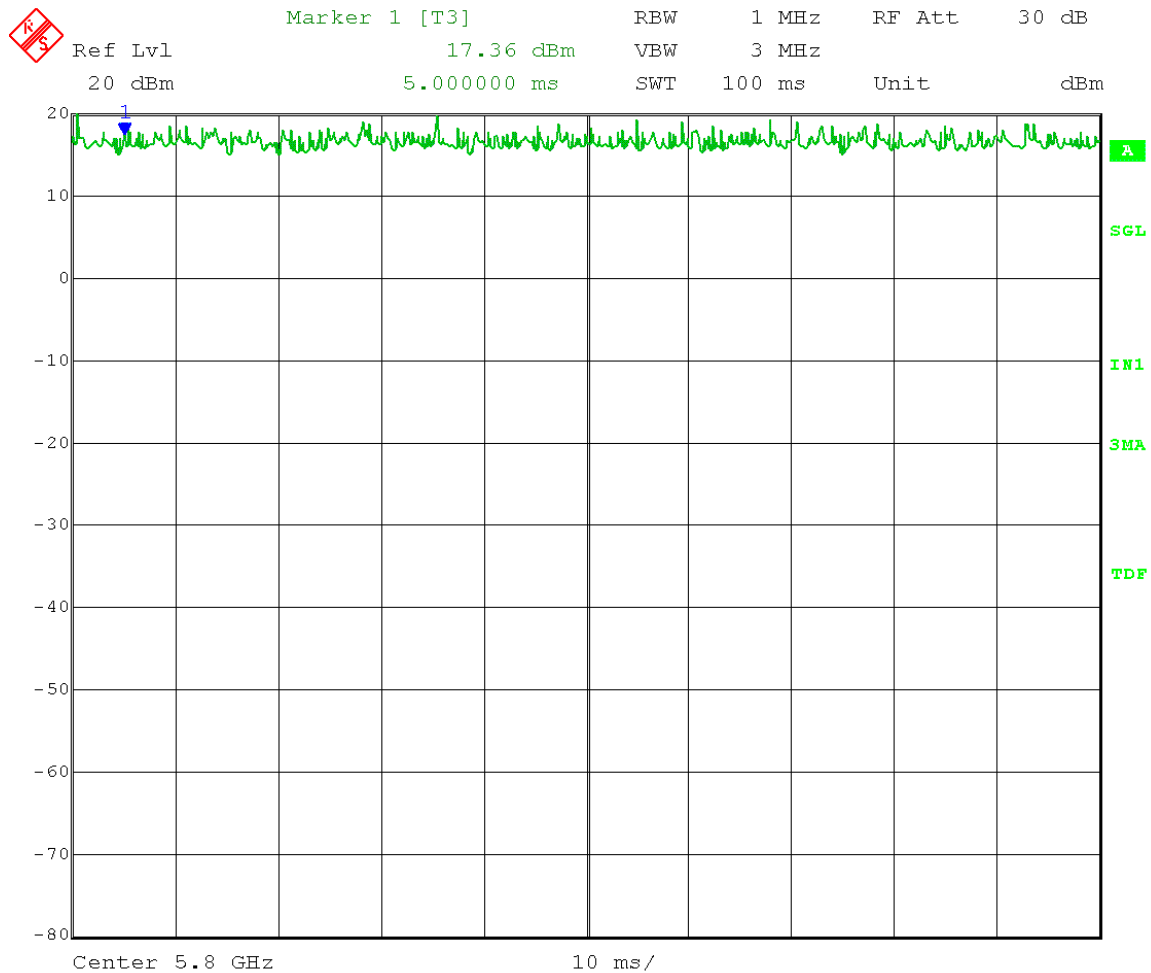


Date: 17.MAY.2012 10:34:41

Test Date: 05-17-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: 64QAM

Continuous transmit; 100 ms sweep:

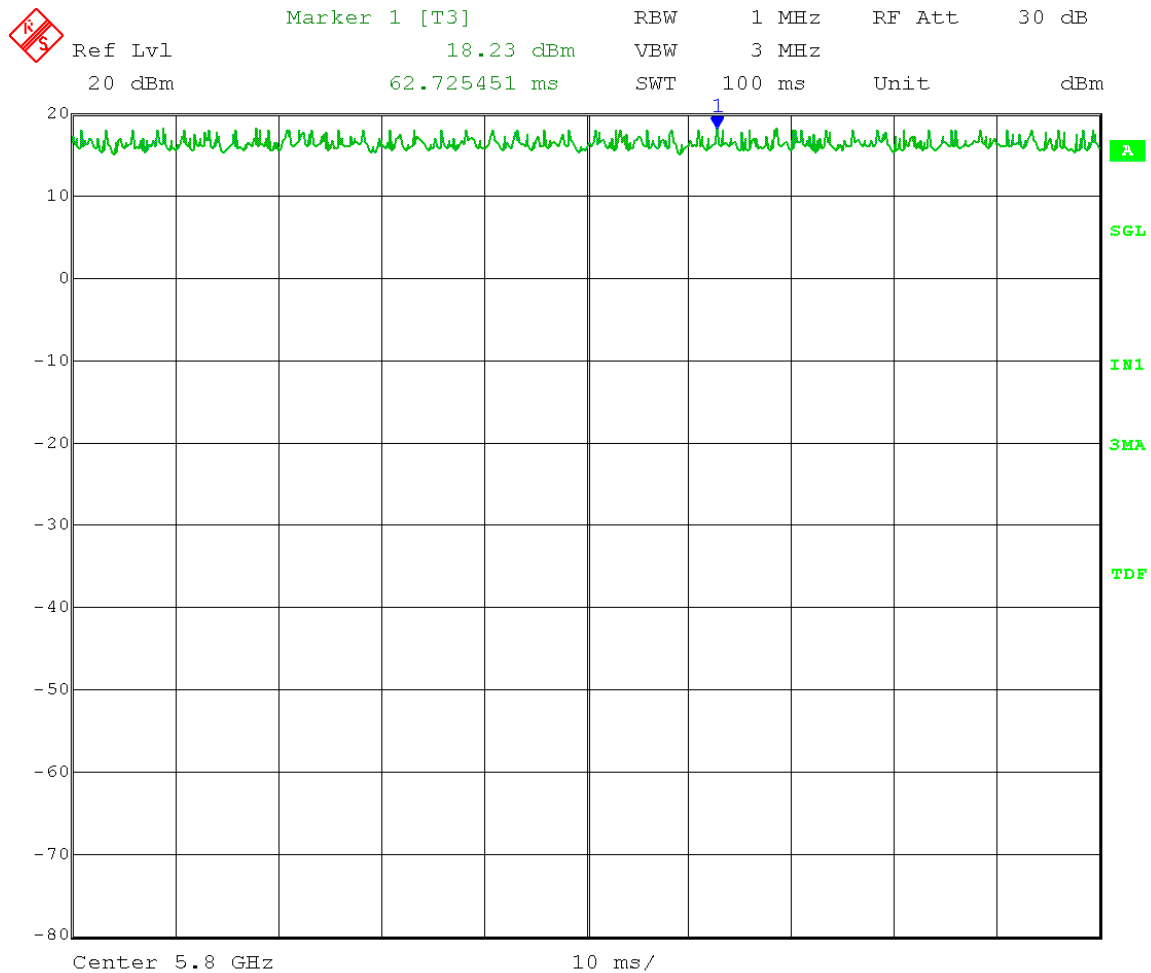


Date: 17.MAY.2012 13:28:46

Test Date: 05-15-2012
Company: Cambium Networks
EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00157
Test: Duty Cycle – duty cycle used during testing (special test software)
Operator: Craig B

EUT nominal channel bandwidth: 10 MHz
Output port: Channel B; Middle Channel Frequency: 5.800 GHz
Output power setting: 19; Modulation Type: QPSK

Continuous transmit; 100 ms sweep:

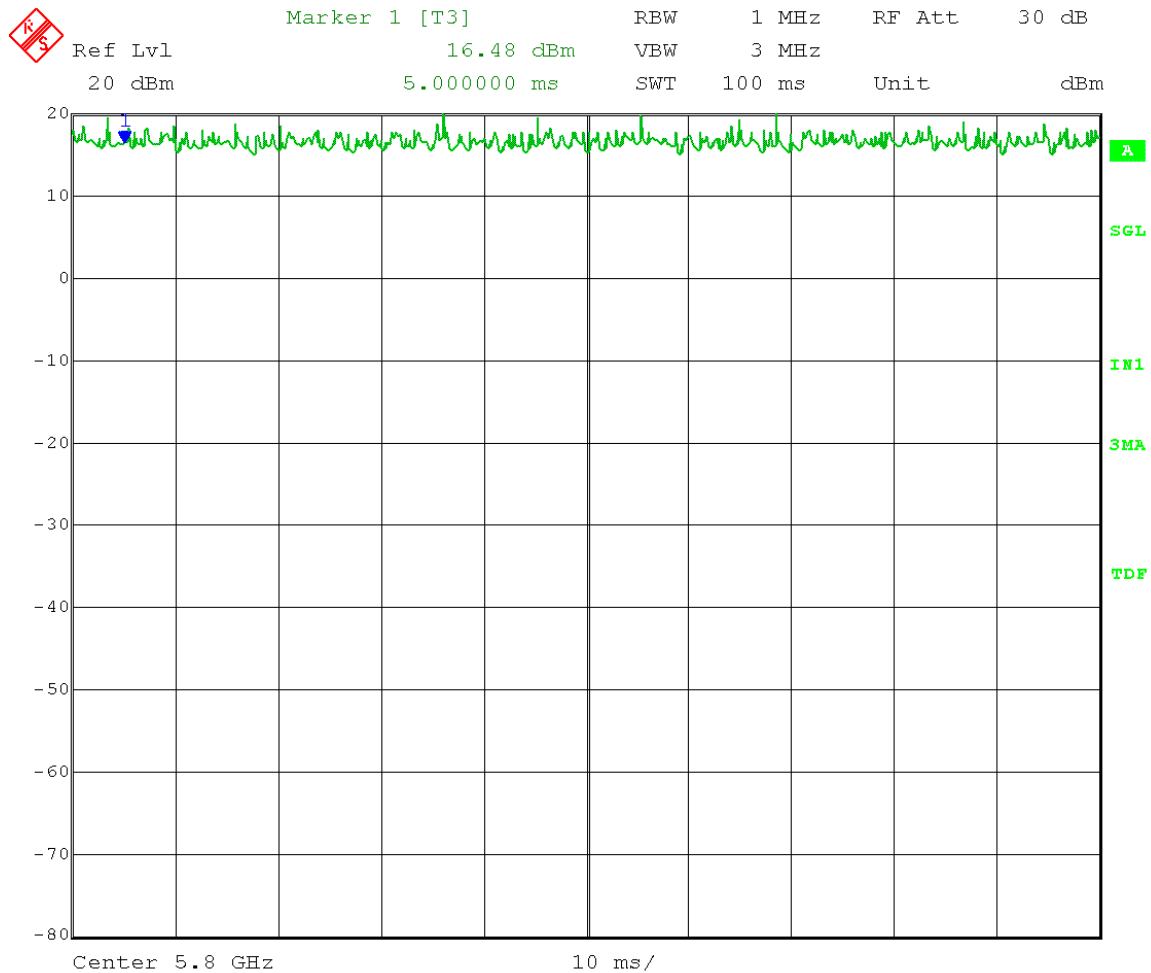

Date: 15.MAY.2012 14:02:11



Company:
Model Tested:
Report Number:

Cambium Networks
C054045A002A
17897

166 South Carter, Genoa City, WI 53128

Appendix A – Measurement Data

A9.0 AC Line Conducted Emissions

Rule Part: FCC Part 15.207
RSS-Gen 7.2.4

Test Procedure: ANSI C63.10-2009
Section 6.2

Limit: FCC Part 15.207(a)
Canada: RSSS-Gen 7.2.4 Table 4

Results: Compliant

Notes: This was an AC Conducted emissions measurement.
The EUT was powered from a representative AC Adapter with an input of 120 VAC 60 Hz.


FCC Part 15.207

Voltage Mains Test

EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F, 36% R.H.
Test Site: DLS O.F. Screen Room
Operator: Craig B
Test Specification: 120 V 60 Hz; Power supply: Phihong Model PSA15A-295 (MOT)
Comment: Continuous transmit; Line 1
Date: 05-22-2012

SCAN TABLE: "Line Cond SR Final"

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz	LISN DLS#128
CISPR AV						

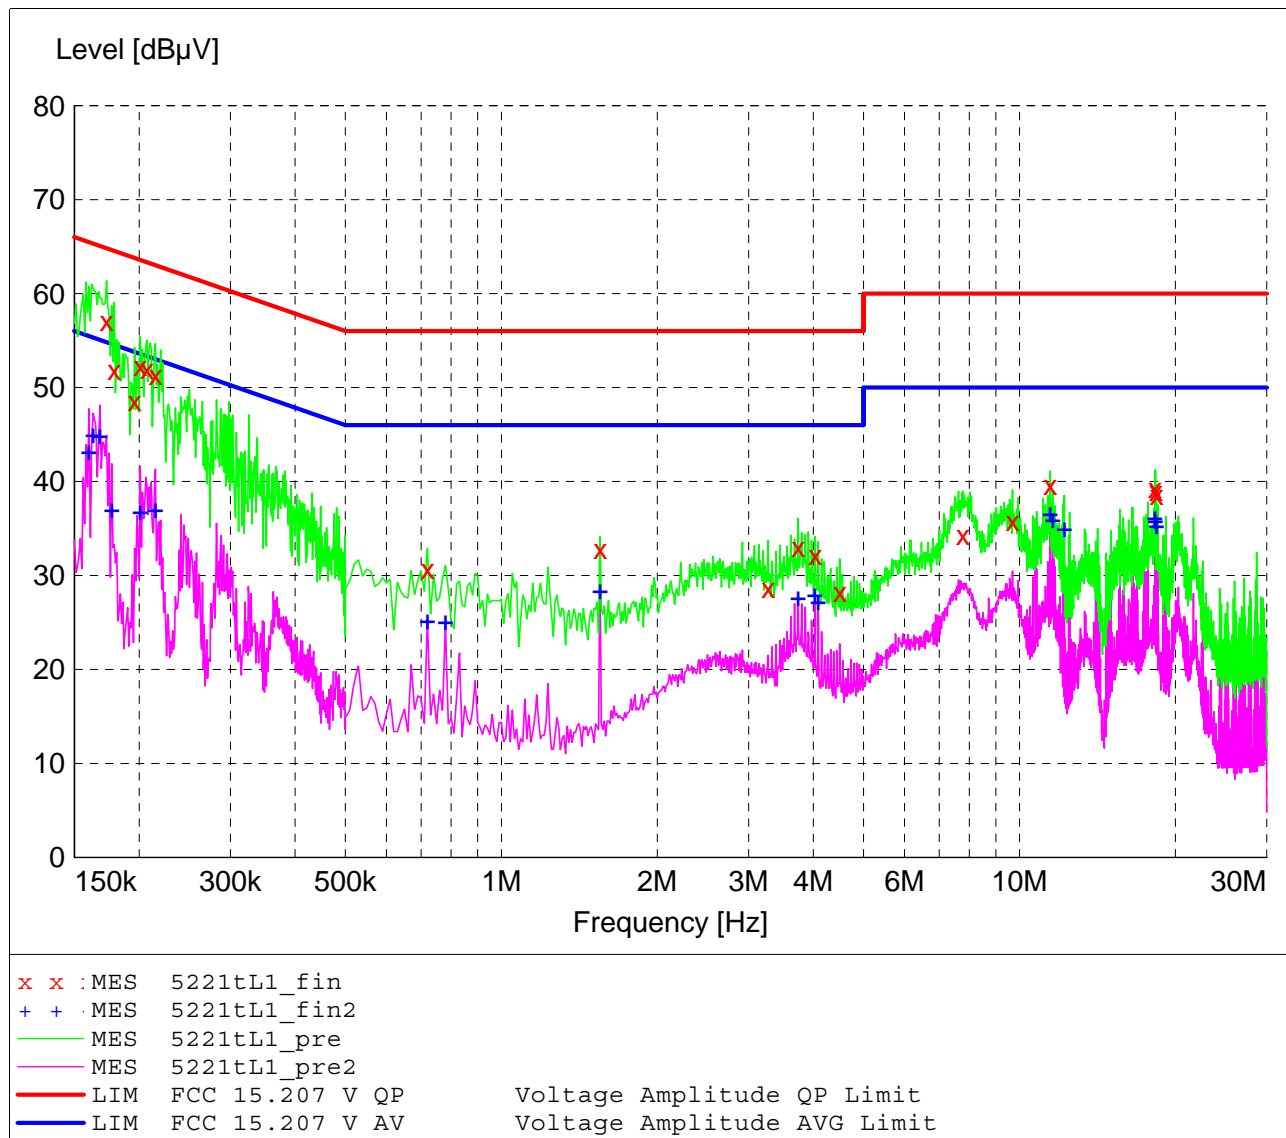

MEASUREMENT RESULT: "5221tL1_fin"

5/22/2012 3:06PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector
0.173000	57.10	13.0	65	7.7	QP
0.179000	51.90	12.9	65	12.6	QP
0.196000	48.60	12.7	64	15.2	QP
0.201000	52.30	12.6	64	11.3	QP
0.207000	52.00	12.6	63	11.3	QP
0.215000	51.30	12.5	63	11.7	QP
0.720000	30.70	10.9	56	25.3	QP
1.550000	32.80	10.5	56	23.2	QP
3.270000	28.70	10.7	56	27.3	QP
3.740000	33.00	10.7	56	23.0	QP
4.030000	32.20	10.7	56	23.8	QP
4.500000	28.20	10.7	56	27.8	QP
7.775000	34.30	10.8	60	25.7	QP
9.695000	35.80	10.9	60	24.2	QP
11.465000	39.60	11.0	60	20.4	QP
18.245000	39.30	11.3	60	20.7	QP
18.305000	39.00	11.3	60	21.0	QP
18.365000	38.60	11.3	60	21.4	QP

MEASUREMENT RESULT: "5221tL1_fin2"

5/22/2012 3:06PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector
0.160000	43.20	13.4	56	12.3	CAV
0.163000	45.10	13.3	55	10.2	CAV
0.168000	44.90	13.1	55	10.2	CAV
0.177000	37.10	13.0	55	17.5	CAV
0.201000	36.80	12.6	54	16.8	CAV
0.215000	37.10	12.5	53	15.9	CAV
0.720000	25.30	10.9	46	20.7	CAV
0.780000	25.10	10.9	46	20.9	CAV
1.550000	28.50	10.5	46	17.5	CAV
3.740000	27.70	10.7	46	18.3	CAV
4.030000	28.00	10.7	46	18.0	CAV
4.090000	27.30	10.7	46	18.7	CAV
11.465000	36.60	11.0	50	13.4	CAV
11.585000	36.00	11.0	50	14.0	CAV
12.200000	35.00	11.0	50	15.0	CAV
18.245000	36.20	11.3	50	13.8	CAV
18.305000	35.90	11.3	50	14.1	CAV
18.365000	35.40	11.3	50	14.6	CAV


FCC Part 15.207

Voltage Mains Test

EUT: PMP450AP 5.7 GHz MIMO/COMBO SN:0A003EA00154
Manufacturer: Cambium Networks
Operating Condition: 70 deg. F, 36% R.H.
Test Site: DLS O.F. Screen Room
Operator: Craig B
Test Specification: 120 V 60 Hz; Power supply: Phihong Model PSA15A-295 (MOT)
Comment: Continuous transmit; Line 2
Date: 05-22-2012

SCAN TABLE: "Line Cond SR Final"

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz	LISN DLS#128
CISPR AV						

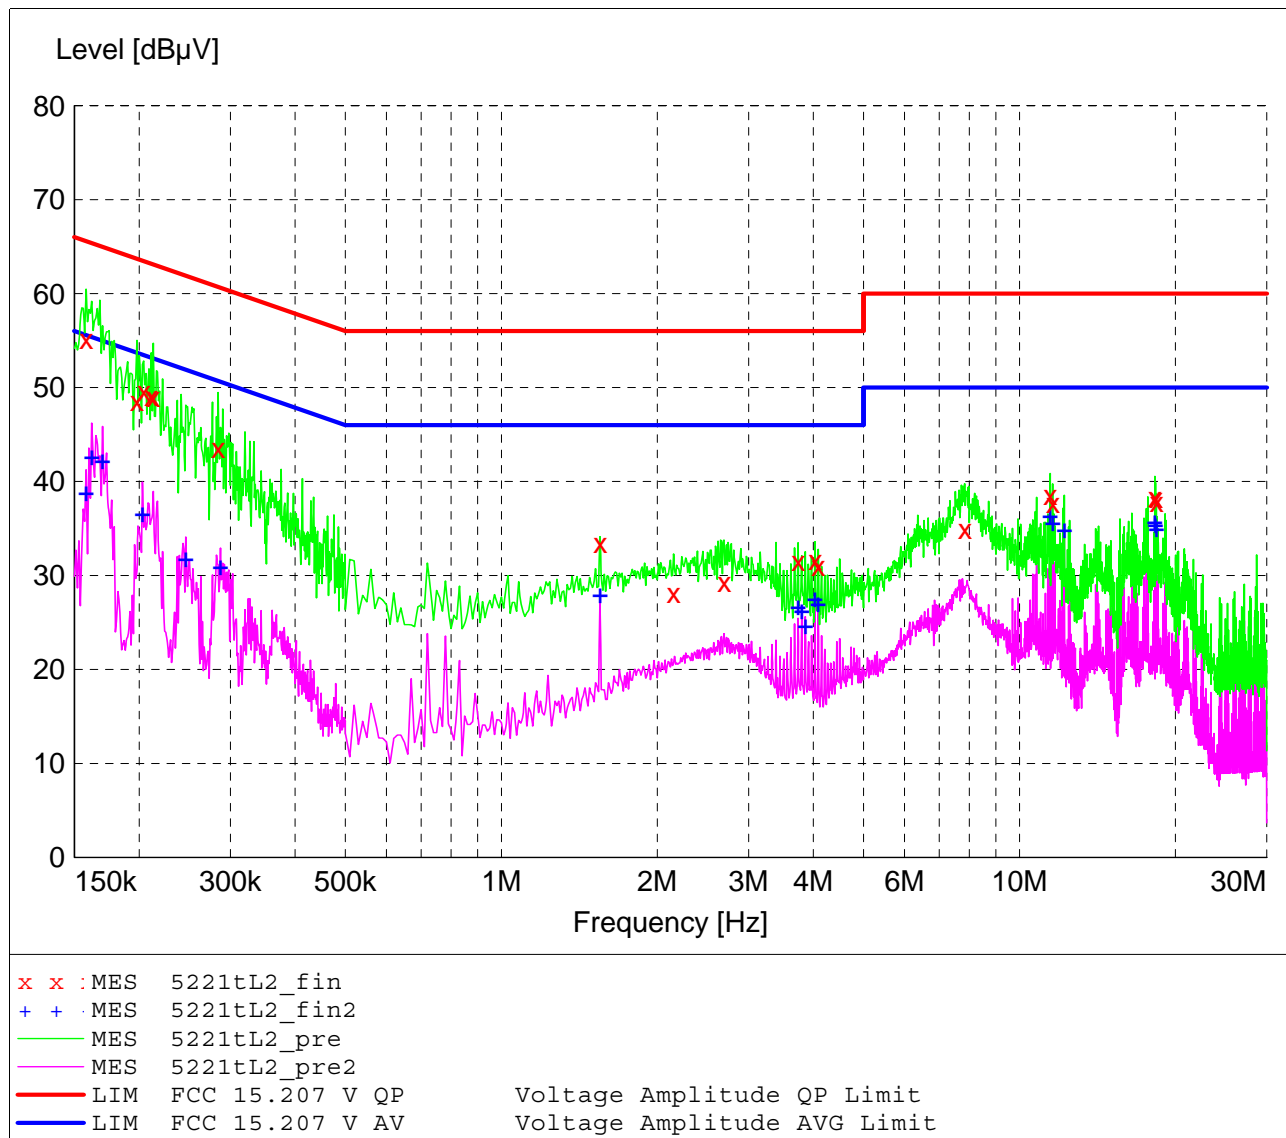

MEASUREMENT RESULT: "5221tL2_fin"

5/22/2012 3:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector
0.158000	55.20	13.4	66	10.4	QP
0.198000	48.60	12.7	64	15.1	QP
0.204000	49.60	12.6	63	13.8	QP
0.211000	49.10	12.5	63	14.1	QP
0.213000	49.00	12.5	63	14.1	QP
0.284000	43.60	11.9	61	17.1	QP
1.550000	33.50	10.5	56	22.5	QP
2.150000	28.10	10.7	56	27.9	QP
2.690000	29.30	10.6	56	26.7	QP
3.740000	31.50	10.7	56	24.5	QP
4.030000	31.60	10.7	56	24.4	QP
4.090000	31.00	10.7	56	25.0	QP
7.835000	34.90	10.8	60	25.1	QP
11.465000	38.60	11.0	60	21.4	QP
11.585000	37.70	11.0	60	22.3	QP
18.245000	38.40	11.3	60	21.6	QP
18.305000	38.20	11.3	60	21.8	QP
18.365000	37.80	11.3	60	22.2	QP

MEASUREMENT RESULT: "5221tL2_fin2"

5/22/2012 3:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector
0.158000	38.90	13.4	56	16.7	CAV
0.162000	42.70	13.3	55	12.7	CAV
0.170000	42.30	13.1	55	12.7	CAV
0.203000	36.60	12.6	54	16.9	CAV
0.246000	31.90	12.1	52	20.0	CAV
0.287000	31.00	11.9	51	19.6	CAV
1.550000	28.00	10.5	46	18.0	CAV
3.740000	26.80	10.7	46	19.2	CAV
3.800000	26.30	10.7	46	19.7	CAV
3.860000	24.70	10.7	46	21.3	CAV
4.030000	27.60	10.7	46	18.4	CAV
4.090000	27.10	10.7	46	18.9	CAV
11.465000	36.40	11.0	50	13.6	CAV
11.585000	35.70	11.0	50	14.3	CAV
12.200000	34.90	11.0	50	15.1	CAV
18.245000	35.80	11.3	50	14.2	CAV
18.305000	35.50	11.3	50	14.5	CAV
18.365000	35.00	11.3	50	15.0	CAV



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C054045A002A
Report Number: 17897

END OF REPORT

Revision #	Date	Comments	By
1.0 Part I	05-29-2012	Preliminary Release, 10 MHz bandwidth - RF Cond data	JS
1.1 Part I	06-04-2012	Updated equipment list, test dates, and other product specific descriptions	CB
1.2 Part I	06-05-2012	Added radiated & line conducted data for completion of report	JS