



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## **Code of Federal Regulations 47 Part 15 – Radio Frequency Devices**

### **Subpart C – Intentional Radiators**

#### **Section 15.247**

Operation within the bands 902 - 928 MHz,  
2400 - 2483.5 MHz, 5725 - 5875 MHz,  
and 24.0 - 24.25 GHz.

#### **PART 1 - thru Section B5.0**

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

|                     |                                                                                                                                                                                |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Formal Name:        | EPMP AP 2.4 GHz OFDM MIMO Radio                                                                                                                                                |
| Kind of Equipment:  | Point-to-Point or Point-to-Multipoint Digital Transmission Transceiver                                                                                                         |
| Frequency Range:    | 2412to 2462 MHz (20 MHz bandwidth)<br>2422 to 2452 MHz (40 MHz bandwidth)<br><i>Please see the Users' Manual for the channel specifications for use with the Dish antenna.</i> |
| Test Configuration: | Stand-alone                                                                                                                                                                    |
| Model Number(s):    | C024900P011A, C024900A011A                                                                                                                                                     |
| Model(s) Tested:    | C024900P011A                                                                                                                                                                   |
| Serial Number(s):   | MAC Address: 000456C1A853                                                                                                                                                      |
| Date of Tests:      | January 13 <sup>th</sup> to February 4 <sup>th</sup> , 2014                                                                                                                    |
| Test Conducted For: | Cambium Networks<br>3800 Golf Road, Suite 360<br>Rolling Meadows, IL 60008, USA                                                                                                |

**NOTICE:** “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 – 2014, D.L.S. Electronic Systems, Inc.

#### **COPYRIGHT NOTICE**

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

## SIGNATURE PAGE

Tested By:

A handwritten signature in black ink that reads "Craig Brandt". The signature is fluid and cursive.

Craig Brandt  
Senior Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf". The signature is fluid and cursive.

William Stumpf  
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson". The signature is fluid and cursive.

Brian Mattson  
General Manager



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

## Table of Contents

|                                                         |     |
|---------------------------------------------------------|-----|
| i. Cover Page.....                                      | 1   |
| ii. Signature Page.....                                 | 2   |
| iii. Table of Contents .....                            | 3   |
| iv. NVLAP Certificate of Accreditation.....             | 5   |
| 1.0 Summary of Test Report .....                        | 6   |
| 2.0 Introduction .....                                  | 7   |
| 3.0 Test Facilities .....                               | 7   |
| 4.0 Description of Test Sample .....                    | 7   |
| 5.0 Test Equipment.....                                 | 9   |
| 6.0 Test Arrangements .....                             | 10  |
| 7.0 Test Conditions.....                                | 10  |
| 8.0 Modifications Made To EUT for Compliance .....      | 11  |
| 9.0 Additional Descriptions.....                        | 11  |
| 10.0 Results .....                                      | 11  |
| 11.0 Conclusion.....                                    | 11  |
| Appendix A – Test Photos.....                           | 12  |
| Appendix B – Measurement Data .....                     | 18  |
| B1.0 DTS Bandwidth – 6 dB bandwidth - Conducted .....   | 18  |
| B1.0a - 20MHz Bandwidth .....                           | 19  |
| B1.0b - 40MHz Bandwidth .....                           | 22  |
| B2.0 Fundamental Emission Output Power - Conducted..... | 25  |
| B2.0a - With Omni Antenna .....                         | 26  |
| B2.0b - With Sector Antenna.....                        | 32  |
| B2.0c - With Dish Antenna.....                          | 38  |
| B3.0 Maximum Power Spectral Density – Conducted.....    | 44  |
| B3.0a – 20MHz Bandwidth .....                           | 45  |
| B3.0b – 40MHz Bandwidth .....                           | 48  |
| B4.0 Maximum Unwanted Emission Levels – Conducted ..... | 54  |
| B4.0a – 20MHz Bandwidth with Omni Antenna .....         | 55  |
| B4.0b – 40MHz Bandwidth with Omni Antenna .....         | 70  |
| B4.0c – 20MHz Bandwidth with Sector Antenna .....       | 85  |
| B4.0d – 40MHz Bandwidth with Sector Antenna .....       | 100 |
| B4.0e – 20MHz Bandwidth with Dish Antenna .....         | 115 |
| B4.0f – 40MHz Bandwidth with Dish Antenna .....         | 130 |



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks  
Model Tested: C024900P011A  
Report Number: 19734  
DLS Project: 6333

|       |                                                                                  |     |
|-------|----------------------------------------------------------------------------------|-----|
| B5.0  | Conducted Measurements for Radiated Restricted Band Compliance - with Dish.....  | 145 |
| B5.0a | – 20MHz Bandwidth.....                                                           | 146 |
| B5.0b | – 40MHz Bandwidth.....                                                           | 173 |
| B6.0  | Maximum Unwanted Emission Levels – Conducted Band-Edge .....                     | 200 |
| B6.0a | – Operating Band Edge .....                                                      | 201 |
| B6.0b | – Restricted Band Edge - with Omni Antenna.....                                  | 219 |
| B6.0c | – Restricted Band Edge - with Sector Antenna.....                                | 251 |
| B6.0d | – Restricted Band Edge - with Dish Antenna .....                                 | 283 |
| B7.0  | Maximum Unwanted Emission Levels into Restricted Frequency Bands - Radiated..... | 315 |
| B7.0a | – With Omni Antenna .....                                                        | 316 |
| B7.0b | – With Sector Antenna .....                                                      | 323 |
| B8.0  | Maximum Unwanted Emission Levels – Radiated Band-Edge from Cabinet .....         | 330 |
| B8.0a | – 20MHz Bandwidth .....                                                          | 331 |
| B8.0b | – 40MHz Bandwidth .....                                                          | 339 |
| B9.0  | Duty Cycle of Test Unit.....                                                     | 347 |
| B10.0 | AC Line Conducted Emissions.....                                                 | 350 |



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

United States Department of Commerce  
National Institute of Standards and Technology



## Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

**D.L.S. Electronic Systems, Inc.**  
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services  
listed on the Scope of Accreditation, for:

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).



*Mr. R. M. L.*

For the National Institute of Standards and Technology

2013-10-01 through 2014-09-30

Effective dates

NVLAP-01C (REV. 2009-01-28)



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks  
Model Tested: C024900P011A  
Report Number: 19734  
DLS Project: 6333

## 1.0 Summary of Test Report

It was determined that the Cambium Networks EPMP AP 2.4 GHz OFDM MIMO Radio, Model C024900P011A, complies with the requirements of CFR 47 Part 15 Subpart C Section 15.247.

### Applicable Technical Requirements Tested:

| Section               | Description                                                                 | Procedure                                                                              | Note | Compliant? |
|-----------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------|------------|
| 15.247(a)(2)          | 6 dB Emission Bandwidth - Conducted                                         | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 8.1 Option 1  | 1    | Yes        |
| 15.247(b)(3)          | Fundamental Emission Output Power – Average                                 | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 9.2.3.1-AVGPM | 1    | Yes        |
| 15.247(e)             | Maximum Power Spectral Density - Conducted                                  | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 10.3-AVGPSD-1 | 1    | Yes        |
| 15.247(d)             | Maximum Unwanted Emission Levels – Conducted                                | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 11.0          | 1    | Yes        |
| 15.247 (d),<br>15.205 | Conducted Measurements for Radiated Restricted Band Compliance - with Dish  | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 12.1/12.2.2   | 1    | Yes        |
| 15.247(d),<br>15.205  | Maximum Unwanted Emission Levels – Conducted - Operating Band-Edge          | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 11.0          | 1    | Yes        |
| 15.247(d),<br>15.205  | Maximum Unwanted Emission Levels into Restricted Frequency Bands - Radiated | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01<br>Section 12.0 & 12.1   | 2    | Yes        |
| 15.247(d),<br>15.205  | Maximum Unwanted Emissions - Radiated Band-Edge - from Cabinet              | FCC Publication<br>KDB 558074 D01 DTS<br>Meas Guidance v03r01                          | 2    | Yes        |
| 15.35(c)              | Duty Cycle of Test Unit                                                     | ANSI C63.10-2009<br>Section 7.5                                                        | 1    | NA         |
| 15.207(a)             | AC Line Conducted Emissions                                                 | ANSI C63.10-2009<br>Section 6.2                                                        |      | Yes        |

Note 1: RF conducted measurement.

Note 2: Radiated emission measurement.



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## 2.0 Introduction

From January 13<sup>th</sup> through February 4<sup>th</sup>, 2014 the EPMP AP 2.4 GHz OFDM MIMO Radio, Model C024900P011A, as provided from Cambium Networks, was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.247. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

## 3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

### Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc.  
166 S. Carter Street  
Genoa City, Wisconsin 53128

### Wheeling Test Facility:

D.L.S. Electronic Systems, Inc.  
1250 Peterson Drive  
Wheeling, IL 60090

## 4.0 Description of Test Sample

### Description:

Point-to-Point or Point-to-Multipoint 2.4 GHz DTS Transceiver with either Sector (17 dBi) or Omni (8dBi) or Dish (25dBi) external antenna with 20 MHz or 40 MHz channel bandwidth. OFDM modulation.

### Type of Equipment / Frequency Range:

Stand-Alone / 2412 to 2462 MHz (20 MHz bandwidth)  
2422 to 2452 MHz (40 MHz bandwidth)

Please see the [Users' Manual](#) for the channel specifications for use with the Dish antenna.

### Physical Dimensions of Equipment Under Test:

Length: 8.5 in. Width: 3 in. Height: 1 in.

### Power Source:

30 VDC (Power Over Ethernet to Radio)  
120 Vac, 60 Hz using Power supply model: PSA15M-300 (AP)



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks  
Model Tested: C024900P011A  
Report Number: 19734  
DLS Project: 6333

### Internal Frequencies:

292kHz, 940-1000kHz, 4MHz (Switching Power Supply Frequencies)  
40 MHz, 25 MHz

### Transmit Frequencies Used For Test Purpose:

20 MHz Channel Bandwidth: Low channel: 2412 MHz  
Middle channel: 2437 MHz  
High channel: 2462 MHz  
High Channel with Dish antenna: 2462 MHz

40 MHz Channel Bandwidth: Low channel: 2422 MHz  
Middle channel: 2437 MHz  
High channel: 2452 MHz  
High Channel with Dish antenna: 2447 MHz

### Type of Modulations:

OFDM: MCS15 (worst case) used for testing

### Description of Circuit Board(s) / Part Number:

|                           |                        |
|---------------------------|------------------------|
| Cambium Networks PC Board | P005153                |
| 17 dBi Sector antenna     | Laird SKS240045-18-CA1 |
| 8 dBi Omni antenna        | AFR-SP(2400-2500)-8-2A |
| 25 dBi Dish antenna       | MA-WP2556-DP12         |
| Connector x 2             | PMP090003              |
| 1 dB cable x 2            | LMR E203950            |



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

## 5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

### D.L.S. Wisconsin

| Description          | Manufacturer       | Model Number             | Serial Number          | Frequency Range  | Cal Dates | Cal Due Dates |
|----------------------|--------------------|--------------------------|------------------------|------------------|-----------|---------------|
| Receiver             | Rohde & Schwarz    | ESI 40                   | 837808/005             | 20 Hz – 40 GHz   | 7-23-13   | 7-23-14       |
| LISN                 | Solar              | 9252-50-R-24-BNC         | 961019                 | 9 kHz – 30 MHz   | 5-24-13   | 5-24-14       |
| Filter- High-Pass    | SOLAR              | 7930-120                 | 090702                 | 120 kHz – 30 MHz | 1-3-14    | 1-3-15        |
| Limiter              | Electro-Metrics    | EM-7600                  | 706                    | 9 kHz – 30 MHz   | 1-3-14    | 1-3-15        |
| Preamp               | Miteq              | AMF-7D-01001800-22-10P   | 1809602                | 1GHz-18GHz       | 5-29-13   | 5-29-14       |
| Horn Antenna         | EMCO               | 3115                     | 9502-4451              | 1-18GHz          | 3-18-13   | 3-18-15       |
| Filter- High-Pass    | Q-Microwave        | 100462                   | 2                      | 4.2GHz-18GHz     | 5-28-13   | 5-28-14       |
| Preamp               | Miteq              | AMF-8B-180265-40-10P-H/S | 438727                 | 18GHz-26GHz      | 8-12-13   | 8-12-14       |
| Horn Antenna         | EMCO               | 3116                     | 2549                   | 18 – 40GHz       | 9-6-12    | 9-6-14        |
| High Pass Filter     | Planar             | CL22500-9000-CD-SS       | PF1229/0728            | 15-40 GHz        | 8-14-13   | 8-14-14       |
| 20 dB attenuator     | Aeroflex/weinschel | 75A-20-12                | 1071                   | DC – 40 GHz      | 8-14-13   | 8-14-14       |
| 10 dB attenuator     | Pasternack         | PE7014-10                | DLS#198                | DC – 18 GHz      | 3-16-13   | 3-16-14       |
| Preamplifier         | Rohde & Schwarz    | TS-PR10                  | 032001/005             | 9 kHz – 1 GHz    | 1-4-14    | 1-4-15        |
| Antenna              | EMCO               | 3104C                    | 97014785               | 20 MHz – 200 MHz | 8-22-12   | 8-22-14       |
| Antenna              | EMCO               | 3146                     | 97024895               | 200 MHz – 1 GHz  | 9-6-12    | 9-6-14        |
| Filter- Low-Pass     | Mini-Circuits      | VLFX1125                 | RUU92600920            | 30 - 1000 MHz    | 8-13-13   | 8-13-14       |
| Thermal Power Sensor | Rohde & Schwarz    | NRP-Z51                  | 1138.0005.03-104290-Wq | DC - 18GHz       | 12-12-13  | 12-12-14      |
| 20 dB attenuator     | Anritsu            | 42N50-20                 | 000451                 | DC – 18 GHz      | 3-16-13   | 3-16-14       |



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## 6.0 Test Arrangements

### Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

| Frequency Range   | Bandwidth (-6 dB) |
|-------------------|-------------------|
| 10 to 150 kHz     | 200 Hz            |
| 150 kHz to 30 MHz | 9 kHz             |
| 30 MHz to 1 GHz   | 120 kHz           |
| Above 1 GHz       | 1 MHz             |

### RF Conducted Emissions Measurement Arrangement:

All RF conducted emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to FCC Publication KDB 558074 D01 DTS Meas Guidance v03r01 and ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

## 7.0 Test Conditions

### Normal Test Conditions:

#### Temperature and Humidity:

67°F at 27% RH

#### Supply Voltage:

30 VDC (Power Over Ethernet to Radio)  
120 Vac, 60 Hz using Phihong power supply model: PSA15M-300 (AP)



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## 8.0 Modifications Made To EUT for Compliance

No modifications were needed for the OFDM transmitters.

## 9.0 Additional Descriptions

Mode of operation: Measurements were taken for MCS15 modulation (as worst case) at the lowest, middle, and highest channels of operation. Port 0 & Port 1 were tested. Port 0 was tested as representative of Port 1. Port 0 was equal to/or worst case over Port 1 per Cambium Networks. 20 and 40 MHz channel bandwidths were tested. EUT was set to transmit continuously (at various power settings) with 100% duty cycle.

Emission Designators: 20M0X1D, 40M0X1D

Please see the Users' Manual for the channel specifications for use with the Dish antenna.

## 10.0 Results

Measurements were performed in accordance with FCC Publication KDB 558074 D01 DTS Meas Guidance v03r01 and ANSI C63.10-2009. Graphical and tabular data can be found in Appendix B at the end of this report.

## 11.0 Conclusion

The EPMP AP 2.4 GHz OFDM MIMO Radio, Model C024900P011A, as provided from Cambium Networks tested from January 13<sup>th</sup> to February 4<sup>th</sup>, 2014 **meets** the requirements of CFR 47 Part 15 Subpart C Section 15.247.

## Appendix A – Test Photos

### Photo Information and Test Setup:

- Item 0: Cambium Networks EPMP AP 2.4 GHz OFDM MIMO Radio, Model C024900P011A
- Item 1: 2.4 GHz OMNI MIMO Antenna, Model AFR-SP(2400-2500)-8-2A
- Item 2: Unshielded Ethernet cable, 6ft long
- Item 3: Shielded Coax cable 2 x @ 2ft long
- Item 4: Power Supply, Model PSA15m-300 (AP)
- Item 5: Unshielded Ethernet cable, 100ft long

**Radiated with Omni Antenna - Back, below 1 GHz**





166 South Carter, Genoa City, WI 53128

Company:

Cambium Networks

Model Tested:

C024900P011A

Report Number:

19734

DLS Project:

6333

## Appendix A – Test Photos

**Radiated with Omni Antenna - Front, below 1 GHz**



**Radiated with Sector Antenna - Front, below 1 GHz**





166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333


## Appendix A – Test Photos

- Item 0: Cambium Networks EPMP AP 2.4 GHz OFDM MIMO Radio, Model C024900P011A
- Item 1: Laird Sector Antenna, Model SKS240045-18-CA1
- Item 2: Unshielded Ethernet cable, 6ft long
- Item 3: Shielded Coax cable 2 x @ 2ft long
- Item 4: Power Supply, Model PSA15m-300 (AP)
- Item 5: Unshielded Ethernet cable, 100ft long


**Radiated with Sector Antenna - Back, below 1 GHz**



**Radiated with Omni Antenna - Above 1 GHz**

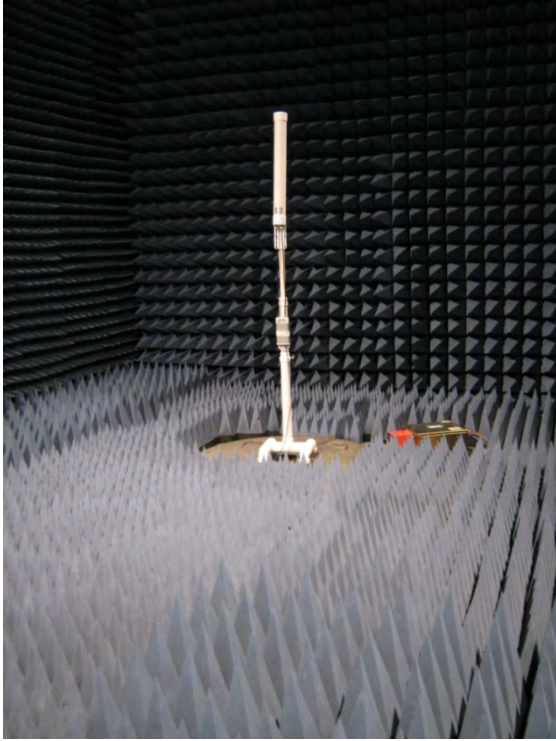


**Radiated with Sector Antenna - Above 1 GHz**

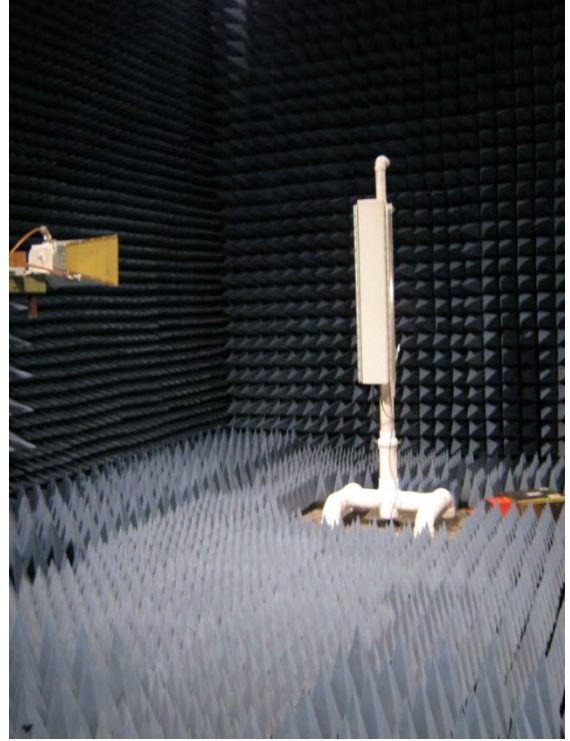

**Radiated with Sector Antenna  
- Side View Above 1 GHz**



**Radiated from Cabinet - Above 1 GHz**

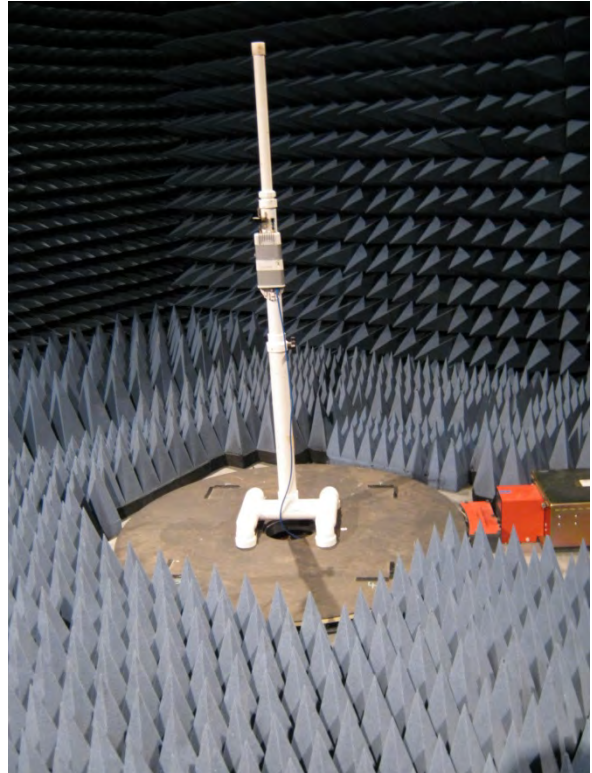


## Appendix A – Test Photos

**RF Conducted**



**Output Power**

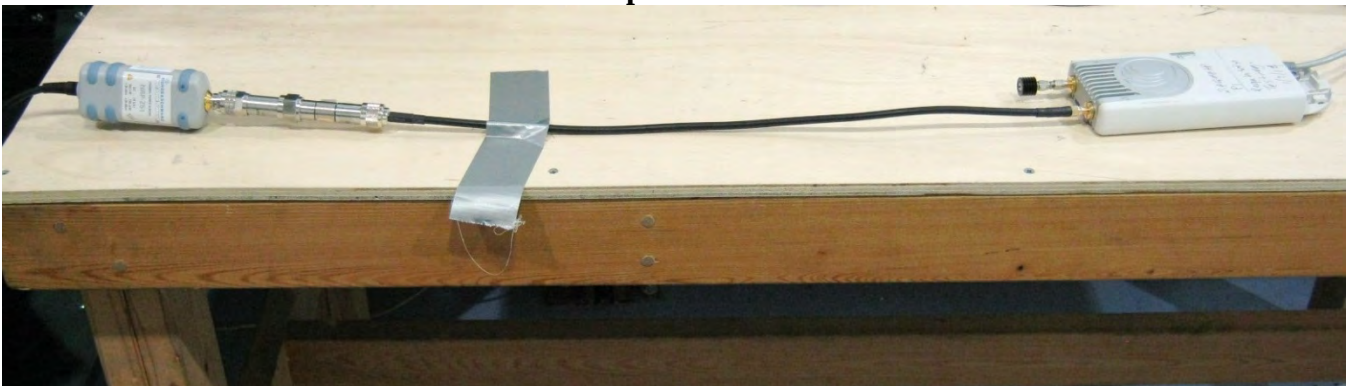



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

## Appendix A – Test Photos

**AC Line Conducted - Front**



**AC Line Conducted - Back**





166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## Appendix B – Measurement Data

### B1.0 DTS Bandwidth – 6 dB bandwidth - Conducted

**Rule Section:** FCC 15.247(a)(2)

**Test Procedure:** FCC KDB 558074 D01 DTS Meas Guidance v03r01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 8.1 Option 1

**Description:** RBW = 100kHz  
VBW  $\geq 3 \times$  RBW  
Detector = Peak  
Trace mode = max hold  
Sweep = auto couple

Measure the maximum width of the emission between the lower and upper frequencies that measure 6 dB below the maximum level of the in-band emission.

Measurements were taken for OFDM MCS15 with 20 MHz and 40 MHz channel bandwidths at the low, middle and high channels of operation. EUT was set to transmit continuously with a 100% duty cycle.

Per Cambium Networks request, measurements were only performed on output port 0.


**Limit:** DTS Bandwidth shall be at least 500 kHz

**Results:** Passed

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: Low Channel: Transmit = 2.412 GHz  
Output power setting: 26 20 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 17.81 MHz

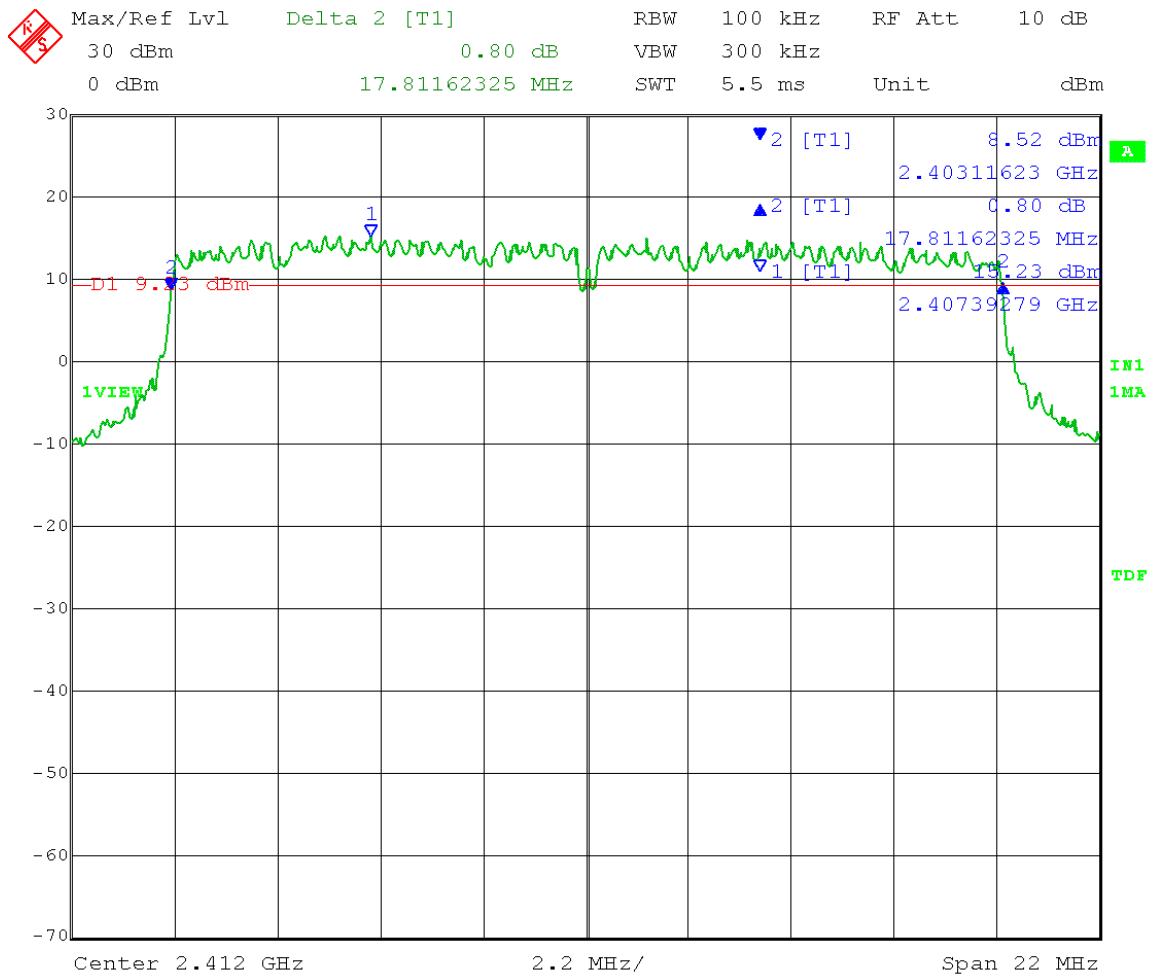


Date: 21.JAN.2014 09:29:10

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: Mid Channel: Transmit = 2.437 GHz  
Output power setting: 26 20 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 17.81 MHz

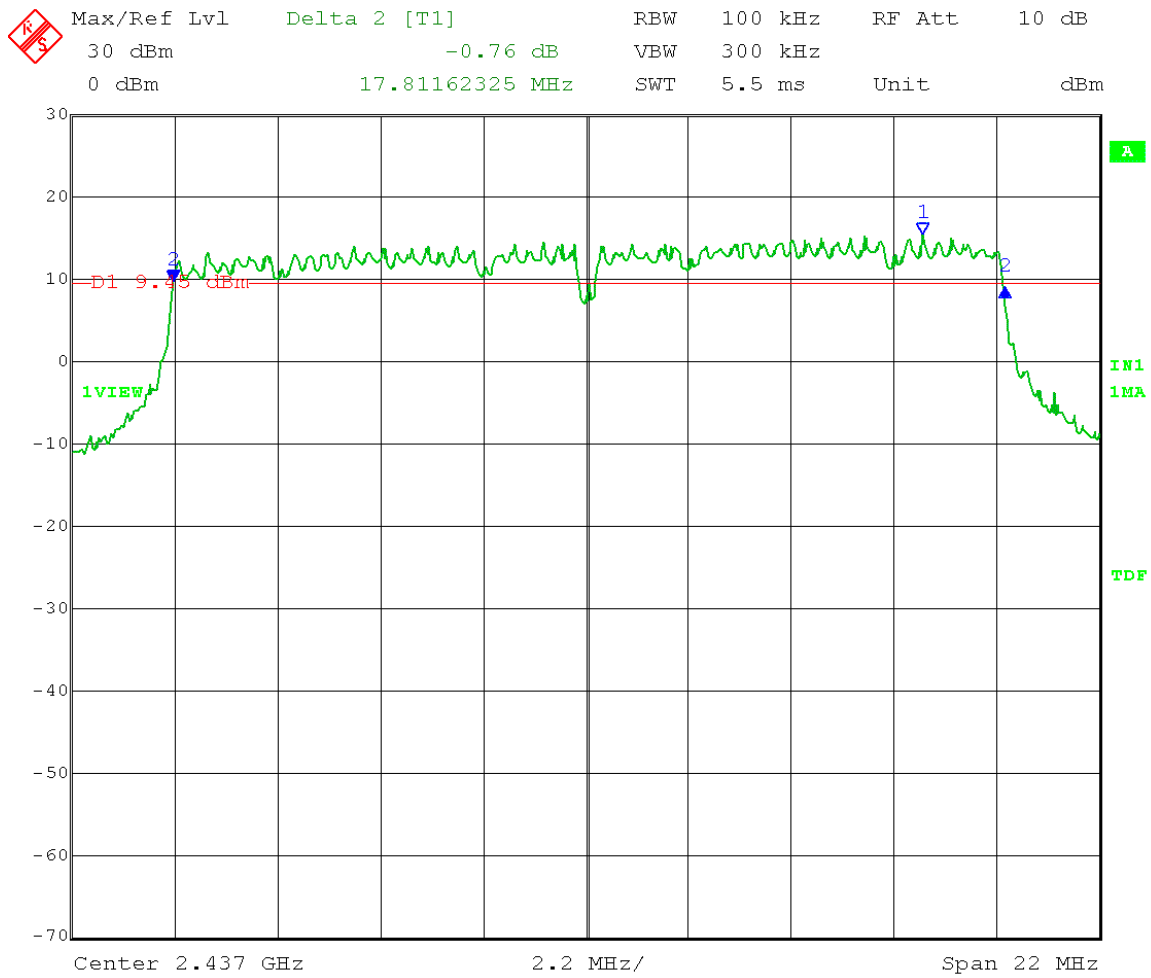


Date: 21.JAN.2014 09:34:59

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: High Channel: Transmit = 2.462 GHz  
Output power setting: 26 20 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 17.81 MHz

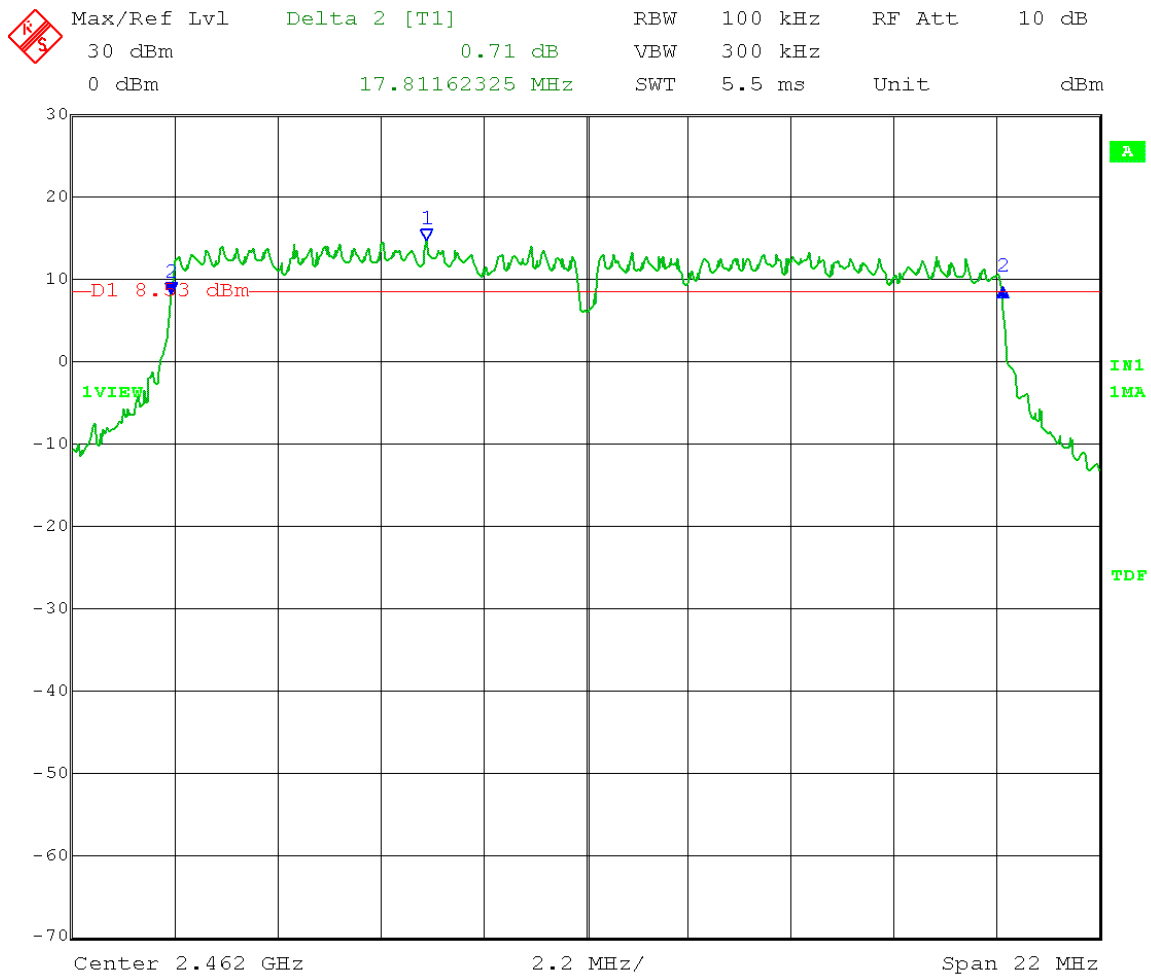


Date: 21.JAN.2014 09:37:53

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: Low Channel: Transmit = 2.422 GHz  
Output power setting: 26 40 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 36.68 MHz

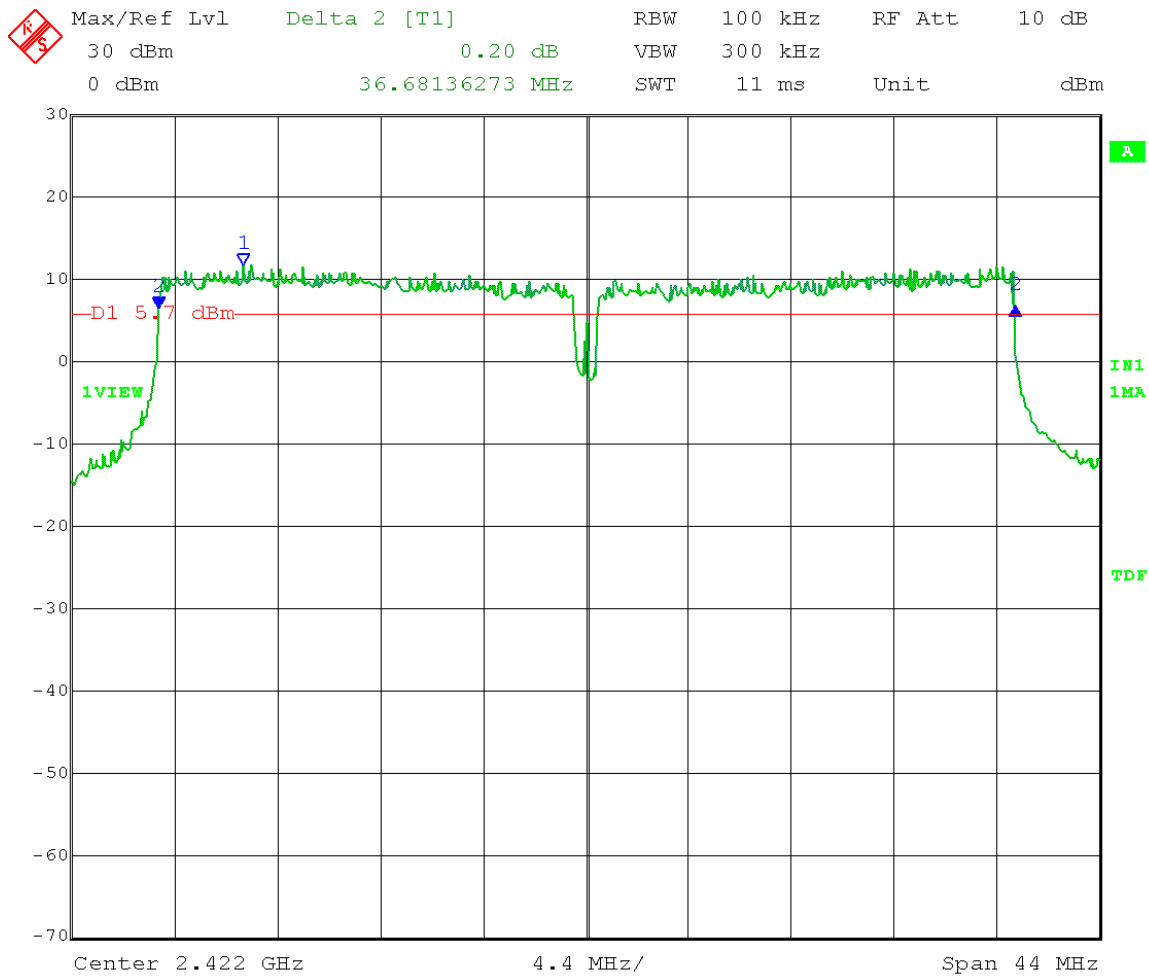


Date: 21.JAN.2014 09:42:52

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: Mid Channel: Transmit = 2.437 GHz  
Output power setting: 26 40 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 36.68 MHz

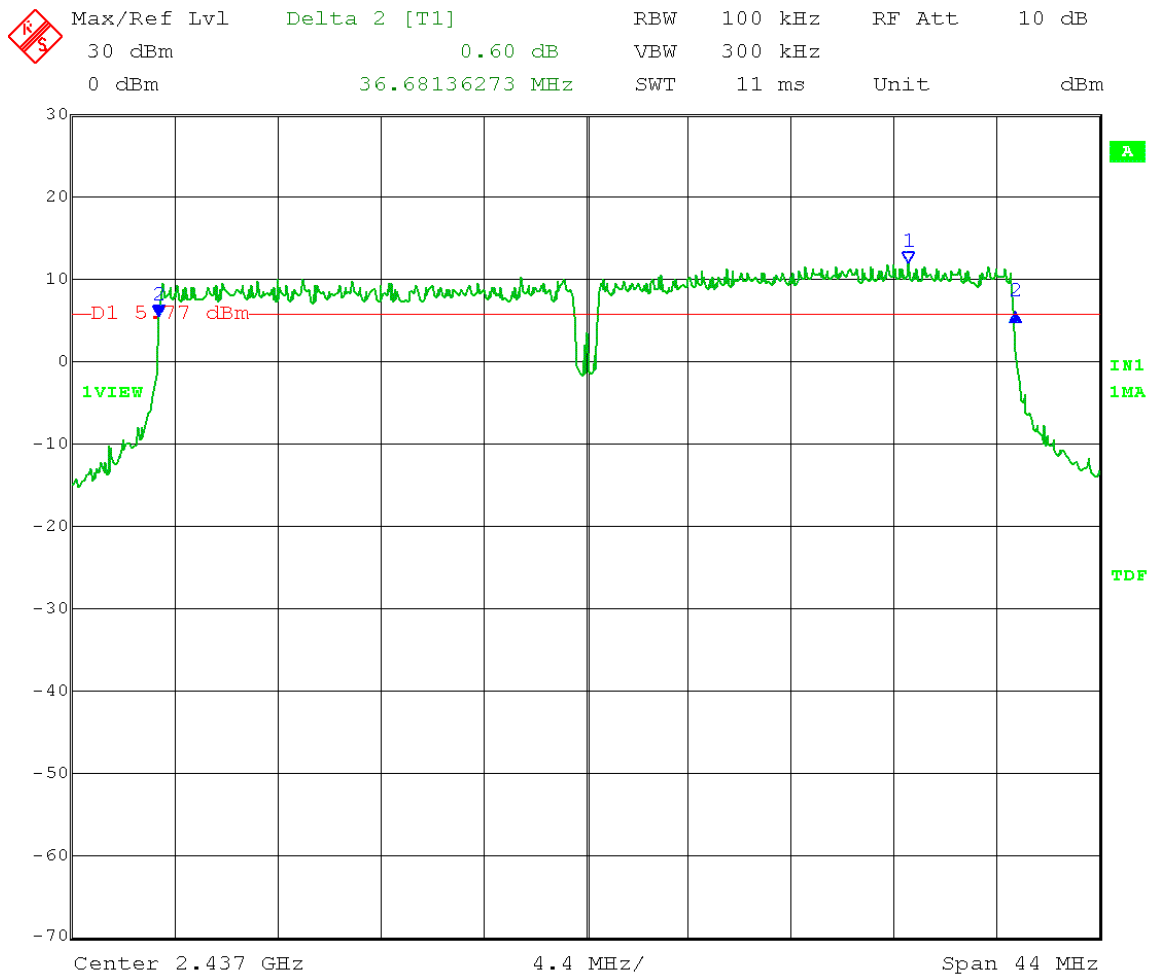


Date: 21.JAN.2014 09:45:20

Test Date: 01-21-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Emission Bandwidth (6 dB) - Conducted  
Operator: Craig B

Comment: High Channel: Transmit = 2.452 GHz  
Output power setting: 26 40 MHz channel BW  
Output port 0 Modulation: OFDM MCS15

6 dB Emission Bandwidth = 36.68 MHz

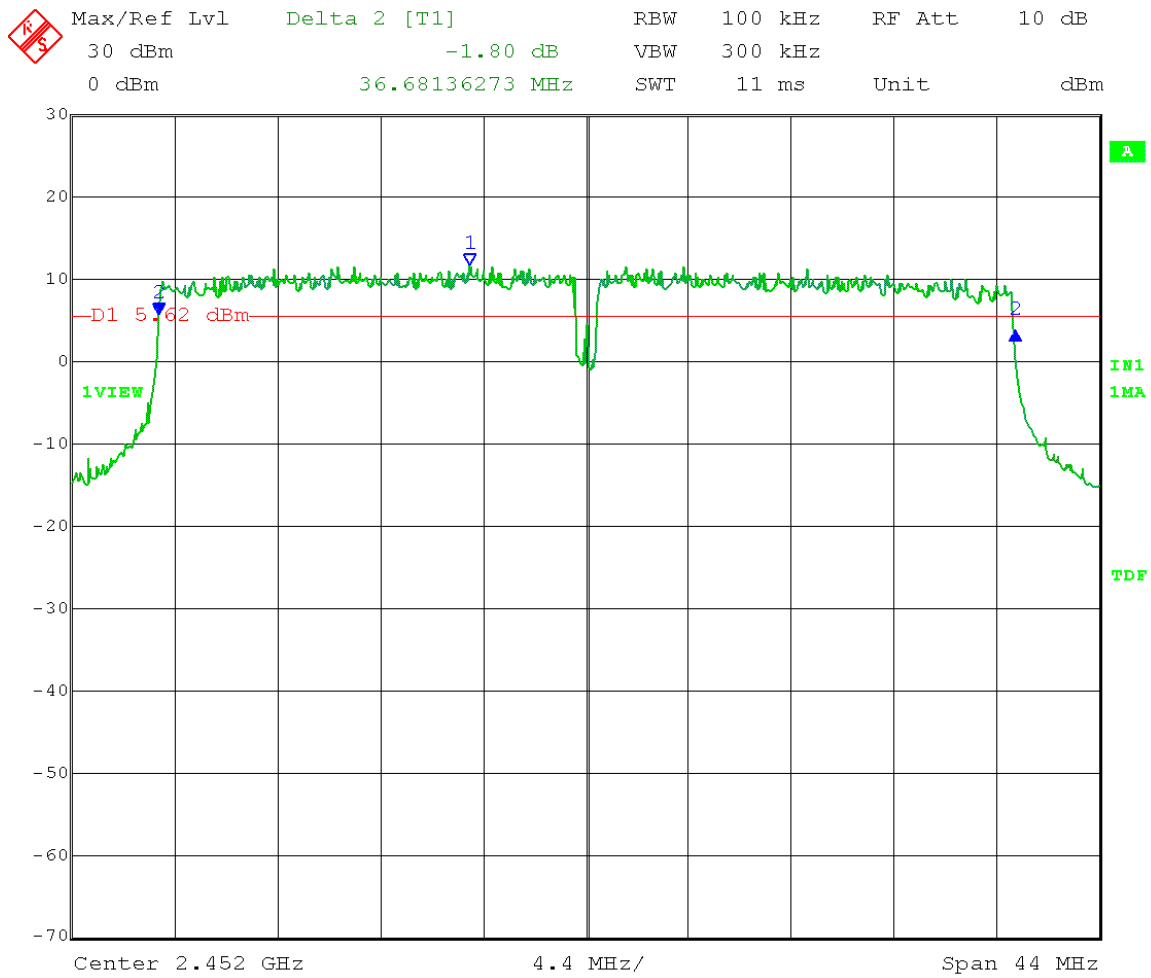

Date: 21.JAN.2014 09:48:10



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## Appendix B – Measurement Data

### B2.0 Fundamental Emission Output Power - Conducted

**Rule Section:** FCC 15.247(b)(3)

**Test Procedure:** FCC KDB 558074 D01 DTS Meas Guidance v03r01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)

**Description:** Measurements were performed using a wideband RF power meter with a thermocouple detector.

The EUT was transmitting continuously with a 100% duty cycle. The average power of the transmitter was measured.

Measurements were taken for OFDM MCS15 with 20 MHz and 40 MHz channel bandwidths at the low, middle and high channels of operation.

**Limit:** Limit with 8 dBi Omni antenna: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

Limit with 17 dBi Sector antenna: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

Limit with 25 dBi Dish antenna (used for point-to-point operation only): [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB. RF conducted limit = 23 dBm.

\* It was later decided that the 25 dBi Dish could also be used in point-to-multipoint operation. Test results show that the output power used for point-to-point mode also passes the point-to-multipoint limit. Point-to-multipoint limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 19 dB (antenna gain is 19 dB greater than the 6 dB allowed) = 11 dBm conducted.

**Results:** Passed

**Notes:** The RF conducted power limit was reduced by the amount by which the antenna gain exceeds 6 dBi.

Measure-and-sum technique for MIMO with Cross-Polarized antenna: Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  $= 10 \log(2) = 3$  dB. 3 dB was added to power measurements to account for MIMO cross-polarized operation.

The fundamental output power setting was limited in order to pass near-by restricted band emission limits.

Per Cambium Networks request, measurements were only performed on output port 0.

Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Low Channel Frequency: 2.412 GHz  
Test software setting: 16.5 (used to get 15.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 16.35 dBm + 3 dB (MIMO Cross-Pole)  
= 19.35 dBm

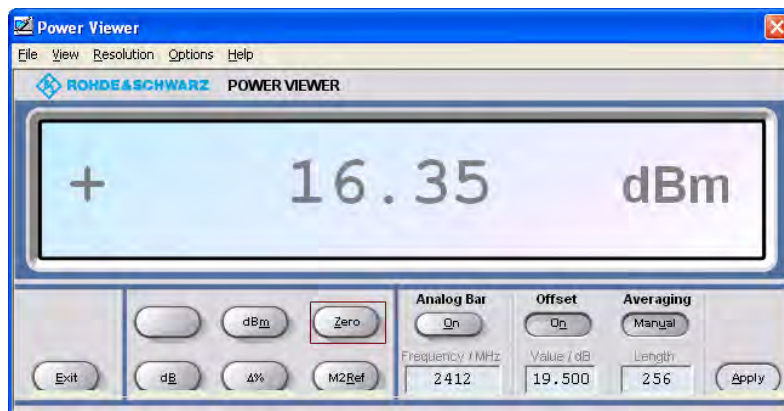

Test Date: 01-13-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 26 (used to get 25 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 24.99 dBm + 3 dB (MIMO Cross-Pole)  
= 27.99 dBm



Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; High Channel Frequency: 2.462 GHz  
Test software setting: 17.5 (used to get 16.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 16.83 dBm + 3 dB (MIMO Cross-Pole)  
= 19.83 dBm



Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Low Channel Frequency: 2.422 GHz  
Test software setting: 13 (used to get 12 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 11.95 dBm + 3 dB (MIMO Cross-Pole)  
= 14.95 dBm



Test Date: 01-14-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 26 (used to get 25 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 24.99 dBm + 3 dB (MIMO Cross-Pole)  
= 27.99 dBm



Test Date: 01-22-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; High Channel Frequency: 2.452 GHz  
Test software setting: 12 (used to get 11 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain (Omni): 8 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 2 dB (antenna gain is 2 dB greater than the 6 dB allowed) = 28 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 11.88 dBm + 3 dB (MIMO Cross-Pole)  
= 14.88 dBm

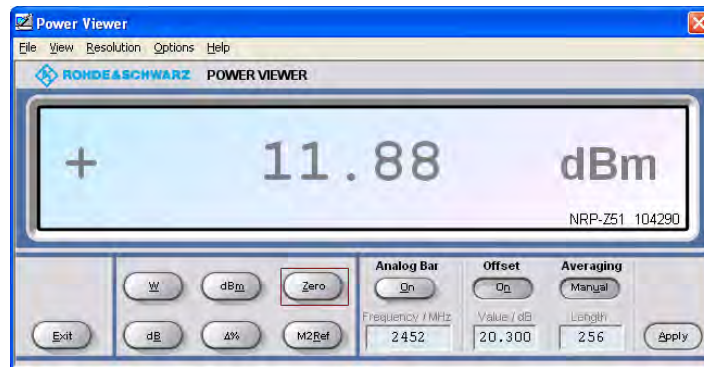

Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Low Channel Frequency: 2.412 GHz  
Test software setting: 12 (used to get 11 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 10.95 dBm + 3 dB (MIMO Cross-Pole)  
= 13.95 dBm



Test Date: 01-13-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 17 (used to get 16 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 15.15 dBm + 3 dB (MIMO Cross-Pole)  
= 18.15 dBm

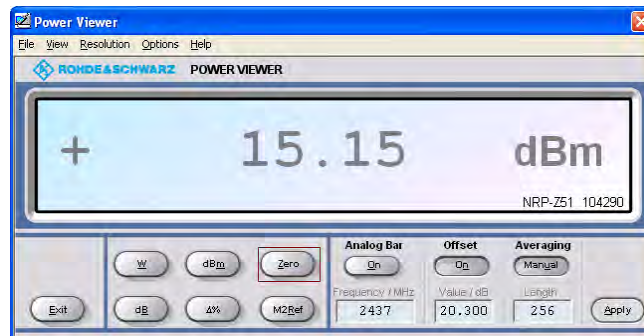

Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; High Channel Frequency: 2.462 GHz  
Test software setting: 12 (used to get 11 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 10.57 dBm + 3 dB (MIMO Cross-Pole)  
= 13.57 dBm

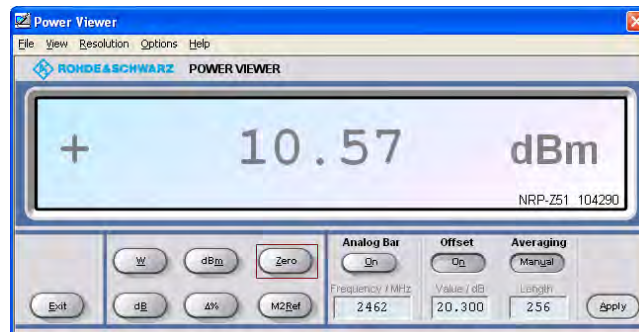

Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Low Channel Frequency: 2.422 GHz  
Test software setting: 12 (used to get 11 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 11.21 dBm + 3 dB (MIMO Cross-Pole)  
= 14.21 dBm

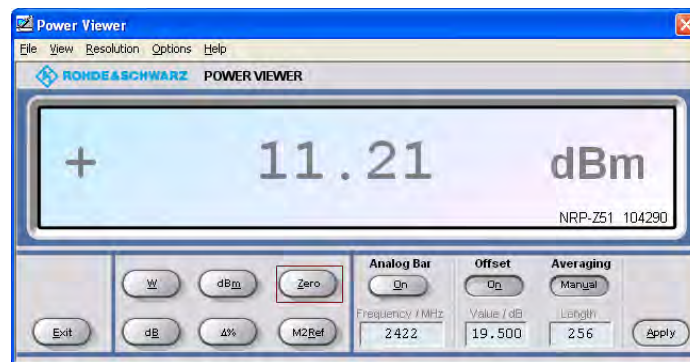

Test Date: 01-14-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 12 (used to get 11 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 11.10 dBm + 3 dB (MIMO Cross-Pole)  
= 14.10 dBm

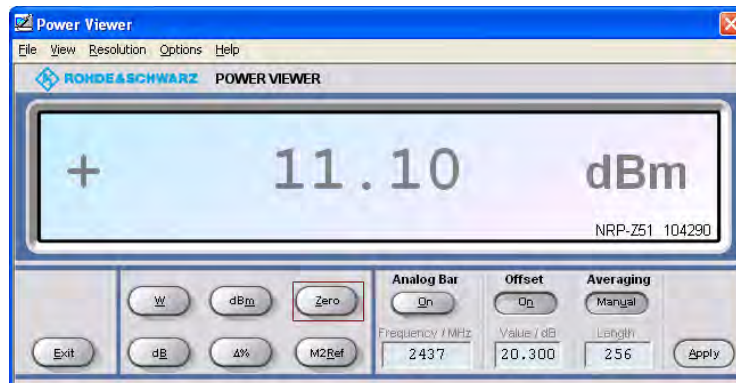

Test Date: 01-20-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; High Channel Frequency: 2.452 GHz  
Test software setting: 4.5 (used to get 3.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 17 dBi; Point-to-Multipoint operation

Limit: [15.247(b)(3)&(4)]: 30 dBm (1 Watt) – 11 dB (antenna gain is 11 dB greater than the 6 dB allowed) = 19 dBm conducted.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add 10 log(N) dB, where N is the number of outputs.  
= 10 log(2) = 3 dB

Correction for duty cycle = 100%

Fundamental Emission AVERAGE Output Power = 4.61 dBm + 3 dB (MIMO Cross-Pole)  
= 7.61 dBm

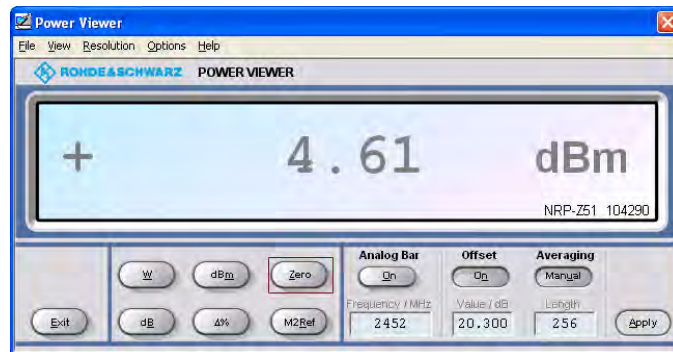

Test Date: 01-31-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Low Channel Frequency: 2.412 GHz  
Test software setting: 1 (used to get 0 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power =  $-0.38 \text{ dBm} + 3 \text{ dB}$  (MIMO Cross-Pole)  
 $= 2.62 \text{ dBm}$

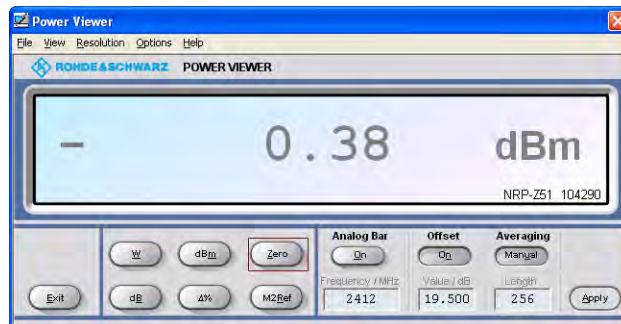

Test Date: 01-30-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 1.5 (used to get 0.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power = 0.50 dBm + 3 dB (MIMO Cross-Pole)  
= 3.50 dBm



Test Date: 01-31-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 20 MHz  
Output port: Channel 0; High Channel Frequency: 2.462 GHz  
Test software setting: 0 (used to get -1 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power =  $-0.91 \text{ dBm} + 3 \text{ dB}$  (MIMO Cross-Pole)  
 $= 2.09 \text{ dBm}$



Test Date: 02-03-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B

EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Low Channel Frequency: 2.422 GHz  
Test software setting: 1 (used to get 0 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power =  $-0.07 \text{ dBm} + 3 \text{ dB}$  (MIMO Cross-Pole)  
 $= 2.93 \text{ dBm}$



Test Date: 02-03-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; Mid Channel Frequency: 2.437 GHz  
Test software setting: 1.5 (used to get 0.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power = 0.62 dBm + 3 dB (MIMO Cross-Pole)  
= 3.62 dBm

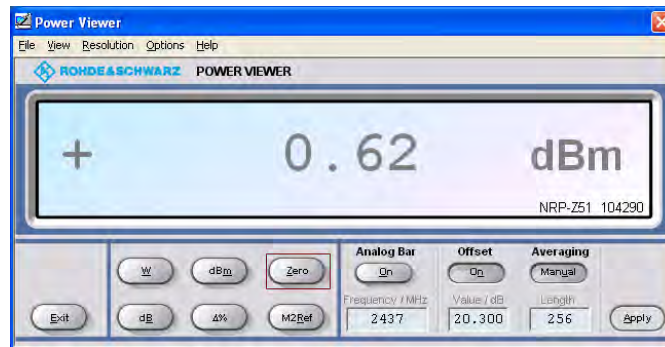

Test Date: 02-03-2014  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz OFDM MAC: 000456C1A853  
Test: AVERAGE Fundamental Emission Output Power – Conducted  
Procedure: FCC KDB D01 DTS Meas Guidance v03r01  
Section 9.2.3.1 – AVGPM (Measurement using an RF average power meter with a thermocouple detector)  
Operator: Craig B


EUT nominal channel bandwidth: 40 MHz  
Output port: Channel 0; High Channel Frequency: 2.447 GHz  
Test software setting: 0.5 (used to get -0.5 dBm output);  
Modulation Type: OFDM MCS15  
Antenna gain 25 dBi; Point-to-Point operation

Limit: [15.247(b)(3)&(c)(1)(i)]: 30 dBm conducted with 6 dBi antenna gain allowed. Conducted limit is lowered 1 dB for every 3 dB antenna gain exceeds 6 dB. Antenna gain exceeds 6 dBi by 19 dB, therefore RF conducted power limit is reduced by 7 dB.  
RF conducted limit = 23 dBm.

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3 \text{ dB}$

Duty cycle of test unit = 100%, (no correction required)

Fundamental Emission AVERAGE Output Power =  $0.06 \text{ dBm} + 3 \text{ dB (MIMO Cross-Pole)}$   
 $= 3.06 \text{ dBm}$

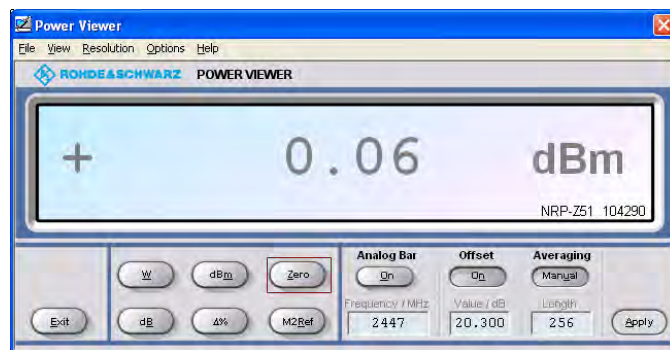



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## Appendix B – Measurement Data

### B3.0 Maximum Power Spectral Density – Conducted

**Rule Section:** FCC 15.247(e)

**Test Procedure:** FCC KDB 558074 D01 DTS Meas Guidance v03r01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

10.3 Method AVGPSD-1 (trace averaging with EUT transmitting at full power throughout each sweep)

**Description:** Set instrument center frequency to DTS channel center frequency.  
Set span to at least 1.5 times the OBW.  
Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .  
Set VBW  $\geq 3 \times \text{RBW}$   
Detector = power averaging (RMS).  
Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .  
Sweep time = auto couple.  
Trace mode: trace average 200 traces  
Use the peak marker function to determine the maximum amplitude level.  
If necessary, zoom in on the emission of interest in order to meet the minimum measurement point requirement.

**Limit:** 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

**Results:** Passed

**Notes:** Measurements were taken for OFDM MCS15 with 20 MHz and 40 MHz channel bandwidths at the low, middle and high channels of operation. EUT was set to transmit continuously with a 100% duty cycle.

Measurements were taken using the power settings used with the 8 dBi gain antenna (highest usable conducted output power).

Per Cambium Networks request, measurements were only performed on output port 0.


Date: 21.JAN.2014 10:35:14

Date: 21.JAN.2014 10:14:03

|            |                                                                  |                                |  |
|------------|------------------------------------------------------------------|--------------------------------|--|
| Test Date: | 01-21-2014                                                       |                                |  |
| Company:   | Cambium Networks                                                 |                                |  |
| EUT:       | EPMP 2.4 GHz AP    MAC: 000456C1A853                             |                                |  |
| Test:      | Maximum Power Spectral Density level in the fundamental emission |                                |  |
| Operator:  | Craig B                                                          |                                |  |
| Comment:   | High Channel: Frequency = 2462 MHz                               |                                |  |
|            | Output Power Setting = 17.5                                      | 20 MHz channel BW              |  |
|            | RBW = 100 kHz                                                    | VBW = 300 kHz                  |  |
|            | Span = 1.5 x DTS bandwidth                                       | Detector = RMS                 |  |
|            | Sweep = auto couple                                              | Trace mode: average 200 traces |  |
|            | Output port 0                                                    |                                |  |
|            | Limit: +8 dBm / 3 kHz                                            |                                |  |

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB

$$\text{PSD} = -4.74 \text{ dBm} + 3 \text{ dB (MIMO)} = -1.74 \text{ dBm} / 100 \text{ kHz}$$

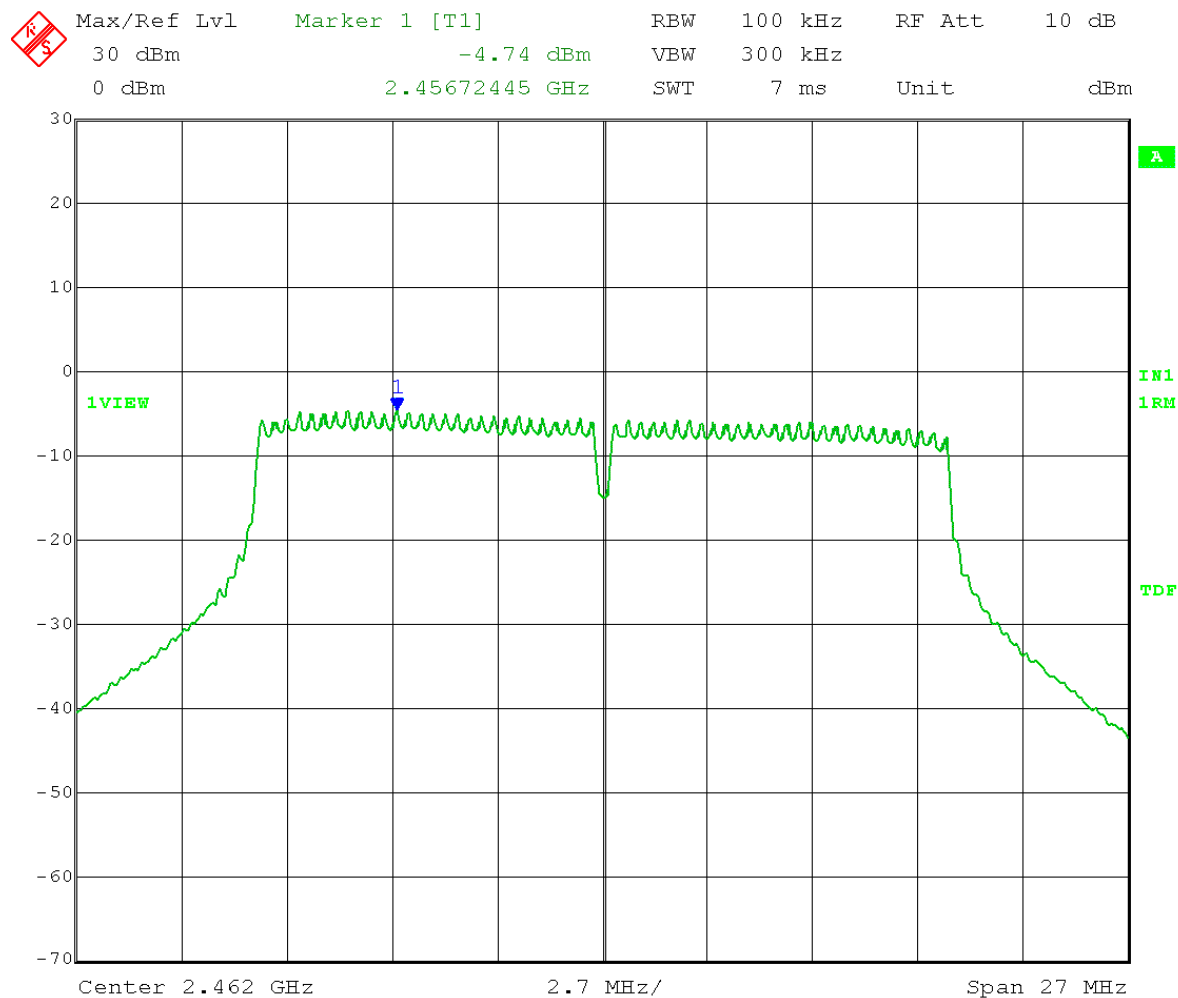


Date: 21.JAN.2014 10:40:53

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB




Zoom in on the emission of interest and reduce the span in order to meet the minimum measurement point requirement:

$$\text{PSD} = -11.09 \text{ dBm} + 3 \text{ dB (MIMO)} = -8.09 \text{ dBm} / 100 \text{ kHz}$$

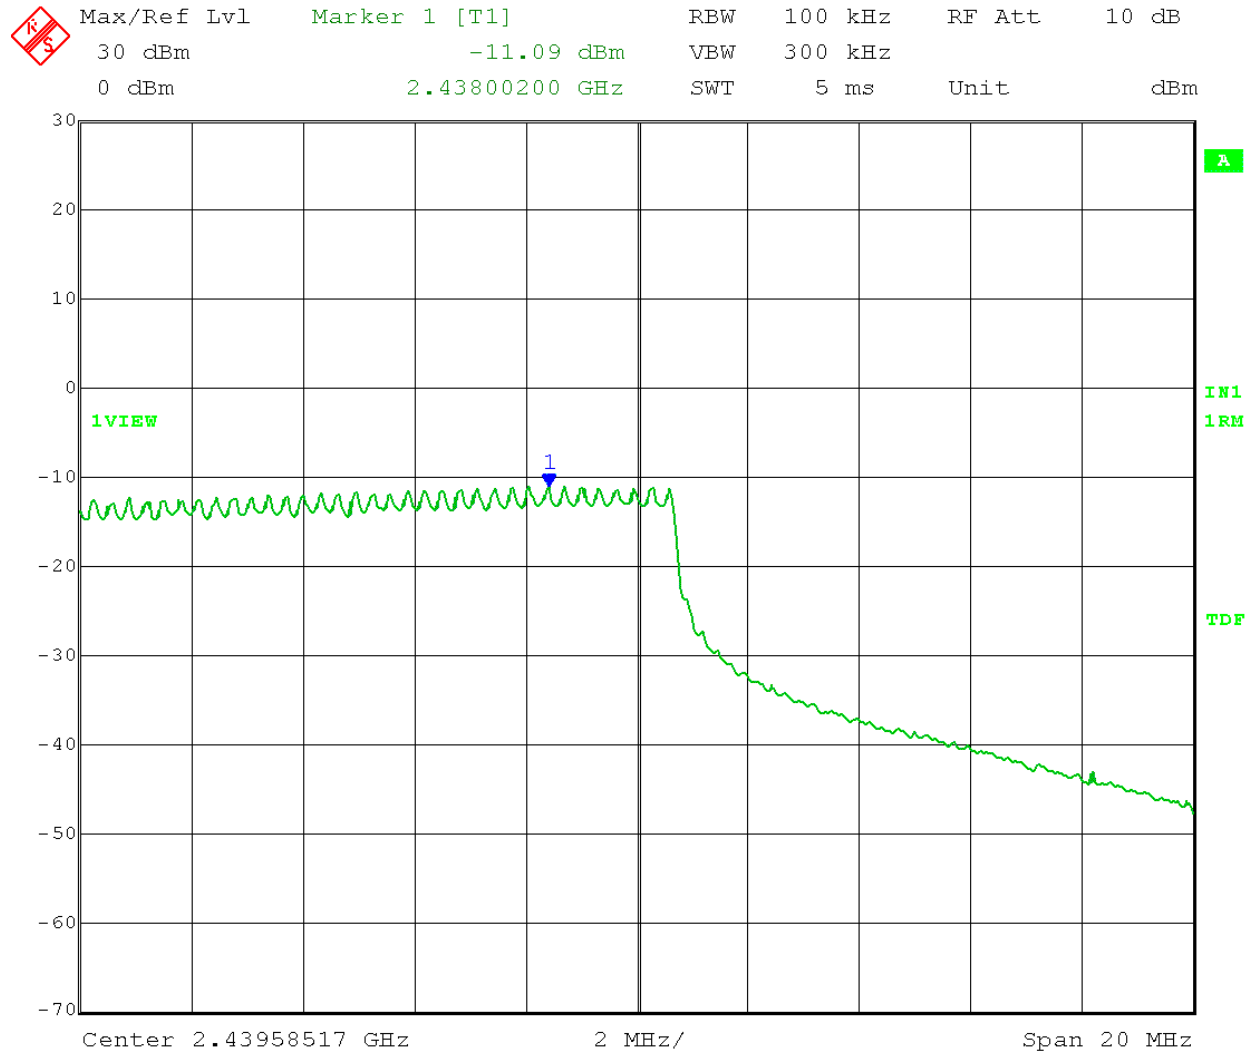


Date:    21.JAN.2014    11:05:42

MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 $= 10 \log(2) = 3$  dB



Zoom in on the emission of interest and reduce the span in order to meet the minimum measurement point requirement:


$$\text{PSD} = -6.72 \text{ dBm} + 3 \text{ dB (MIMO)} = -3.72 \text{ dBm} / 100 \text{ kHz}$$

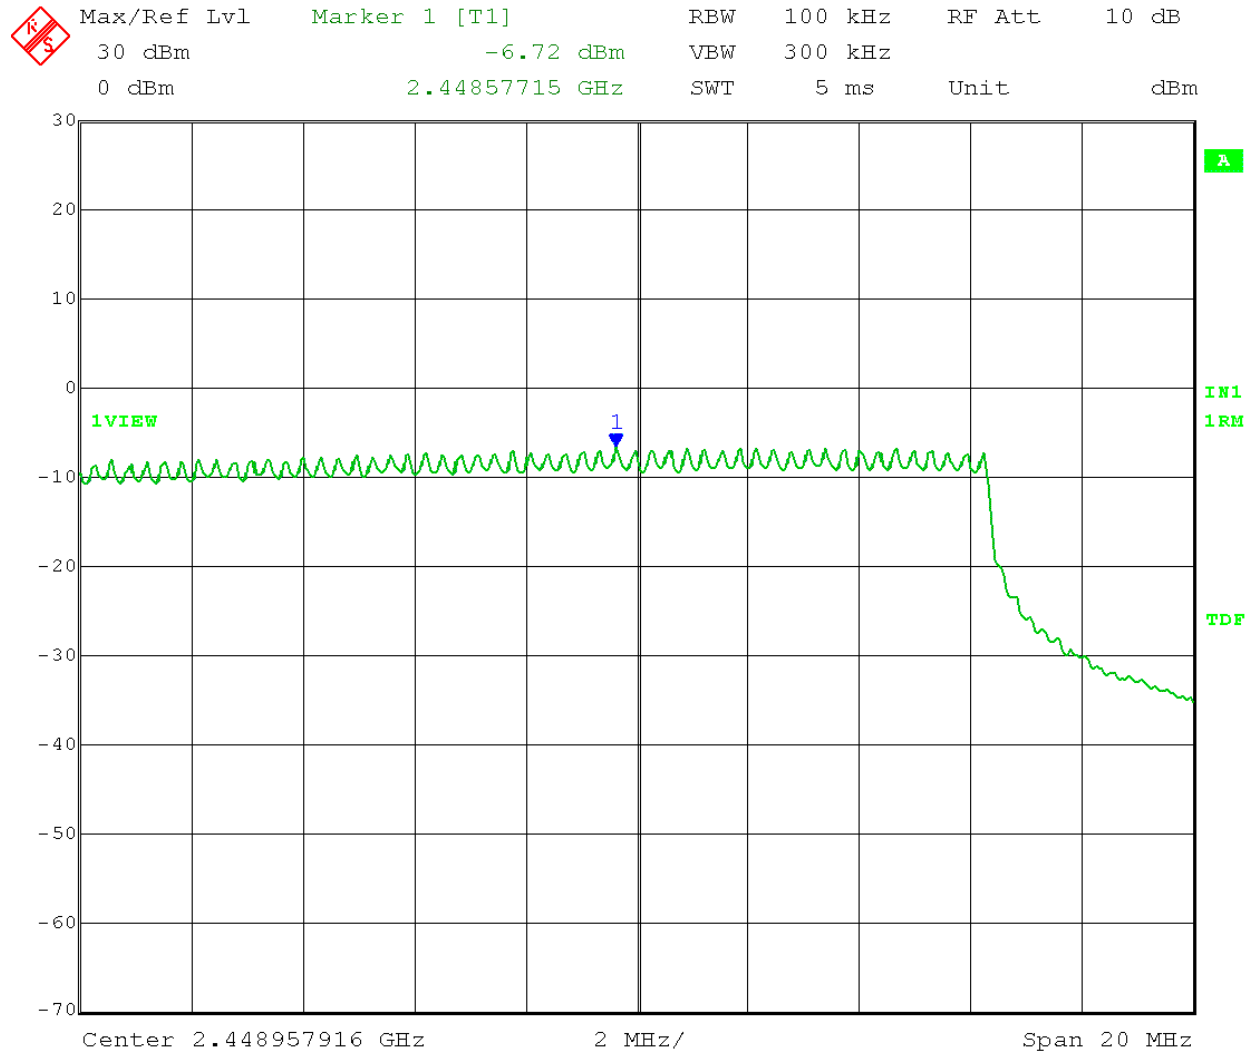

Date:    21.JAN.2014    10:59:30

Test Date: 01-22-2014  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Power Spectral Density level in the fundamental emission  
 Operator: Craig B  
 Comment: High Channel: Frequency = 2452 MHz  
           Output Power Setting = 12                      40 MHz channel BW  
           RBW = 100 kHz                                    VBW = 300 kHz  
           Span = 1.5 x DTS bandwidth                    Detector = RMS  
           Sweep = auto couple                            Trace mode: average 200 traces  
           Output port 0  
           Limit: +8 dBm / 3 kHz


MIMO MATRIX A: Measure-and-sum technique for MIMO with Cross-Polarized antenna:  
 Measure and add  $10 \log(N)$  dB, where N is the number of outputs.  
 =  $10 \log(2) = 3$  dB

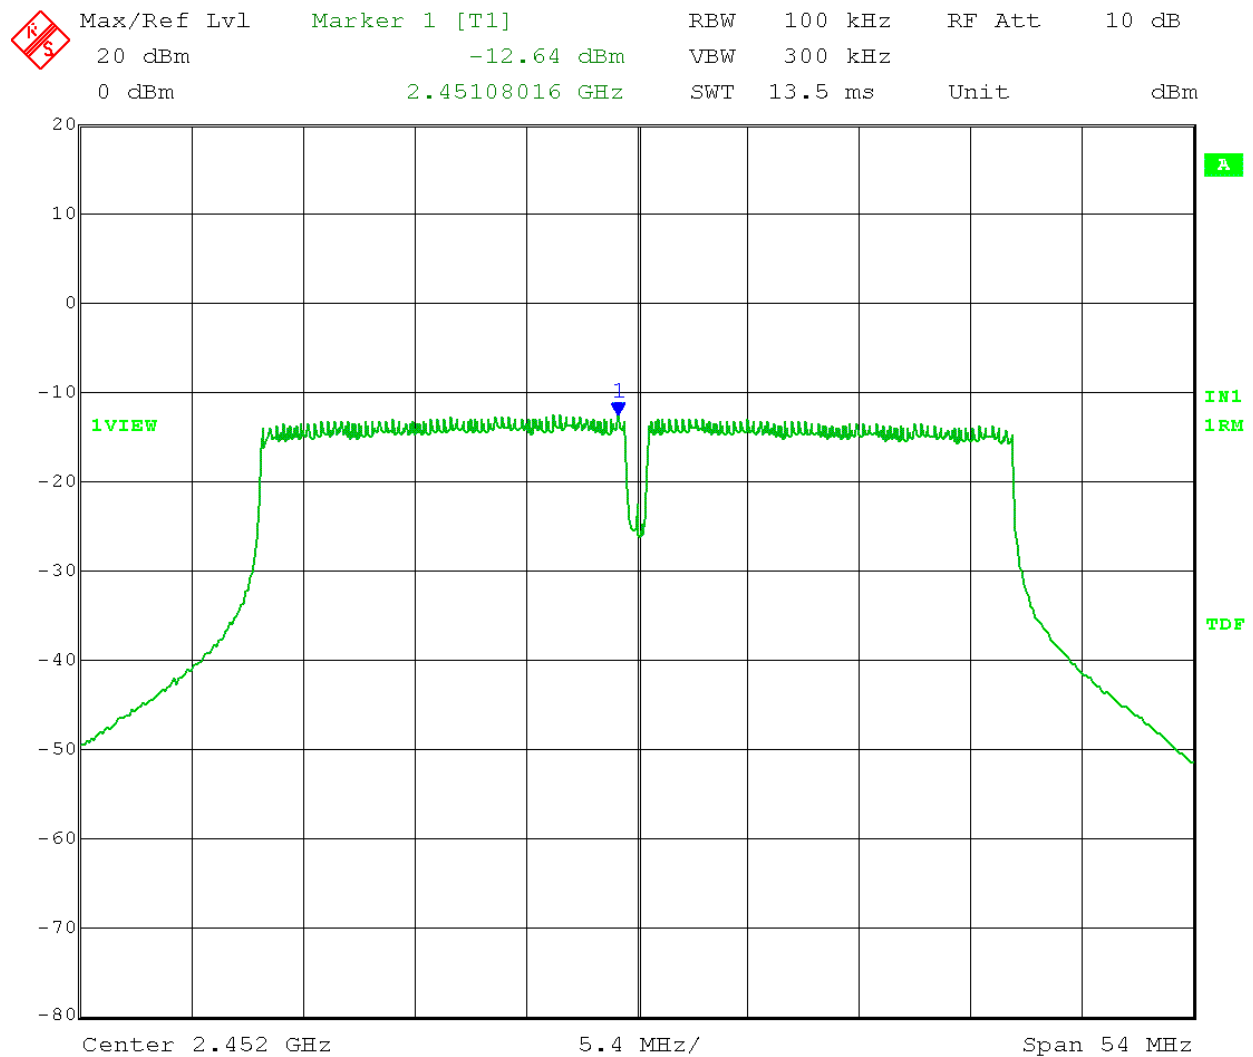

Date: 22.JAN.2014 09:25:49

Zoom in on the emission of interest and reduce the span in order to meet the minimum measurement point requirement:

$$\text{PSD} = -12.60 \text{ dBm} + 3 \text{ dB (MIMO)} = -9.60 \text{ dBm} / 100 \text{ kHz}$$

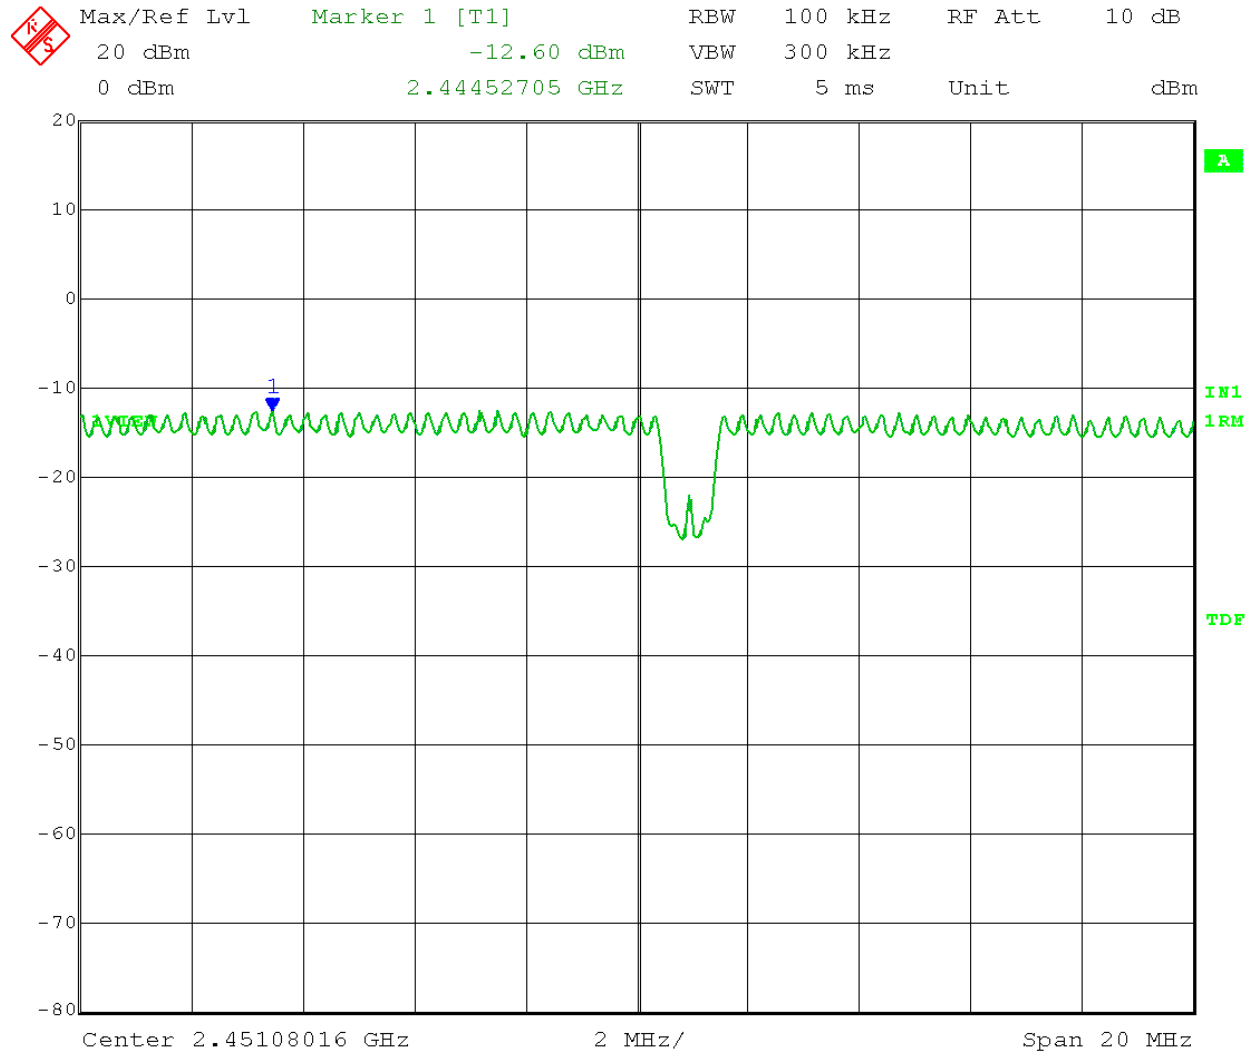

Date:      22.JAN.2014    09:27:07



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## Appendix B – Measurement Data

### B4.0 Maximum Unwanted Emission Levels – Conducted

**Rule Section:** FCC 15.247(d)

**Test Procedure:** FCC KDB 558074 D01 DTS Meas Guidance v03r01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

#### 11.0 Emissions in non-restricted frequency bands

**Description:** RBW = 100 kHz  
VBW  $\geq$  300 kHz  
Span to  $\geq$  1.5 times the *DTS bandwidth* (Reference Level)  
Set the center frequency and span to encompass frequency range to be measured.  
(Emission Level)  
Detector = peak  
Sweep = auto couple  
Trace mode = max hold


Measurements were taken for OFDM MCS15 with 20 MHz and 40 MHz channel bandwidths at the low, middle and high channels of operation. EUT was set to transmit continuously with a 100% duty cycle.

Per Cambium Networks request, measurements were only performed on output port 0.

**Limit:** 30 dB below maximum in-band average PSD level (maximum level in any 100 kHz band). Average output power procedure was used to measure the fundamental emission power.


**Results:** Passed

Test Date: 01-21-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 16.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 3.83 dBm – 30 dB = -26.17 dBm

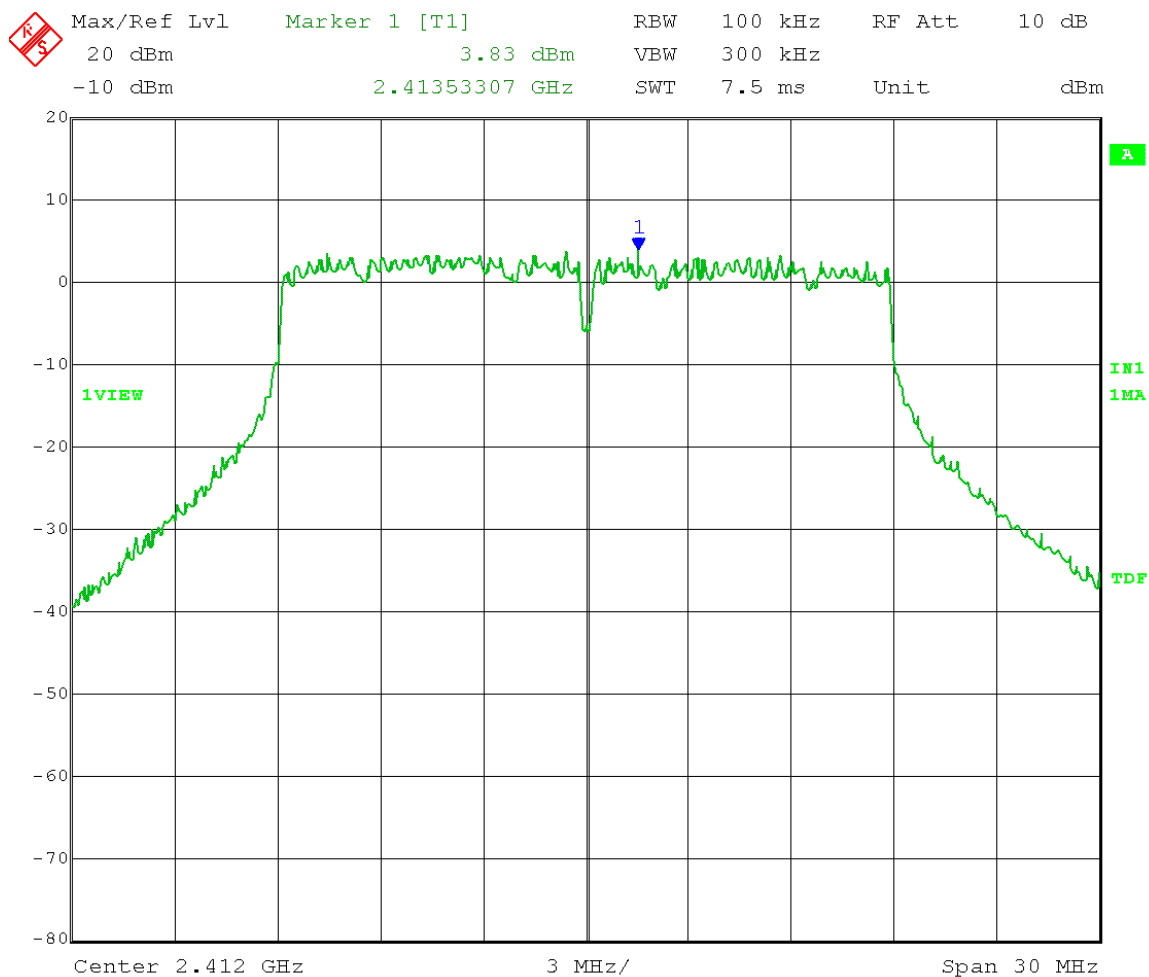


Date: 21.JAN.2014 12:01:34

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 16.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 3.83 dBm – 30 dB = -26.17 dBm  
 Frequency range: 30 – 1000 MHz

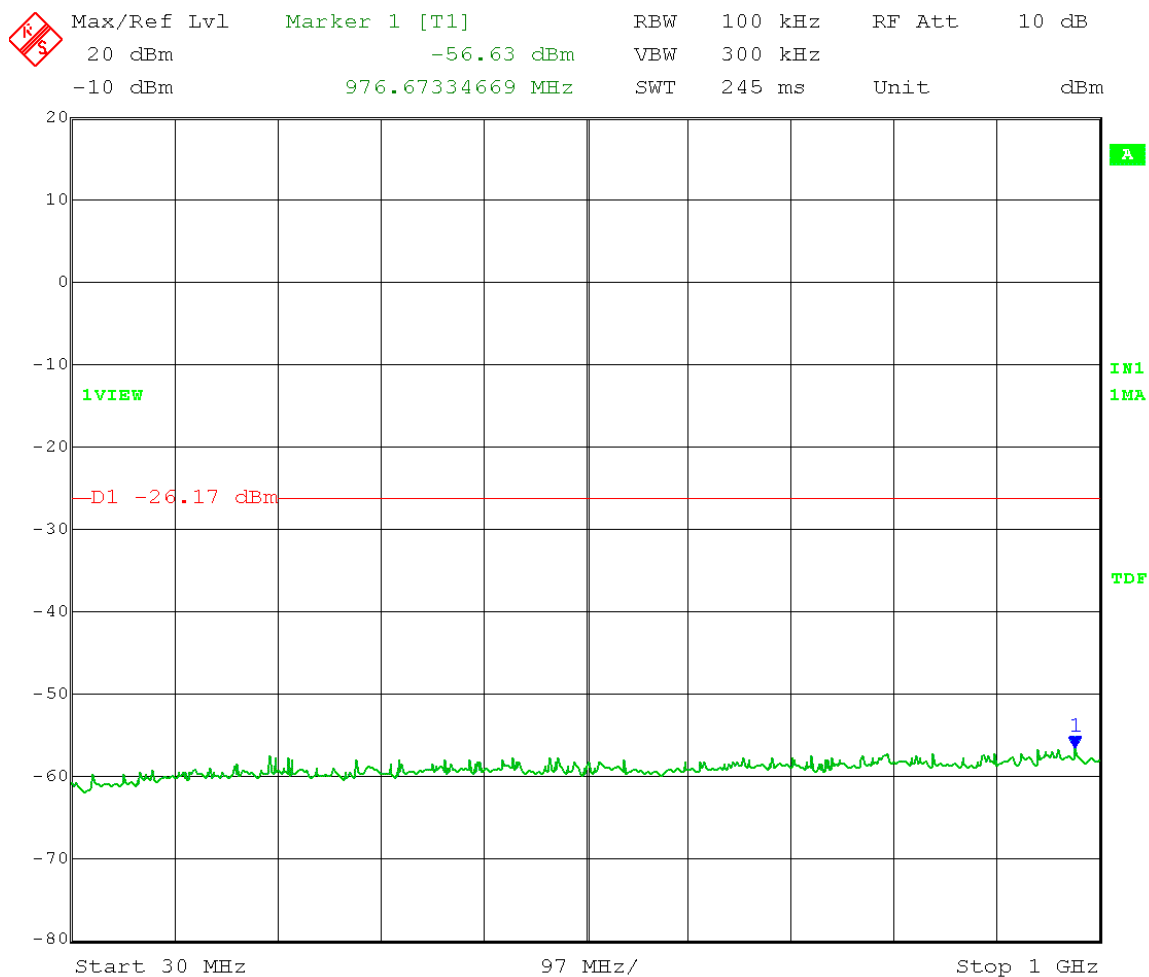


Date: 22.JAN.2014 10:11:17

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 16.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 3.83 dBm – 30 dB = -26.17 dBm  
Frequency range: 1 – 7 GHz

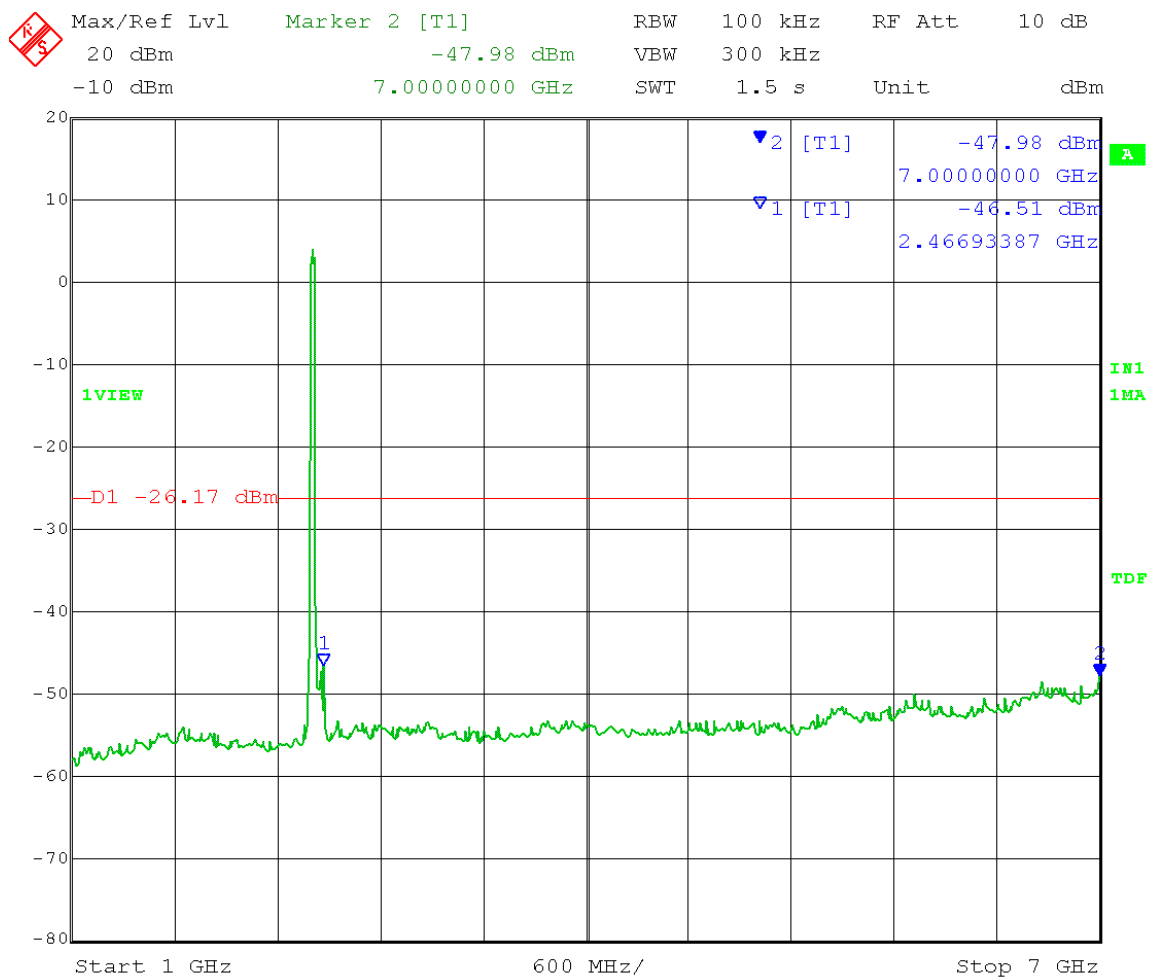


Date: 22.JAN.2014 10:04:17

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 16.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 3.83 dBm – 30 dB = -26.17 dBm  
Frequency range: 7 – 16 GHz

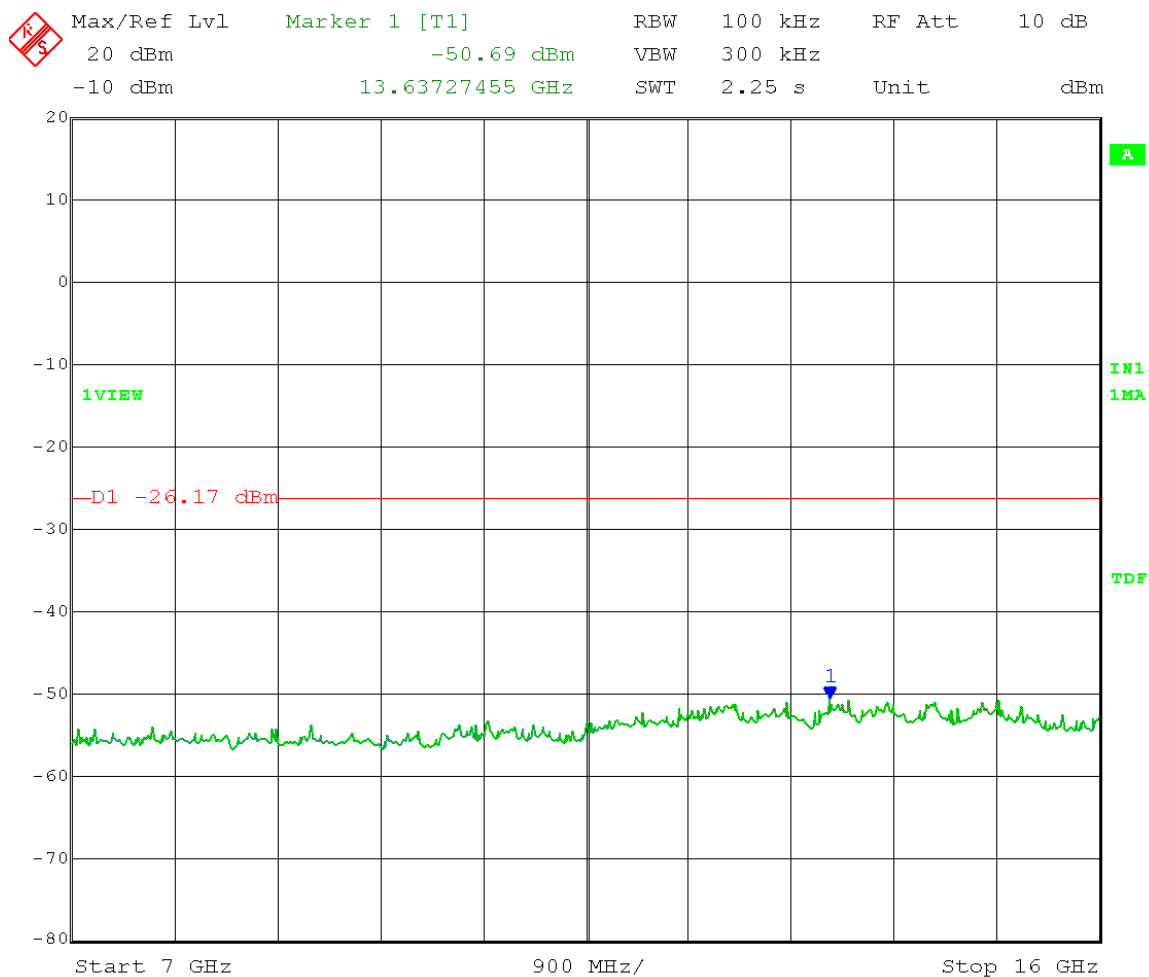


Date: 22.JAN.2014 10:06:06

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 16.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 3.83 dBm – 30 dB = -26.17 dBm  
 Frequency range: 16 – 25 GHz

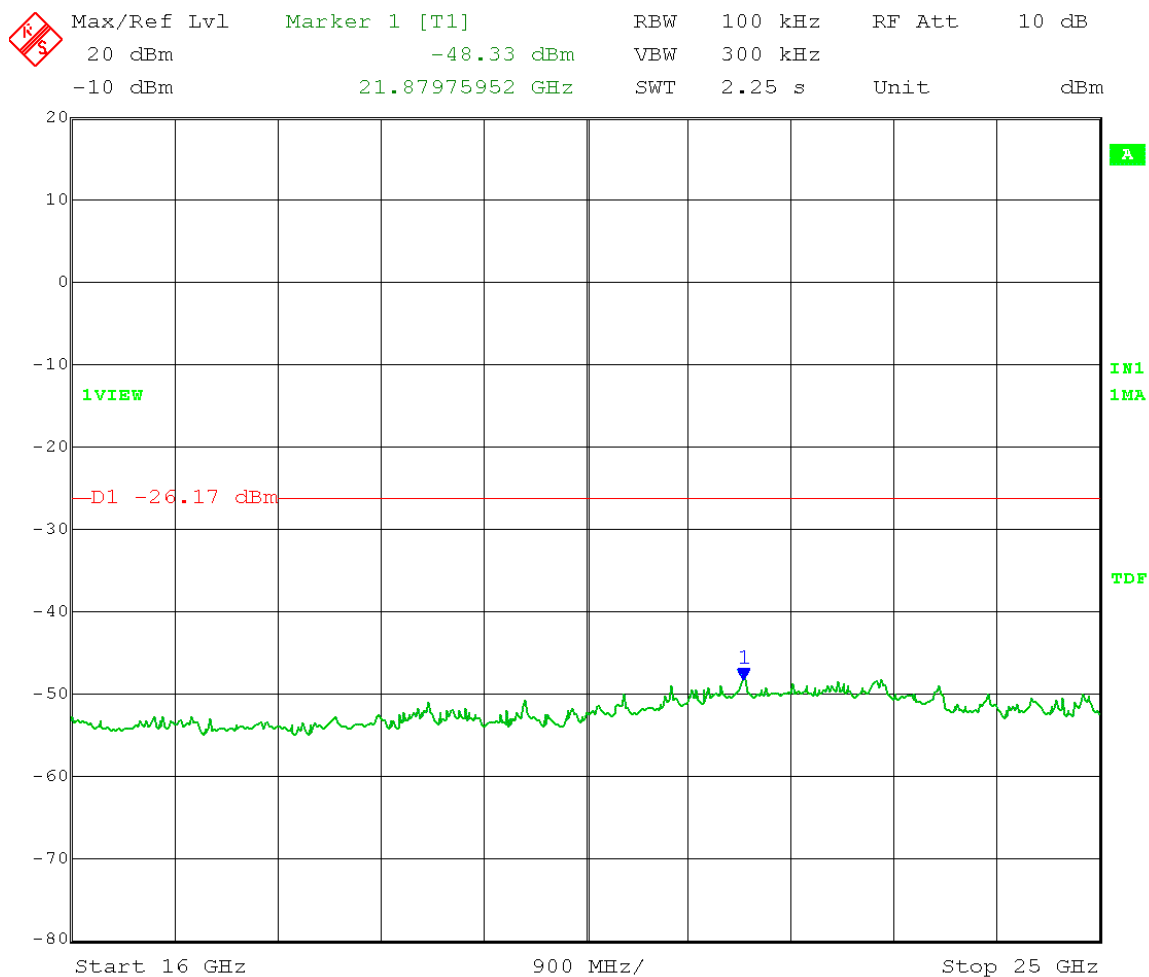


Date: 22.JAN.2014 10:08:54

Test Date: 01-21-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 26 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 13.70 dBm – 30 dB = -16.30 dBm

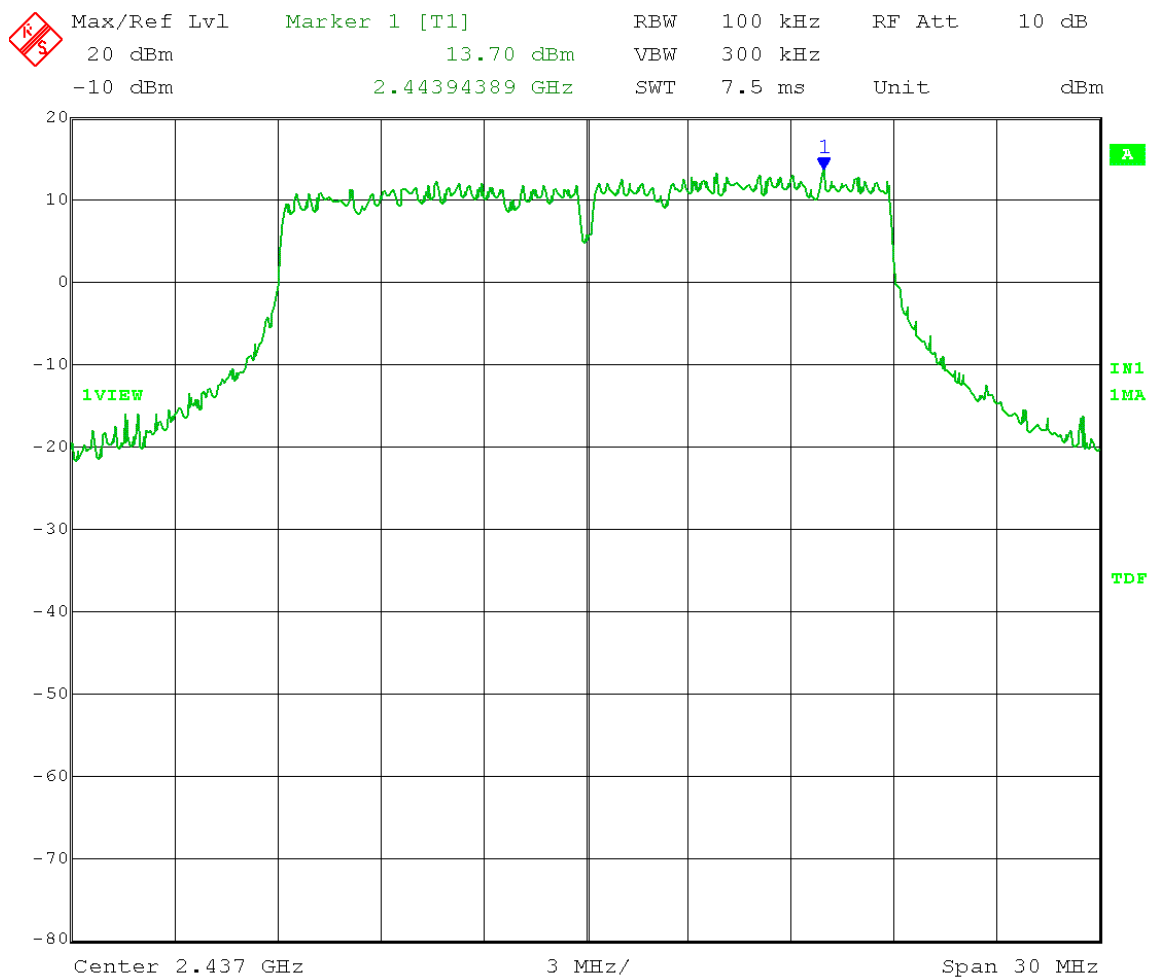


Date: 21.JAN.2014 11:57:17

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 26 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 13.70 dBm – 30 dB = -16.30 dBm  
 Frequency range: 30 – 1000 MHz

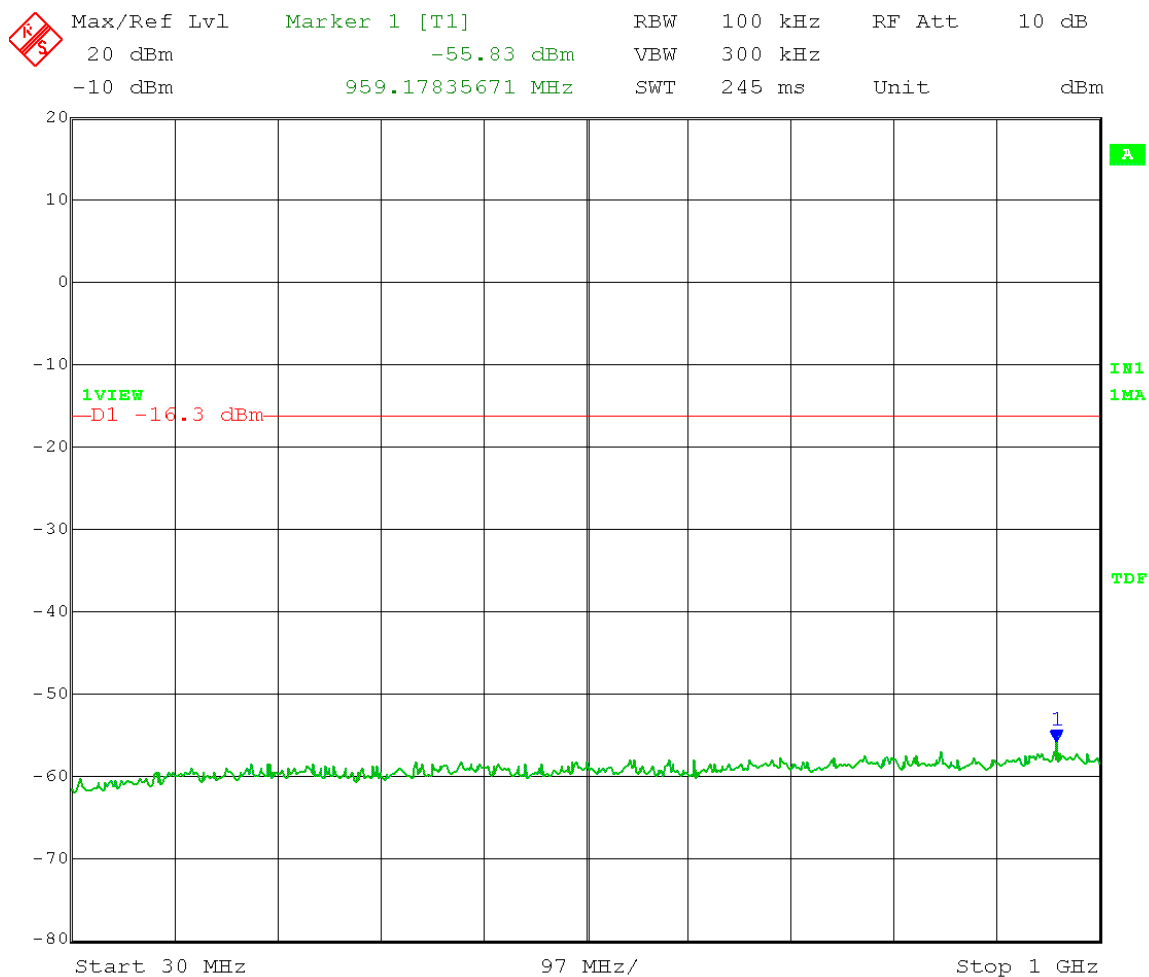


Date: 22.JAN.2014 10:19:45

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 26 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 13.70 dBm – 30 dB = -16.30 dBm  
 Frequency range: 1 – 7 GHz

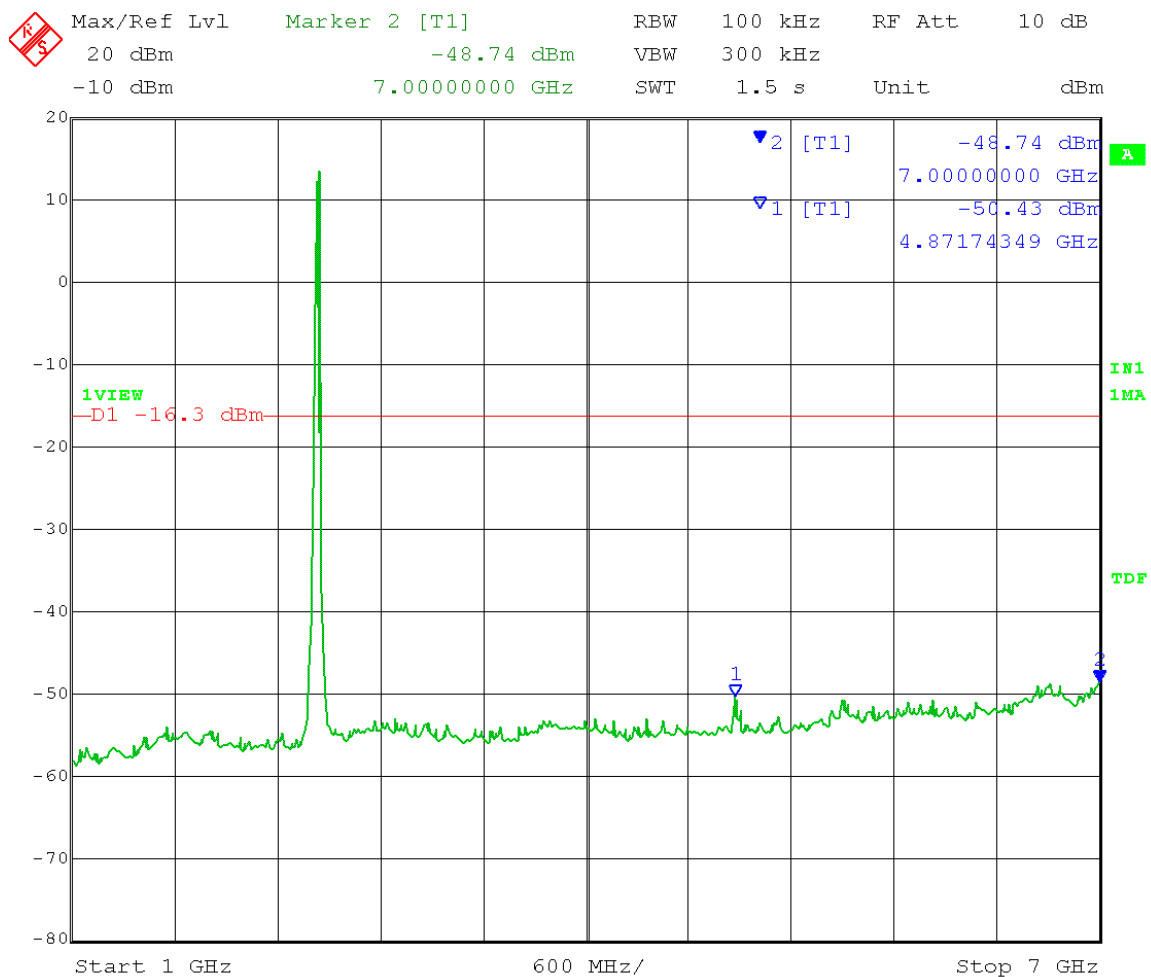


Date: 22.JAN.2014 10:14:36

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 26 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 13.70 dBm – 30 dB = -16.30 dBm  
 Frequency range: 7 – 16 GHz

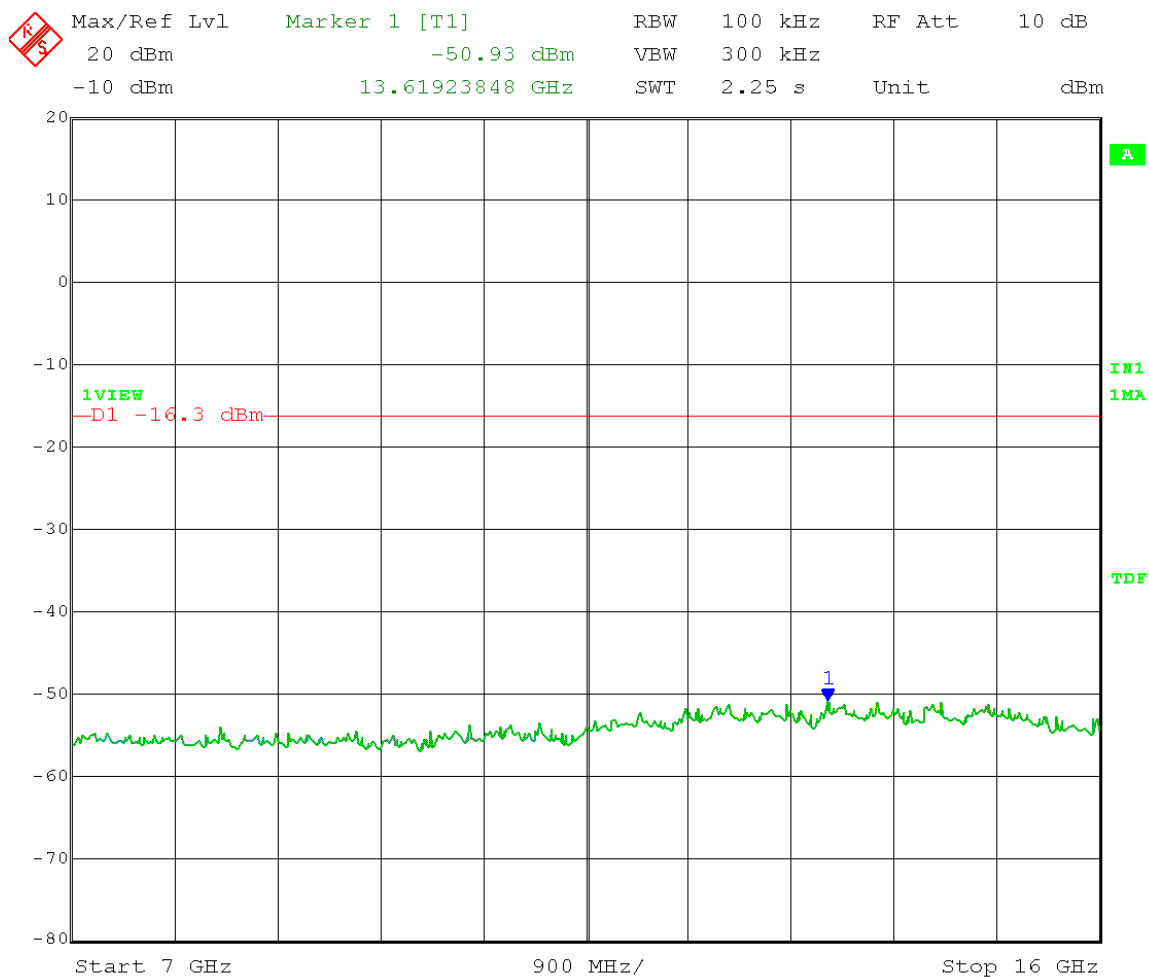


Date: 22.JAN.2014 10:16:12

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 26 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 13.70 dBm – 30 dB = -16.30 dBm  
 Frequency range: 16 – 25 GHz

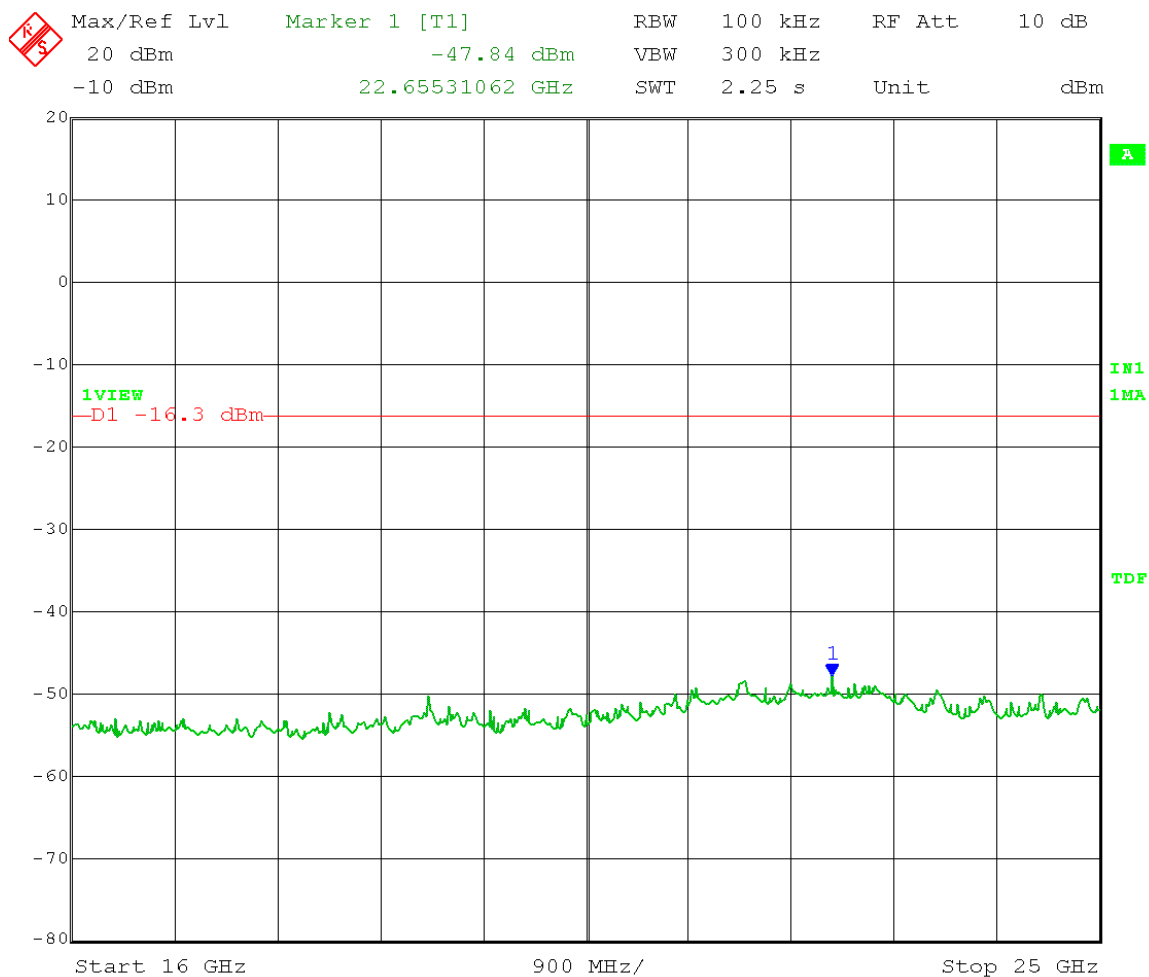


Date: 22.JAN.2014 10:17:49

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 17.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 6.10 dBm - 30 dB = -23.9 dBm

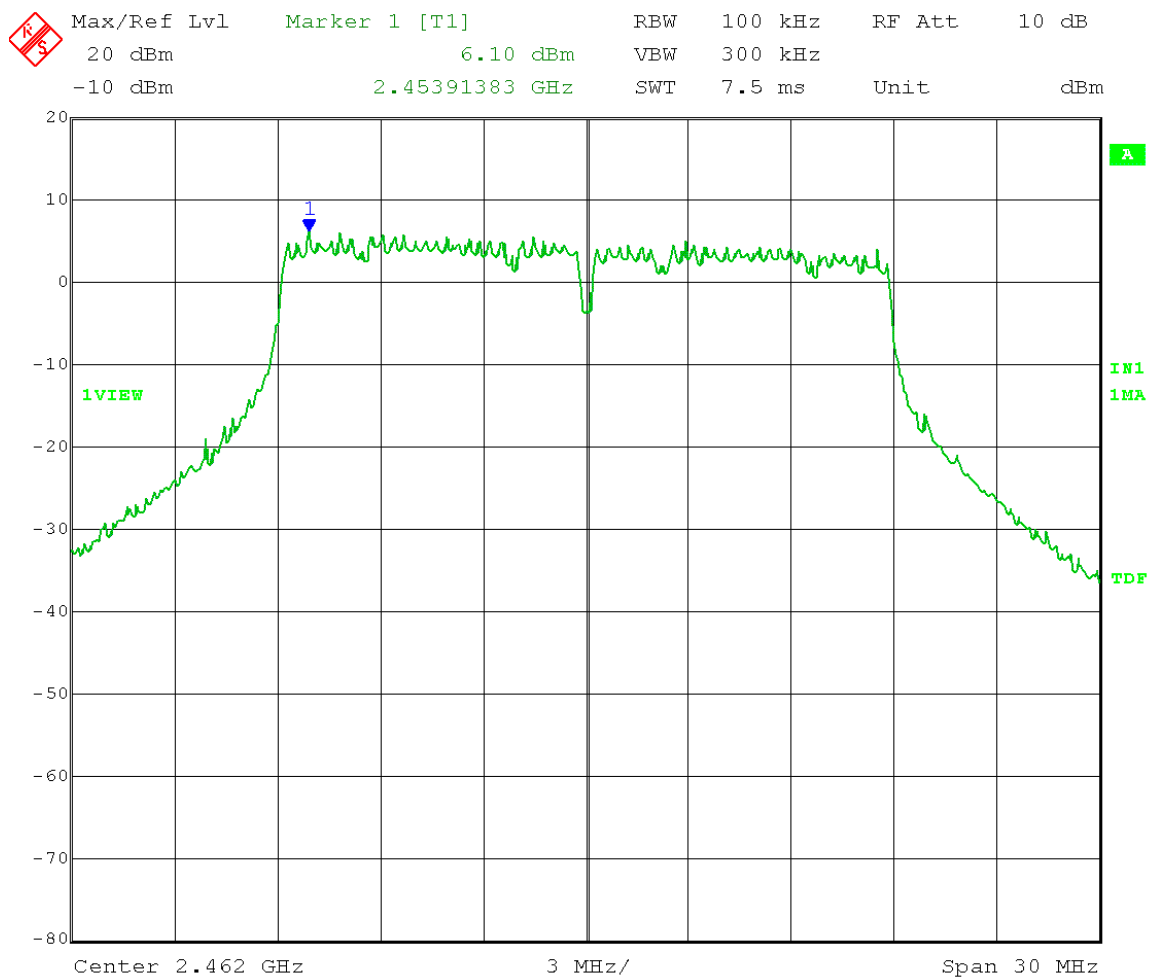


Date: 22.JAN.2014 09:47:00

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 17.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 6.10 dBm – 30 dB = -23.90 dBm  
 Frequency range: 30 – 1000 MHz

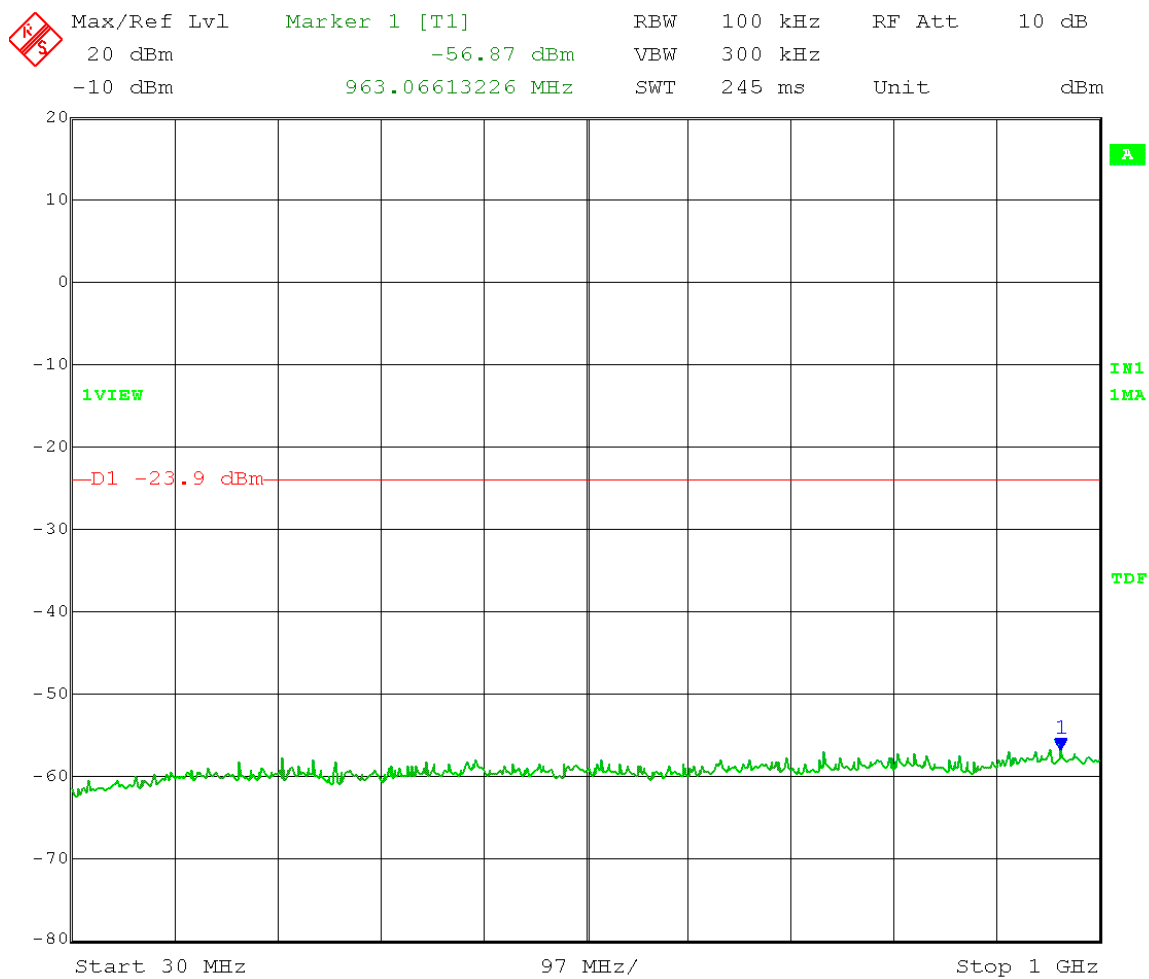


Date: 22.JAN.2014 10:00:00

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 17.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 6.10 dBm – 30 dB = -23.90 dBm  
Frequency range: 1 – 7 GHz

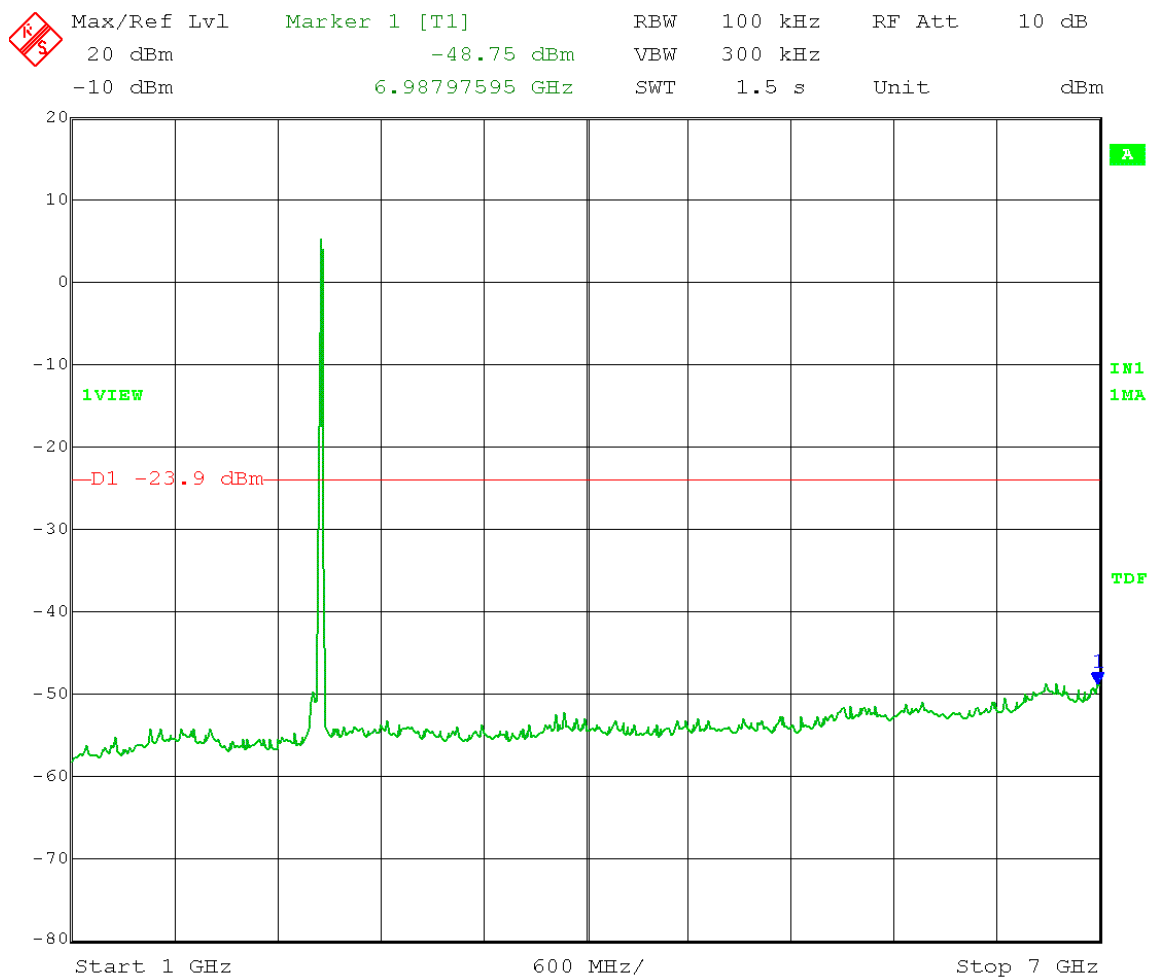


Date: 22.JAN.2014 09:52:00

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 17.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 6.10 dBm – 30 dB = -23.90 dBm  
 Frequency range: 7 – 16 GHz

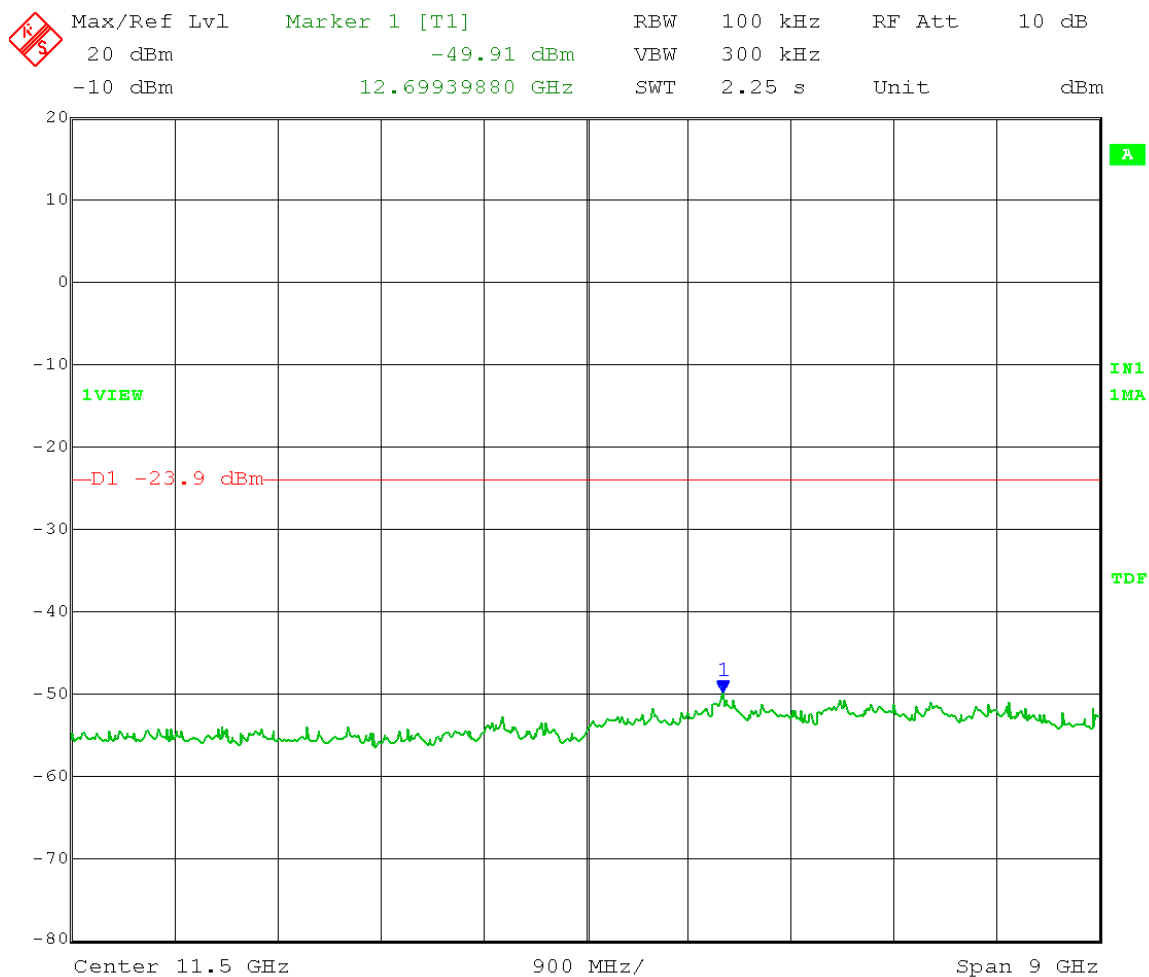


Date: 22.JAN.2014 09:56:20

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 17.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 6.10 dBm - 30 dB = -23.90 dBm  
Frequency range: 16 - 25 GHz

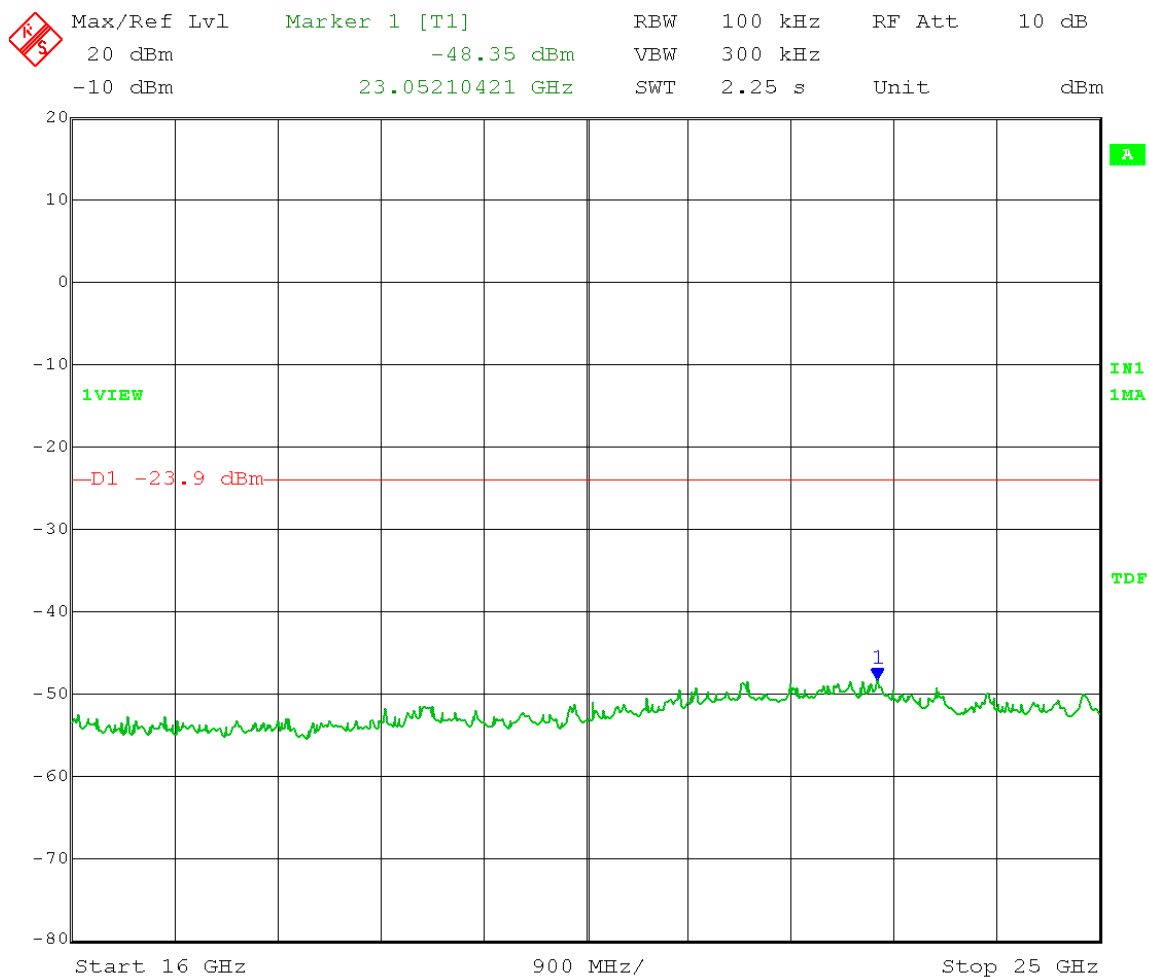


Date: 22.JAN.2014 09:58:26

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 13 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -1.54 dBm – 30 dB = -31.54 dBm

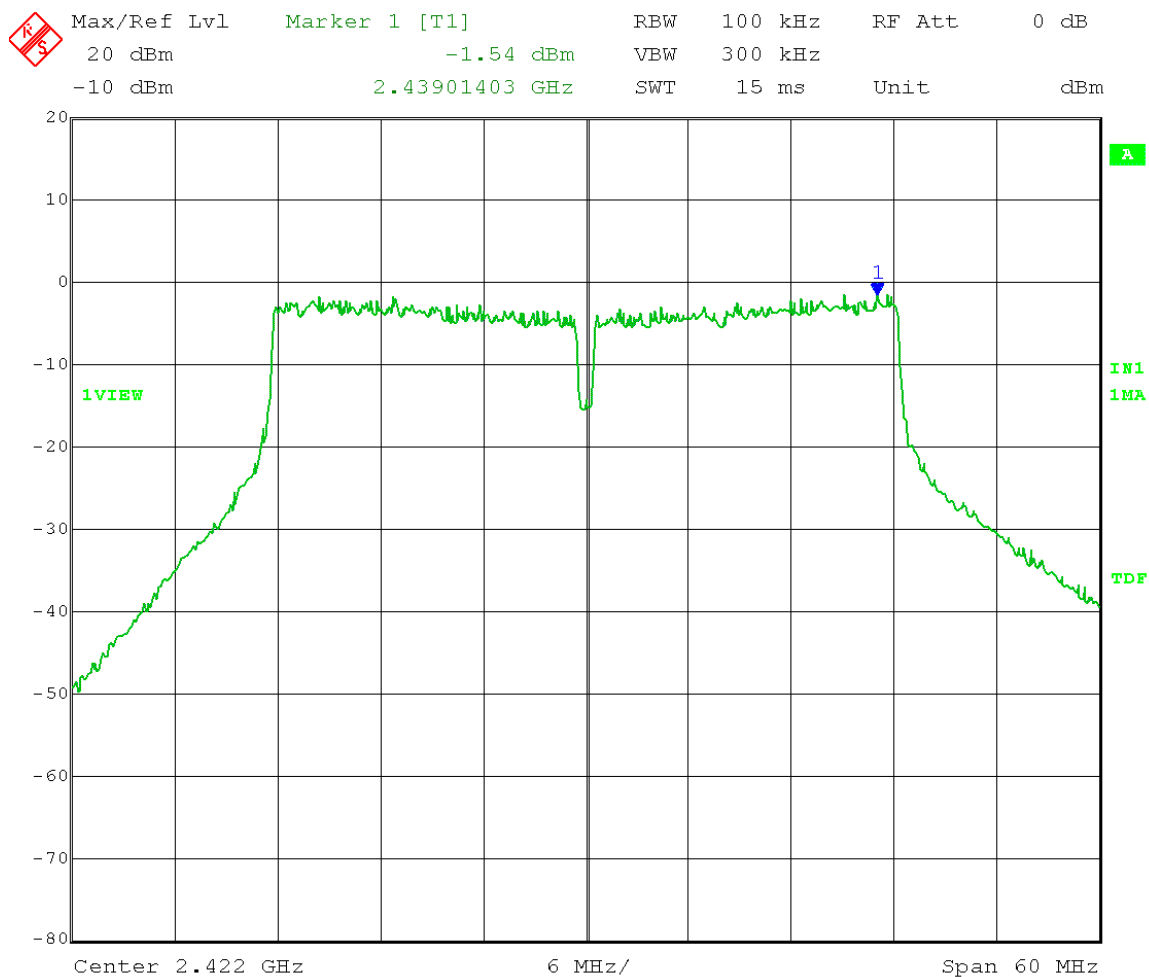


Date: 22.JAN.2014 11:30:49

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 13 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -1.54 dBm – 30 dB = -31.54 dBm  
 Frequency Range: 30 – 1000 MHz

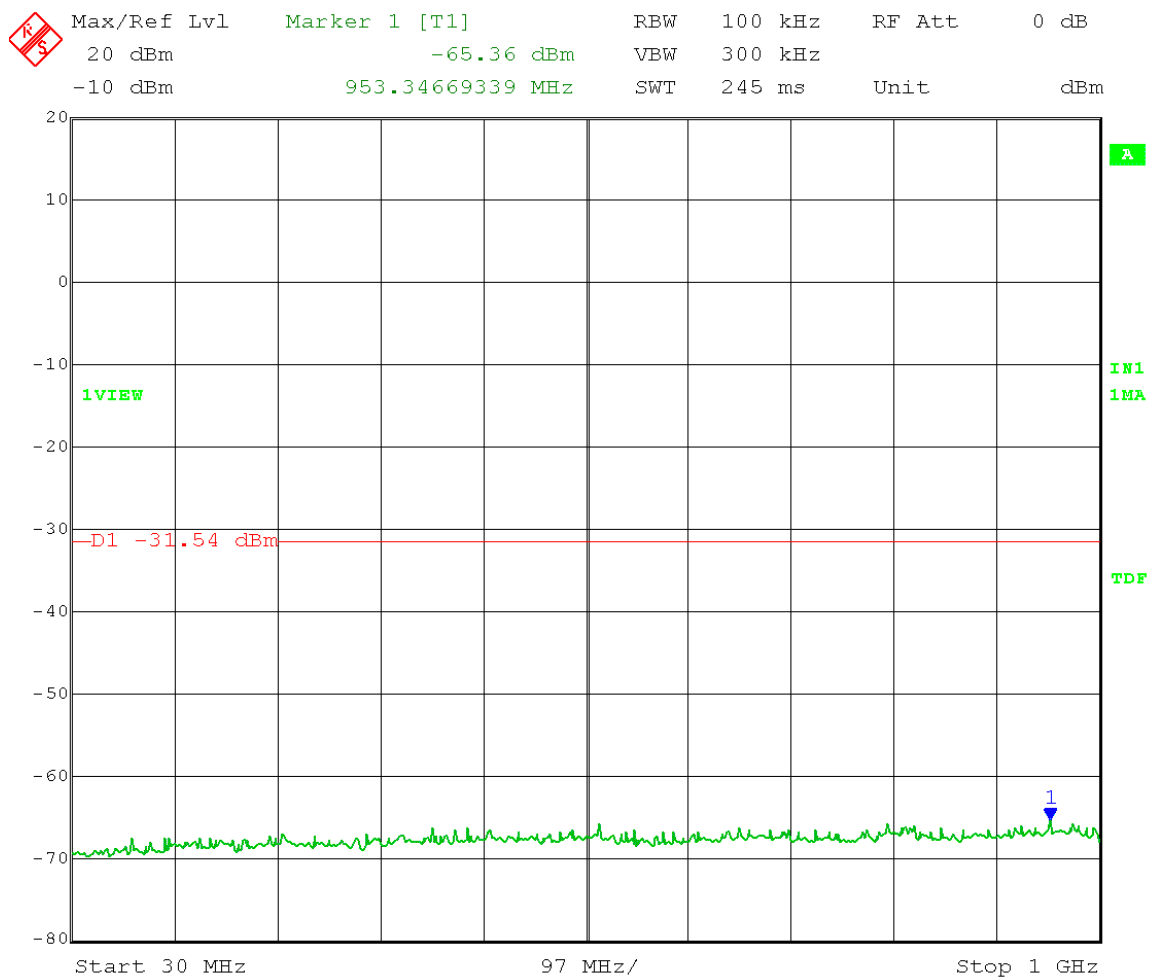


Date: 22.JAN.2014 11:38:15

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 13 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -1.54 dBm - 30 dB = -31.54 dBm  
Frequency Range: 1 - 7 GHz

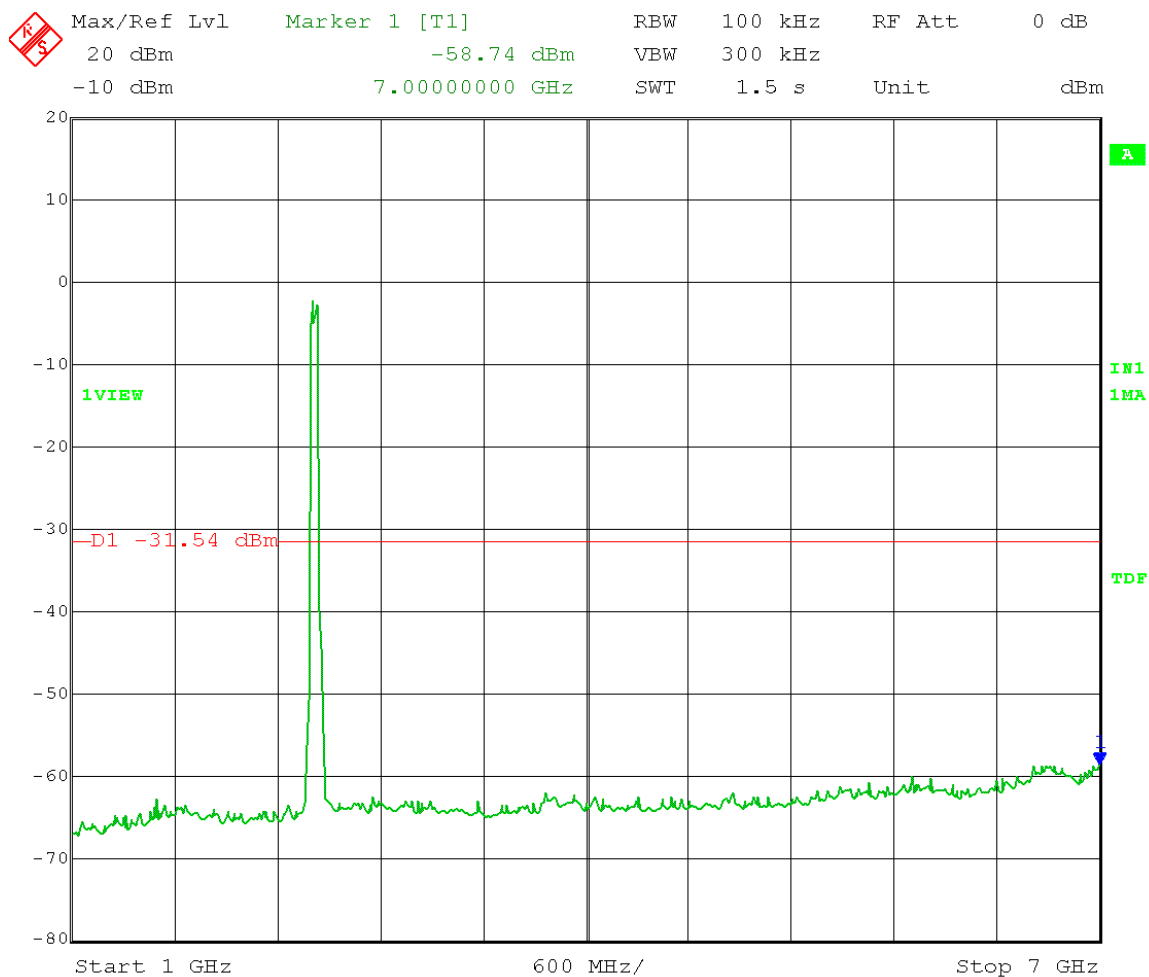


Date: 22.JAN.2014 11:32:59

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 13 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -1.54 dBm – 30 dB = -31.54 dBm  
 Frequency Range: 7 – 16 GHz

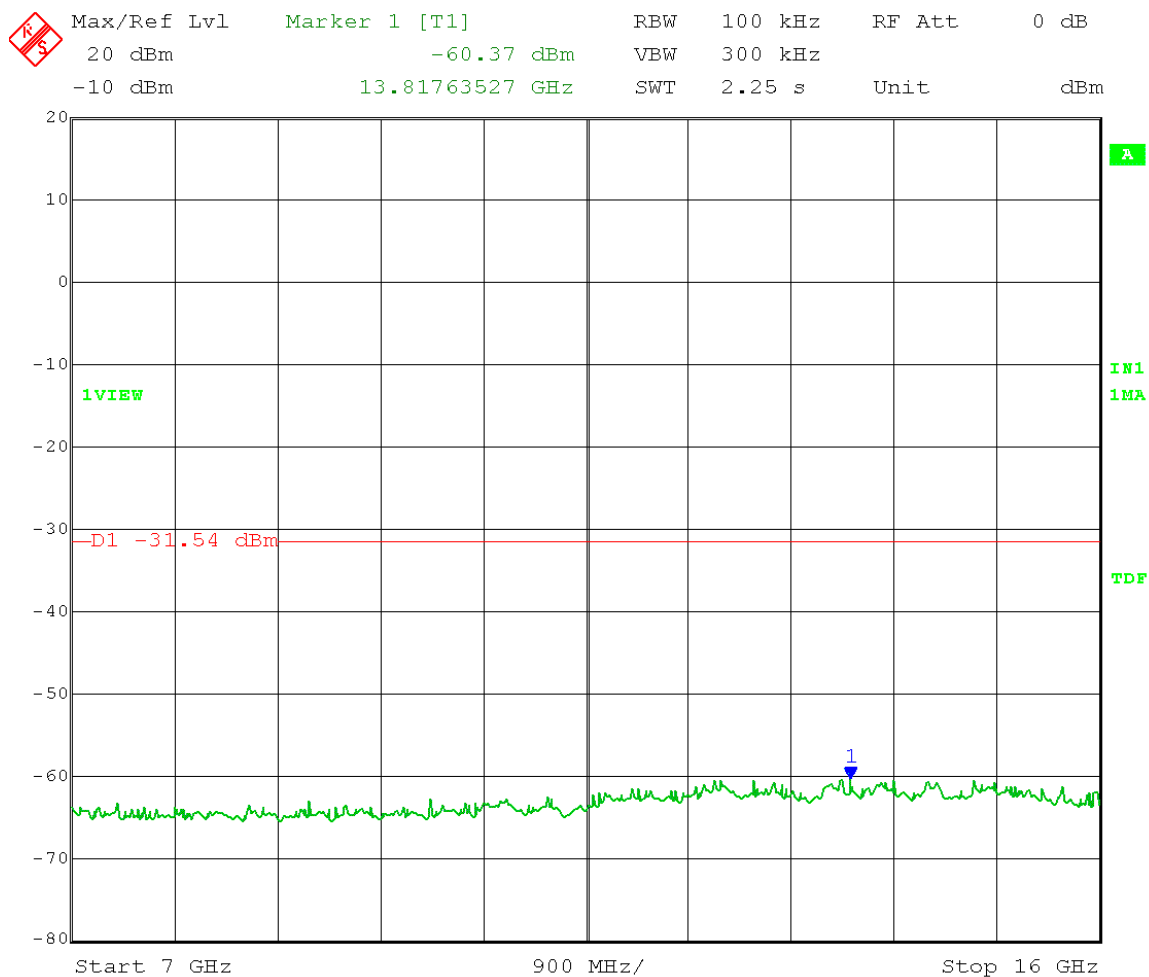


Date: 22.JAN.2014 11:34:38

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 13 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -1.54 dBm - 30 dB = -31.54 dBm  
 Frequency Range: 16 - 25 GHz

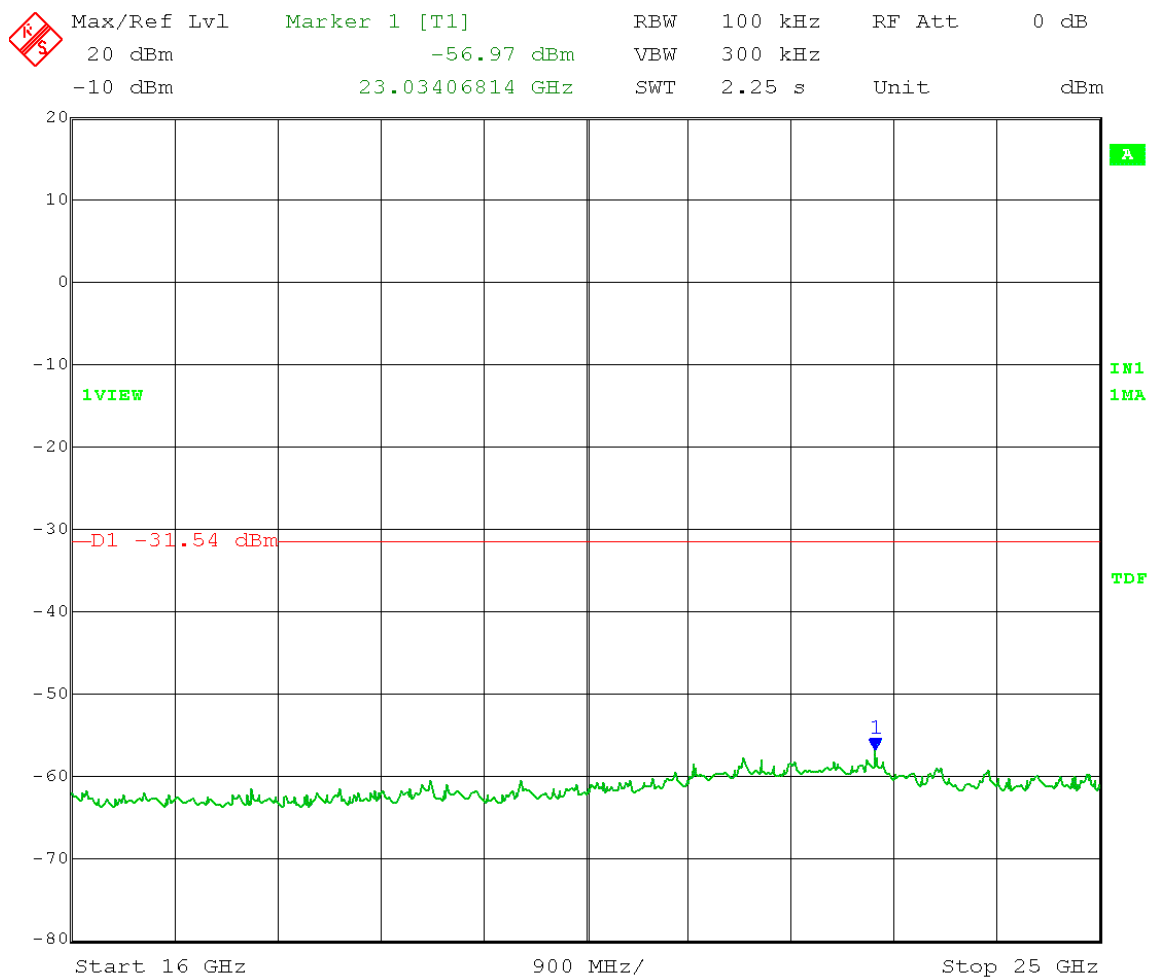


Date: 22.JAN.2014 11:36:24

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 17 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 2.45 dBm – 30 dB = -27.55 dBm

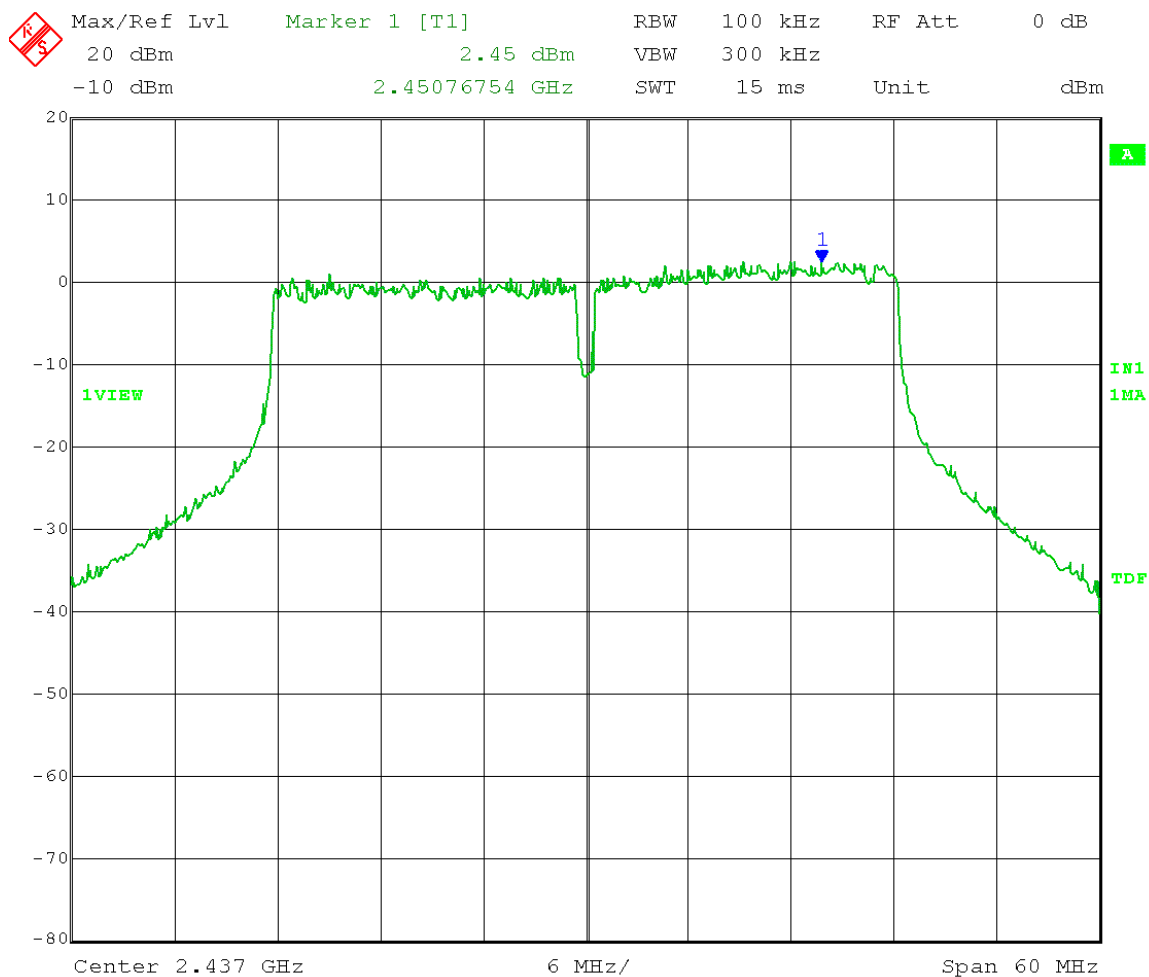


Date: 22.JAN.2014 12:33:46

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 2.45 dBm – 30 dB = -27.55 dBm  
 Frequency Range: 30 – 1000 MHz

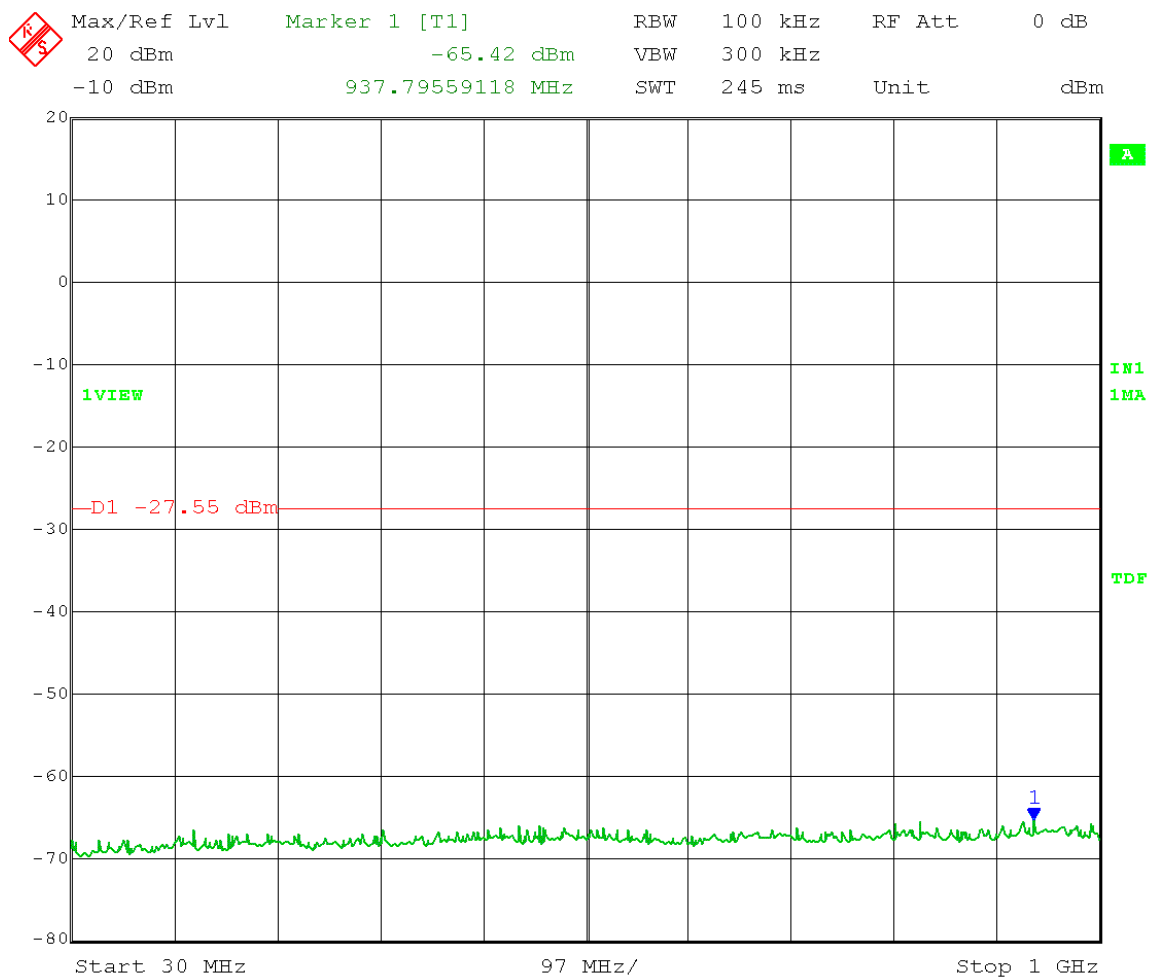


Date: 22.JAN.2014 12:43:13

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 2.45 dBm – 30 dB = -27.55 dBm  
 Frequency Range: 1 – 7 GHz

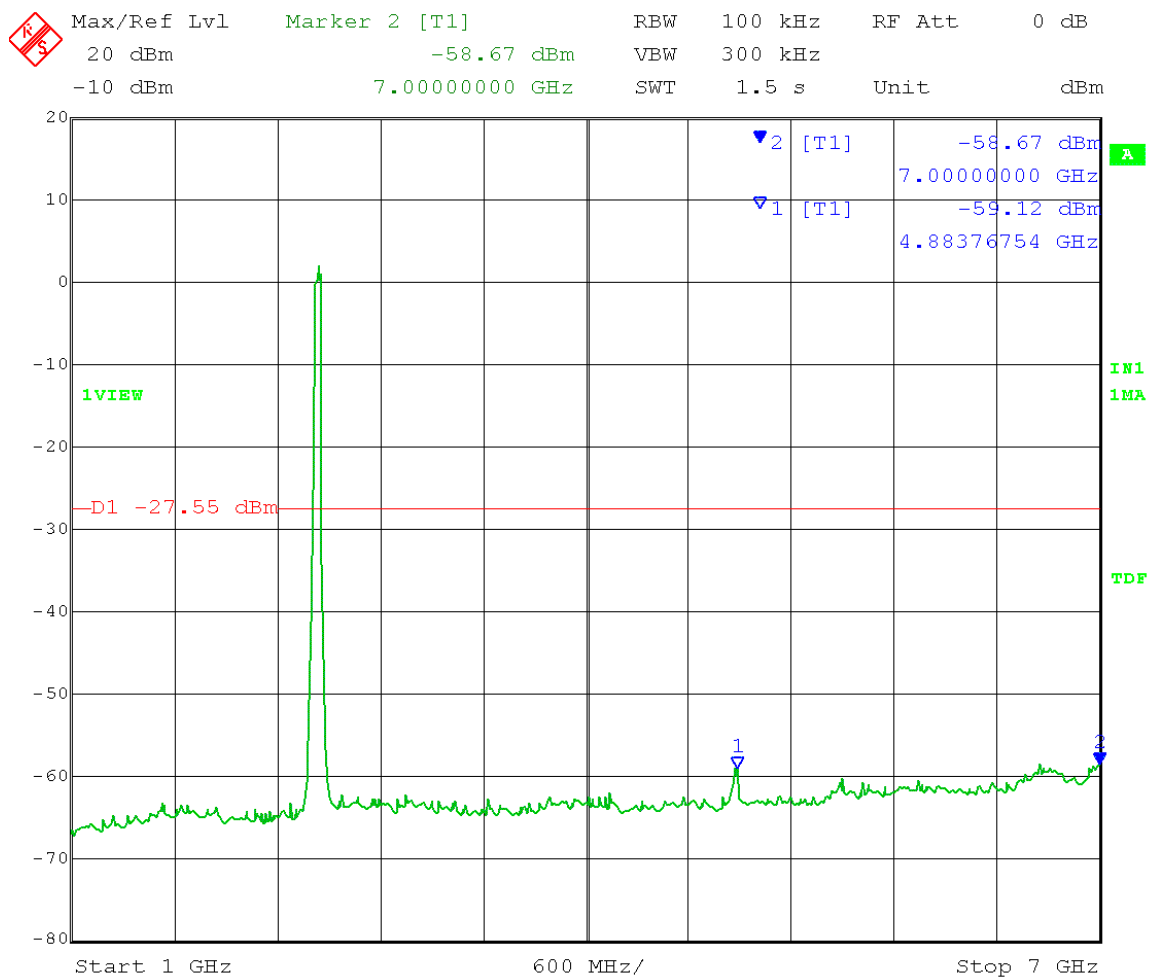


Date: 22.JAN.2014 12:37:53

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 2.45 dBm – 30 dB = -27.55 dBm  
 Frequency Range: 7 – 16 GHz

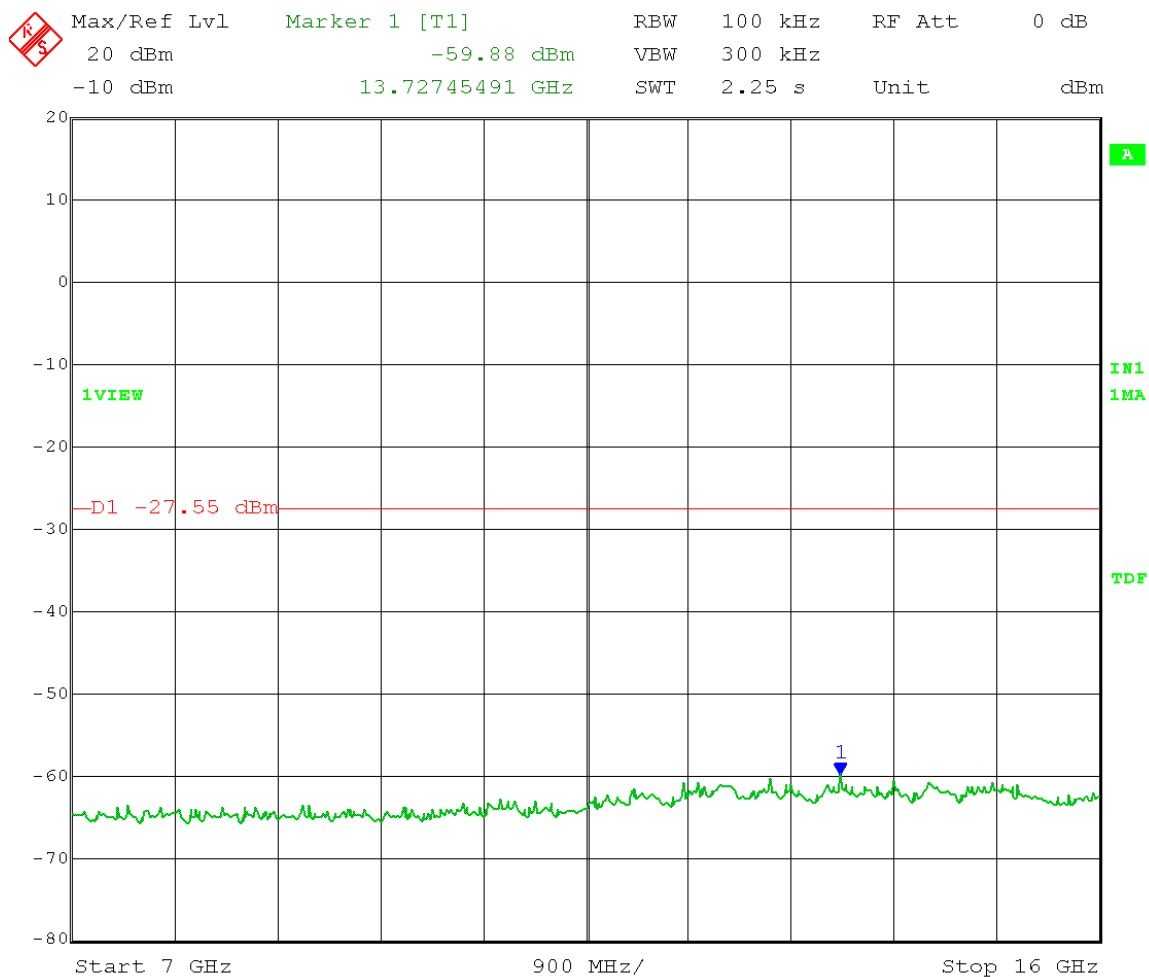


Date: 22.JAN.2014 12:39:34

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 2.45 dBm – 30 dB = -27.55 dBm  
 Frequency Range: 16 – 25 GHz

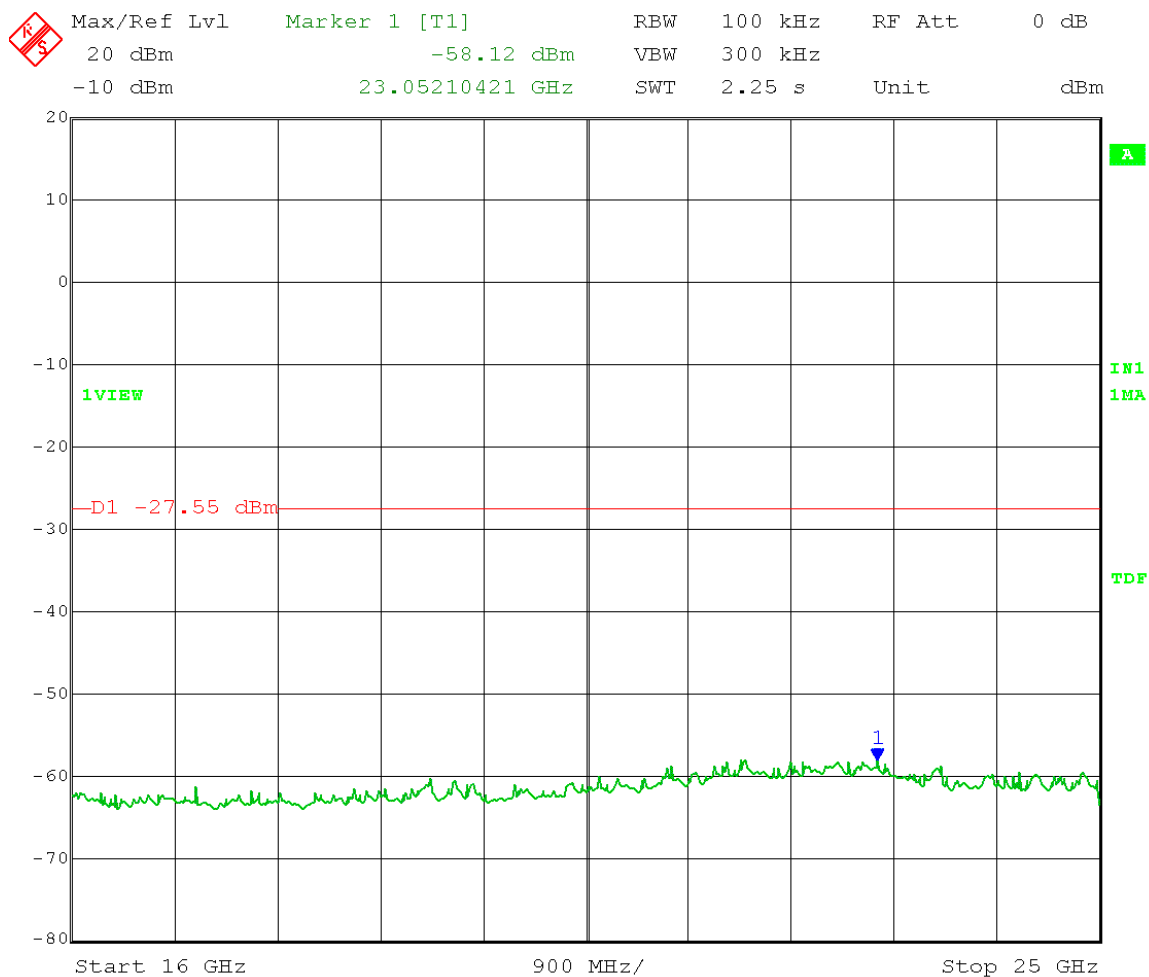


Date: 22.JAN.2014 12:41:30

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2452 MHz  
Output Power Setting 12 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -2.51 dBm – 30 dB = -32.51 dBm

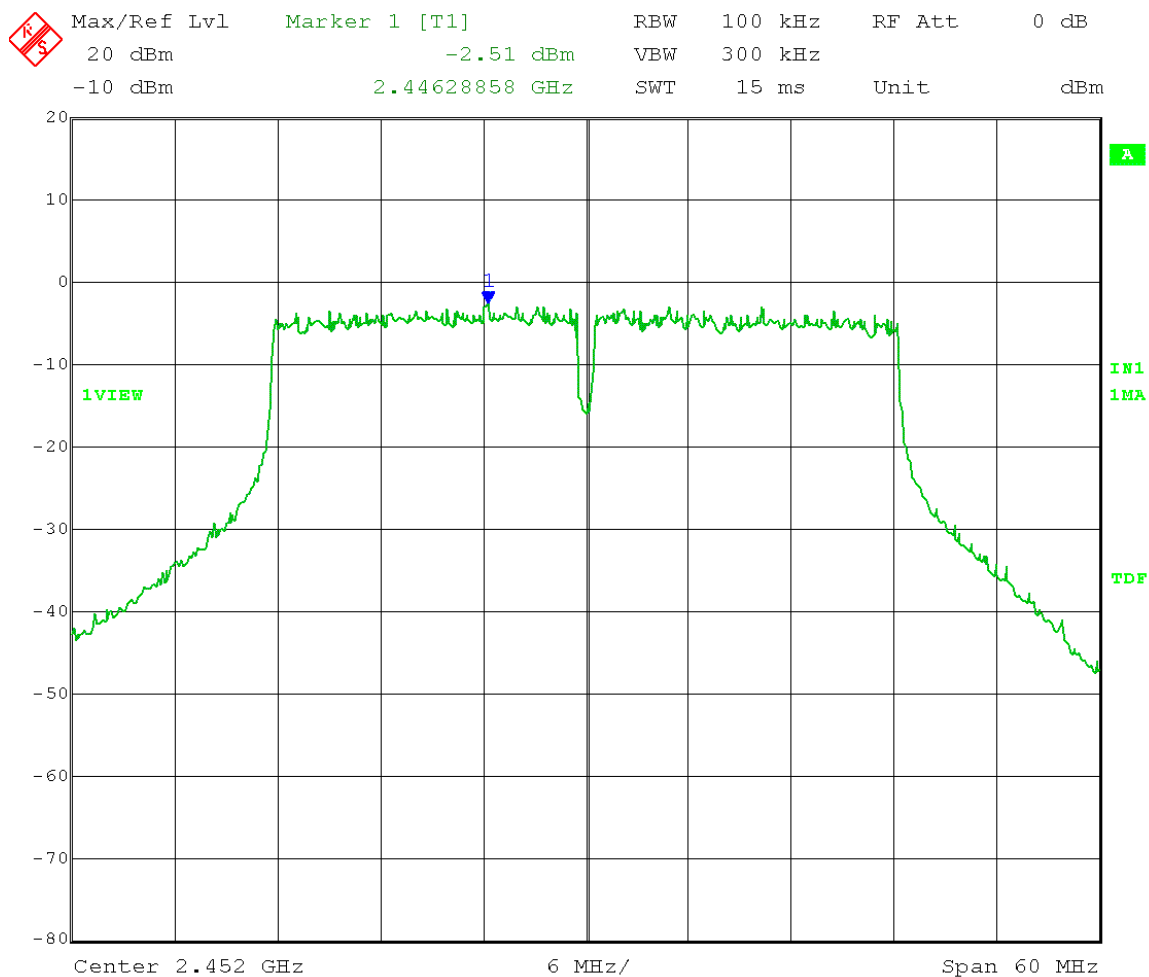


Date: 22.JAN.2014 11:09:39

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2452 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.51 dBm - 30 dB = -32.51 dBm  
 Frequency Range: 30 - 1000 MHz

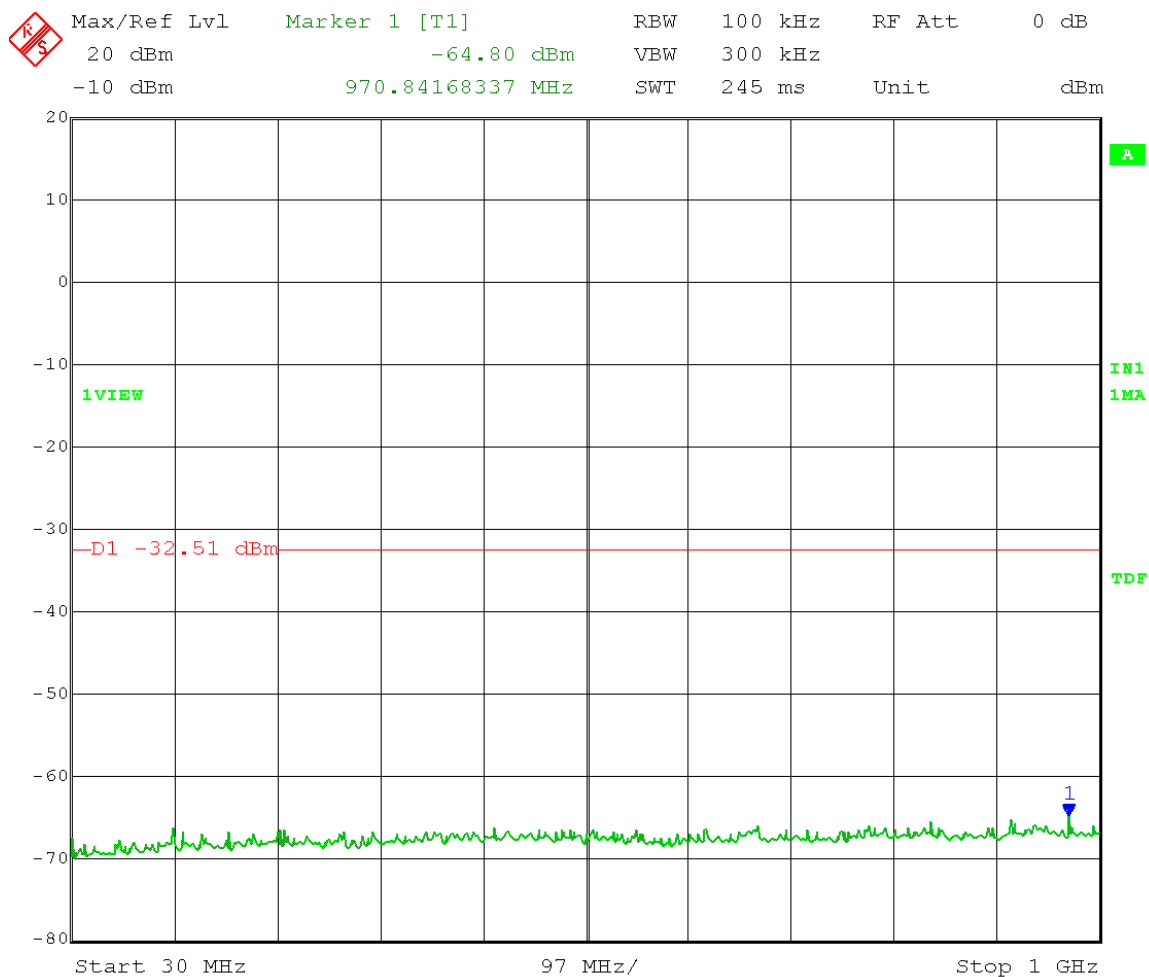


Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2452 MHz  
Output Power Setting 12 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -2.51 dBm - 30 dB = -32.51 dBm  
Frequency Range: 1 - 7 GHz

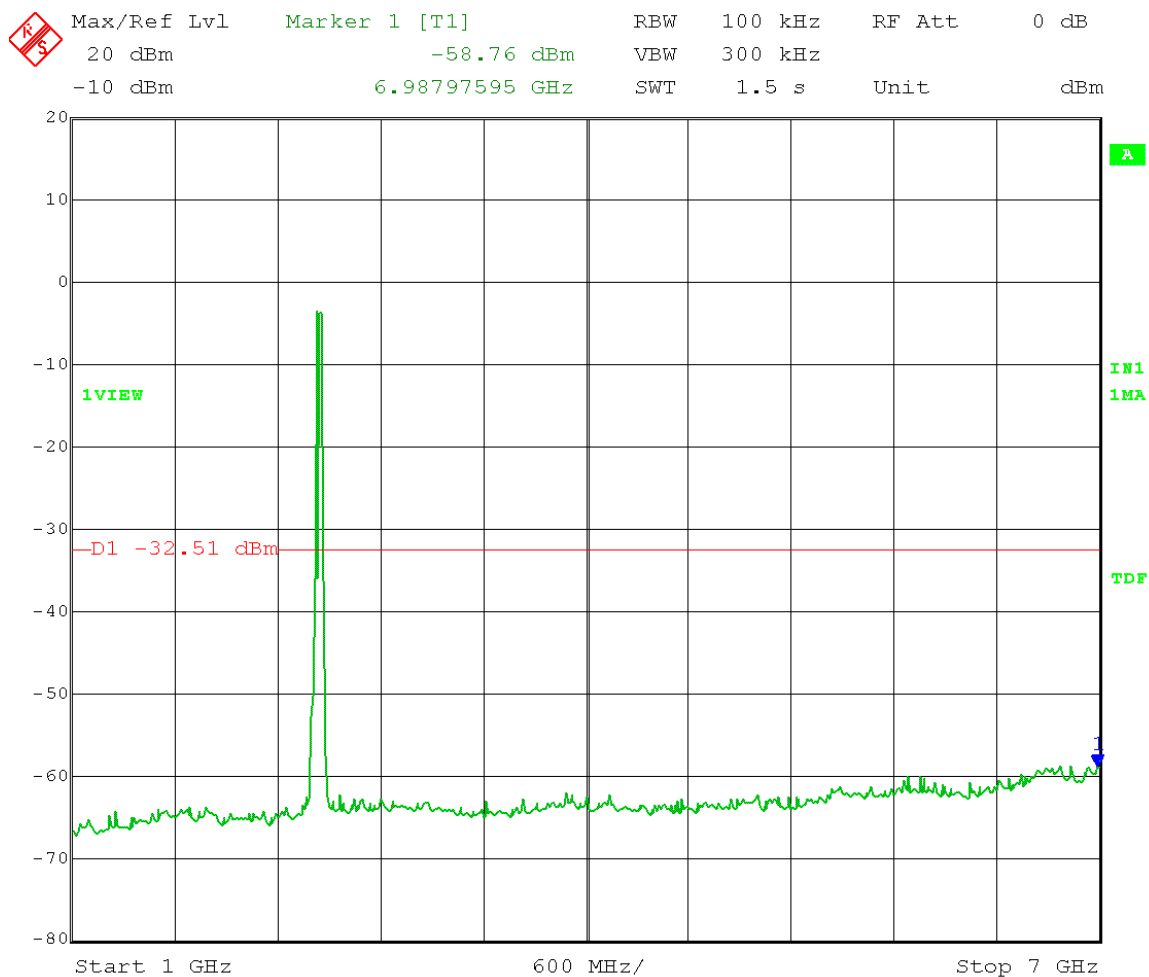


Date: 22.JAN.2014 11:11:34

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2452 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.51 dBm - 30 dB = -32.51 dBm  
 Frequency Range: 7 - 16 GHz

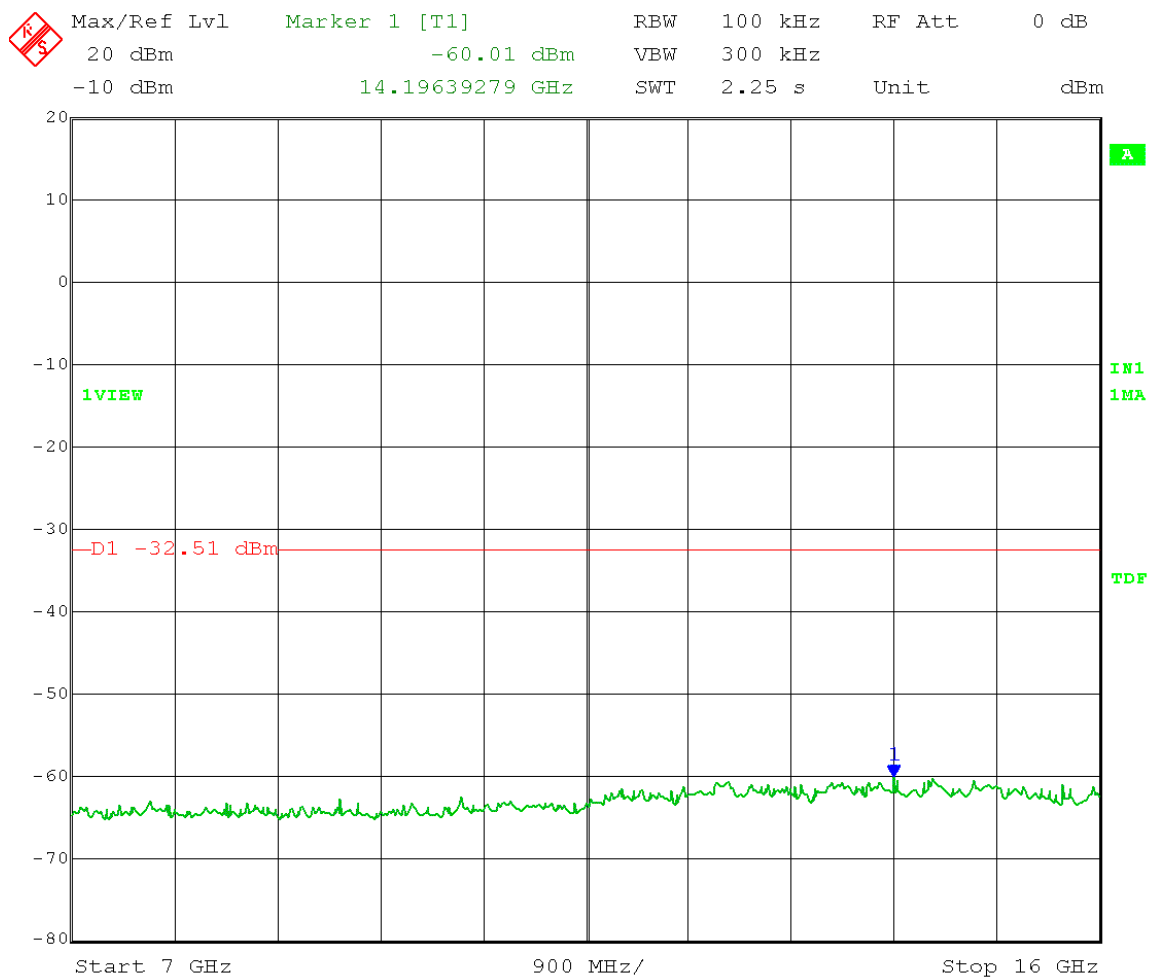


Date: 22.JAN.2014 11:13:41

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2452 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.51 dBm - 30 dB = -32.51 dBm  
 Frequency Range: 16 - 25 GHz

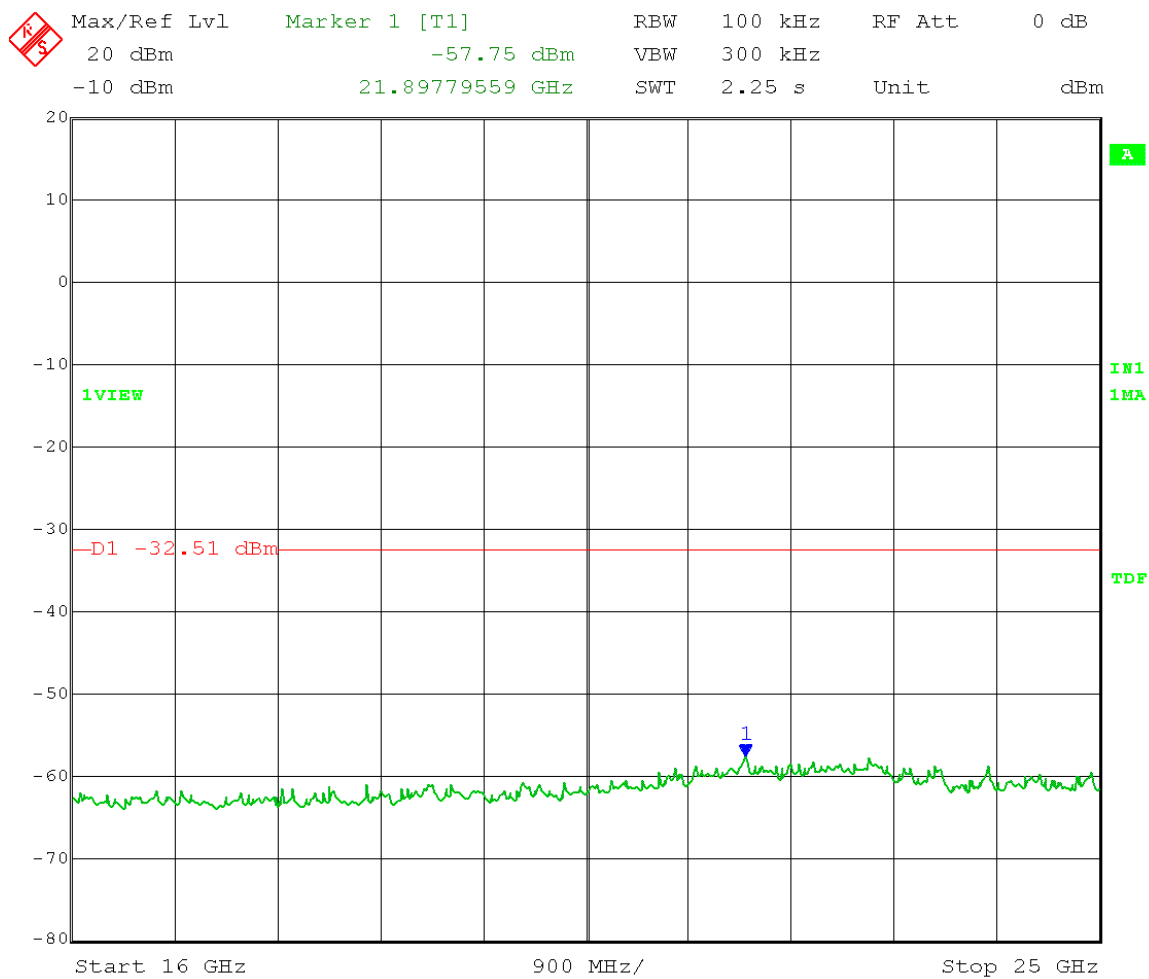


Date: 22.JAN.2014 11:15:16

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 0.81 dBm – 30 dB = -29.19 dBm

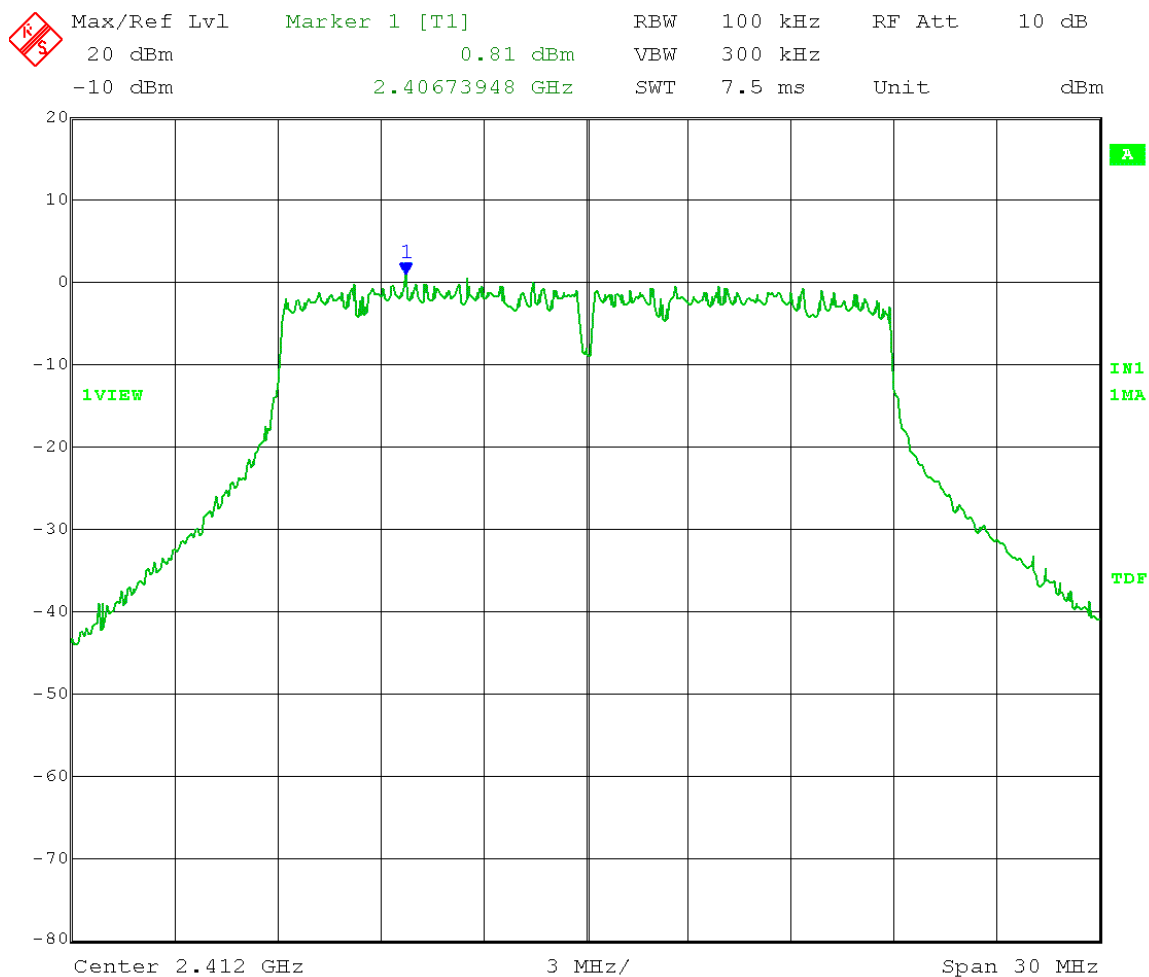


Date: 22.JAN.2014 10:42:09

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 12 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 0.81 dBm – 30 dB = -29.19 dBm  
 Frequency range: 30 – 1000 MHz

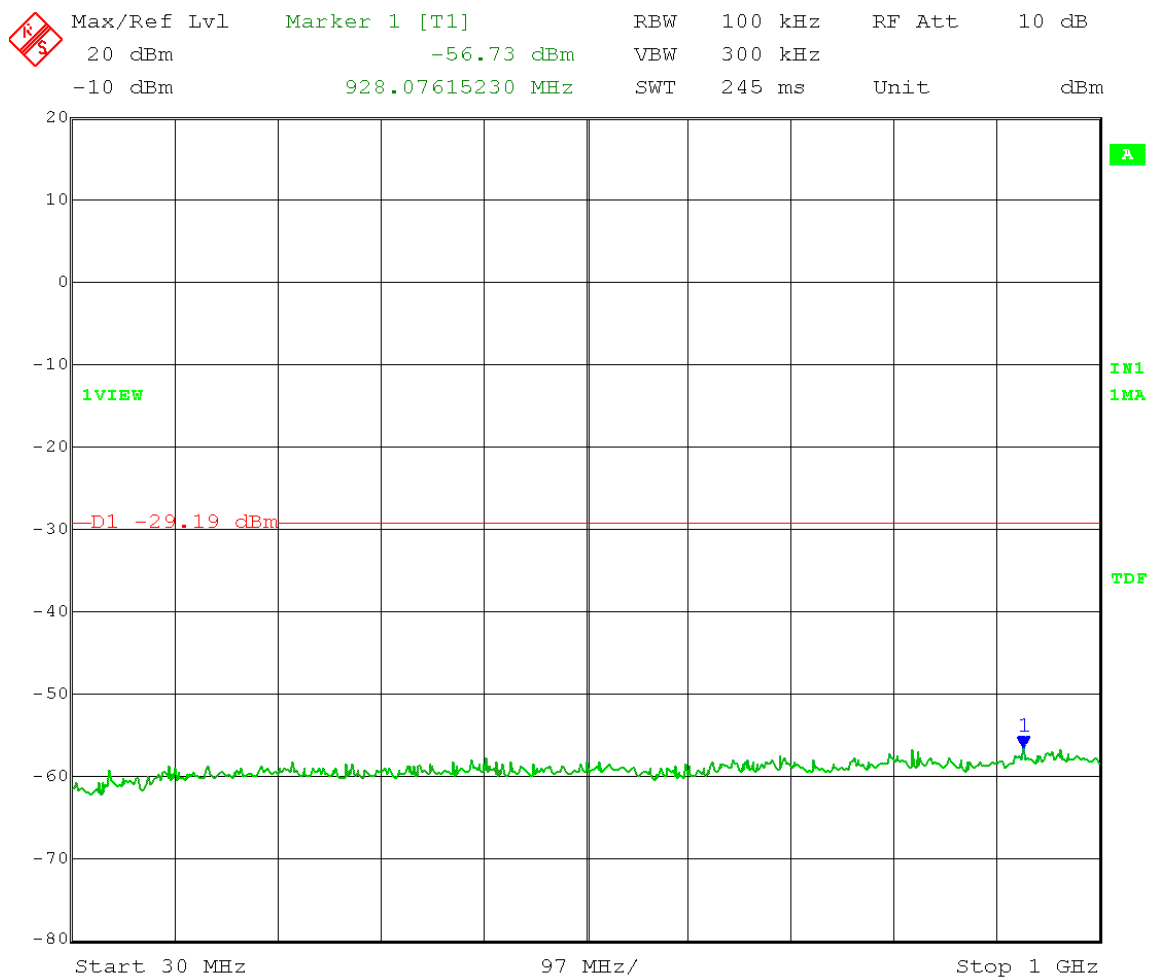


Date: 22.JAN.2014 10:50:35

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 0.81 dBm – 30 dB = -29.19 dBm  
Frequency range: 1 – 7 GHz

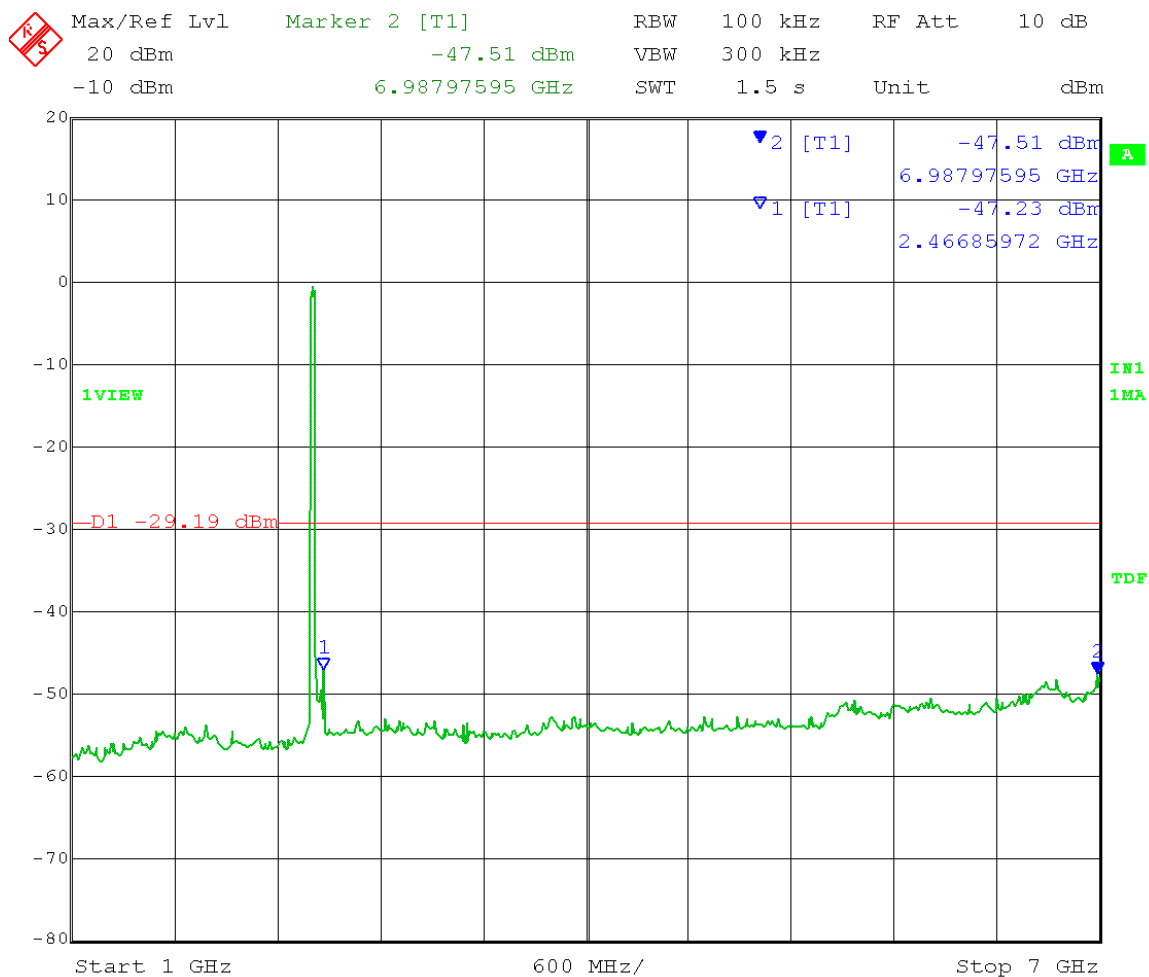


Date: 22.JAN.2014 10:45:00

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = 0.81 dBm – 30 dB = -29.19 dBm  
Frequency range: 7 – 16 GHz

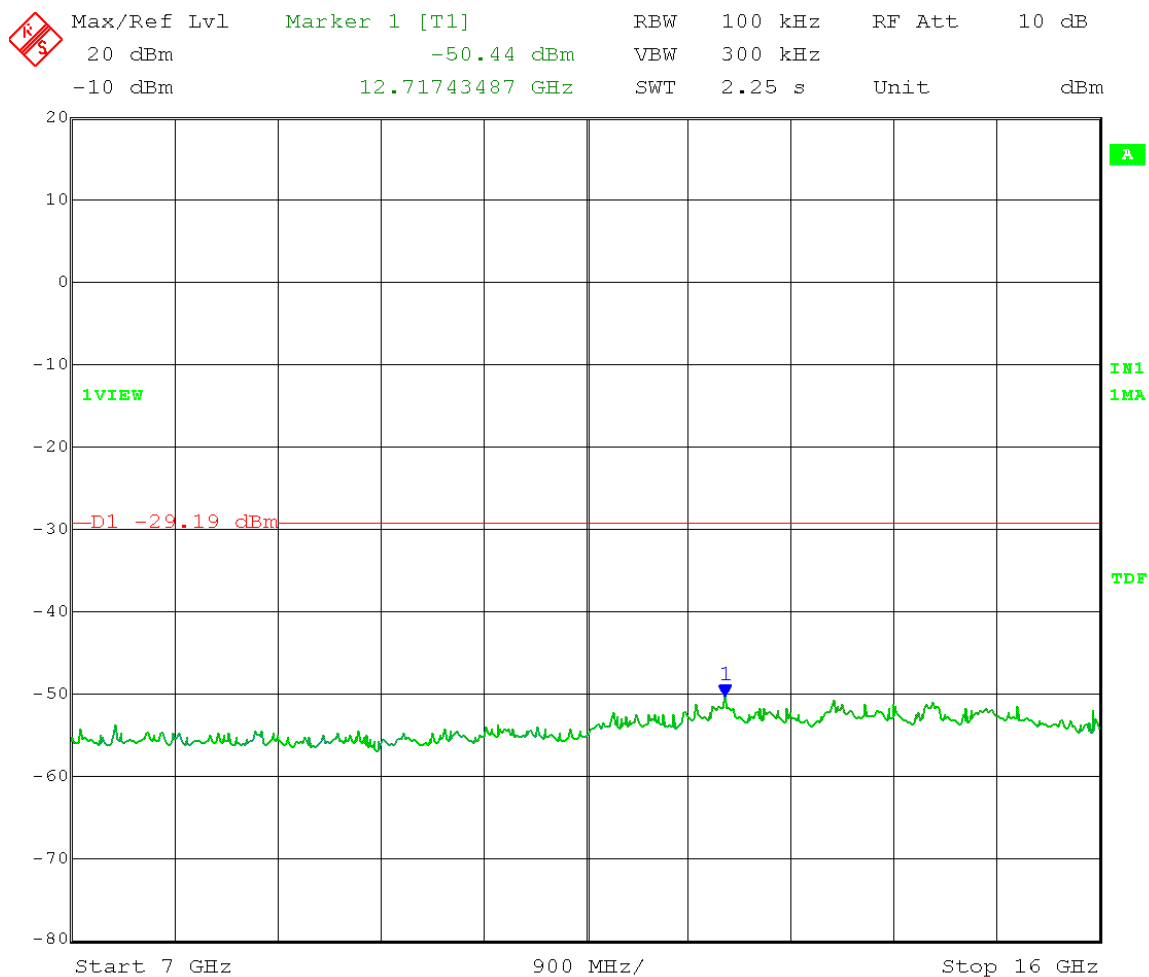


Date: 22.JAN.2014 10:46:50

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 12 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 0.81 dBm – 30 dB = -29.19 dBm  
 Frequency range: 16 – 25 GHz

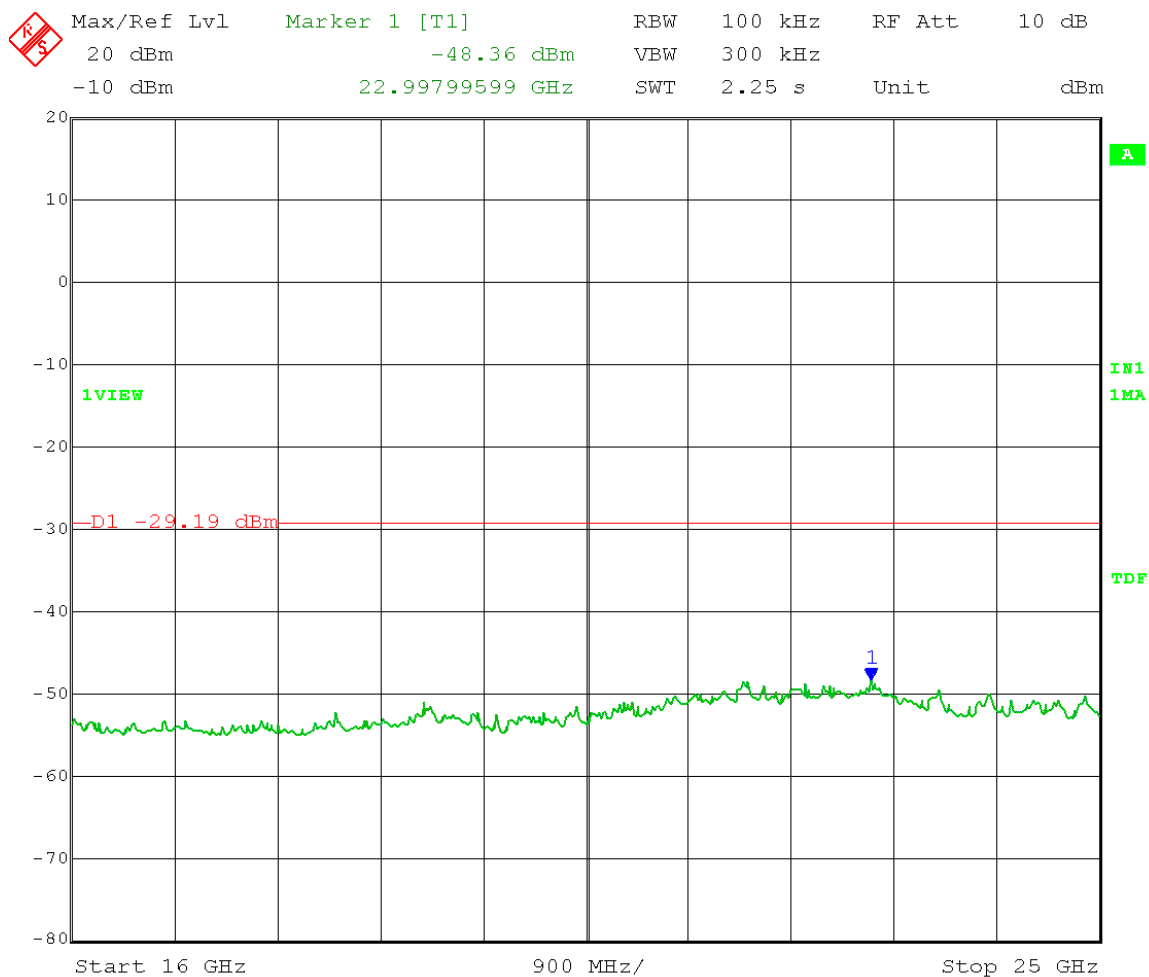


Date: 22.JAN.2014 10:48:41

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 17 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = 5.15 dBm – 30 dB = -24.85 dBm

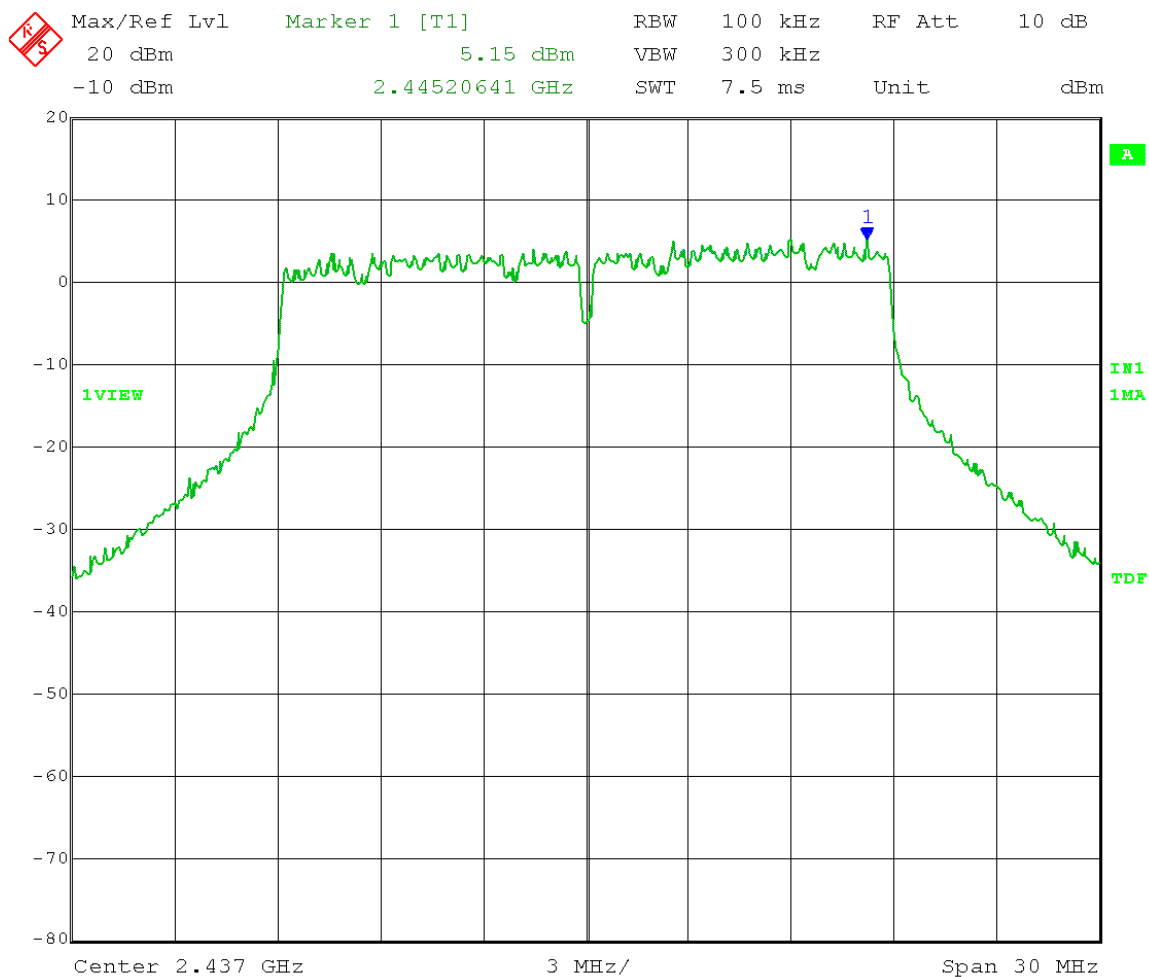


Date: 22.JAN.2014 10:55:13

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 5.15 dBm – 30 dB = -24.85 dBm  
 Frequency Range: 30 – 1000 MHz

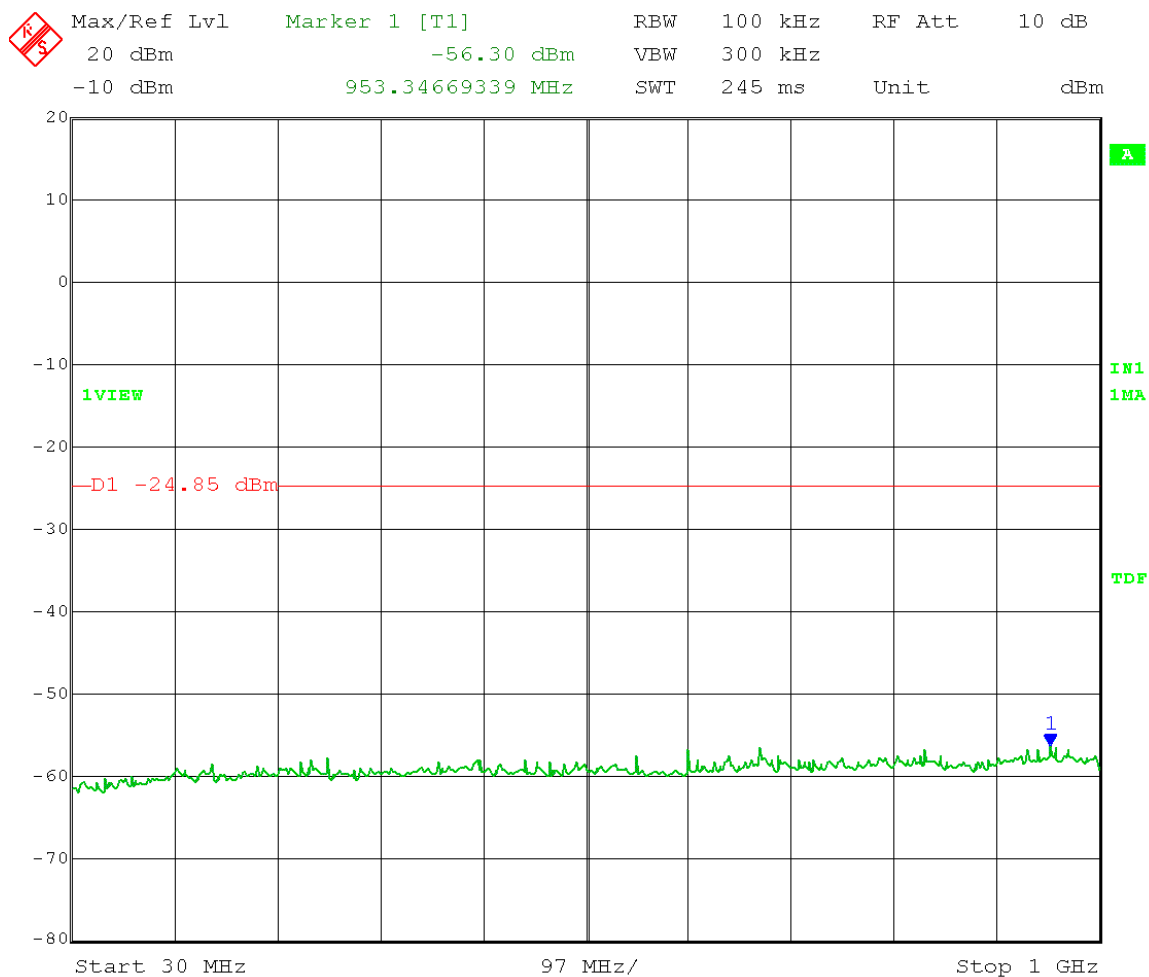


Date: 22.JAN.2014 11:03:49

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 5.15 dBm – 30 dB = -24.85 dBm  
 Frequency Range: 1 – 7 GHz

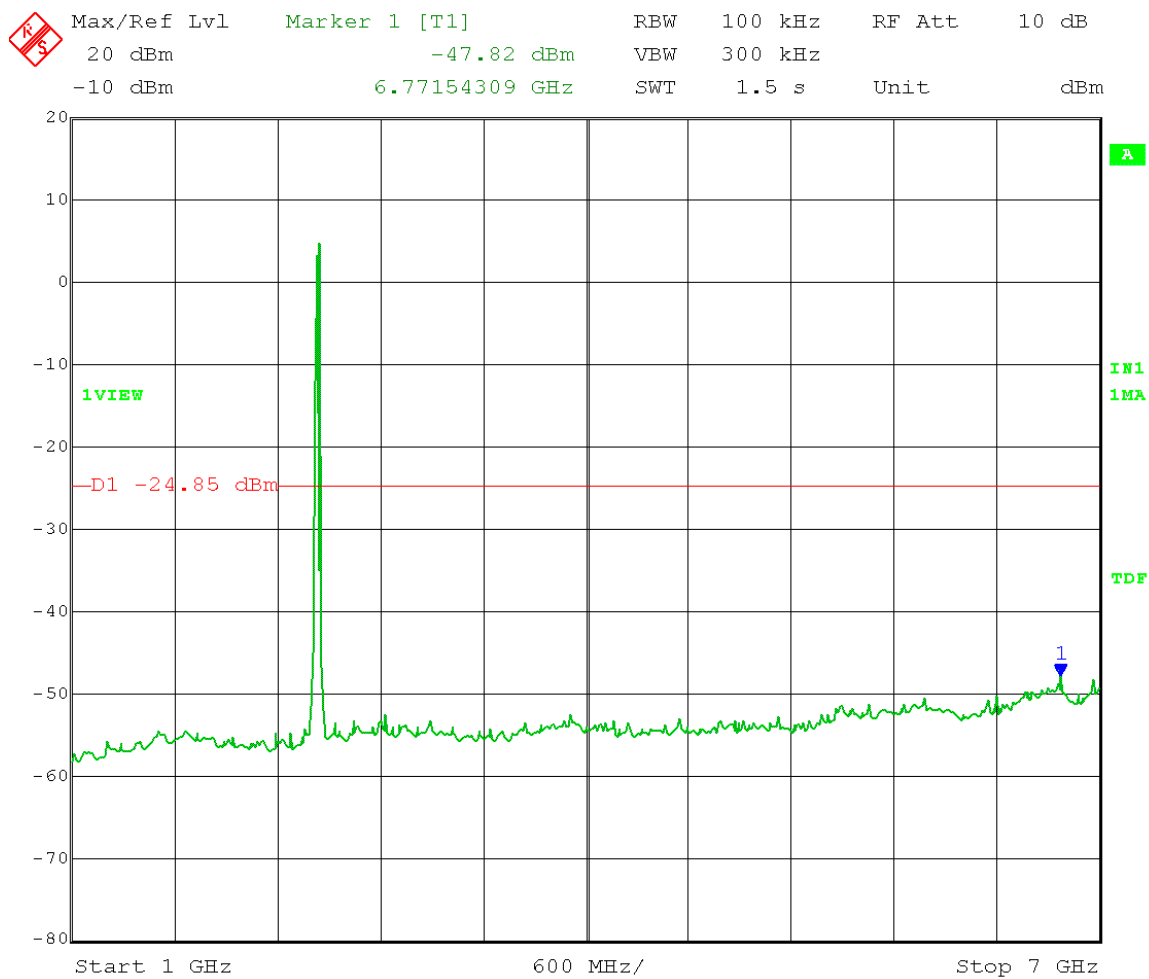


Date: 22.JAN.2014 10:57:53

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 5.15 dBm – 30 dB = -24.85 dBm  
 Frequency Range: 7 – 16 GHz

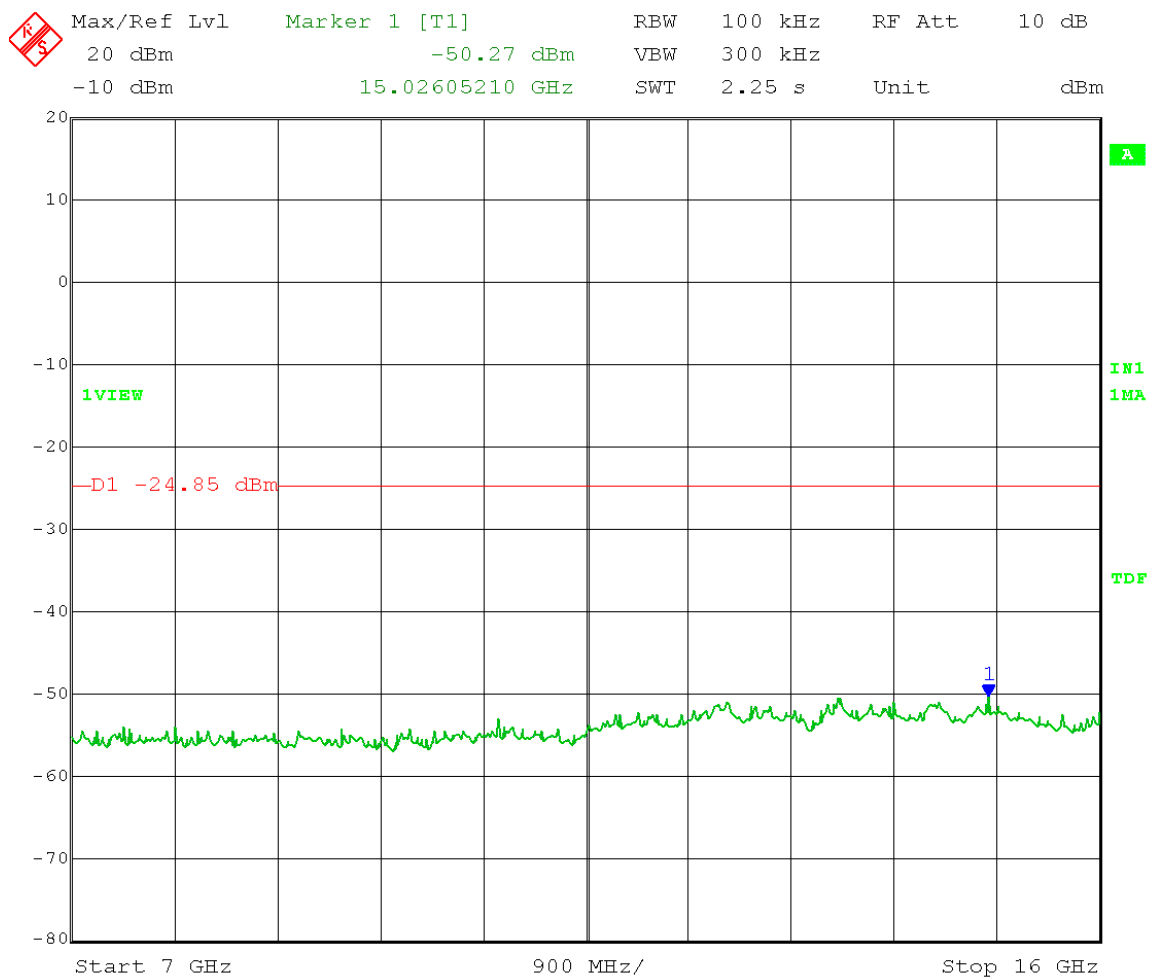


Date: 22.JAN.2014 10:59:47

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 17 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = 5.15 dBm – 30 dB = -24.85 dBm  
 Frequency Range: 16 – 25 GHz

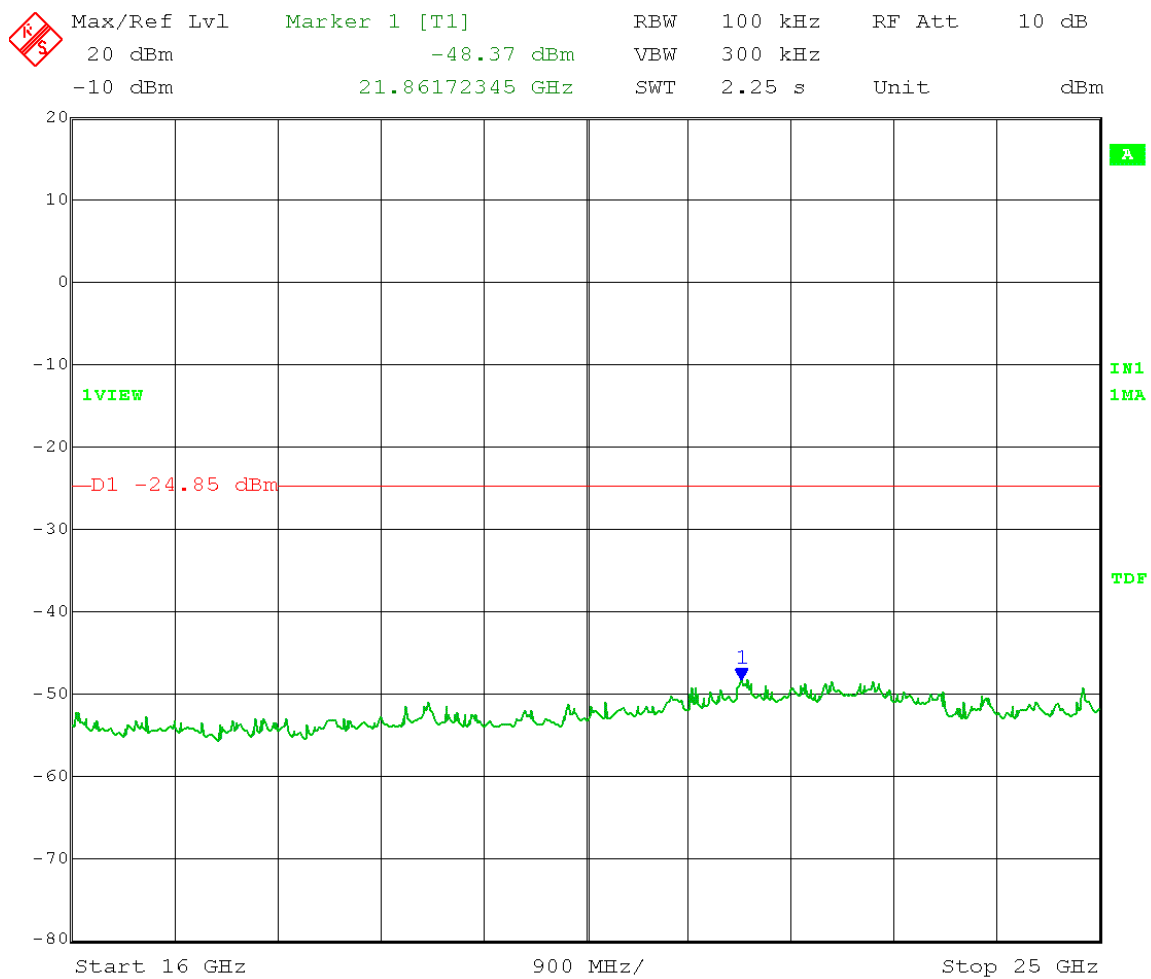


Date: 22.JAN.2014 11:01:42

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -0.81 dBm – 30 dB = -30.81 dBm

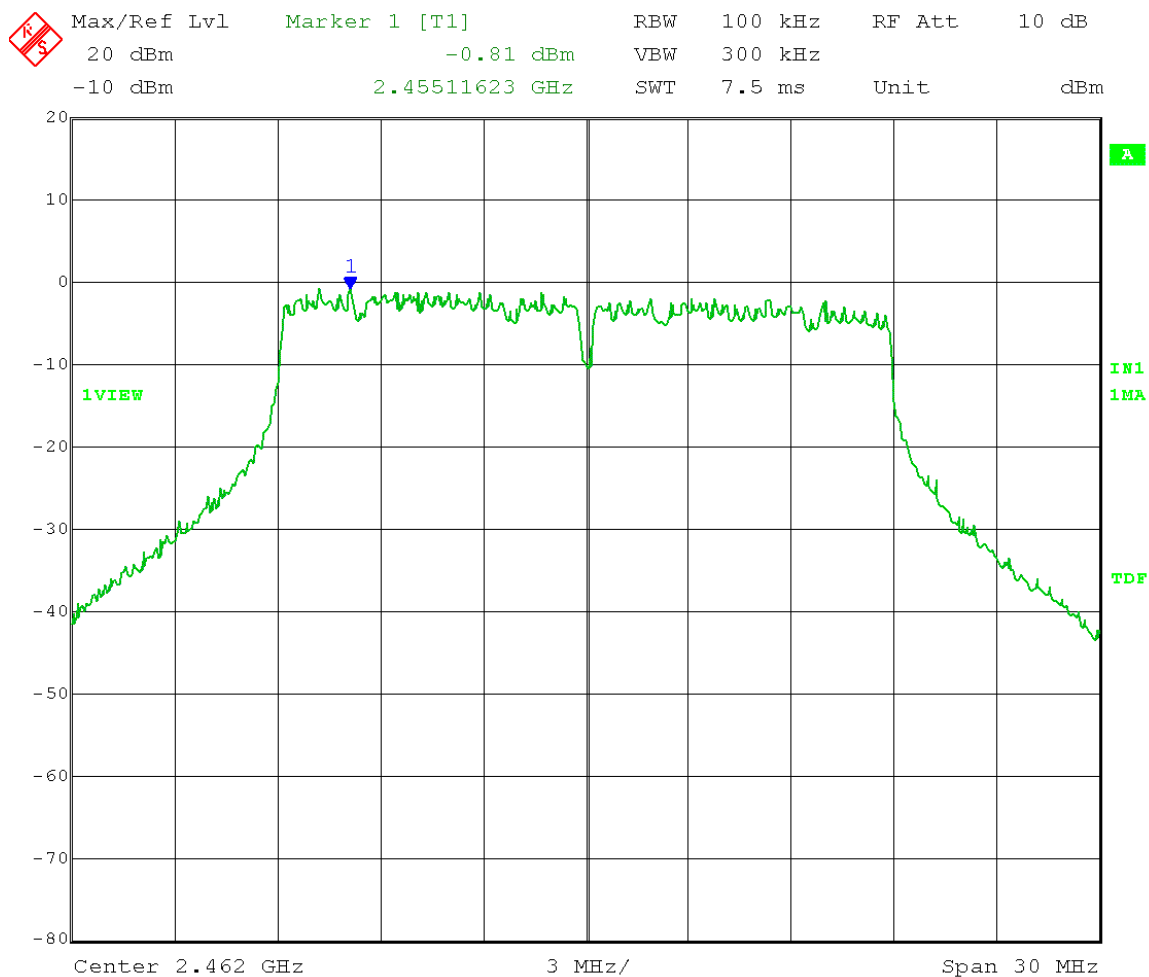


Date: 22.JAN.2014 10:23:05

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 12 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -0.81 dBm - 30 dB = -30.81 dBm  
 Frequency range: 30 - 1000 MHz

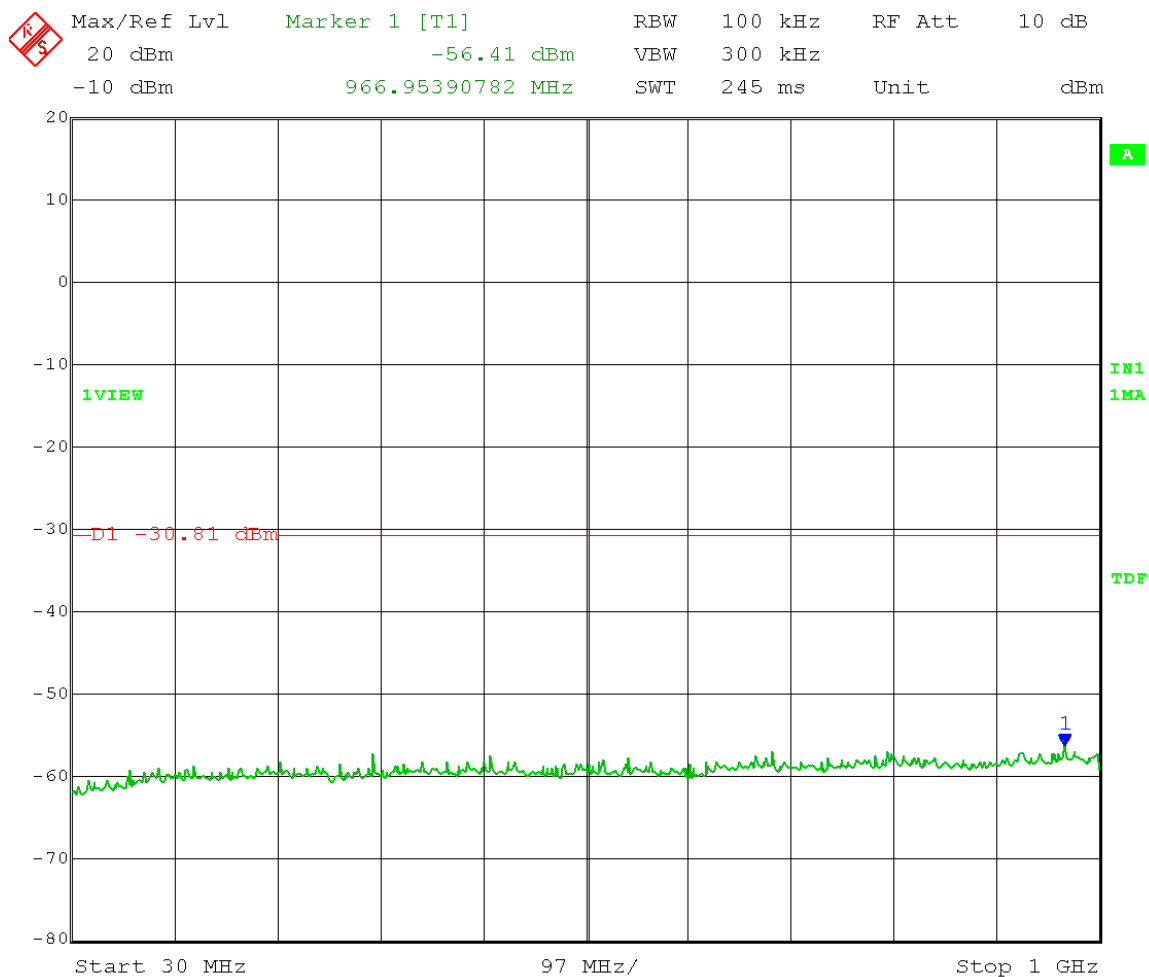


Date: 22.JAN.2014 10:32:44

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -0.81 dBm - 30 dB = -30.81 dBm  
Frequency range: 1 - 7 GHz

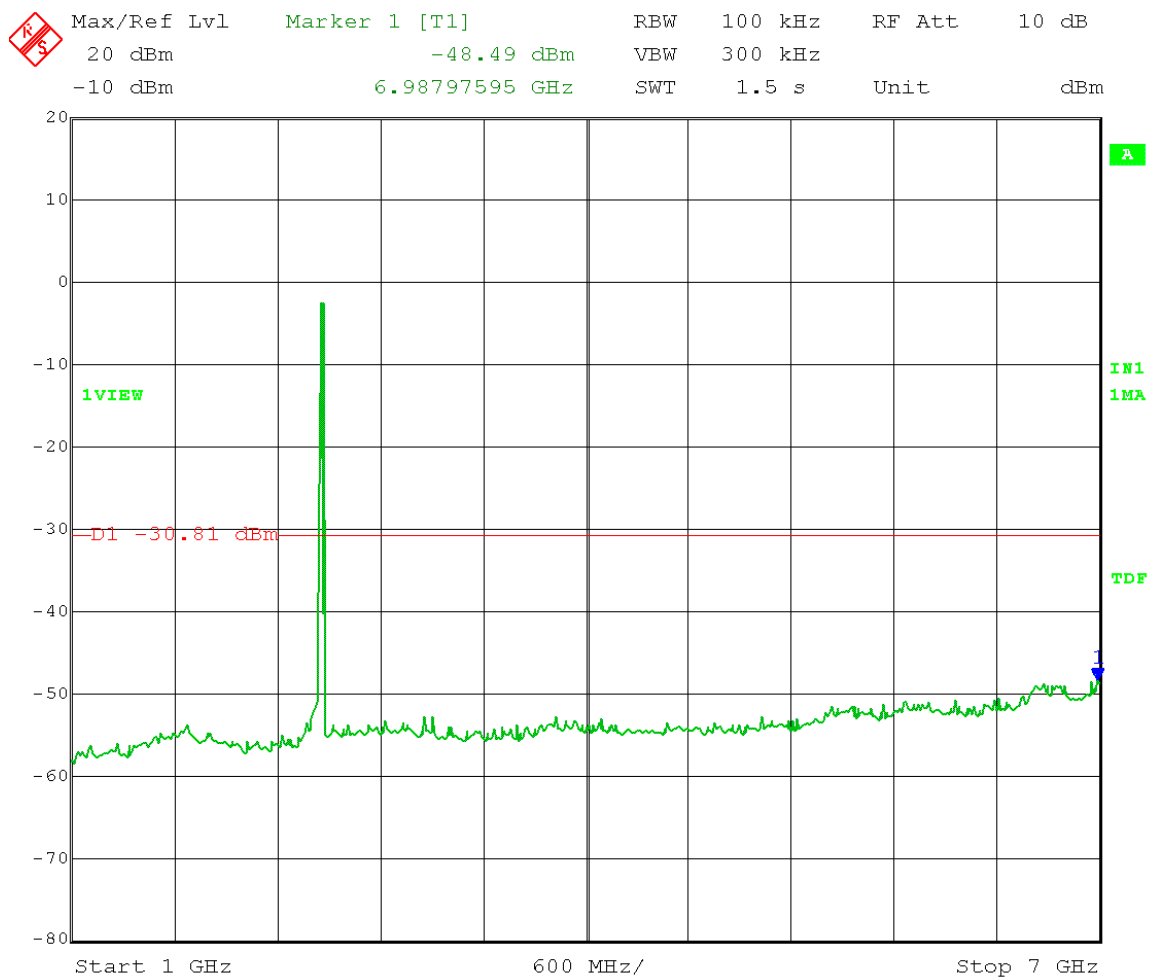


Date: 22.JAN.2014 10:27:18

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 12 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -0.81 dBm – 30 dB = -30.81 dBm  
 Frequency range: 7 – 16 GHz

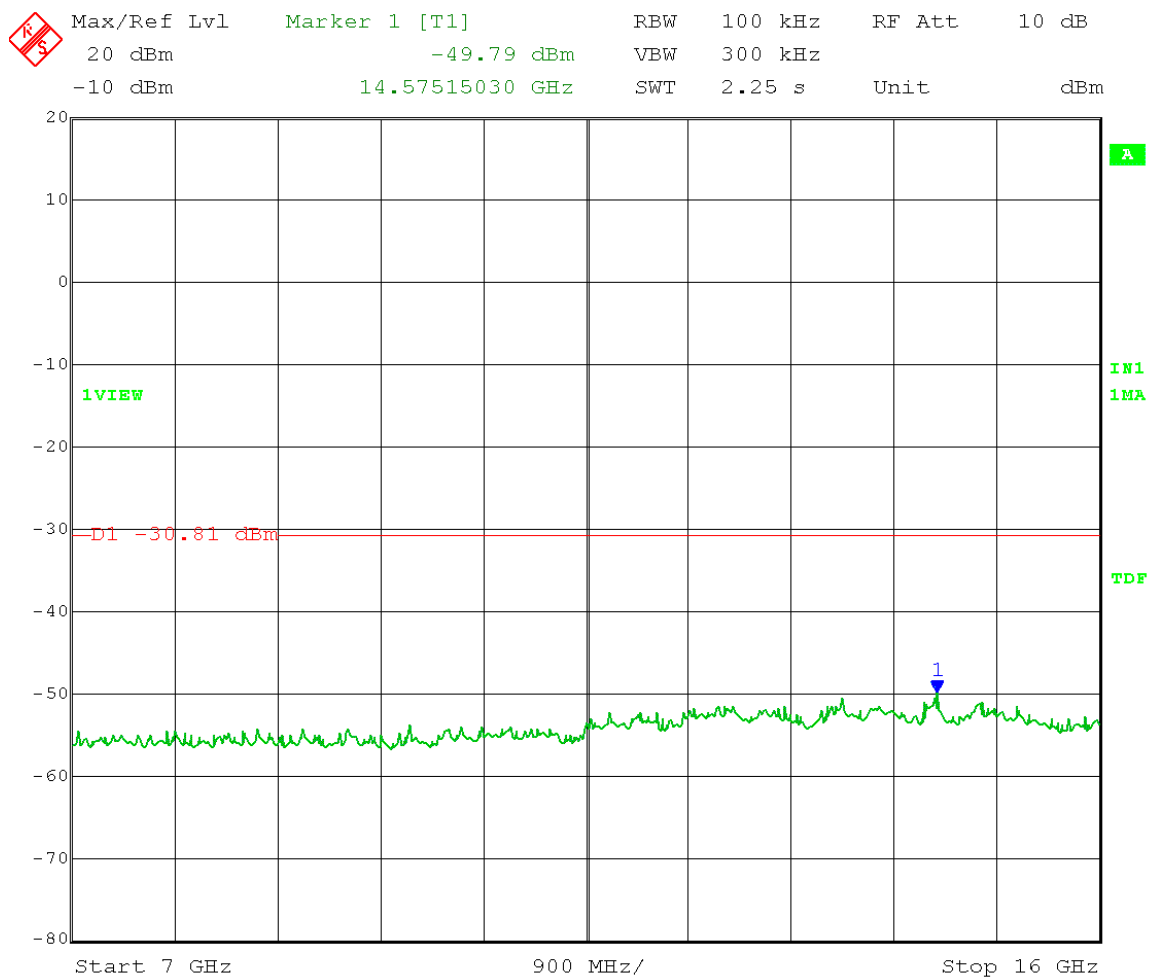


Date: 22.JAN.2014 10:29:10

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 12 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -0.81 dBm - 30 dB = -30.81 dBm  
Frequency range: 16 - 25 GHz

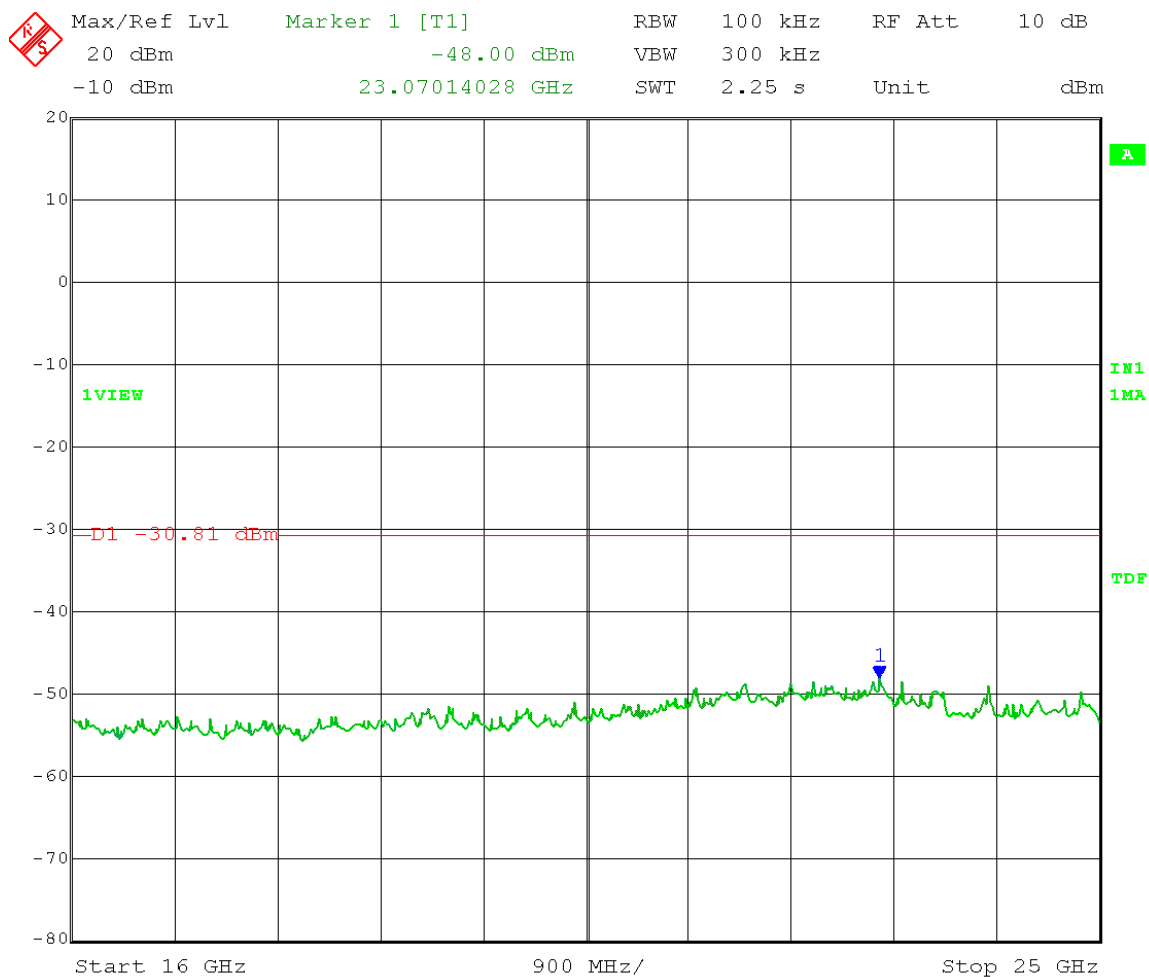


Date: 22.JAN.2014 10:30:45

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 8 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -6.72 dBm - 30 dB = -36.72 dBm

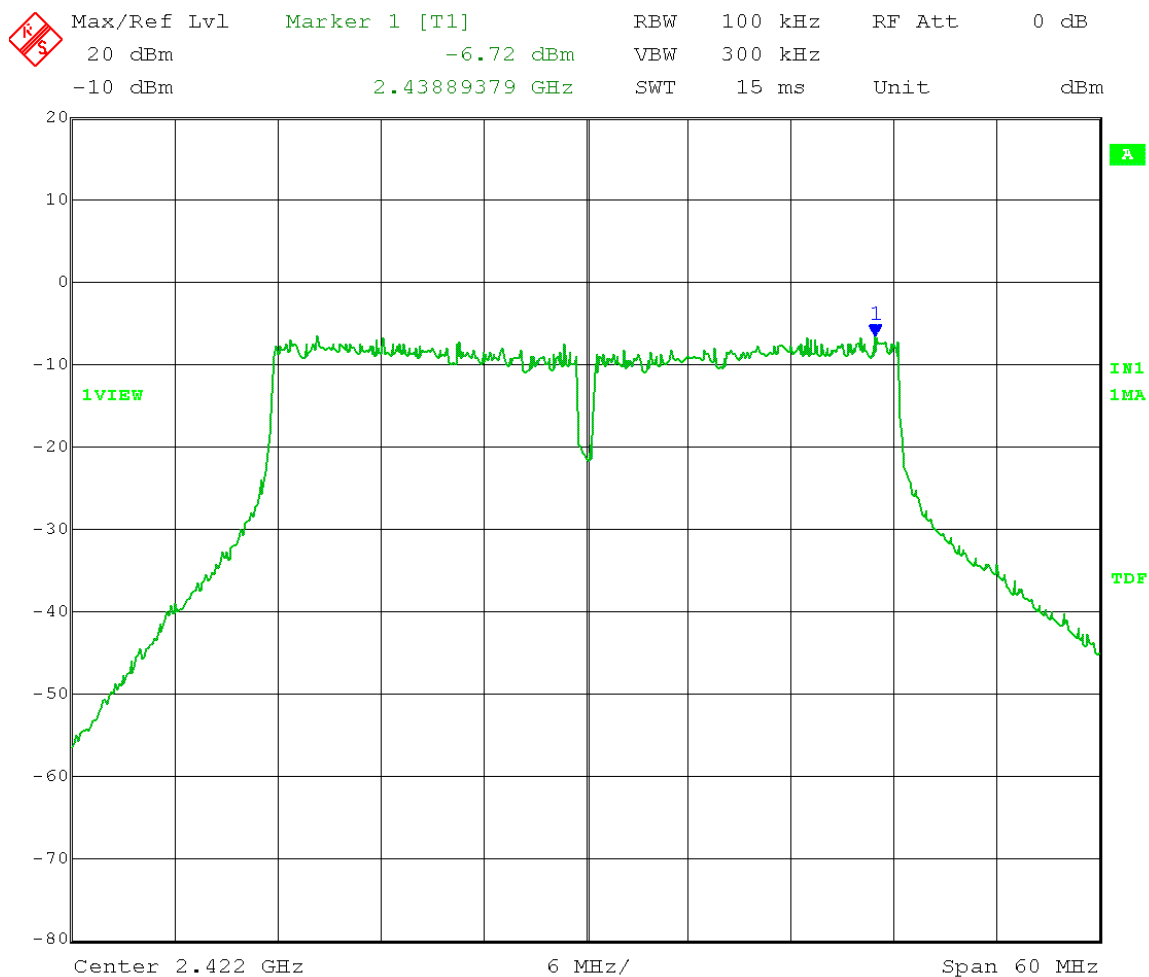


Date: 22.JAN.2014 11:40:51

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold **Low Channel Transmit = 2422 MHz**  
 Output Power Setting 8 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -6.72 dBm - 30 dB = -36.72 dBm  
 Frequency Range: 30 - 1000 MHz

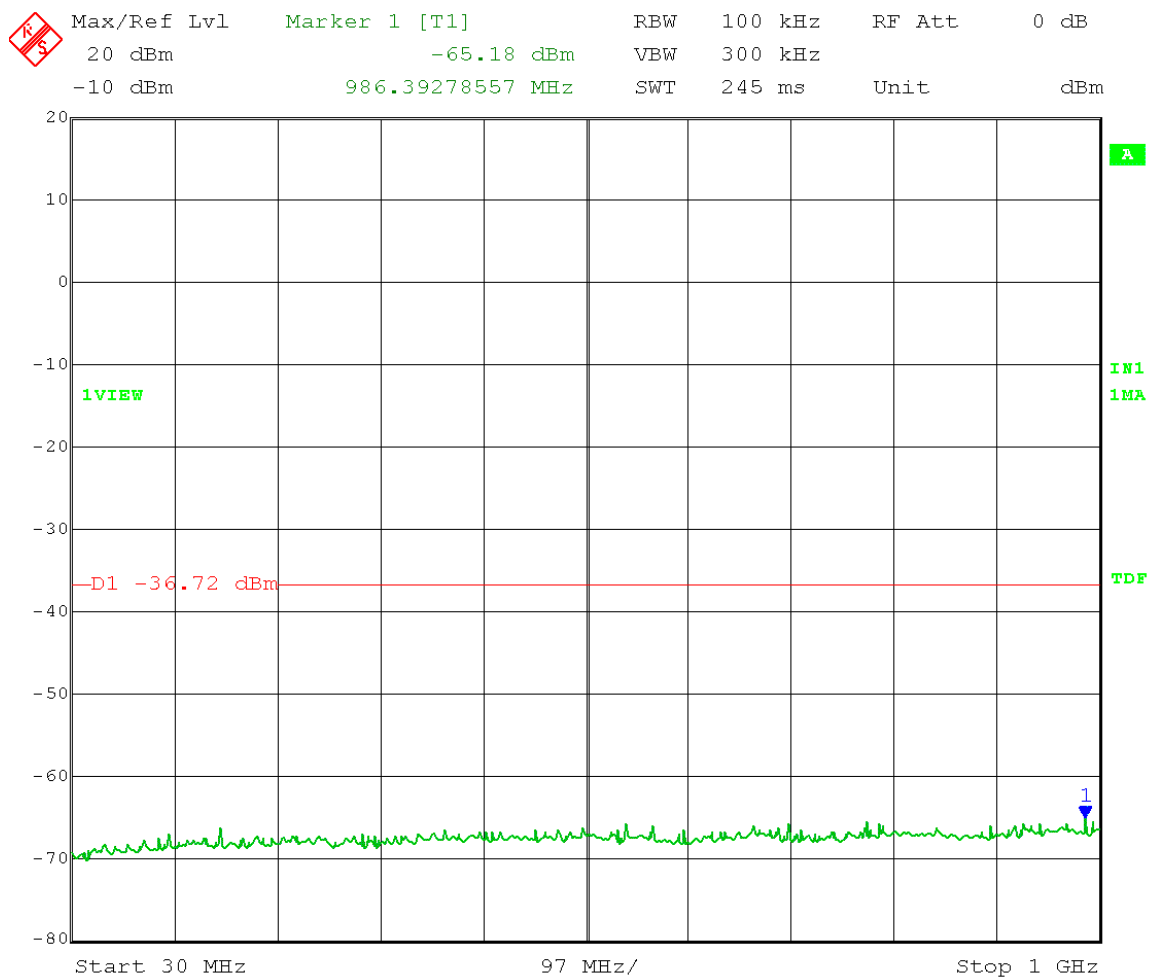


Date: 22.JAN.2014 12:30:53

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 8 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -6.72 dBm - 30 dB = -36.72 dBm  
Frequency Range: 1 - 7 GHz

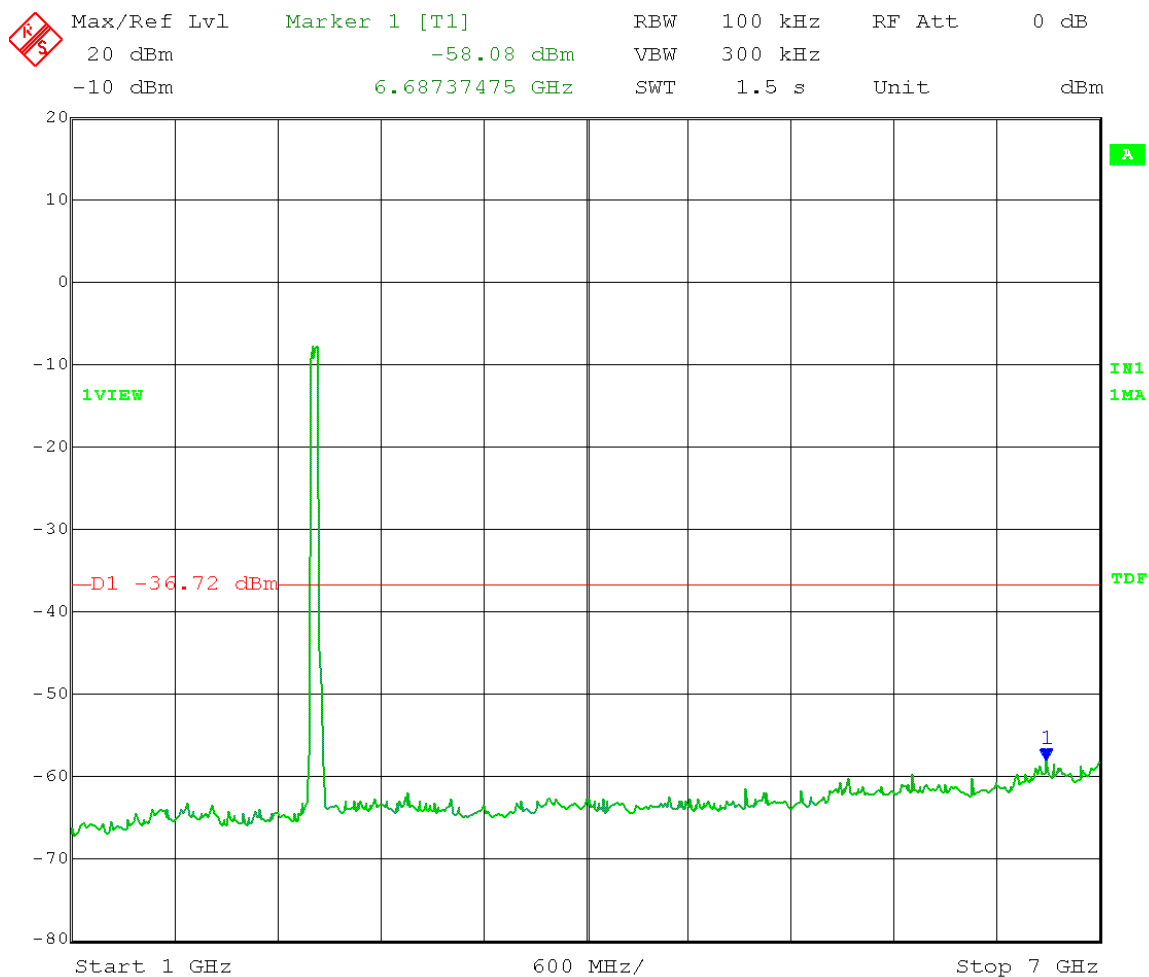


Date: 22.JAN.2014 11:42:57

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 8 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -6.72 dBm – 30 dB = -36.72 dBm  
 Frequency Range: 7 – 16 GHz

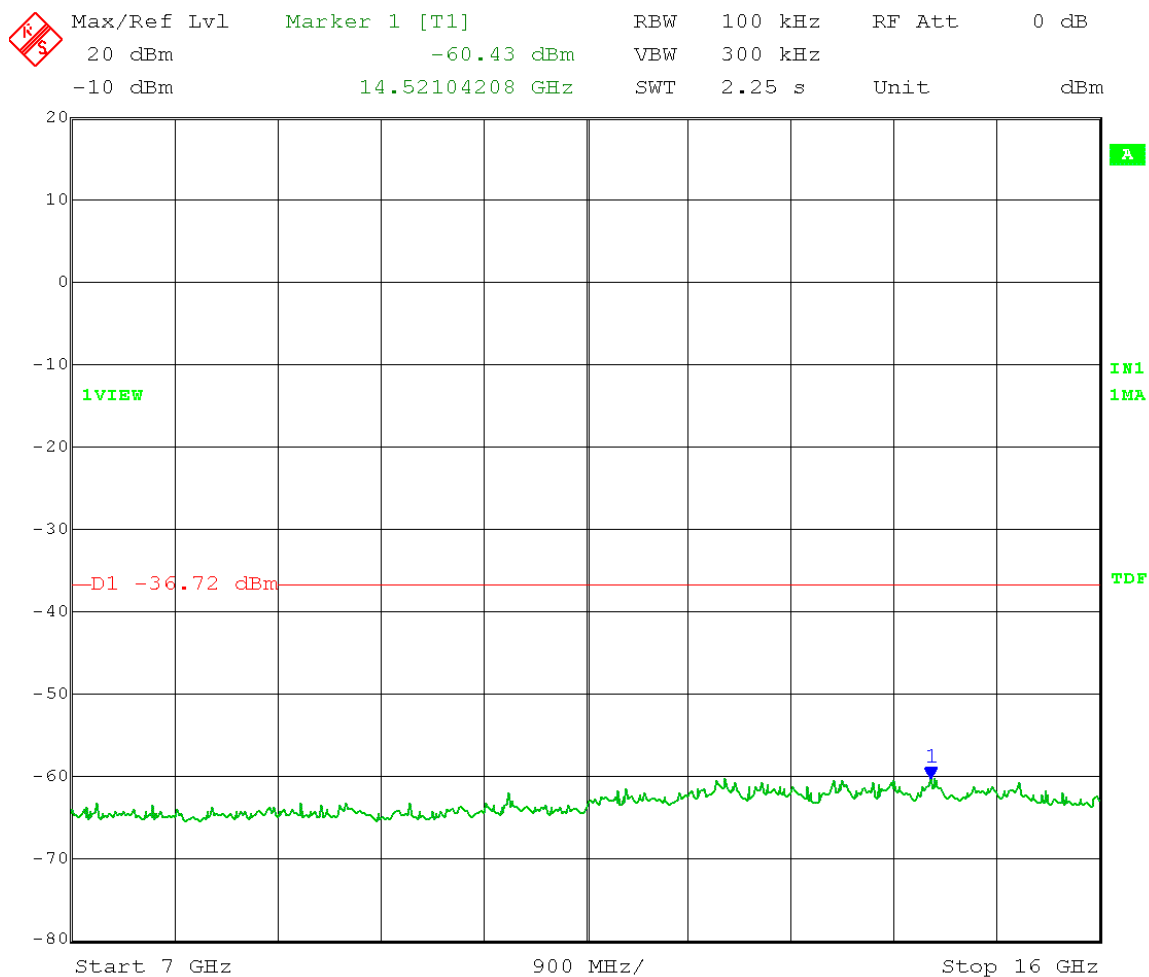


Date: 22.JAN.2014 12:26:46

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 8 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -6.72 dBm - 30 dB = -36.72 dBm  
Frequency Range: 16 - 25 GHz

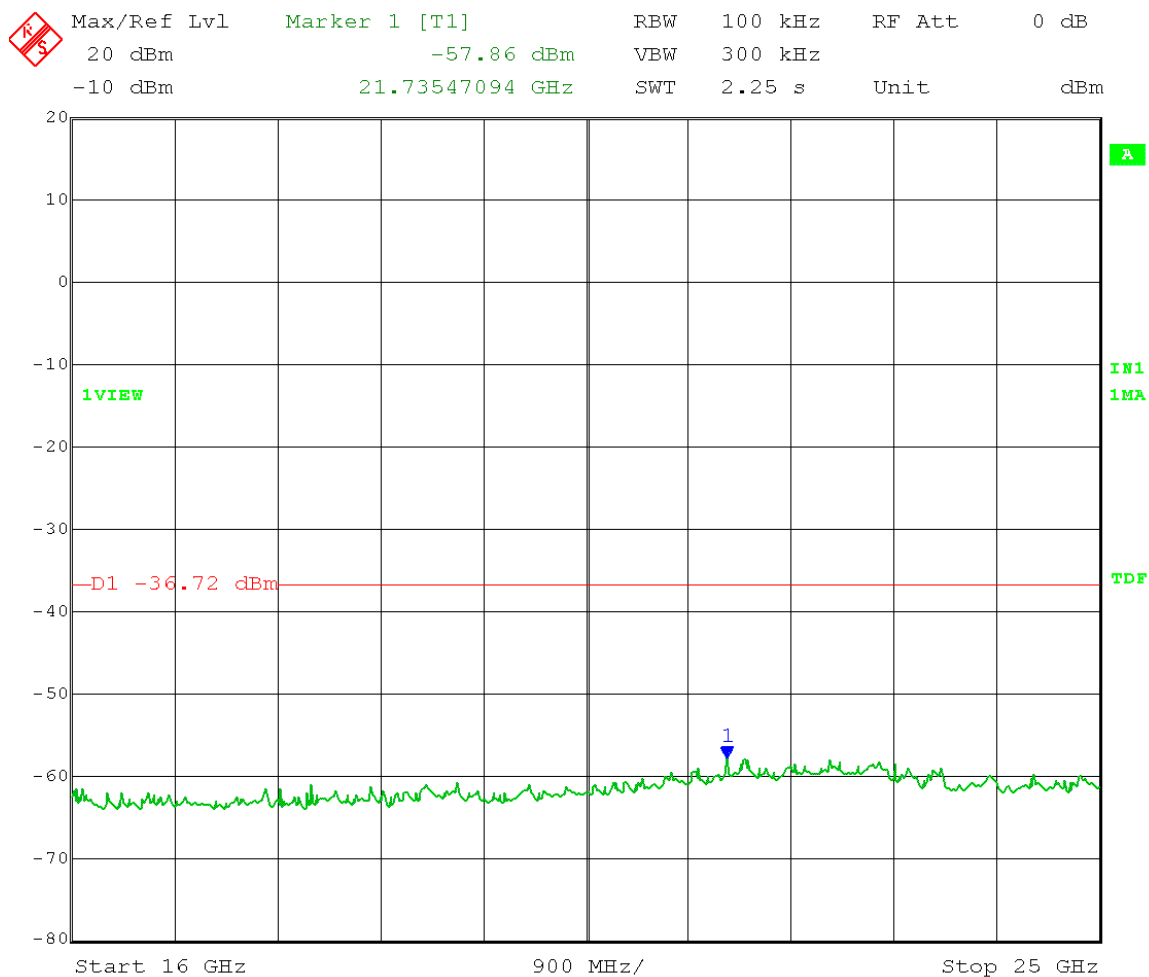


Date: 22.JAN.2014 12:28:27

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 12 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -2.28 dBm – 30 dB = -32.28 dBm

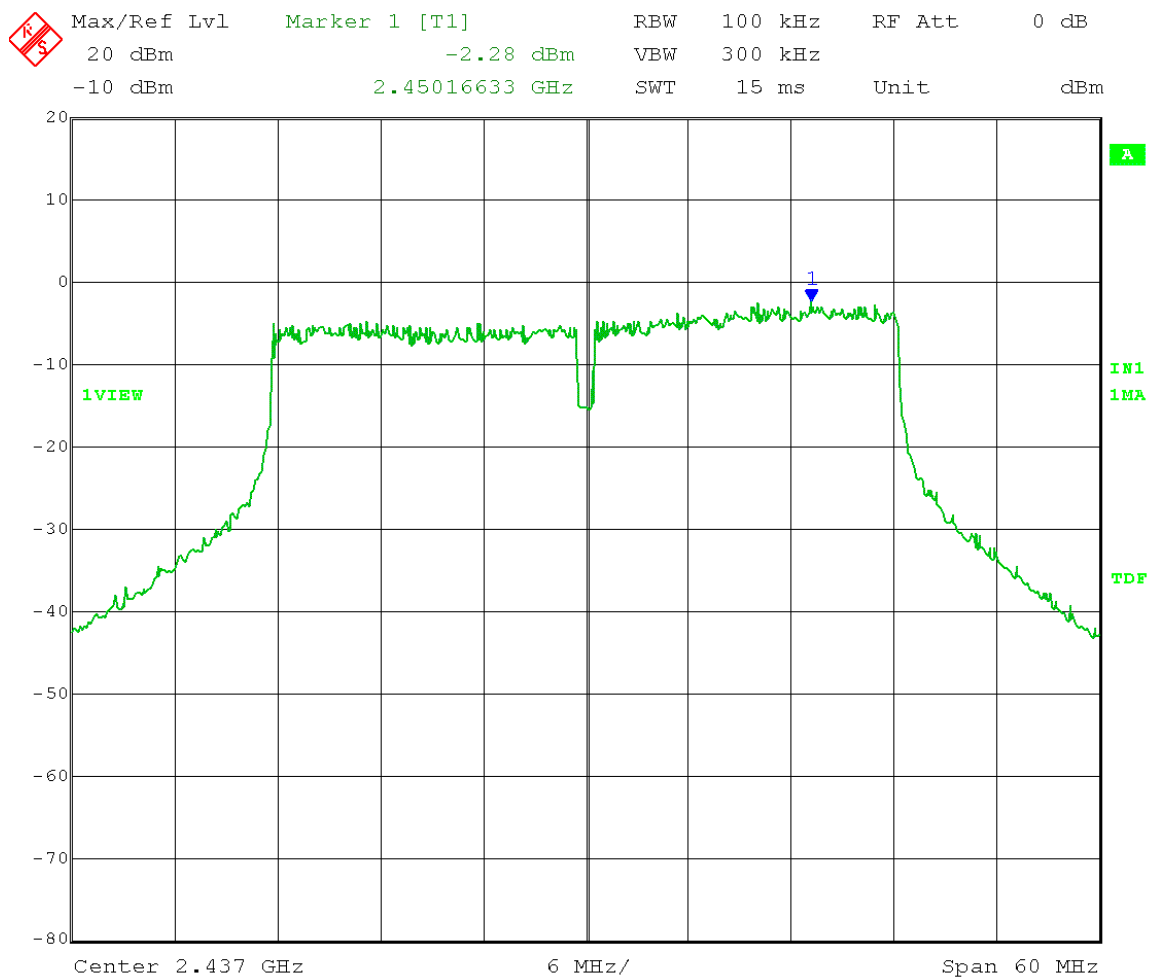

Date: 22.JAN.2014 12:45:44

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.28 dBm – 30 dB = -32.28 dBm  
 Frequency Range: 30 – 1000 MHz

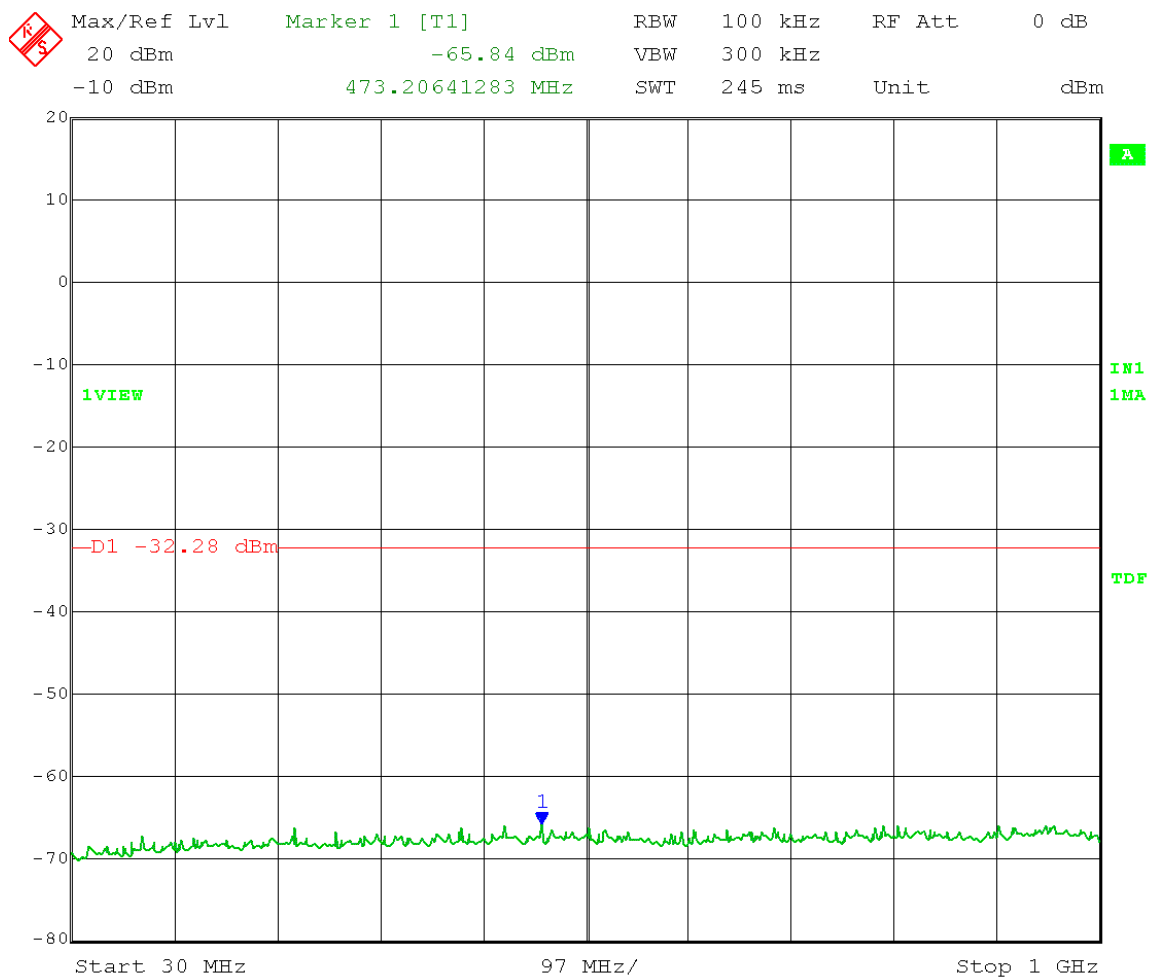


Date: 22.JAN.2014 12:52:09

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.28 dBm - 30 dB = -32.28 dBm  
 Frequency Range: 1 - 7 GHz




Date: 22.JAN.2014 12:47:48

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.28 dBm - 30 dB = -32.28 dBm  
 Frequency Range: 7 - 16 GHz

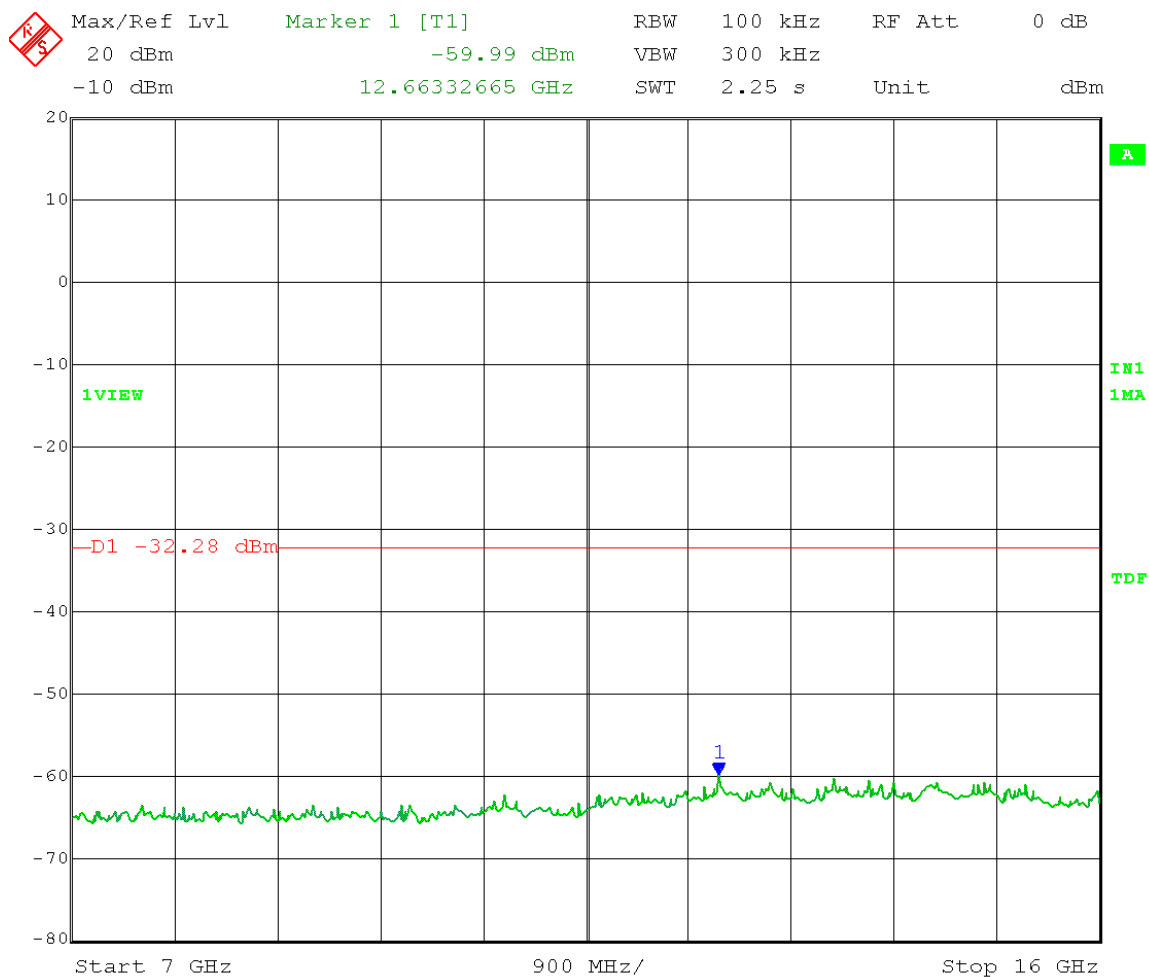


Date: 22.JAN.2014 12:49:02

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 12 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -2.28 dBm – 30 dB = -32.28 dBm  
 Frequency Range: 16 – 25 GHz

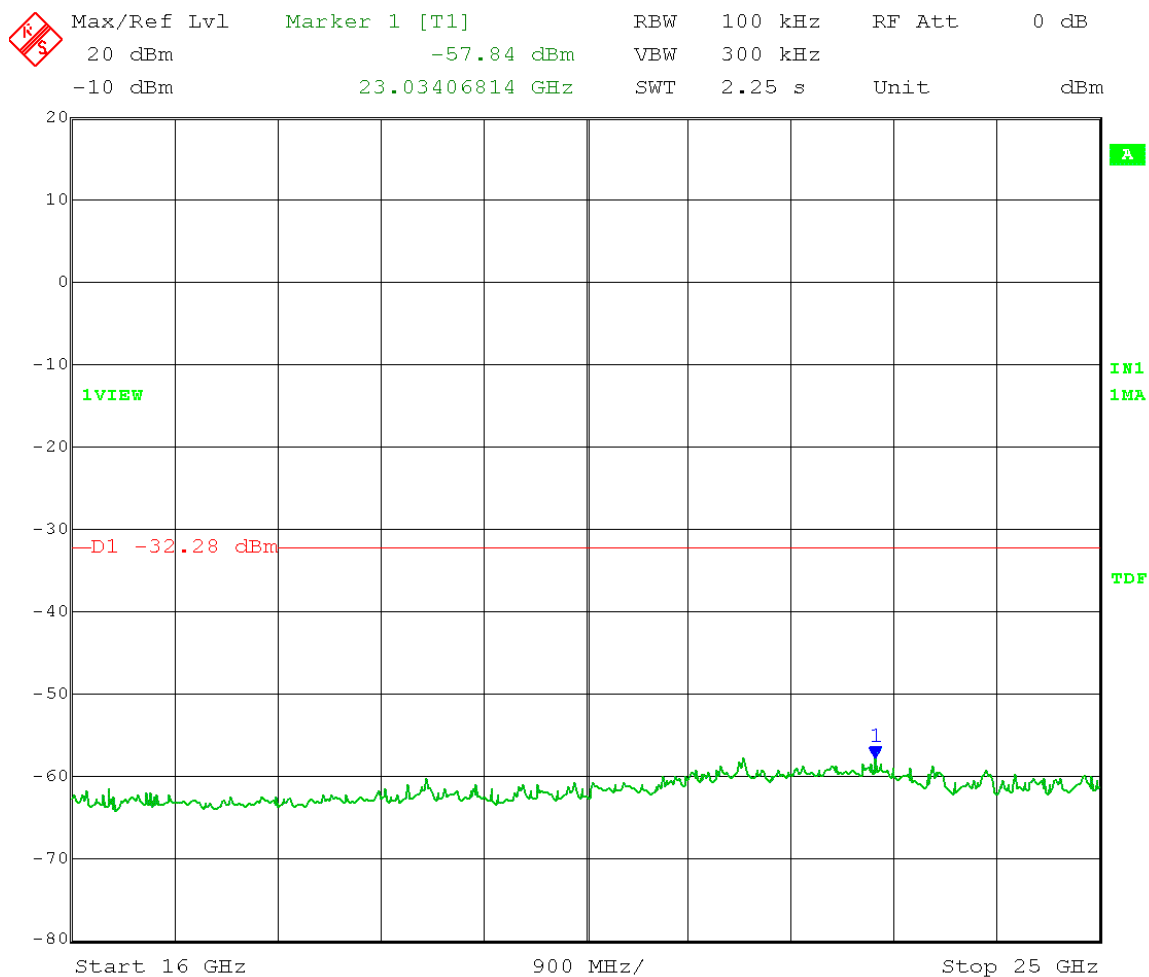


Date: 22.JAN.2014 12:50:28

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2452 MHz  
Output Power Setting 4.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -9.98 dBm – 30 dB = -39.98 dBm

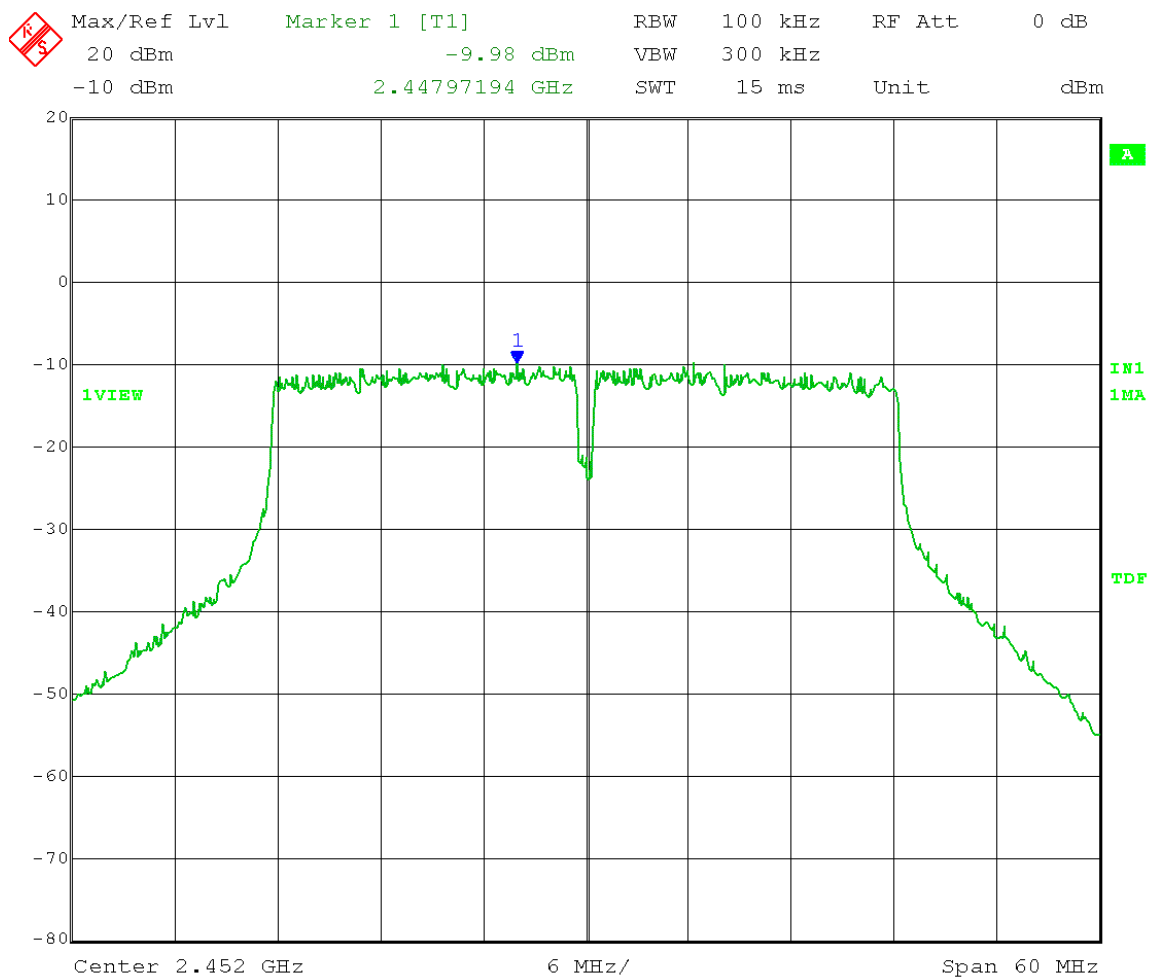


Date: 22.JAN.2014 11:19:38

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2452 MHz  
 Output Power Setting 4.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -9.98 dBm - 30 dB = -39.98 dBm  
 Frequency Range: 30 - 1000 MHz

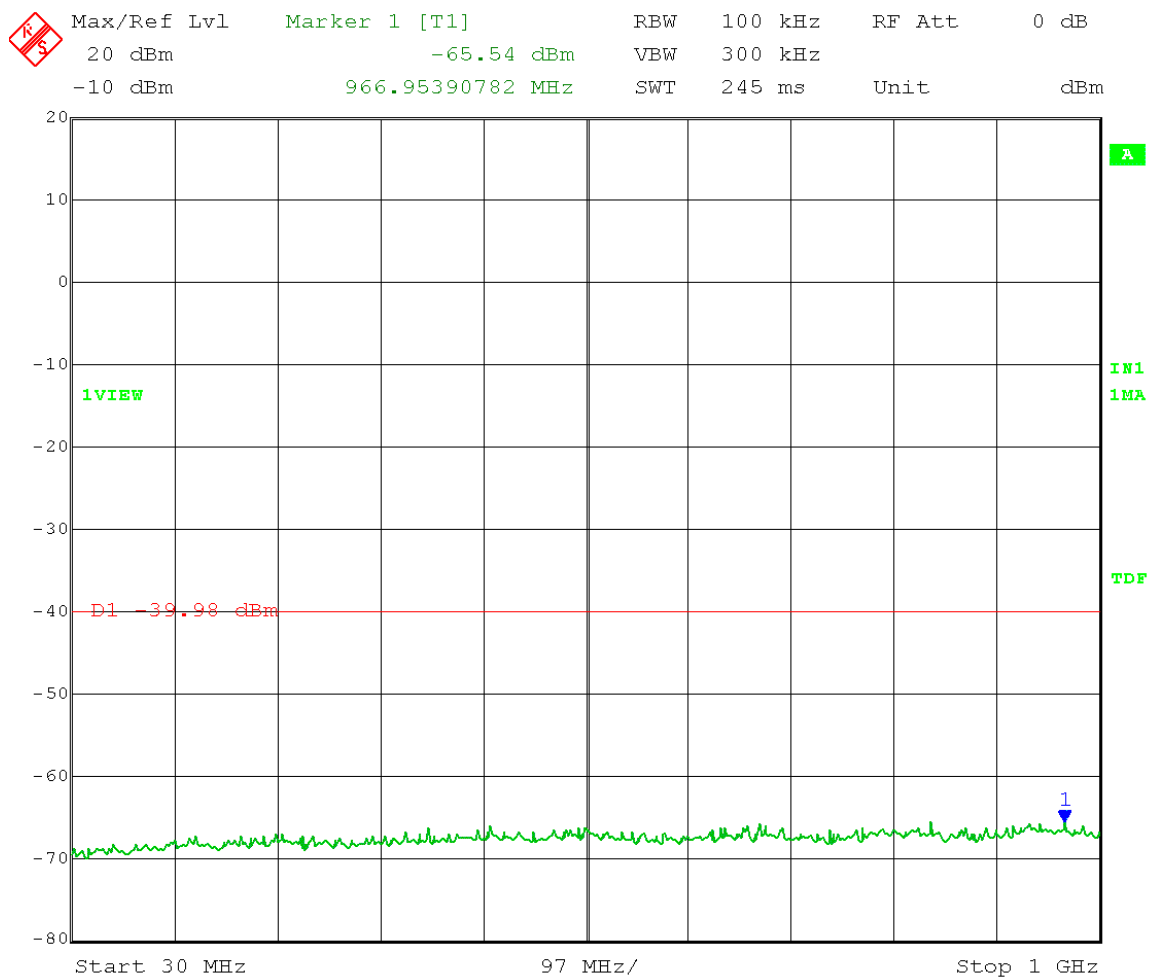


Date: 22.JAN.2014 11:27:57

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2452 MHz  
Output Power Setting 4.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -9.98 dBm - 30 dB = -39.98 dBm  
Frequency Range: 1 - 7 GHz

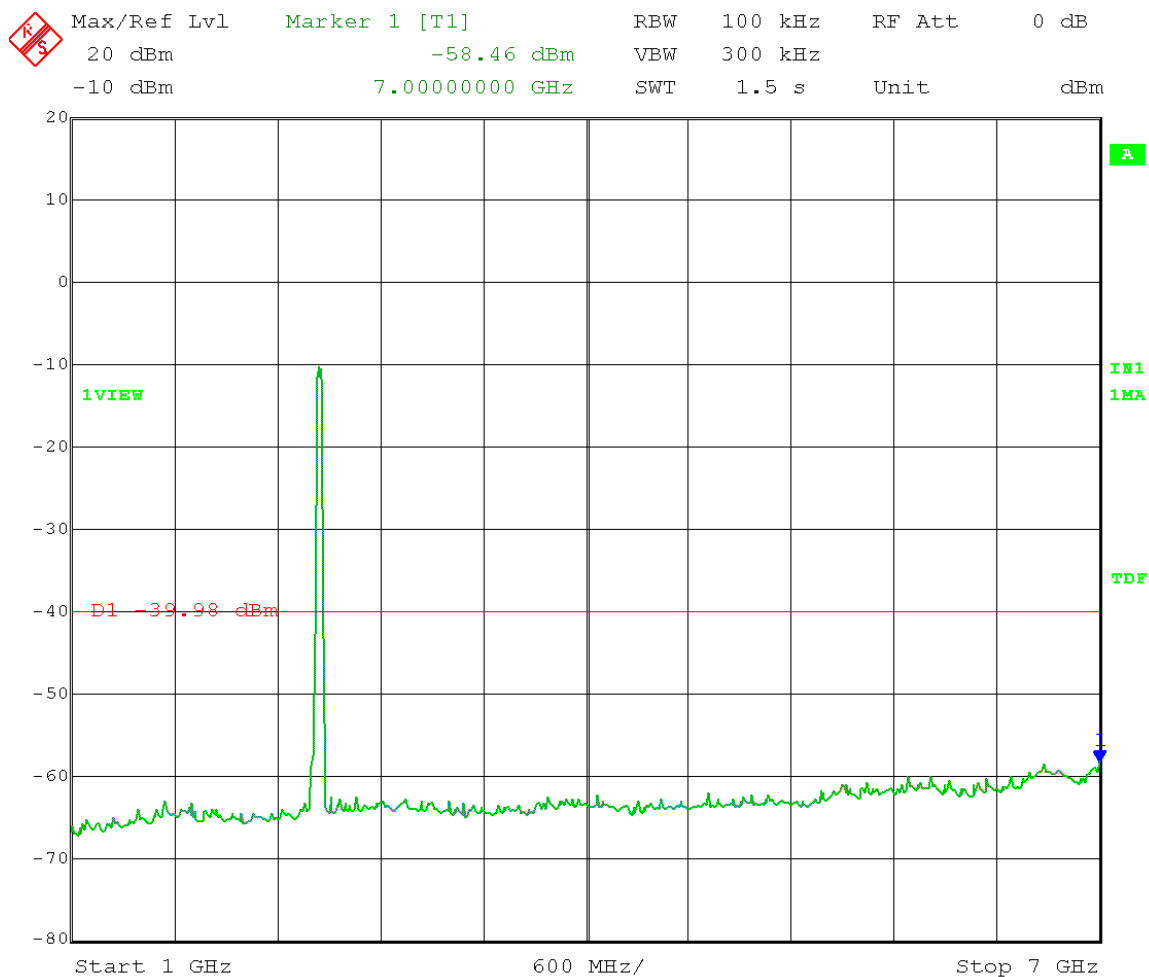


Date: 22.JAN.2014 11:22:28

Test Date: 01-22-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2452 MHz  
 Output Power Setting 4.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -9.98 dBm - 30 dB = -39.98 dBm  
 Frequency Range: 7 - 16 GHz

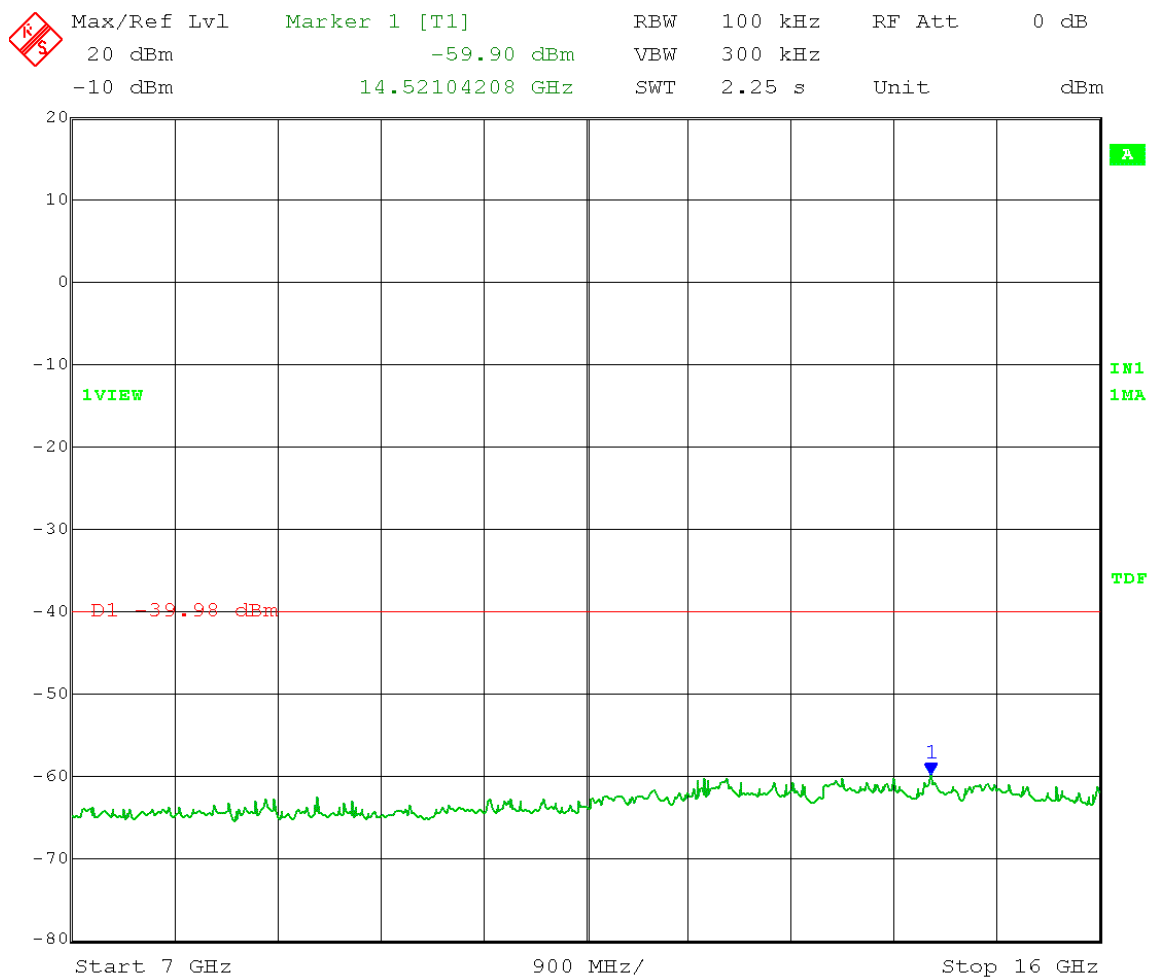


Date: 22.JAN.2014 11:24:17

Test Date: 01-22-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2452 MHz  
Output Power Setting 4.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -9.98 dBm – 30 dB = -39.98 dBm  
Frequency Range: 16 – 25 GHz

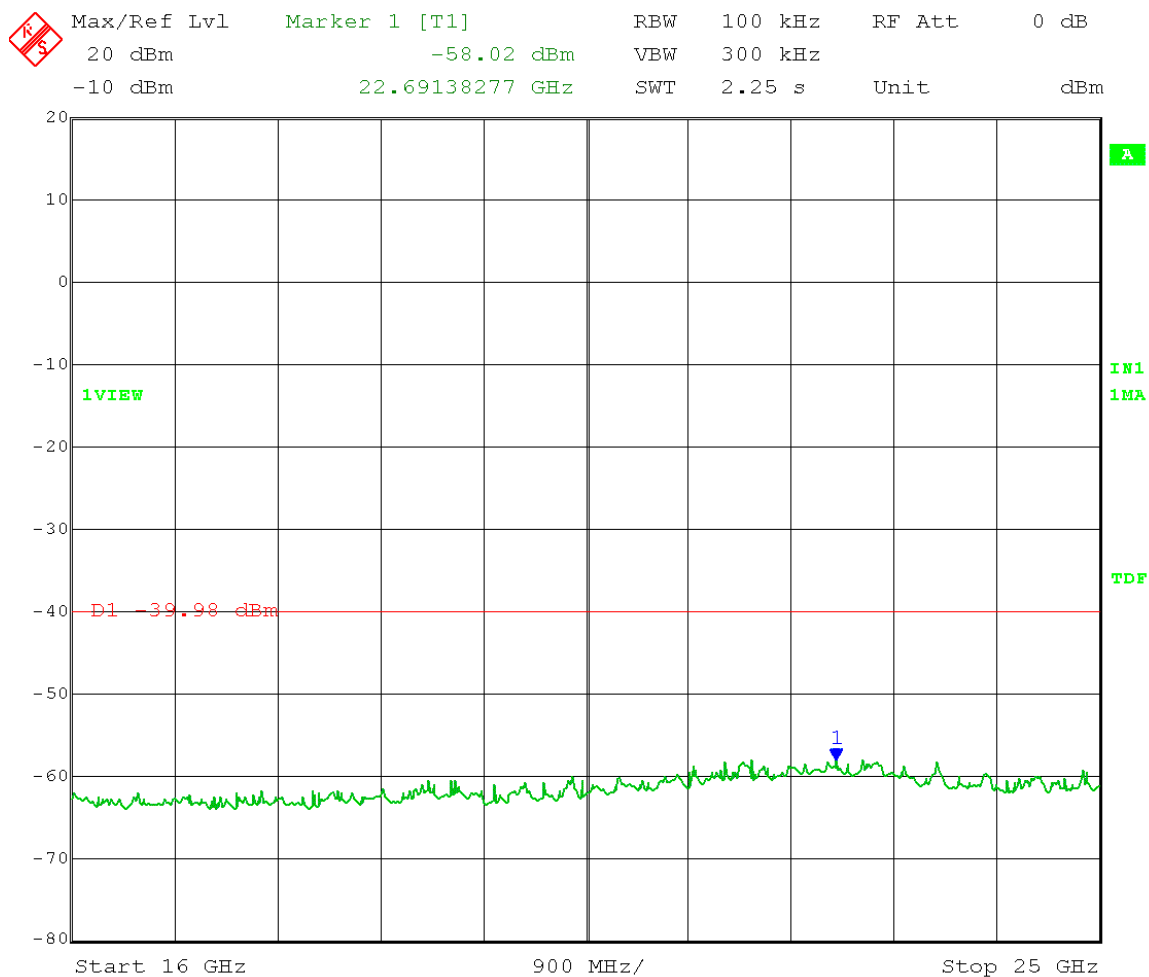

Date: 22.JAN.2014 11:25:59

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 1 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -11.36 dBm - 30 dB = -41.36 dBm

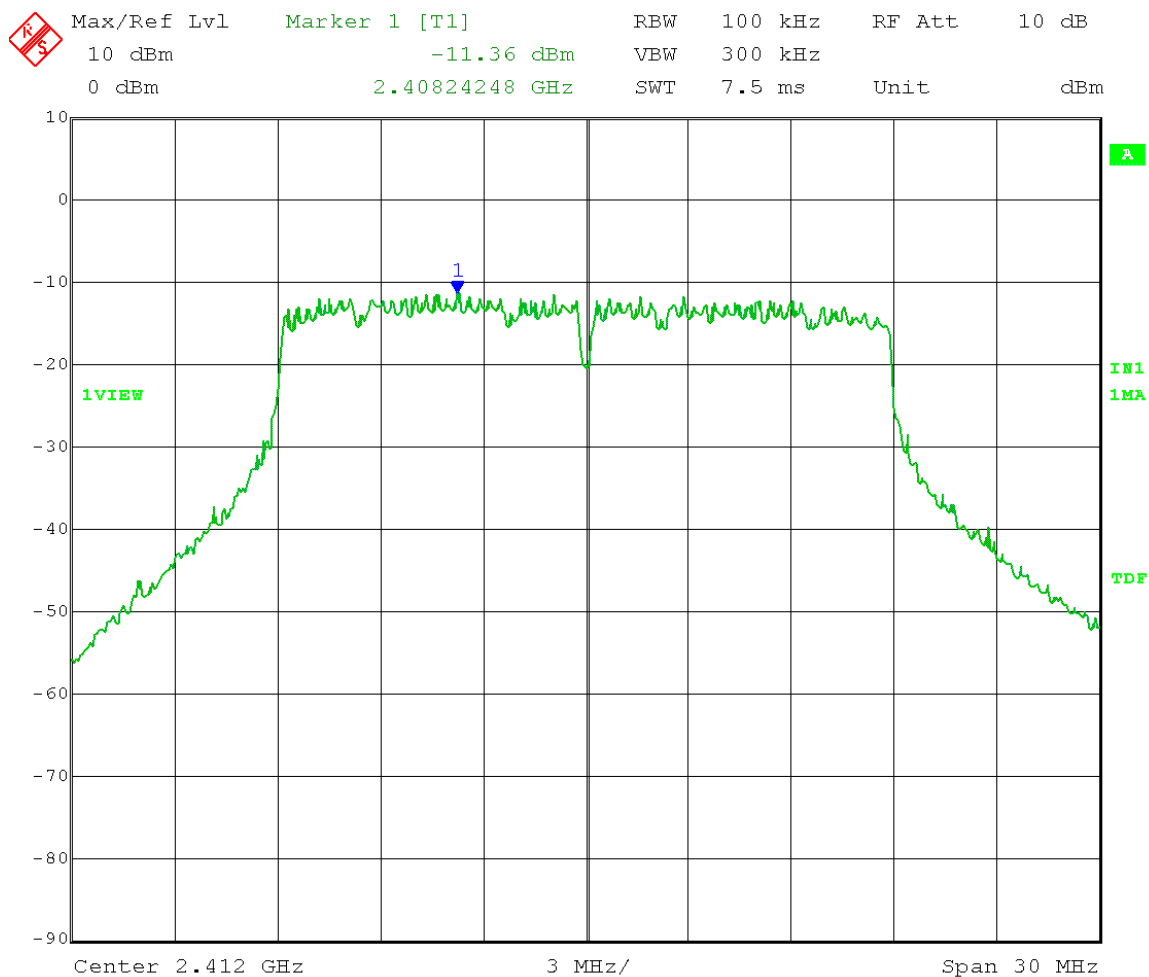


Date: 31.JAN.2014 15:31:05

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold **Low Channel Transmit = 2412 MHz**  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -11.36 dBm - 30 dB = -41.36 dBm  
 Frequency Range: 30 - 1000 MHz




Date: 31.JAN.2014 15:36:55

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 1 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -11.36 dBm - 30 dB = -41.36 dBm  
Frequency Range: 1 - 7 GHz

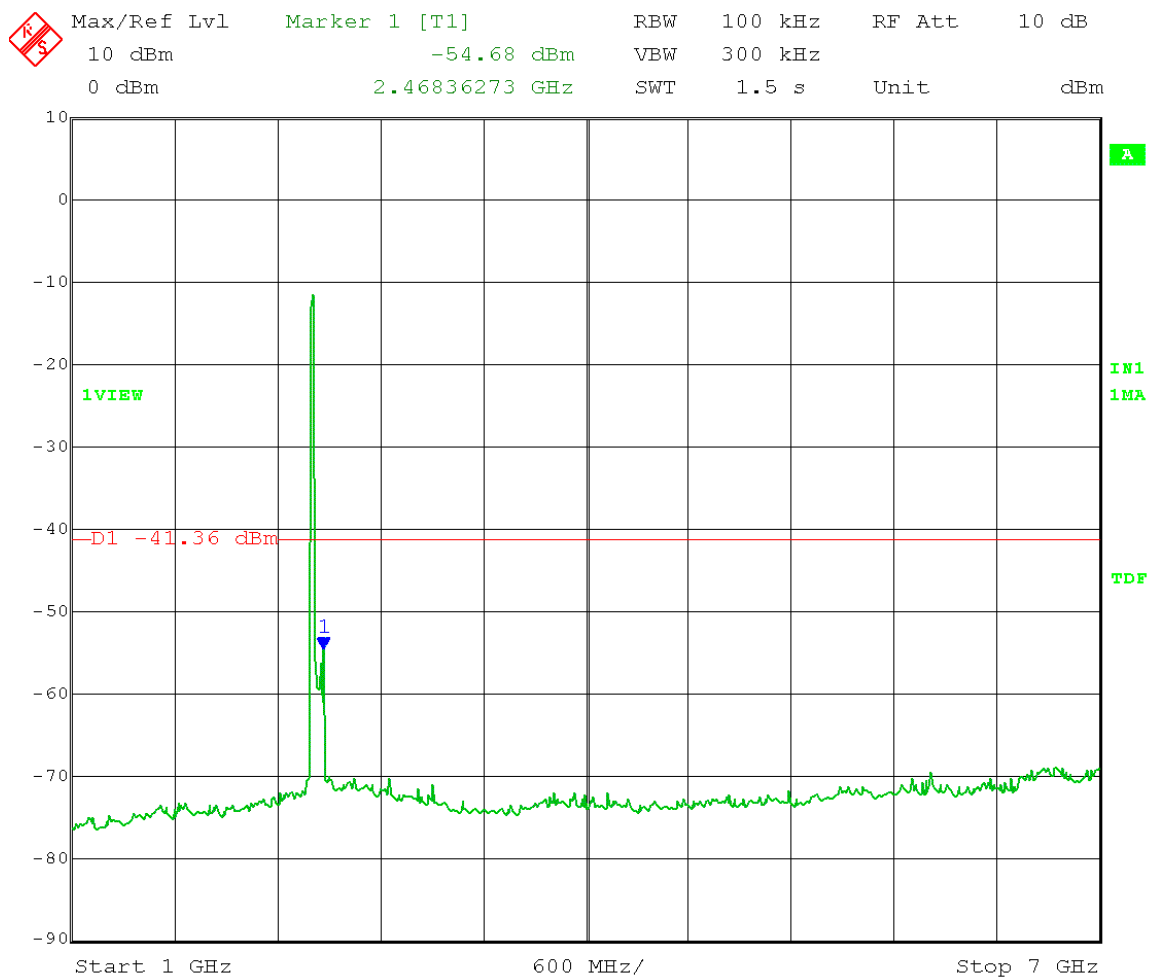


Date: 31.JAN.2014 15:33:01

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2412 MHz  
Output Power Setting 1 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -11.36 dBm - 30 dB = -41.36 dBm  
Frequency Range: 7 - 16 GHz

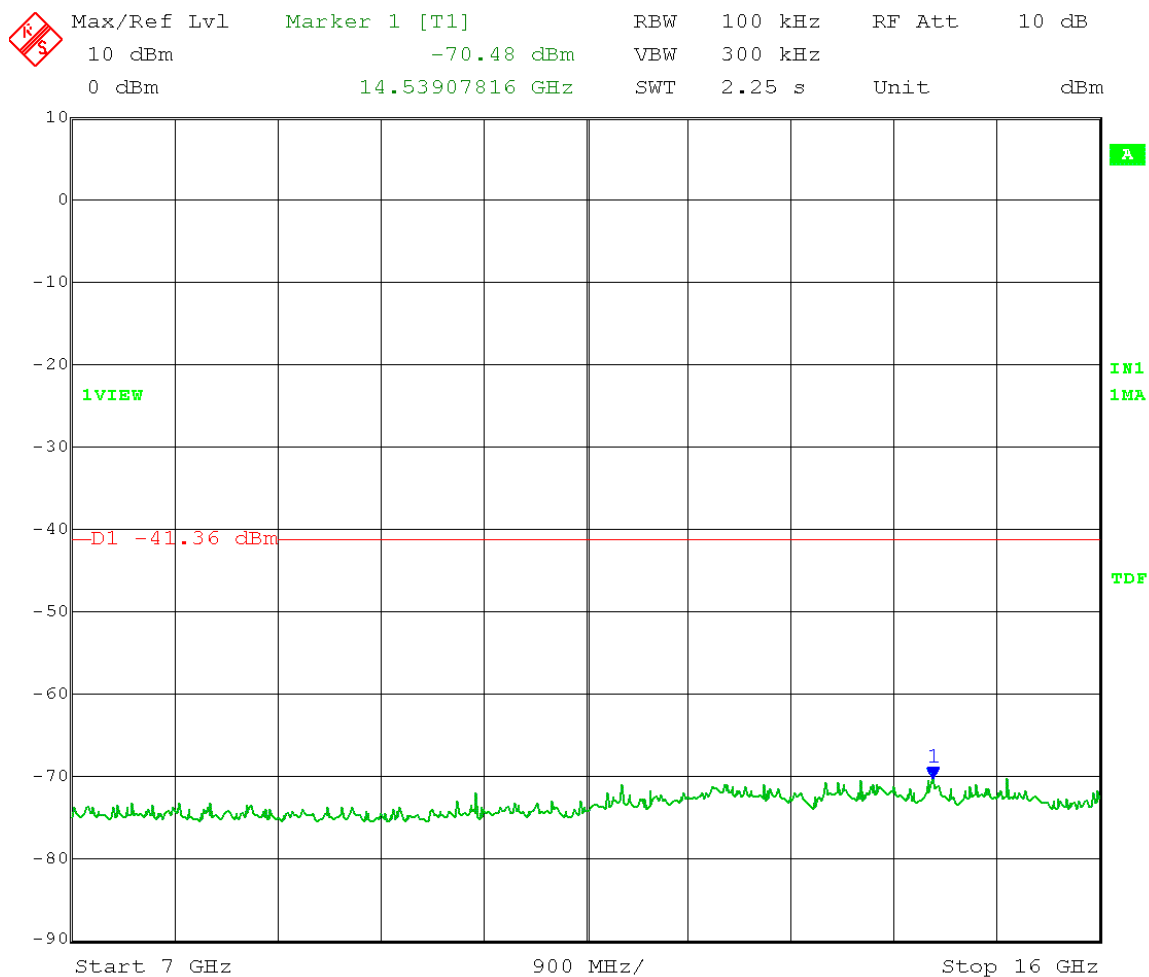


Date: 31.JAN.2014 15:34:29

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -11.36 dBm - 30 dB = -41.36 dBm  
 Frequency Range: 16 - 25 GHz

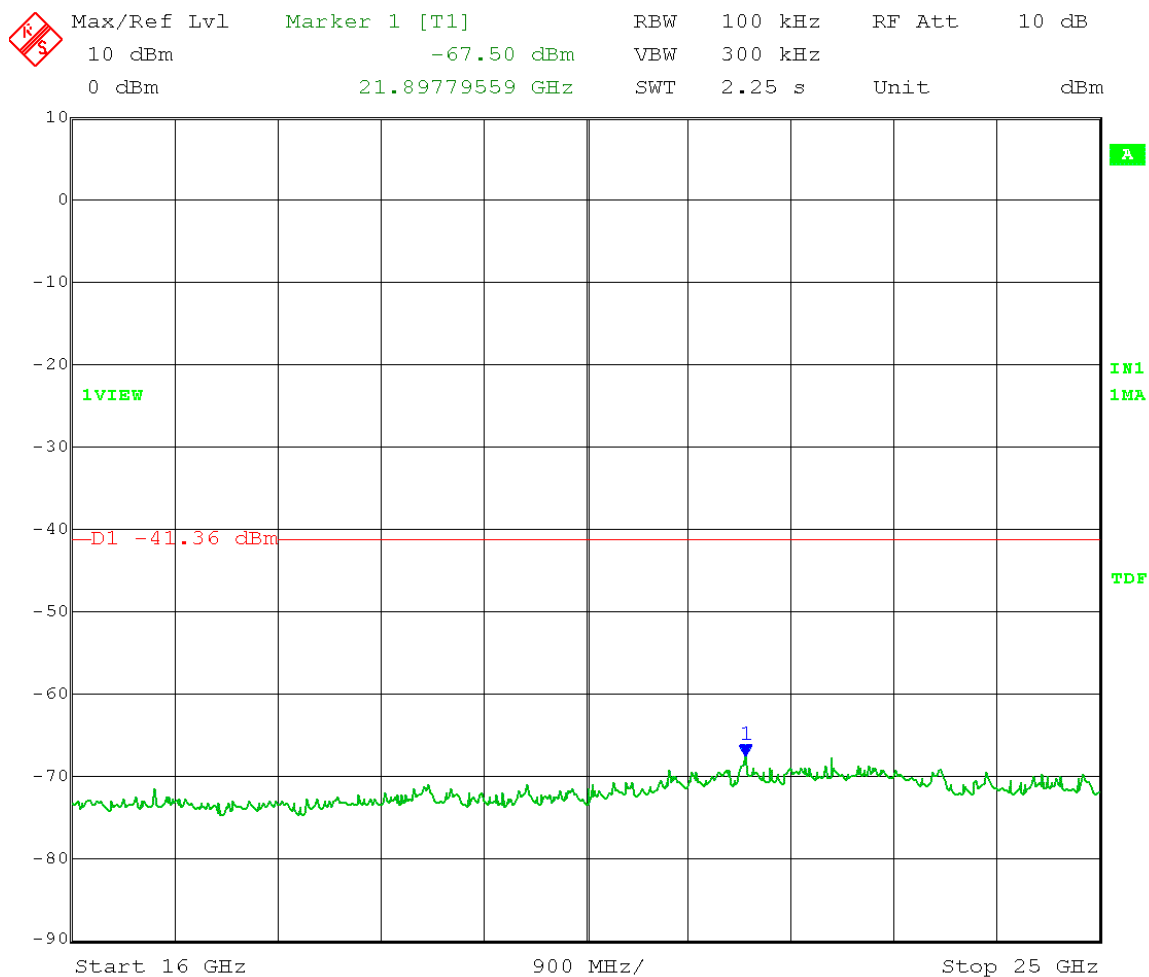


Date: 31.JAN.2014 15:35:37

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 1.5 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -10.61 dBm - 30 dB = -40.61 dBm

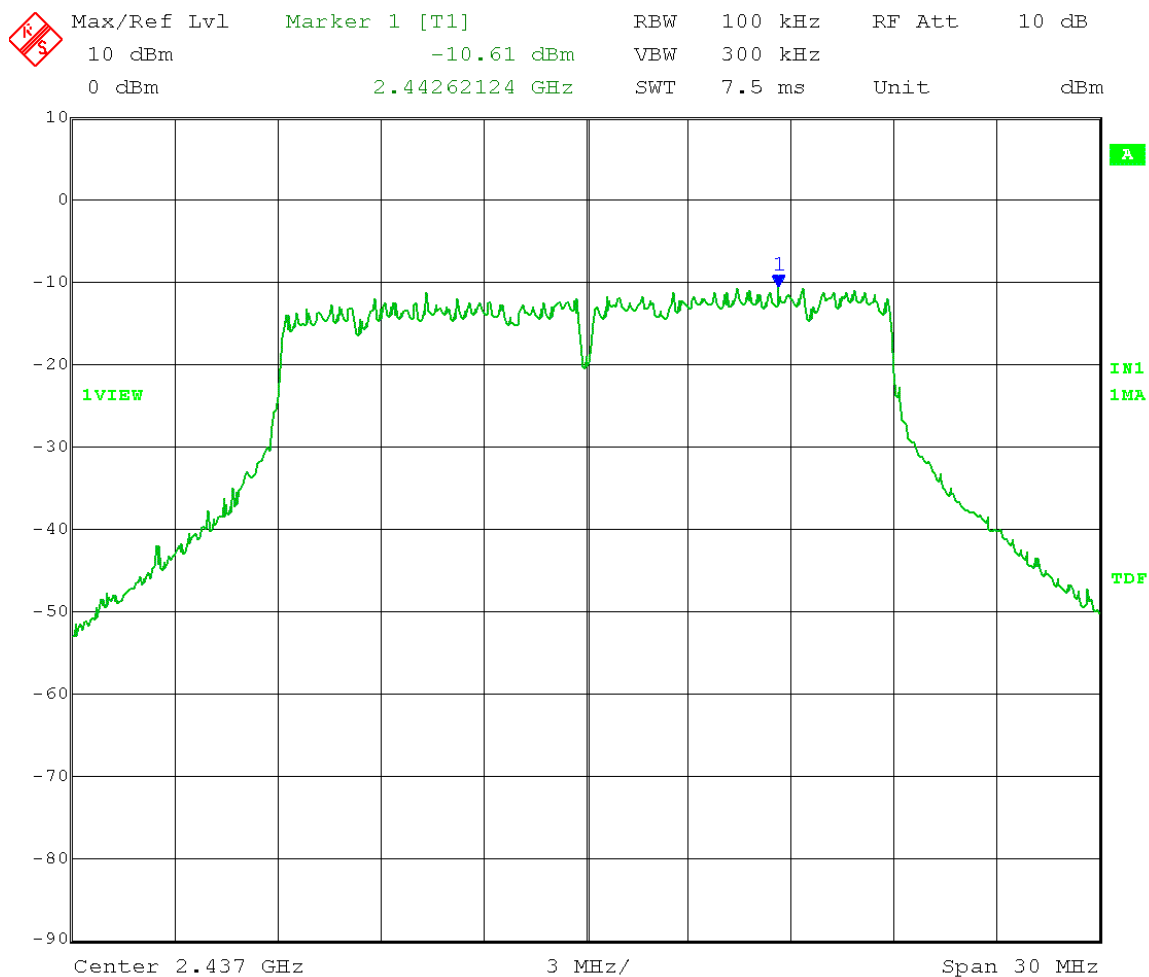


Date: 31.JAN.2014 11:26:51

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -10.61 dBm – 30 dB = -40.61 dBm  
 Frequency Range: 30 – 1000 MHz

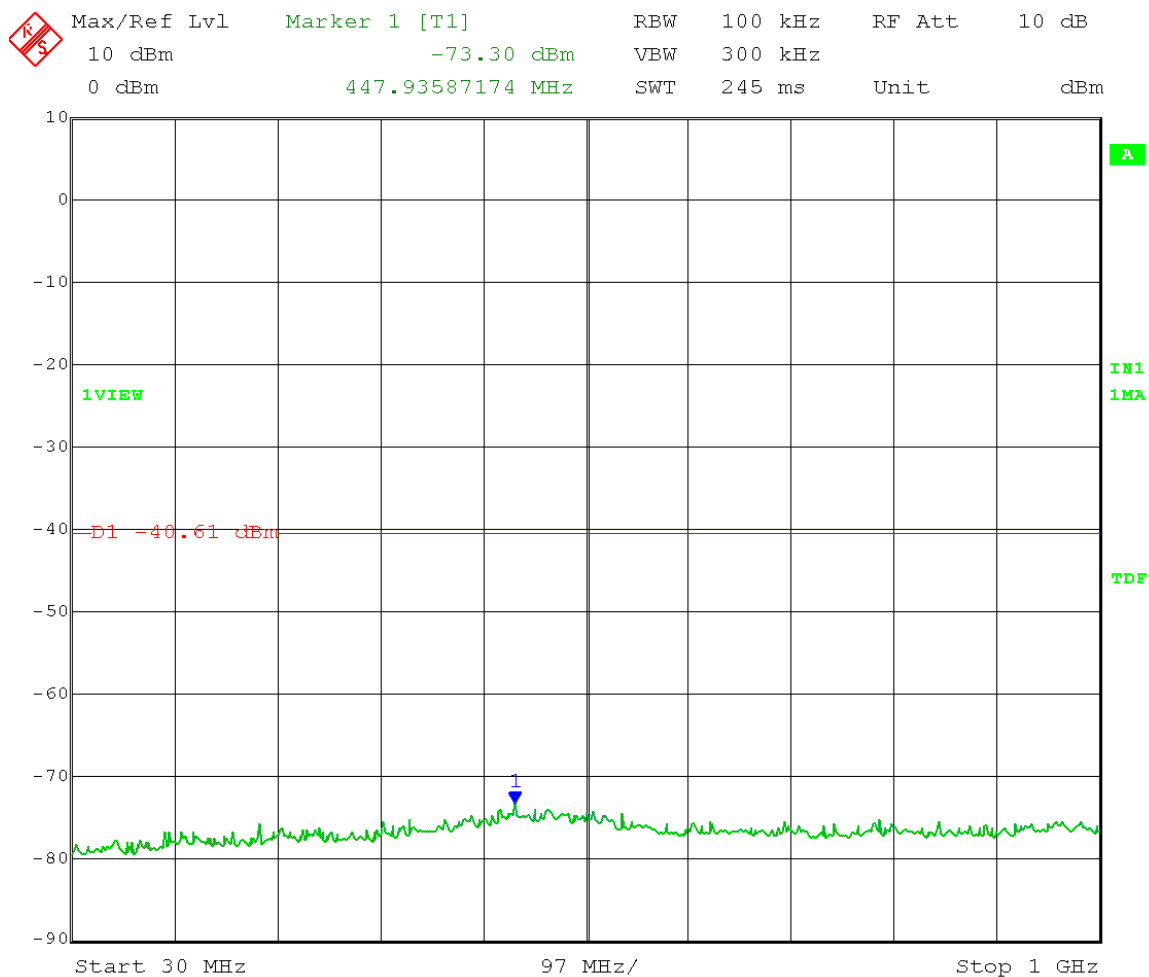


Date: 31.JAN.2014 11:33:43

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -10.61 dBm - 30 dB = -40.61 dBm  
 Frequency Range: 1 - 7 GHz

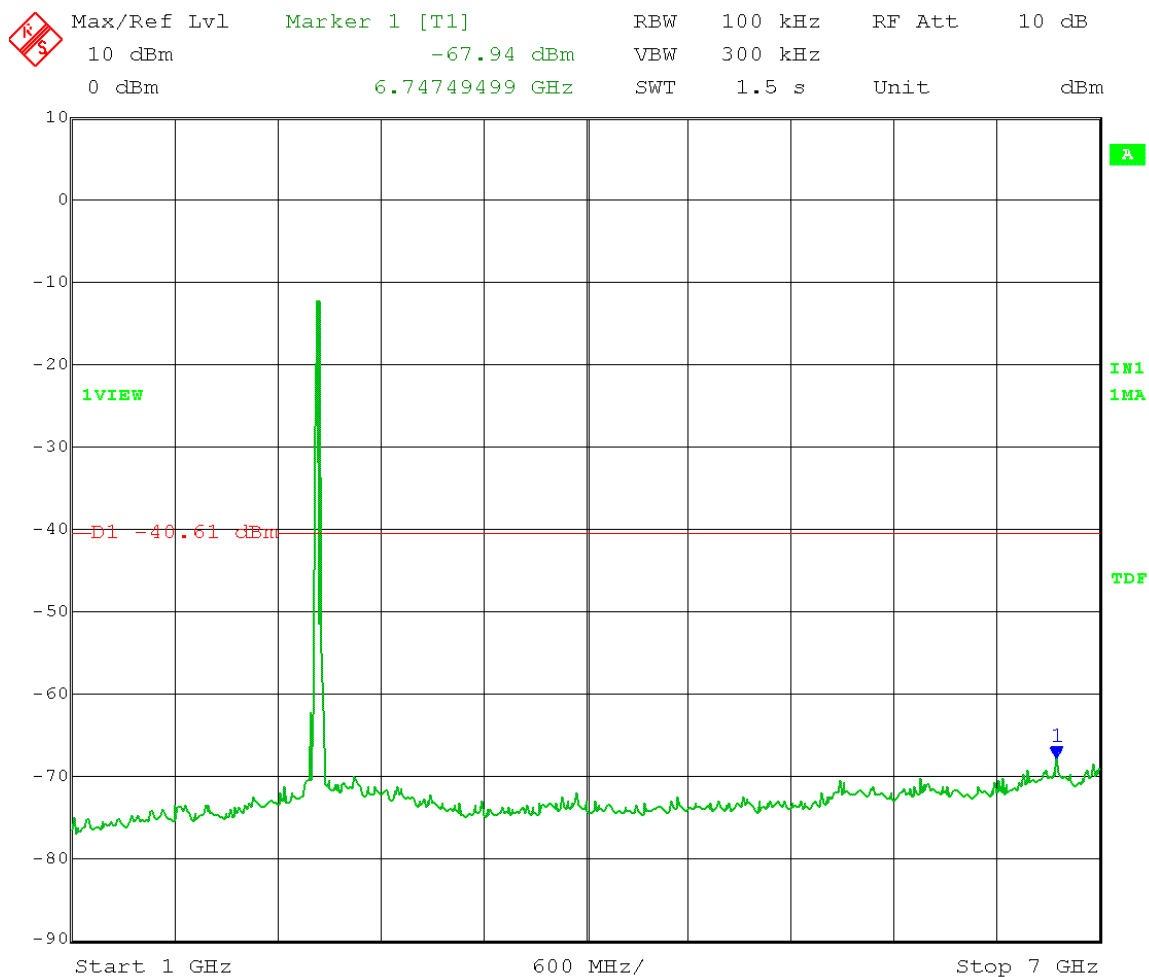


Date: 31.JAN.2014 11:29:15

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -10.61 dBm - 30 dB = -40.61 dBm  
 Frequency Range: 1 - 7 GHz

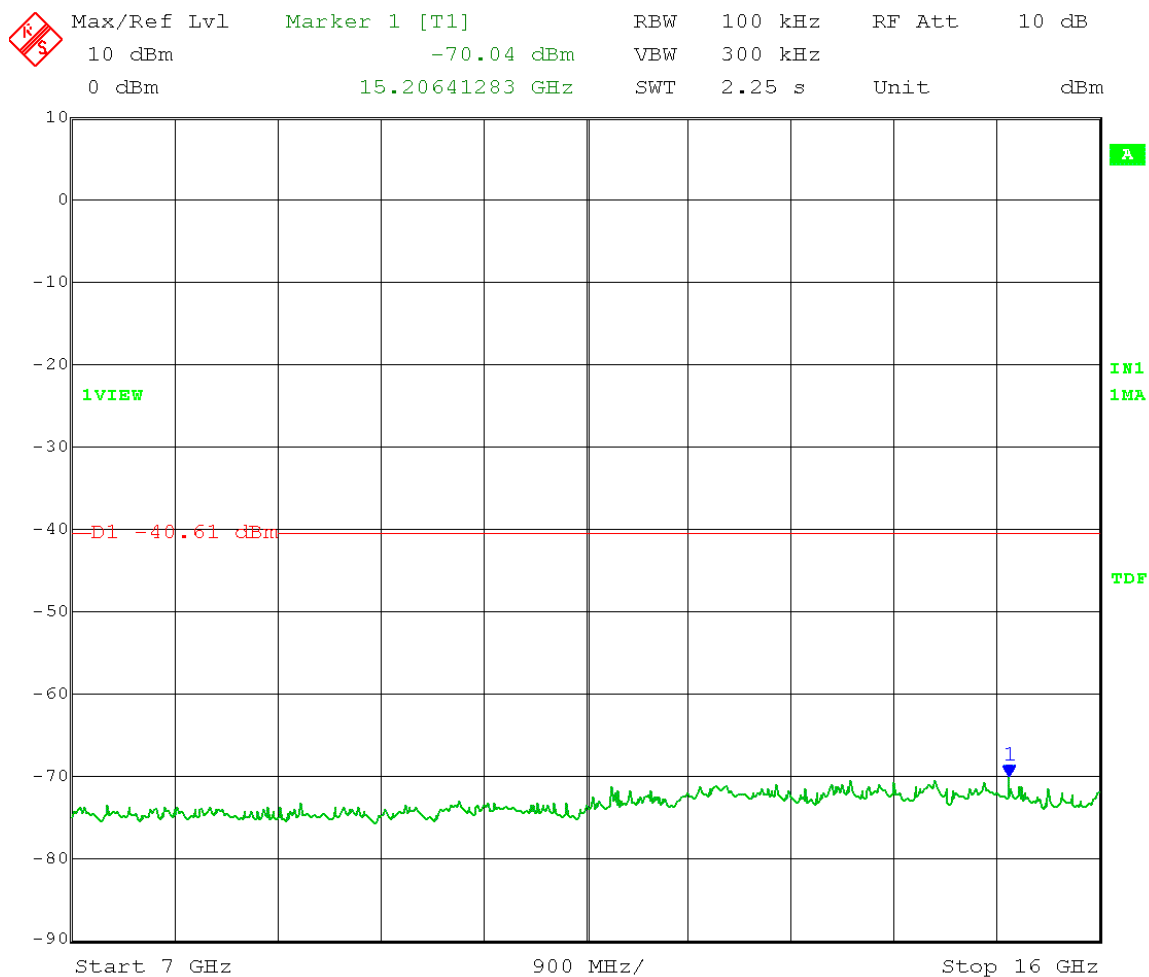


Date: 31.JAN.2014 11:31:03

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -10.61 dBm - 30 dB = -40.61 dBm  
 Frequency Range: 16 - 25 GHz

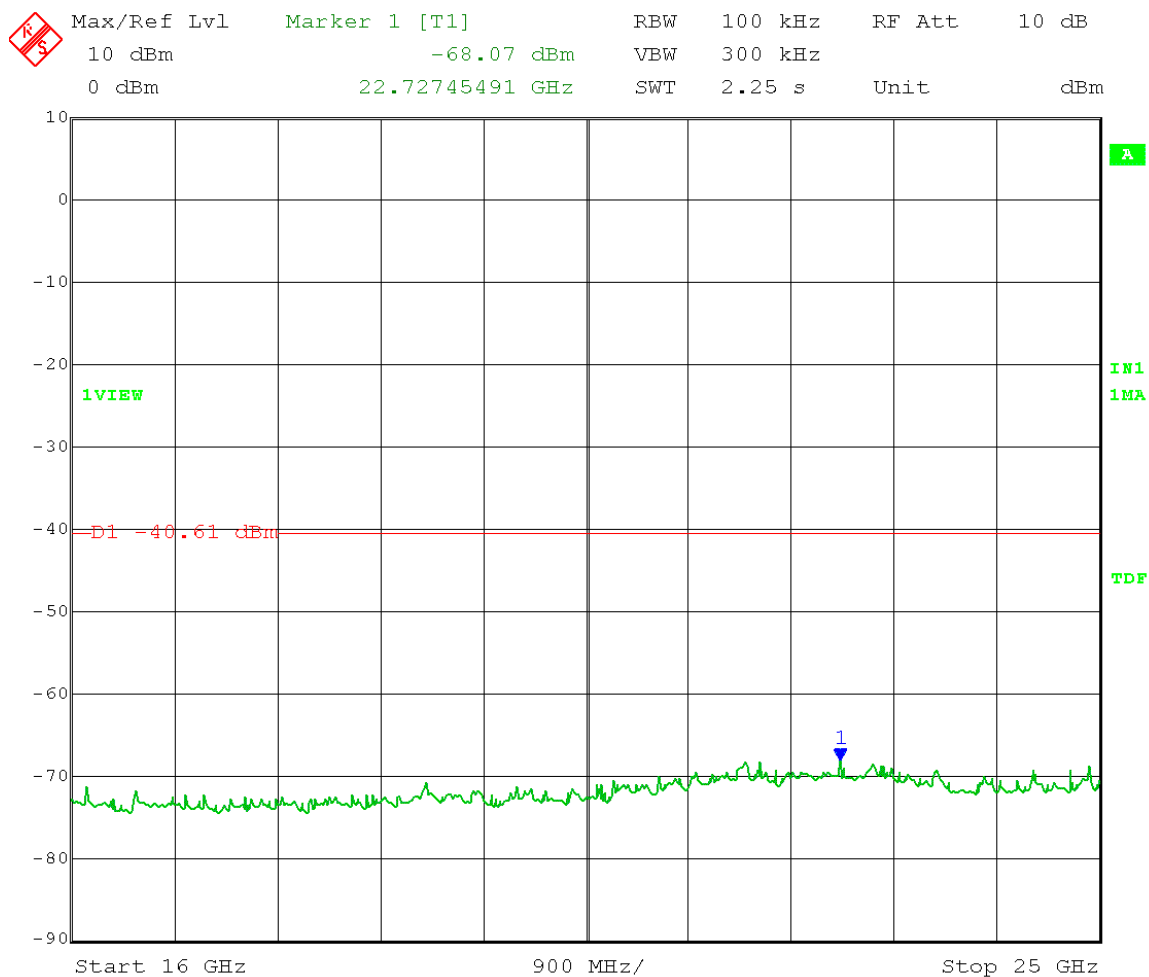

Date: 31.JAN.2014 11:32:17

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 0 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -12.74 dBm - 30 dB = -42.74 dBm

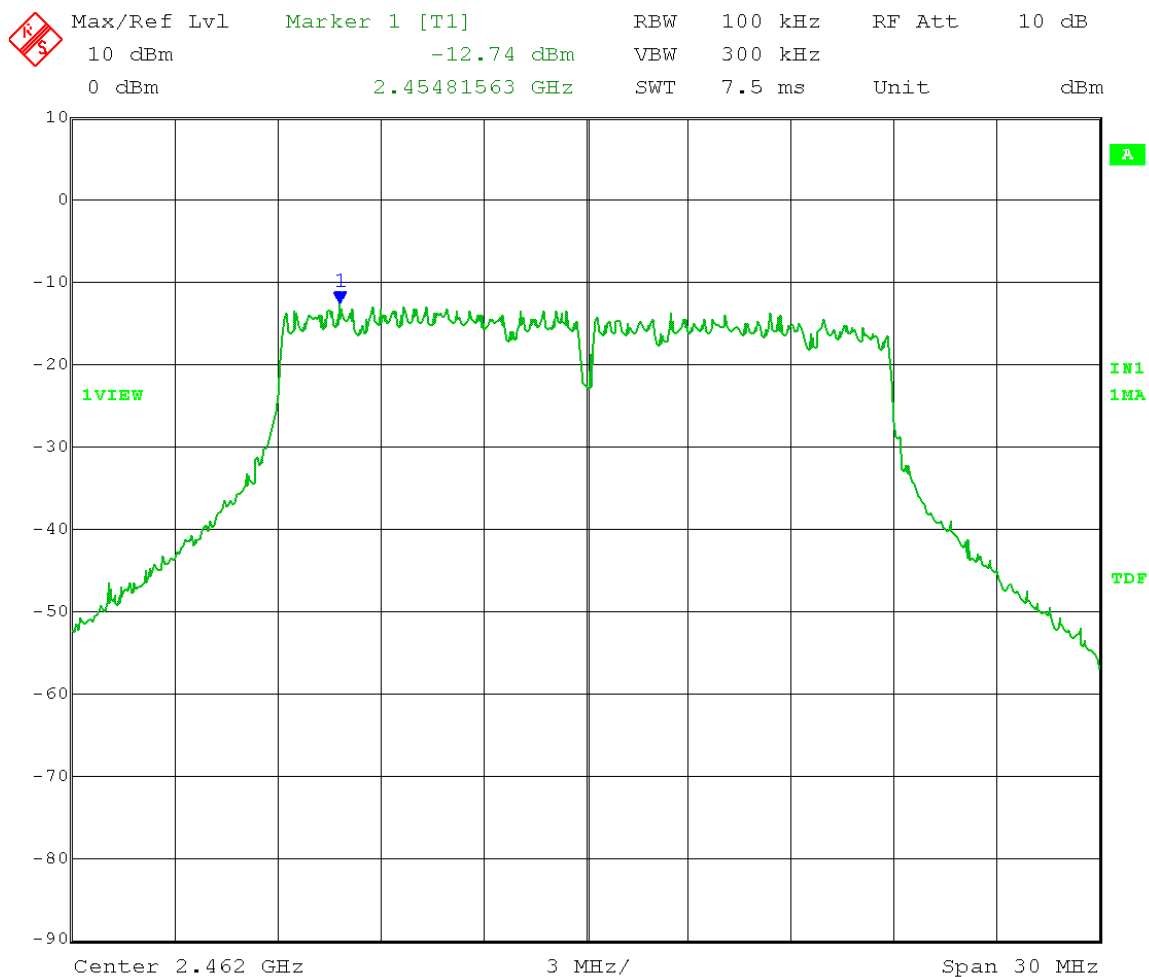


Date: 31.JAN.2014 15:39:31

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.74 dBm - 30 dB = -42.74 dBm  
 Frequency Range: 30 - 1000 MHz




Date: 31.JAN.2014 15:45:46

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.74 dBm - 30 dB = -42.74 dBm  
 Frequency Range: 1 - 7 GHz

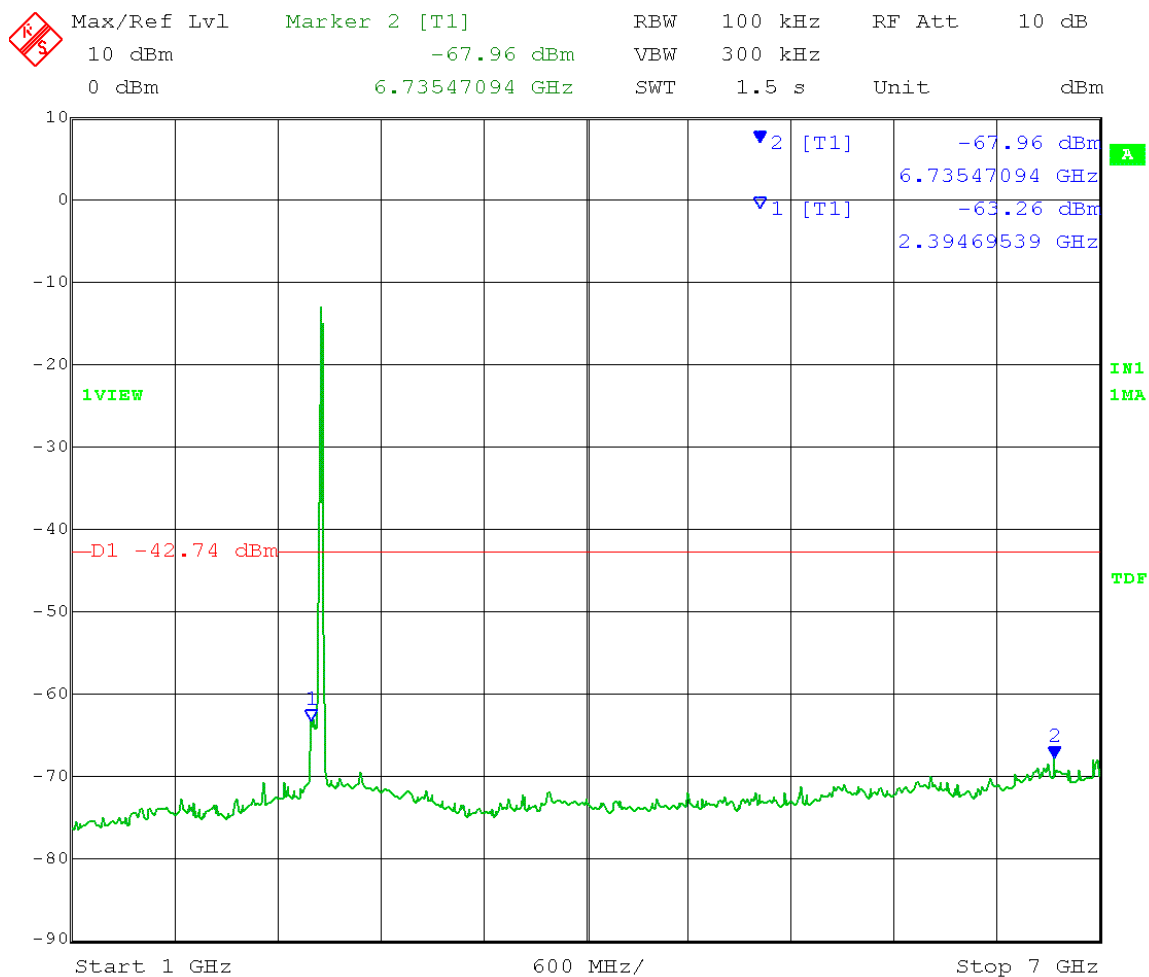


Date: 31.JAN.2014 15:41:39

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.74 dBm - 30 dB = -42.74 dBm  
 Frequency Range: 7 - 16 GHz

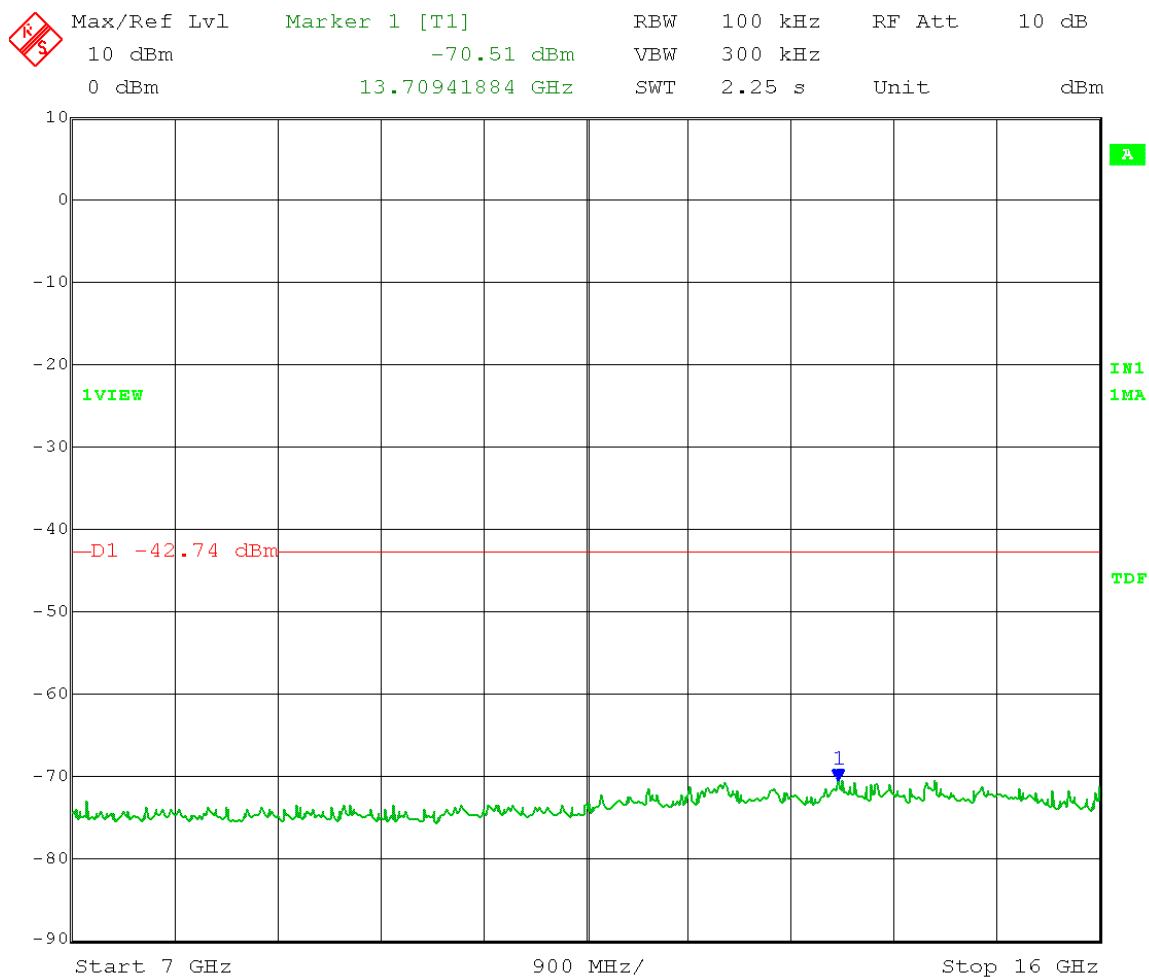


Date: 31.JAN.2014 15:42:50

Test Date: 01-31-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2462 MHz  
Output Power Setting 0 Channel bandwidth: 20MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -12.74 dBm - 30 dB = -42.74 dBm  
Frequency Range: 16 - 25 GHz

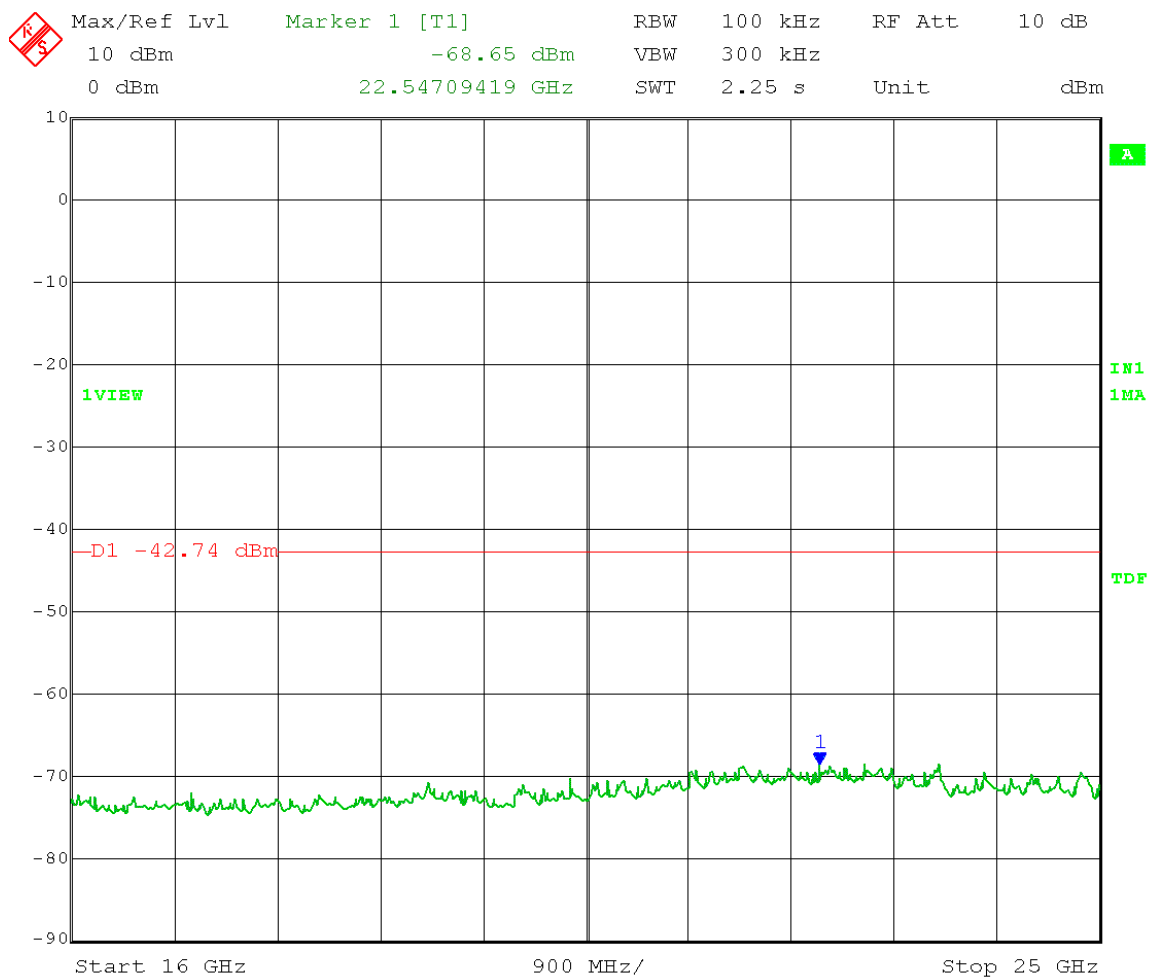


Date: 31.JAN.2014 15:44:25

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 1 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -14.17 dBm - 30 dB = -44.17 dBm

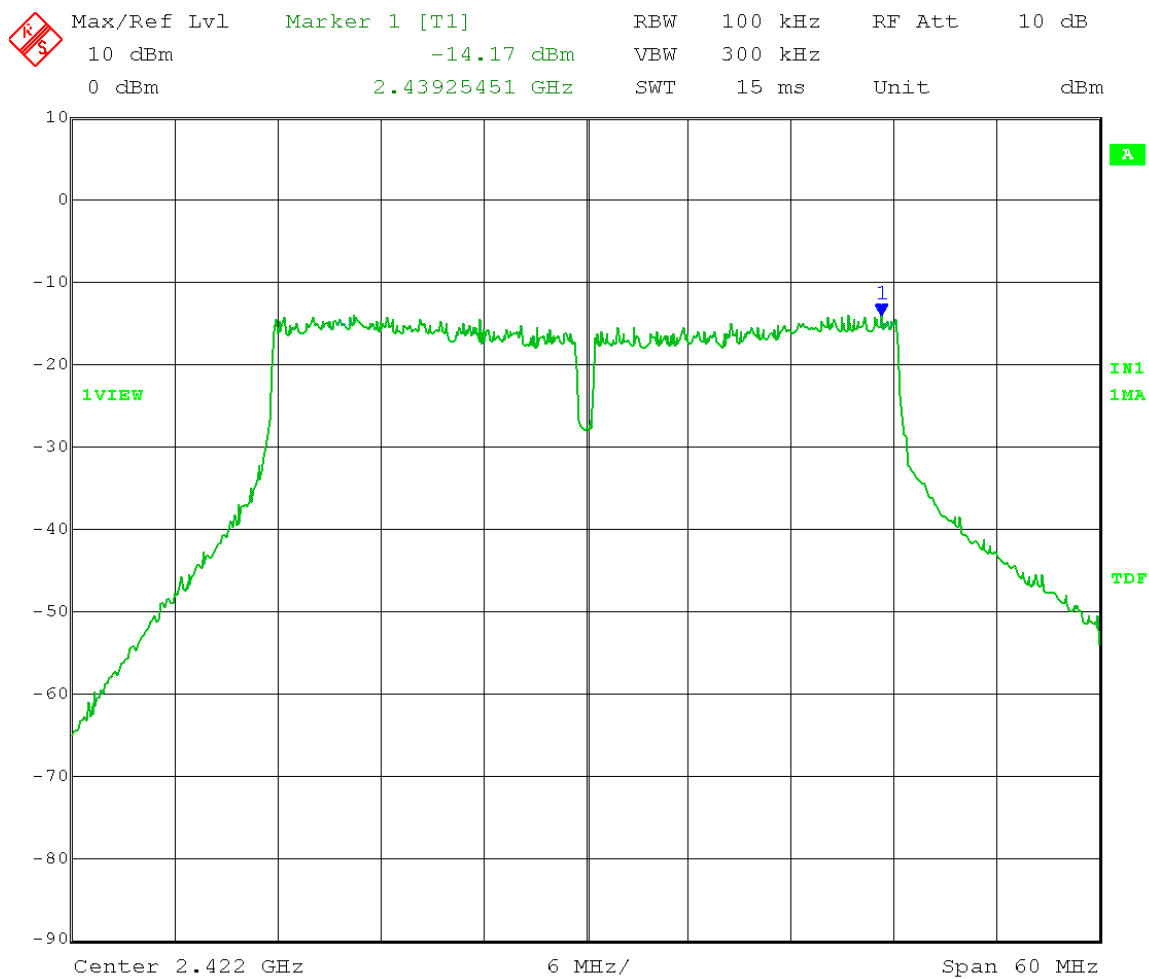


Date: 3.FEB.2014 14:33:21

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold **Low Channel Transmit = 2422 MHz**  
 Output Power Setting 1 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -14.17 dBm - 30 dB = -44.17 dBm  
 Frequency Range: 30 - 1000 MHz

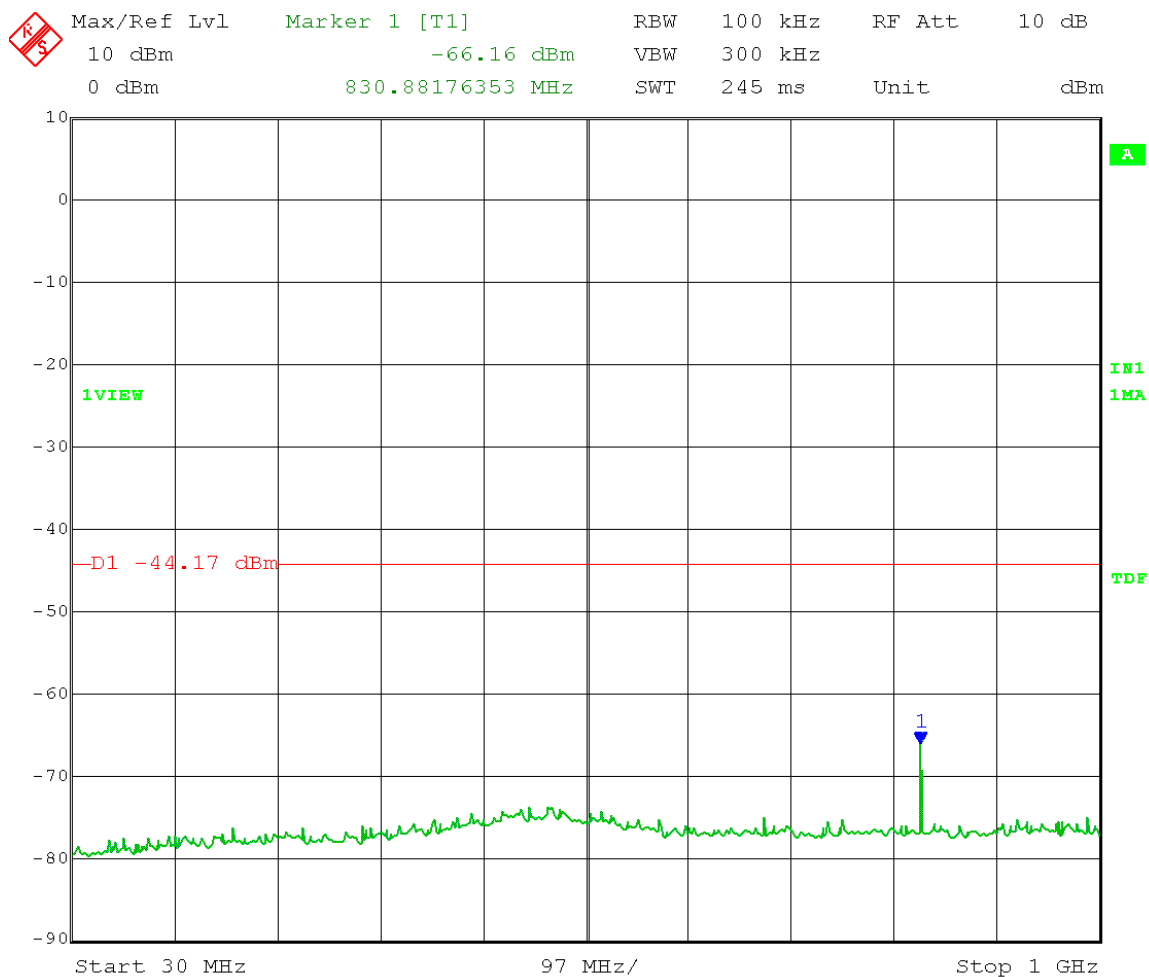


Date: 3.FEB.2014 14:38:36

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 1 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -14.17 dBm - 30 dB = -44.17 dBm  
Frequency Range: 1 - 7 GHz

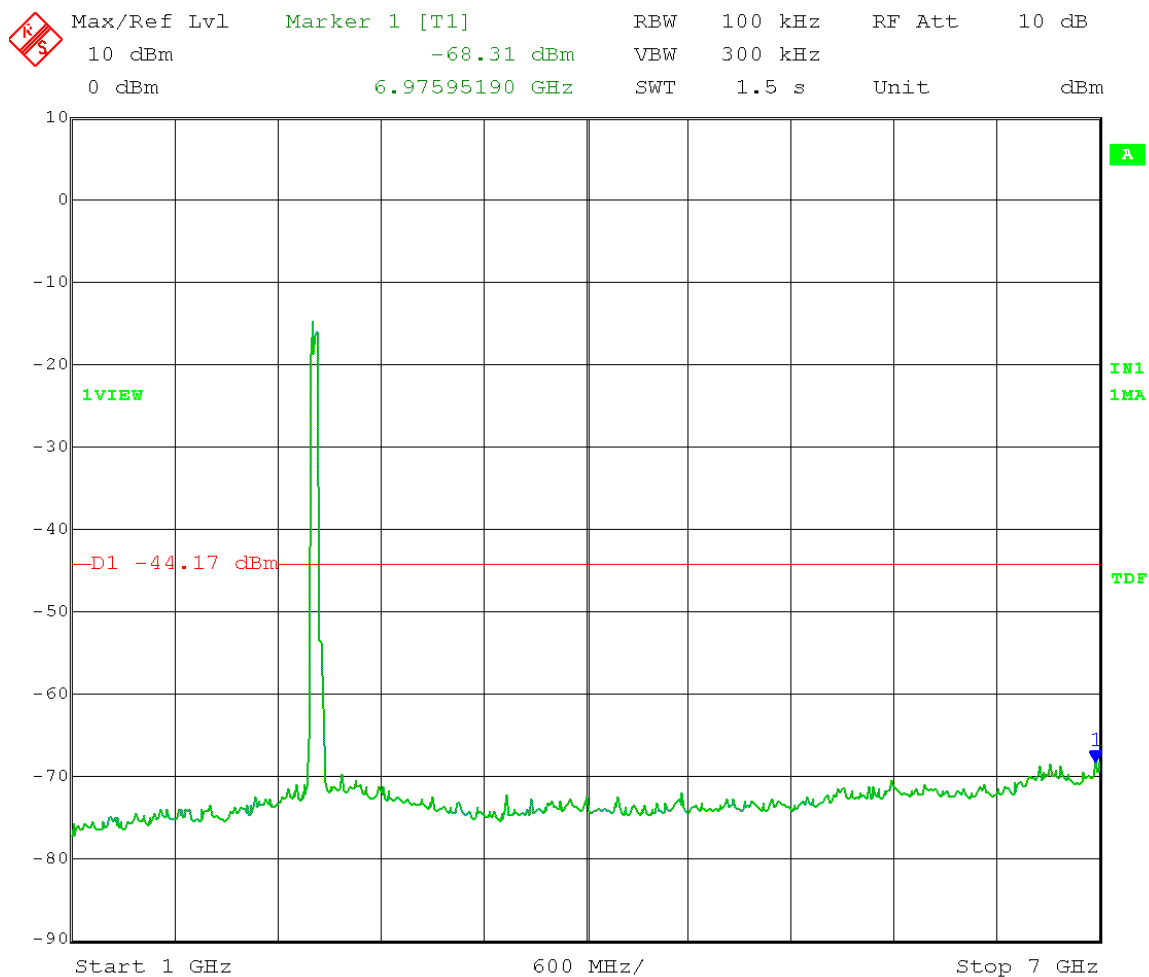


Date: 3.FEB.2014 14:35:11

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 1 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -14.17 dBm - 30 dB = -44.17 dBm  
Frequency Range: 7 - 16 GHz

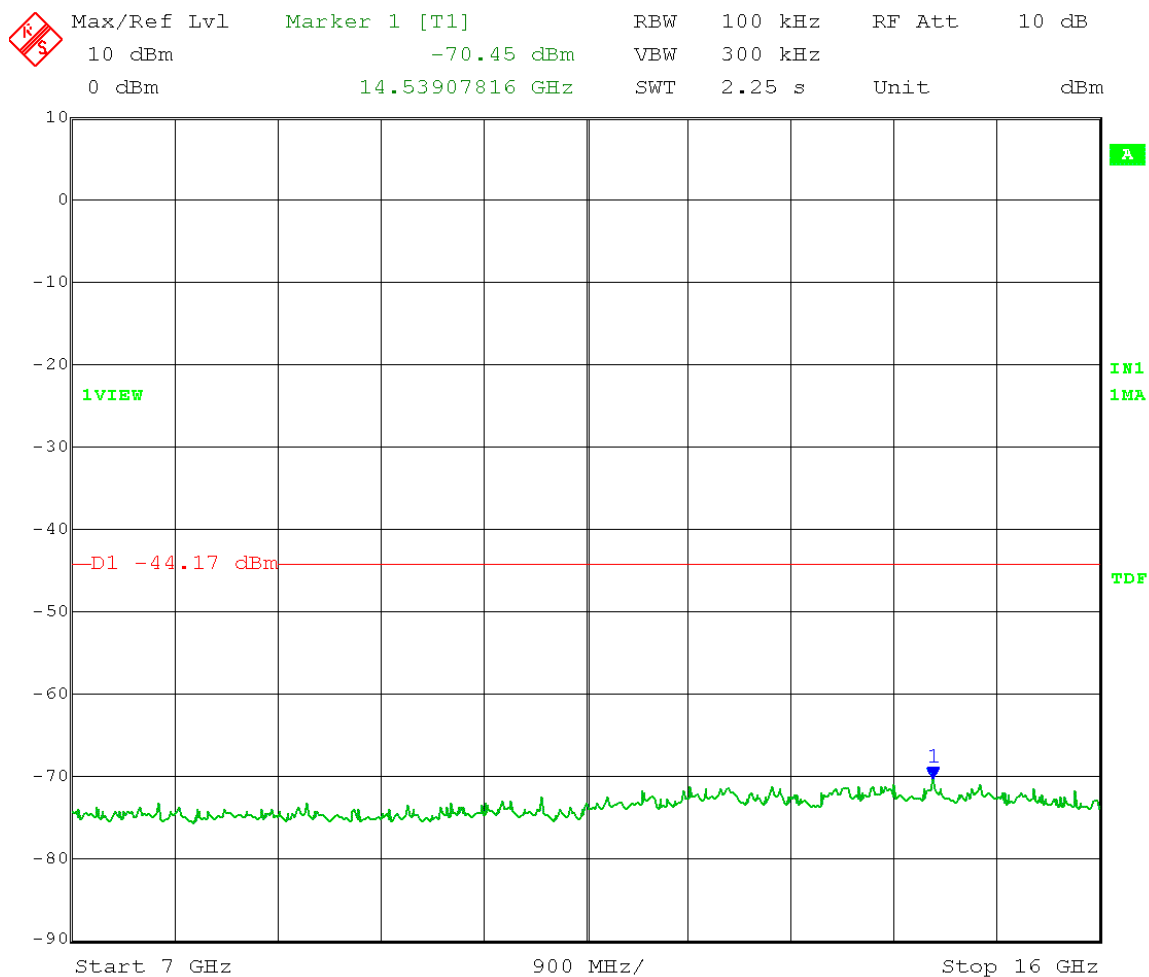


Date: 3.FEB.2014 14:36:18

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Low Channel Transmit = 2422 MHz  
Output Power Setting 1 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -14.17 dBm - 30 dB = -44.17 dBm  
Frequency Range: 16 - 25 GHz

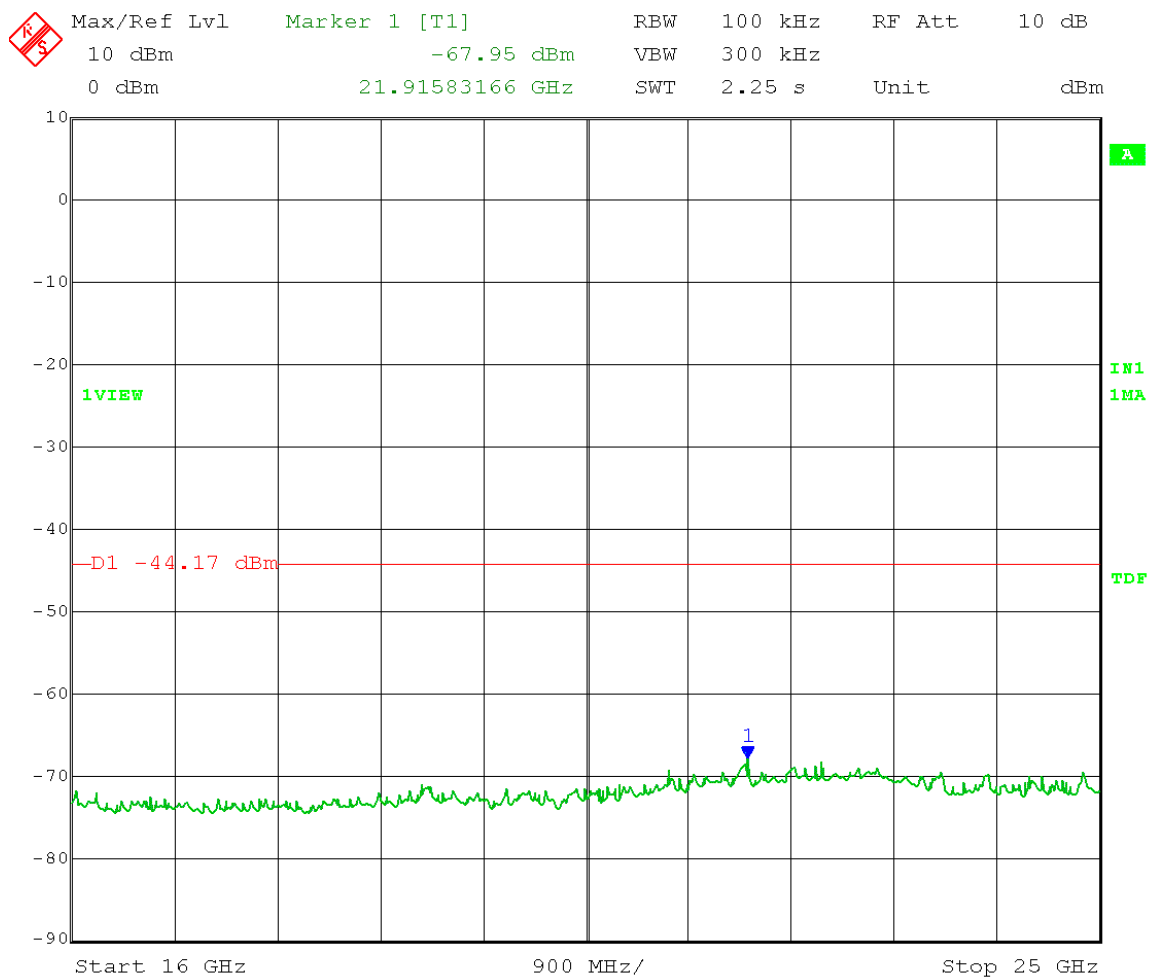


Date: 3.FEB.2014 14:37:21

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 1.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
Limit = -12.67 dBm - 30 dB = -42.67 dBm

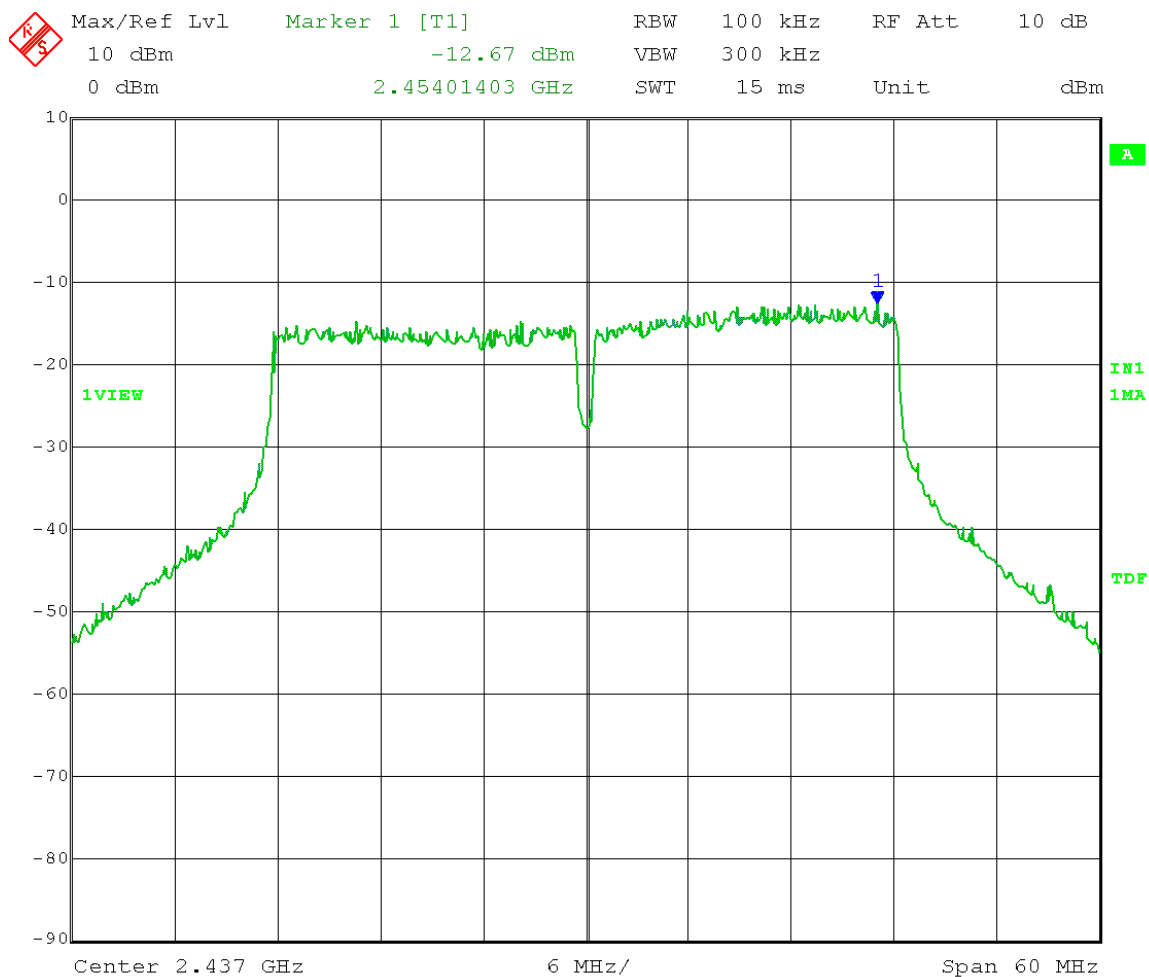

Date: 3.FEB.2014 14:25:02

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.67 dBm - 30 dB = -42.67 dBm  
 Frequency Range: 30 - 1000 MHz

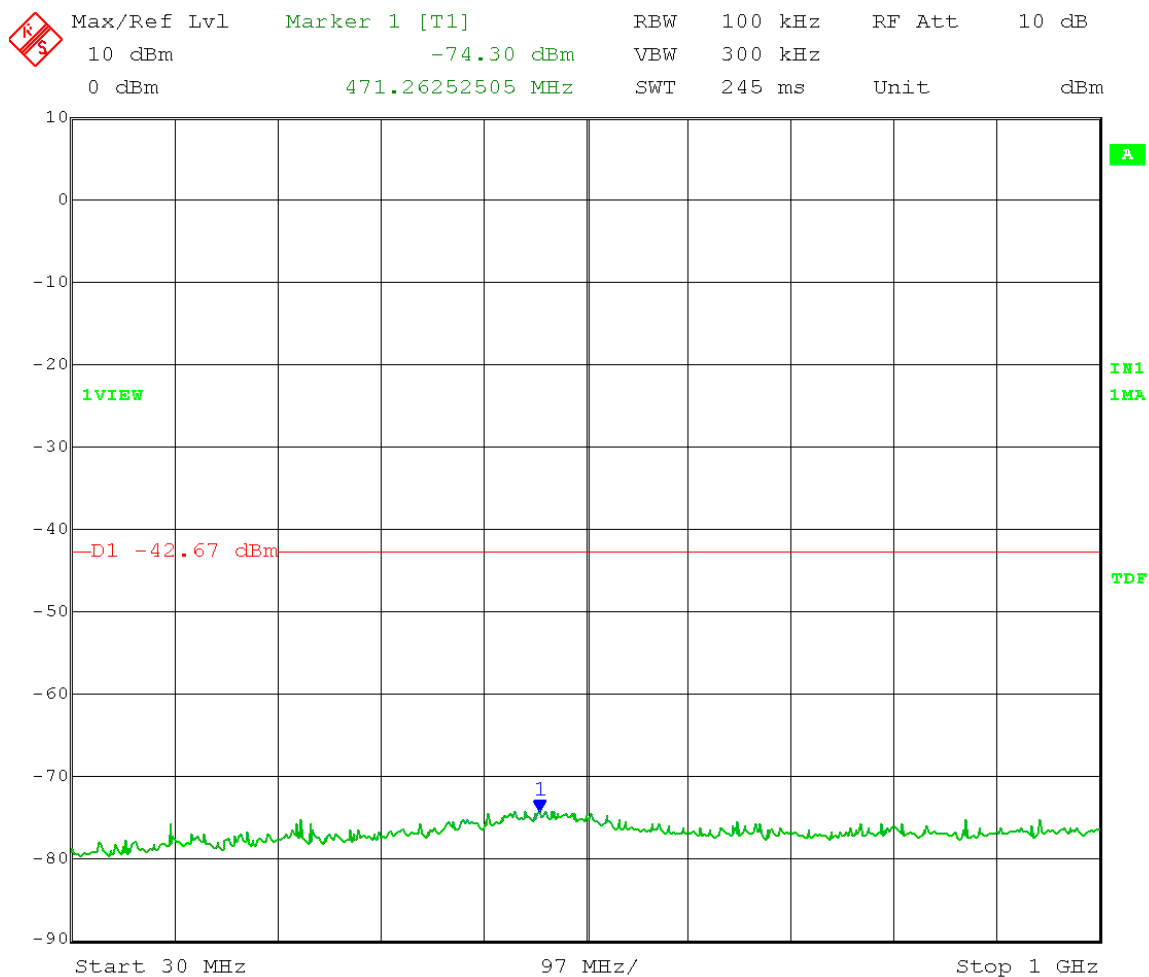


Date: 3.FEB.2014 14:30:46

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold Mid Channel Transmit = 2437 MHz  
Output Power Setting 1.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -12.67 dBm - 30 dB = -42.67 dBm  
Frequency Range: 1 - 7 GHz




Date: 3.FEB.2014 14:26:57

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.67 dBm - 30 dB = -42.67 dBm  
 Frequency Range: 7 - 16 GHz

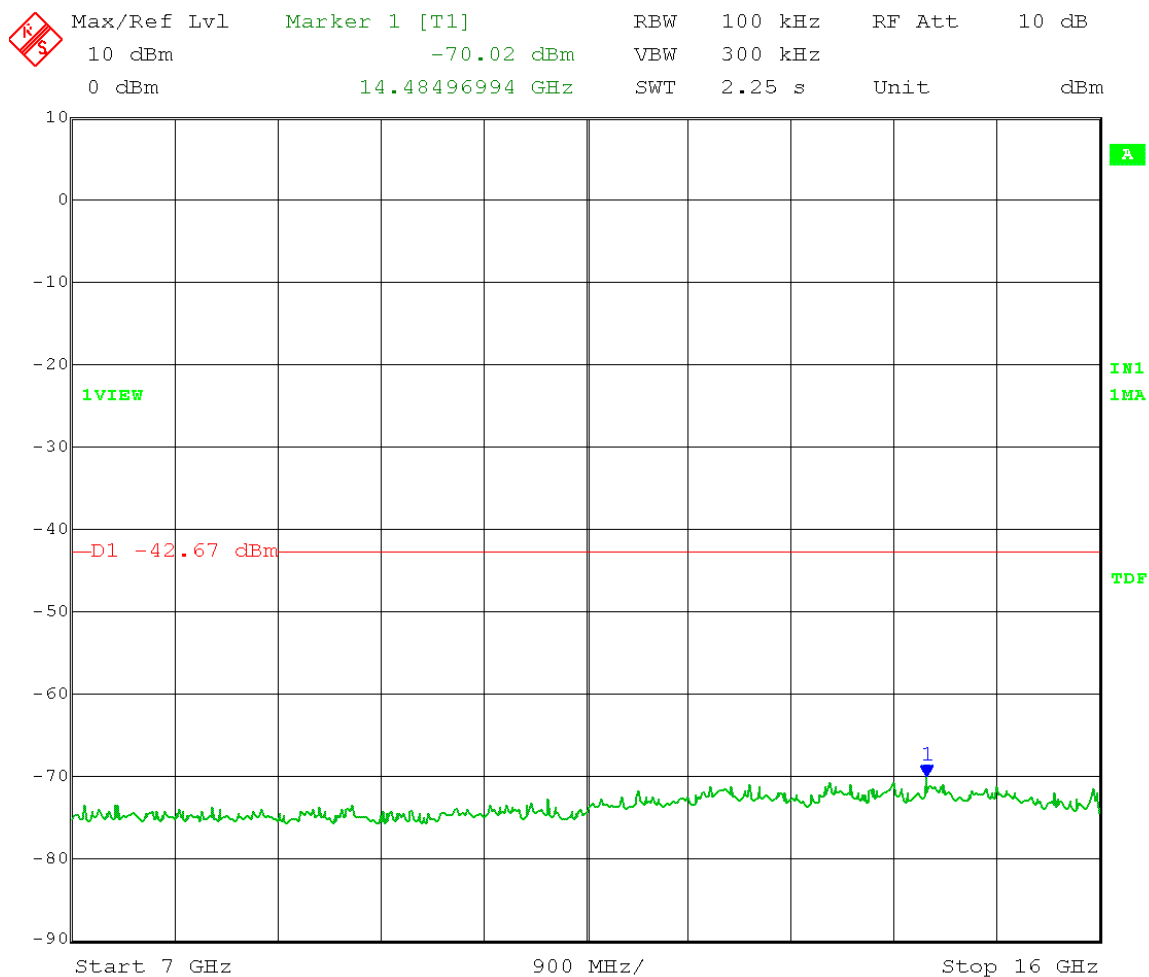


Date: 3.FEB.2014 14:28:17

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -12.67 dBm - 30 dB = -42.67 dBm  
 Frequency Range: 16 - 25 GHz

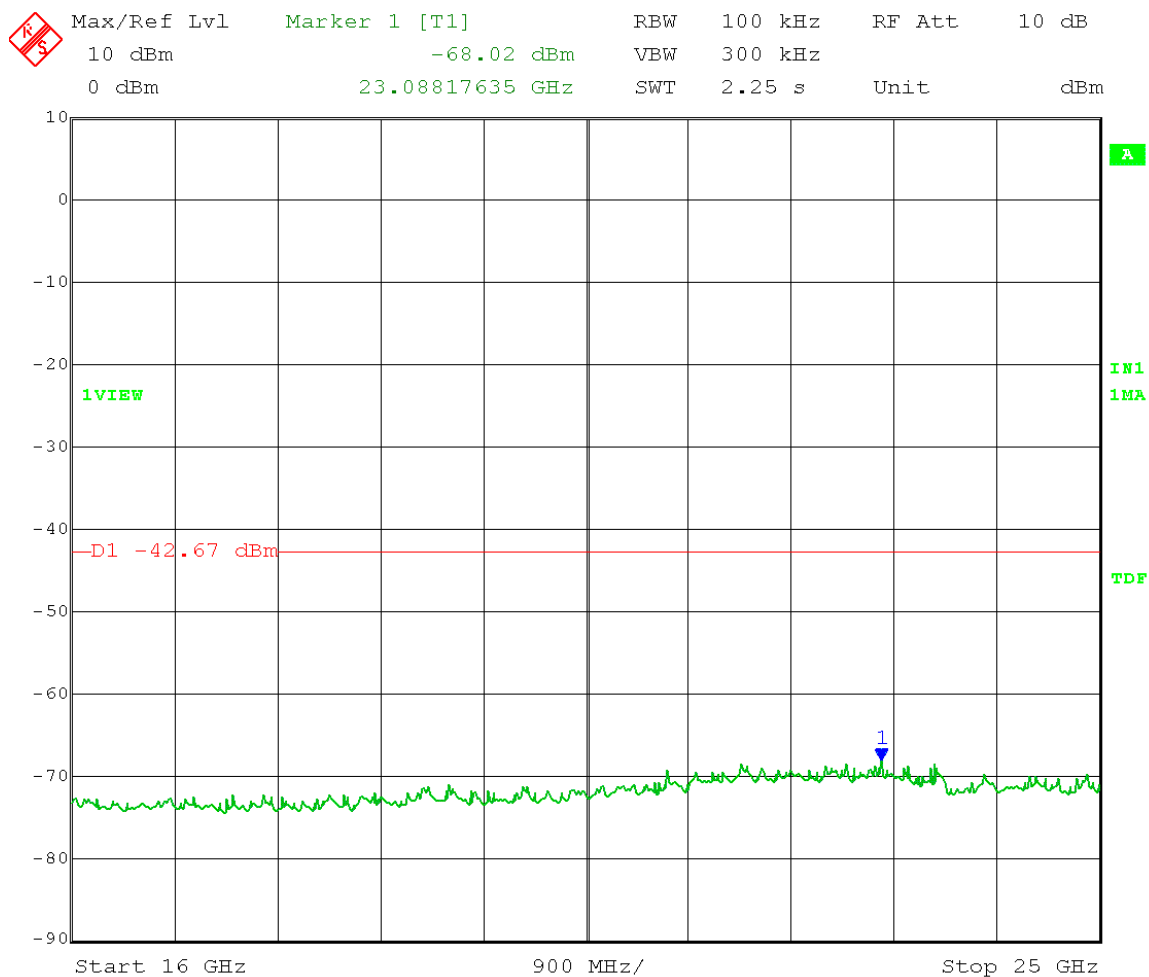


Date: 3.FEB.2014 14:29:36

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Reference Level Measurement**  
 Limit = -13.87 dBm - 30 dB = -43.87 dBm

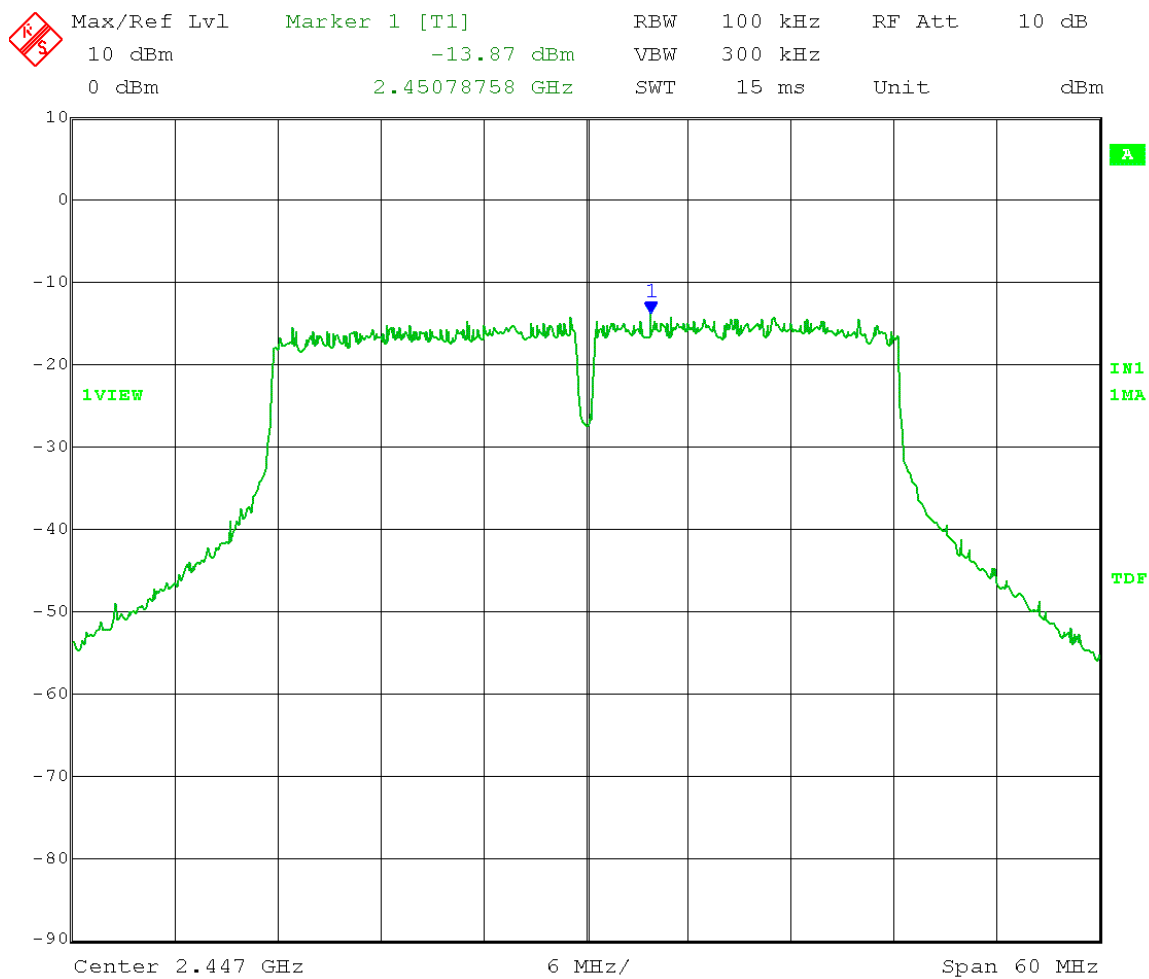


Date: 3.FEB.2014 14:41:24

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -13.87 dBm - 30 dB = -43.87 dBm  
 Frequency Range: 30 - 1000 MHz

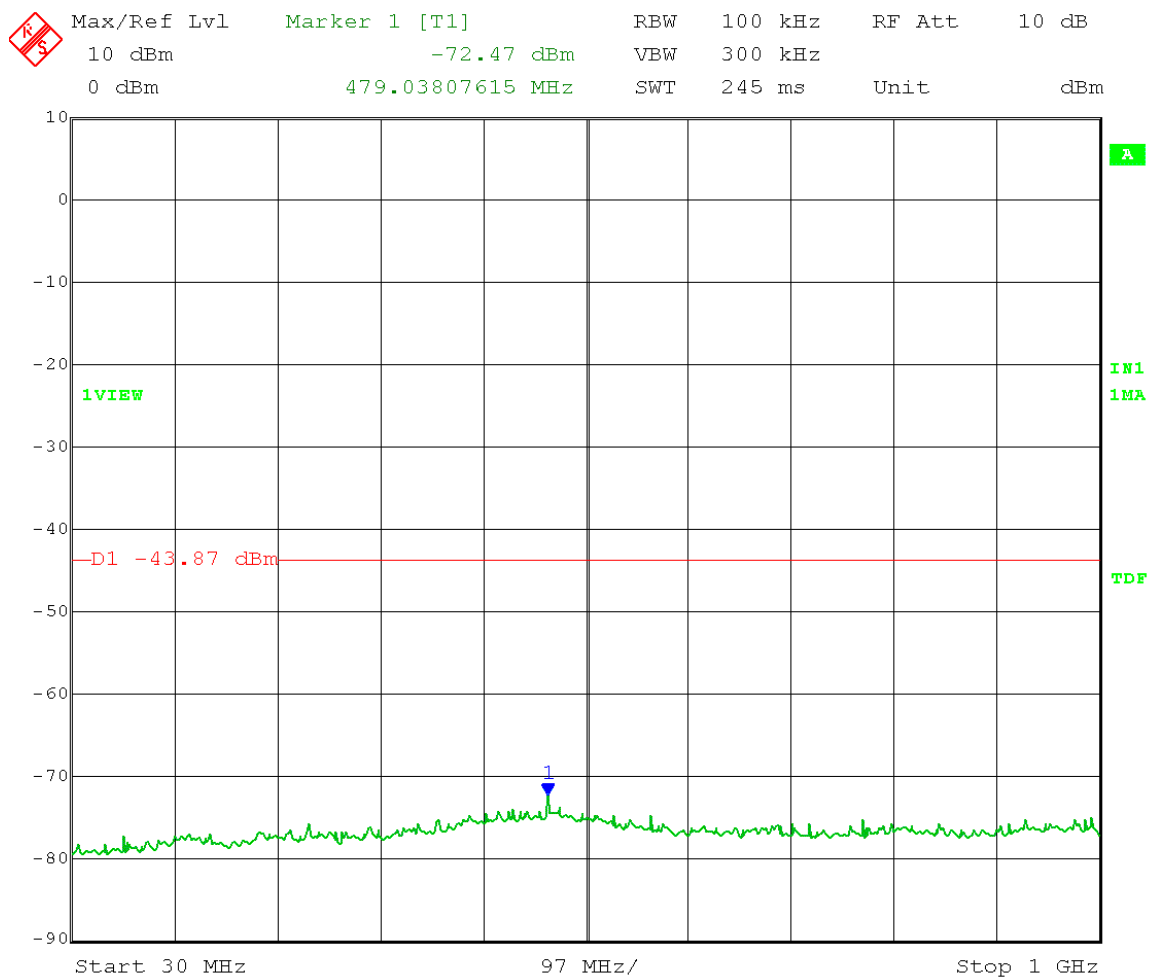


Date: 3.FEB.2014 14:47:34

Test Date: 02-03-14  
Company: Cambium Networks  
EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
Test: Maximum Unwanted Emission Levels - Conducted  
Operator: Craig B  
Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
Detector = Peak Sweep = Auto Couple  
Trace = Max Hold High Channel Transmit = 2447 MHz  
Output Power Setting 0.5 Channel bandwidth: 40MHz  
Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
Limit = -13.87 dBm - 30 dB = -43.87 dBm  
Frequency Range: 1 - 7 GHz

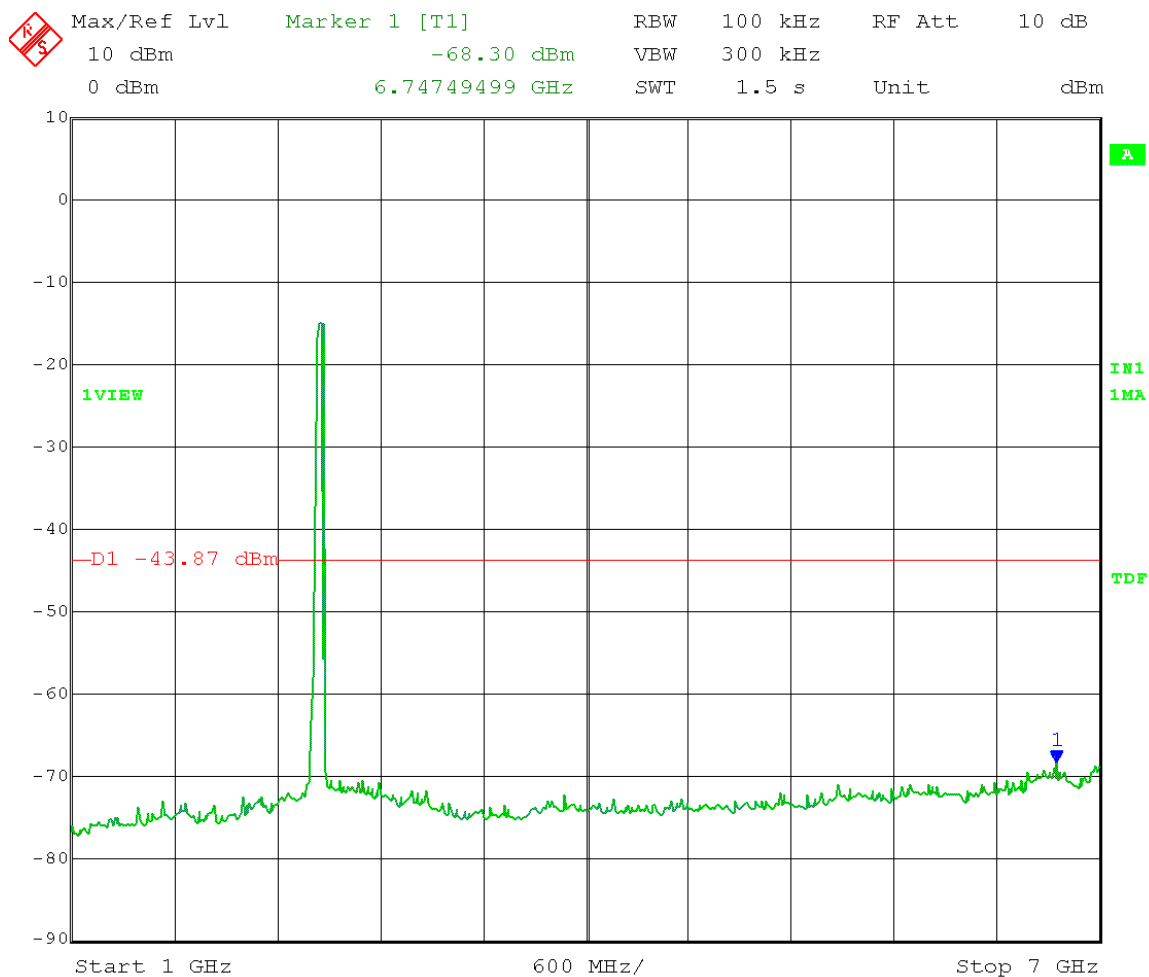


Date: 3.FEB.2014 14:43:33

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -13.87 dBm - 30 dB = -43.87 dBm  
 Frequency Range: 7 - 16 GHz

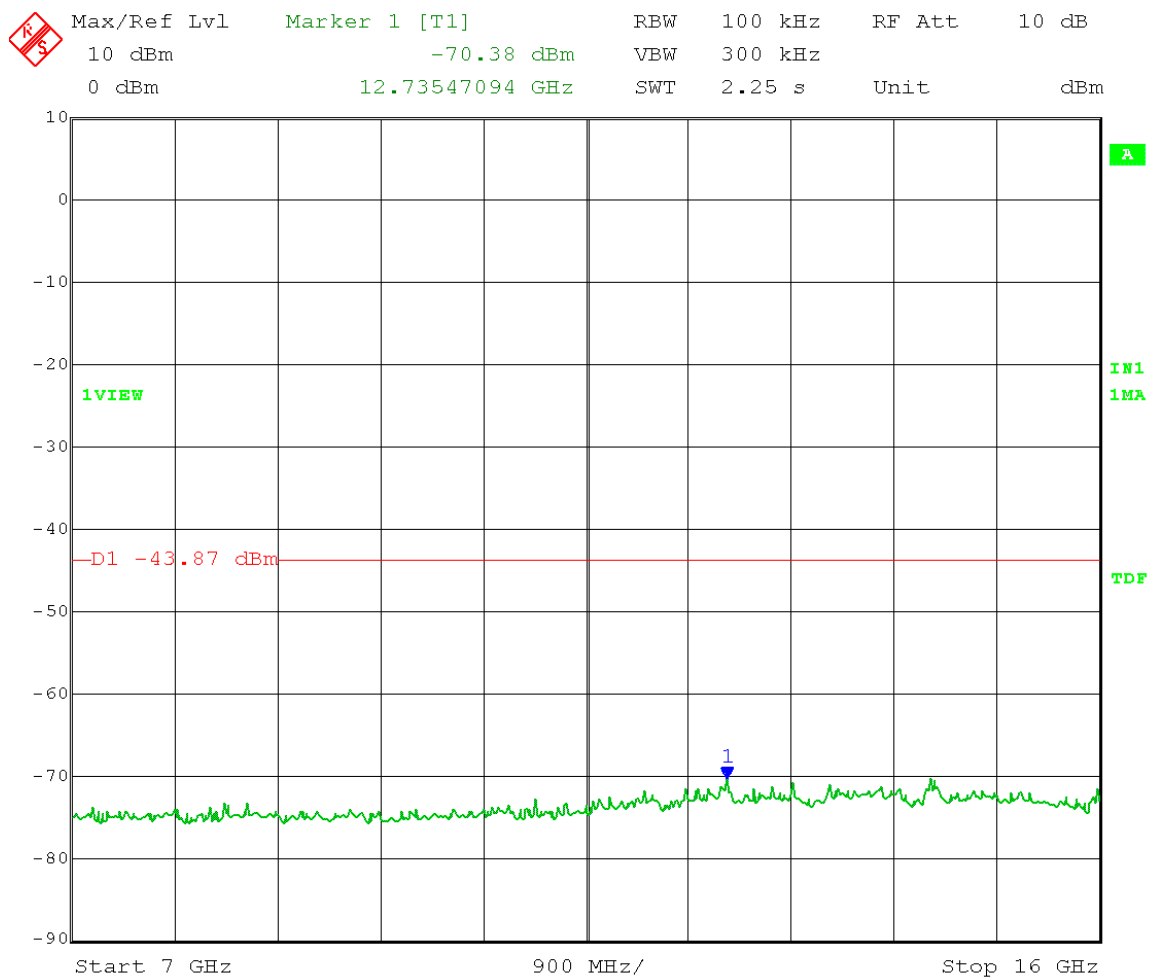

Date: 3.FEB.2014 14:44:43

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 100 kHz VBW  $\geq$  300 kHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
**Emission Level Measurement**  
 Limit = -13.87 dBm - 30 dB = -43.87 dBm  
 Frequency Range: 16 - 25 GHz

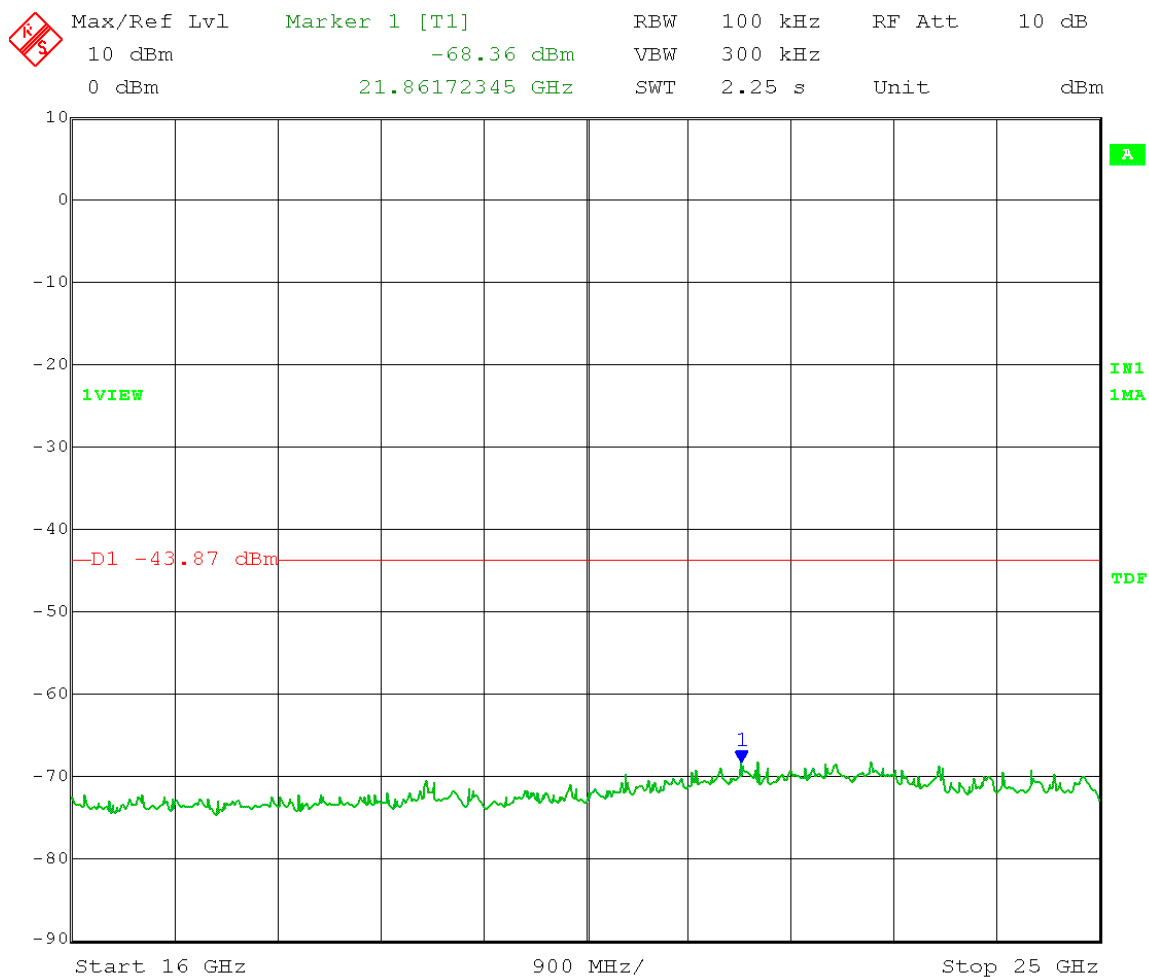

Date: 3.FEB.2014 14:46:02



166 South Carter, Genoa City, WI 53128

|                |                  |
|----------------|------------------|
| Company:       | Cambium Networks |
| Model Tested:  | C024900P011A     |
| Report Number: | 19734            |
| DLS Project:   | 6333             |

## Appendix B – Measurement Data

### B5.0 Conducted Measurements for Radiated Restricted Band Compliance - with Dish

**Rule Section:** FCC 15.247(d) & FCC 15.205

**Test Procedure:** FCC KDB 558074 D01 DTS Meas Guidance v03r01 – *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*

12.1 Emissions in restricted frequency bands

12.2.2 General Procedure for conducted measurements in restricted bands

**Description:** Measure the conducted output power (in dBm) using the detector specified (section 12.2.4 used for peak, and 12.2.5.1 used for average).  
Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level.  
For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).  
Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.



Compare the resultant electric field strength level to the applicable limit.

**Limit:** Average Limit = 54dBuV/m @ 3 meters  
Peak Limit = 74dBuV/m @ 3 meters

**Results:** Passed



**Notes:** Measurements were taken for OFDM MCS15 with 20 MHz and 40 MHz channel bandwidths at the low, middle and high channels of operation. EUT was set to transmit continuously with a 100% duty cycle.

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

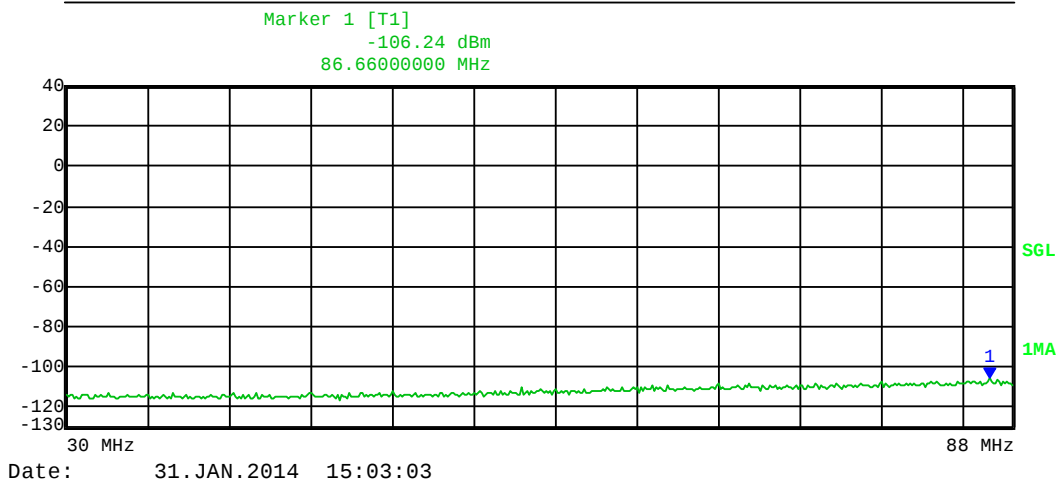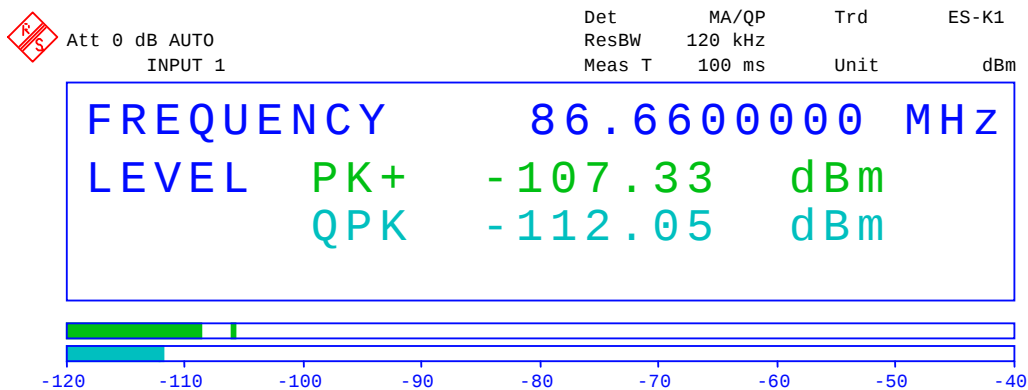



$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -112.05 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 15.91 \text{ dB}\mu\text{V/m}$   
**Margin = 24.09 dB**

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

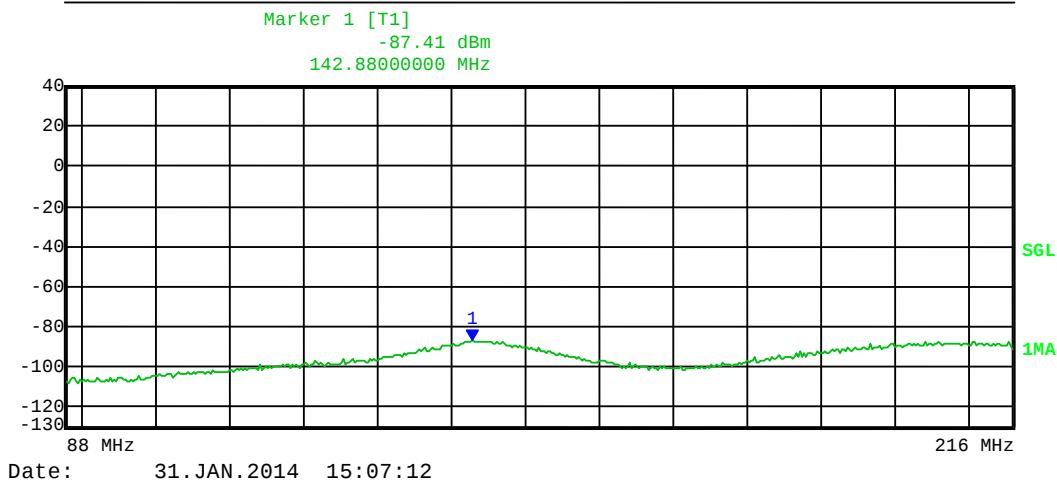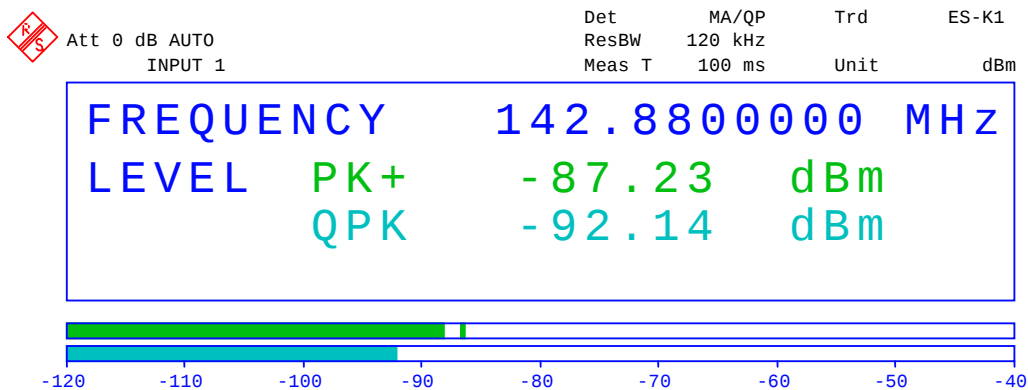


$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)} \\
 &= -92.14 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)} \\
 &= 35.82 \text{ dB}\mu\text{V/m} \\
 \text{Margin} &= 7.68 \text{ dB}
 \end{aligned}$$

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

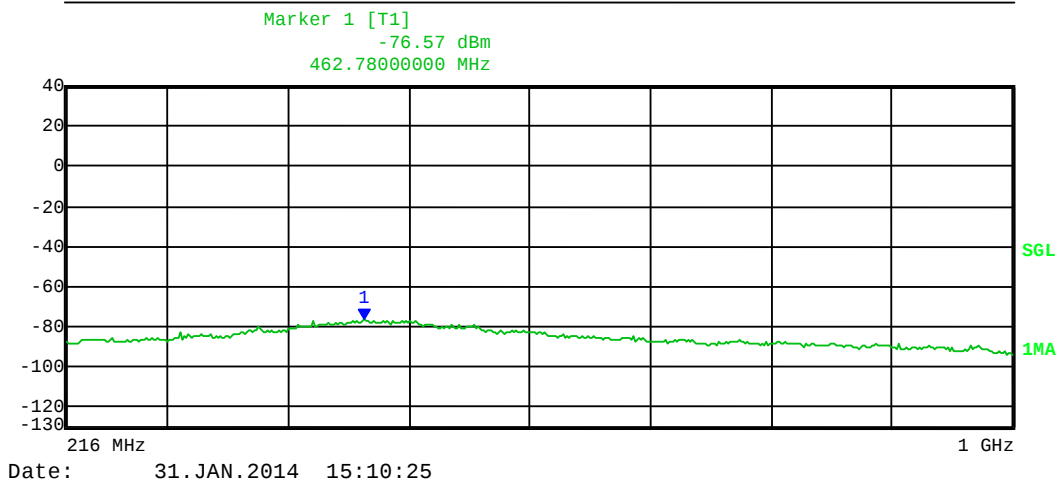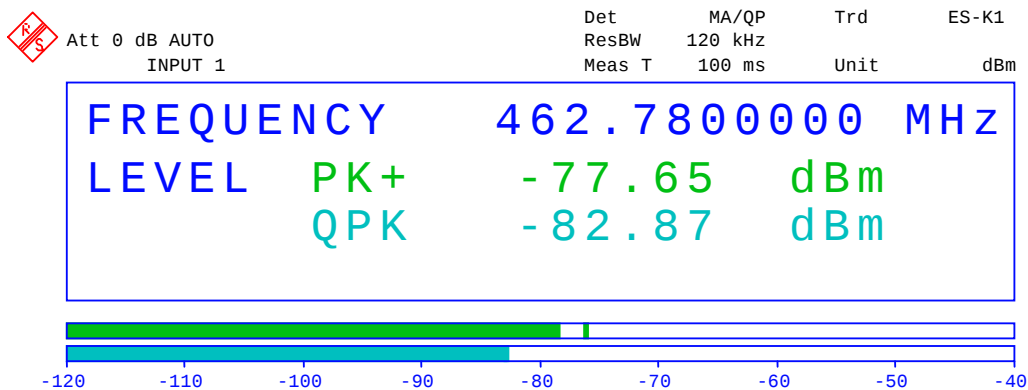

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -82.87 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 45.09 \text{ dB}\mu\text{V/m}$   
**Margin = 0.91 dB**

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

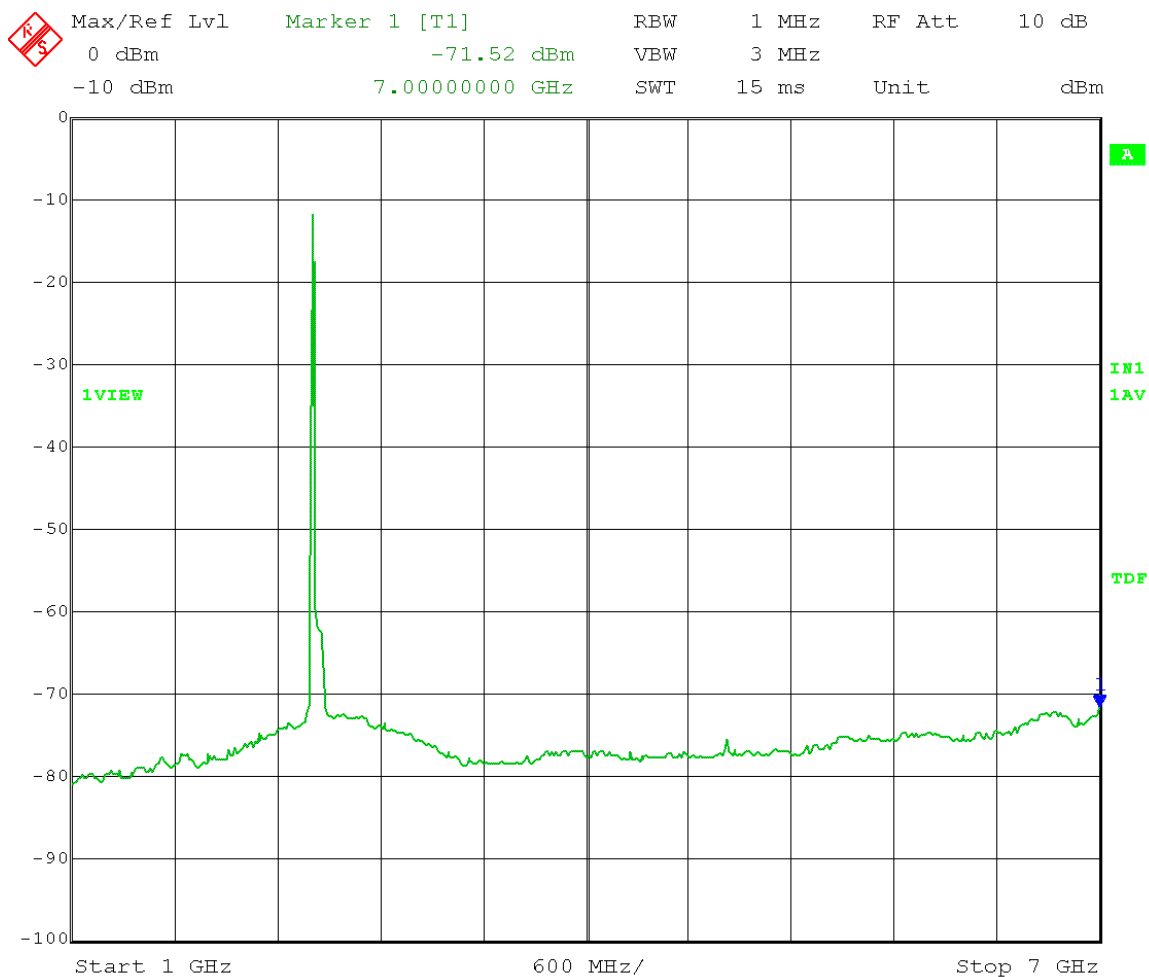


Date: 31.JAN.2014 11:47:36

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -71.52 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 51.74 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 2.26 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

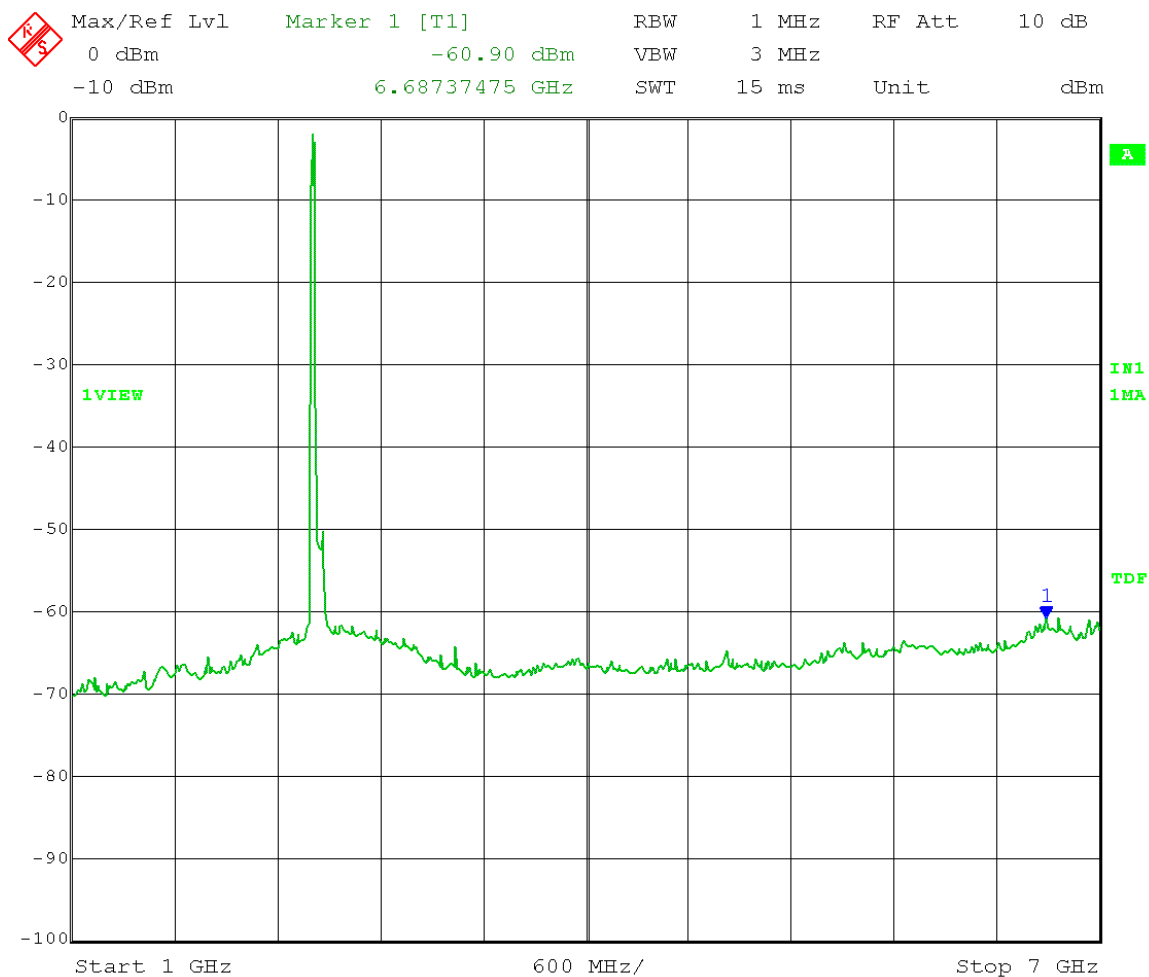


Date: 31.JAN.2014 11:59:24

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -60.90 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.36 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.64 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

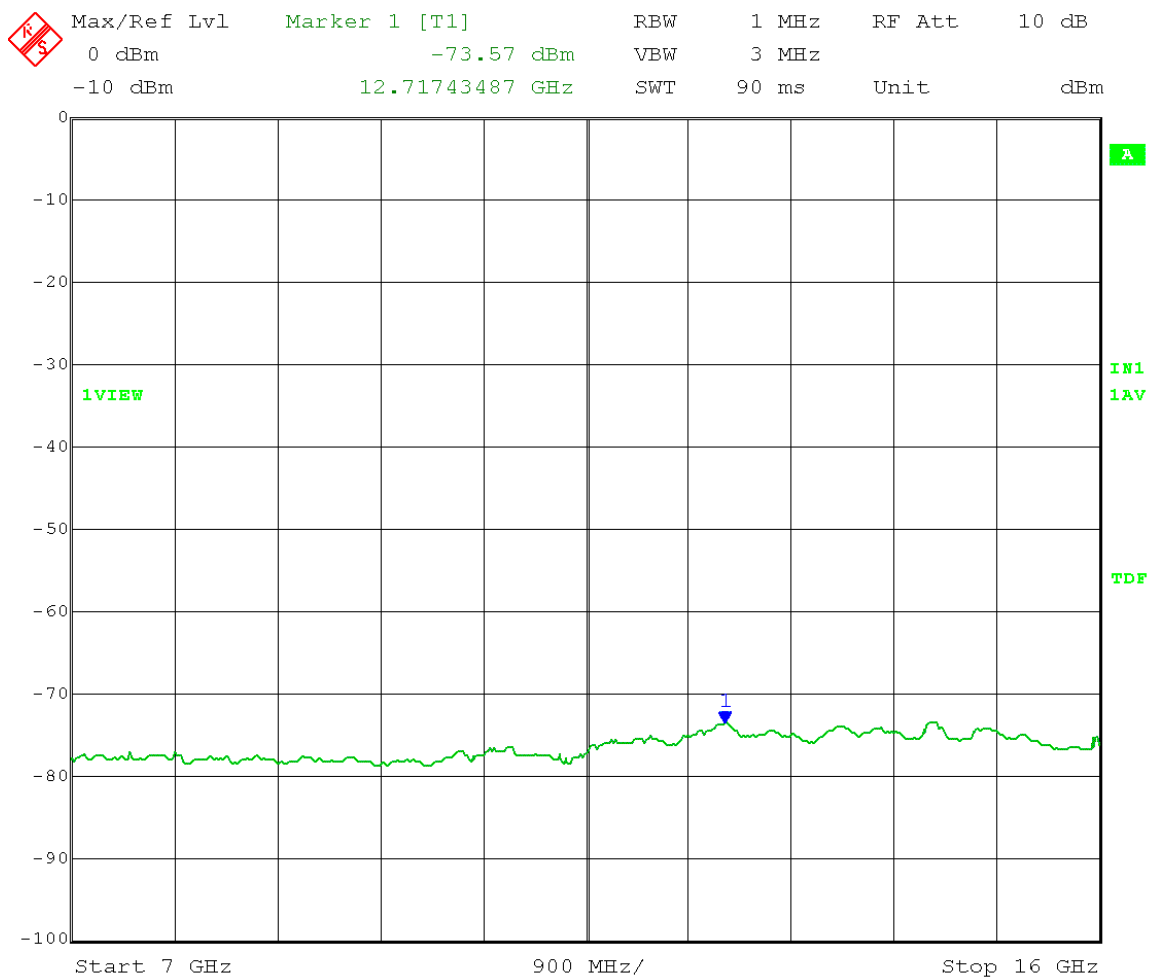


Date: 31.JAN.2014 13:08:44

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -73.57 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.69 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.31 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

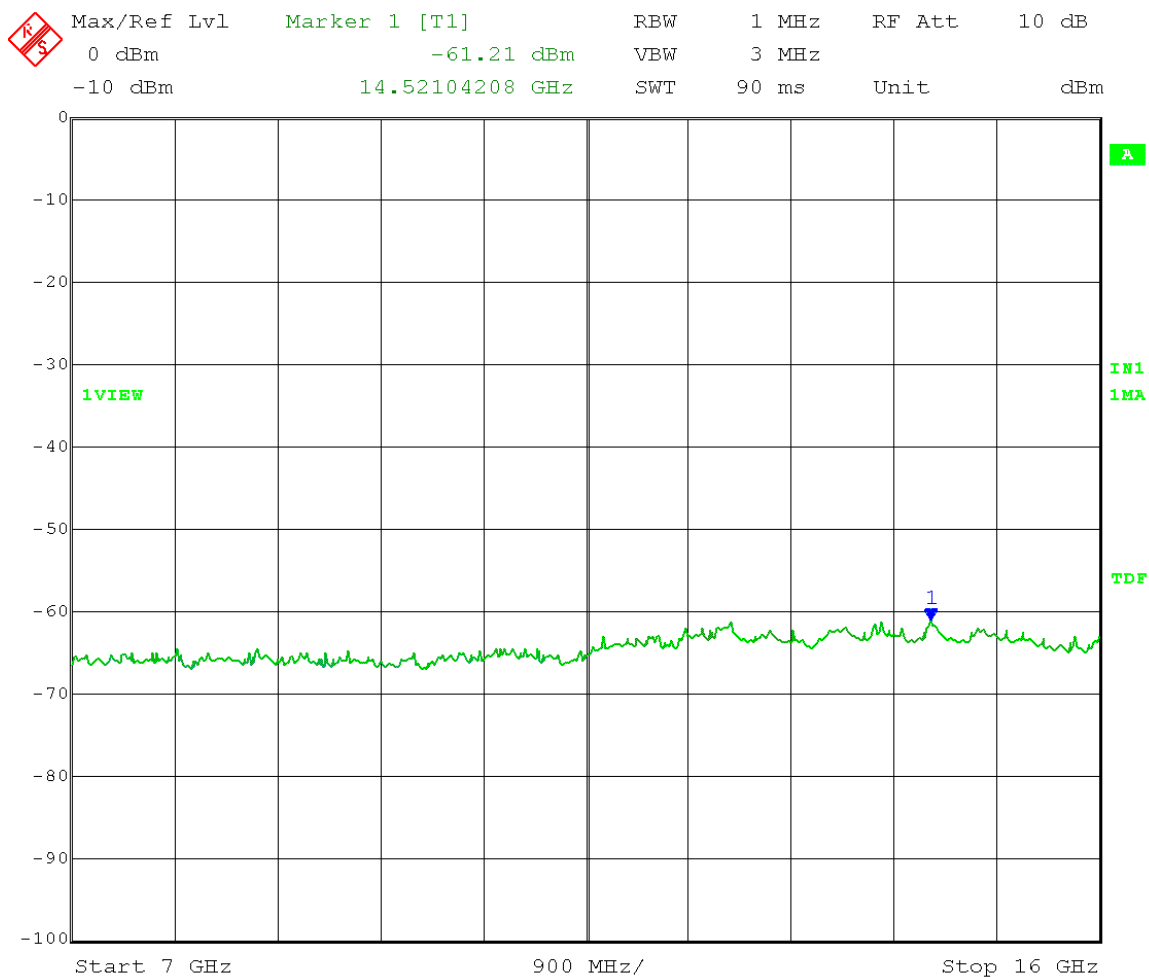


Date: 31.JAN.2014 13:10:43

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -61.21 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.05 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.95 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

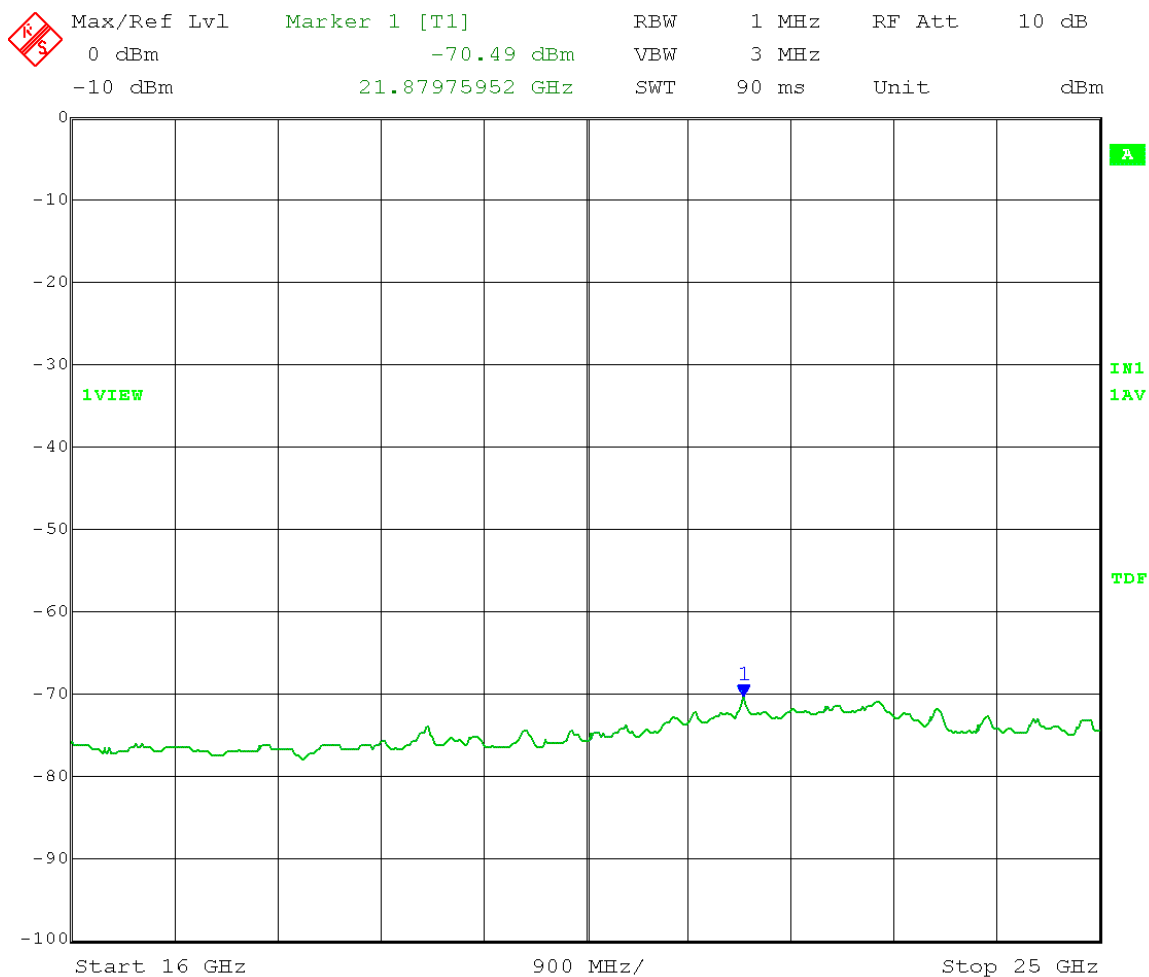


Date: 31.JAN.2014 13:22:30

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.49 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.77 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.23 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2412 MHz  
 Output Power Setting 1 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz


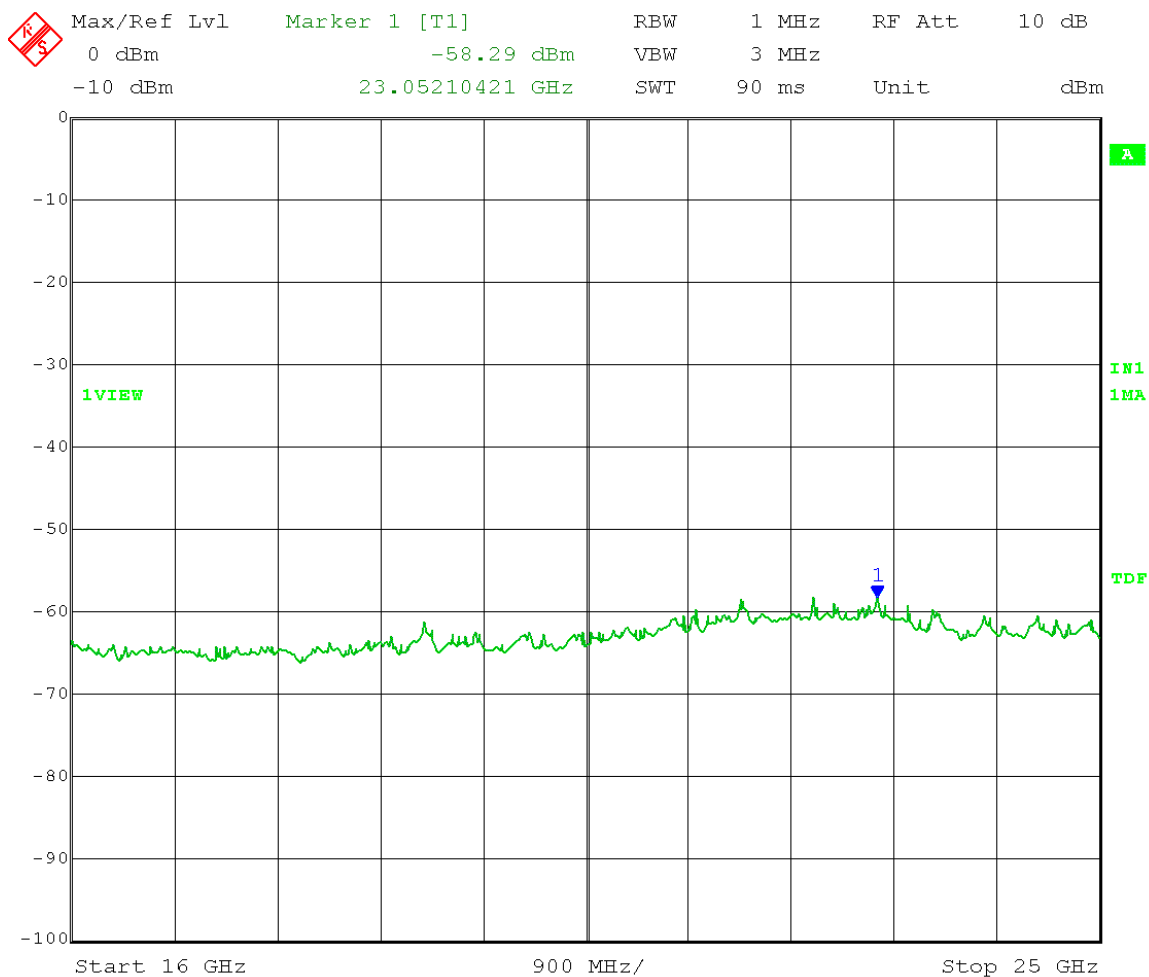


Date: 31.JAN.2014 13:24:14

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -58.29 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 64.97 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 9.03 dB** (noise floor measurement)



Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

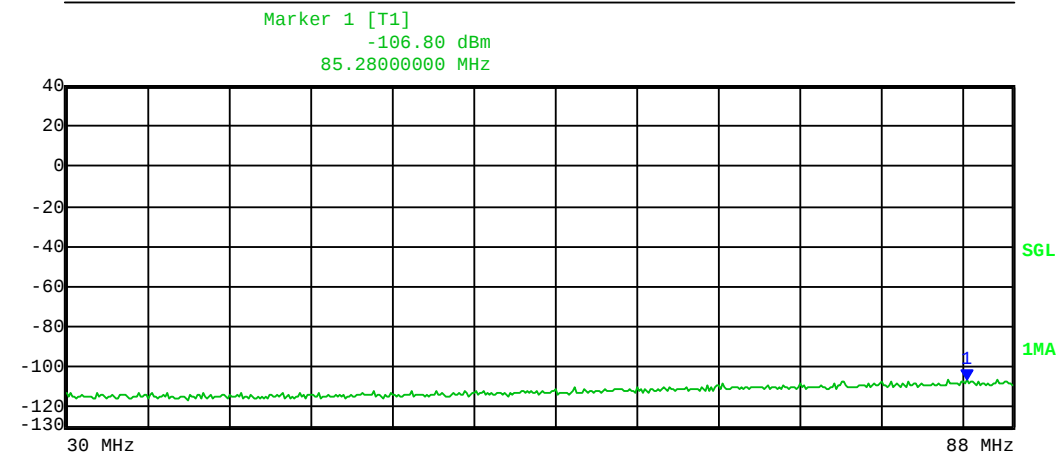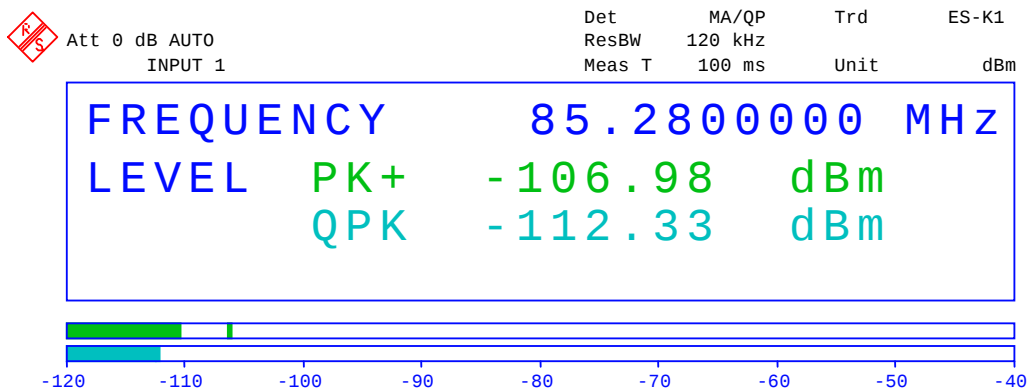

Date: 31.JAN.2014 14:39:56

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -112.33 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 15.63 \text{ dB}\mu\text{V/m}$   
**Margin = 24.37 dB**



Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

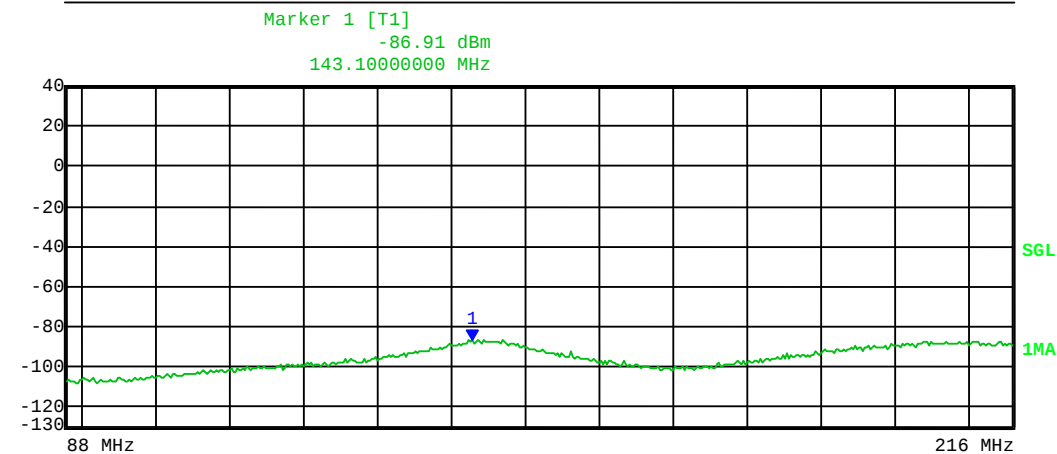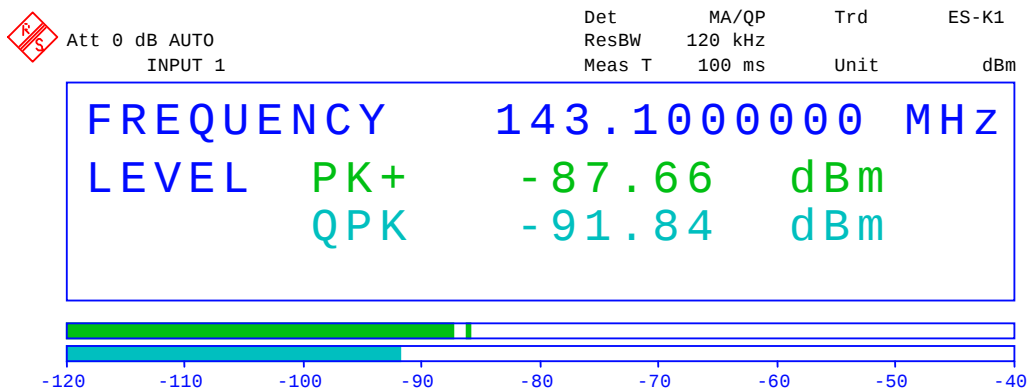

Date: 31.JAN.2014 14:43:22


$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)} \\
 &= -91.84 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)} \\
 &= 36.12 \text{ dB}\mu\text{V/m} \\
 \text{Margin} &= 7.38 \text{ dB}
 \end{aligned}$$

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

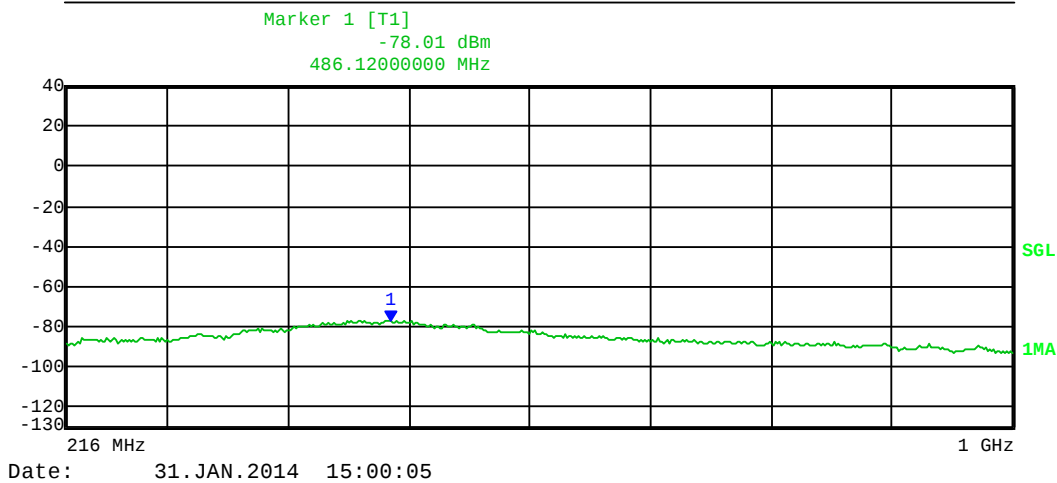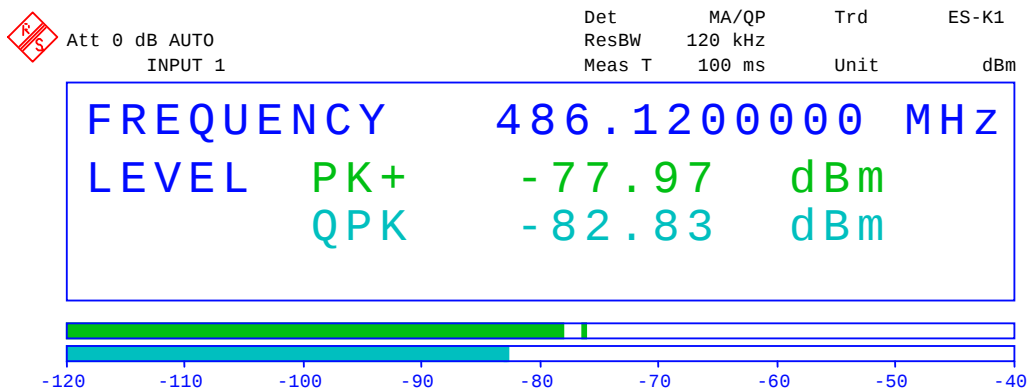

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -82.83 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 45.13 \text{ dB}\mu\text{V/m}$   
**Margin = 0.87 dB**

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

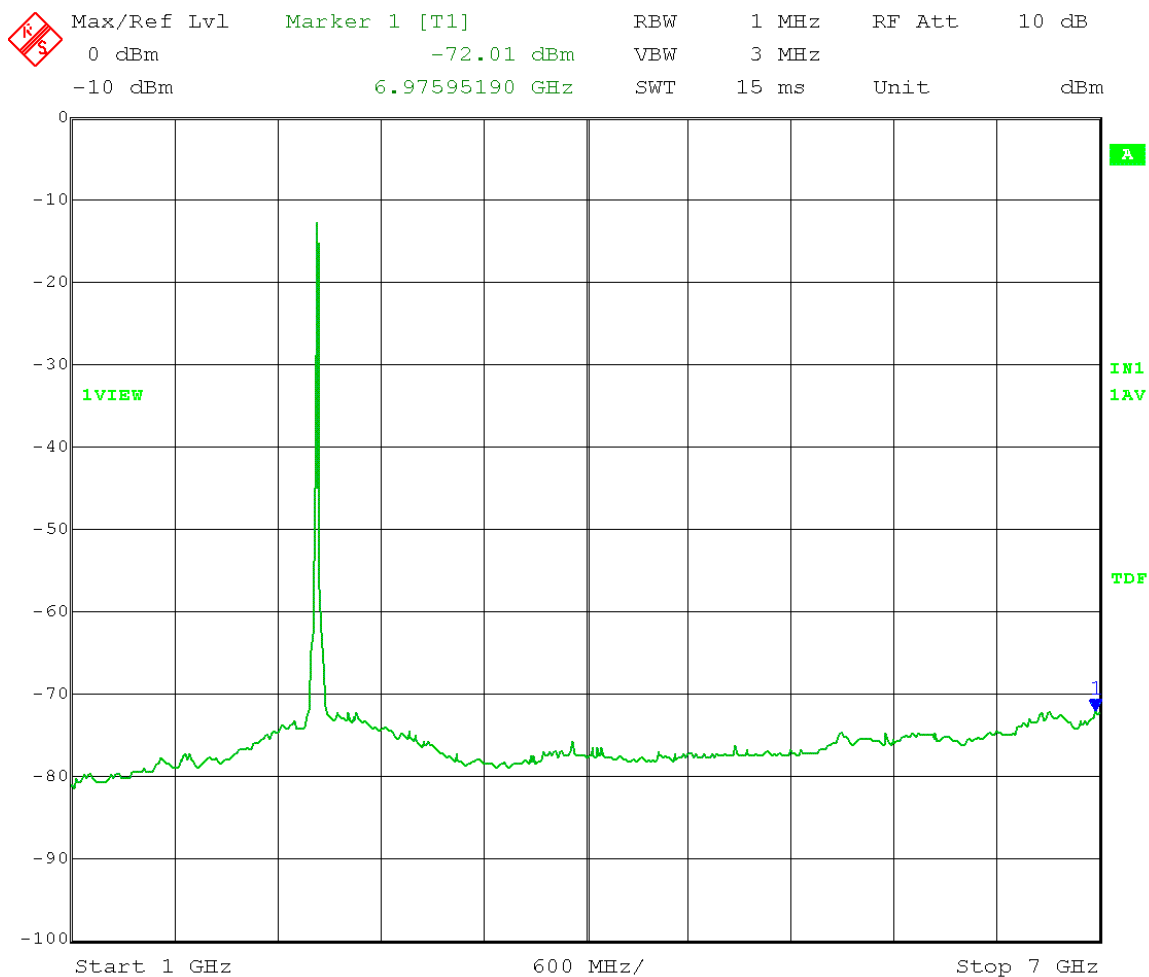


Date: 31.JAN.2014 11:39:53

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -72.01 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 51.25 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 2.75 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

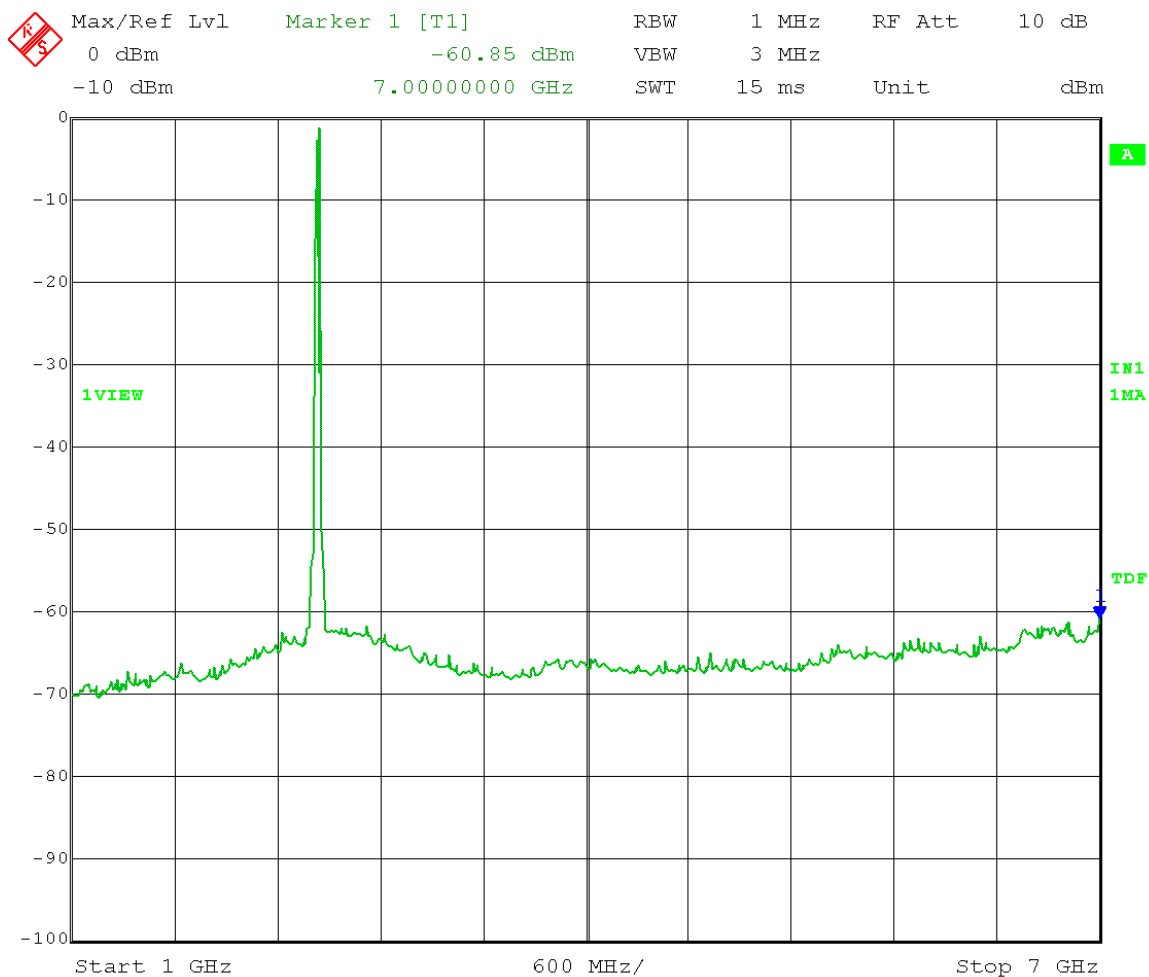


Date: 31.JAN.2014 12:02:09

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -60.85 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.41 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.59 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

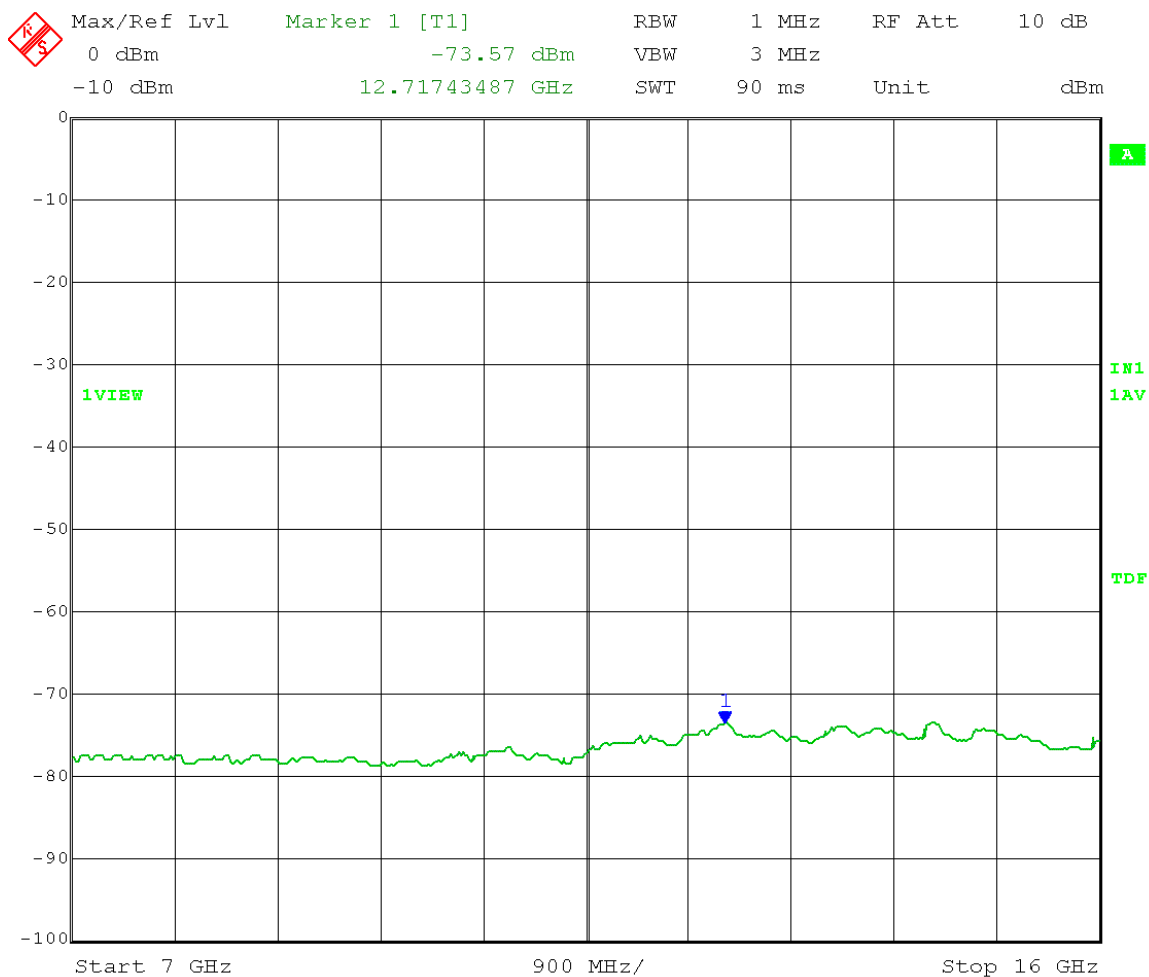


Date: 31.JAN.2014 13:03:53

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -73.57 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.69 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.31 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

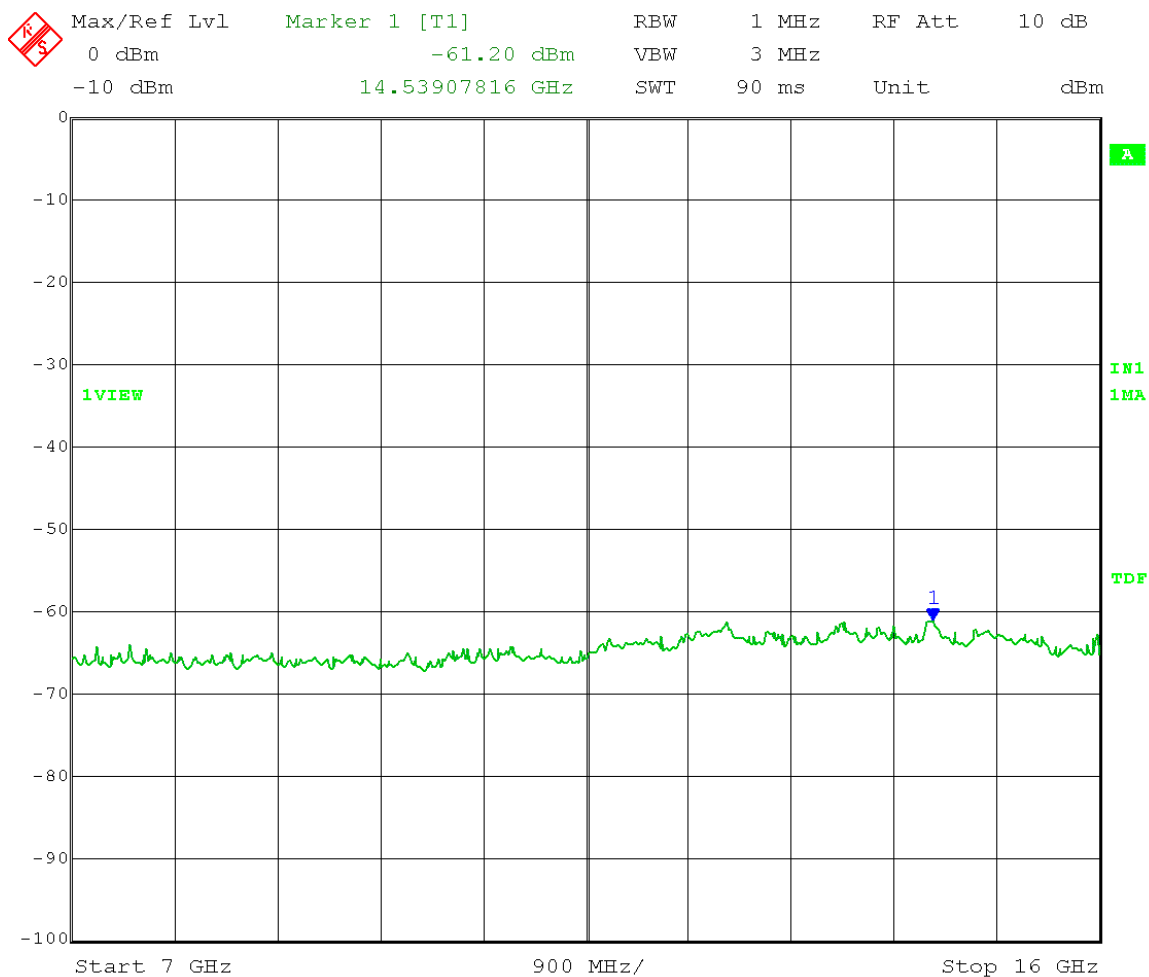


Date: 31.JAN.2014 13:06:02

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -61.20 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.06 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.94 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold **Mid Channel Transmit = 2437 MHz**  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

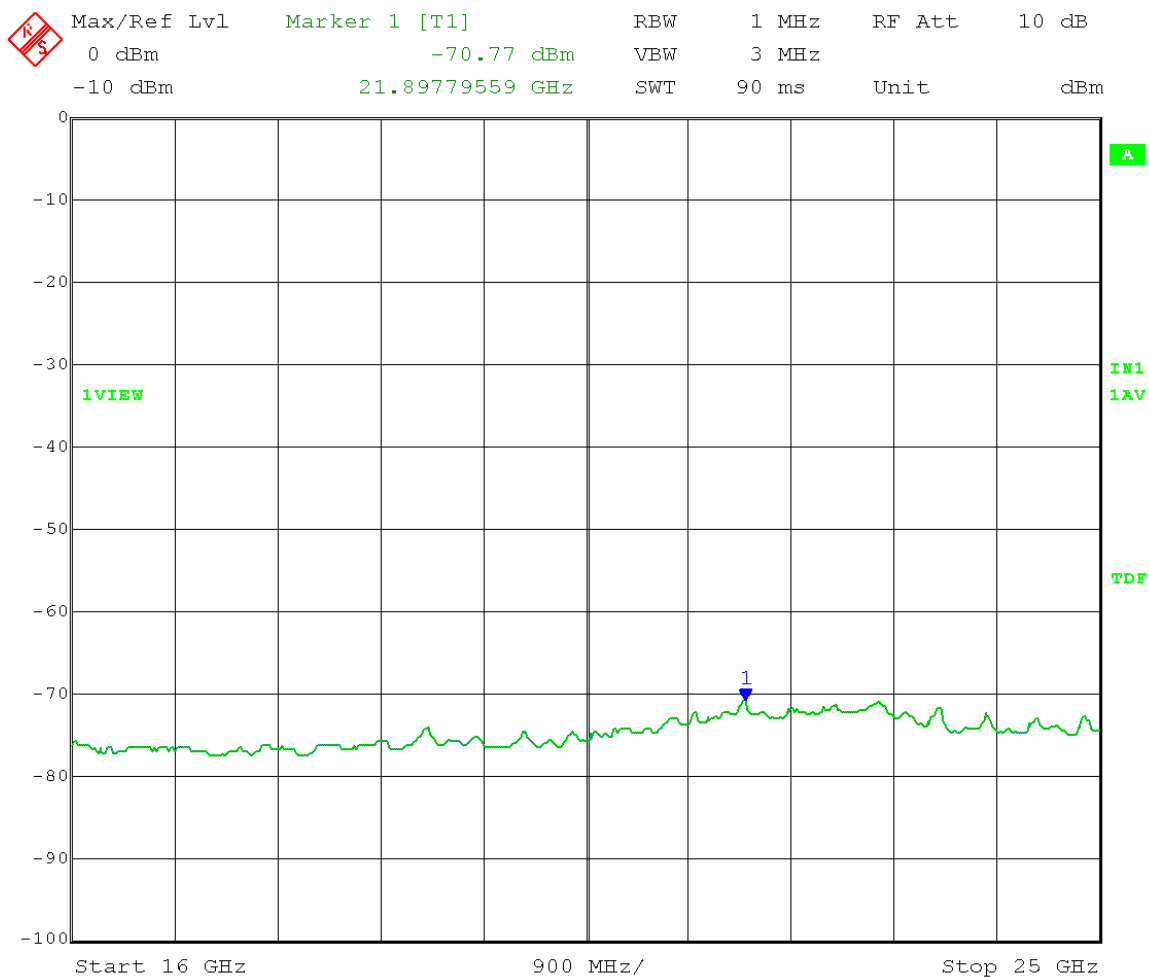


Date: 31.JAN.2014 13:27:27

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.77 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.49 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.51 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz


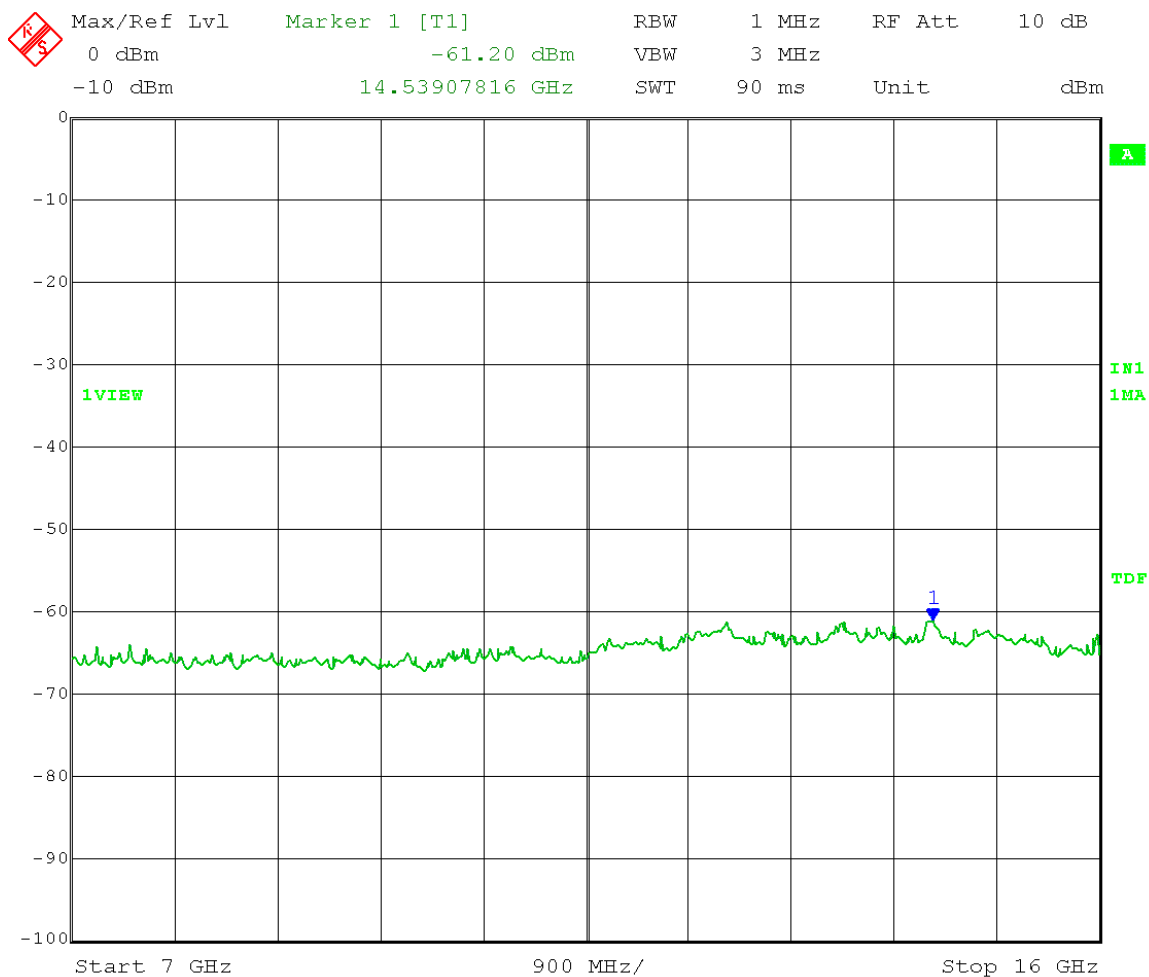


Date: 31.JAN.2014 13:06:02

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -61.20 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.06 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.94 dB** (noise floor measurement)



Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

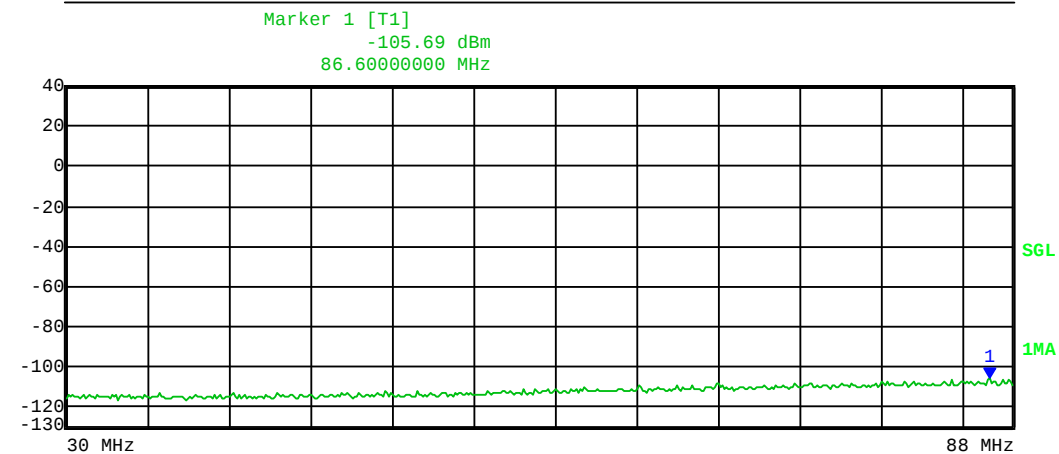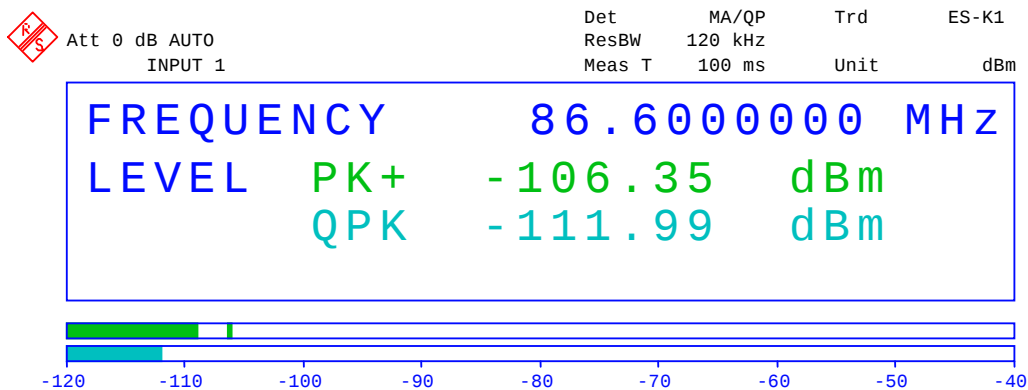

Date: 31.JAN.2014 15:13:56



$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -111.99 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 15.97 \text{ dB}\mu\text{V/m}$   
**Margin = 24.03 dB**

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

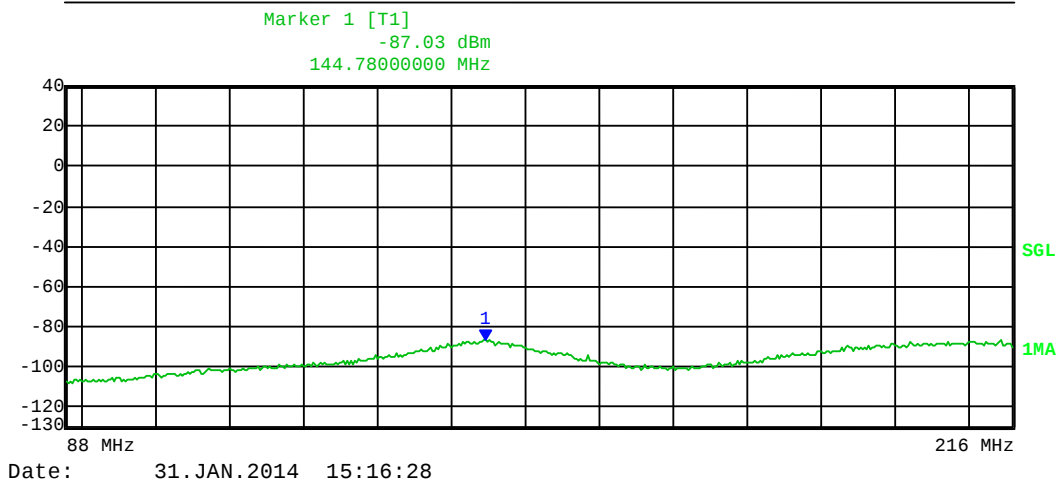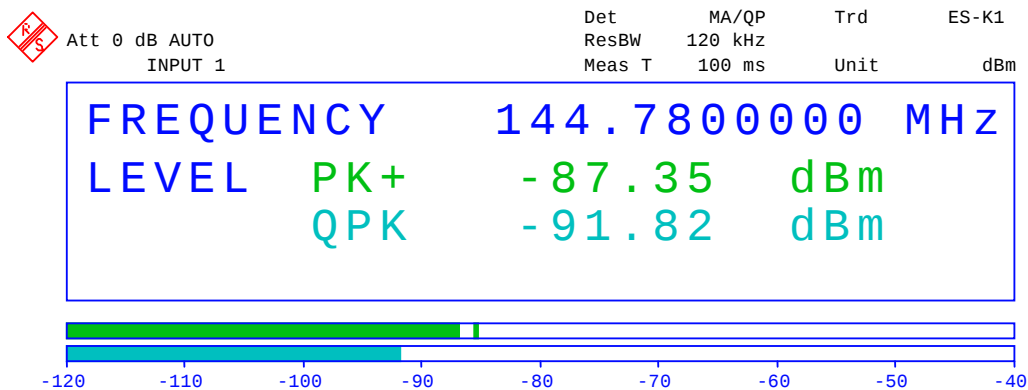

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -91.82 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 36.14 \text{ dB}\mu\text{V/m}$   
**Margin = 7.36 dB**


Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

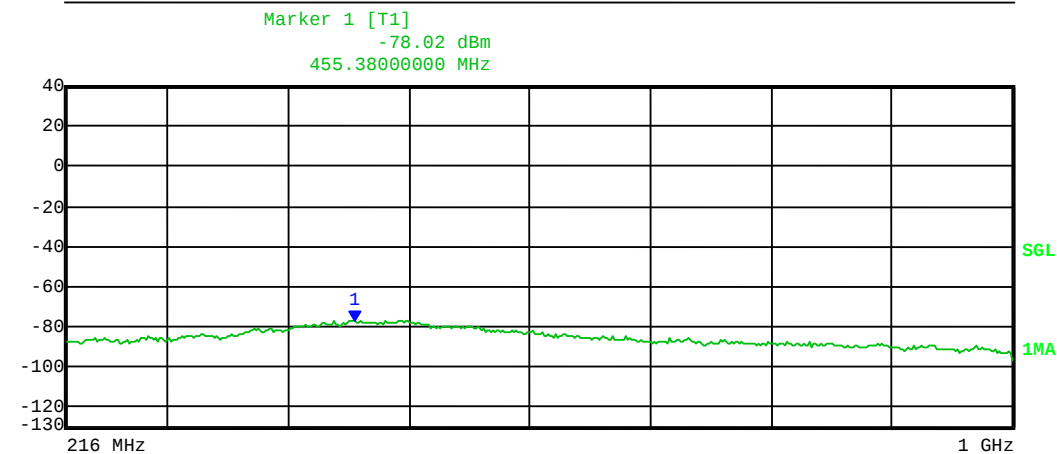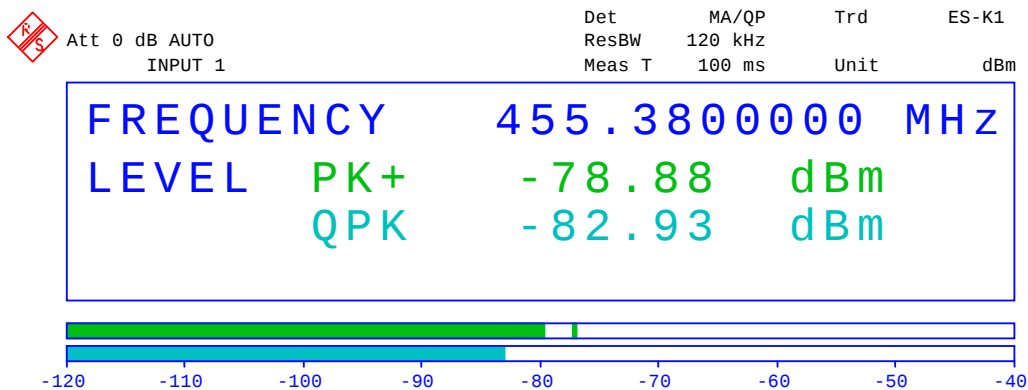

Date: 31.JAN.2014 15:20:21

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)} \\
 &= -82.93 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)} \\
 &= 45.03 \text{ dB}\mu\text{V/m} \\
 \text{Margin} &= 0.97 \text{ dB}
 \end{aligned}$$

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

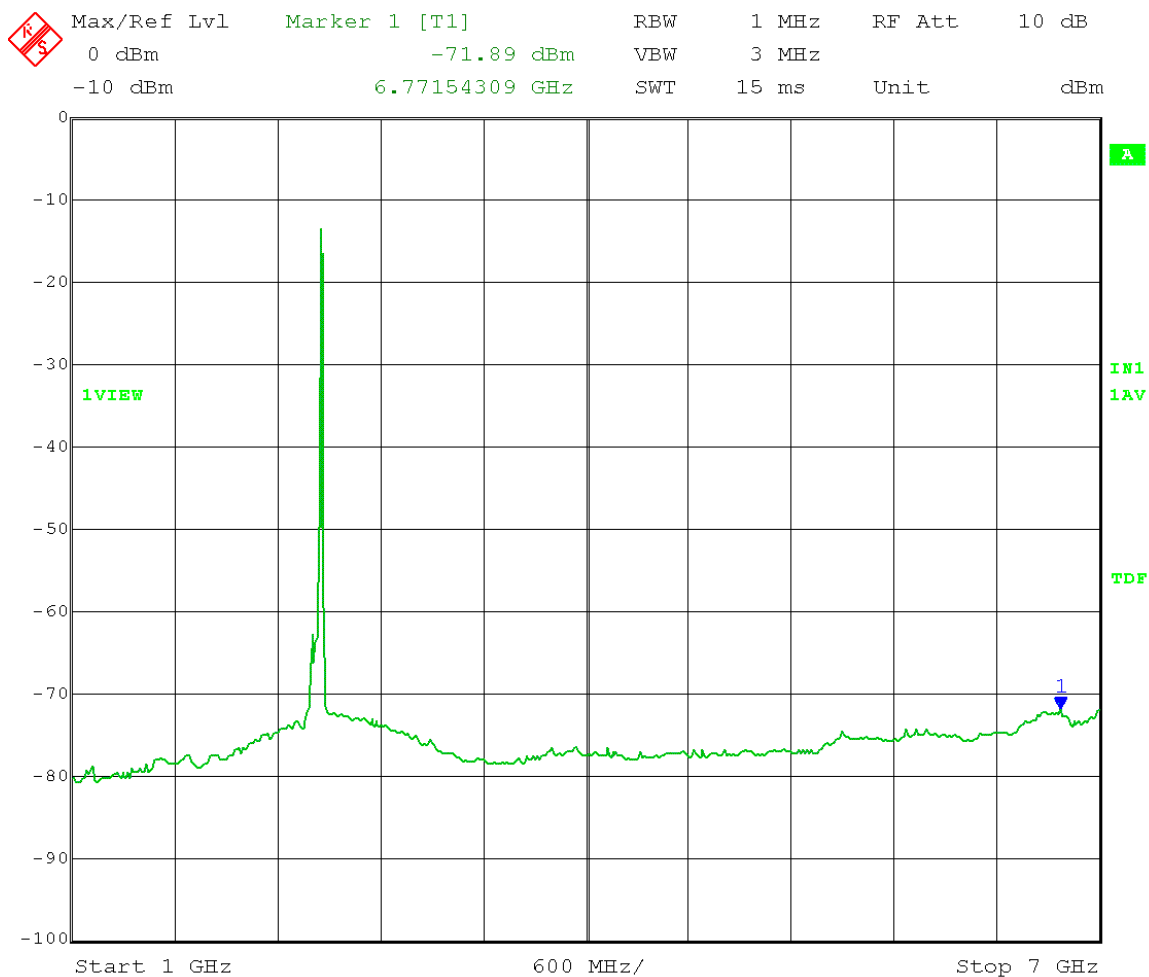


Date: 31.JAN.2014 11:51:15

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -71.89 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 51.37 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 2.63 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

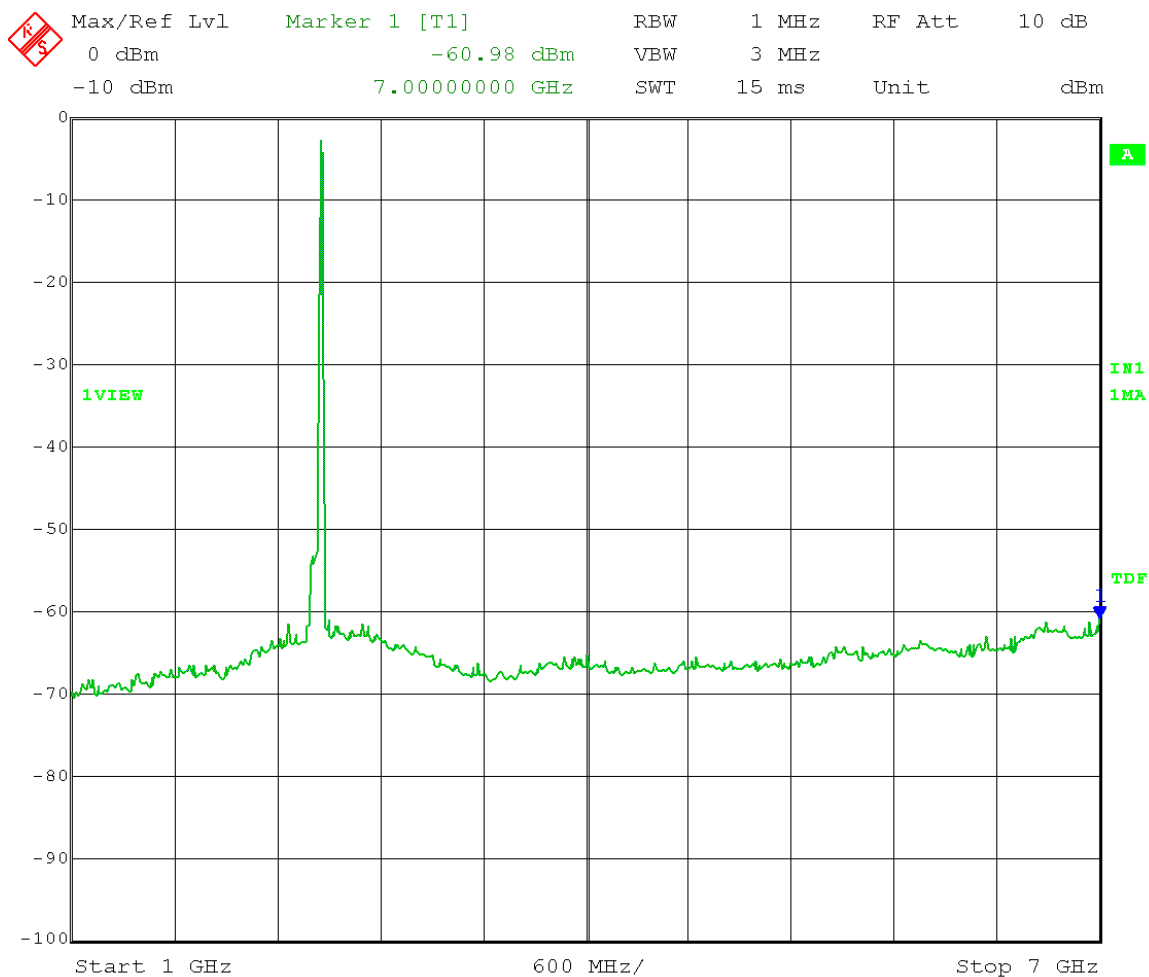


Date: 31.JAN.2014 11:54:02

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -60.98 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.28 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.72 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

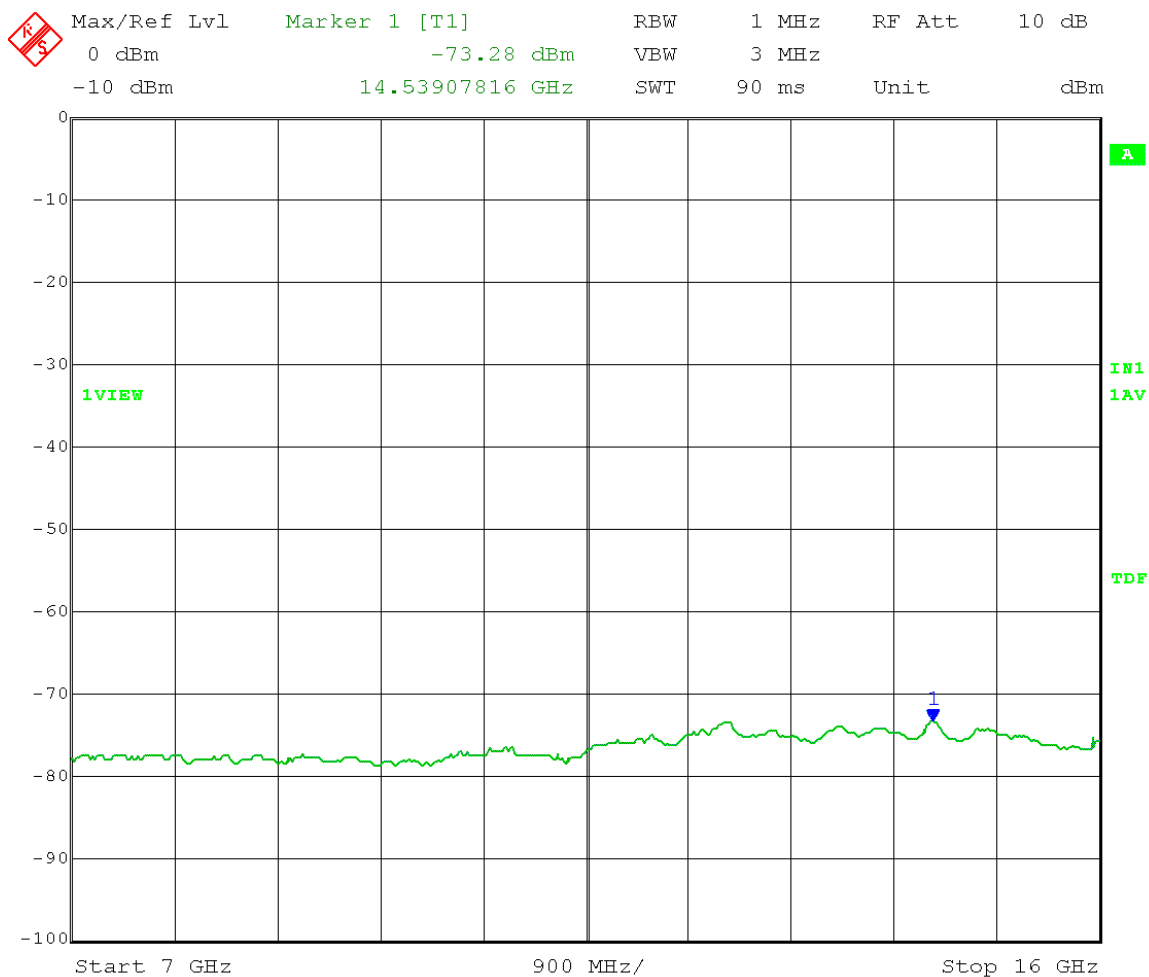


Date: 31.JAN.2014 13:14:10

$$\begin{aligned}
 E &= \text{EIRP} - 20 \log D + 104.8 \\
 &= -73.28 \text{ dBm} + 25 \text{ dBi antenna gain} - 20 \log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.98 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.02 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

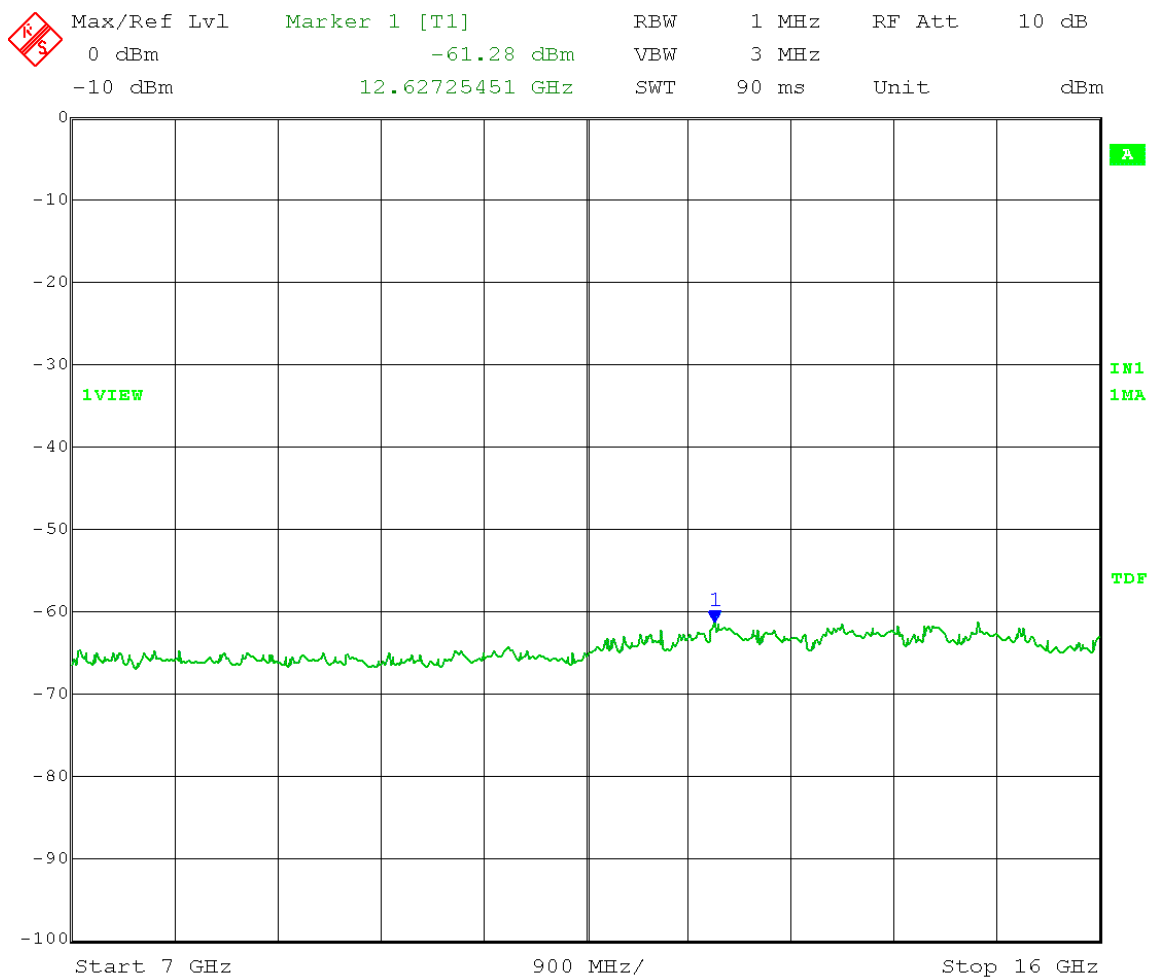


Date: 31.JAN.2014 13:16:13

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -61.28 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 61.98 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 12.02 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

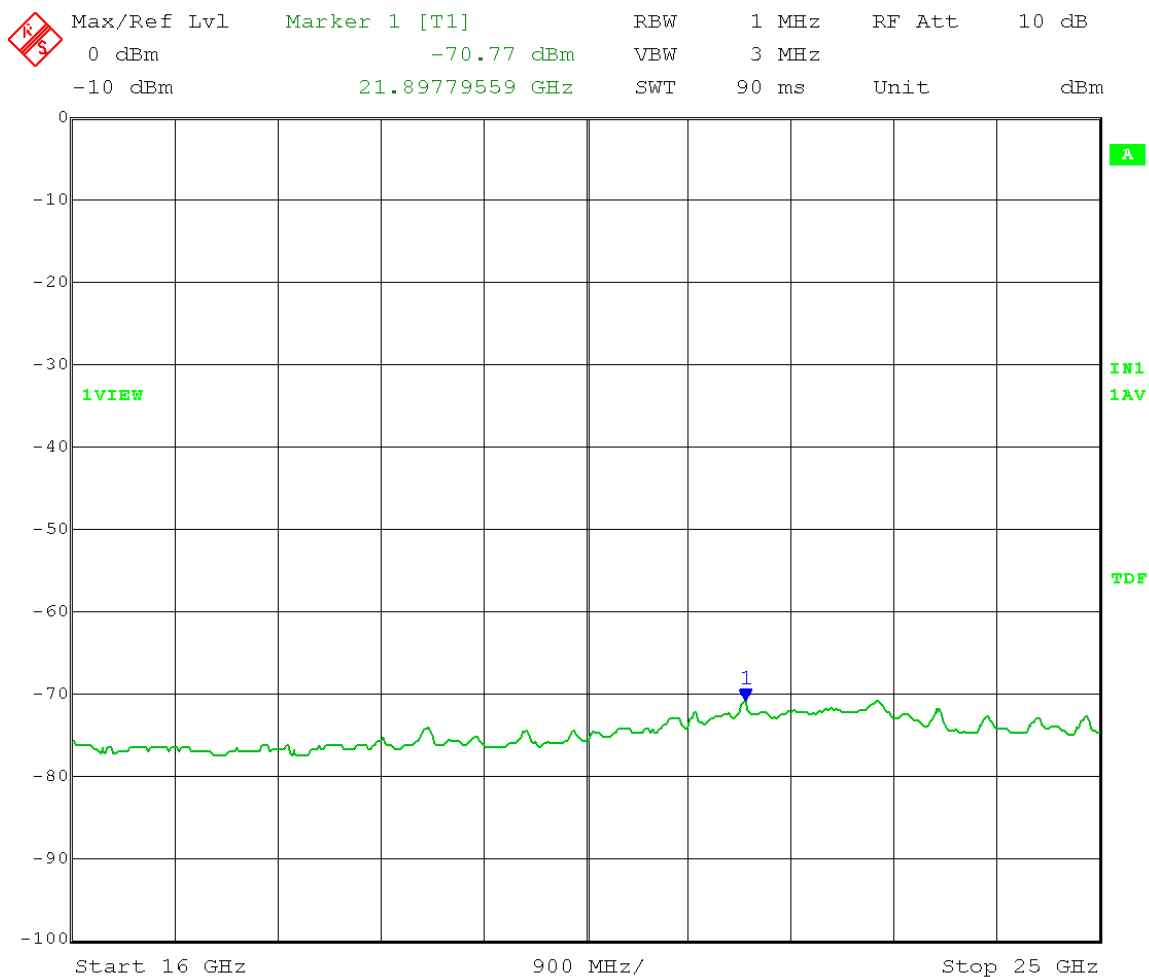


Date: 31.JAN.2014 13:18:28

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.77 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.49 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.51 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2462 MHz  
 Output Power Setting 0 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz


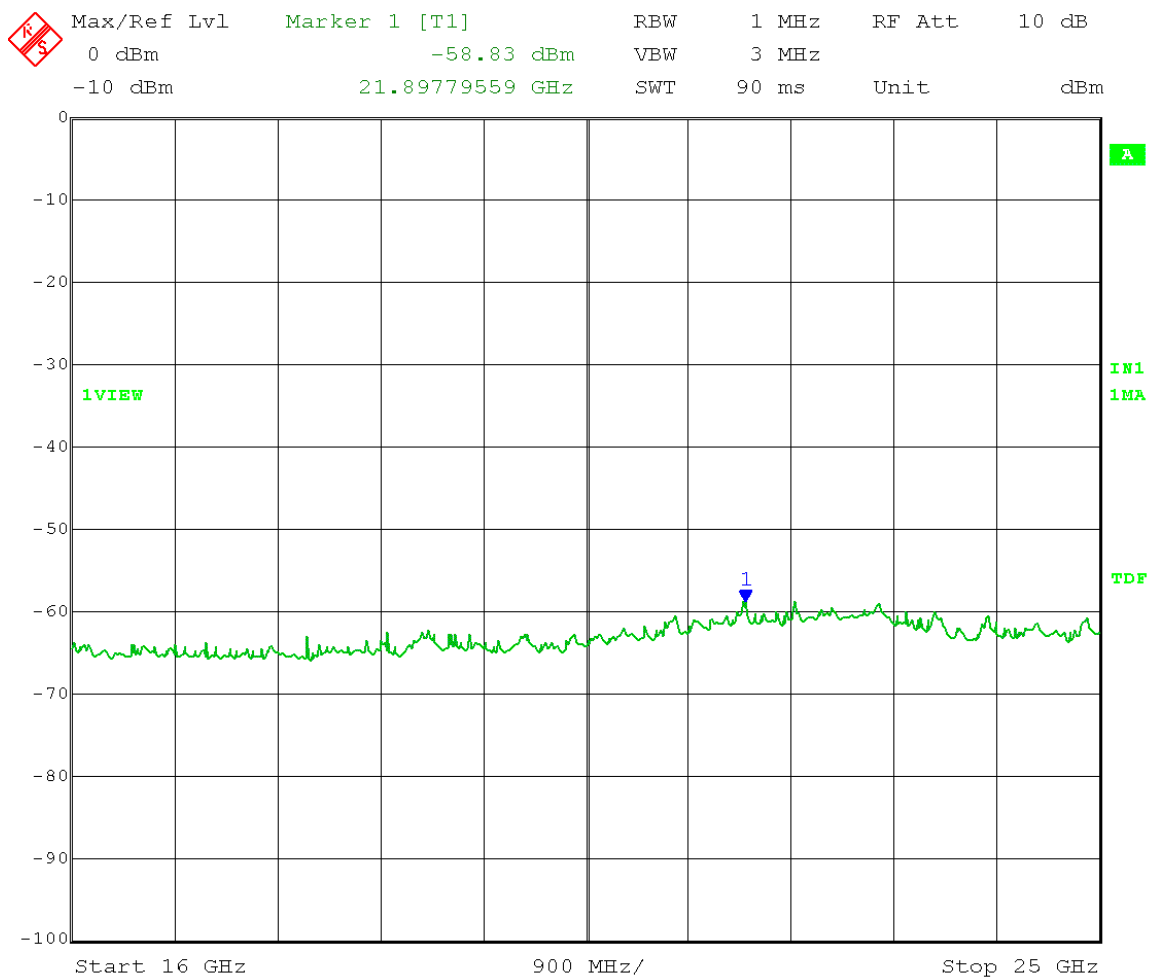


Date: 31.JAN.2014 13:19:57

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -58.83 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 64.43 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 9.57 dB** (noise floor measurement)



Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

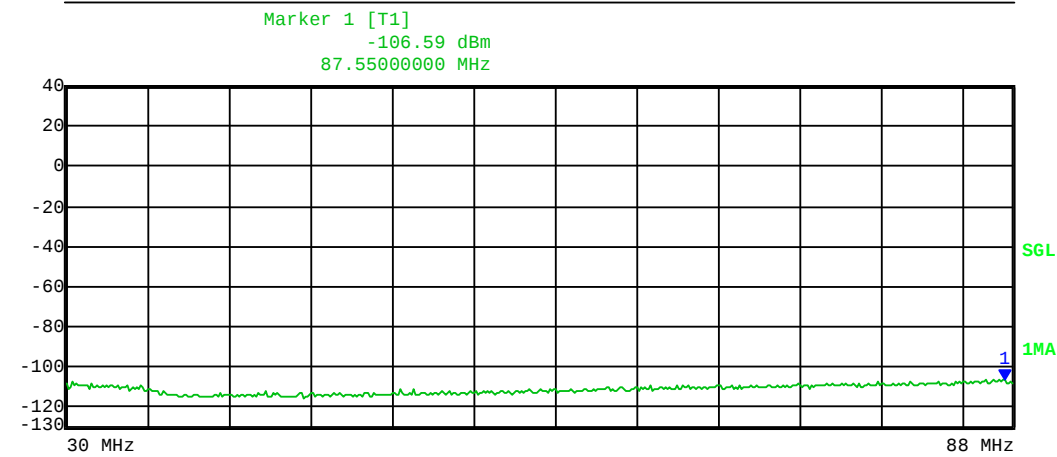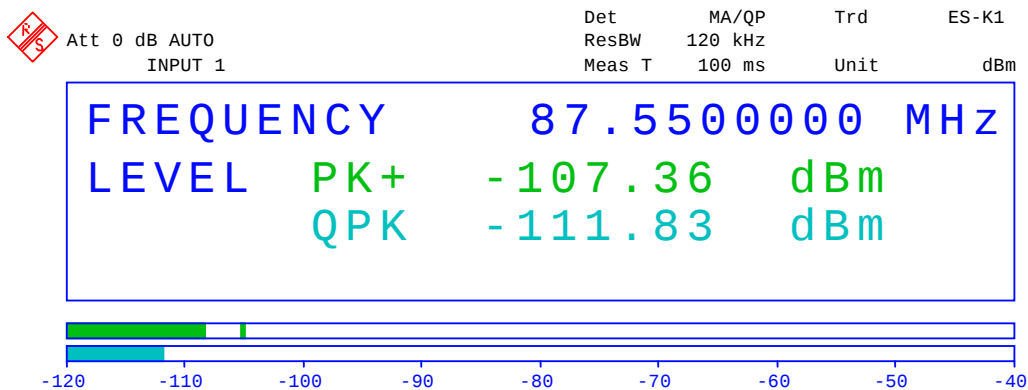

Date: 4.FEB.2014 09:26:39



$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -111.83 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 16.13 \text{ dB}\mu\text{V/m}$   
**Margin = 23.87 dB**

Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

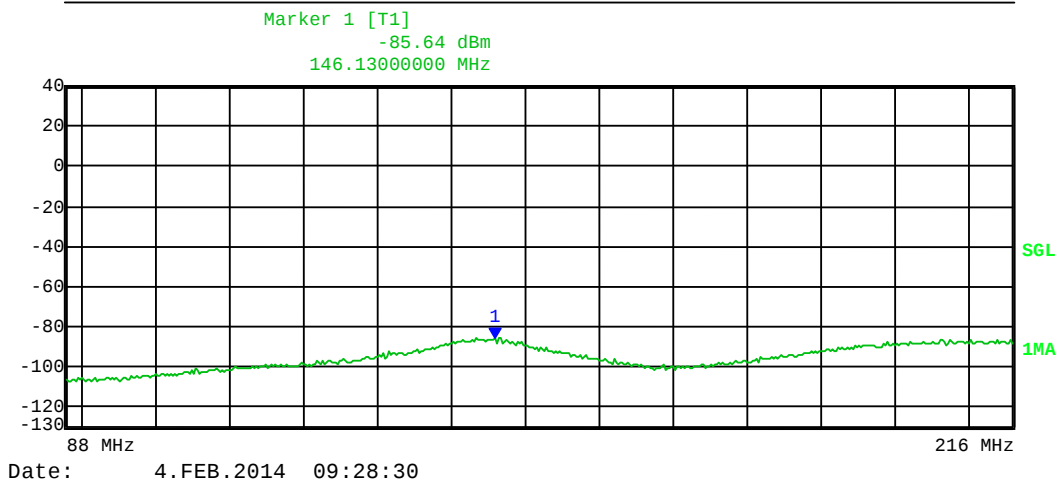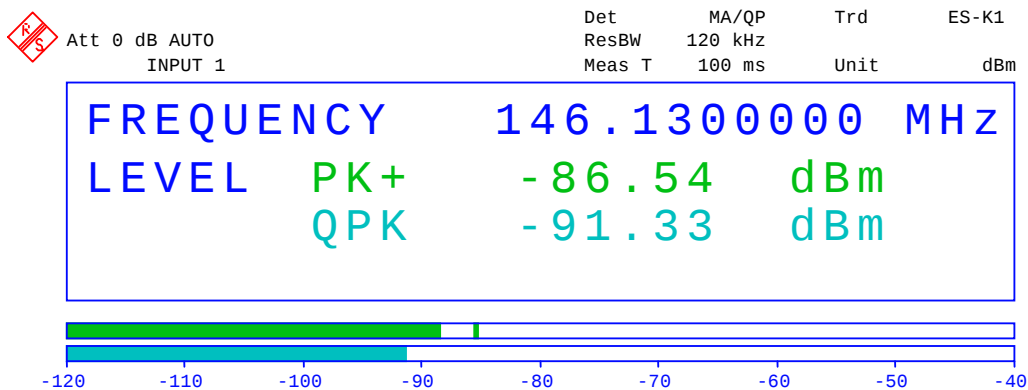

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -91.33 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 36.63 \text{ dB}\mu\text{V/m}$   
**Margin = 6.87 dB**


Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

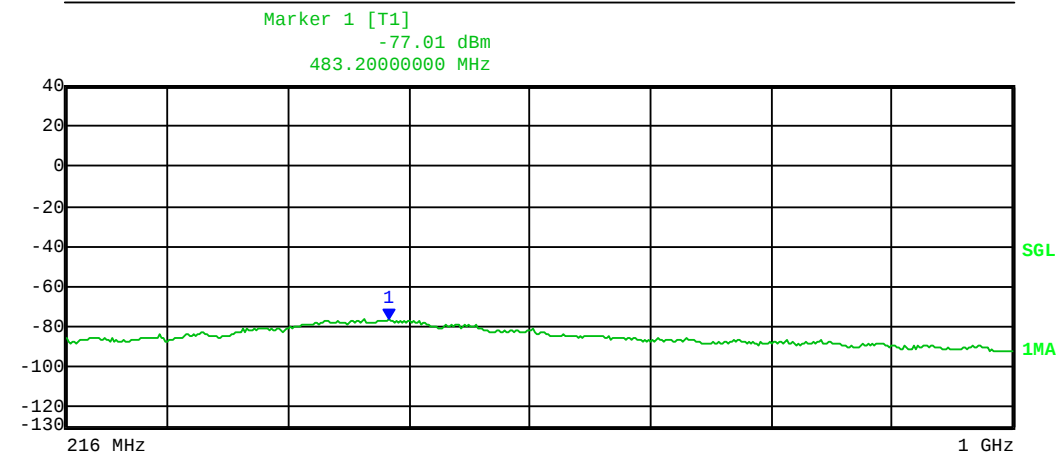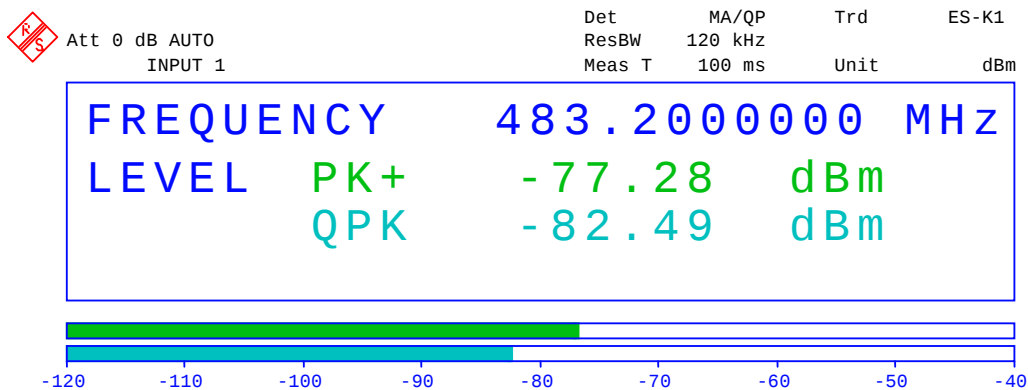

Date: 4.FEB.2014 09:31:02

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)} \\
 &= -82.49 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)} \\
 &= 45.47 \text{ dB}\mu\text{V/m} \\
 \text{Margin} &= 0.53 \text{ dB}
 \end{aligned}$$

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

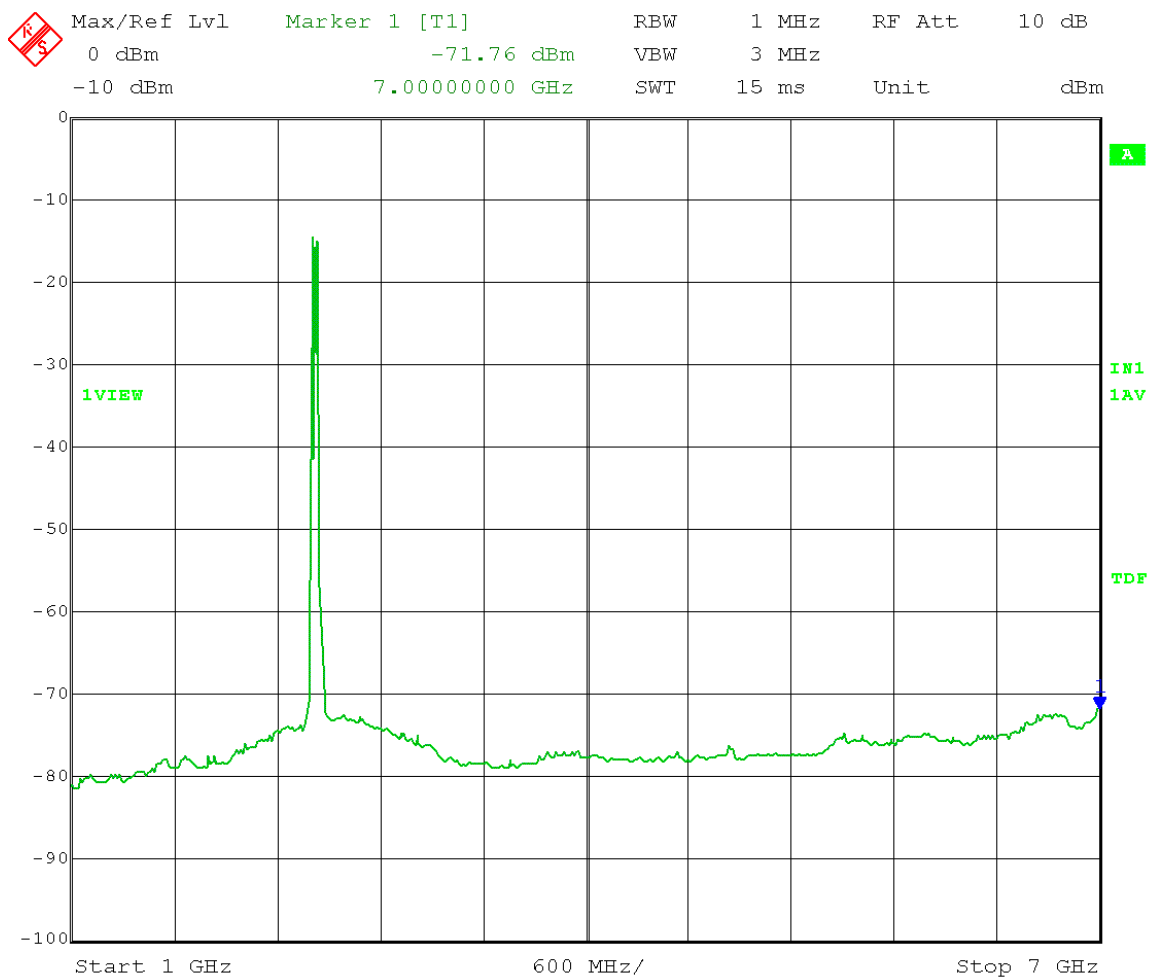


Date: 3.FEB.2014 15:20:51

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -71.76 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 51.50 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 2.50 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

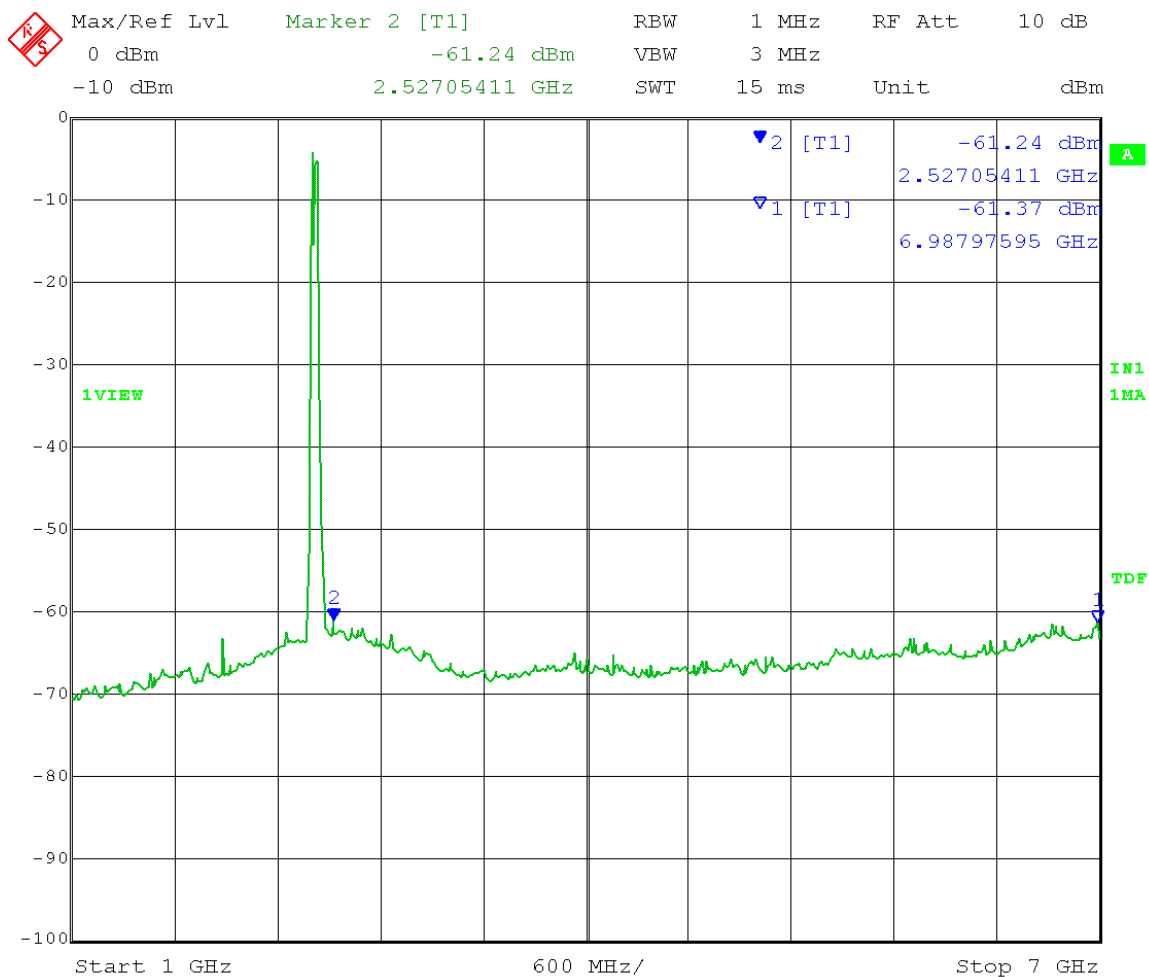


Date: 3.FEB.2014 15:22:58

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -61.24 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.02 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.98 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold **Low Channel Transmit = 2422 MHz**  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

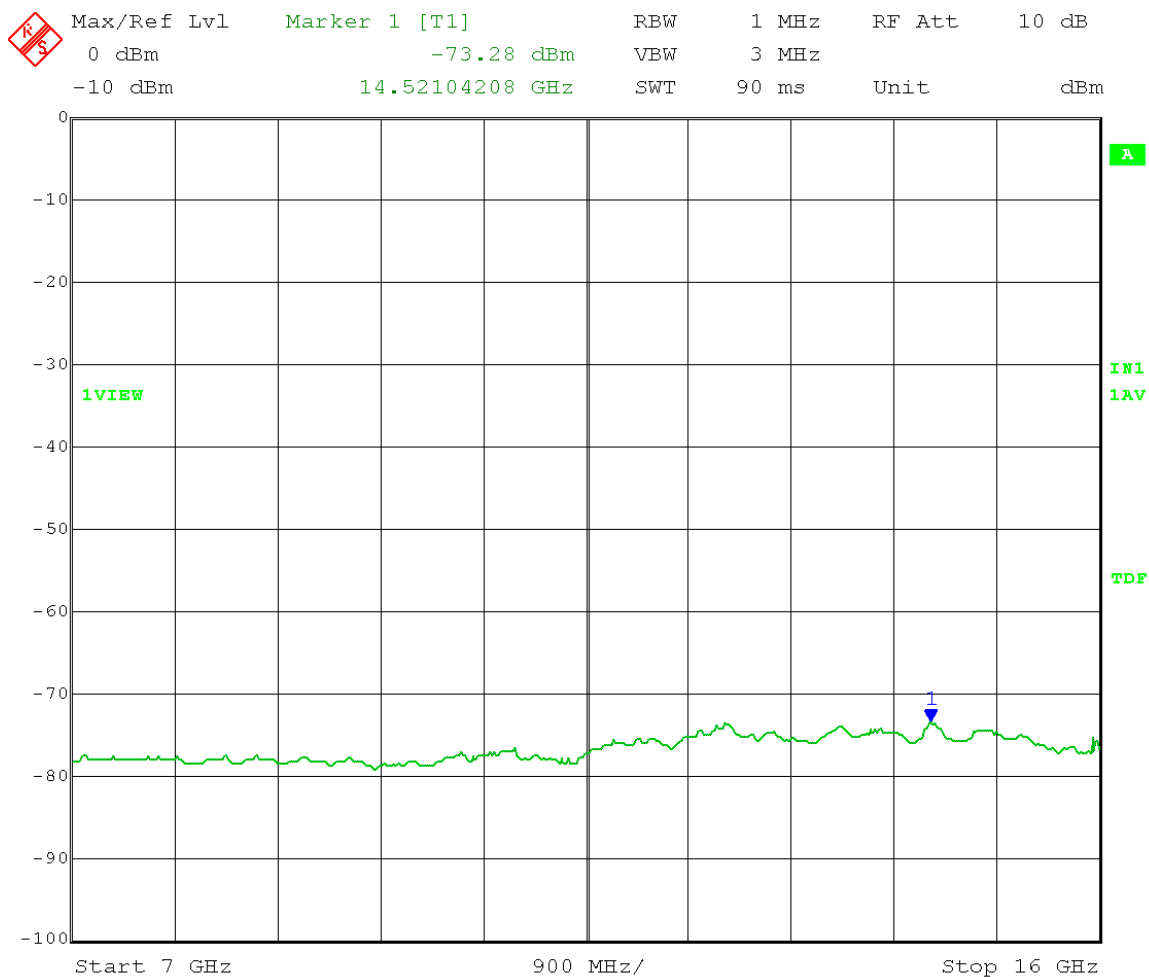


Date: 3.FEB.2014 15:25:13

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -73.28 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.98 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.02 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

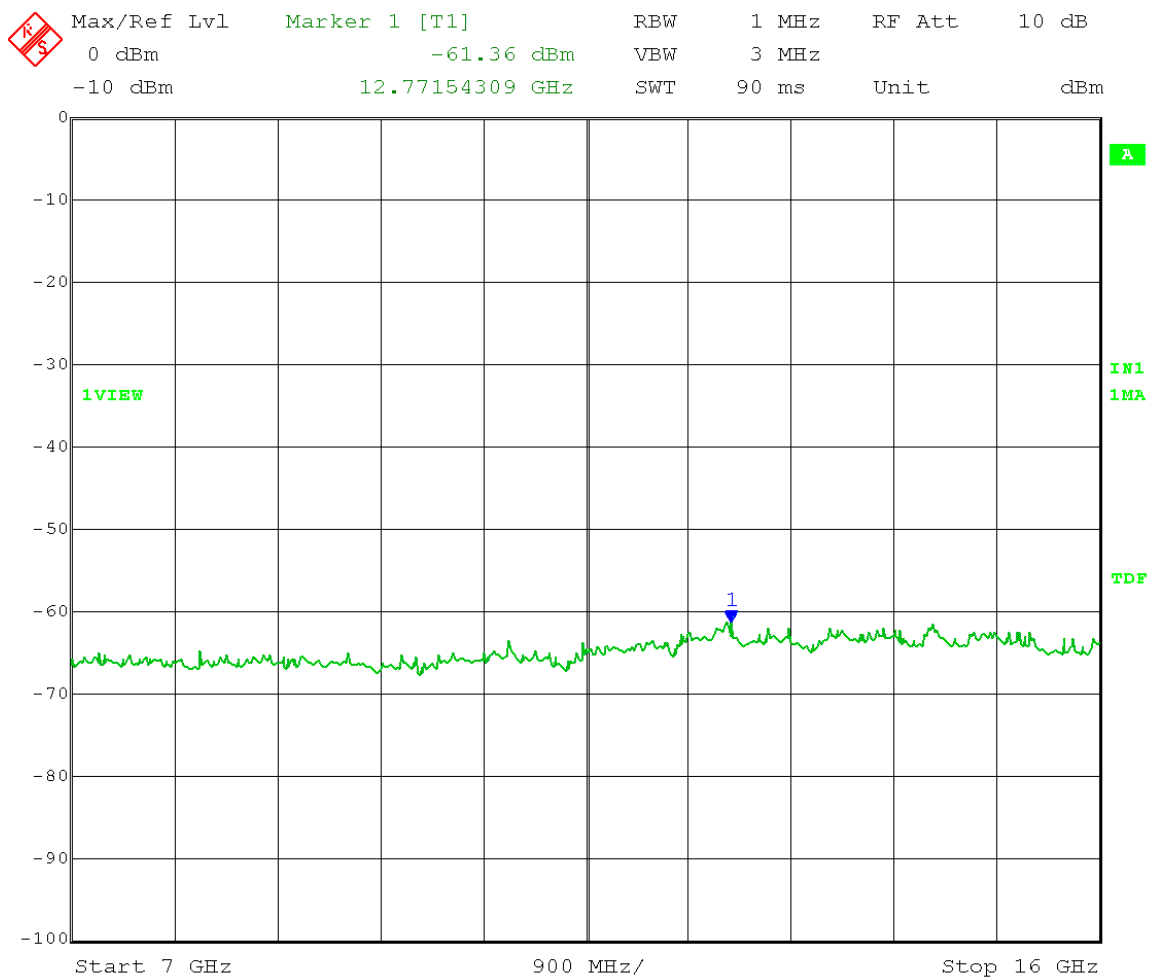


Date: 3.FEB.2014 15:26:35

$E = \text{EIRP} - 20\log D + 104.8$   
 $= -61.36 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)}$   
 $= 61.90 \text{ dB}\mu\text{V/m}$

**Margin = 12.10 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

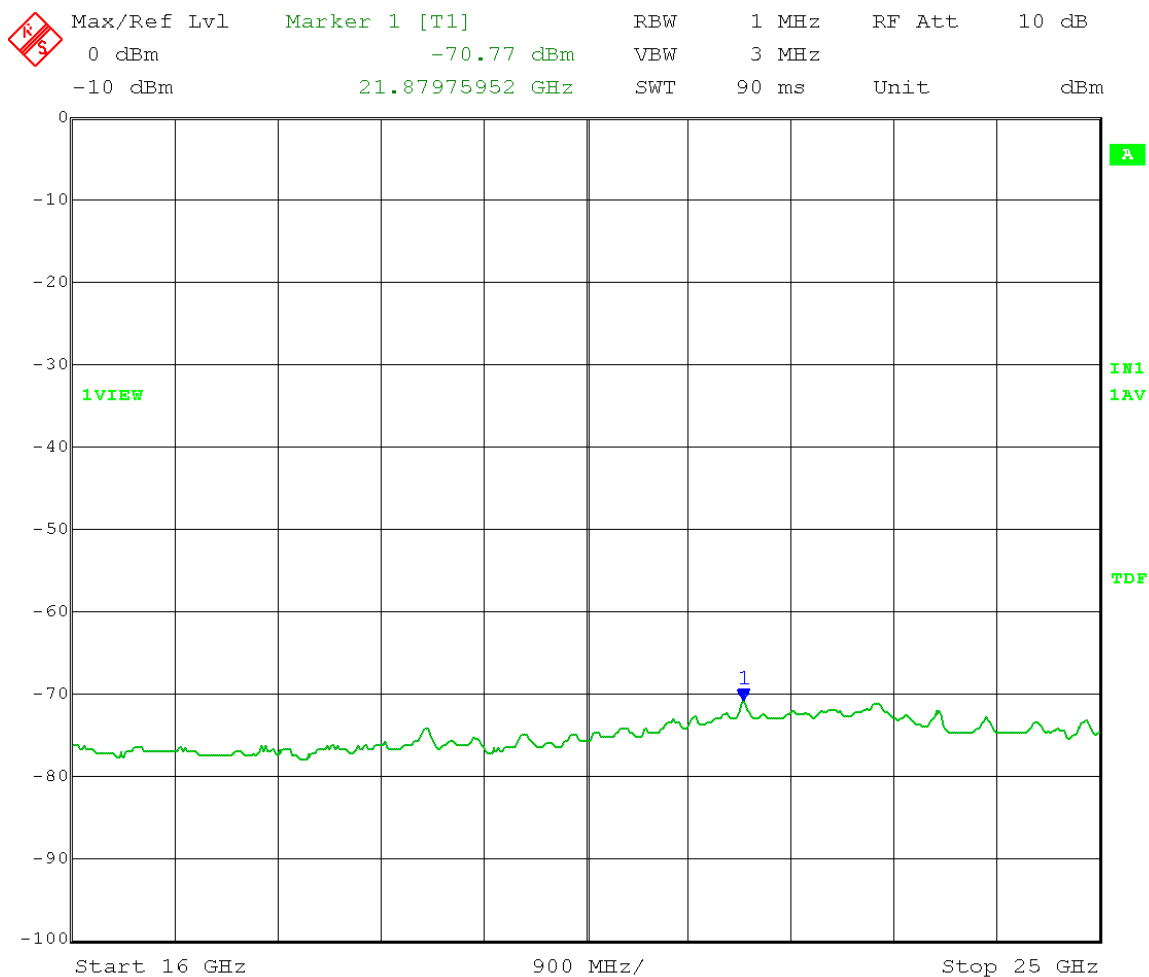


Date: 3.FEB.2014 15:28:12

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.77 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.49 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.51 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Low Channel Transmit = 2422 MHz  
 Output Power Setting 1 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

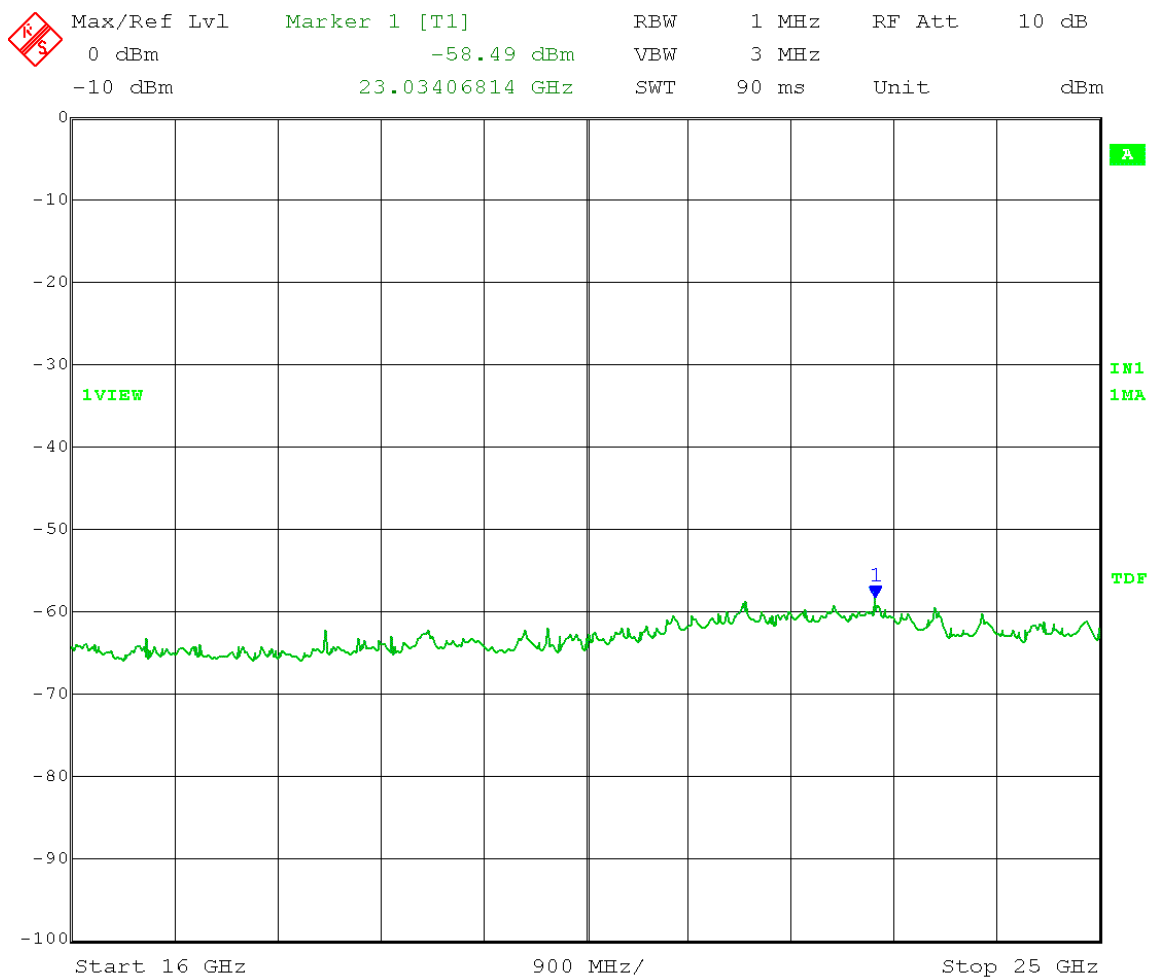


Date: 3.FEB.2014 15:29:48

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -58.49 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 64.77 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 9.23 dB** (noise floor measurement)



Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

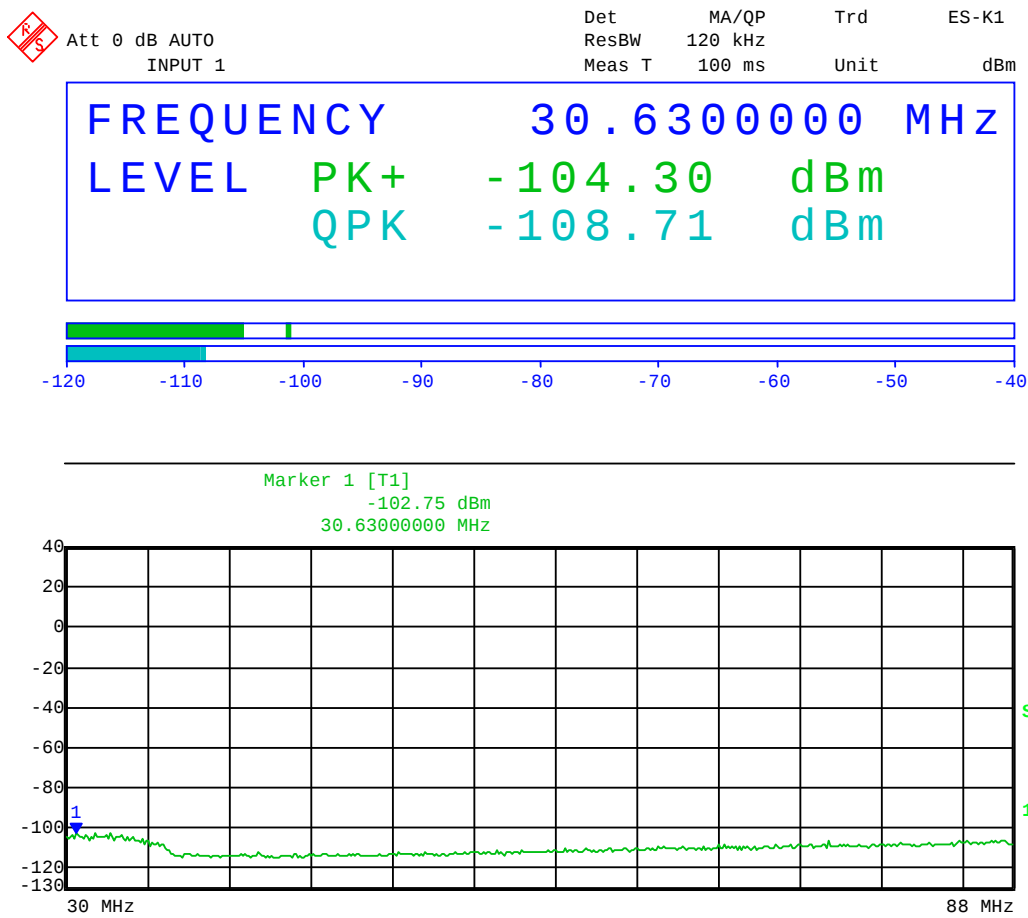

Date: 4.FEB.2014 09:03:32



$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -108.71 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 19.25 \text{ dB}\mu\text{V/m}$   
**Margin = 20.75 dB**

Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

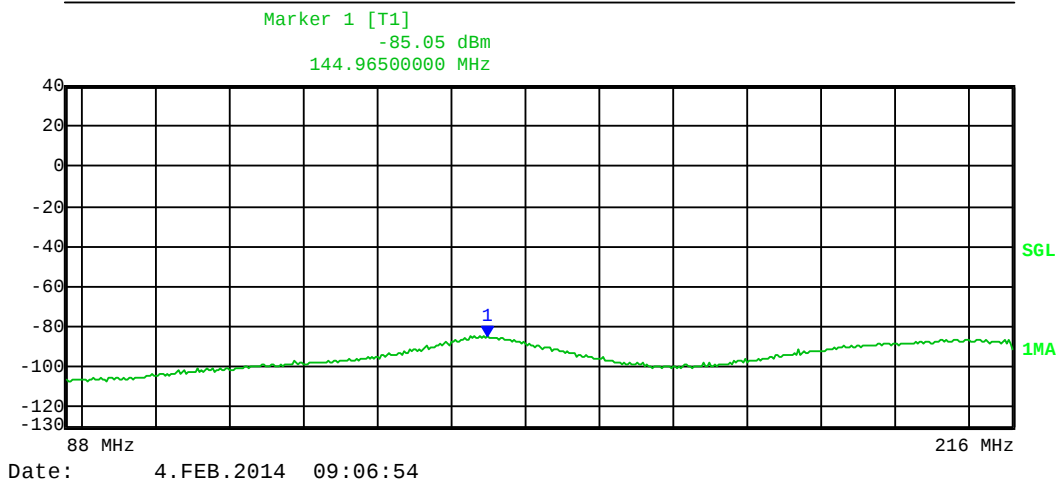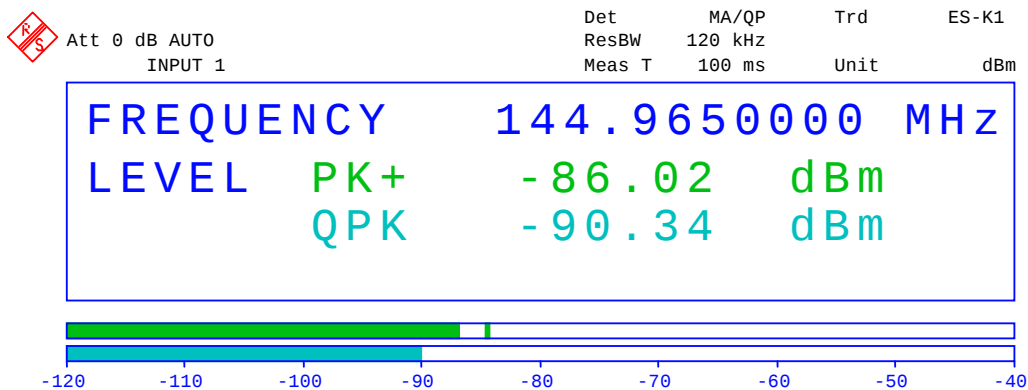

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -90.34 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 37.62 \text{ dB}\mu\text{V/m}$   
**Margin = 5.88 dB**


Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

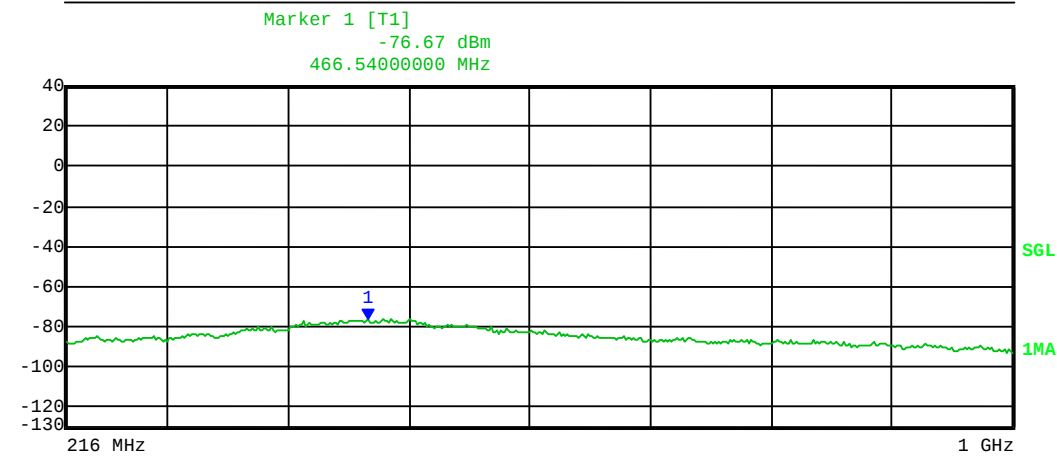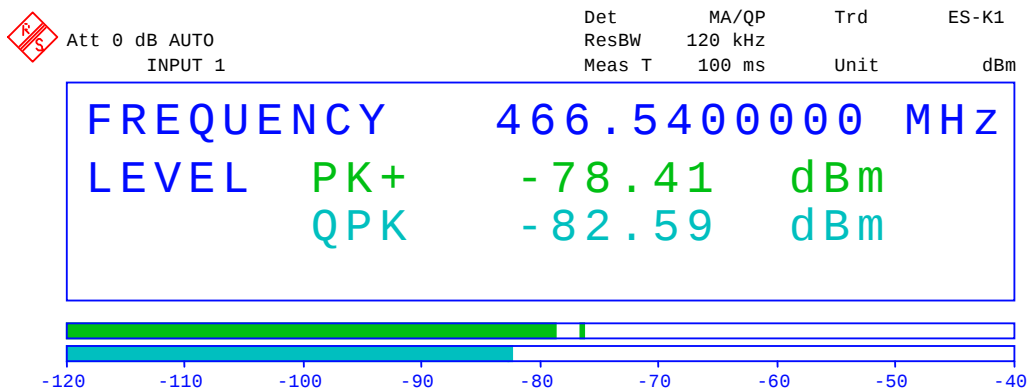

Date: 4.FEB.2014 09:23:12

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -82.59 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 45.37 \text{ dB}\mu\text{V/m}$   
**Margin = 0.63 dB**


Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

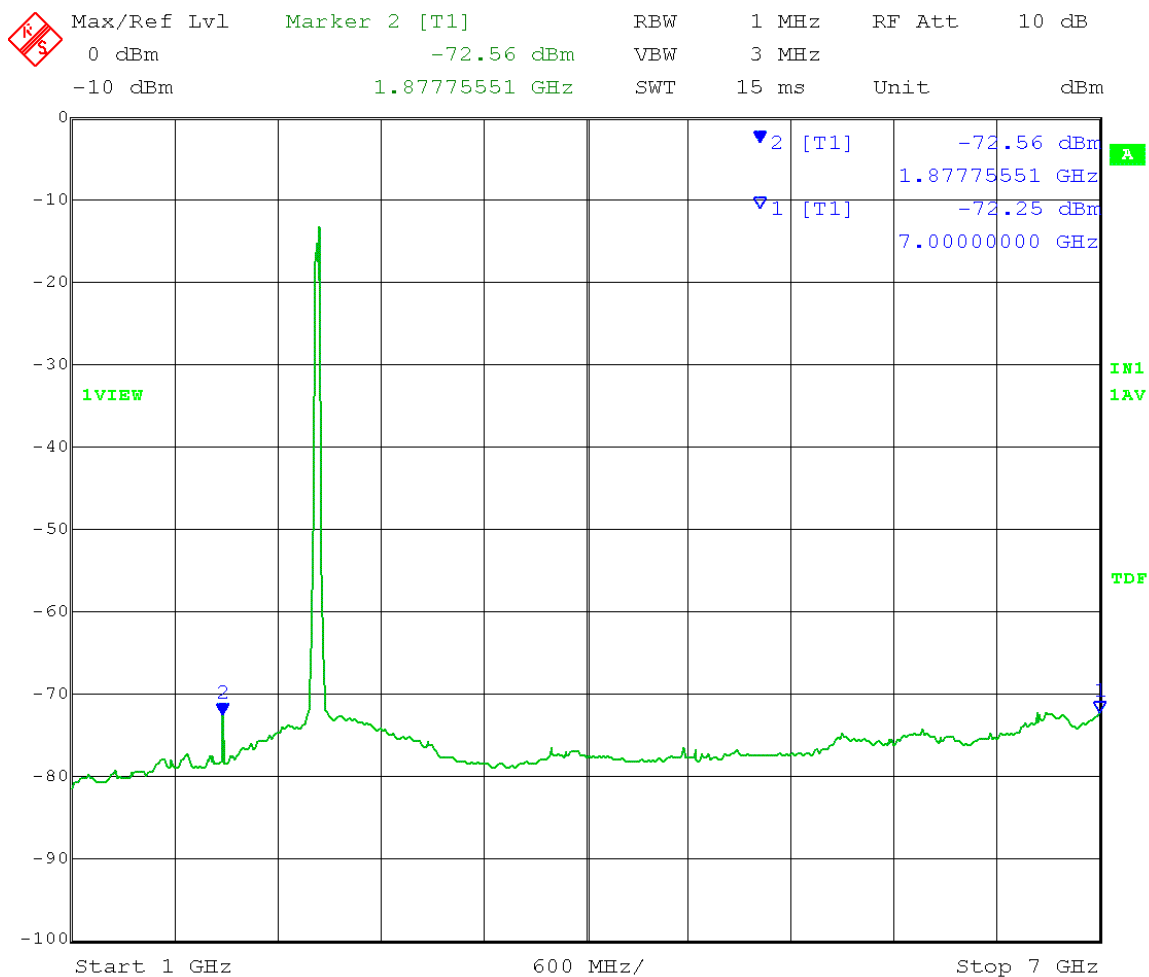

Date: 3.FEB.2014 15:01:04

$E = \text{EIRP} - 20\log D + 104.8$   
 $= -72.25 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)}$   
 $= 51.01 \text{ dB}\mu\text{V/m}$   
**Margin = 2.99 dB**

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz

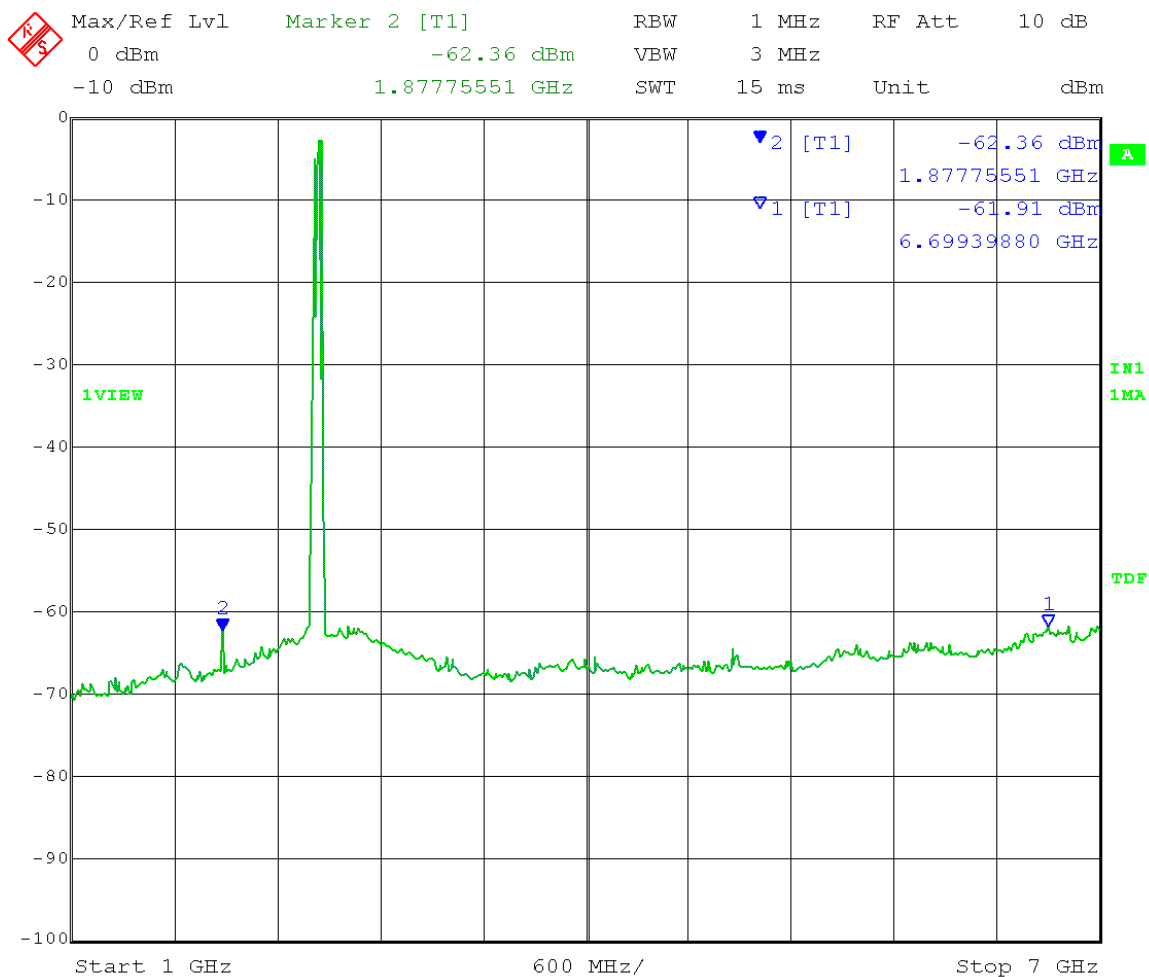


Date: 3.FEB.2014 15:02:38

$E = \text{EIRP} - 20\log D + 104.8$   
 $= -61.91 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)}$   
 $= 61.35 \text{ dB}\mu\text{V/m}$

**Margin = 12.65 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

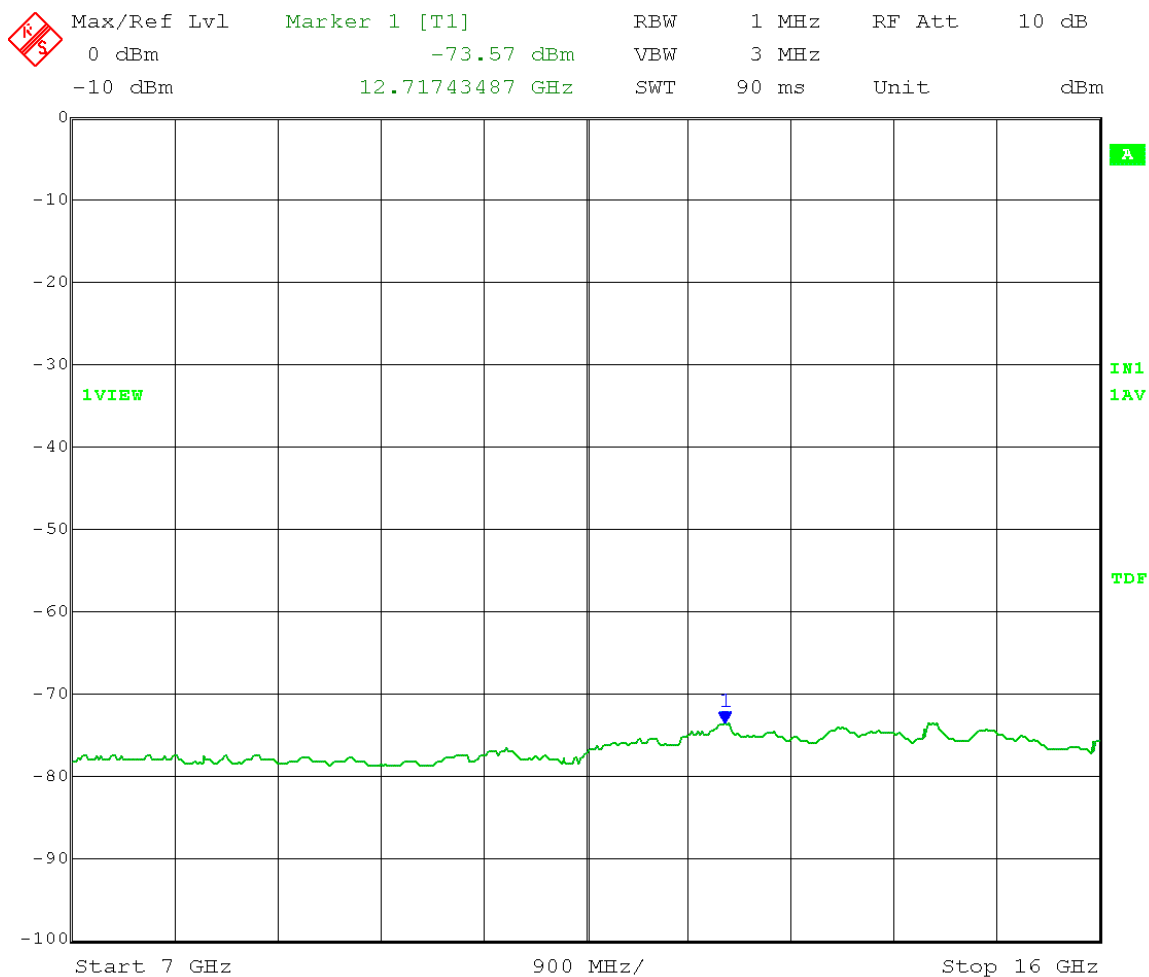


Date: 3.FEB.2014 15:04:32

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -73.57 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.69 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.31 dB** (noise floor measurement)

Test Date: 01-31-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 20MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

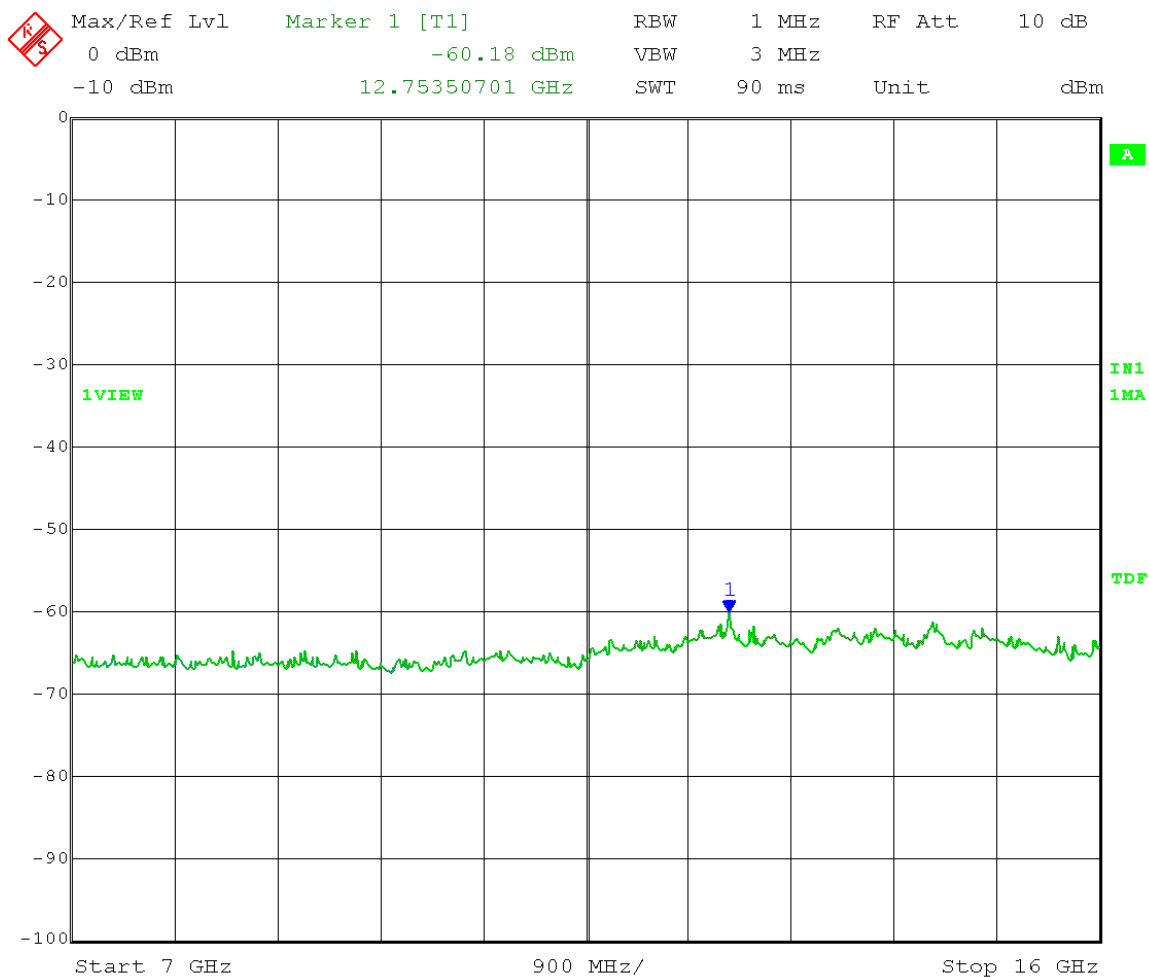


Date: 3.FEB.2014 15:15:03

$E = \text{EIRP} - 20\log D + 104.8$   
 $= -60.18 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)}$   
 $= 63.08 \text{ dB}\mu\text{V/m}$

**Margin = 10.92 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

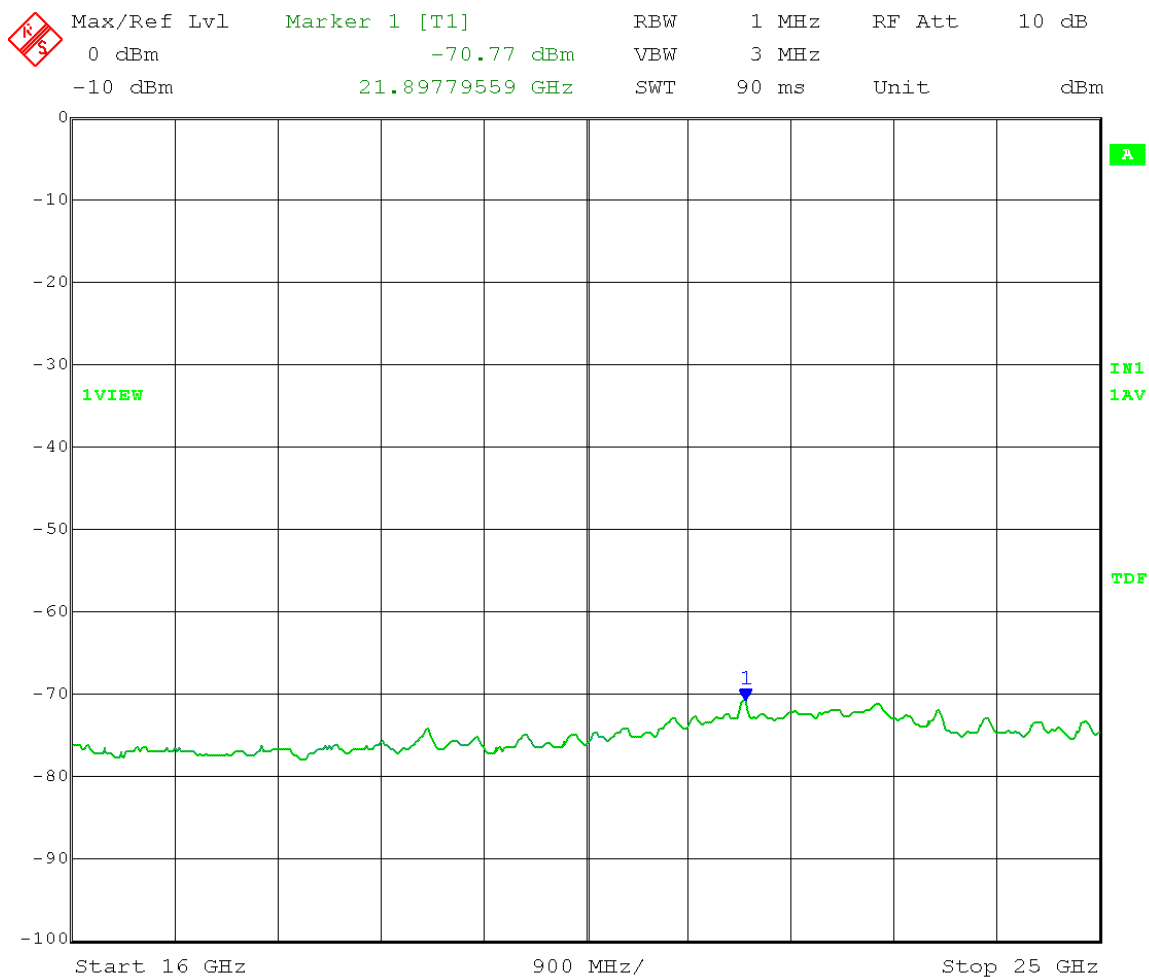


Date: 3.FEB.2014 15:18:22

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.77 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.49 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.51 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold Mid Channel Transmit = 2437 MHz  
 Output Power Setting 1.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

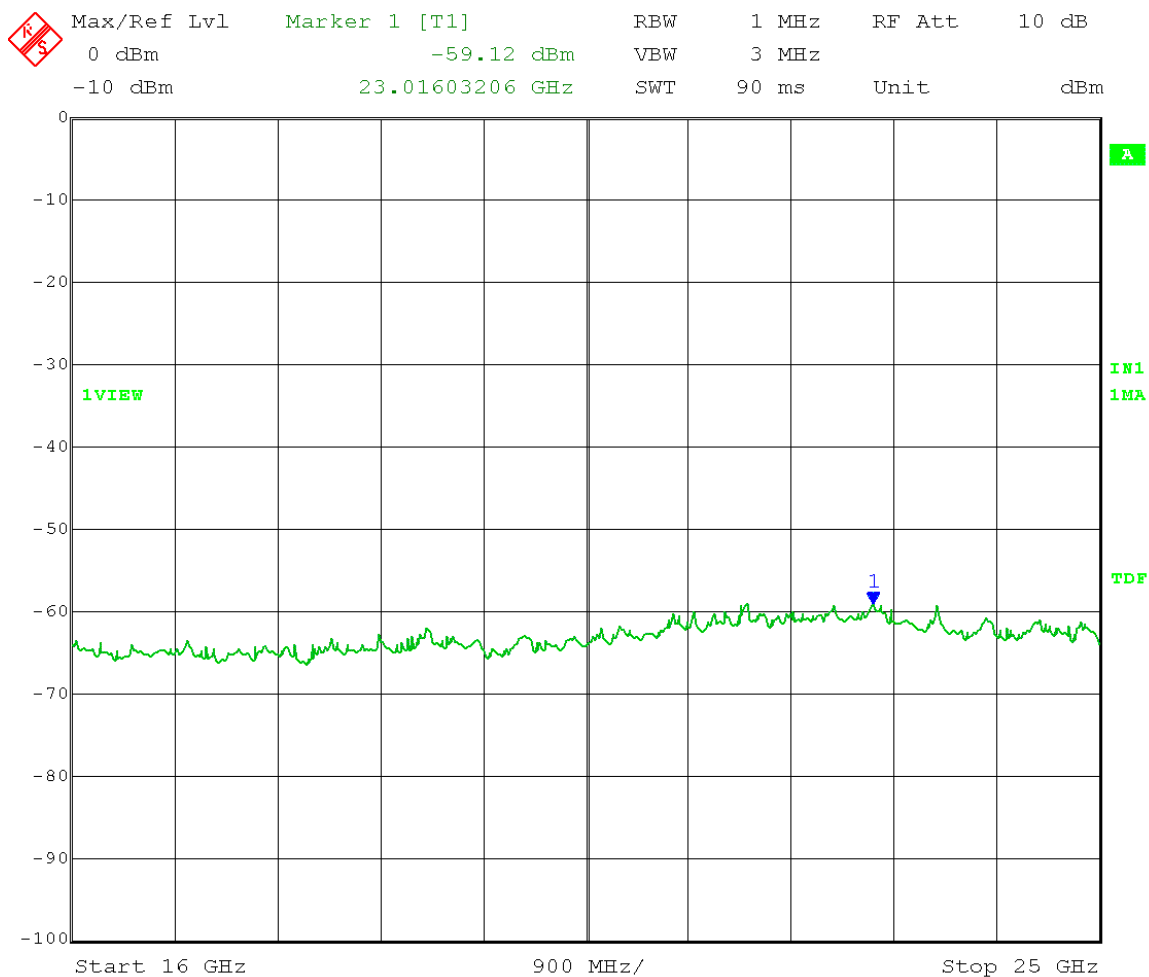


Date: 3.FEB.2014 15:17:04

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -59.12 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 64.14 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 9.86 dB** (noise floor measurement)



Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2447 MHz  
 Output Power Setting 0 Channel bandwidth: 40MHz  
 Output port: 0.5 OFDM MCS15  
 Quasi-Peak limit = 40 dBμV/m at 3 meters  
 Frequency Range: 30 – 88 MHz

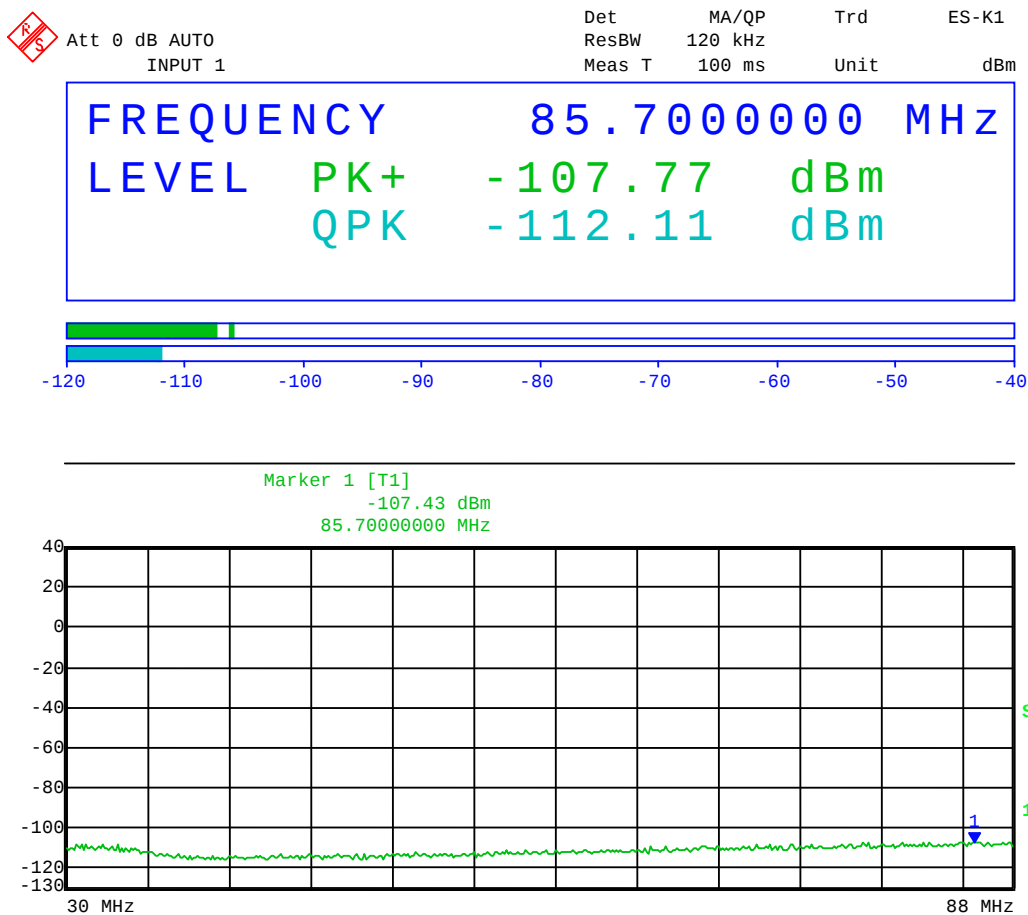

Date: 4.FEB.2014 09:34:14

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -112.11 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 15.85 \text{ dB}\mu\text{V/m}$   
**Margin = 24.15 dB**



Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 43.5 dBμV/m at 3 meters  
 Frequency Range: 88 – 216 MHz

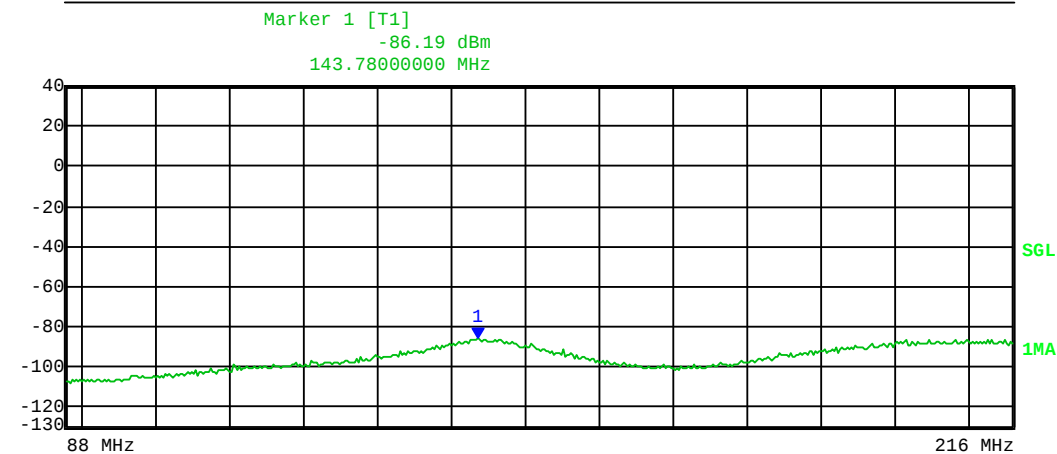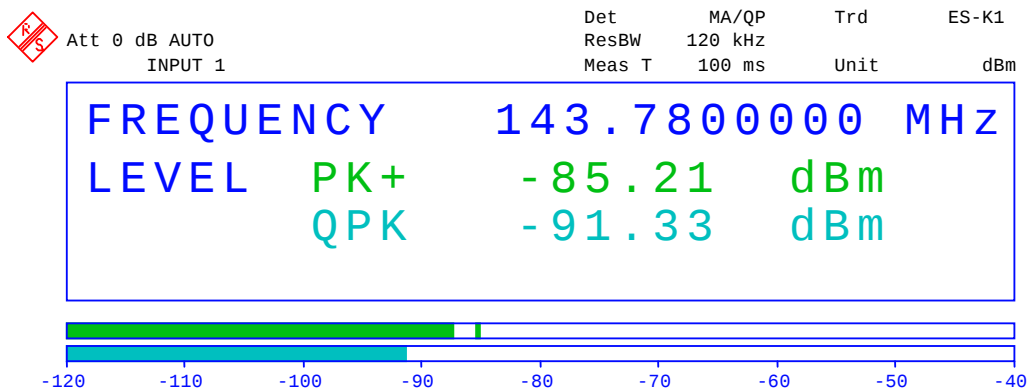

Date: 4.FEB.2014 09:38:09

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -91.33 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 36.63 \text{ dB}\mu\text{V/m}$   
**Margin = 6.87 dB**


Test Date: 02-04-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: Detector bandwidth = 120 kHz  
 Detector = Quasi-Peak  
 High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40MHz  
 Output port: 0 OFDM MCS15  
 Quasi-Peak limit = 46 dBμV/m at 3 meters  
 Frequency Range: 216 – 1000 MHz

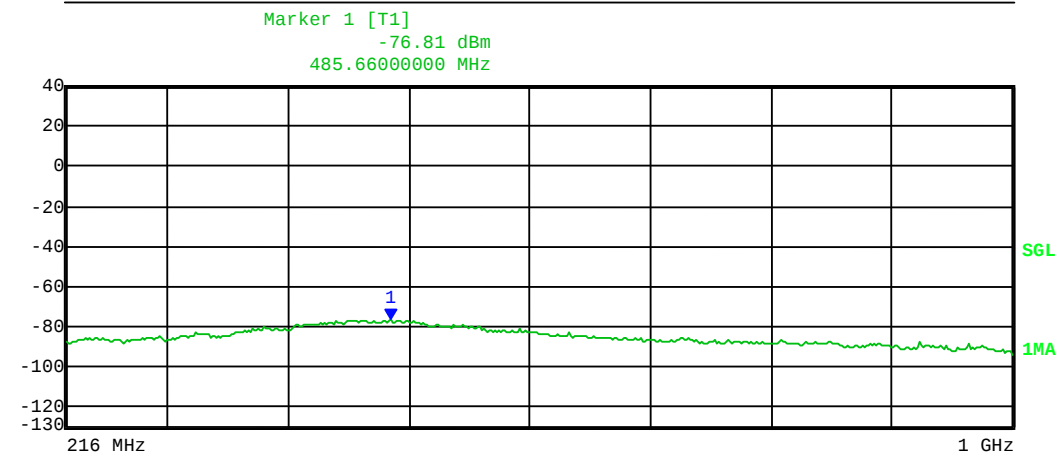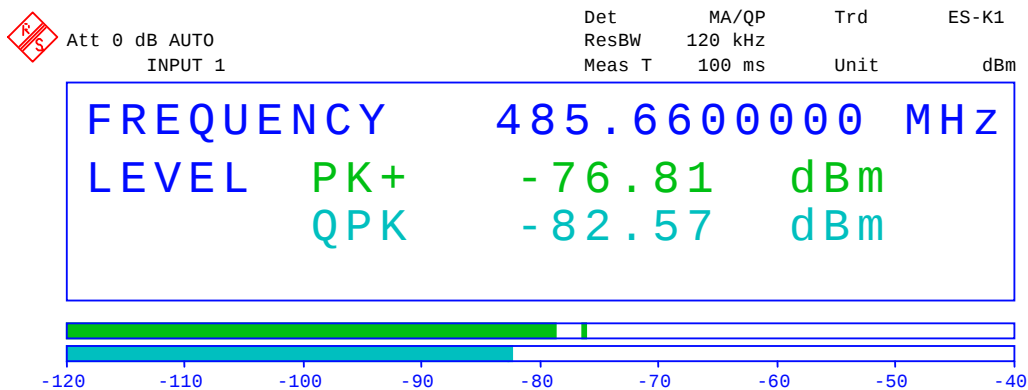

Date: 4.FEB.2014 09:40:52

$E = \text{EIRP} - 20\log D + 104.8 + 4.7 \text{ dB (ground reflection)}$   
 $= -82.57 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 4.7 \text{ dB} + 3 \text{ dB (MIMO operation)}$   
 $= 45.39 \text{ dB}\mu\text{V/m}$   
**Margin = 0.61 dB**

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW ≥ 3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dBμV/m at 3 meters  
 Frequency Range: 1 – 7 GHz

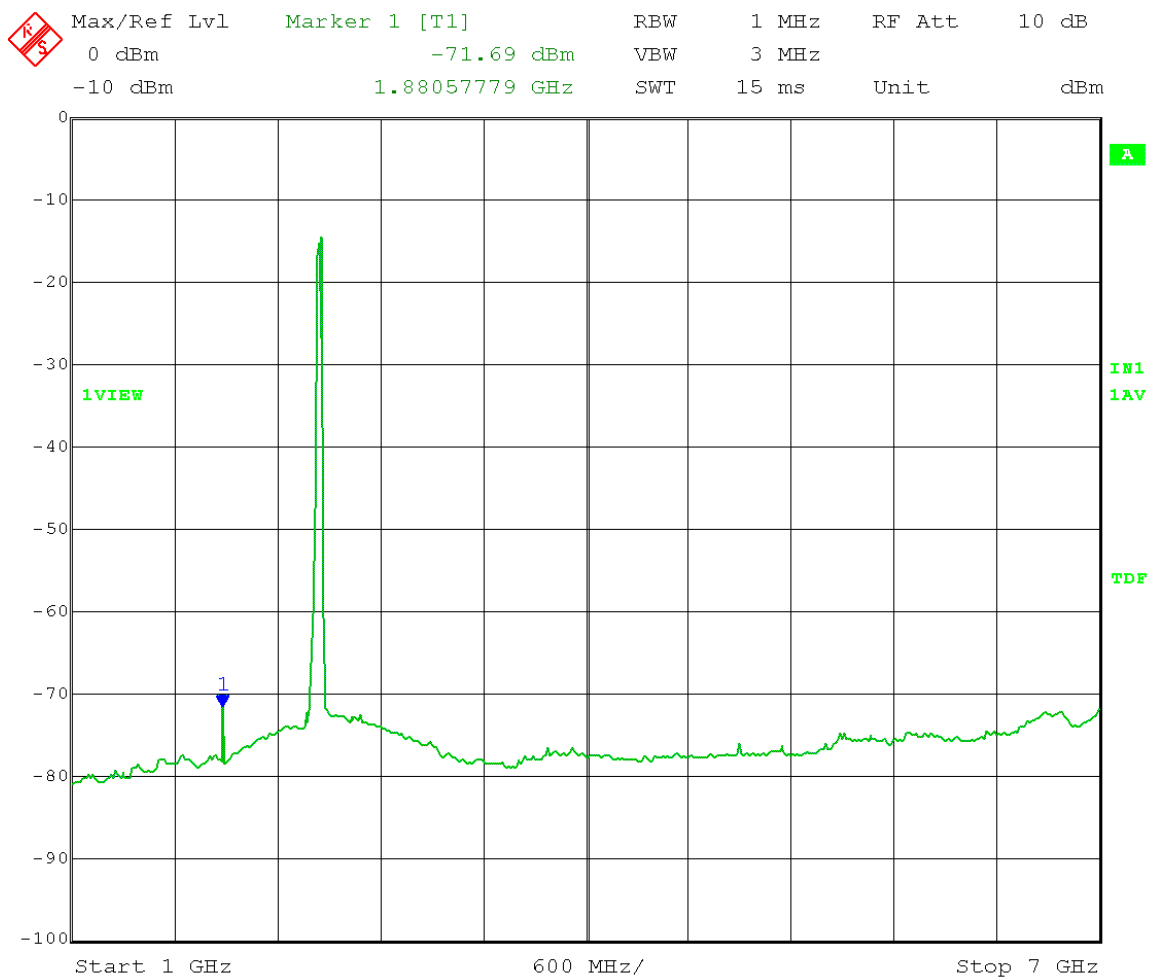

Date: 3.FEB.2014 15:38:52

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -71.69 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 51.57 \text{ dB}\mu\text{V/m} \\
 \text{Margin} &= 2.43 \text{ dB}
 \end{aligned}$$

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 1 – 7 GHz




Date: 3.FEB.2014 15:40:45

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -60.58 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 62.68 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 11.32 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

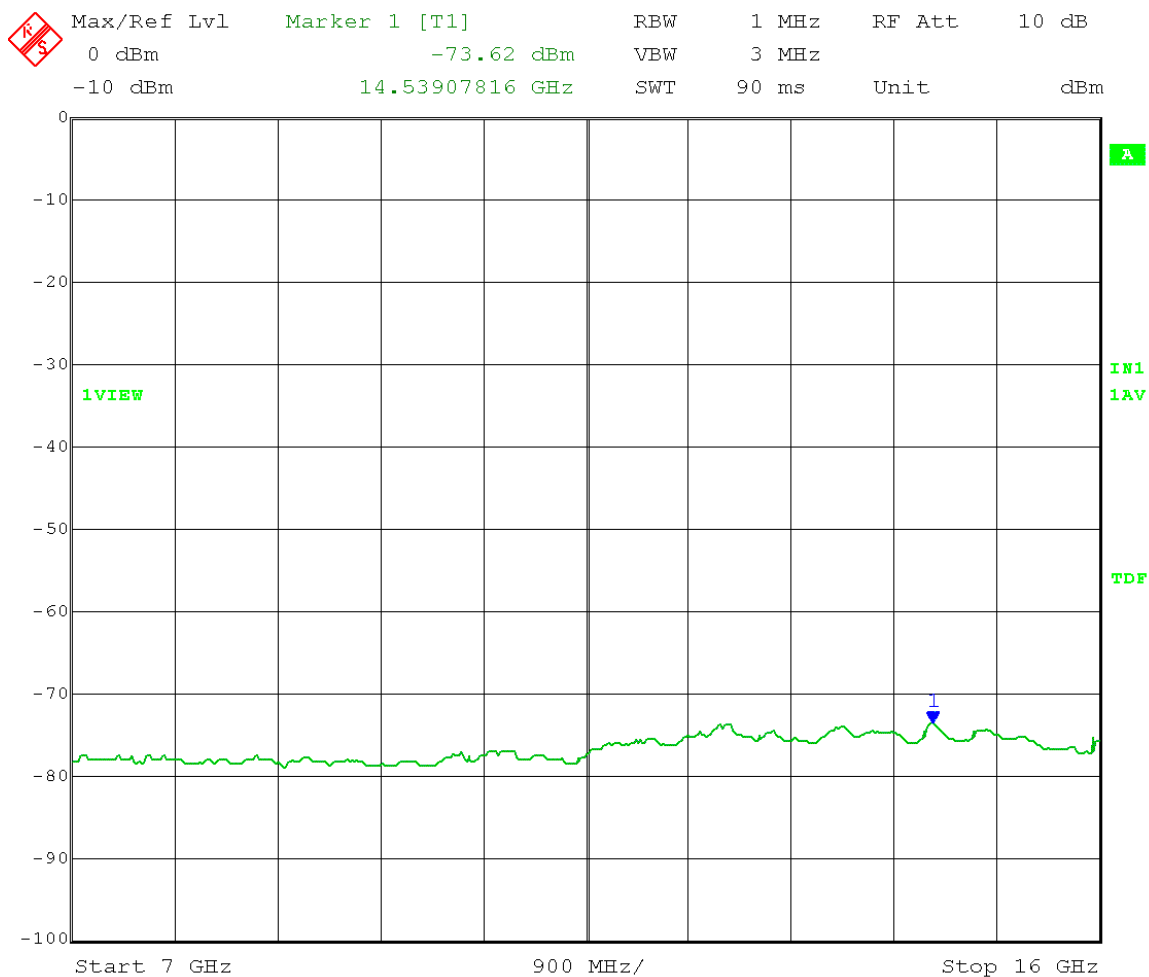


Date: 3.FEB.2014 15:43:00

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -73.62 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 49.64 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 4.36 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 7 – 16 GHz

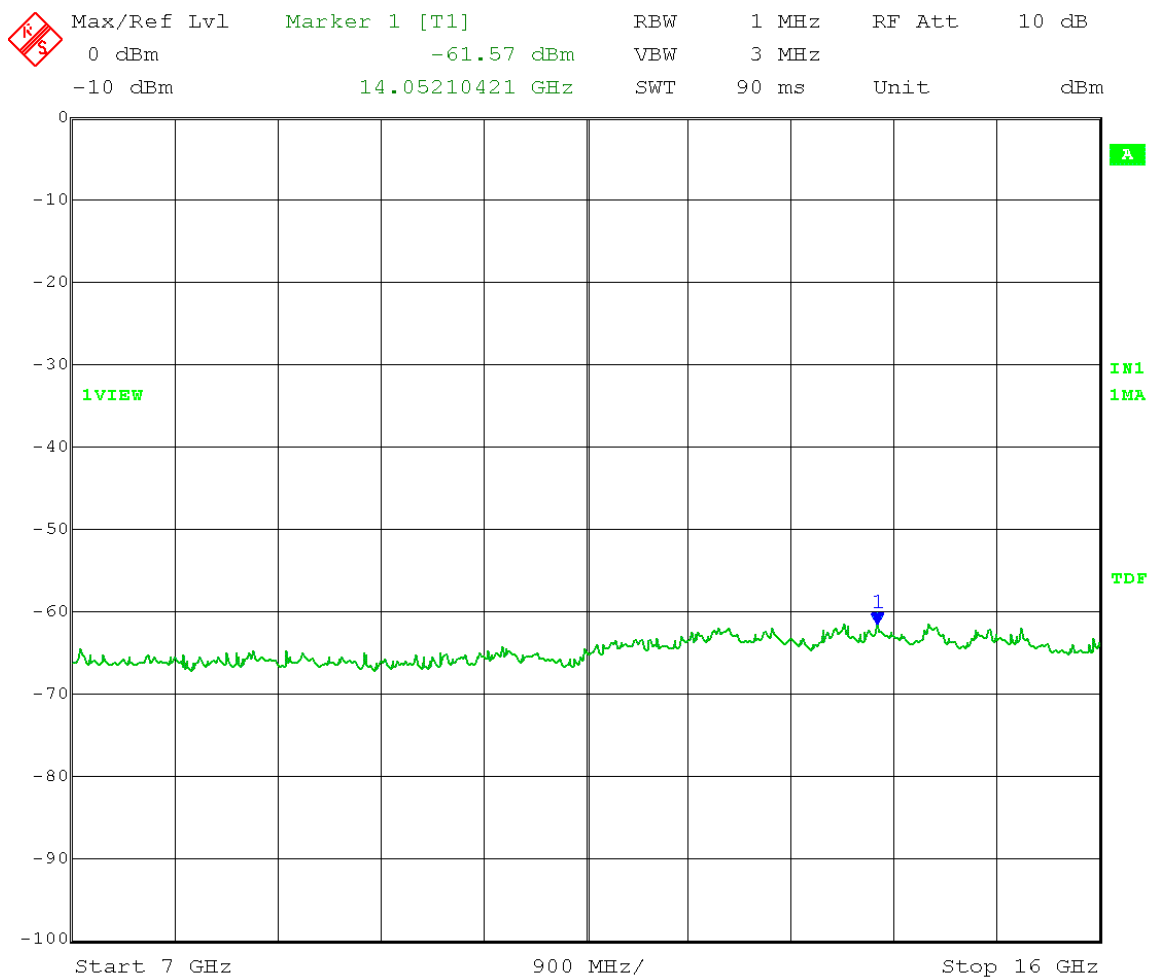


Date: 3.FEB.2014 15:44:37

$E = \text{EIRP} - 20\log D + 104.8$   
 $= -61.57 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)}$   
 $= 61.69 \text{ dB}\mu\text{V/m}$

**Margin = 12.31 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Average Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Average limit = 54 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

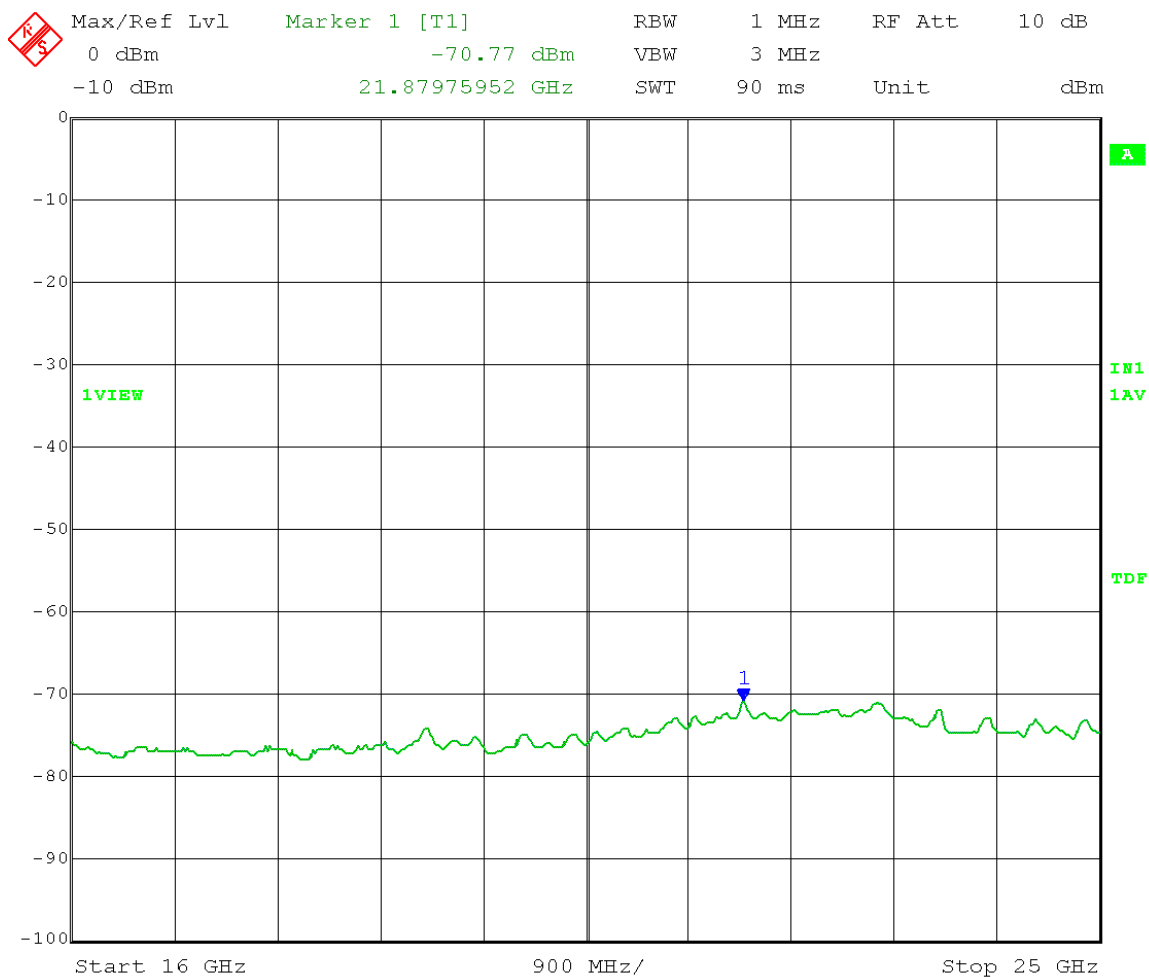


Date: 3.FEB.2014 15:46:14

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -70.77 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 52.49 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 1.51 dB** (noise floor measurement)

Test Date: 02-03-14  
 Company: Cambium Networks  
 EUT: EPMP 2.4 GHz AP MAC: 000456C1A853  
 Test: Maximum Unwanted Emission Levels - Conducted  
 Operator: Craig B  
 Comment: RBW = 1 MHz VBW  $\geq$  3 MHz  
 Detector = Peak Sweep = Auto Couple  
 Trace = Max Hold High Channel Transmit = 2447 MHz  
 Output Power Setting 0.5 Channel bandwidth: 40 MHz  
 Output port: 0 OFDM MCS15  
 Peak limit = 74 dB $\mu$ V/m at 3 meters  
 Frequency Range: 16 – 25 GHz

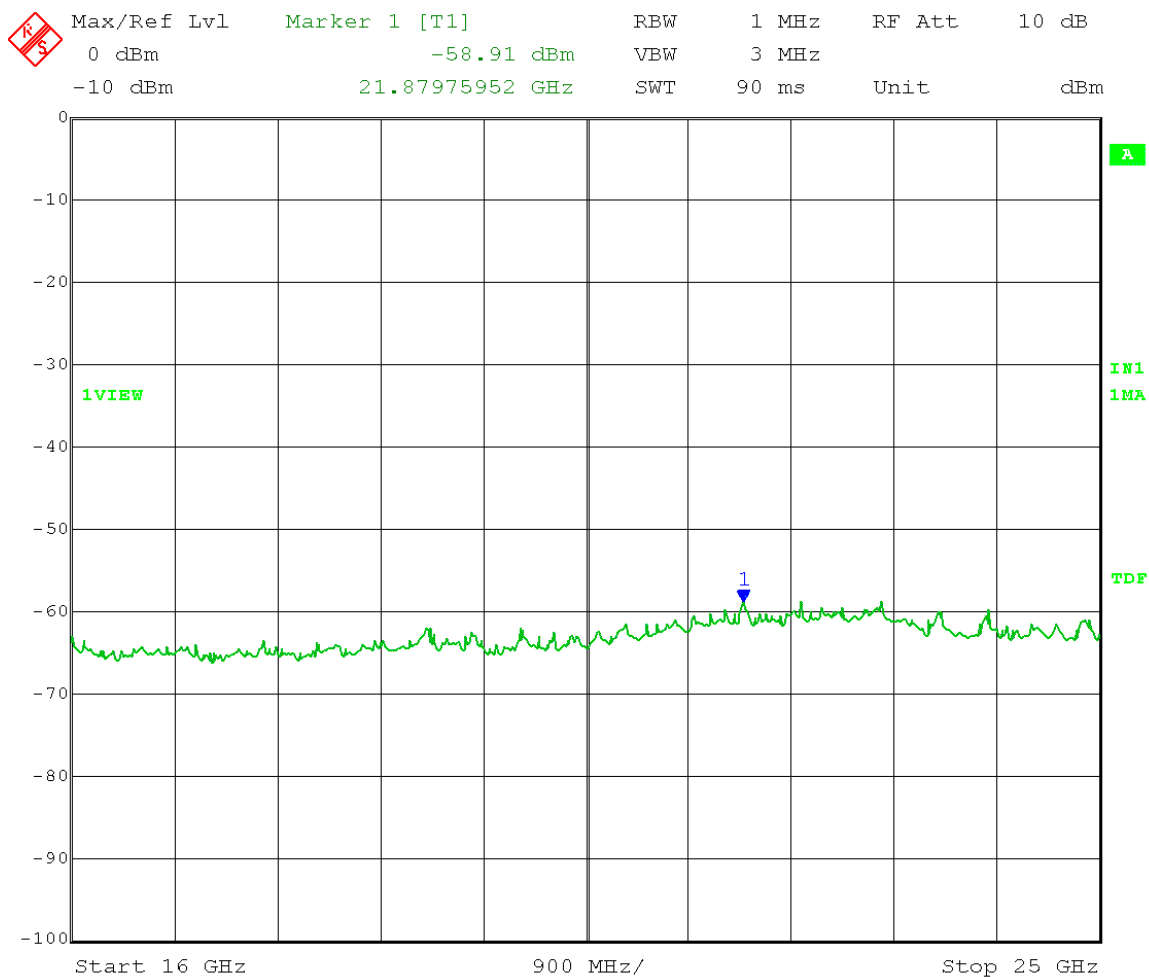

Date: 3.FEB.2014 15:47:25

$$\begin{aligned}
 E &= \text{EIRP} - 20\log D + 104.8 \\
 &= -58.91 \text{ dBm} + 25 \text{ dBi antenna gain} - 20\log (3 \text{ meters}) + 104.8 + 3 \text{ dB (MIMO operation)} \\
 &= 64.35 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

**Margin = 9.65 dB** (noise floor measurement)



166 South Carter, Genoa City, WI 53128

Company:  
Model Tested:  
Report Number:  
DLS Project:

Cambium Networks  
C024900P011A  
19734  
6333

## END OF REPORT

| Revision # | Date       | Comments                                 | By |
|------------|------------|------------------------------------------|----|
| 1.0        | 02-12-2014 | Preliminary Release                      | JS |
| 1.1        | 03-11-2014 | Add pg 25 note & edit title pg 145 (& 6) | JS |
|            |            |                                          |    |
|            |            |                                          |    |
|            |            |                                          |    |