



## EMC TEST REPORT

<b>TEST REPORT NUMBER</b>	DOJ 1504TEL567-A1
<b>TEST REPORT DATE</b>	27 <sup>th</sup> Apr 2015
<b>TEST REPORT VERSION</b>	1.30
<b>MANUFACTURER</b>	Gemtek Electronics (ChangSHU) Co.
<b>PRODUCT NAME</b>	5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio
<b>PRODUCT MODEL NO.</b>	C058900P072A, C058900C072A, C058900P062A, C058900C062A
<b>PART No.</b>	142000001193A
<b>REV</b>	0B
<b>CONDITION OF EUT WHEN RECEIVED</b>	GOOD and in working condition
<b>ISSUED TO</b>	3800 Golf Road, Suite 360 Rolling Meadows, IL 60008. USA +1 888-863-5250
<b>ISSUED BY</b>	<b>TARANG Lab</b> Wipro Technologies, SJP2, Survey#70,77,78/8A, Dodd Kanelli, Sarjapur road, Bangalore. Karnataka. India - 560 035 Tel: +91-80-30292929 Fax: +91-80-30298200 Email: tarang.planet@wipro.com Web: <a href="http://www.wipro.com">www.wipro.com</a>

## AMENDMENT HISTORY

Amendment Number	Amendment Date	Author of Amendment	Previous Report Version	Previous Report Date
1.10	14 <sup>th</sup> Apr 2015	Harsha K	1.0	11 <sup>th</sup> Apr 2015
Amendment Details	Updated Peak detector measurement results for frequencies above 1GHz. These amendments are reflected in <a href="#">Section 5.3.2.6</a> & <a href="#">Section 5.3.2.7</a>			

Amendment Number	Amendment Date	Author of Amendment	Previous Report Version	Previous Report Date
1.20	22 <sup>nd</sup> Apr 2015	Harsha K	1.10	14 <sup>th</sup> Apr 2015
Amendment Details	<p>The reference to the Tunable Band reject/Notch filter from Wainwright Instruments GmbH used to reject the intentional frequency has been listed in <a href="#">Section 3.2</a></p> <p>More specific details of firmware settings of the radio module have been captured in <a href="#">Section 4.2</a>.</p> <p>Updated EUT configuration details. This amendment is reflected in <a href="#">Section 5.1.1</a></p>			

Amendment Number	Amendment Date	Author of Amendment	Previous Report Version	Previous Report Date
1.30	27 <sup>th</sup> Apr 2015	Harsha K	1.20	22 <sup>nd</sup> Apr 2015
Amendment Details	<p>The conducted emissions tests were repeated by ensuring that the distance from the EUT to the LISN is maintained at 0.8m. This was done by using a power cord extender. The updated results are captured in the test report in <a href="#">Section 5.3.1.5</a> &amp; <a href="#">Section 5.3.1.6</a>.</p> <p>The radiated emissions tests beyond 1GHz were repeated using floor absorbers of shorter height (max allowable 30cm). The updated results are captured in the test report in <a href="#">Section 5.3.2.6</a> &amp; <a href="#">Section 5.3.2.7</a>.</p>			

---

## TABLE OF CONTENTS

<b>1 TEST REPORT SUMMARY.....</b>	<b>8</b>
<b>2 GENERAL INFORMATION .....</b>	<b>10</b>
2.1 TEST DETAILS.....	10
2.2 TEST FACILITY DETAILS .....	10
2.3 MEASUREMENT UNCERTAINTY .....	10
<b>3 INSTRUMENTATION AND CALIBRATION .....</b>	<b>11</b>
3.1 TEST AND MEASURING EQUIPMENT.....	11
3.2 EQUIPMENTS USED .....	11
<b>4 PRODUCT INFORMATION .....</b>	<b>12</b>
4.1 DESCRIPTION OF THE PRODUCT .....	12
4.2 SOFTWARE AND FIRMWARE DETAILS .....	12
4.3 LIST OF PRODUCT CABLES .....	12
<b>5 TEST DETAILS.....</b>	<b>13</b>
5.1 PRODUCT AND TEST SETUP .....	13
5.1.1 Product Configuration.....	13
5.1.2 Test Setup Details .....	13
5.1.3 Accessories .....	13
5.2 APPLICABLE TESTS .....	14
5.3 TEST RESULT .....	15
5.3.1 Conducted Emission .....	15
5.3.2 Radiated Emission .....	35
<b>APPENDIX I – ACRONYMS.....</b>	<b>105</b>

---

## LIST OF FIGURES

Figure 1: Block Diagram of the EUT test setup during the tests .....	13
Figure 2: Typical test setup for conducted Emission test .....	16
Figure 3: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	17
Figure 4: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	17
Figure 5: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	18
Figure 6: CE graph from 150 kHz to 30MHz using Average detector - Line .....	19
Figure 7: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	20
Figure 8: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	20
Figure 9: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	21
Figure 10: CE graph from 150 kHz to 30MHz using Average detector - Line .....	22
Figure 11: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	23
Figure 12: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	23
Figure 13: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	24
Figure 14: CE graph from 150 kHz to 30MHz using Average detector - Line .....	25
Figure 15: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	26
Figure 16: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	26
Figure 17: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	27
Figure 18: CE graph from 150 kHz to 30MHz using Average detector - Line .....	28
Figure 19: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	29
Figure 20: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	29
Figure 21: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	30
Figure 22: CE graph from 150 kHz to 30MHz using Average detector - Line .....	31
Figure 23: CE graph from 150 kHz to 30MHz using Peak detector - Neutral .....	32
Figure 24: CE graph from 150 kHz to 30MHz using Peak detector - Line .....	32
Figure 25: CE graph from 150 kHz to 30MHz using Average detector - Neutral .....	33
Figure 26: CE graph from 150 kHz to 30MHz using Average detector - Line .....	34
Figure 27: Typical test setup for Radiated Emission test .....	37
Figure 28: Average RE from 9 kHz to 90 kHz - Parallel .....	38
Figure 29: Average RE from 110 kHz to 490 kHz - Parallel .....	38
Figure 30: Peak RE from 9 kHz to 30MHz - Parallel .....	39
Figure 31: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	39
Figure 32: Average RE from 9 kHz to 90 kHz - Perpendicular .....	39
Figure 33: Average RE from 110 kHz to 490 kHz - Perpendicular .....	40
Figure 34: Peak RE from 9 kHz to 30MHz - Perpendicular .....	40
Figure 35: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	40
Figure 36: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	41
Figure 37: Peak RE from 30MHz to 1GHz - Vertical polarization .....	41
Figure 38: Average RE from 1GHz to 18GHz - Horizontal polarization .....	42
Figure 39: Average RE from 1GHz to 18GHz - Vertical polarization .....	43
Figure 40: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	43
Figure 41: Peak RE from 1GHz to 18GHz - Vertical polarization .....	44
Figure 42: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	44
Figure 43: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	45
Figure 44: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	45
Figure 45: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	46
Figure 46: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	46
Figure 47: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	47
Figure 48: Peak RE from 26.5GHz to 40GHz - Horizontal polarization .....	47

---

---

Figure 49: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	48
Figure 50: Average RE from 9 kHz to 90 kHz - Parallel.....	48
Figure 51: Average RE from 110 kHz to 490 kHz - Parallel.....	49
Figure 52: Peak RE from 9 kHz to 30MHz - Parallel .....	49
Figure 53: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	49
Figure 54: Average RE from 9 kHz to 90 kHz - Perpendicular .....	50
Figure 55: Average RE from 110 kHz to 490 kHz - Perpendicular .....	50
Figure 56: Peak RE from 9 kHz to 30MHz - Perpendicular .....	51
Figure 57: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	51
Figure 58: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	52
Figure 59: Peak RE from 30MHz to 1GHz - Vertical polarization .....	52
Figure 60: Average RE from 1GHz to 18GHz - Horizontal polarization .....	53
Figure 61: Average RE from 1GHz to 18GHz - Vertical polarization .....	54
Figure 62: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	54
Figure 63: Peak RE from 1GHz to 18GHz - Vertical polarization .....	55
Figure 64: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	55
Figure 65: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	56
Figure 66: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	56
Figure 67: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	57
Figure 68: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	57
Figure 69: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	58
Figure 70: Peak RE from 26.5GHz to 40GHz - Horizontal polarization .....	58
Figure 71: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	59
Figure 72: Average RE from 9 kHz to 90 kHz - Parallel.....	59
Figure 73: Average RE from 110 kHz to 490 kHz - Parallel.....	60
Figure 74: Peak RE from 9 kHz to 30MHz - Parallel .....	60
Figure 75: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	60
Figure 76: Average RE from 9 kHz to 90 kHz - Perpendicular .....	61
Figure 77: Average RE from 110 kHz to 490 kHz - Perpendicular .....	61
Figure 78: Peak RE from 9 kHz to 30MHz - Perpendicular .....	62
Figure 79: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	62
Figure 80: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	63
Figure 81: Peak RE from 30MHz to 1GHz - Vertical polarization .....	63
Figure 82: Average RE from 1GHz to 18GHz - Horizontal polarization .....	64
Figure 83: Average RE from 1GHz to 18GHz - Vertical polarization .....	65
Figure 84: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	66
Figure 85: Peak RE from 1GHz to 18GHz - Vertical polarization .....	66
Figure 86: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	67
Figure 87: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	67
Figure 88: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	68
Figure 89: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	68
Figure 90: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	69
Figure 91: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	69
Figure 92: Peak RE from 26.5GHz to 40GHz - Horizontal polarization .....	70
Figure 93: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	70
Figure 94: Average RE from 9 kHz to 90 kHz - Parallel.....	71
Figure 95: Average RE from 110 kHz to 490 kHz - Parallel.....	71
Figure 96: Peak RE from 9 kHz to 30MHz - Parallel .....	72
Figure 97: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	72

---

---

Figure 98: Average RE from 9 kHz to 90 kHz - Perpendicular .....	72
Figure 99: Average RE from 110 kHz to 490 kHz - Perpendicular .....	73
Figure 100: Peak RE from 9 kHz to 30MHz - Perpendicular .....	73
Figure 101: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	73
Figure 102: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	74
Figure 103: Peak RE from 30MHz to 1GHz - Vertical polarization .....	74
Figure 104: Average RE from 1GHz to 18GHz - Horizontal polarization .....	75
Figure 105: Average RE from 1GHz to 18GHz - Vertical polarization .....	76
Figure 106: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	77
Figure 107: Peak RE from 1GHz to 18GHz - Vertical polarization .....	77
Figure 108: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	78
Figure 109: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	78
Figure 110: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	79
Figure 111: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	79
Figure 112: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	80
Figure 113: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	80
Figure 114: Peak RE from 26.5GHz to 40GHz - Horizontal polarization .....	81
Figure 115: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	81
Figure 116: Average RE from 9 kHz to 90 kHz - Parallel .....	82
Figure 117: Average RE from 110 kHz to 490 kHz - Parallel .....	82
Figure 118: Peak RE from 9 kHz to 30MHz - Parallel .....	83
Figure 119: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	83
Figure 120: Average RE from 9 kHz to 90 kHz - Perpendicular .....	83
Figure 121: Average RE from 110 kHz to 490 kHz - Perpendicular .....	84
Figure 122: Peak RE from 9 kHz to 30MHz-Perpendicular .....	84
Figure 123: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	84
Figure 124: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	85
Figure 125: Peak RE from 30MHz to 1GHz - Vertical polarization .....	85
Figure 126: Average RE from 1GHz to 18GHz - Horizontal polarization .....	86
Figure 127: Average RE from 1GHz to 18GHz - Vertical polarization .....	87
Figure 128: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	88
Figure 129: Peak RE from 1GHz to 18GHz - Vertical polarization .....	88
Figure 130: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	89
Figure 131: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	89
Figure 132: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	90
Figure 133: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	90
Figure 134: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	91
Figure 135: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	91
Figure 136: Peak RE from 26.5GHz to 40GHz - Horizontal polarization .....	92
Figure 137: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	92
Figure 138: Average RE from 9 kHz to 90 kHz - Parallel .....	93
Figure 139: Average RE from 110 kHz to 490 kHz - Parallel .....	93
Figure 140: Peak RE from 9 kHz to 30MHz - Parallel .....	94
Figure 141: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel .....	94
Figure 142: Average RE from 9 kHz to 90 kHz - Perpendicular .....	94
Figure 143: Average RE from 110 kHz to 490 kHz - Perpendicular .....	95
Figure 144: Peak RE from 9 kHz to 30MHz - Perpendicular .....	95
Figure 145: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular .....	95
Figure 146: Peak RE from 30MHz to 1GHz - Horizontal polarization .....	96

---

---

Figure 147: Peak RE from 30MHz to 1GHz - Vertical polarization .....	96
Figure 148: Average RE from 1GHz to 18GHz - Horizontal polarization .....	97
Figure 149: Average RE from 1GHz to 18GHz - Vertical polarization .....	98
Figure 150: Peak RE from 1GHz to 18GHz - Horizontal polarization .....	99
Figure 151: Peak RE from 1GHz to 18GHz - Vertical polarization .....	99
Figure 152: Average RE from 18GHz to 26.5GHz - Horizontal polarization .....	100
Figure 153: Average RE from 18GHz to 26.5GHz - Vertical polarization .....	100
Figure 154: Peak RE from 18GHz to 26.5GHz - Horizontal polarization .....	101
Figure 155: Peak RE from 18GHz to 26.5GHz - Vertical polarization .....	101
Figure 156: Average RE from 26.5GHz to 40GHz - Horizontal polarization .....	102
Figure 157: Average RE from 26.5GHz to 40GHz - Vertical polarization .....	102
Figure 158: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	103
Figure 159: Peak RE from 26.5GHz to 40GHz - Vertical polarization .....	103

## LIST OF TABLES

Table 1: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	18
Table 2: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	19
Table 3: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	21
Table 4: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	22
Table 5: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	24
Table 6: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	25
Table 7: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	27
Table 8: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	28
Table 9: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	30
Table 10: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	31
Table 11: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral .....	33
Table 12: Average table for CE from 150 kHz to 30MHz – Line & Neutral .....	34
Table 13: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	42
Table 14: Average table for RE from 1GHz to 18GHz .....	43
Table 15: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	53
Table 16: Final Average table for RE from 1GHz to 18GHz .....	54
Table 17: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	64
Table 18: Final Average table for RE from 1GHz to 18GHz .....	65
Table 19: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	75
Table 20: Average table for RE from 1GHz to 18GHz .....	76
Table 21: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	86
Table 22: Average table for RE from 1GHz to 18GHz .....	87
Table 23: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz .....	97
Table 24: Average table for RE from 1GHz to 18GHz .....	98

---

## 1 TEST REPORT SUMMARY

<b>Applicant</b>	Cambium Networks			
<b>Manufacturer</b>	Gemtek Electronics (ChangSHU) Co.			
<b>Equipment Under Test</b>	5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio			
<b>Model</b>	C058900P072A, C058900C072A, C058900P062A, C058900C062A			
<b>Serial number</b>	<b>Type of test</b>	<b>Serial no.</b>	<b>Wi-Fi MAC</b>	<b>Ethernet MAC</b>
	<b>Radiated</b>	AE50013161	000456F802FD	000456F802FC
	<b>Conducted</b>	AE50013121	000456F802AD	000456F802AC
<b>Date of Submission</b>	20 <sup>th</sup> Jan 2015			
<b>Date of Test</b>	20 <sup>th</sup> Jan 2015 to 27 <sup>th</sup> Apr 2015			
<b>Venue of Test</b>	Tarang Lab			

<b>Applicable Standard</b>	<b>FCC Section</b>	<b>RSS Rule part</b>	<b>Description</b>	<b>Results</b>
47 CFR Ch. I (10–13 Ed), Part 15, Subpart C; RSS-Gen, Issue 4, Nov 2014	§15.207	RSS-Gen, 8.8	Conducted Emission test	PASS
	§15.205, §15.209	RSS-Gen, 8.1, RSS-Gen, 7.1.2	Radiated Emissions test	PASS

**5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio** was tested by Tarang Lab as per the standards that are listed in the table above. Based on the observations during the test and interpretations by Tarang lab, results have been indicated. The test results produced in this report shall apply only to the above sample that have been tested under the specific conditions and modes of testing as described in the report. Other similar equipment may not necessarily reproduce same result due to production tolerances and measurement uncertainties. Any measurement uncertainties listed in this report are for information purpose only.

The results shall stand invalid, in case there are any modifications / additions / removals to the hardware or software or end use atmosphere to the product tested. This report shall not be modified or in any way revised unless it is expressly permitted and endorsed by Tarang lab, through a duly authorized representative. Particulars on Manufacturer / Supplier / Product configuration / performance criteria, given in this report, are based on the information given by the customer, along with test request. Tarang does not assume any responsibility for the correctness of such information for the above mentioned equipment under test.

Customer acknowledges that this is a test report and not a certificate to gain market access for the product. To gain market access, Customer needs appropriate clearance from the Government or authorized agency for the target market. For markets that allow self-declaration, customer needs to follow the procedure defined by the target market.

Prepared by	Reviewed by	Approved by
		
Arun Kumar Test Engineer	Harsha K Test Engineer	Rajneesh R Functional Head

## 2 GENERAL INFORMATION

### 2.1 TEST DETAILS

The tests documented in this report are performed according to the following standards:

- ANSI C63.4-2014
- 47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C
- RSS-Gen, Issue 4, Nov 2014

### 2.2 TEST FACILITY DETAILS

All the tests were carried out at Tarang – Product Qualification and Compliance Planet located at Wipro Limited, SJP2, Dodda Kanelli, Sarjapur road, Bangalore, Karnataka, India. 560035.

Following are the accreditation and listing details for Tarang.

Accreditation / Listing body	Registration / Company / Certificate Number
ISO 17025 Accreditation	Certificate Number :T-1533 and T-1534(NABL) <a href="http://www.nabl-india.org">http://www.nabl-india.org</a>
FCC (Federal Communications Commission)	Registration Number: 799247 <a href="http://www.fcc.gov/">http://www.fcc.gov/</a>
IC (Industry Canada)	Company Number: 9023A <a href="http://www.ic.gc.ca">http://www.ic.gc.ca</a>
TEC Approval	Certificate Number: TEC/MRA/CAB/IND-D/3 CAB Identification: IND003
DGAQA Approval	1415/F-15/DGAQA/Aircraft
CEMILAC approval	Certificate Number: F-07-22 Reference Number: CEMILAC/6042/TH-13/TC & S

### 2.3 MEASUREMENT UNCERTAINTY

The following measurement uncertainties are applicable to the relevant tests that are mentioned below:

Test performed	Measurement Uncertainty
Radiated Emission from 9 kHz to 30MHz at 3meter	± 3.968 dB
Radiated Emission from 30MHz to 1GHz at 3meter	± 5.173 dB
Radiated Emission from 1 GHz to 18 GHz at 3meter	± 4.112 dB
Radiated Emission from 18 GHz to 40 GHz at 3meter	± 4.878 dB
Conducted Emission from 150 kHz to 30MHz	± 2.194 dB

## 3 INSTRUMENTATION AND CALIBRATION

### 3.1 TEST AND MEASURING EQUIPMENT

The list of following measuring equipment used for this testing conforms to the applicable standards. Performance of all test and measuring equipment including any accessories are checked periodically to ensure accuracy.

### 3.2 EQUIPMENTS USED

Name of Equipment	Manufacturer	Model No	Serial No	Calibration Due
EMI Test Receiver	R&S	ESU8	100324	10 <sup>th</sup> Mar 2016
EMI Test Receiver	R&S	ESIB40	100306	07 <sup>th</sup> Oct 2015
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130334	25 <sup>th</sup> Jul 2015
Pre-Amplifier	SONOMA	310	270817	31 <sup>st</sup> May 2015
V-LISN	SME	NNLK 8128	8128-243	08 <sup>th</sup> Aug 2015
Pulse Limiter	Impuls-Bergrelzer	ESH3-Z2	101260	26 <sup>th</sup> Mar 2016
Double Ridged BB Horn	SME	BBHA 9120D	9120D 688	05 <sup>th</sup> Aug 2015
Broadband Horn Antenna	SME	BBHA 9170	9170 336	11 <sup>th</sup> Nov 2015
Preamplifier	TDK RF solutions	PA 02	100008	31 <sup>st</sup> May 2015
Preamplifier	TDK RF solutions	Preamp	2007331	10 <sup>th</sup> Nov 2015
Preamplifier	TDK RF solutions	Preamp	2007332	10 <sup>th</sup> Nov 2015
Active Loop Antenna	ETS Lindgren	6507	00104711	22 <sup>nd</sup> Apr 2015
Tunable Band reject/Notch filter	Wainwright Instruments GmbH	WTRCV8-5150-5850-40-160-50SSK	01	NA

## 4 PRODUCT INFORMATION

### 4.1 DESCRIPTION OF THE PRODUCT

EUT is a Point to point & Point to Multipoint Fixed outdoor Transceiver.

<b>Product Category / Type of Equipment</b>	TEL (Telecom)
<b>EUT Operating AC Voltage</b>	120V AC
<b>Max EUT AC Operating Current</b>	0.5A
<b>Max EUT AC Power Rating</b>	60W
<b>EUT Operating DC Voltage</b>	30V DC
<b>Max EUT DC Operating Current</b>	0.5A
<b>Max EUT DC Power Rating</b>	12W

### 4.2 SOFTWARE AND FIRMWARE DETAILS

The 5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio was configured with test software and configured to have the following settings during the course of testing:

- 40MHz modulation bandwidth
  - Rate - HT40,
  - 54Mbps OFDM, MCS15 / 270 Mbps
  - Interframe spacing is tx99
  - Tx gain is 100 for Radiated Emissions & Conducted Emissions testing
- 5MHz modulation bandwidth
  - Rate – HT20,
  - 54Mbps OFDM, MCS15 / 130 Mbps
  - Interframe spacing is tx99
  - Tx gain is 100 for Radiated Emissions & Conducted Emissions testing

The unit was continuously monitored for transmission using an auxiliary antenna during the radiated tests.

### 4.3 LIST OF PRODUCT CABLES

Cable No.	Cable Name	Cable Length	Power / Interconnection cable	Shielded / Unshielded
Cable - 1	Cat. 5E_Ethernet cable	0.5 meter	Interconnection	Unshielded
Cable - 2	Cat. 5E_Ethernet cable	2 meter	Interconnection	Unshielded
Cable - 3	RF cable (50 Ω)	0.125 meter	Interconnection	Shielded
Cable - 4	Power Cord	0.8 meter	Power	Unshielded

## 5 TEST DETAILS

### 5.1 PRODUCT AND TEST SETUP

#### 5.1.1 PRODUCT CONFIGURATION

The EUT was powered through AC power supply (120V AC / 60Hz). The EUT was connected to Ethernet switch by using RJ45 cable. Figure 1 shows the product configuration during the tests. Following power supply module was used during the test to power ON the EUT.

Name of the Equipment	Manufacturer	Model Number	Serial Number
Switching Power Supply Gigabit Compatible	PHIHONG	PSA15M-300 (AP)	N000900L001A

During Radiated Emissions & Conducted Emissions test, RF ports of EUT were terminated using  $50\Omega$  terminations. And EUT was configured to radiate at highest operating power. During Radiated Emissions, a tunable Band reject filter offering an attenuation of approximately 40dB was used to attenuate the intentional band during the testing.

#### 5.1.2 TEST SETUP DETAILS

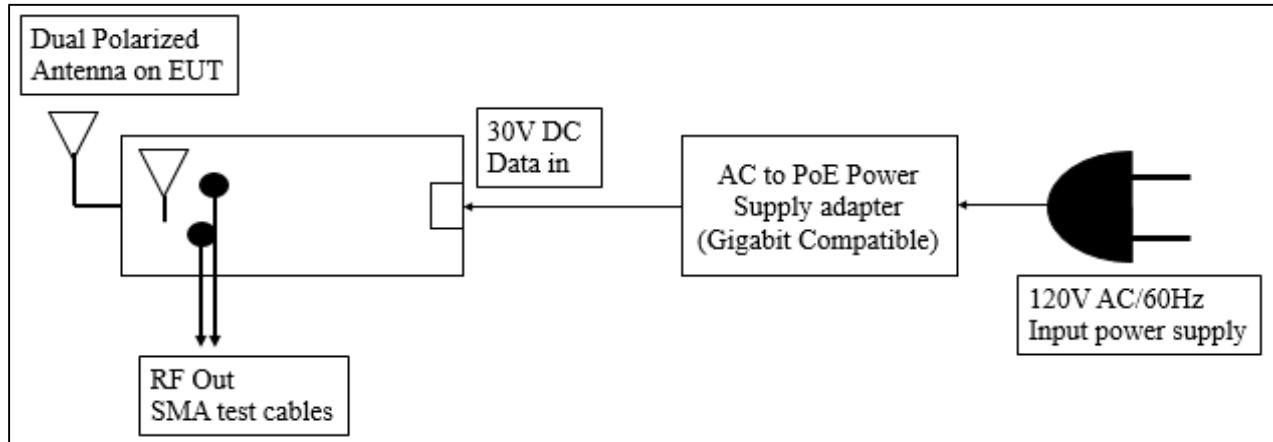


Figure 1: Block Diagram of the EUT test setup during the tests

#### 5.1.3 ACCESSORIES

Name of the Equipment	Manufacturer	Model Number	Serial Number
Laptop	Wipro Technologies Ltd	WLG7E1100	1221

---

## 5.2 APPLICABLE TESTS

Applicable Standard	Description	Test level / Test Voltage	Applicability
47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C;  RSS-Gen, Issue 4, Nov 2014	Conducted Emission test	150 kHz to 30MHz	Power lines
	Radiated Emissions test	9kHz to 40GHz	Enclosure

## 5.3 TEST RESULT

### 5.3.1 CONDUCTED EMISSION

#### 5.3.1.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014
<b>Test Procedure</b>	ANSI C63.4-2014
<b>Type of Cable (Shielded/Unshielded)</b>	Unshielded
<b>Frequency Range</b>	150 kHz to 30MHz
<b>Resolution Bandwidth</b>	9 kHz
<b>Video Bandwidth</b>	30 kHz
<b>Step size</b>	4 kHz
<b>Pre Scan Measurement Time</b>	20ms
<b>Final Measurement Time</b>	1 s
<b>Attenuation</b>	10 dB
<b>Detector</b>	Peak, Quasi peak and Average
<b>Input Voltage</b>	120V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	56.0 %
<b>Tested By</b>	Arun Kumar NC
<b>Test Date</b>	27 <sup>th</sup> Apr 2015

#### 5.3.1.2 LIMITS

##### 5.3.1.2.1 LIMITS FOR POWER LINES

Standard	Reference section	Frequency range	Quasi Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	§15.207 8.8	150 kHz to 500 kHz 500 kHz to 5 MHz 5 MHz to 30 MHz	66 to 56* 56 60	56 to 46* 46 50

Note: \* Decreases with the logarithm of the frequency

### 5.3.1.3 TEST SETUP

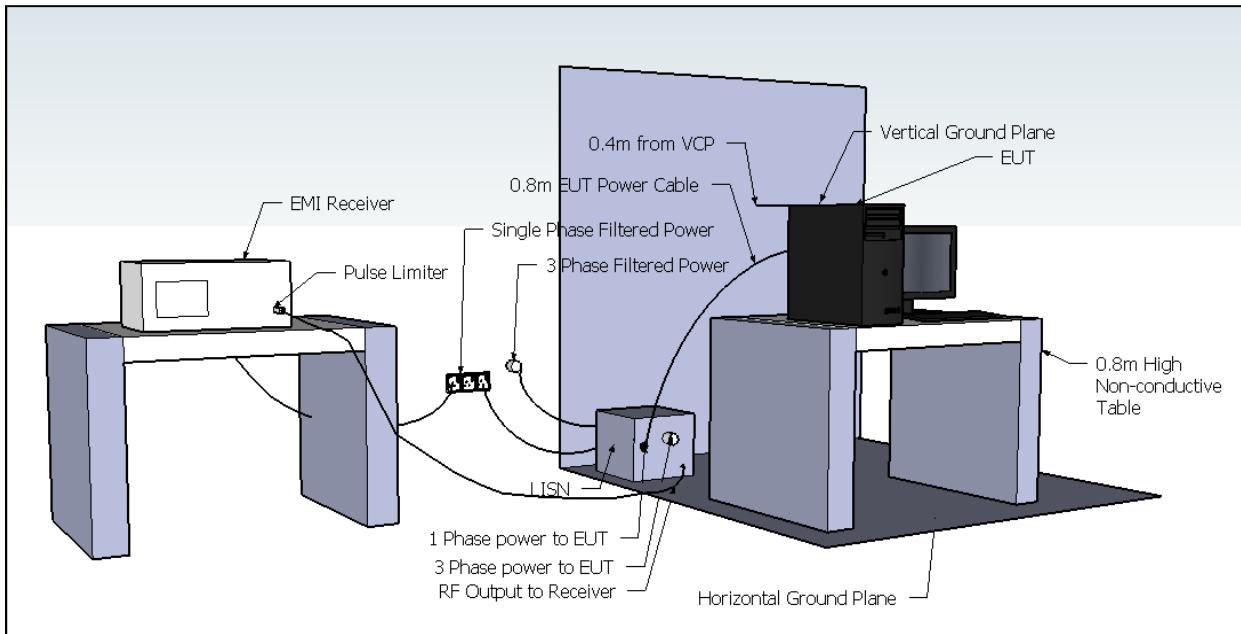


Figure 2: Typical test setup for conducted Emission test

### 5.3.1.4 TEST PROCEDURE

The test procedure is in accordance with ANSI C63.4-2014.

The Conducted Emission test was performed in the test site with a horizontal ground reference plane and a vertical ground reference plane bonded together. The EUT was placed on a 0.8m height non-metallic wooden table. The Power supply to the EUT was feed through a LISN ( $50\Omega/50\mu\text{H}$ ). The conducted emission measurement test system was configured through software as per standard. The EUT was powered through power adapter connected to LISN and getting charged by 120 V / 60Hz AC supply and made operational

---

### 5.3.1.5 RESULT (SUPPORTING GRAPHS / DATA) FOR 40 MHZ MODULATION BANDWIDTH

#### 5.3.1.5.1 LOW CHANNEL\_5750 MHZ

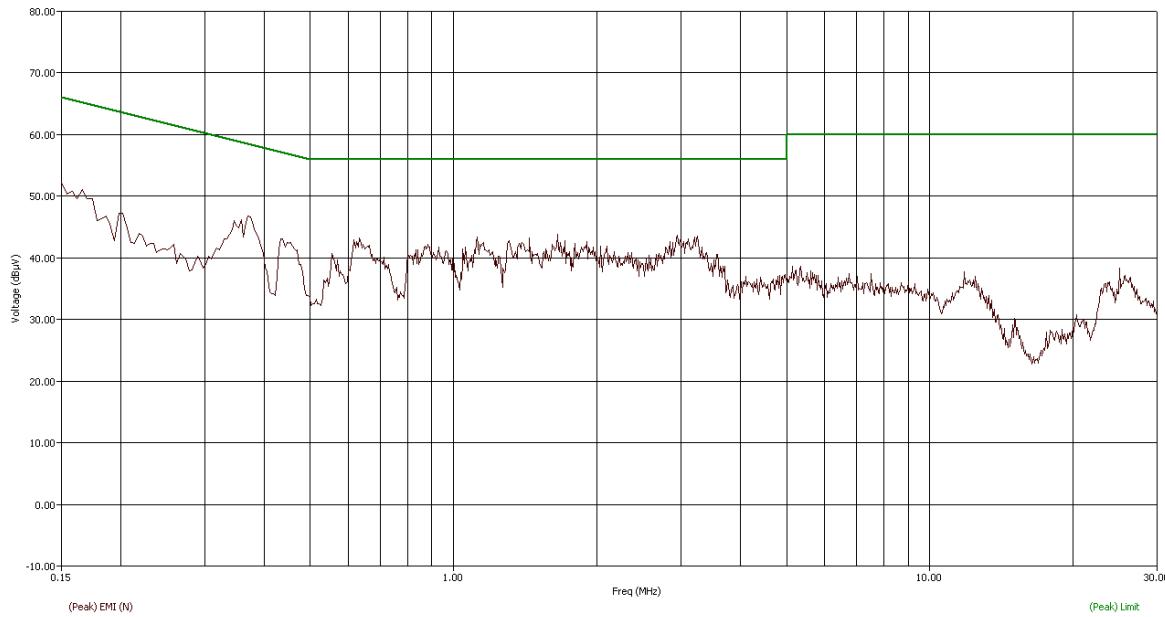


Figure 3: CE graph from 150 kHz to 30MHz using Peak detector - Neutral


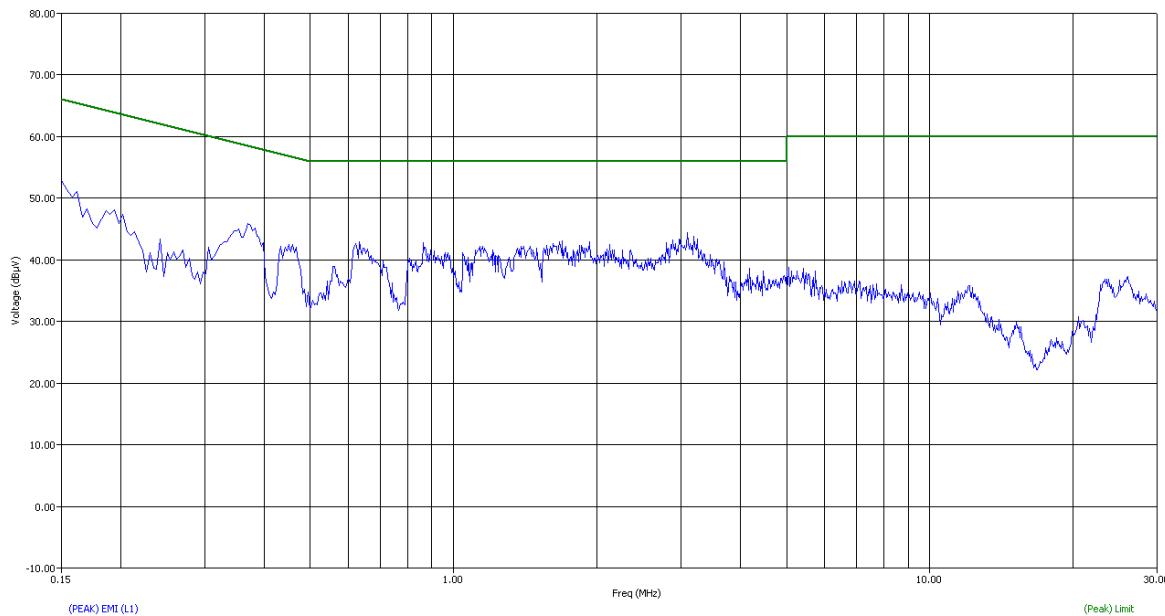



Figure 4: CE graph from 150 kHz to 30MHz using Peak detector - Line

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.150	0.151	N	33.57	10.11	0.10	0.00	43.78	65.96	-22.18
0.150	0.151	L1	33.68	10.11	0.00	0.07	43.85	65.93	-22.07
0.370	0.376	N	32.67	10.10	0.09	0.00	42.86	58.38	-15.52
0.370	0.371	L1	32.72	10.10	0.00	0.06	42.88	58.48	-15.60
0.434	0.443	N	28.72	10.10	0.09	0.00	38.91	57.01	-18.10
0.450	0.453	L1	27.94	10.10	0.00	0.06	38.10	56.82	-18.72
0.634	0.626	N	28.81	10.11	0.10	0.00	39.01	56.00	-16.99
0.634	0.642	L1	27.81	10.11	0.00	0.06	37.99	56.00	-18.01
0.862	0.867	L1	27.77	10.12	0.00	0.07	37.96	56.00	-18.04
1.118	1.124	N	28.37	10.12	0.10	0.00	36.59	56.00	-17.41
1.654	1.651	N	27.39	10.12	0.11	0.00	37.62	56.00	-18.38
2.942	2.949	N	27.17	10.11	0.13	0.00	37.41	56.00	-18.59
3.090	3.090	L1	27.30	10.11	0.00	0.10	37.51	56.00	-18.49
25.030	25.023	L1	17.69	10.52	0.00	0.37	28.58	60.00	-31.42

**Table 1: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral**

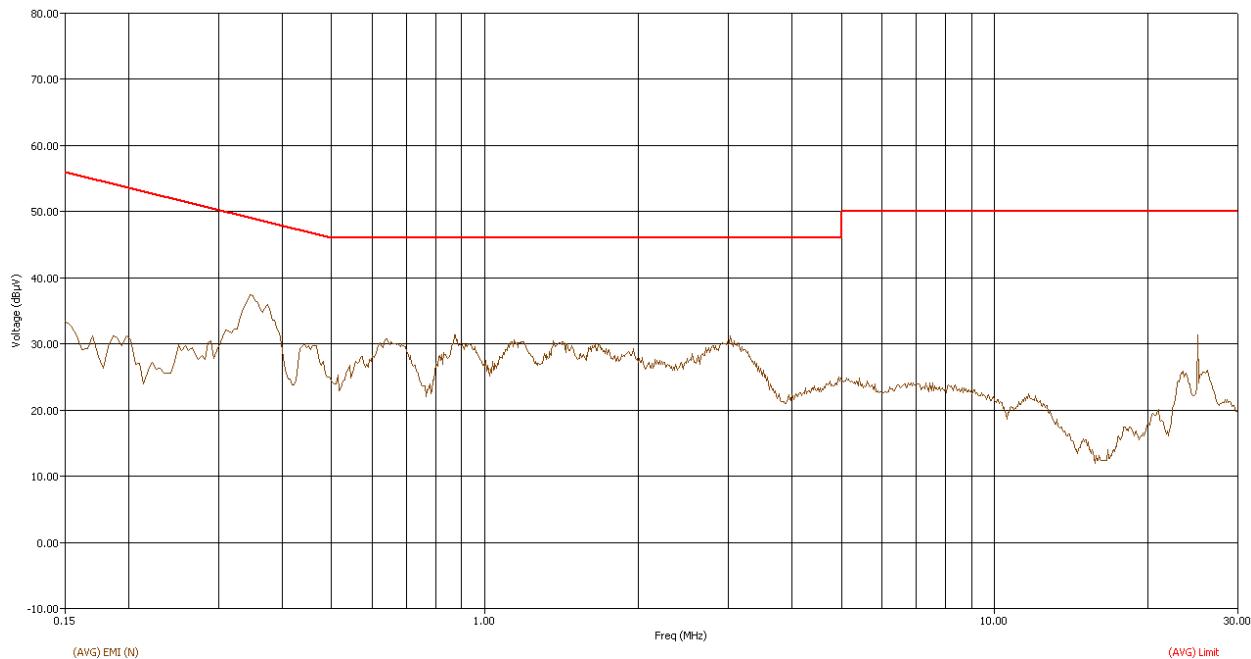

**Figure 5: CE graph from 150 kHz to 30MHz using Average detector - Neutral**

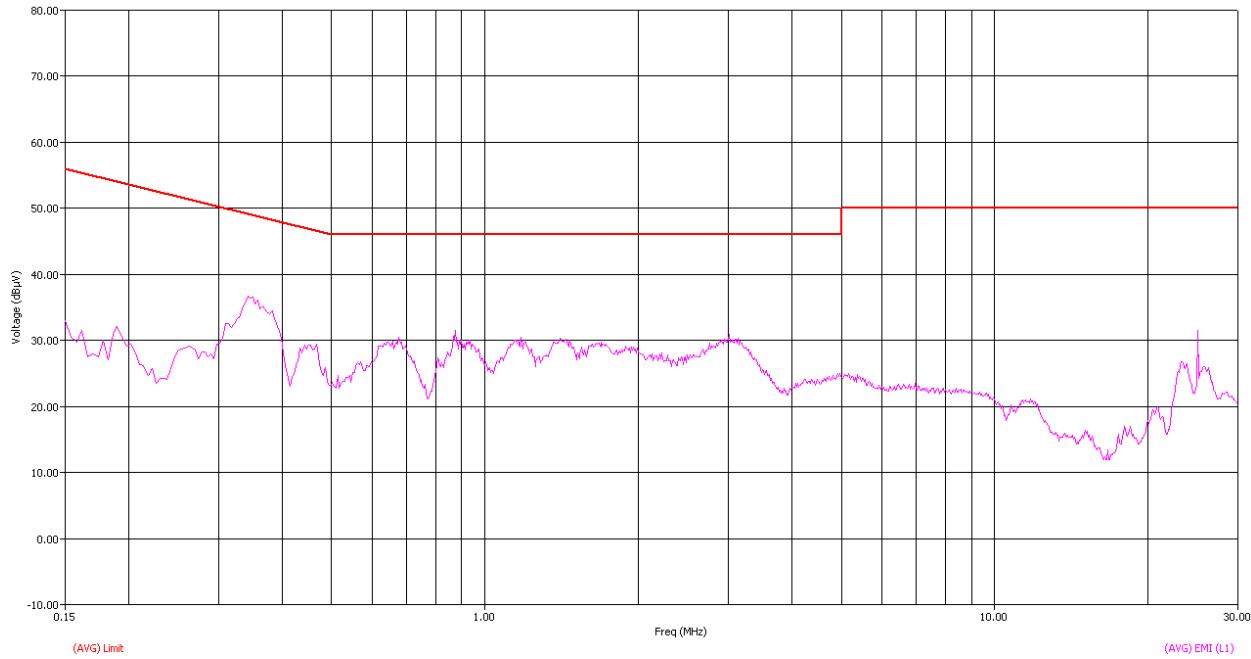

**Figure 6: CE graph from 150 kHz to 30MHz using Average detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dBμV)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dBμV)	(AVG) Limit (dBμV)	(AVG) Margin AVL (dB)
0.150	0.151	N	21.10	10.11	0.10	0.00	31.31	55.96	-24.65
0.150	0.151	L1	21.23	10.11	0.00	0.07	31.40	55.93	-24.52
0.370	0.376	N	24.77	10.10	0.09	0.00	34.97	48.38	-13.41
0.370	0.371	L1	24.32	10.10	0.00	0.06	34.48	48.48	-14.00
0.434	0.443	N	19.69	10.10	0.09	0.00	29.89	47.01	-17.12
0.450	0.453	L1	18.90	10.10	0.00	0.06	29.06	46.82	-17.76
0.634	0.626	N	19.91	10.11	0.10	0.00	30.11	46.00	-15.89
0.634	0.642	L1	19.31	10.11	0.00	0.06	29.48	46.00	-16.52
0.862	0.867	L1	19.56	10.12	0.00	0.07	29.75	46.00	-16.25
1.118	1.124	N	19.43	10.12	0.10	0.00	29.65	46.00	-16.35
1.654	1.651	N	18.45	10.12	0.11	0.00	28.68	46.00	-17.32
2.942	2.949	N	19.10	10.11	0.13	0.00	29.35	46.00	-16.65
3.090	3.090	L1	18.96	10.11	0.00	0.10	29.17	46.00	-16.83
25.030	25.023	L1	10.98	10.52	0.00	0.37	21.87	50.00	-28.13

**Table 2: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

### 5.3.1.5.2 MID CHANNEL\_5785 MHz

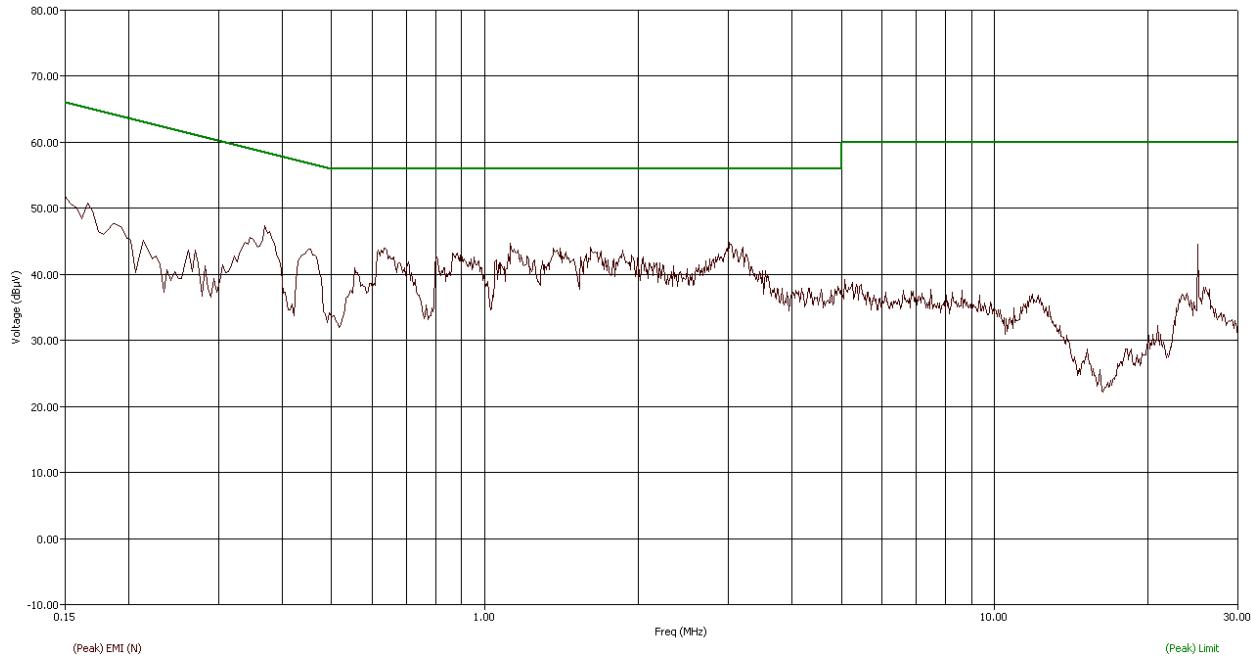


Figure 7: CE graph from 150 kHz to 30MHz using Peak detector - Neutral

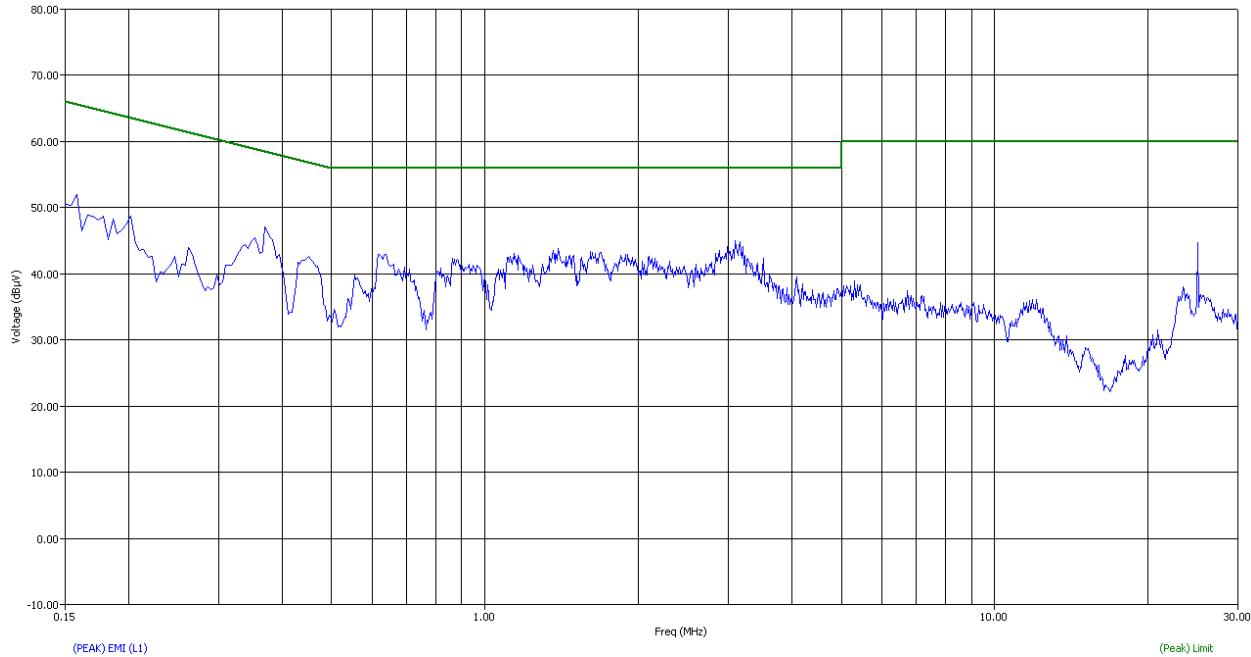


Figure 8: CE graph from 150 kHz to 30MHz using Peak detector - Line

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.150	0.156	N	33.24	10.11	0.10	0.00	43.45	65.68	-22.23
0.158	0.153	L1	33.29	10.11	0.00	0.07	43.47	65.86	-22.39
0.370	0.372	N	33.48	10.10	0.09	0.00	43.67	58.46	-14.79
0.370	0.370	L1	32.98	10.10	0.00	0.06	43.14	58.50	-15.36
0.450	0.455	L1	28.26	10.10	0.00	0.06	38.42	56.77	-18.36
0.454	0.452	N	28.97	10.10	0.10	0.00	39.17	56.84	-17.67
0.634	0.635	N	29.05	10.11	0.10	0.00	39.26	56.00	-16.74
0.638	0.632	L1	28.35	10.11	0.00	0.06	38.52	56.00	-17.48
0.882	0.885	N	28.25	10.12	0.10	0.00	38.46	56.00	-17.54
1.122	1.123	N	28.62	10.12	0.10	0.00	38.84	56.00	-17.16
3.010	3.014	N	27.70	10.11	0.13	0.00	37.94	56.00	-18.06
3.094	3.088	L1	27.41	10.11	0.00	0.10	37.62	56.00	-18.38
12.094	12.097	L1	17.31	10.26	0.00	0.23	27.80	60.00	-32.20
23.418	23.416	L1	20.68	10.48	0.00	0.36	31.52	60.00	-28.48
25.058	25.058	N	32.66	10.52	0.39	0.00	43.57	60.00	-16.43
25.058	25.059	L1	32.82	10.52	0.00	0.37	43.71	60.00	-16.29

Table 3: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral


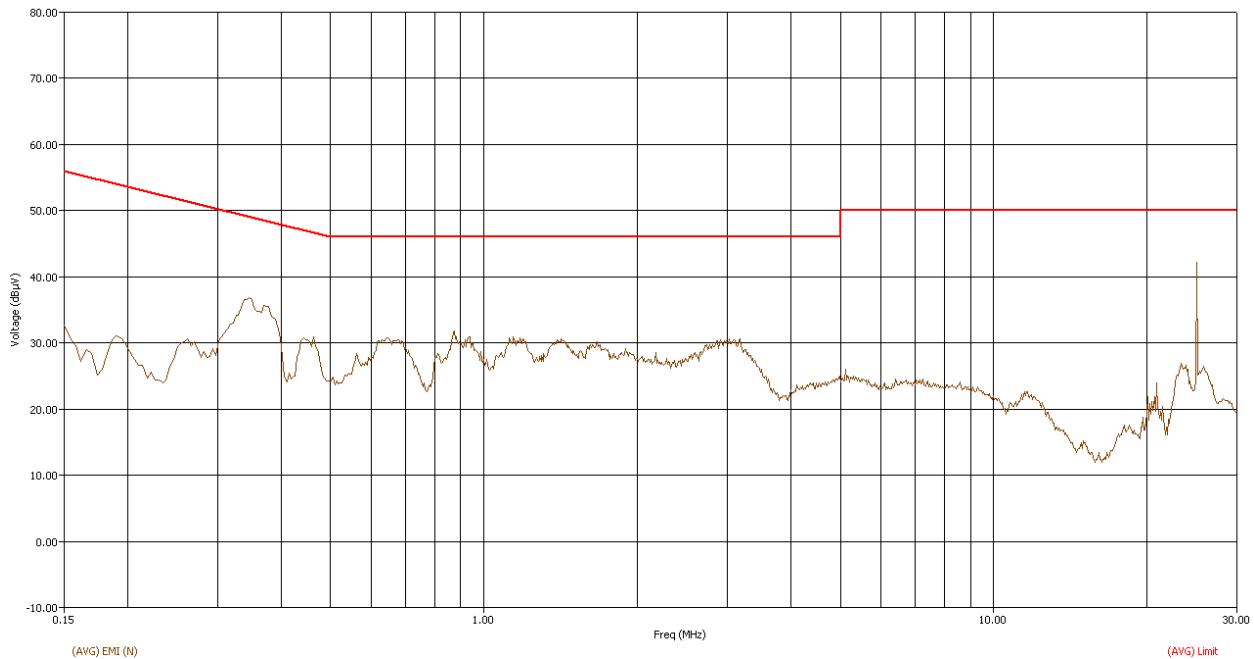


Figure 9: CE graph from 150 kHz to 30MHz using Average detector - Neutral

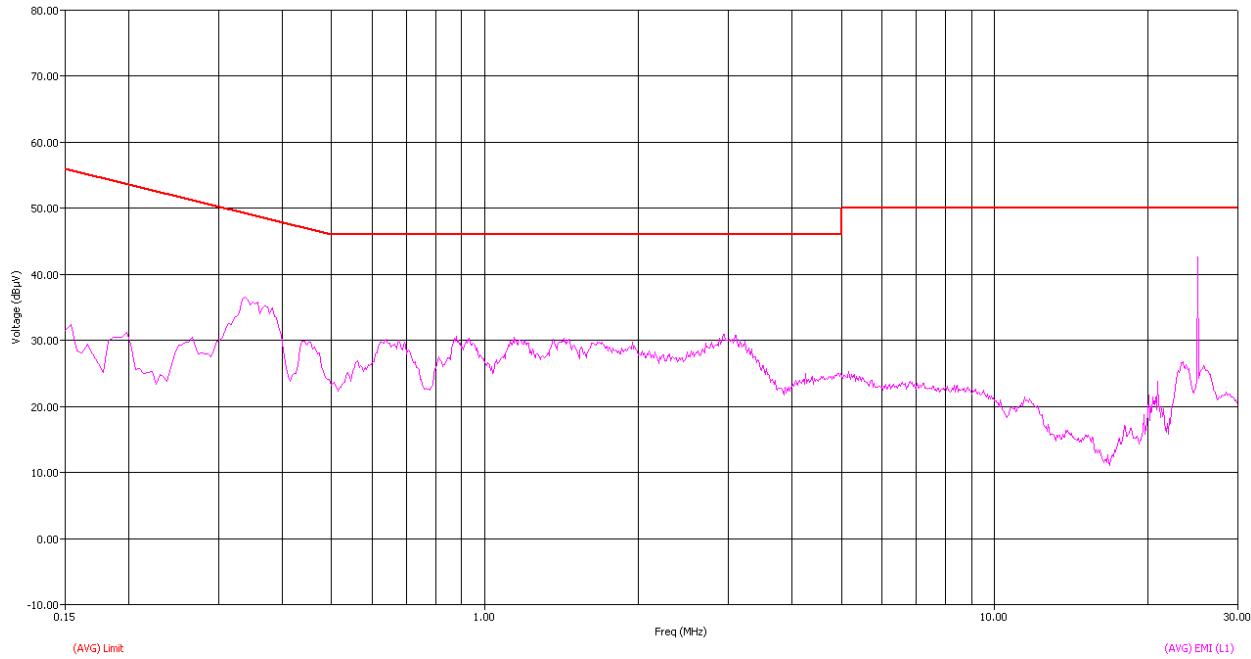


**Figure 10: CE graph from 150 kHz to 30MHz using Average detector - Line**


Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dB $\mu$ V)	(AVG) Limit (dB $\mu$ V)	(AVG) Margin AVL (dB)
0.150	0.156	N	18.88	10.11	0.10	0.00	29.09	55.68	-26.59
0.158	0.153	L1	20.42	10.11	0.00	0.07	30.59	55.86	-25.26
0.370	0.372	N	24.88	10.10	0.09	0.00	35.07	48.46	-13.39
0.370	0.370	L1	24.30	10.10	0.00	0.06	34.47	48.50	-14.03
0.450	0.455	L1	18.81	10.10	0.00	0.06	28.97	46.77	-17.80
0.454	0.452	N	19.74	10.10	0.10	0.00	29.93	46.84	-16.90
0.634	0.635	N	19.94	10.11	0.10	0.00	30.15	46.00	-15.85
0.638	0.632	L1	19.16	10.11	0.00	0.06	29.33	46.00	-16.67
0.882	0.885	N	19.71	10.12	0.10	0.00	29.92	46.00	-16.08
1.122	1.123	N	19.42	10.12	0.10	0.00	29.64	46.00	-16.36
3.010	3.014	N	19.15	10.11	0.13	0.00	29.39	46.00	-16.61
3.094	3.088	L1	18.93	10.11	0.00	0.10	29.14	46.00	-16.86
12.094	12.097	L1	7.30	10.26	0.00	0.23	17.78	50.00	-32.22
23.418	23.416	L1	14.70	10.48	0.00	0.36	25.54	50.00	-24.46
25.058	25.058	N	31.45	10.52	0.39	0.00	42.36	50.00	-7.64
25.058	25.059	L1	31.83	10.52	0.00	0.37	42.72	50.00	-7.28

**Table 4: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

### 5.3.1.5.3 HIGH CHANNEL\_5825 MHz

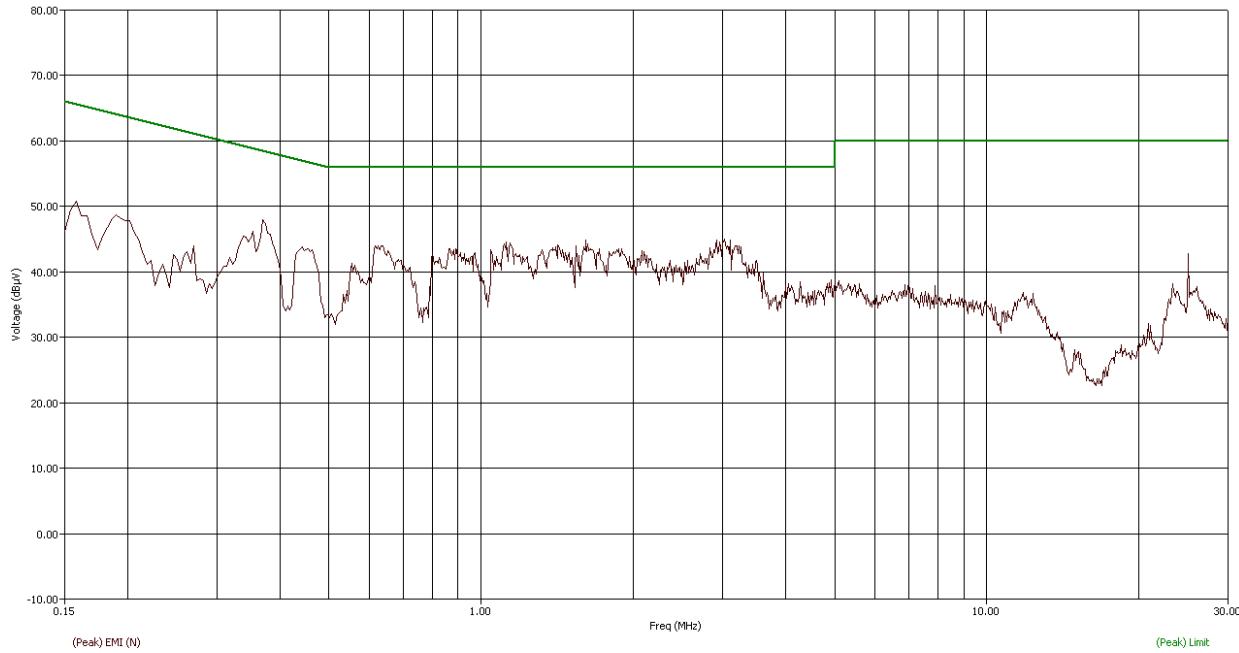


**Figure 11: CE graph from 150 kHz to 30MHz using Peak detector - Neutral**

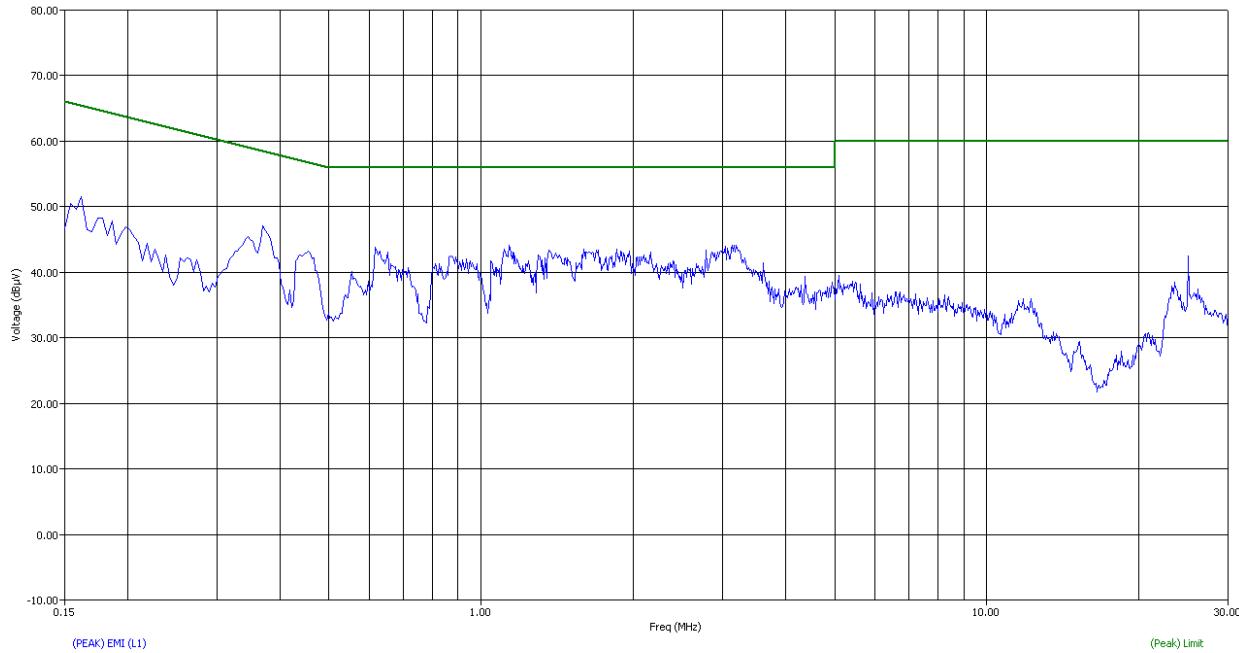


**Figure 12: CE graph from 150 kHz to 30MHz using Peak detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.158	0.150	N	33.43	10.11	0.10	0.00	43.64	65.98	-22.34
0.162	0.154	L1	33.20	10.11	0.00	0.07	43.38	65.76	-22.38
0.370	0.371	N	33.62	10.10	0.09	0.00	43.81	58.49	-14.67
0.370	0.369	L1	33.02	10.10	0.00	0.06	43.18	58.52	-15.33
0.442	0.448	N	29.17	10.10	0.10	0.00	39.36	56.90	-17.54
0.454	0.449	L1	28.65	10.10	0.00	0.06	38.81	56.90	-18.09
0.618	0.618	L1	28.72	10.11	0.00	0.06	38.89	56.00	-17.11
0.638	0.634	N	29.24	10.11	0.10	0.00	39.45	56.00	-16.55
0.874	0.874	L1	28.02	10.12	0.00	0.07	38.21	56.00	-17.79
0.890	0.862	N	28.36	10.12	0.10	0.00	38.58	56.00	-17.42
1.134	1.140	L1	28.36	10.12	0.00	0.07	38.55	56.00	-17.45
1.610	1.618	N	28.47	10.12	0.11	0.00	38.70	56.00	-17.30
3.030	3.035	N	27.78	10.11	0.13	0.00	38.02	56.00	-17.98
3.194	3.203	L1	27.06	10.11	0.00	0.10	37.28	56.00	-18.72
25.058	25.060	N	31.69	10.52	0.39	0.00	42.60	60.00	-17.40
25.058	25.059	L1	31.82	10.52	0.00	0.37	42.71	60.00	-17.29

**Table 5: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral**

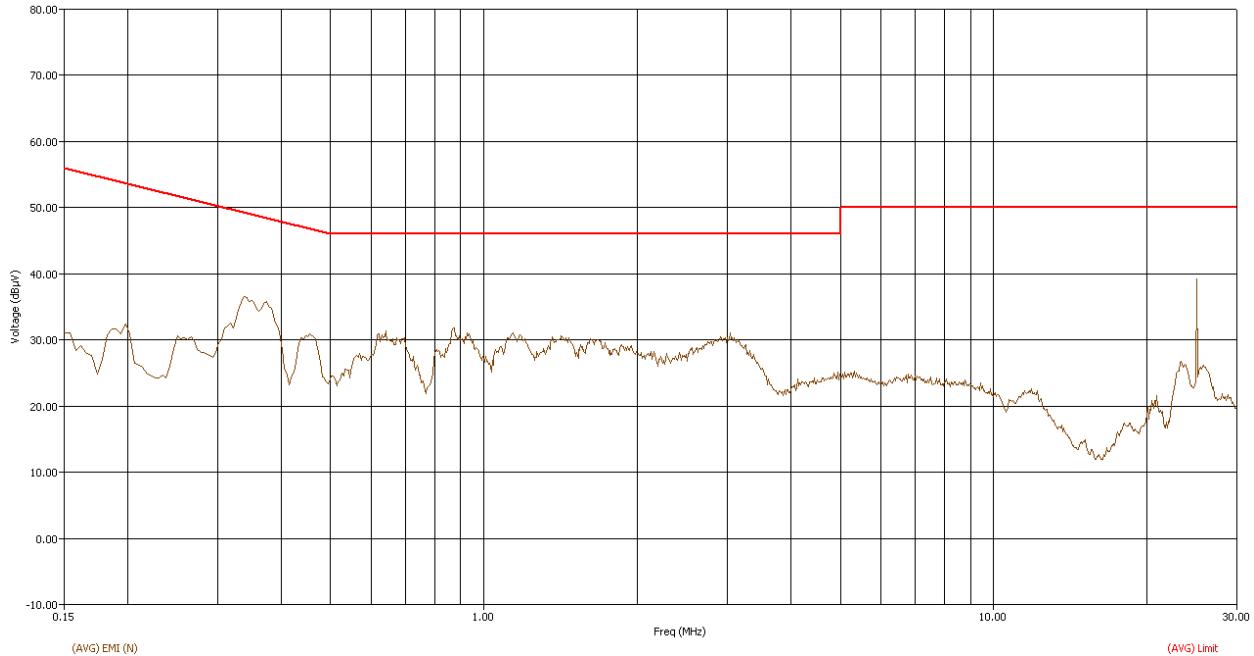

**Figure 13: CE graph from 150 kHz to 30MHz using Average detector - Neutral**

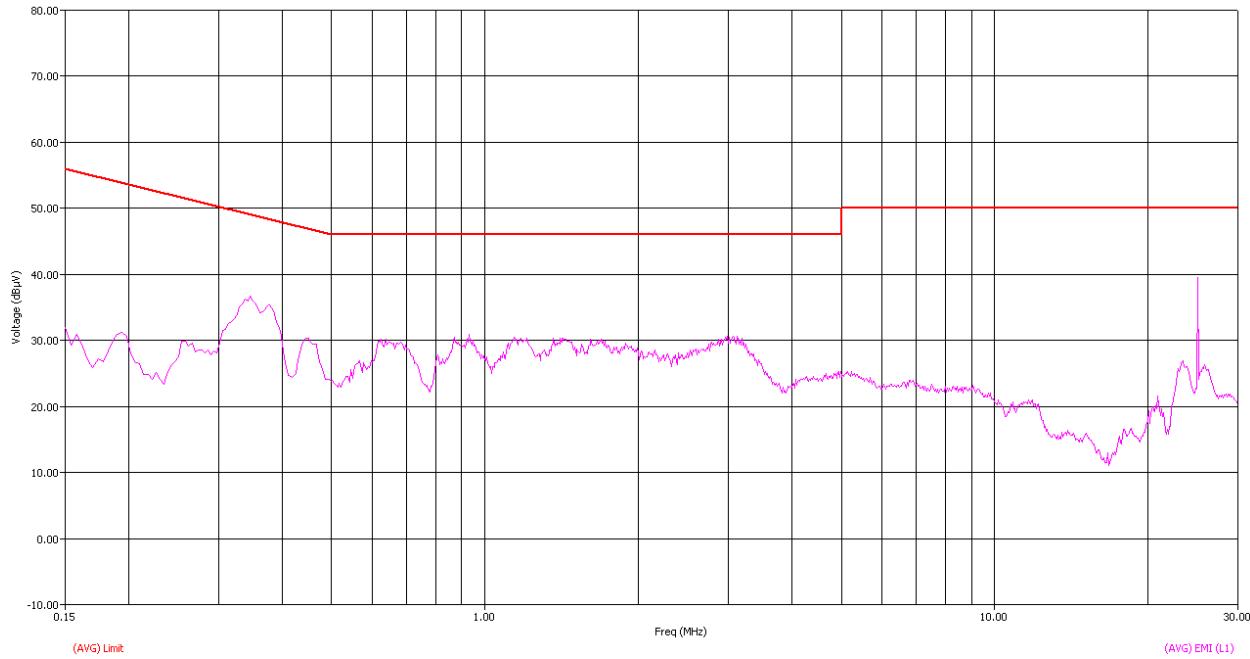

**Figure 14: CE graph from 150 kHz to 30MHz using Average detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dB $\mu$ V)	(AVG) Limit (dB $\mu$ V)	(AVG) Margin AVL (dB)
0.158	0.150	N	20.98	10.11	0.10	0.00	31.18	55.98	-24.80
0.162	0.154	L1	19.43	10.11	0.00	0.07	29.61	55.76	-26.15
0.370	0.371	N	24.89	10.10	0.09	0.00	35.09	48.49	-13.40
0.370	0.369	L1	24.36	10.10	0.00	0.06	34.52	48.52	-14.00
0.442	0.448	N	20.02	10.10	0.10	0.00	30.21	46.90	-16.69
0.454	0.449	L1	19.38	10.10	0.00	0.06	29.54	46.90	-17.36
0.618	0.618	L1	18.85	10.11	0.00	0.06	29.02	46.00	-16.98
0.638	0.634	N	20.02	10.11	0.10	0.00	30.22	46.00	-15.78
0.874	0.874	L1	19.77	10.12	0.00	0.07	29.95	46.00	-16.05
0.890	0.882	N	19.89	10.12	0.10	0.00	30.11	46.00	-15.89
1.134	1.140	L1	19.65	10.12	0.00	0.07	29.84	46.00	-16.16
1.610	1.618	N	18.93	10.12	0.11	0.00	29.16	46.00	-16.84
3.030	3.035	N	19.23	10.11	0.13	0.00	29.48	46.00	-16.52
3.194	3.203	L1	18.23	10.11	0.00	0.10	28.45	46.00	-17.55
25.058	25.060	N	30.45	10.52	0.39	0.00	41.36	50.00	-8.64
25.058	25.059	L1	30.91	10.52	0.00	0.37	41.80	50.00	-8.20

**Table 6: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

---

### 5.3.1.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 5 MHZ MODULATION BANDWIDTH

#### 5.3.1.6.1 LOW CHANNEL\_5735 MHZ

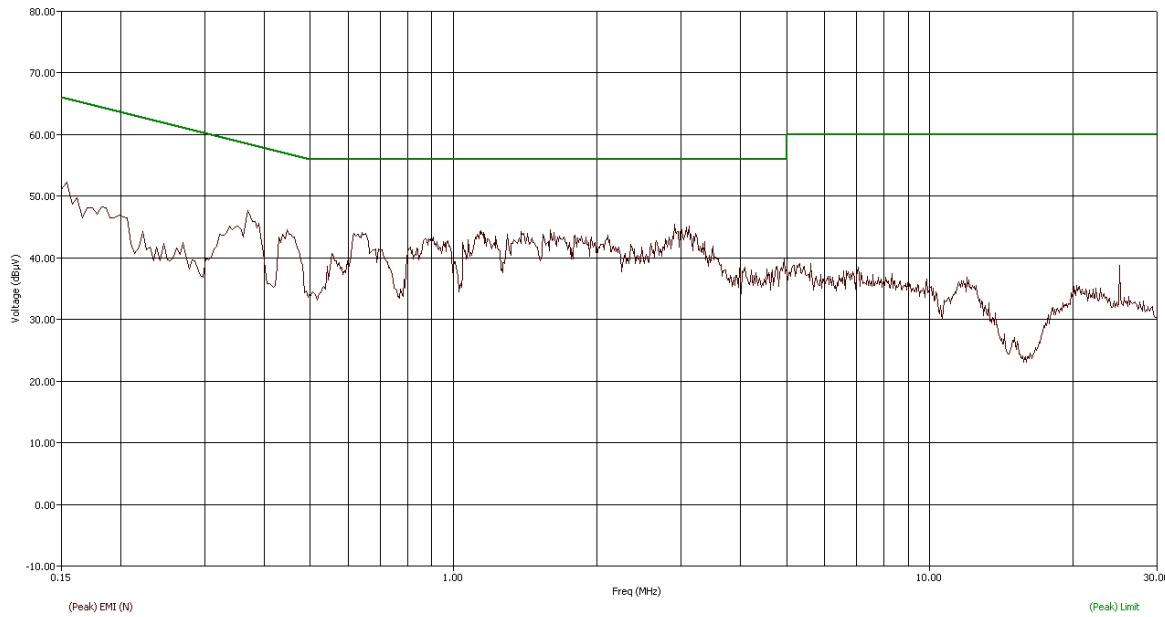


Figure 15: CE graph from 150 kHz to 30MHz using Peak detector - Neutral

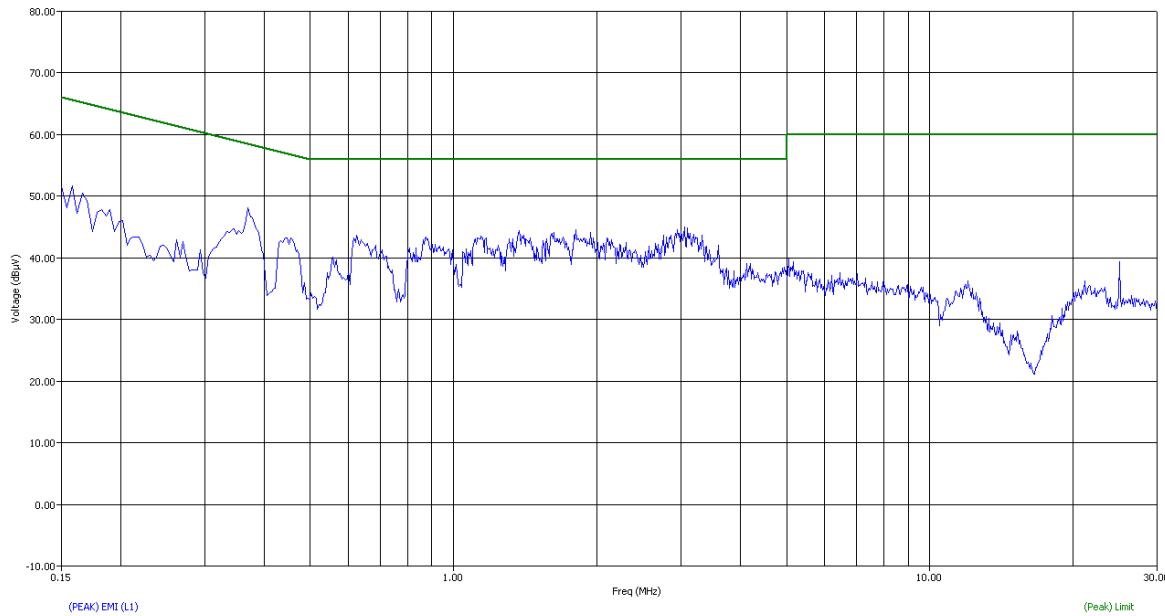


Figure 16: CE graph from 150 kHz to 30MHz using Peak detector - Line

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.154	0.151	N	33.41	10.11	0.10	0.00	43.62	65.96	-22.34
0.158	0.156	L1	33.20	10.11	0.00	0.07	43.37	65.68	-22.31
0.370	0.370	N	33.70	10.10	0.09	0.00	43.89	58.49	-14.60
0.370	0.370	L1	33.17	10.10	0.00	0.06	43.33	58.51	-15.18
0.442	0.444	L1	29.15	10.10	0.00	0.06	39.31	56.98	-17.68
0.446	0.452	N	29.38	10.10	0.10	0.00	39.57	56.84	-17.27
0.626	0.625	L1	29.11	10.11	0.00	0.06	39.28	56.00	-16.72
0.642	0.634	N	29.61	10.11	0.10	0.00	39.82	56.00	-16.18
0.874	0.866	L1	28.60	10.12	0.00	0.07	38.79	56.00	-17.21
0.906	0.900	N	27.99	10.12	0.10	0.00	38.21	56.00	-17.79
1.806	1.810	L1	26.97	10.12	0.00	0.09	37.17	56.00	-18.83
2.914	2.916	N	28.27	10.11	0.13	0.00	38.52	56.00	-17.48
3.058	3.058	L1	27.52	10.11	0.00	0.10	37.73	56.00	-18.27
4.946	4.938	N	21.31	10.11	0.16	0.00	31.58	56.00	-24.42
25.030	25.027	N	15.21	10.52	0.39	0.00	26.12	60.00	-33.88
25.030	25.031	L1	14.67	10.52	0.00	0.37	25.56	60.00	-34.44

Table 7: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral


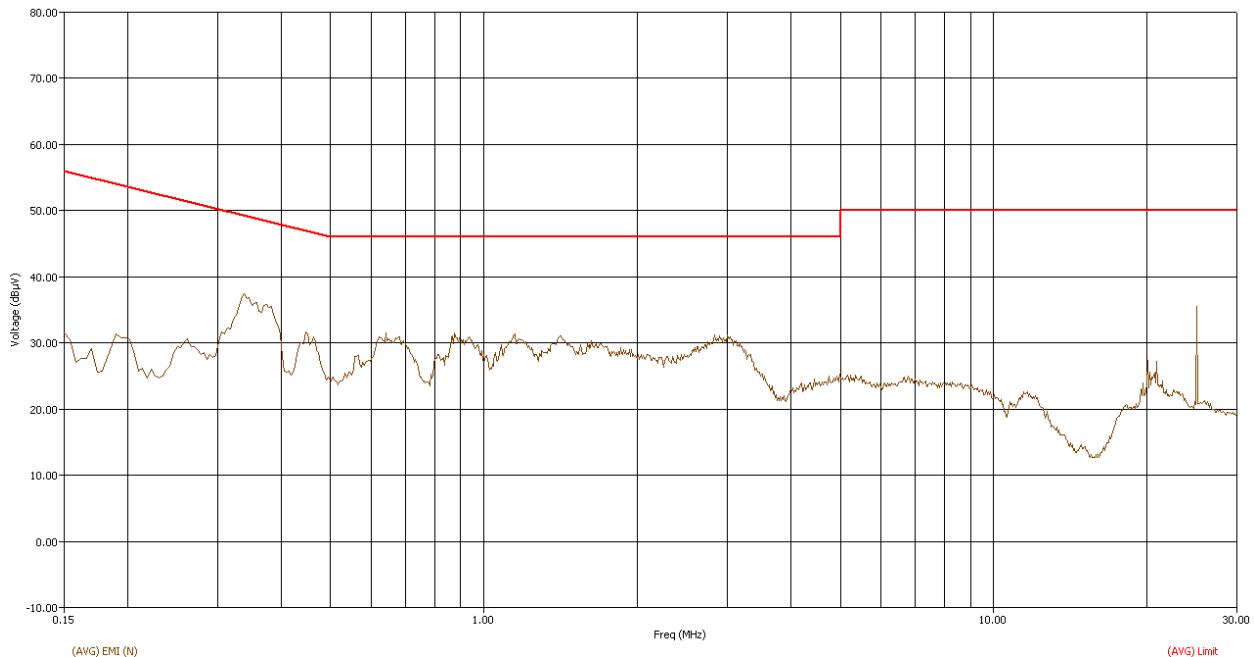


Figure 17: CE graph from 150 kHz to 30MHz using Average detector - Neutral

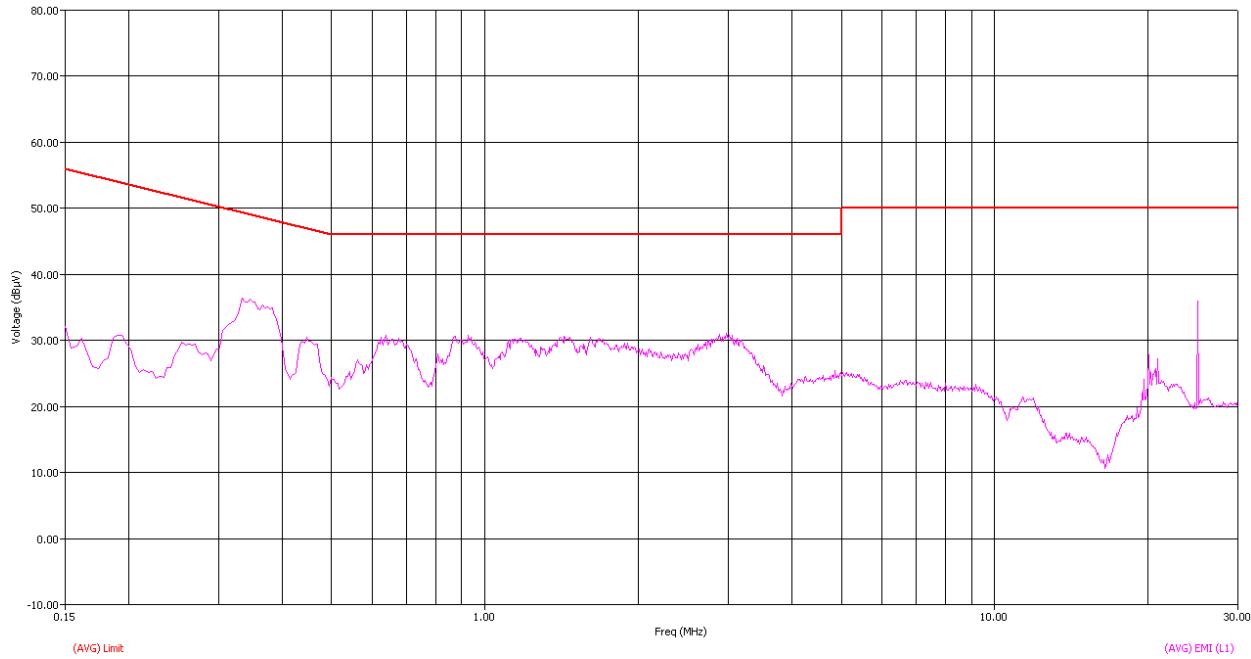

**Figure 18: CE graph from 150 kHz to 30MHz using Average detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dB $\mu$ V)	(AVG) Limit (dB $\mu$ V)	(AVG) Margin AVL (dB)
0.154	0.151	N	20.68	10.11	0.10	0.00	30.89	55.96	-25.07
0.158	0.156	L1	18.55	10.11	0.00	0.07	28.72	55.66	-26.96
0.370	0.370	N	24.88	10.10	0.09	0.00	35.07	48.49	-13.42
0.370	0.370	L1	24.43	10.10	0.00	0.06	34.60	48.51	-13.91
0.442	0.444	L1	19.54	10.10	0.00	0.06	29.70	46.96	-17.28
0.446	0.452	N	20.03	10.10	0.10	0.00	30.22	46.84	-16.62
0.626	0.625	L1	19.53	10.11	0.00	0.06	29.70	46.00	-16.30
0.642	0.634	N	20.10	10.11	0.10	0.00	30.30	46.00	-15.70
0.874	0.866	L1	19.70	10.12	0.00	0.07	29.88	46.00	-16.12
0.906	0.900	N	19.78	10.12	0.10	0.00	29.99	46.00	-16.01
1.806	1.810	L1	18.19	10.12	0.00	0.09	28.39	46.00	-17.61
2.914	2.916	N	19.59	10.11	0.13	0.00	29.83	46.00	-16.17
3.058	3.058	L1	19.06	10.11	0.00	0.10	29.28	46.00	-16.72
4.946	4.938	N	13.24	10.11	0.16	0.00	23.50	46.00	-22.50
25.030	25.027	N	8.43	10.52	0.39	0.00	19.33	50.00	-30.67
25.030	25.031	L1	7.83	10.52	0.00	0.37	18.72	50.00	-31.28

**Table 8: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

### 5.3.1.6.2 MID CHANNEL\_5775 MHz

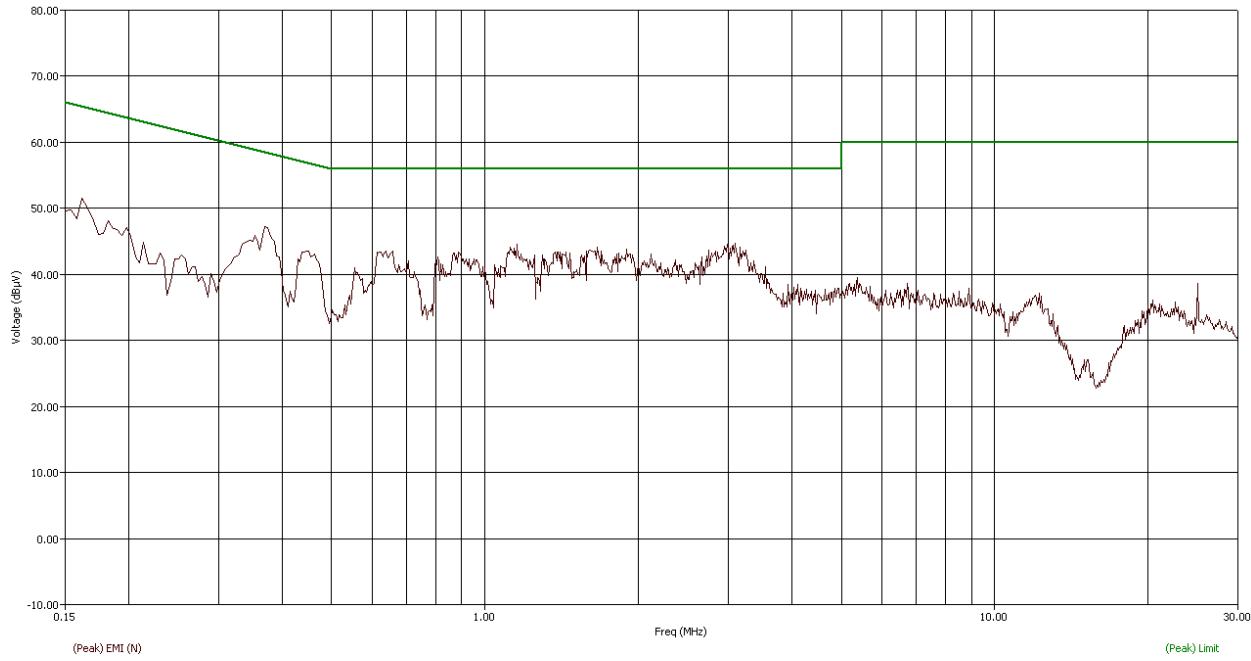


Figure 19: CE graph from 150 kHz to 30MHz using Peak detector - Neutral

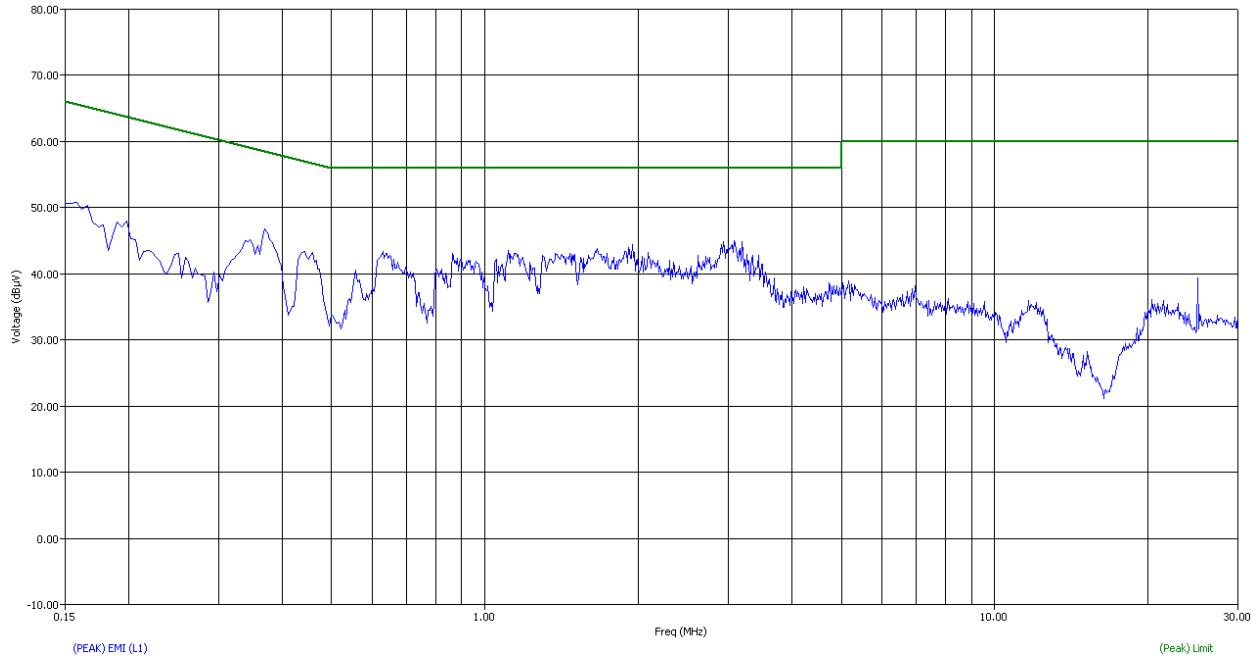


Figure 20: CE graph from 150 kHz to 30MHz using Peak detector - Line

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.158	0.152	L1	33.42	10.11	0.00	0.07	43.60	65.90	-22.30
0.370	0.370	N	33.47	10.10	0.09	0.00	43.66	58.50	-14.85
0.370	0.370	L1	32.92	10.10	0.00	0.06	43.08	58.51	-15.43
0.442	0.444	L1	28.69	10.10	0.00	0.06	38.85	56.99	-18.14
0.450	0.452	N	28.87	10.10	0.10	0.00	39.07	56.84	-17.77
0.630	0.623	L1	28.71	10.11	0.00	0.06	38.88	56.00	-17.12
0.658	0.651	N	28.55	10.11	0.10	0.00	38.75	56.00	-17.25
0.862	0.865	L1	28.10	10.12	0.00	0.07	38.29	56.00	-17.71
0.886	0.886	N	28.33	10.12	0.10	0.00	38.55	56.00	-17.45
1.154	1.148	N	28.74	10.12	0.10	0.00	38.96	56.00	-17.04
1.354	1.355	N	28.53	10.12	0.11	0.00	38.75	56.00	-17.25
1.946	1.942	L1	26.85	10.12	0.00	0.09	37.06	56.00	-18.94
3.082	3.087	L1	27.51	10.11	0.00	0.10	37.72	56.00	-18.28
3.090	3.096	N	27.61	10.11	0.13	0.00	37.85	56.00	-18.15
25.060	25.059	N	24.73	10.52	0.39	0.00	35.63	60.00	-24.37

Table 9: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral


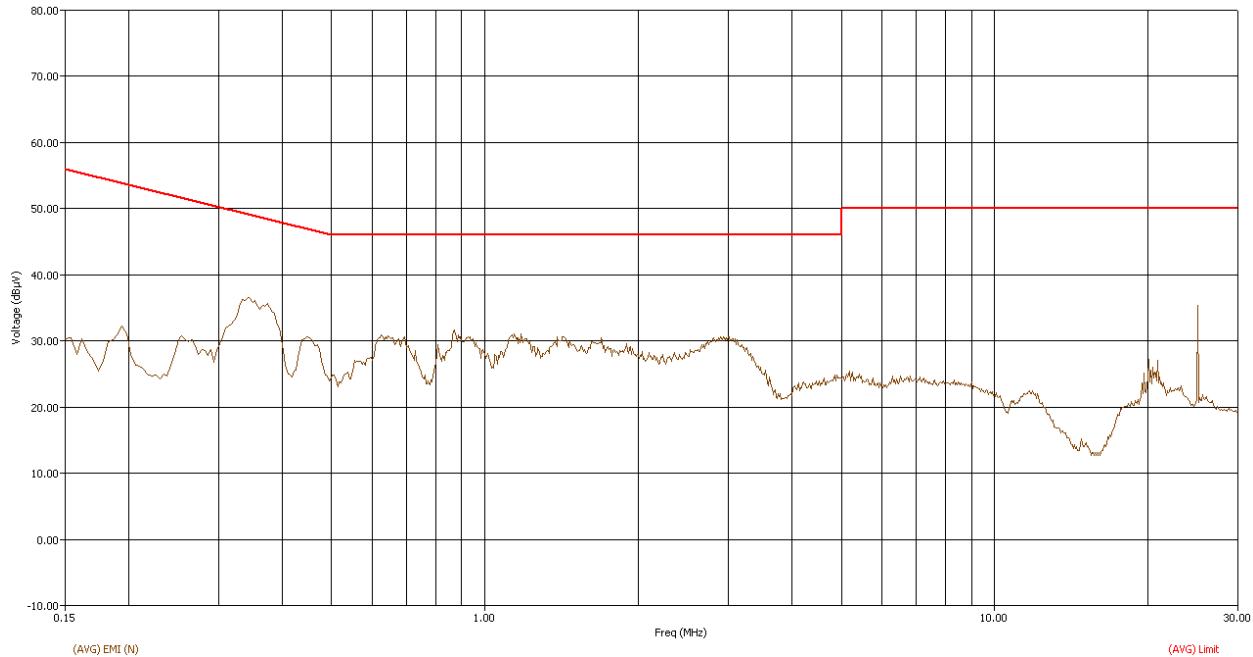


Figure 21: CE graph from 150 kHz to 30MHz using Average detector - Neutral

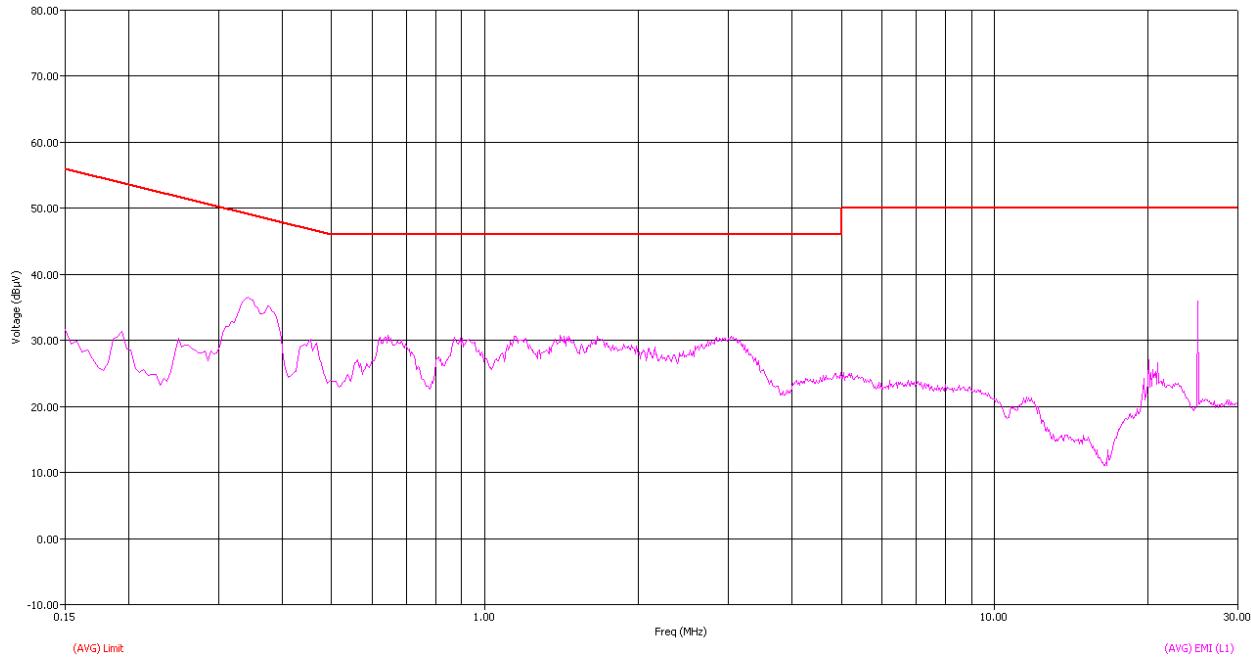

**Figure 22: CE graph from 150 kHz to 30MHz using Average detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dBμV)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dBμV)	(AVG) Limit (dBμV)	(AVG) Margin AVL (dB)
0.158	0.152	L1	20.70	10.11	0.00	0.07	30.87	55.90	-25.02
0.370	0.370	N	24.78	10.10	0.09	0.00	34.97	48.50	-13.54
0.370	0.370	L1	24.34	10.10	0.00	0.06	34.50	48.51	-14.01
0.442	0.444	L1	19.32	10.10	0.00	0.06	29.48	46.99	-17.51
0.450	0.452	N	19.74	10.10	0.10	0.00	29.94	46.84	-16.90
0.630	0.623	L1	19.30	10.11	0.00	0.06	29.47	46.00	-16.53
0.658	0.651	N	20.03	10.11	0.10	0.00	30.24	46.00	-15.76
0.862	0.865	L1	19.52	10.12	0.00	0.07	29.70	46.00	-16.30
0.886	0.886	N	19.86	10.12	0.10	0.00	30.08	46.00	-15.92
1.154	1.148	N	20.28	10.12	0.10	0.00	30.50	46.00	-15.50
1.354	1.355	N	19.08	10.12	0.11	0.00	29.31	46.00	-16.69
1.946	1.942	L1	18.04	10.12	0.00	0.09	28.25	46.00	-17.75
3.082	3.087	L1	18.93	10.11	0.00	0.10	29.14	46.00	-16.86
3.090	3.096	N	19.06	10.11	0.13	0.00	29.31	46.00	-16.69
25.060	25.059	N	22.59	10.52	0.39	0.00	33.49	50.00	-16.51

**Table 10: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

### 5.3.1.6.3 HIGH CHANNEL\_5840 MHz

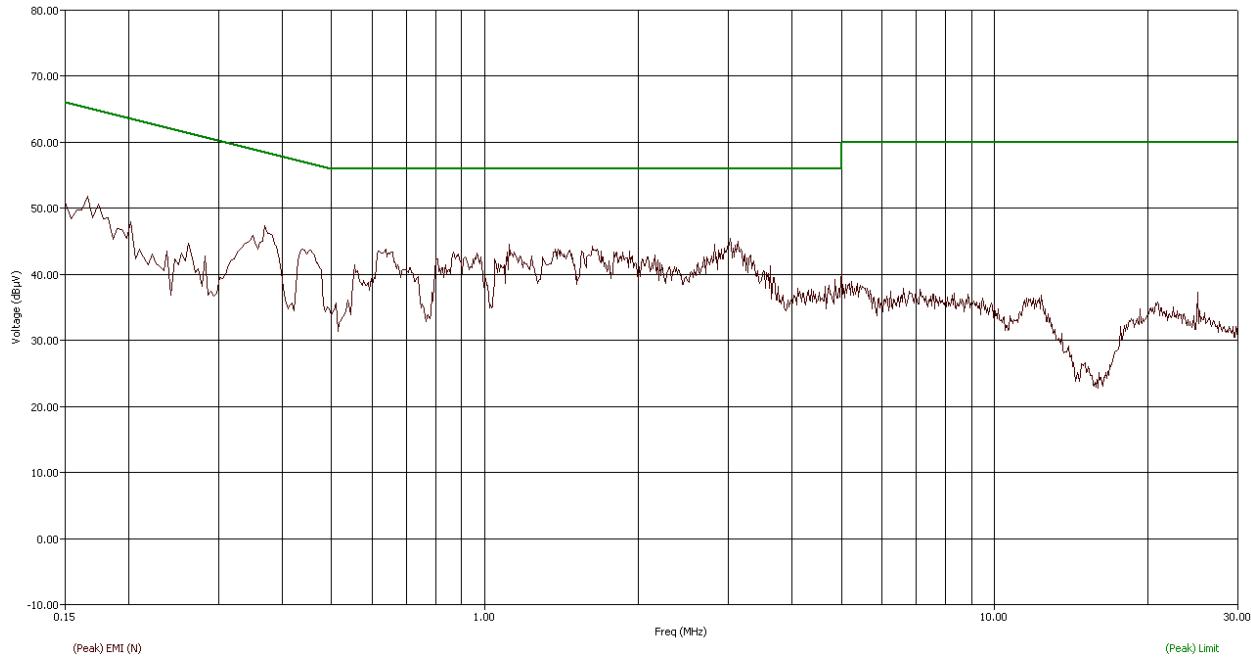


Figure 23: CE graph from 150 kHz to 30MHz using Peak detector - Neutral

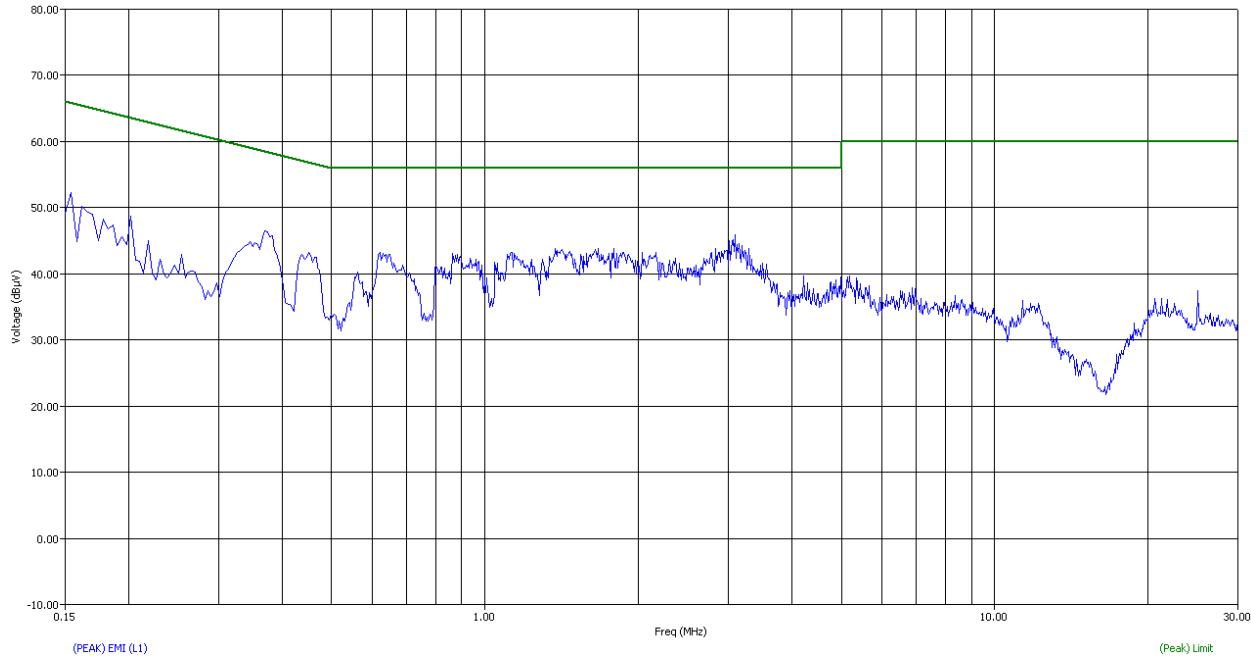


Figure 24: CE graph from 150 kHz to 30MHz using Peak detector - Line

Freq (MHz)	Freq (Max) (MHz)	Line	(QP) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(QP) EMI (dB $\mu$ V)	(QP) Limit (dB $\mu$ V)	(QP) Margin QPL (dB)
0.154	0.150	L1	33.38	10.11	0.00	0.07	43.56	65.99	-22.43
0.166	0.167	N	31.99	10.11	0.10	0.00	42.20	65.11	-22.91
0.370	0.369	N	33.34	10.10	0.09	0.00	43.53	58.52	-14.98
0.370	0.370	L1	33.05	10.10	0.00	0.06	43.21	58.50	-15.29
0.438	0.443	N	29.34	10.10	0.09	0.00	39.54	57.01	-17.47
0.450	0.445	L1	28.86	10.10	0.00	0.06	39.02	56.97	-17.95
0.622	0.615	L1	28.09	10.11	0.00	0.06	38.26	56.00	-17.74
0.638	0.633	N	29.26	10.11	0.10	0.00	39.47	56.00	-16.53
0.862	0.868	L1	28.21	10.12	0.00	0.07	38.40	56.00	-17.60
0.866	0.861	N	28.42	10.12	0.10	0.00	38.63	56.00	-17.37
1.114	1.116	N	28.83	10.12	0.10	0.00	39.05	56.00	-16.95
3.034	3.030	N	27.73	10.11	0.13	0.00	37.97	56.00	-18.03
3.098	3.092	L1	27.62	10.11	0.00	0.10	37.83	56.00	-18.17
4.222	4.219	L1	20.32	10.11	0.00	0.11	30.55	56.00	-25.45
25.030	25.029	N	15.15	10.52	0.39	0.00	26.06	60.00	-33.94
25.030	25.025	L1	14.69	10.52	0.00	0.37	25.58	60.00	-34.42

Table 11: Quasi peak table for CE from 150 kHz to 30MHz – Line & Neutral


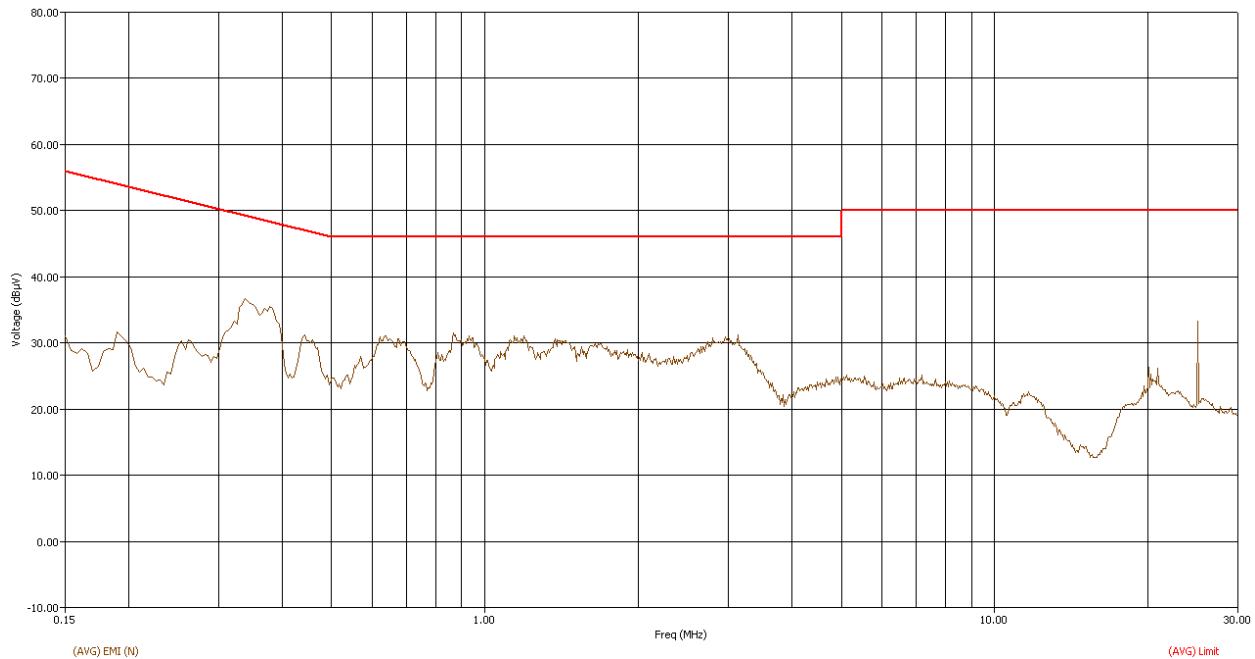


Figure 25: CE graph from 150 kHz to 30MHz using Average detector - Neutral

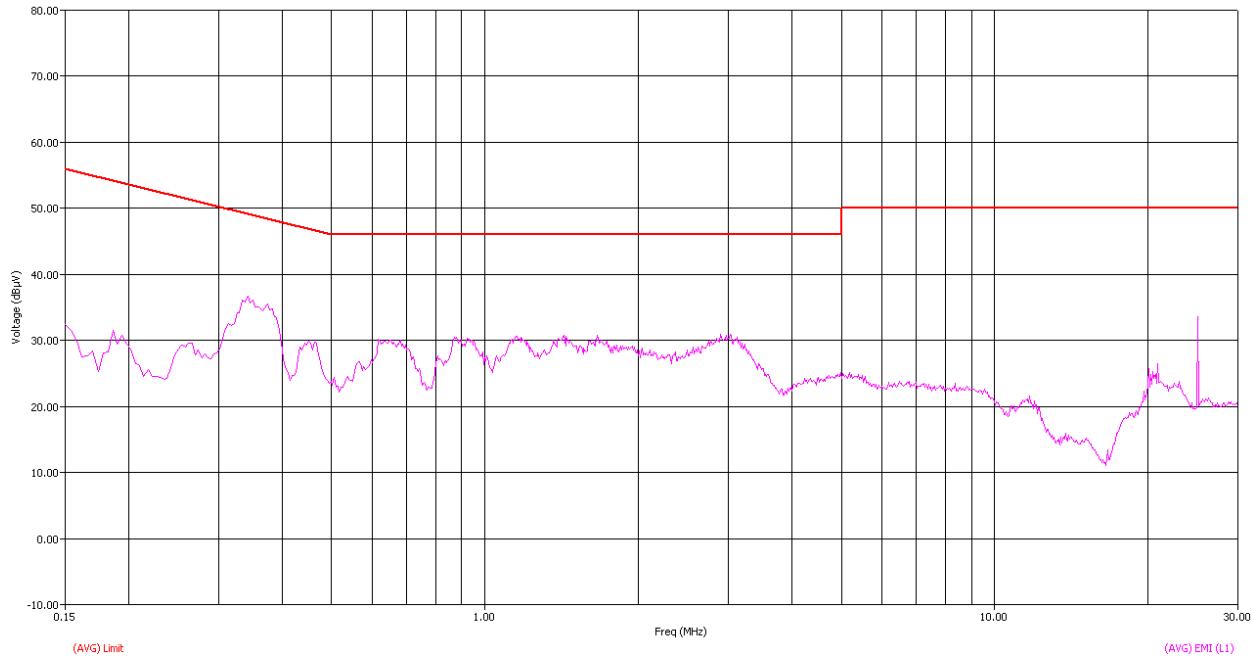

**Figure 26: CE graph from 150 kHz to 30MHz using Average detector - Line**

Freq (MHz)	Freq (Max) (MHz)	Line	(AVG) Trace (dB $\mu$ V)	Pulse Limiter+ Cable (dB)	Transducer N (dB)	Transducer L1 (dB)	(AVG) EMI (dB $\mu$ V)	(AVG) Limit (dB $\mu$ V)	(AVG) Margin AVL (dB)
0.154	0.150	L1	21.17	10.11	0.00	0.07	31.35	55.99	-24.64
0.166	0.167	N	17.00	10.11	0.10	0.00	27.20	55.11	-27.91
0.370	0.369	N	24.76	10.10	0.09	0.00	34.96	48.52	-13.56
0.370	0.370	L1	24.33	10.10	0.00	0.06	34.49	48.50	-14.01
0.438	0.443	N	19.91	10.10	0.09	0.00	30.11	47.01	-16.90
0.450	0.445	L1	19.39	10.10	0.00	0.06	29.55	46.97	-17.42
0.622	0.615	L1	18.33	10.11	0.00	0.06	28.50	46.00	-17.50
0.638	0.633	N	20.03	10.11	0.10	0.00	30.24	46.00	-15.76
0.862	0.866	L1	19.79	10.12	0.00	0.07	29.98	46.00	-16.02
0.866	0.861	N	19.53	10.12	0.10	0.00	29.74	46.00	-16.26
1.114	1.116	N	19.58	10.12	0.10	0.00	29.80	46.00	-16.20
3.034	3.030	N	19.35	10.11	0.13	0.00	29.59	46.00	-16.41
3.098	3.092	L1	18.96	10.11	0.00	0.10	29.17	46.00	-16.83
4.222	4.219	L1	12.51	10.11	0.00	0.11	22.74	46.00	-23.26
25.030	25.029	N	8.32	10.52	0.39	0.00	19.22	50.00	-30.78
25.030	25.025	L1	7.71	10.52	0.00	0.37	18.60	50.00	-31.40

**Table 12: Average table for CE from 150 kHz to 30MHz – Line & Neutral**

**Note:**

$(QP) EMI (dB\mu V) = (QP) Trace (dB\mu V) + \{Cable + Pulse limiter\} (dB) + Cable (dB)$

$QP Margin (dB) = (QP) EMI (dB\mu V) - (QP) Limit (dB\mu V)$

$(AVG) EMI (dB\mu V) = (AVG) Trace (dB\mu V) + \{Cable + Pulse limiter\} (dB) + Cable (dB)$

$AVG Margin (dB) = (AVG) EMI (dB\mu V) - (AVG) Limit (dB\mu V)$

### 5.3.1.7 RESULT

Conducted Emissions from the EUT are **within the** specified Limit line.

## 5.3.2 RADIATED EMISSION

### 5.3.2.1 TEST SPECIFICATION for 40 MHz Modulation Bandwidth

<b>Test Standard</b>	47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014						
<b>Test Procedure</b>	ANSI C63.4-2014						
<b>Frequency Range</b>	9 kHz to 150 kHz	150 kHz to 30 MHz	30 MHz to 1 GHz	1 GHz to 18 GHz	18 GHz to 26.5 GHz	26.5 GHz to 40 GHz	
<b>Resolution Bandwidth</b>	1 kHz	10 kHz	120 kHz	1MHz	1MHz	1MHz	
<b>Video Bandwidth</b>	3 kHz	30 kHz	300 kHz	3MHz	3MHz	3MHz	
<b>Step size</b>	400Hz	4 kHz	40 kHz	400 kHz	400 kHz	400 kHz	
<b>Pre Scan Measurement Time</b>	50ms	50ms	20ms	5ms	5ms	5ms	
<b>Final Measurement Time</b>	1 s	1 s	1 s	1 s	1 s	1 s	
<b>Attenuation</b>	10 dB	10 dB	10 dB	5 dB	5 dB	5 dB	
<b>Test Distance</b>	3 m	3 m	3 m	3 m	3 m	3 m	
<b>Polarization</b>	Parallel & Perpendicular		Horizontal and Vertical				
<b>Detector</b>	Quasi Peak and Peak			Peak & Average			
<b>Input Voltage</b>	120V AC						
<b>Input Frequency</b>	60Hz						
<b>Temperature</b>	21.0°C	21.0°C	22.0°C	22.0°C 22.9°C	22.9°C	23.0°C 22.0°C	21.0°C
<b>Humidity</b>	56.0%	56.0%	58.0%	54.0% 55.2%	55.2%	55.0% 54.0%	54.0%
<b>Tested By</b>	Arun / Harsha	Arun / Harsha	Arun / Harsha	Harsha / Venkatesha/ Subhendu	Arun / Venkatesha/ Subhendu	Subhendu / Suresh G.N/ Subhendu	Harsha / Subhendu
<b>Test Date</b>	21/01/2015	21/01/2015	20/01/2015	22/01/2015 23/01/2015 25/04/2015	24/01/2015 25/04/2015	27/01/2015 28/01/2015 25/04/2015	22/04/2015 25/04/2015

### 5.3.2.2 TEST SPECIFICATION for 5 MHz Modulation Bandwidth

<b>Test Standard</b>	47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014								
<b>Test Procedure</b>	ANSI C63.4-2014								
<b>Frequency Range</b>	9 kHz to 150 kHz	150 kHz to 30 MHz	30 MHz to 1 GHz	1 GHz to 18 GHz	18 GHz to 26.5 GHz	26.5 GHz to 40 GHz			
<b>Resolution Bandwidth</b>	1 kHz	10 kHz	120 kHz	1MHz	1MHz	1MHz			
<b>Video Bandwidth</b>	3 kHz	30 kHz	300 kHz	3MHz	3MHz	3MHz			
<b>Step size</b>	400Hz	4 kHz	40 kHz	400 kHz	400 kHz	400 kHz			
<b>Pre Scan Measurement Time</b>	50ms	50ms	20ms	5ms	5ms	5ms			
<b>Final Measurement Time</b>	1 s	1 s	1 s	1 s	1 s	1 s			
<b>Attenuation</b>	10 dB	10 dB	10 dB	5 dB	5 dB	5 dB			
<b>Test Distance</b>	3 m	3 m	3 m	3 m	3 m	3 m			
<b>Polarization</b>	Parallel & Perpendicular	Horizontal and Vertical							
<b>Detector</b>	Quasi Peak and Peak			Peak & Average					
<b>Input Voltage</b>	120V AC								
<b>Input Frequency</b>	60Hz								
<b>Temperature</b>	24.0 ° C	24.0 ° C	22.9 ° C	23.0 ° C	21.0°C				
<b>Humidity</b>	56.0 %	56.0 %	55.2 %	55.0 %	54.0%				
<b>Tested By</b>	Subhendu / Venkatesha	Subhendu / Venkatesha	Subhendu / Suresh G.N / Subhendu	Subhendu / Suresh G.N/ Subhendu	Harsha K/ Subhendu				
<b>Test Date</b>	01/02/2015	01/02/2015	29/01/2015, 30/01/2015, 26/04/2015	27/01/2015, 28/01/2015, 26/04/2015	22/04/2015, 26/04/2015				

### 5.3.2.3 LIMITS

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit (dB<math>\mu</math>V/m) at 3 meter</b>
47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C	§15.205, §15.209	9 kHz to 490 kHz 490 kHz to 1.705 MHz 1.705 MHz to 30 MHz	128.5194 to 93.8003* 73.8003 to 62.9697* 69.5429

Note: \* Decreases with the logarithm of the frequency

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit (dB<math>\mu</math>V/m) at 3 meter</b>
47 CFR Ch. I (10–1–13 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	§15.205, §15.209 7.1.2	30 MHz to 88 MHz 88 MHz to 216 MHz 216 MHz to 960 MHz 960 MHz to 40 GHz	39.54 43.52 46.02 53.98

#### 5.3.2.4 TEST SETUP

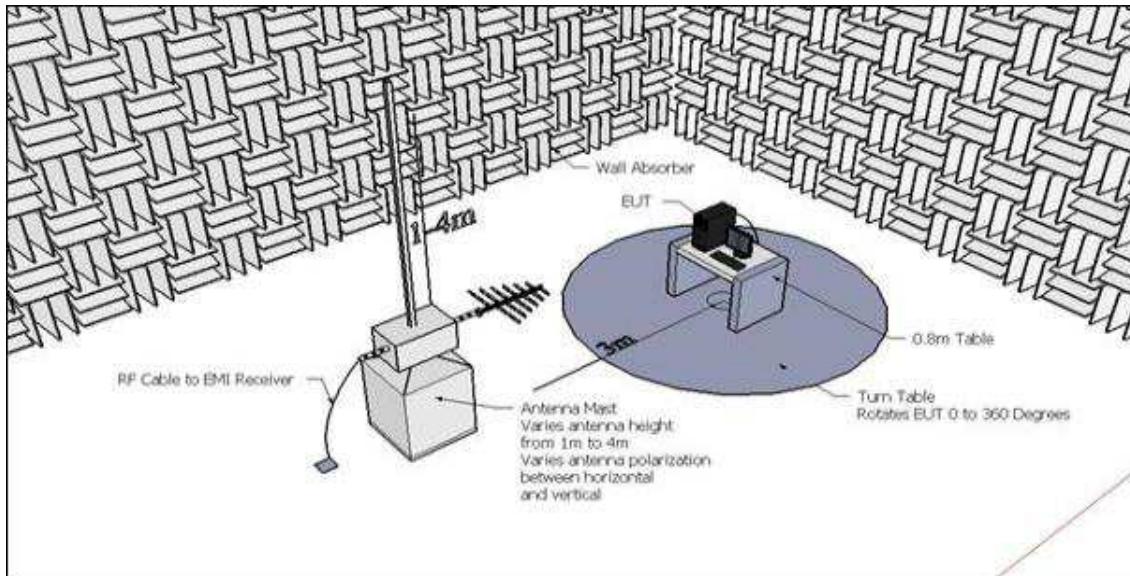


Figure 27: Typical test setup for Radiated Emission test

#### 5.3.2.5 TEST PROCEDURE

The test procedure is in accordance with ANSI C63.4-2014.

The Radiated Emission test was performed inside a Semi-Anechoic chamber. The EUT was placed on a 0.8m height non-metallic table as specified in the standard. The test setup was placed on a rotating turn table to enable 0 to 360 degree rotation.

The EUT was placed 3 meter away from the receiving antenna for the radiated emission measurement in the frequency range 9 kHz to 40 GHz. The receiving antenna was mounted on an antenna mast to enable height variation from 1 to 4 meter above the ground plane for the frequency range 30MHz to 1GHz & 1 to 2 meter for frequency range 1 GHz to 40 GHz. A tunable Band reject filter offering an attenuation of approximately 40dB was used to attenuate the intentional band during the testing.

The radiated emission measurement test system was configured through software as per standard. Pre-scan (Peak) was taken at different angles of EUT at 22.5 degree step, by rotating the turn table from 0 to 360 degree and by varying the antenna height from 1 to 4 meter in both vertical and horizontal polarization from 30 MHz to 1 GHz & 1 to 2 meter for 1 GHz to 40 GHz and in parallel & perpendicular orientation for 9 kHz to 30 MHz (using a loop antenna) with fixed height of 1 meter. The measurement was carried out in max hold mode and maximum amplitude of radiated emissions from the EUT was plotted in Graph. The predominant peaks at various frequencies, which are closer to limit line were identified using peak search option and listed. The Quasi-peak measurement was carried out for the listed frequencies and compared with the limit specified in standard. The average measurement was carried out for the listed frequency in the range of 1 GHz to 40 GHz.

---

### 5.3.2.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 40 MHZ MODULATION BANDWIDTH

#### 5.3.2.6.1 LOW CHANNEL\_5750MHz

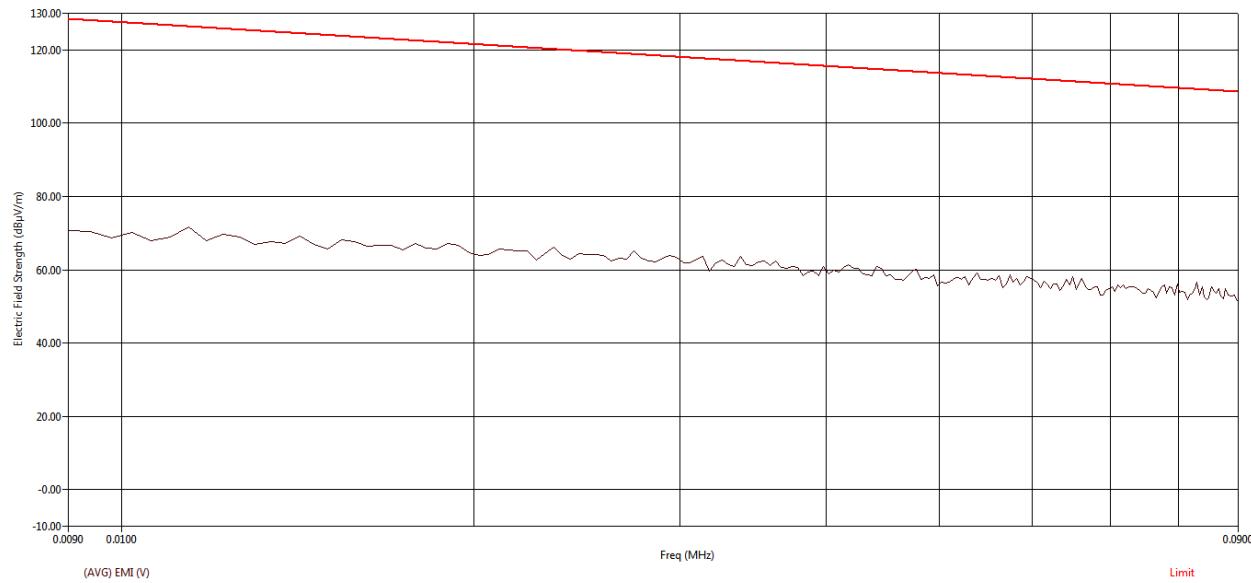


Figure 28: Average RE from 9 kHz to 90 kHz - Parallel

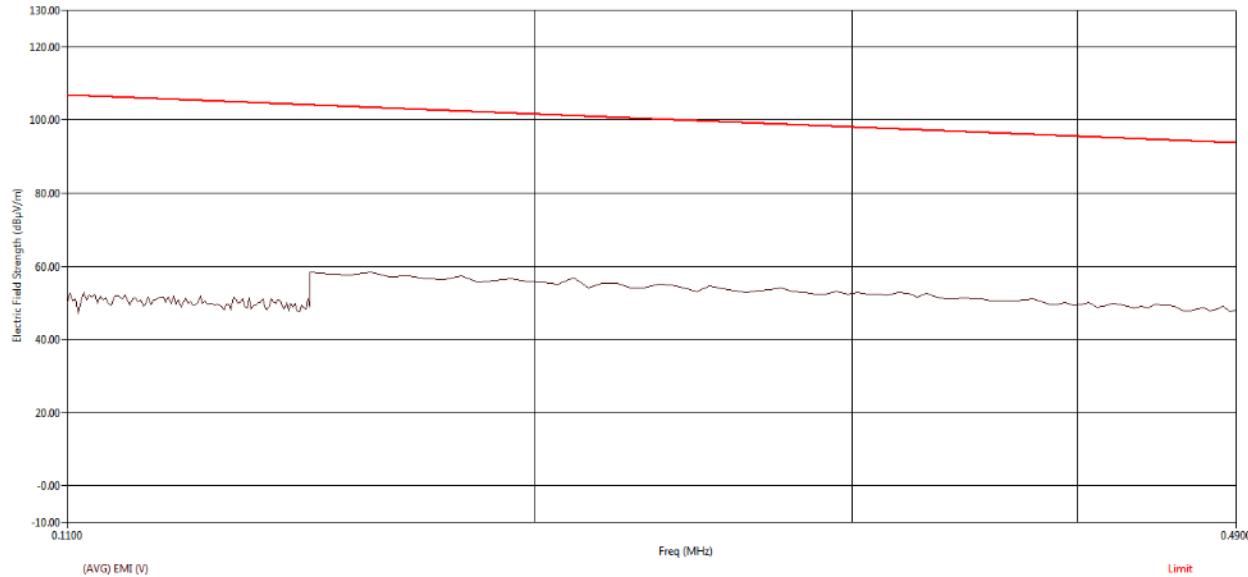


Figure 29: Average RE from 110 kHz to 490 kHz - Parallel

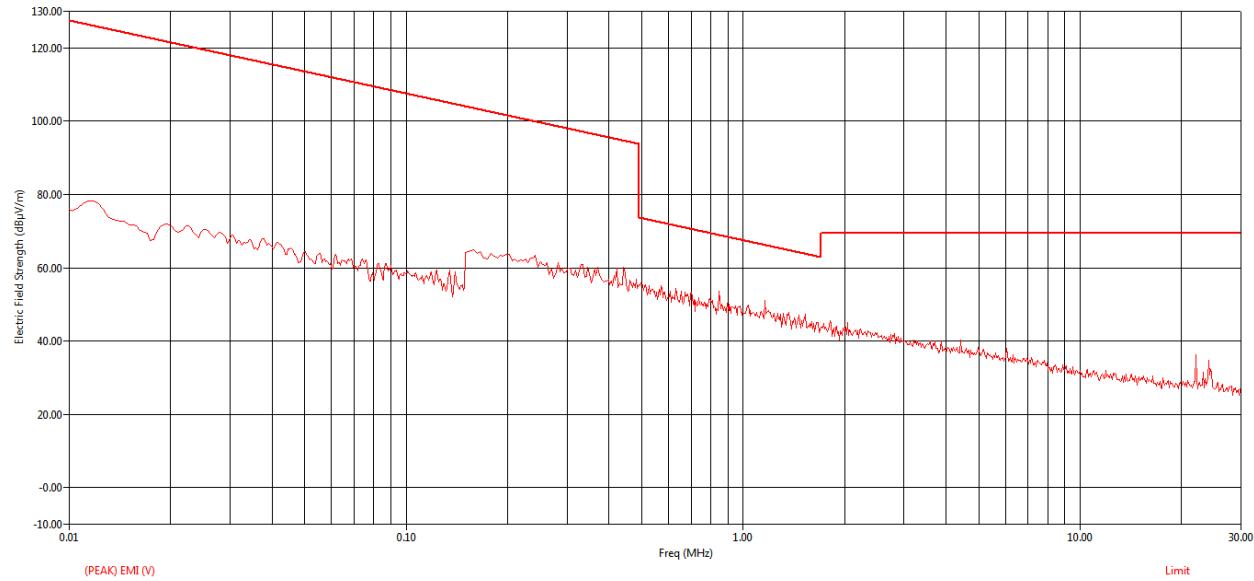


Figure 30: Peak RE from 9 kHz to 30MHz - Parallel

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
22.03	22.03	12.90	15.17	1.13	16.87	33.16	69.54	-36.38

Figure 31: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel

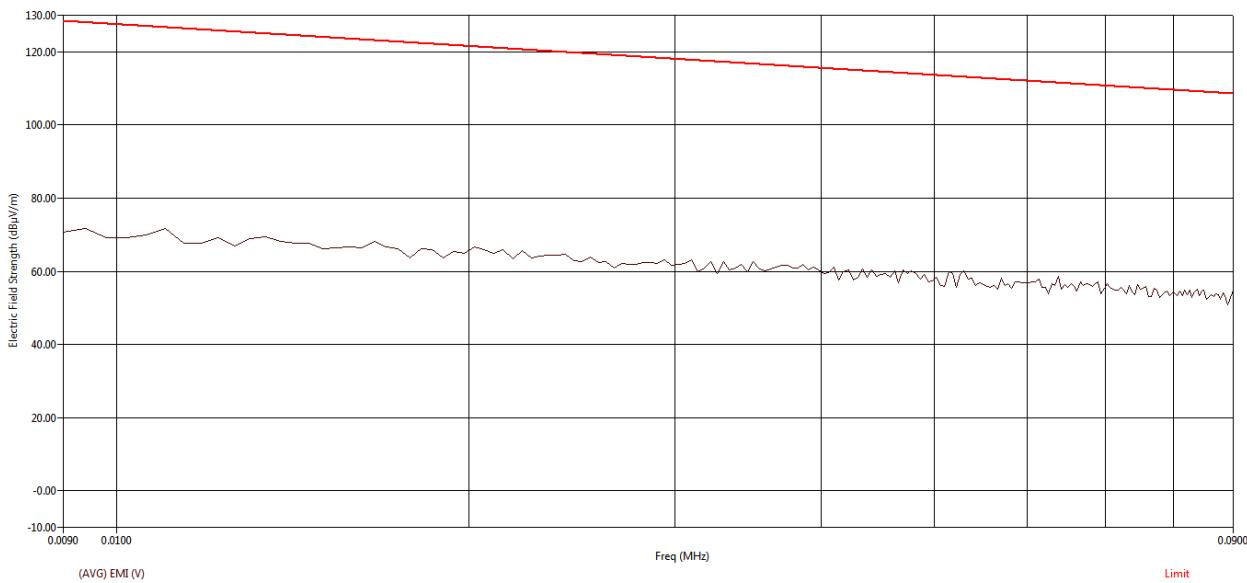


Figure 32: Average RE from 9 kHz to 90 kHz - Perpendicular

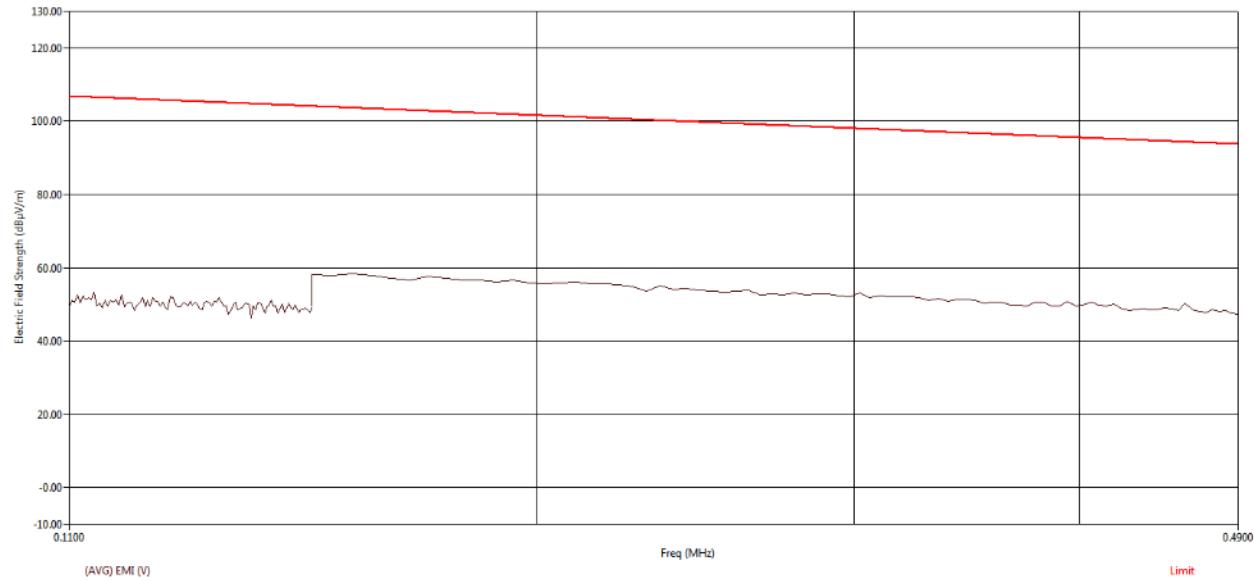


Figure 33: Average RE from 110 kHz to 490 kHz - Perpendicular


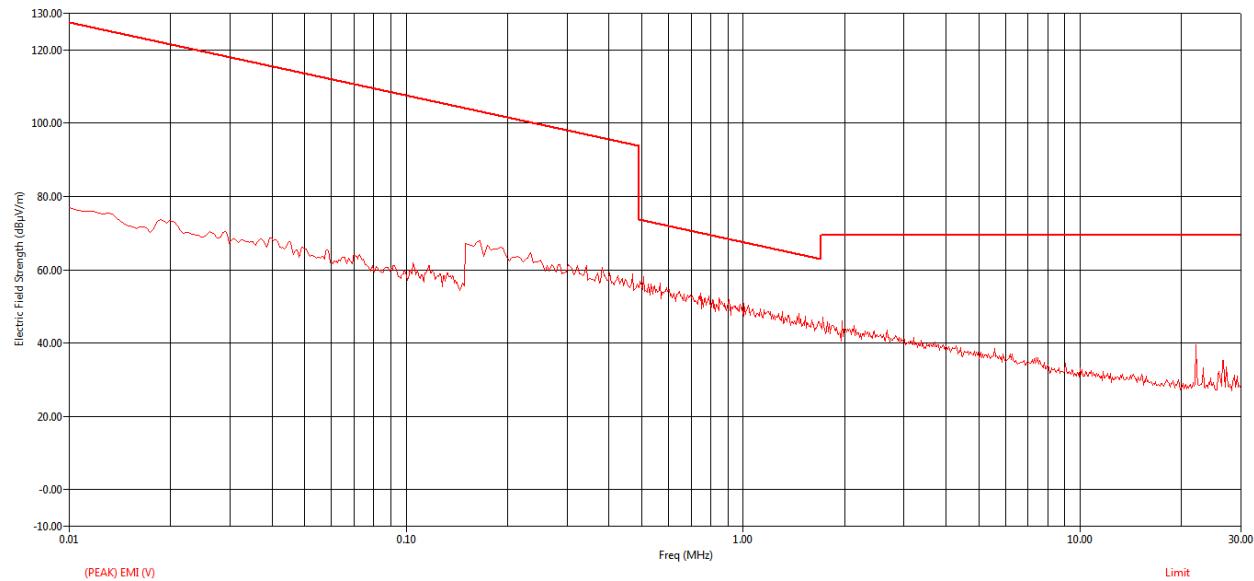



Figure 34: Peak RE from 9 kHz to 30MHz - Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
22.03	22.03	268.20	20.25	1.13	16.87	38.25	69.54	-31.29

Figure 35: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

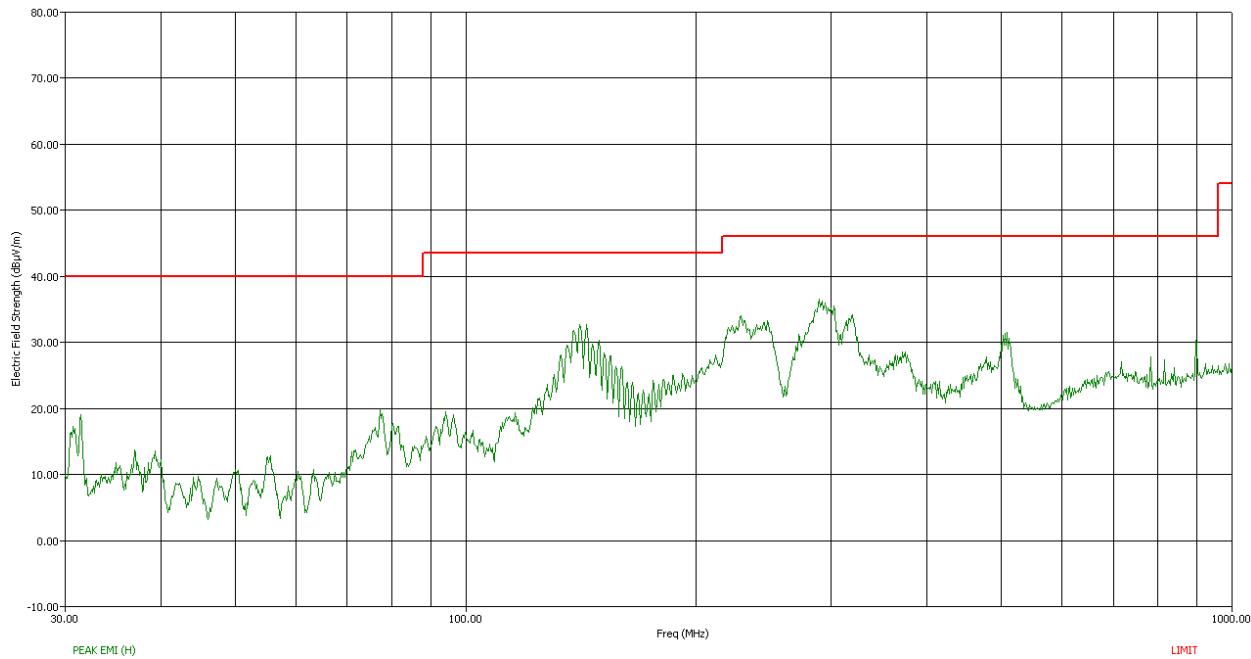

**Figure 36: Peak RE from 30MHz to 1GHz - Horizontal polarization**

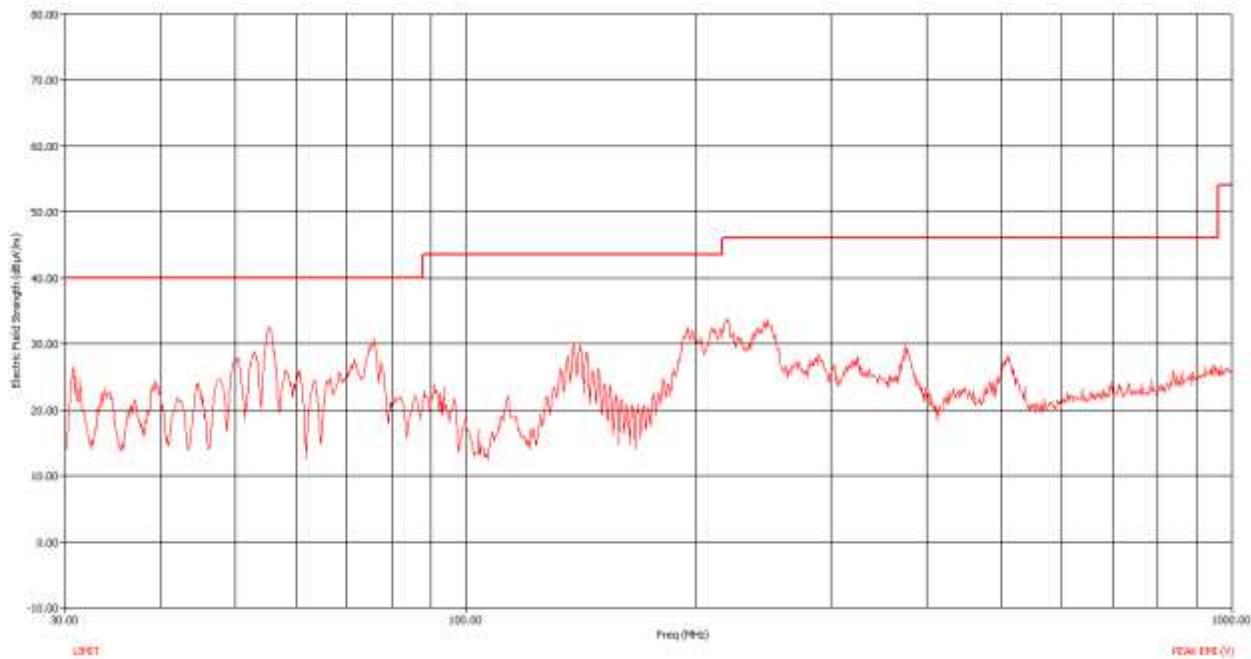

**Figure 37: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
53.00	52.99	V	207.20	241.00	42.98	1.58	10.16	32.19	22.53	40.00	-17.47
55.52	55.43	V	180.00	100.00	52.31	1.61	9.89	32.19	31.63	40.00	-8.37
75.88	75.77	V	180.00	208.00	44.40	1.90	9.20	32.14	23.35	40.00	-16.65
140.88	140.99	H	173.60	237.00	49.63	2.59	11.82	32.05	31.99	43.52	-11.53
143.68	143.69	H	166.00	239.00	49.32	2.62	11.97	32.05	31.85	43.52	-11.67
194.84	194.82	V	40.50	104.00	44.03	3.02	13.92	32.00	28.96	43.52	-14.56
228.92	228.87	H	185.00	144.00	49.82	3.25	12.76	31.97	33.86	46.02	-12.16
289.32	289.37	H	192.40	100.00	49.63	3.66	13.99	31.91	35.37	46.02	-10.65

Table 13: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz

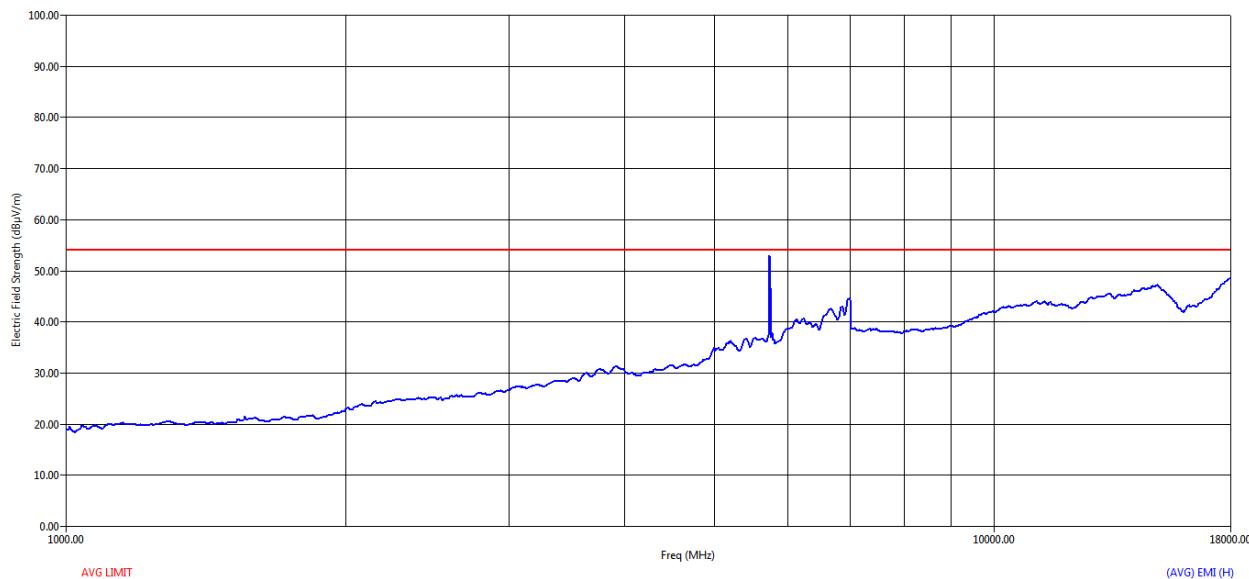


Figure 38: Average RE from 1GHz to 18GHz - Horizontal polarization

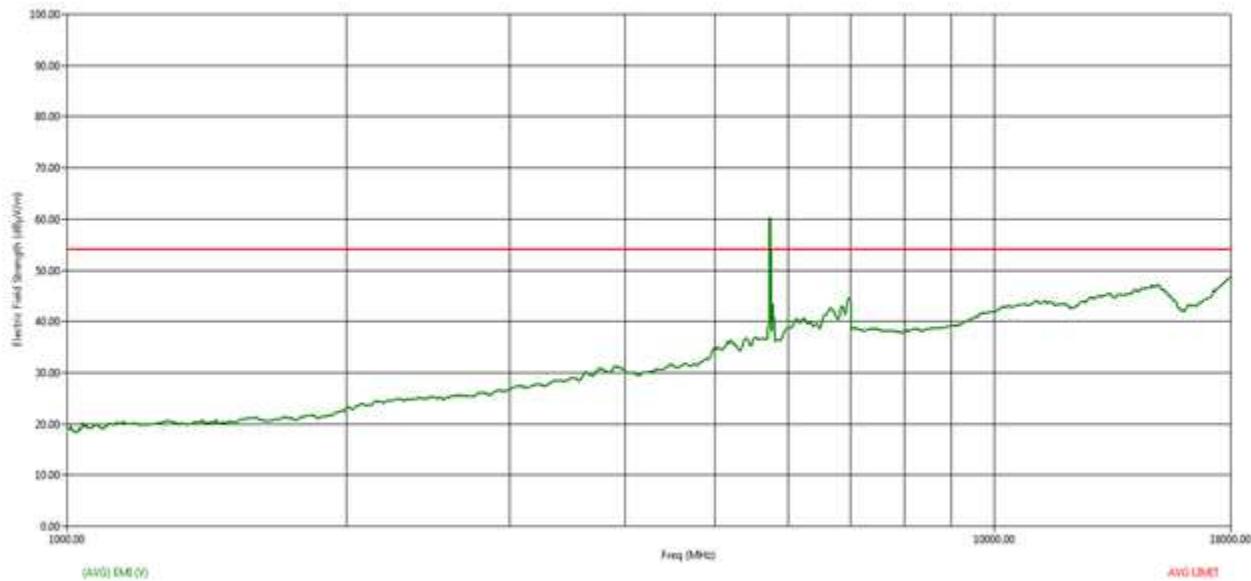


Figure 39: Average RE from 1GHz to 18GHz - Vertical polarization

Freq (MHz)	Freq (Max) (MHz)	Pol.	EUT Total Angl. (deg)	Tw. (m)	(AVG) Trace (dBuV)	Cable (dB)	Transducer (dB)	Preamp. (dB)	(AVG) EME (dBuV/m)	(AVG) Limit (dBuV/m)	(AVG) Margin AVL (dB)
5732.00	5732.00	H	180.10	185.00	30.27	3.91	29.32	28.57	34.91	53.98	-19.05
5732.40	5732.40	V	180.00	158.00	30.27	3.91	29.32	28.57	34.92	53.98	-19.00
5783.20	5783.20	V	180.10	192.00	30.22	3.92	29.38	28.58	34.95	53.98	-19.01

Table 14: Average table for RE from 1GHz to 18GHz



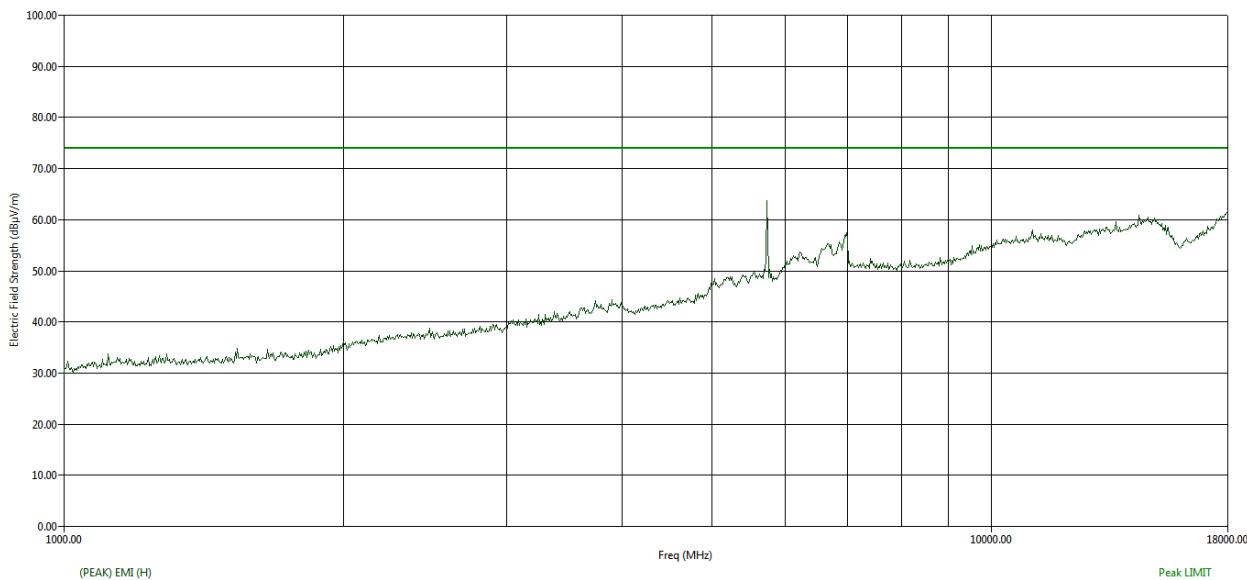



Figure 40: Peak RE from 1GHz to 18GHz - Horizontal polarization

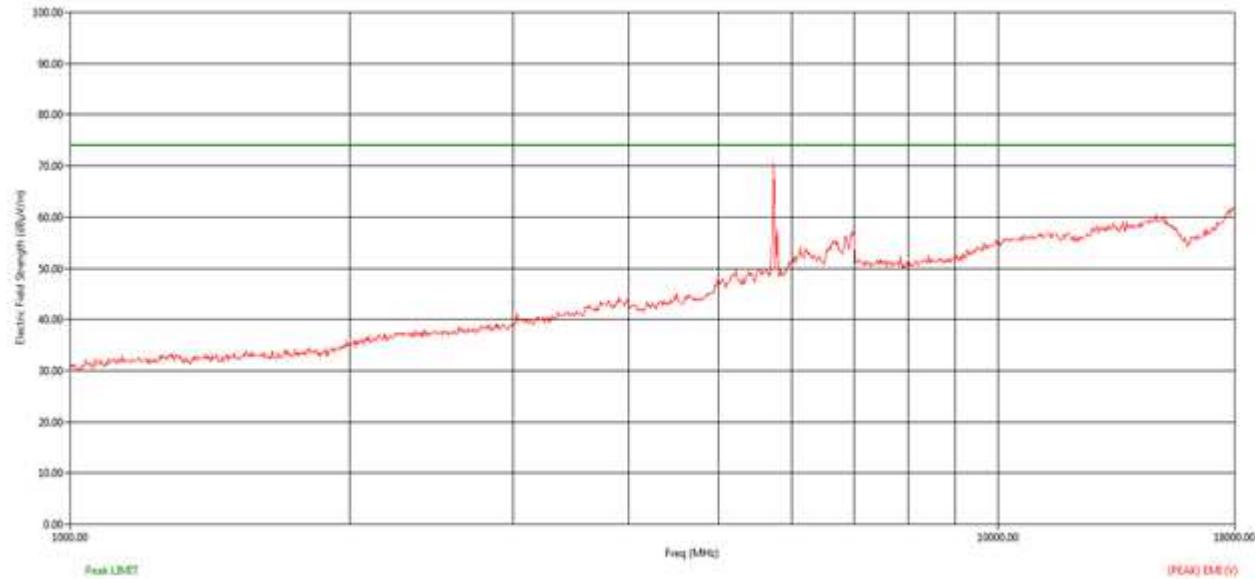


**Figure 41: Peak RE from 1GHz to 18GHz - Vertical polarization**

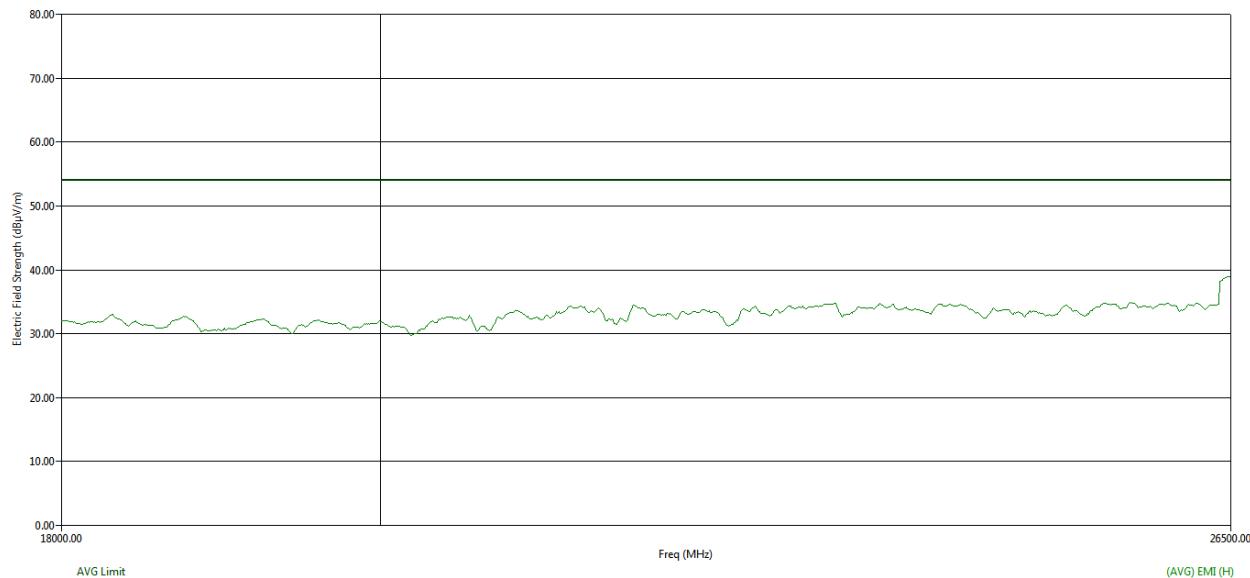


**Figure 42: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

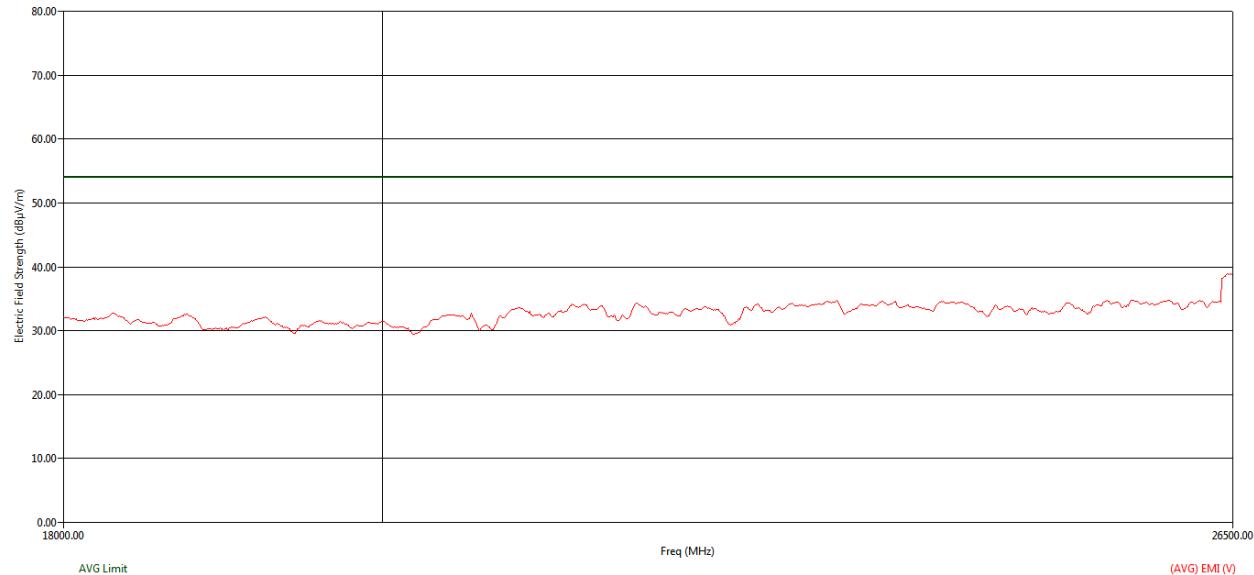


**Figure 43: Average RE from 18GHz to 26.5GHz - Vertical polarization**

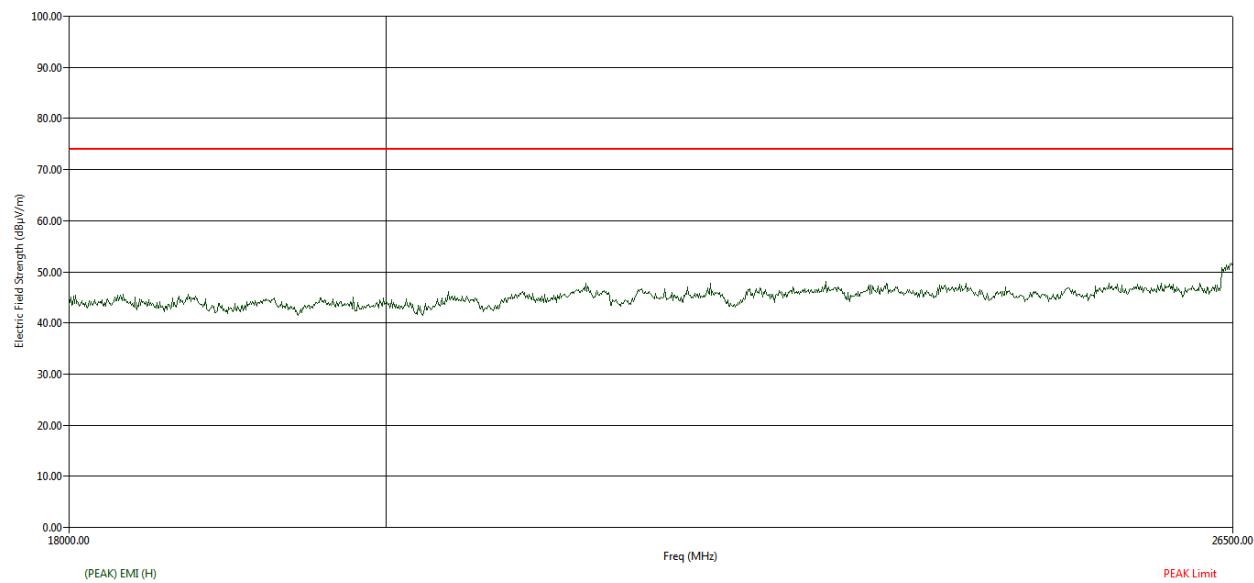


**Figure 44: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

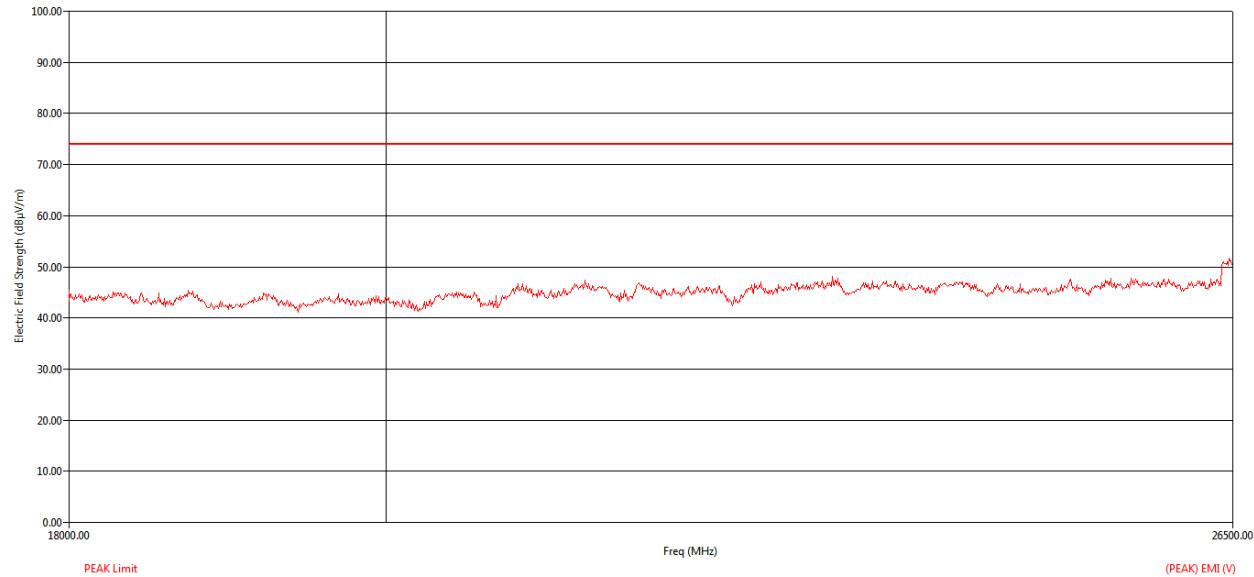


**Figure 45: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

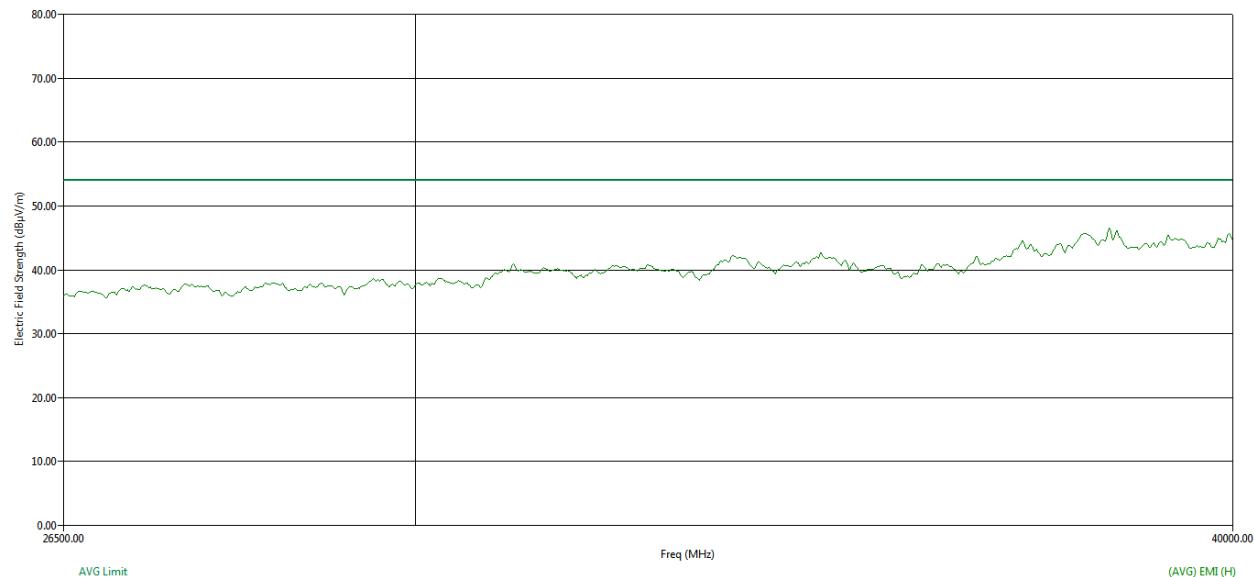


**Figure 46: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

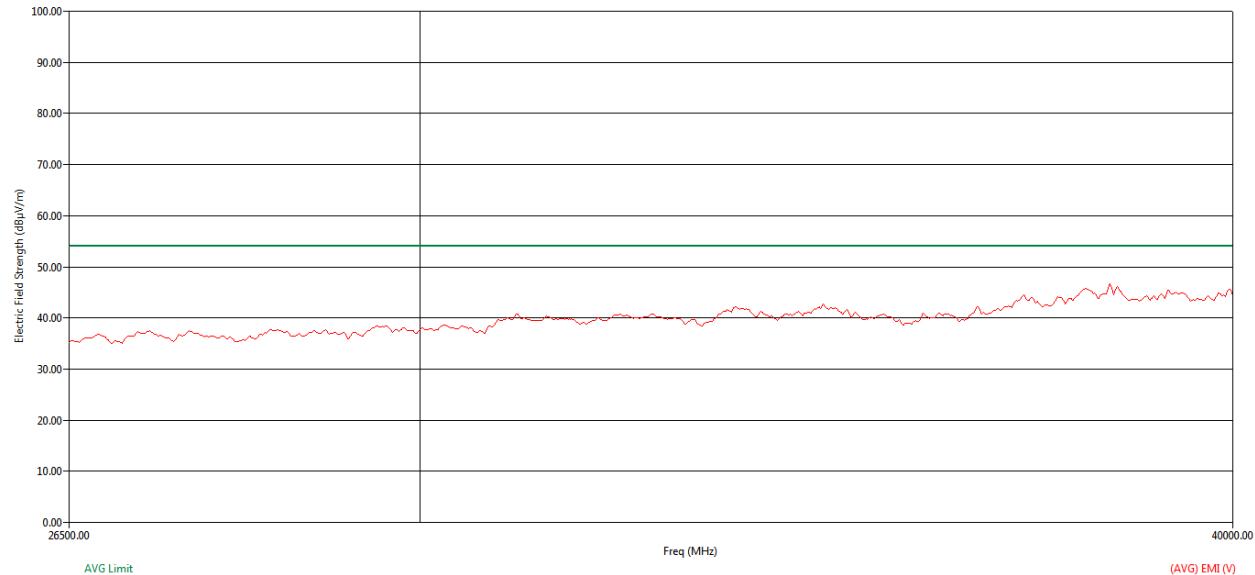

**Figure 47: Average RE from 26.5GHz to 40GHz - Vertical polarization**

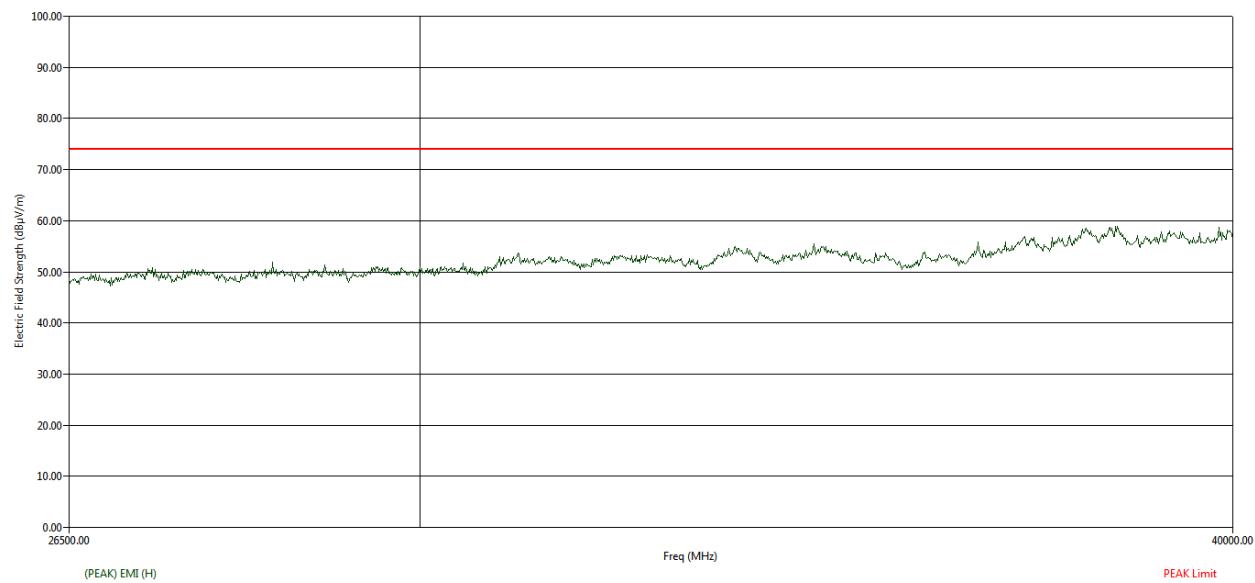


**Figure 48: Peak RE from 26.5GHz to 40GHz - Horizontal polarization**

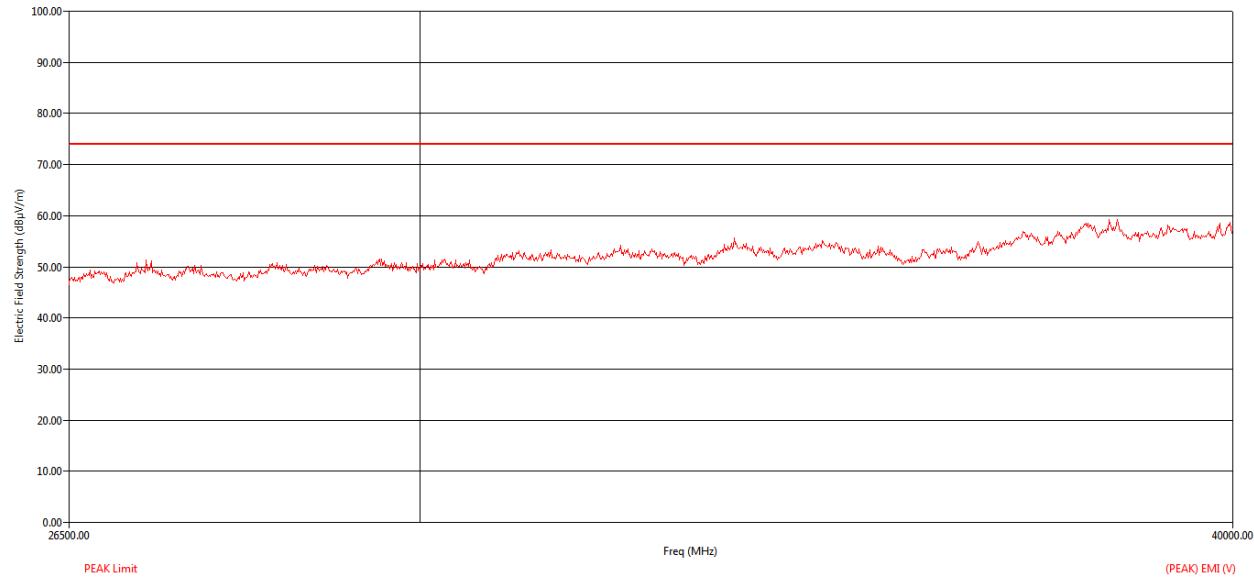


**Figure 49: Peak RE from 26.5GHz to 40GHz - Vertical polarization**


### 5.3.2.6.2 MID CHANNEL\_5785MHz

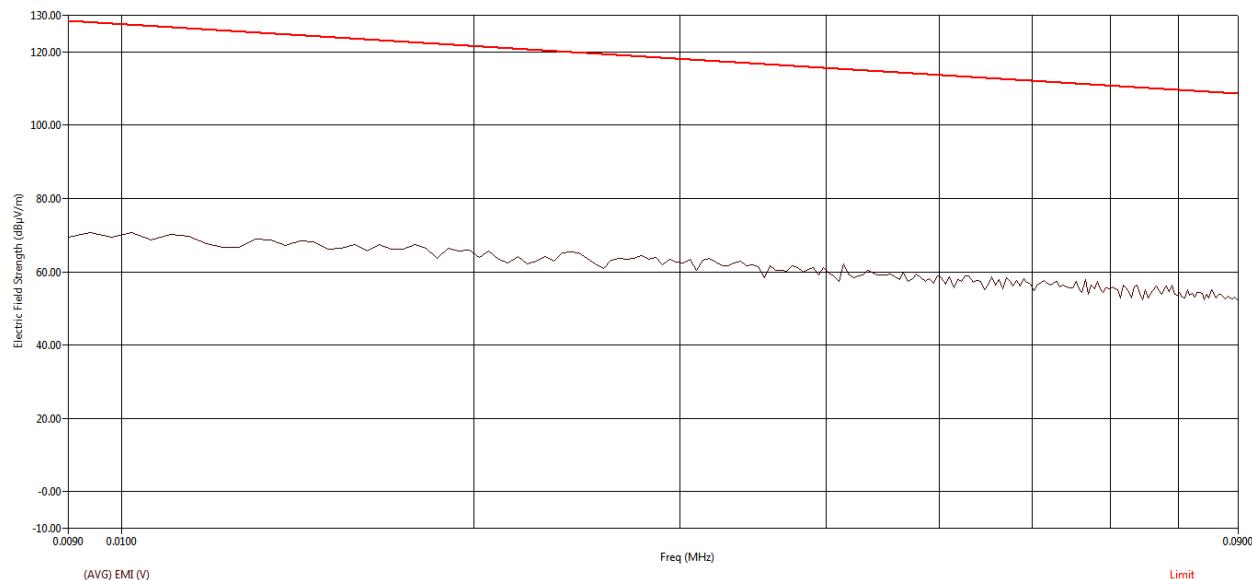

**Figure 50: Average RE from 9 kHz to 90 kHz - Parallel**

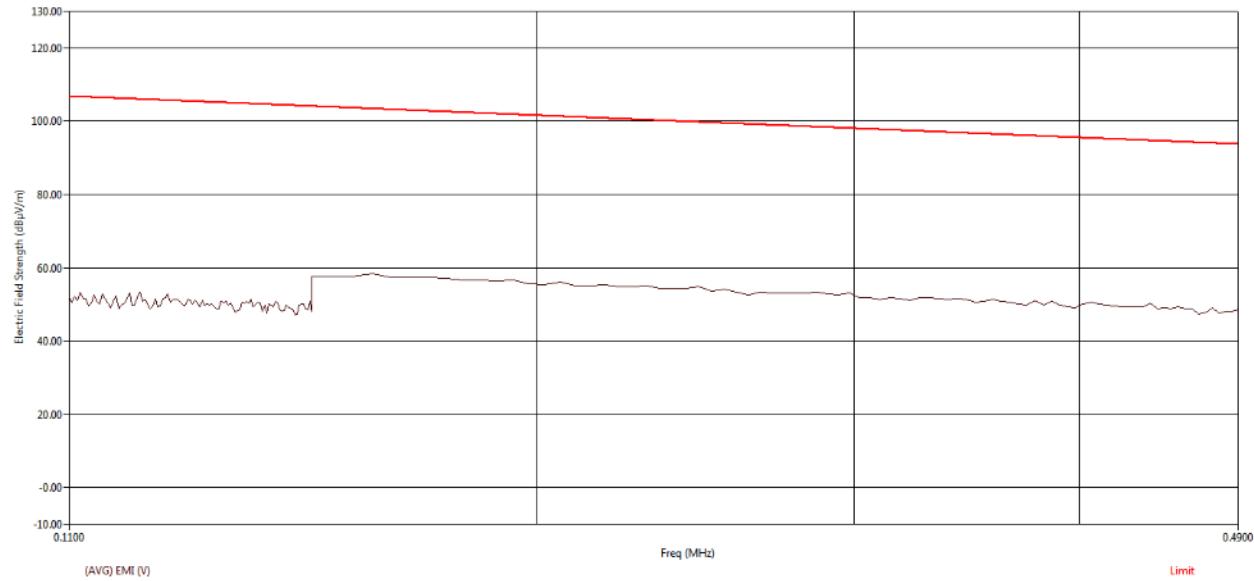


**Figure 51: Average RE from 110 kHz to 490 kHz - Parallel**

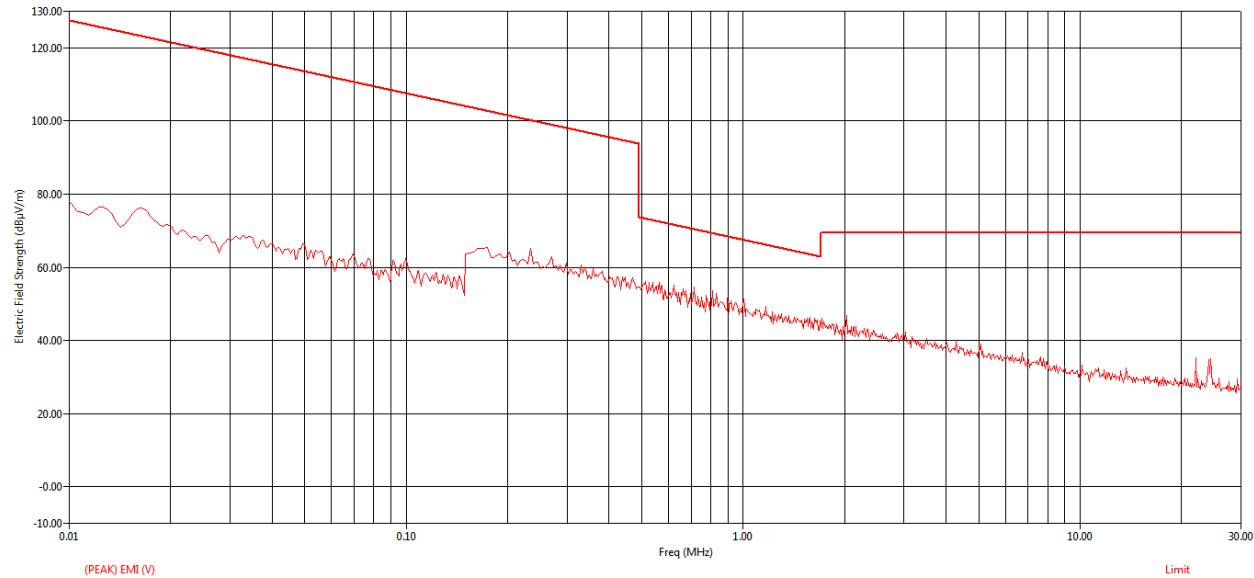


**Figure 52: Peak RE from 9 kHz to 30MHz - Parallel**

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
22.02	22.02	180.10	14.81	1.13	16.87	32.80	69.54	-36.74

**Figure 53: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel**

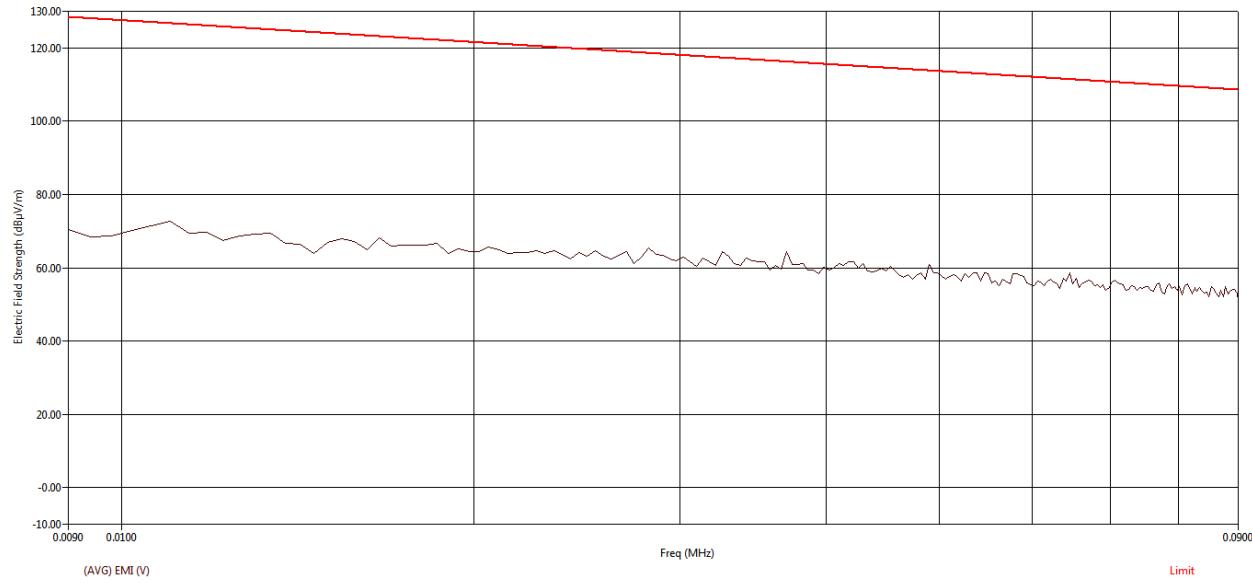

**Figure 54: Average RE from 9 kHz to 90 kHz - Perpendicular**

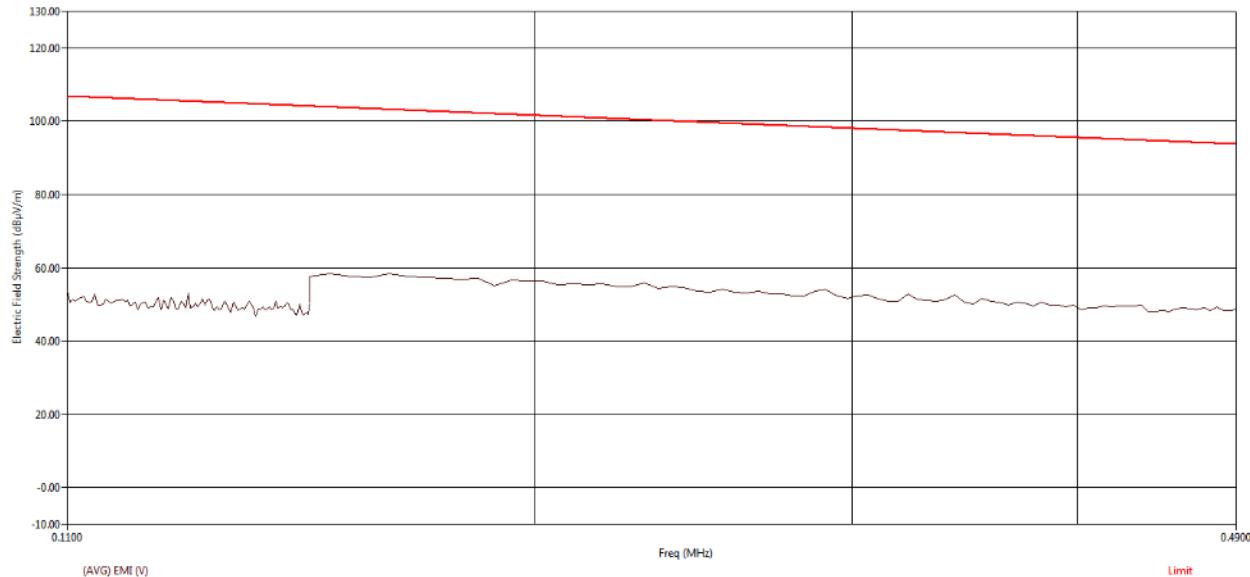

**Figure 55: Average RE from 110 kHz to 490 kHz - Perpendicular**


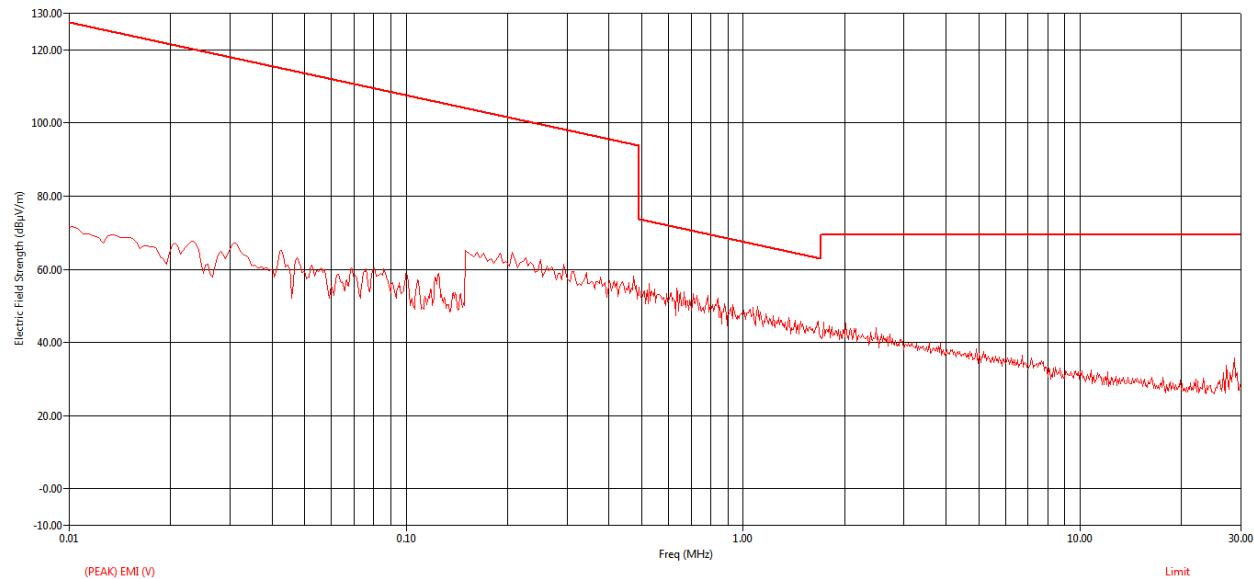



Figure 56: Peak RE from 9 kHz to 30MHz - Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
28.69	28.68	307.00	15.96	1.26	16.40	33.62	69.54	-35.92

Figure 57: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

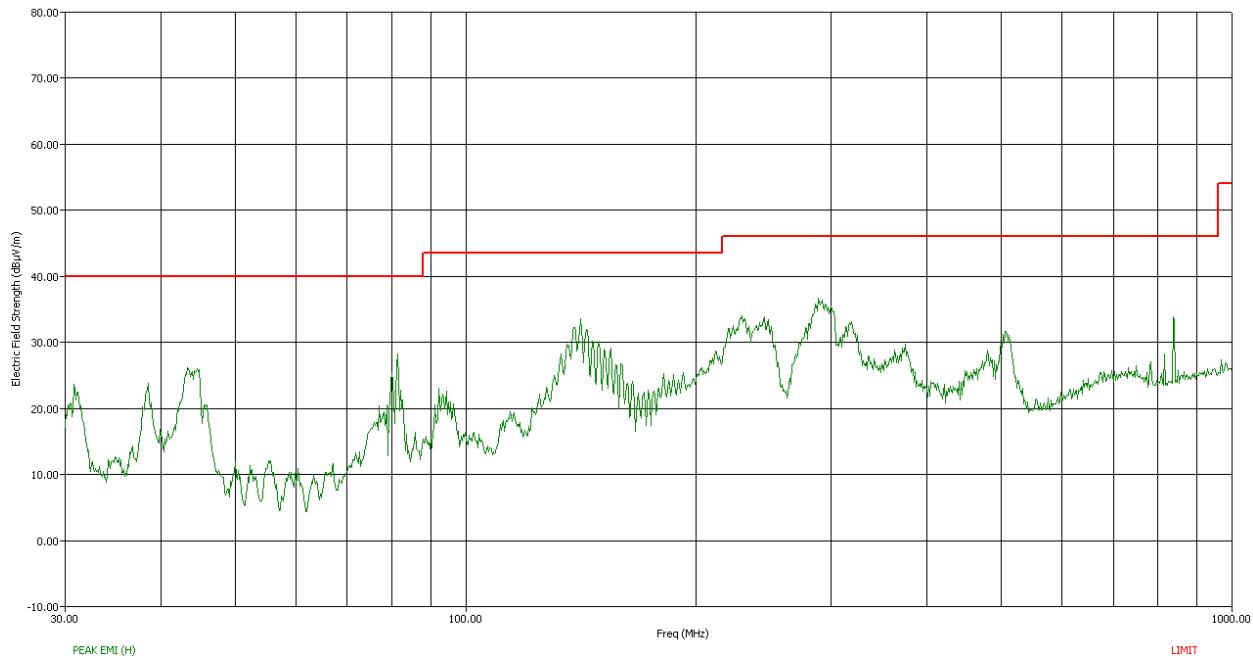


**Figure 58: Peak RE from 30MHz to 1GHz - Horizontal polarization**

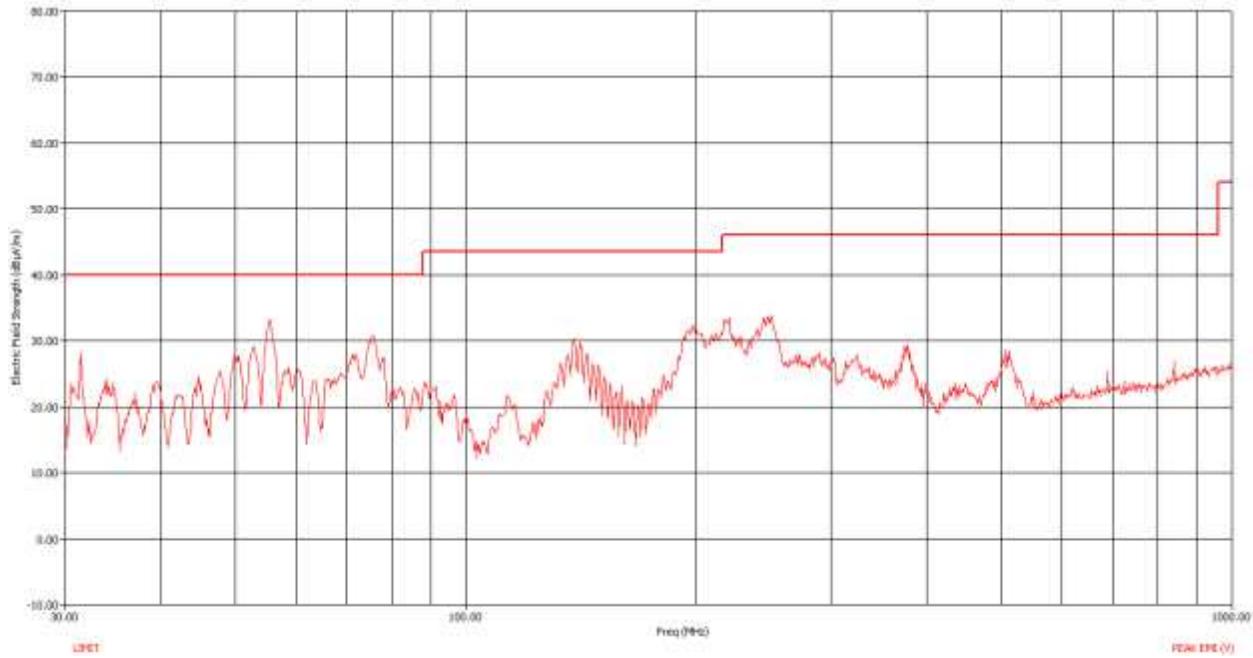

**Figure 59: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
31.40	31.40	V	183.20	336.00	36.61	1.22	11.31	32.20	16.94	40.00	-23.06
52.96	52.96	V	234.50	207.00	44.28	1.58	10.16	32.19	23.83	40.00	-16.17
55.44	55.35	V	180.60	100.00	51.57	1.61	9.90	32.19	30.89	40.00	-9.11
75.76	75.66	V	180.10	102.00	48.47	1.90	9.20	32.14	27.43	40.00	-12.57
81.40	81.36	H	198.40	170.00	30.60	1.95	8.99	32.13	9.41	40.00	-30.59
141.08	141.17	H	165.80	224.00	49.43	2.59	11.83	32.05	31.80	43.52	-11.72
229.52	229.41	H	188.60	101.00	49.53	3.25	12.74	31.97	33.56	46.02	-12.46
288.44	288.54	H	191.20	103.00	49.69	3.65	13.94	31.91	35.38	46.02	-10.64

**Table 15: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz**

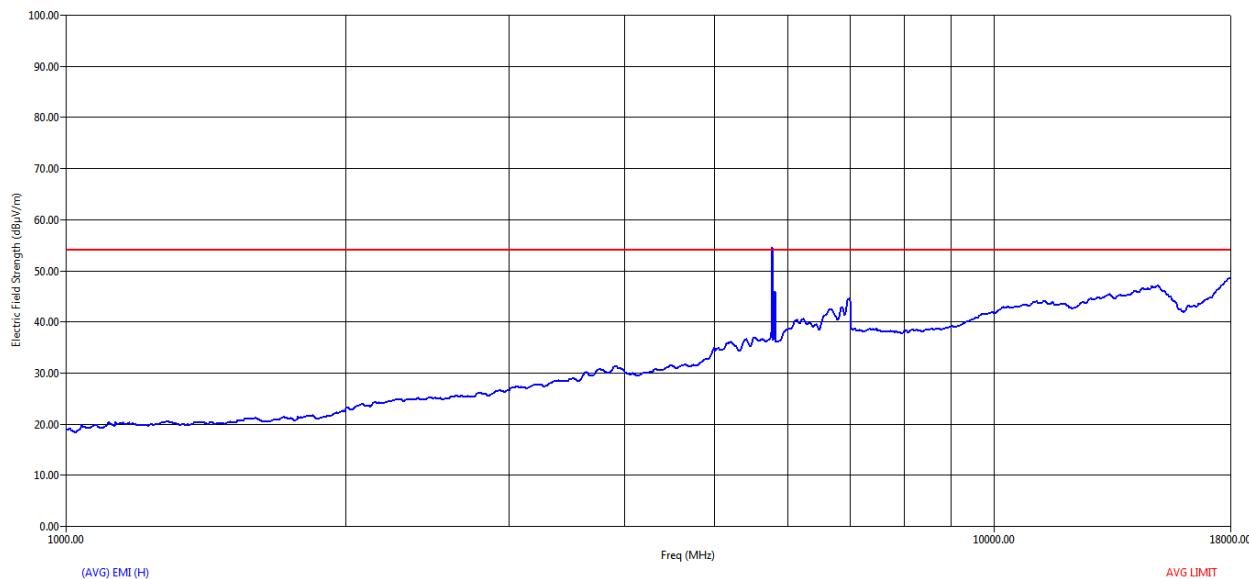

**Figure 60: Average RE from 1GHz to 18GHz - Horizontal polarization**

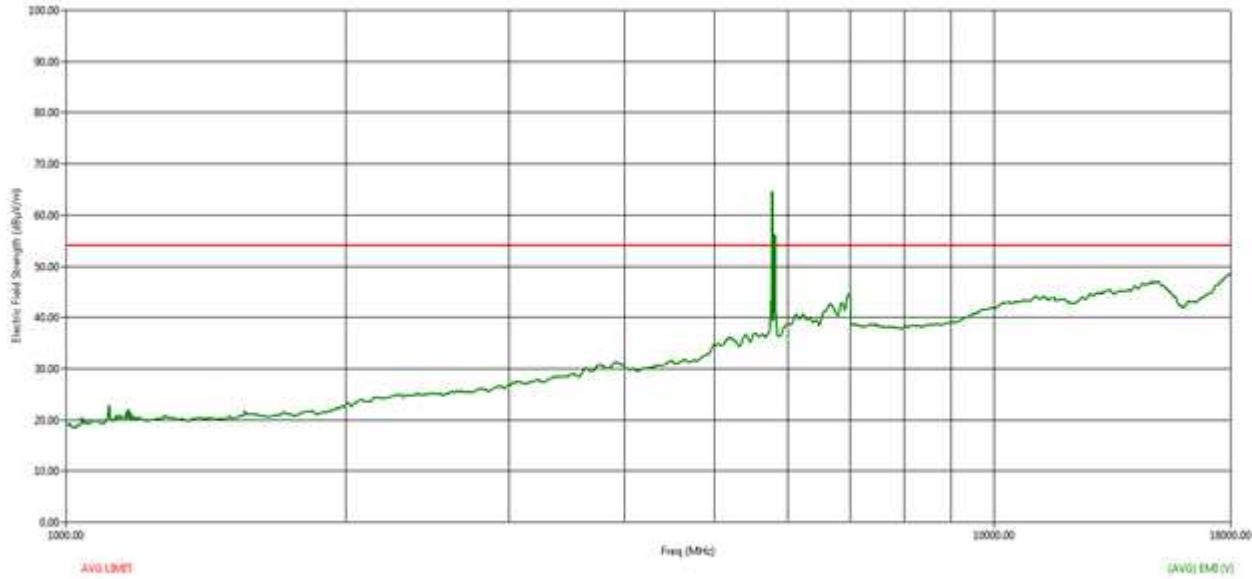


Figure 61: Average RE from 1GHz to 18GHz - Vertical polarization

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Test Angl (deg)	Test HB (cm)	(AVG) Trace (dBuV)	Cable (dB)	Transducer (dB)	Preamp (dB)	(AVG) EMI (dBuV/m)	(AVG) Limit (dBuV/m)	(AVG) Margin AvL (dB)
5767.20	5767.20	H	180.10	100.00	30.07	3.02	29.36	28.58	34.77	37.98	-19.21
5768.00	5768.00	V	180.00	100.00	30.07	3.92	29.36	28.58	34.77	37.98	-19.21
5802.80	5802.80	V	180.10	186.00	30.75	3.93	29.40	28.58	35.50	33.98	-18.48

Table 16: Final Average table for RE from 1GHz to 18GHz



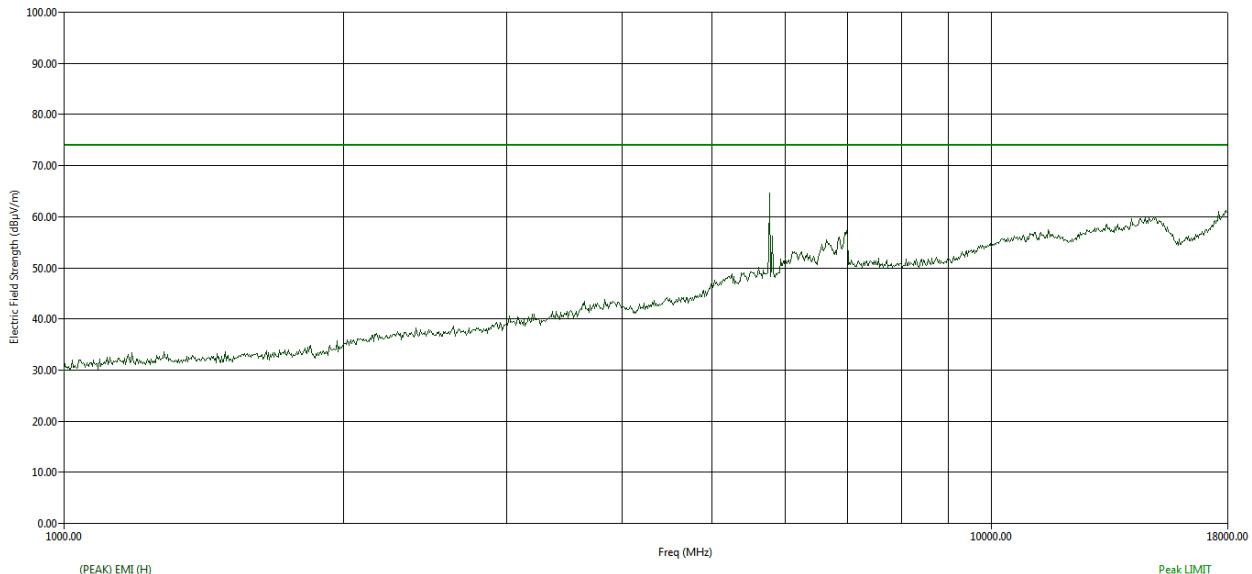



Figure 62: Peak RE from 1GHz to 18GHz - Horizontal polarization

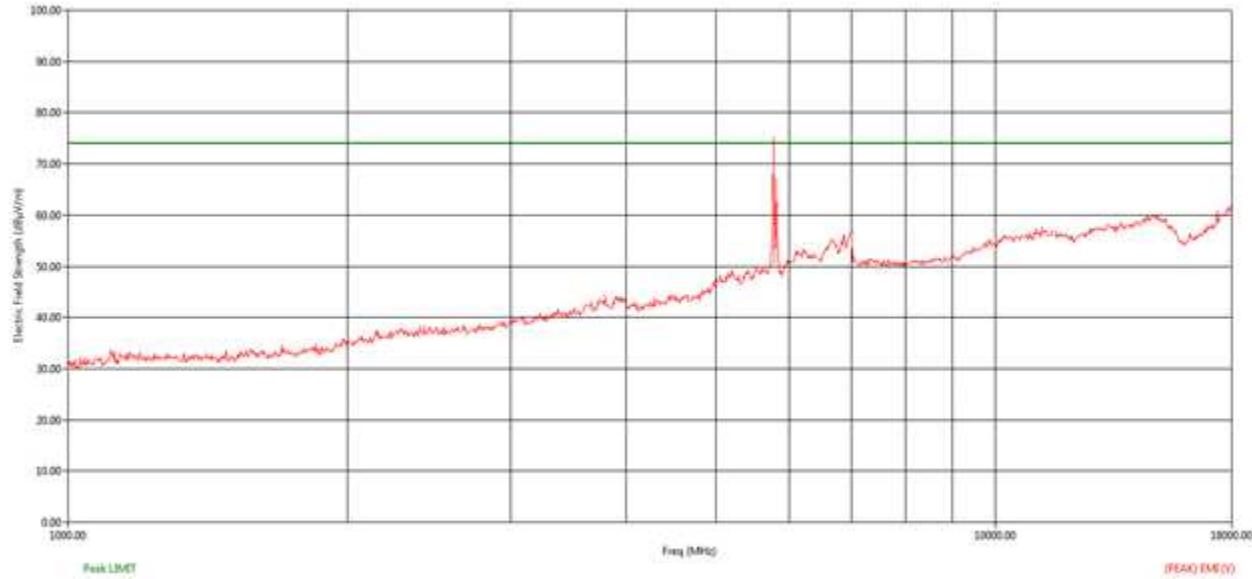


**Figure 63: Peak RE from 1GHz to 18GHz - Vertical polarization**

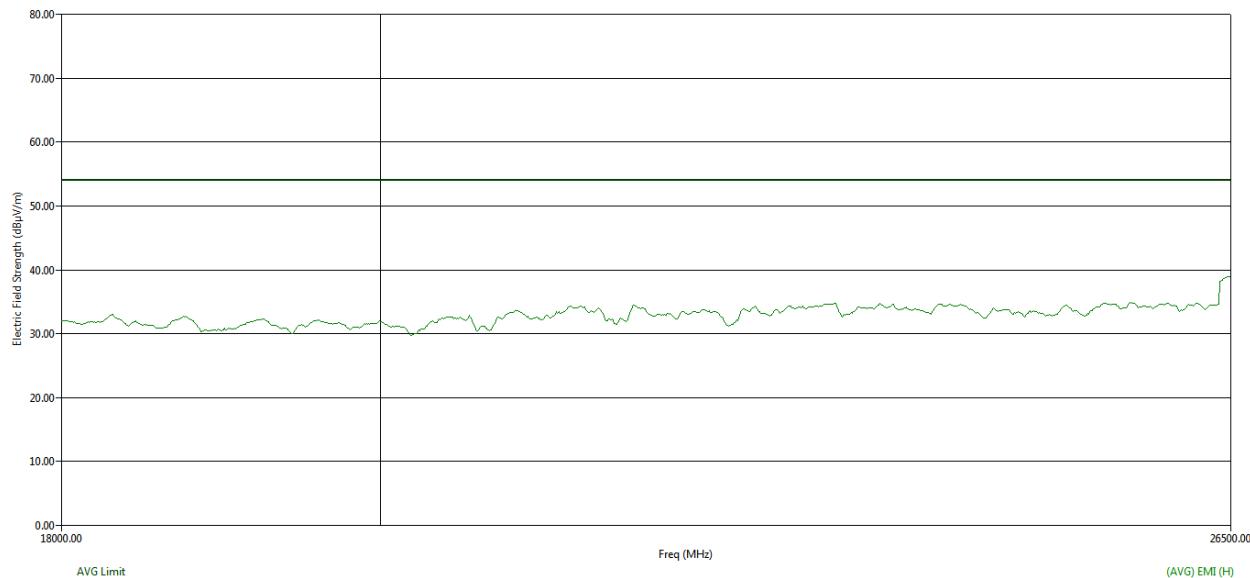


**Figure 64: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

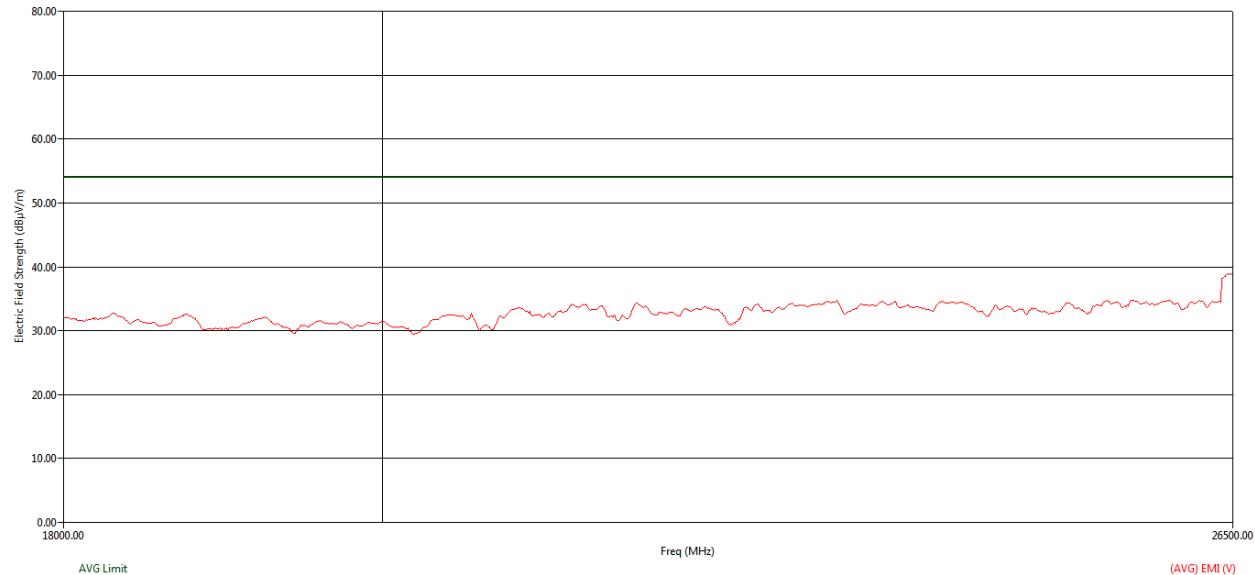


**Figure 65: Average RE from 18GHz to 26.5GHz - Vertical polarization**

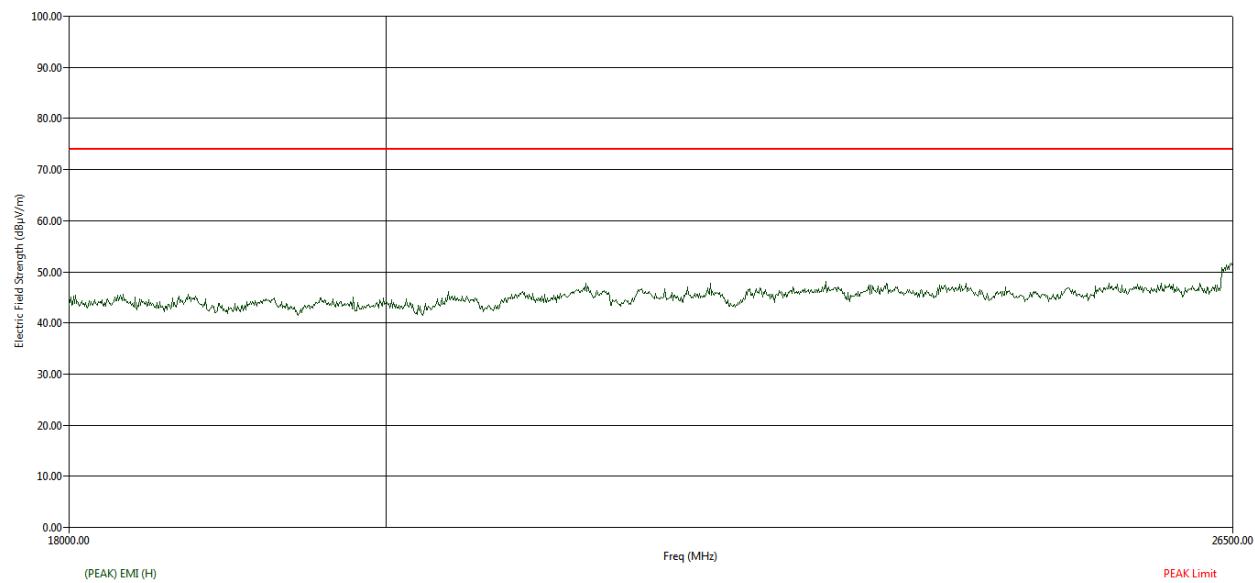


**Figure 66: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

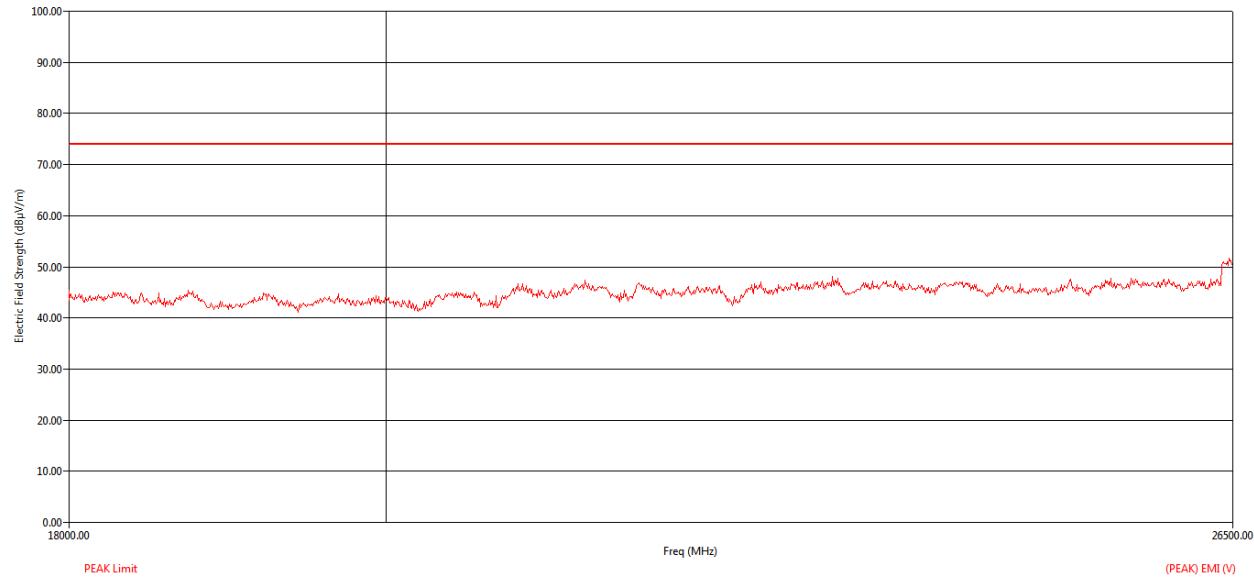


**Figure 67: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

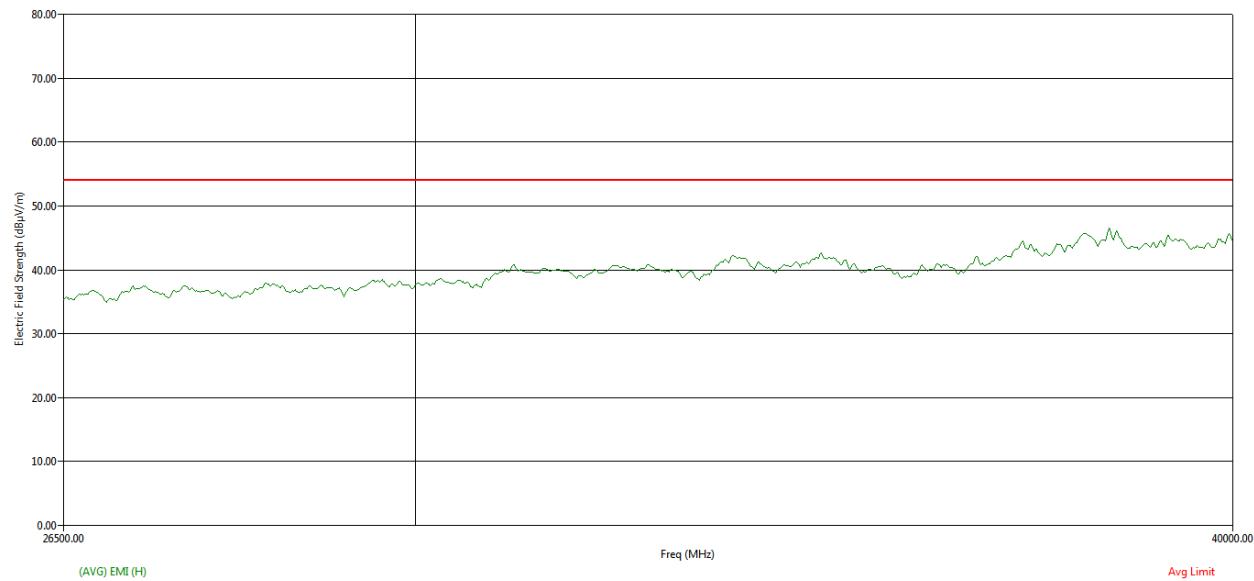


**Figure 68: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

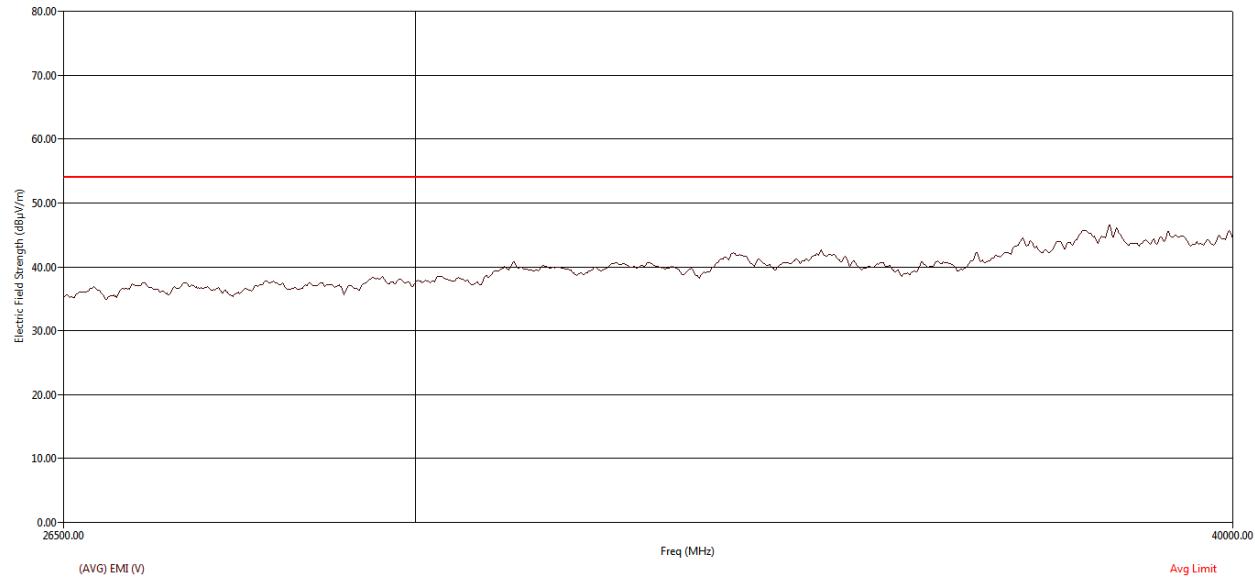

**Figure 69: Average RE from 26.5GHz to 40GHz - Vertical polarization**

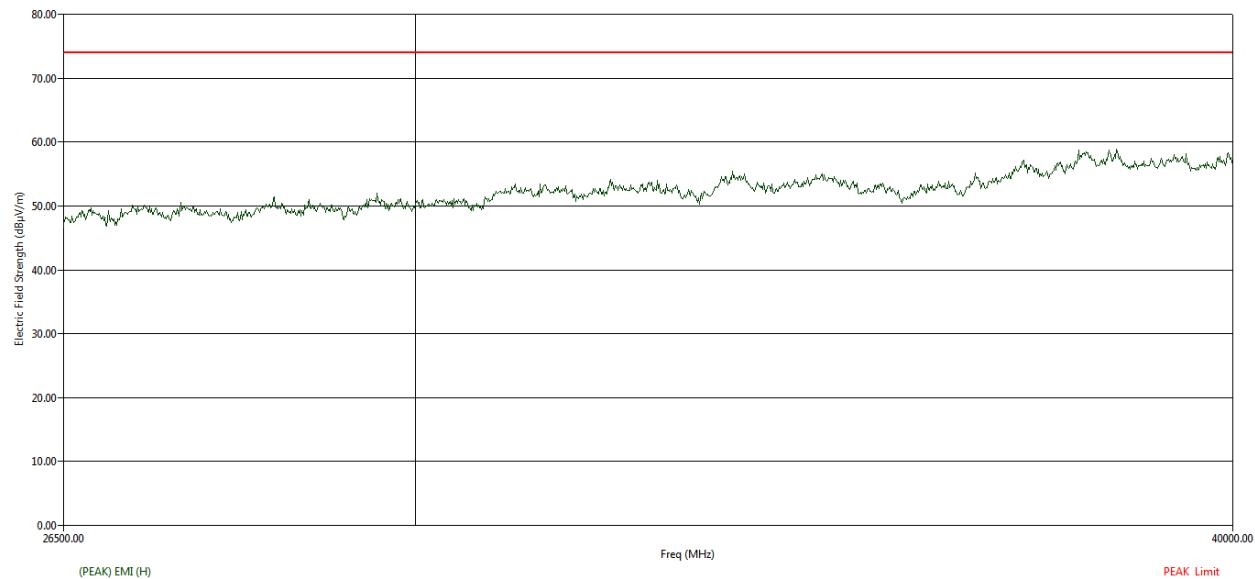


**Figure 70: Peak RE from 26.5GHz to 40GHz - Horizontal polarization**

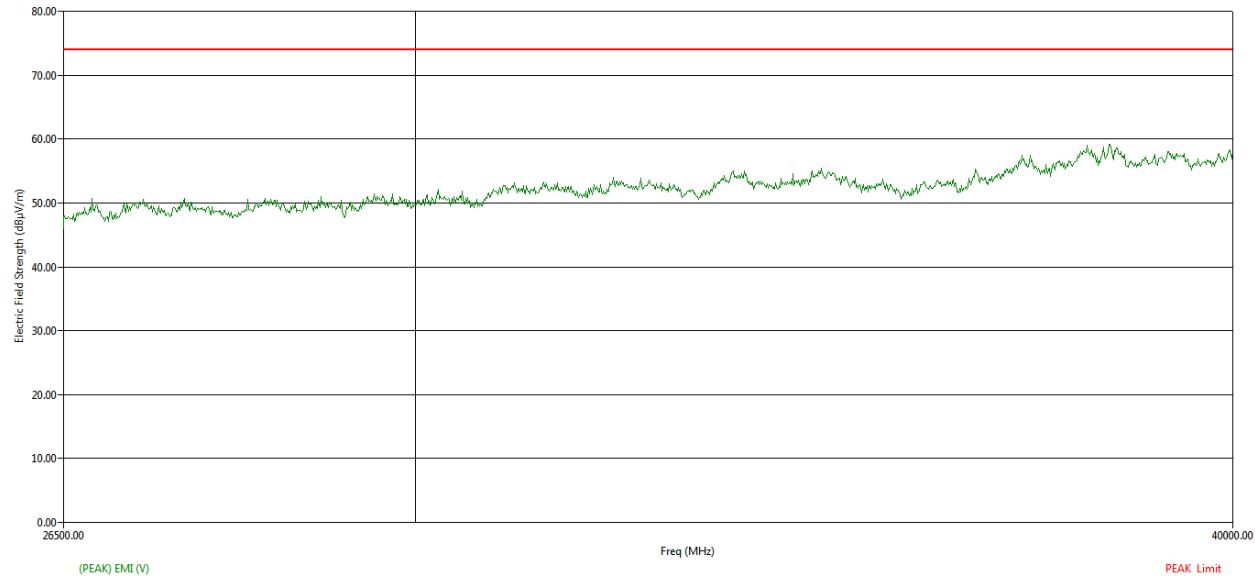


**Figure 71: Peak RE from 26.5GHz to 40GHz - Vertical polarization**


### 5.3.2.6.3 HIGH CHANNEL\_5825MHz

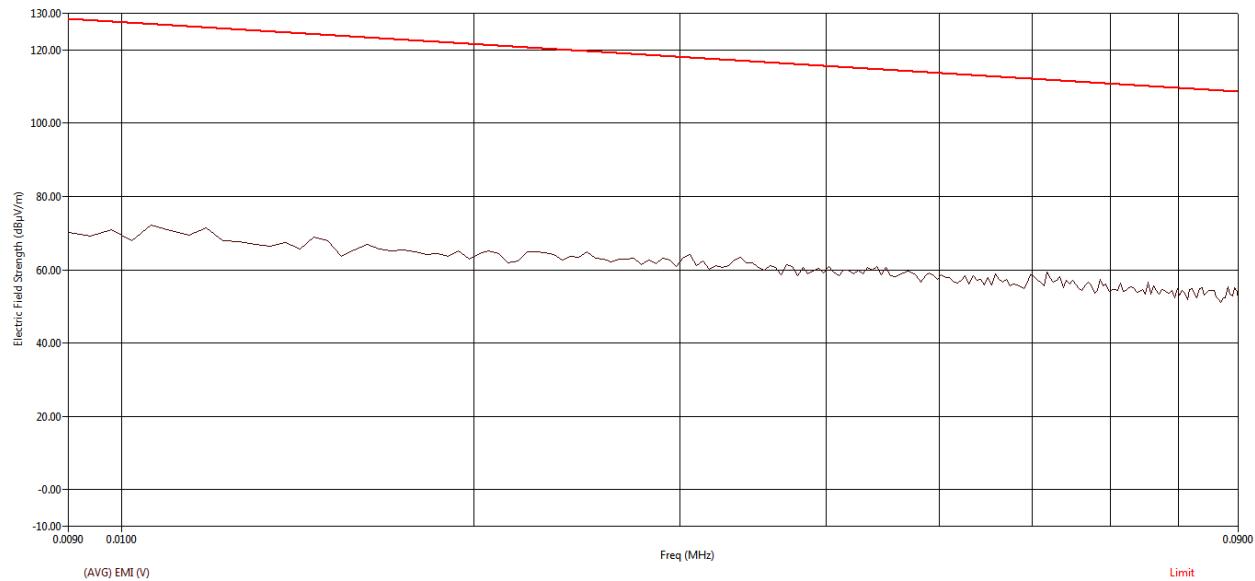

**Figure 72: Average RE from 9 kHz to 90 kHz - Parallel**

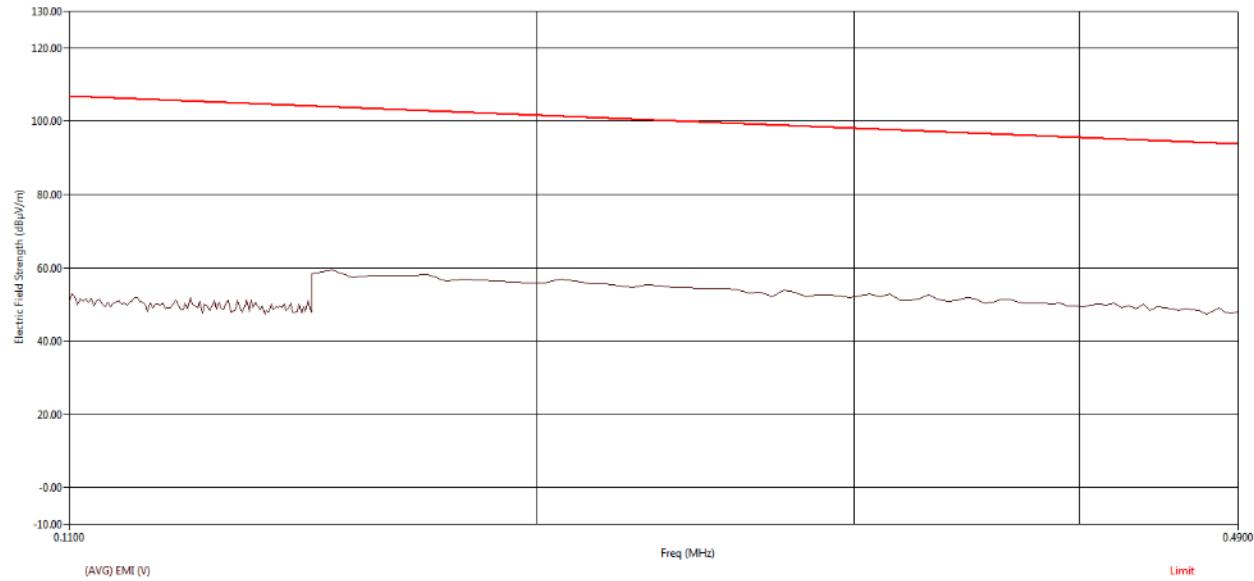


**Figure 73: Average RE from 110 kHz to 490 kHz - Parallel**

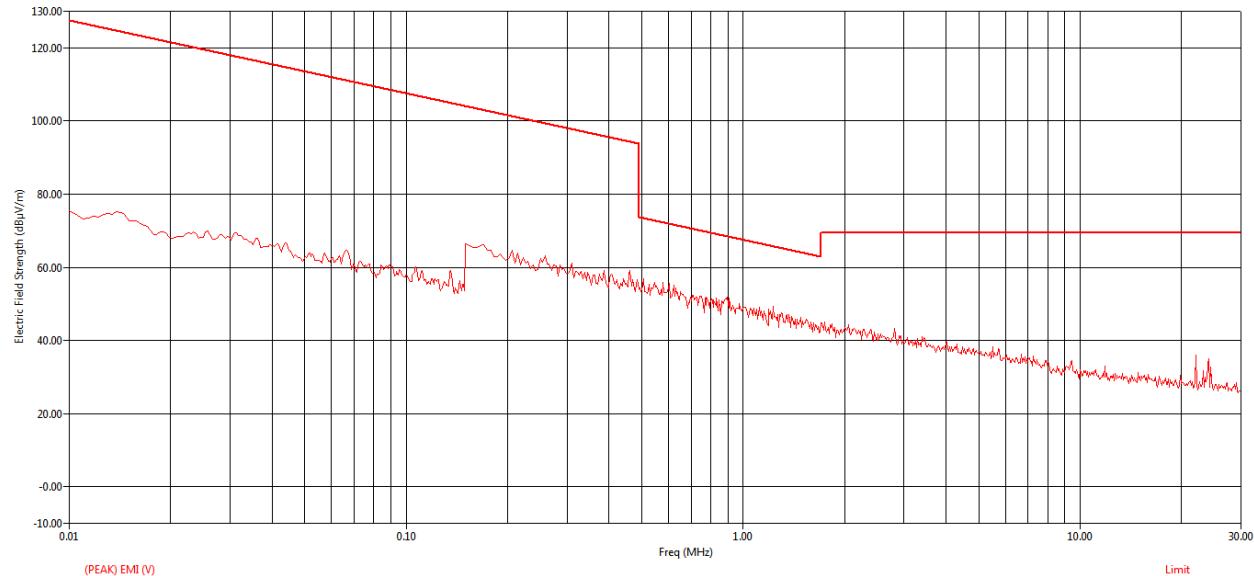


**Figure 74: Peak RE from 9 kHz to 30MHz - Parallel**

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
22.01	22.01	32.20	14.90	1.13	16.87	32.90	69.54	-36.65

**Figure 75: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel**

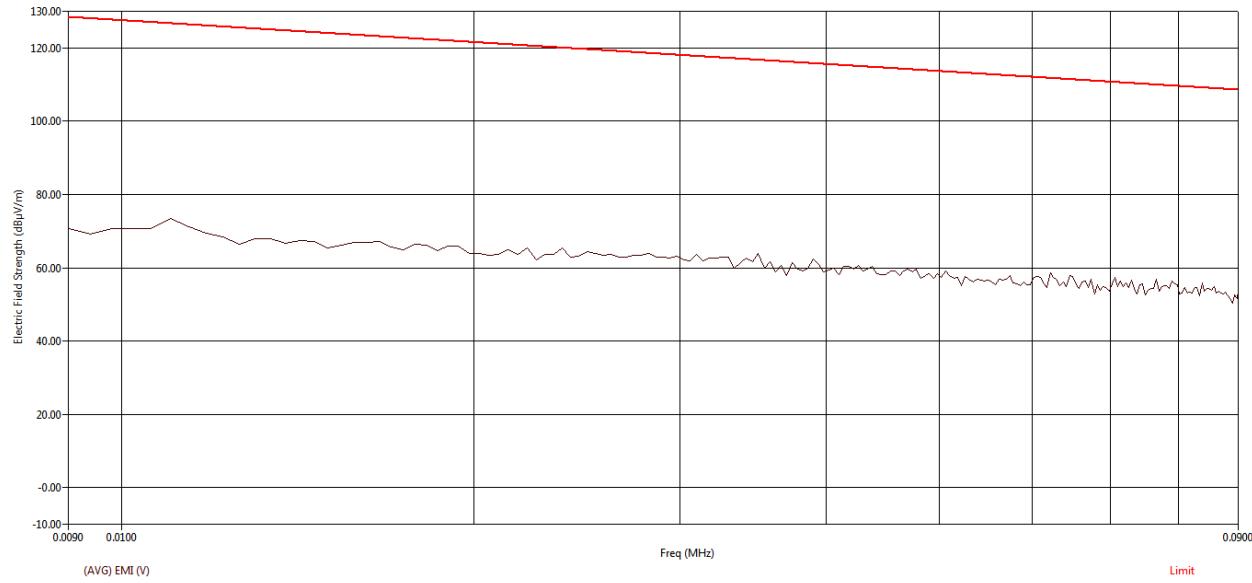

**Figure 76: Average RE from 9 kHz to 90 kHz - Perpendicular**

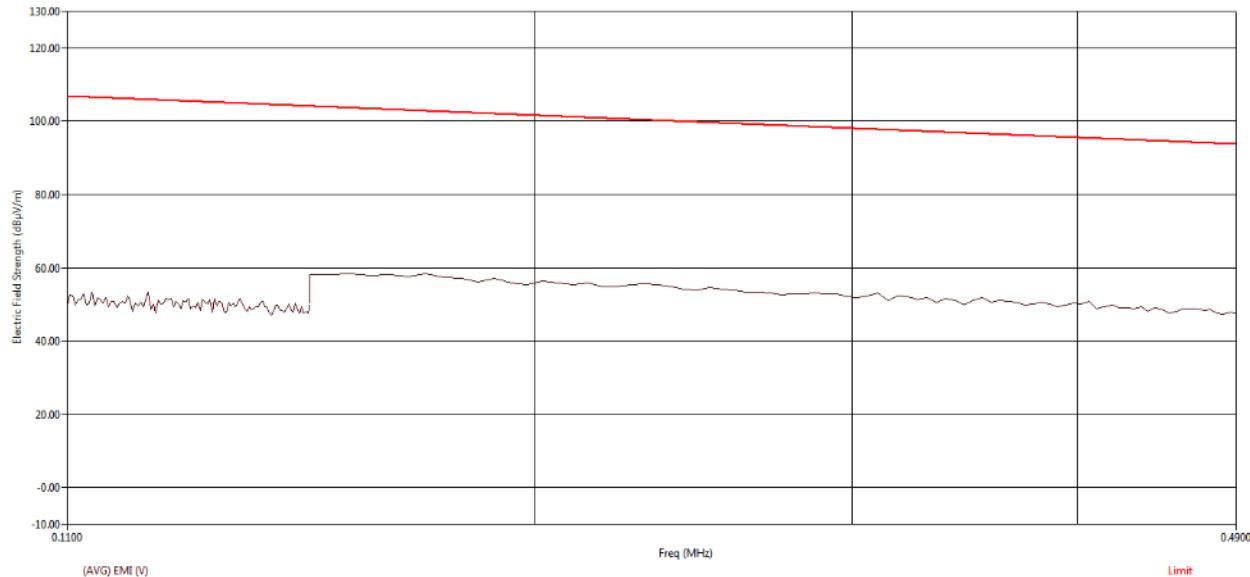

**Figure 77: Average RE from 110 kHz to 490 kHz - Perpendicular**


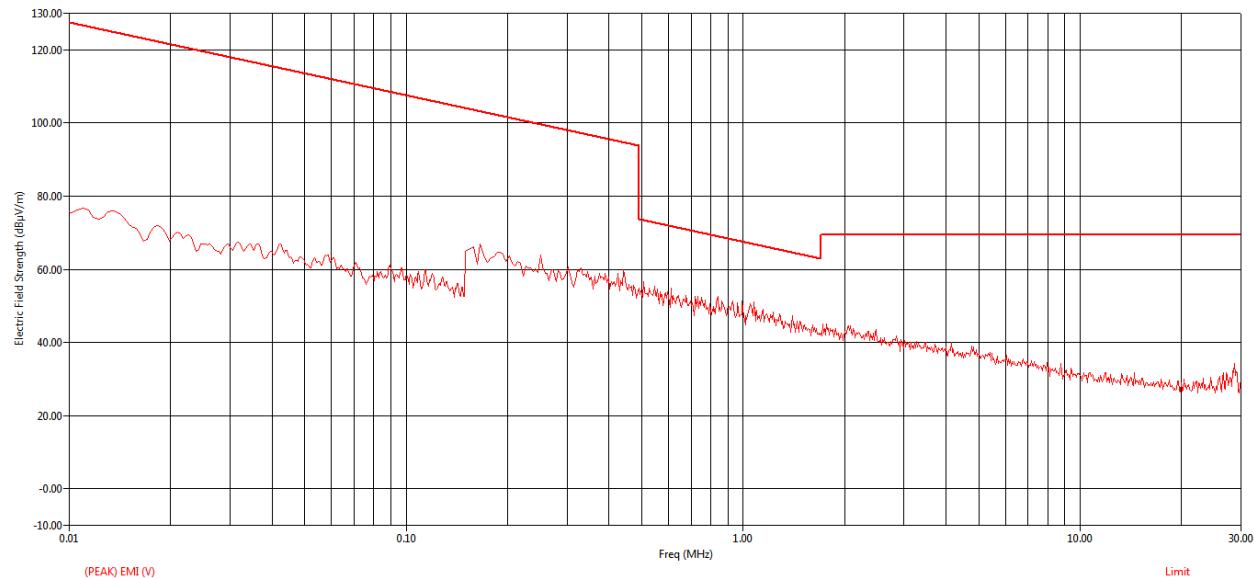



Figure 78: Peak RE from 9 kHz to 30MHz - Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
28.69	28.69	146.50	16.77	1.26	16.40	34.43	69.54	-35.11

Figure 79: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

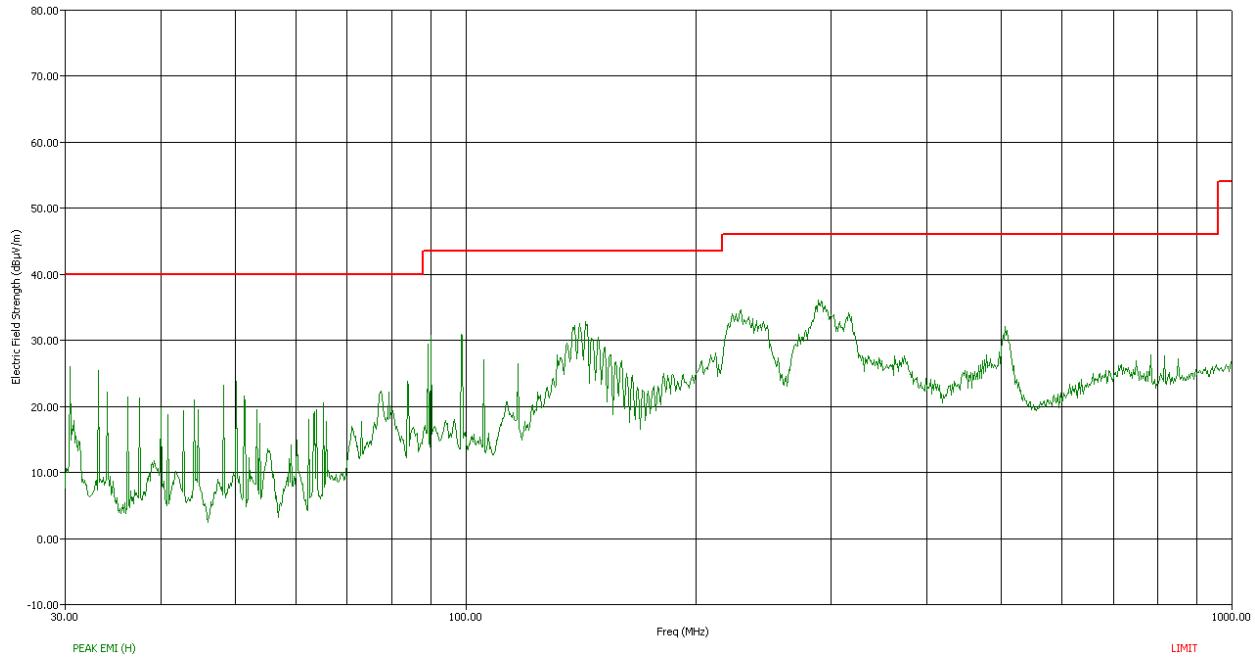

**Figure 80: Peak RE from 30MHz to 1GHz - Horizontal polarization**

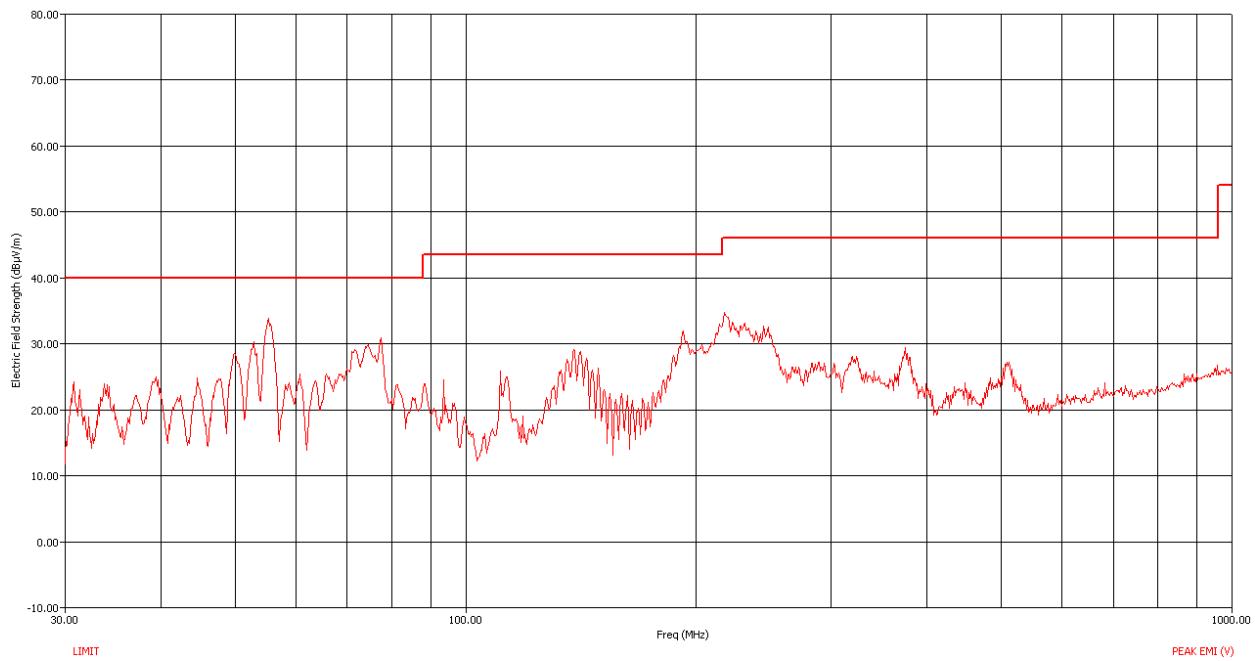

**Figure 81: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
39.44	39.47	V	199.90	108.00	44.34	1.37	9.37	32.20	22.88	40.00	-17.12
52.88	52.77	V	285.20	134.00	46.44	1.58	10.18	32.19	26.00	40.00	-14.00
55.36	55.36	V	179.90	100.00	52.45	1.61	9.90	32.19	31.77	40.00	-8.23
77.44	77.55	V	270.00	120.00	46.48	1.91	9.10	32.14	25.35	40.00	-14.65
89.96	89.93	H	50.90	168.00	23.62	2.07	9.06	32.12	2.63	43.52	-40.89
98.56	98.68	H	180.00	100.00	26.40	2.16	9.05	32.10	5.51	43.52	-38.01
98.64	98.69	H	206.40	107.00	24.84	2.16	9.05	32.10	3.95	43.52	-39.57
143.36	143.48	H	165.70	368.00	45.41	2.62	11.96	32.05	27.94	43.52	-15.58
192.25	192.32	V	183.70	101.00	40.16	3.02	13.83	32.01	25.01	43.52	-18.51
217.36	217.44	V	183.40	102.00	47.93	3.17	13.26	31.98	32.38	46.02	-13.64
228.52	228.42	H	345.40	137.00	48.87	3.25	12.78	31.97	32.93	46.02	-13.09
288.44	288.42	H	192.20	112.00	49.04	3.65	13.94	31.91	34.72	46.02	-11.30

Table 17: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz

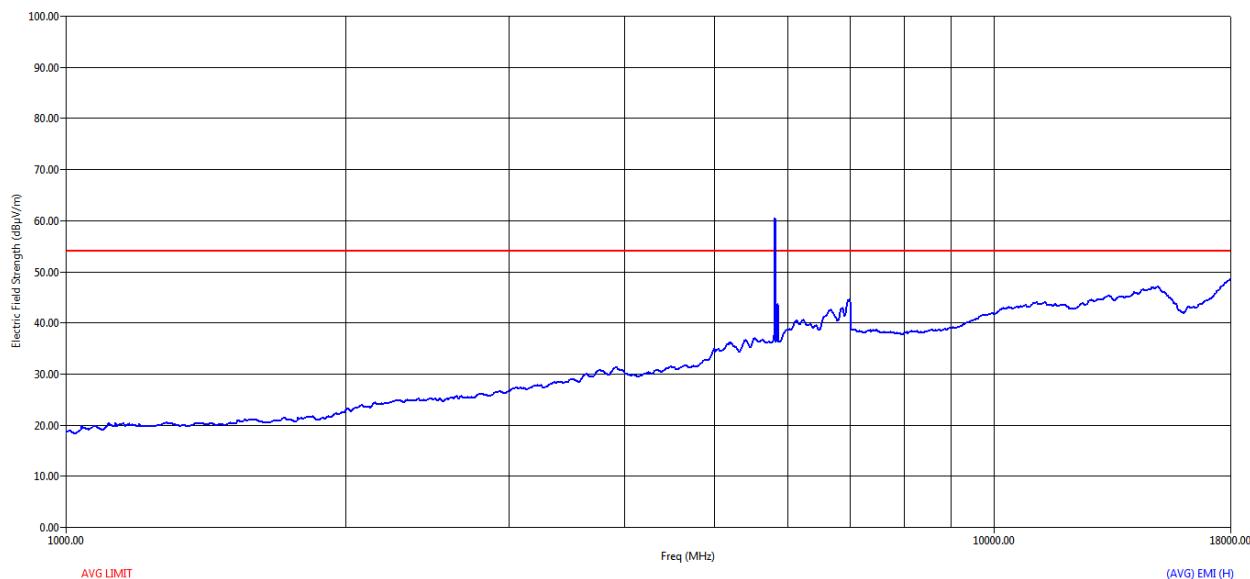


Figure 82: Average RE from 1GHz to 18GHz - Horizontal polarization


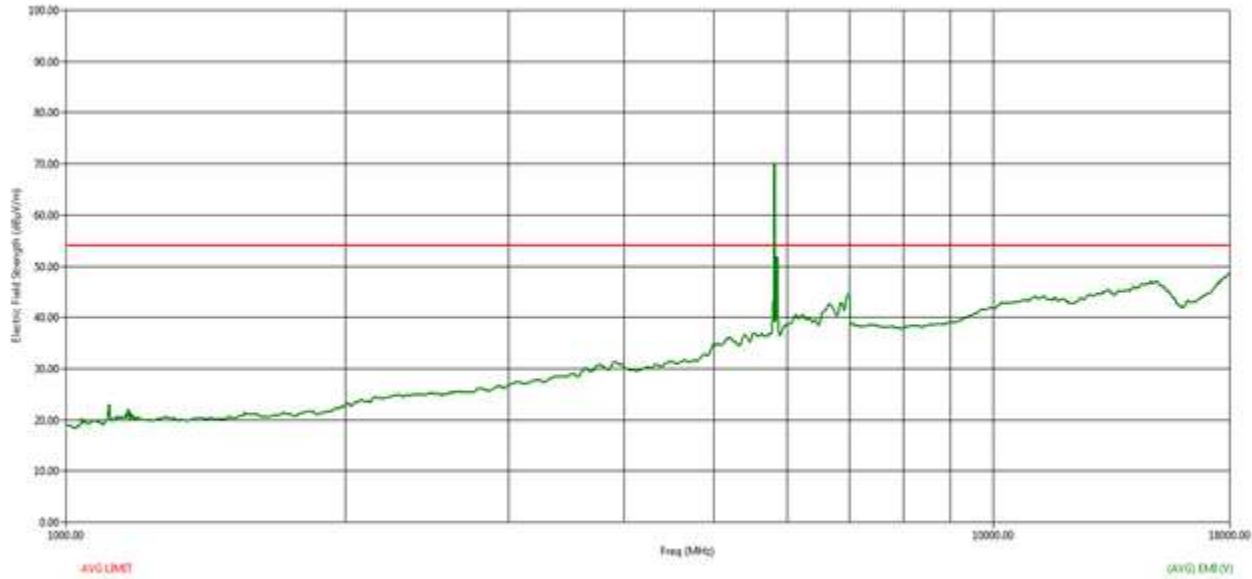



Figure 83: Average RE from 1GHz to 18GHz - Vertical polarization

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Test Angl (deg)	Test HB (nm)	(AVG) Zmax (dBuV)	Cable (dB)	Transducer (dB)	Preampli (dB)	(AVG) EMI (dBuV/m)	(AVG) Limit (dBuV/m)	(AVG) Margin AvL (dB)
5807.60	5807.00	H	180.00	101.00	30.91	3.91	29.41	26.58	35.67	51.98	-18.31
5807.60	5807.00	V	180.00	148.00	30.81	3.92	29.41	26.58	35.66	53.98	-18.32
5841.60	5841.60	V	180.00	136.00	11.31	3.94	29.48	26.59	36.10	53.98	-17.88
5842.00	5842.00	H	179.90	147.00	11.21	3.94	29.44	26.59	36.11	53.98	-17.81
6960.40	6960.40	V	162.10	167.00	35.25	4.20	31.48	26.50	43.43	33.98	-19.55


Table 18: Final Average table for RE from 1GHz to 18GHz

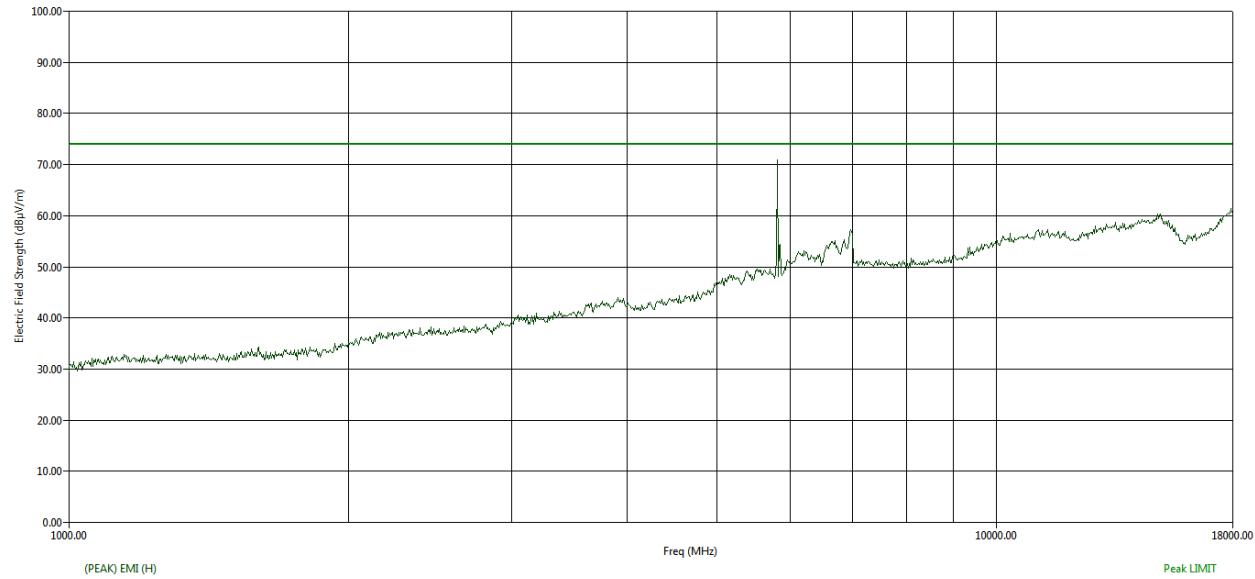


**Figure 84: Peak RE from 1GHz to 18GHz - Horizontal polarization**

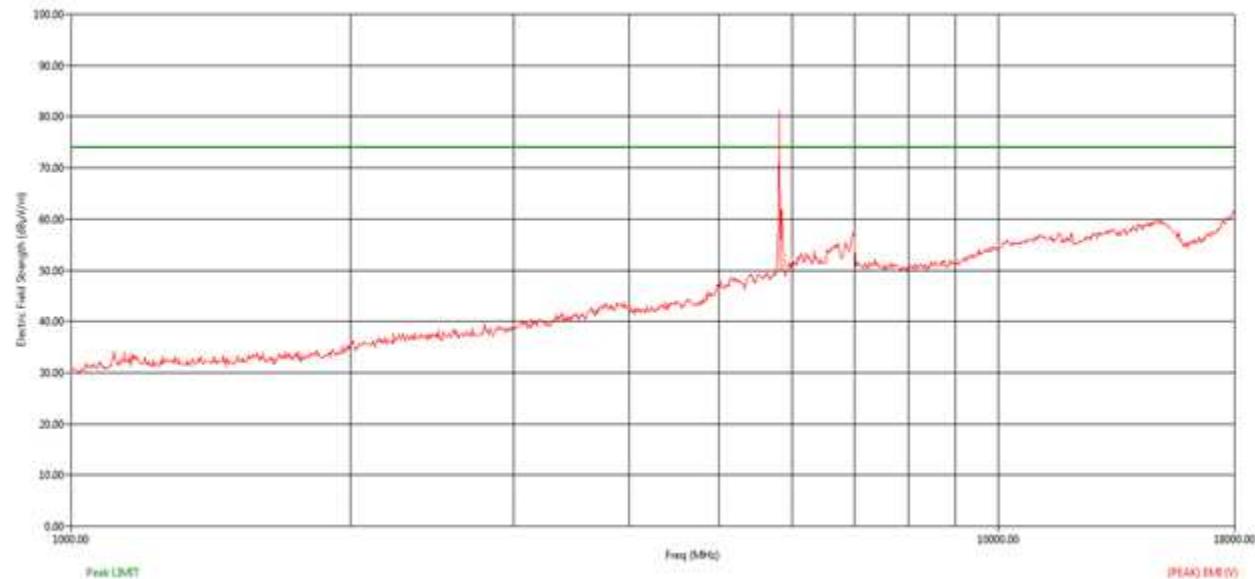


**Figure 85: Peak RE from 1GHz to 18GHz - Vertical polarization**

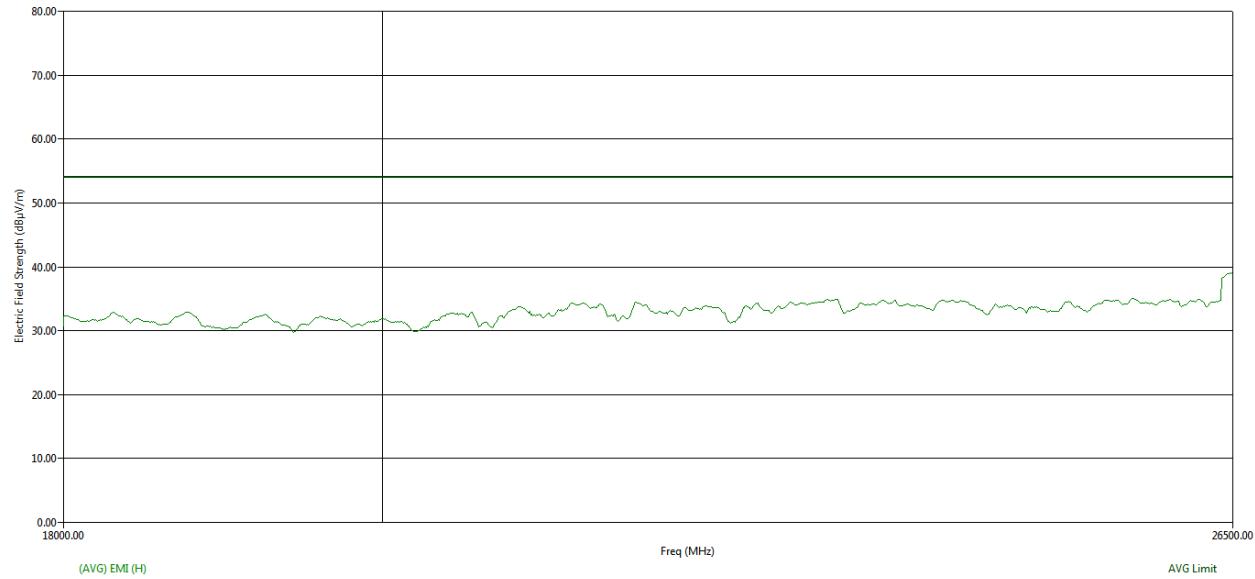


**Figure 86: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

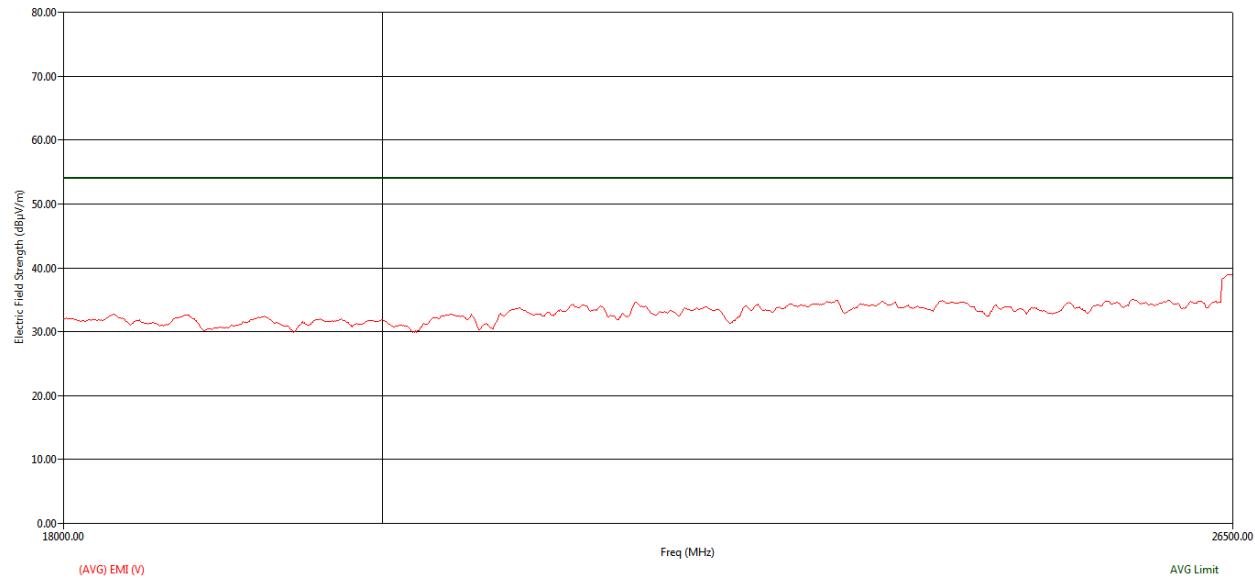


**Figure 87: Average RE from 18GHz to 26.5GHz - Vertical polarization**

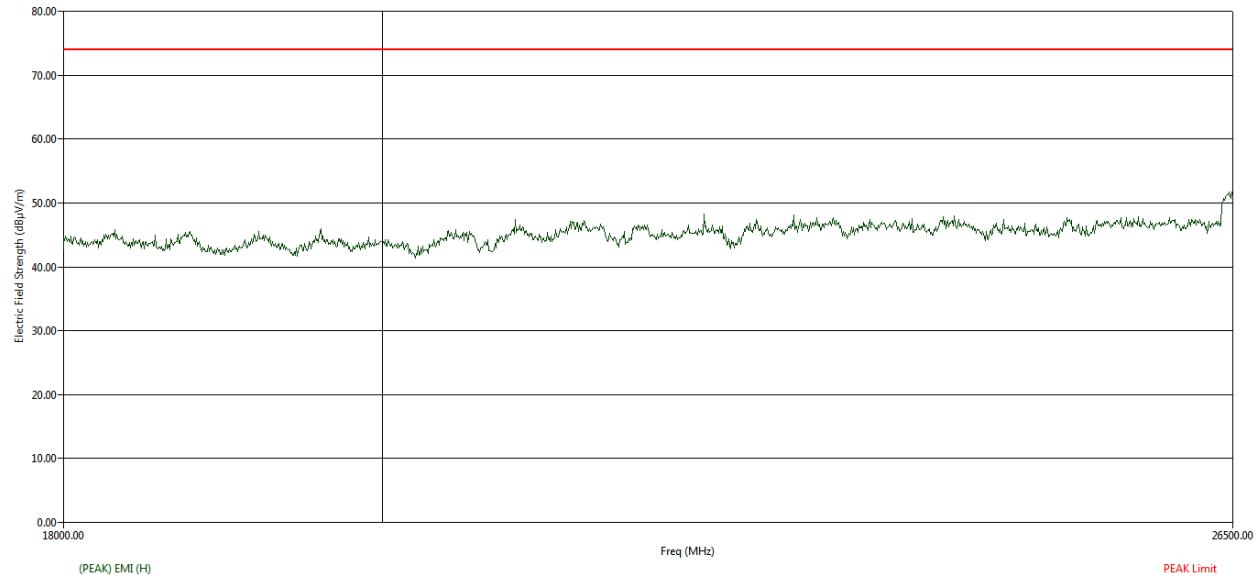


**Figure 88: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

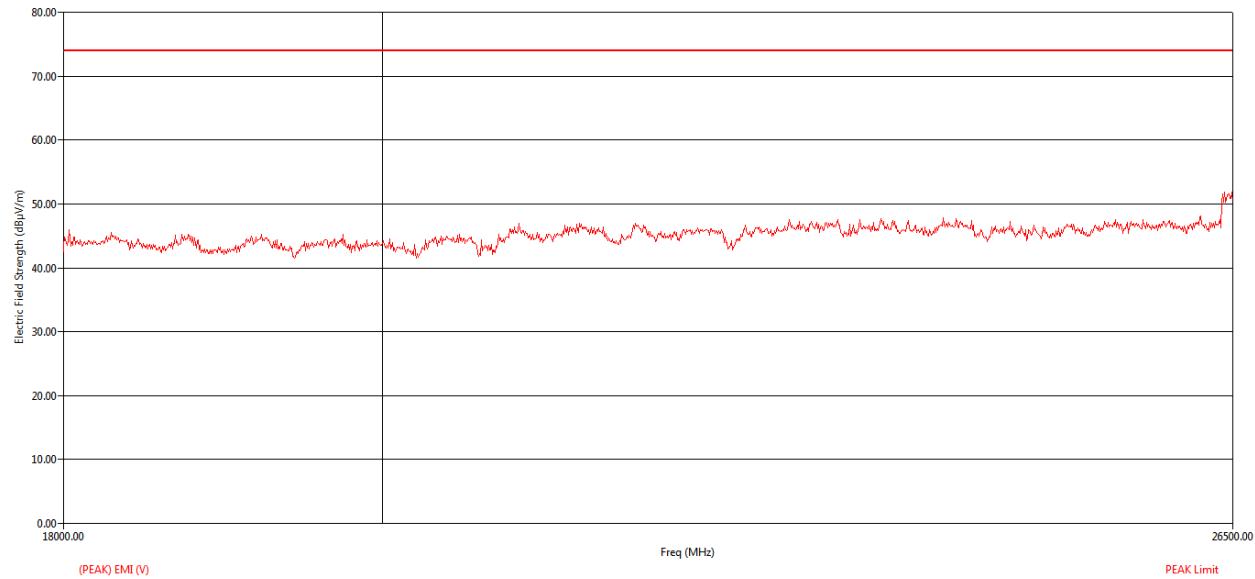


**Figure 89: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

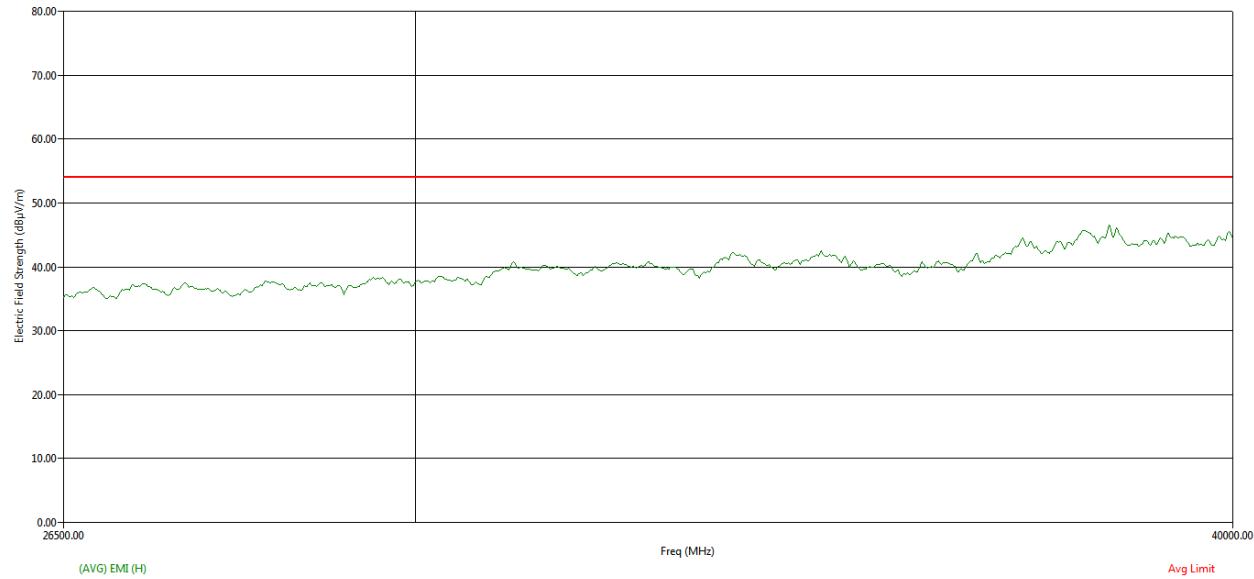


**Figure 90: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

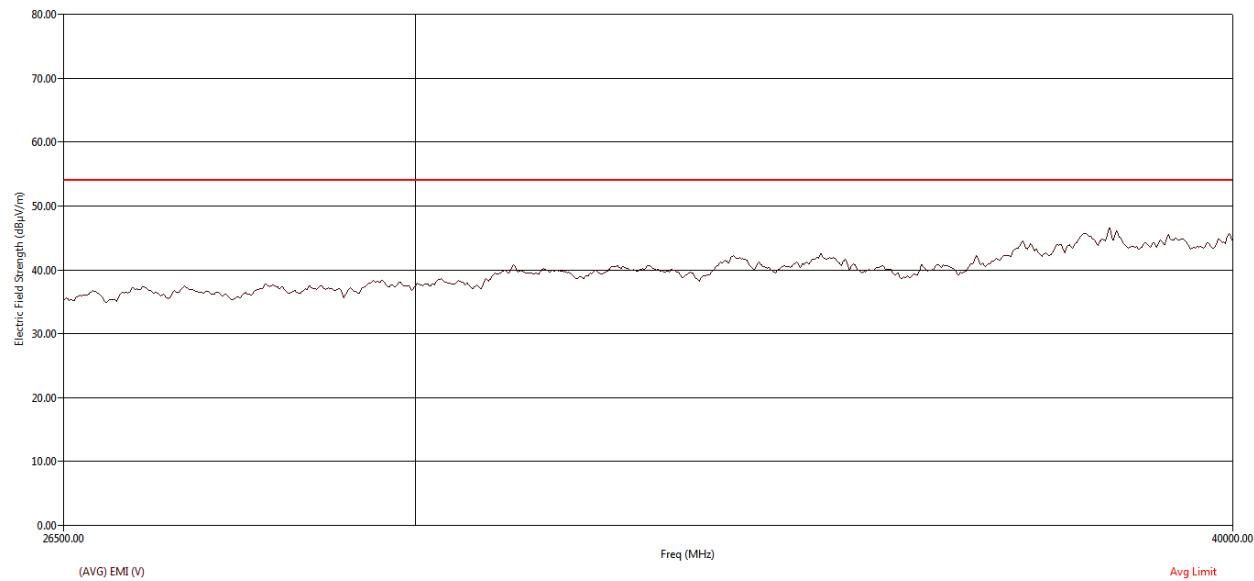

**Figure 91: Average RE from 26.5GHz to 40GHz - Vertical polarization**

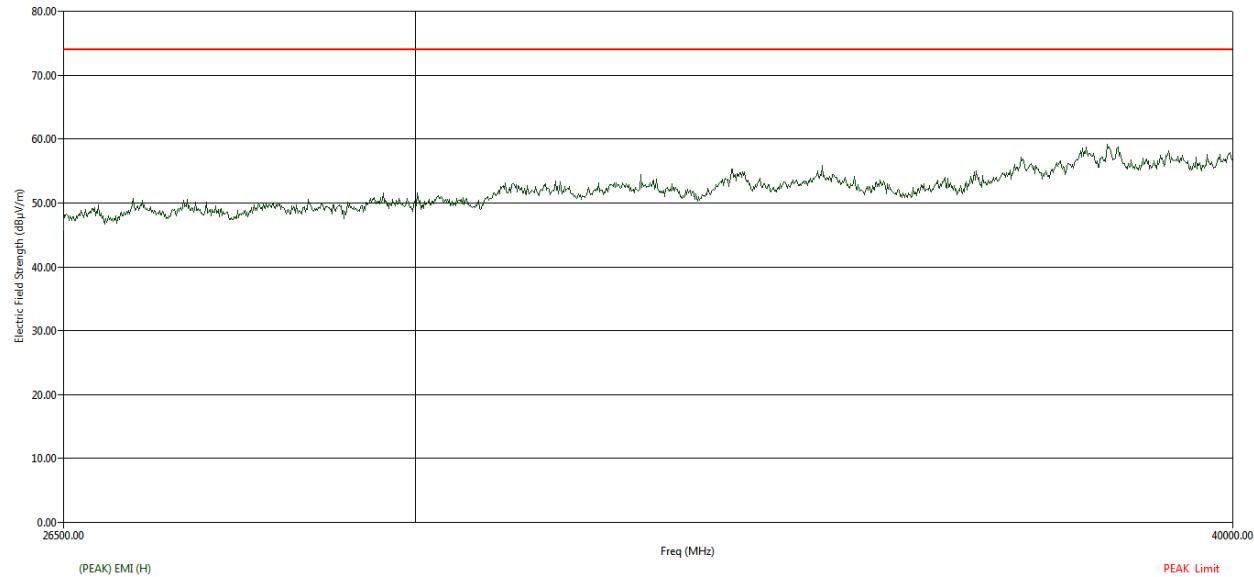

**Figure 92: Peak RE from 26.5GHz to 40GHz - Horizontal polarization**

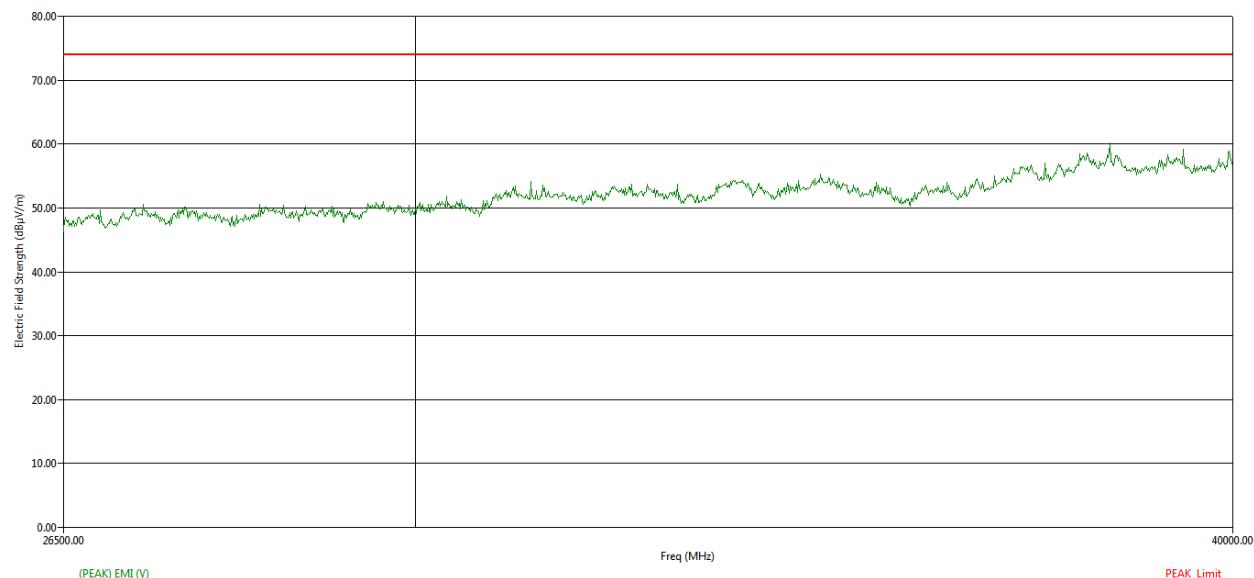

**Figure 93: Peak RE from 26.5GHz to 40GHz - Vertical polarization**

---

### 5.3.2.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 5 MHZ MODULATION BANDWIDTH

#### 5.3.2.7.1 LOW CHANNEL\_5735 MHZ

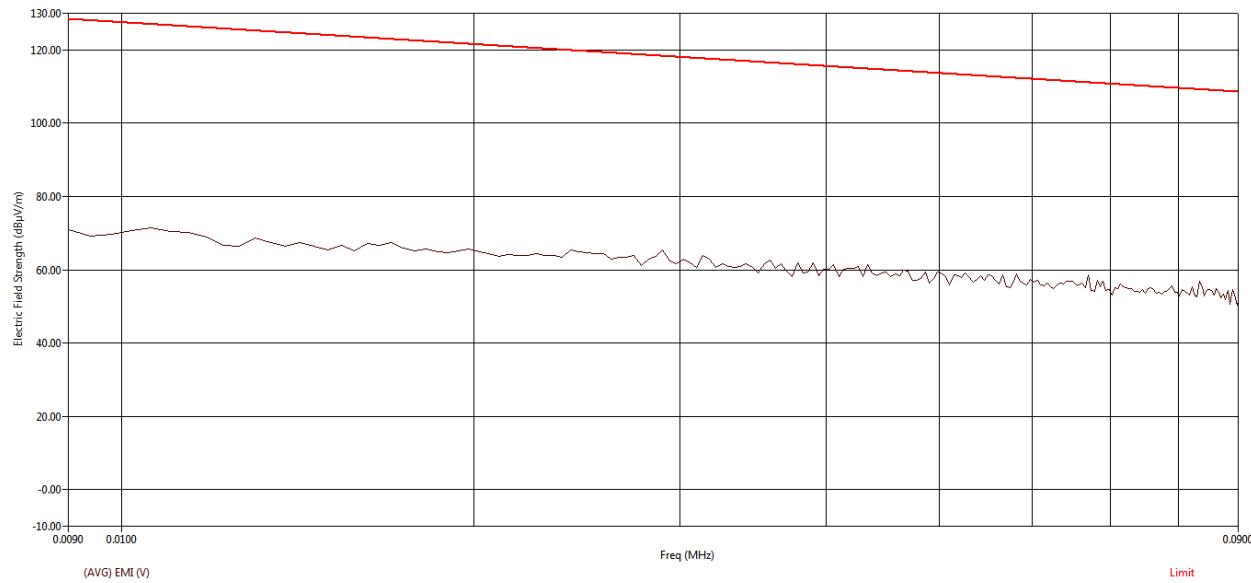


Figure 94: Average RE from 9 kHz to 90 kHz - Parallel

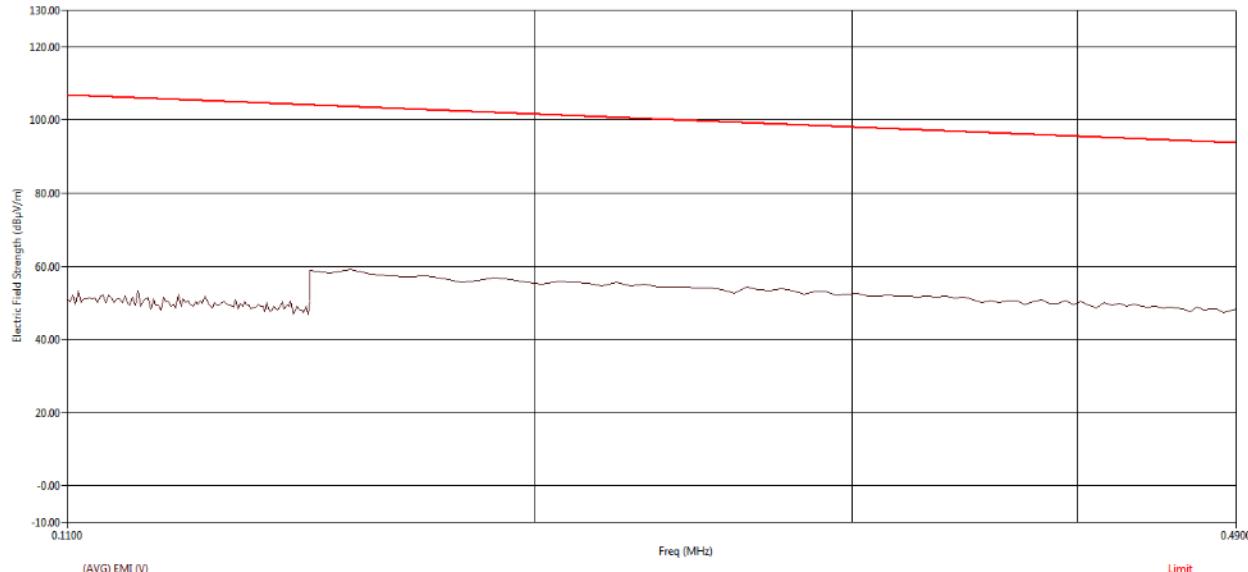


Figure 95: Average RE from 110 kHz to 490 kHz - Parallel

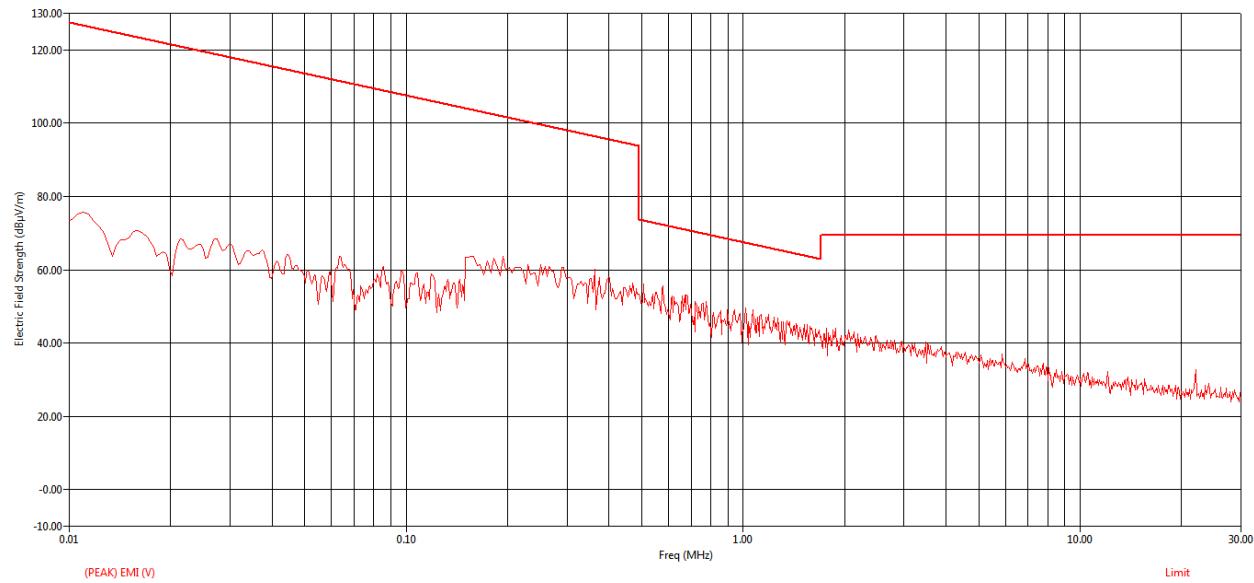


Figure 96: Peak RE from 9 kHz to 30MHz - Parallel

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
24.04	24.04	182.80	15.04	1.16	16.75	32.96	69.54	-36.59

Figure 97: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel

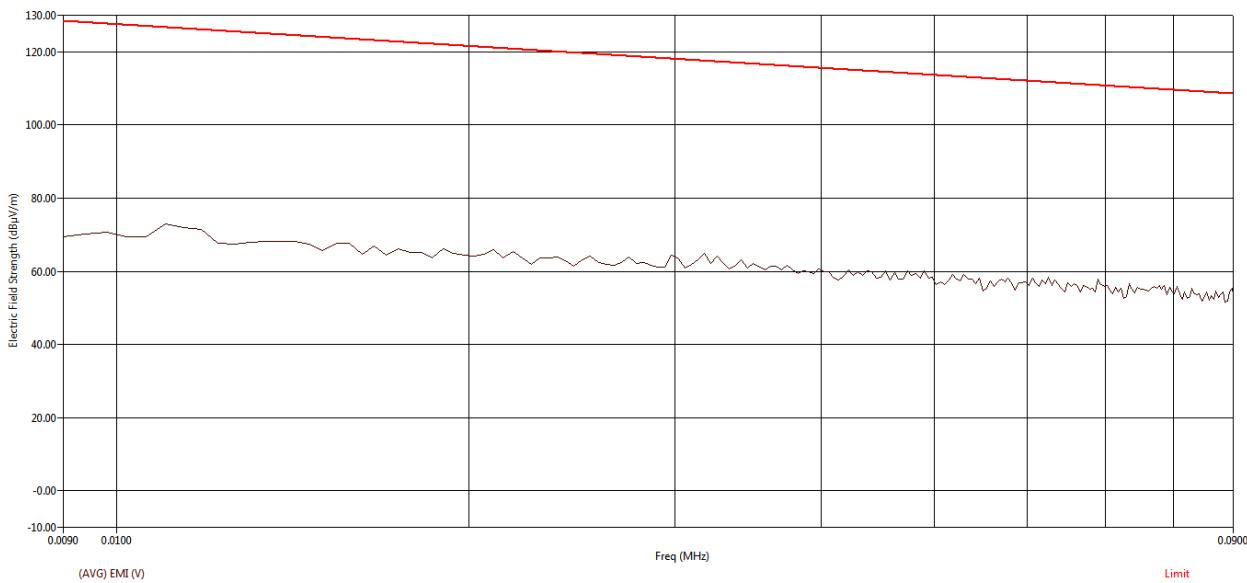


Figure 98: Average RE from 9 kHz to 90 kHz - Perpendicular

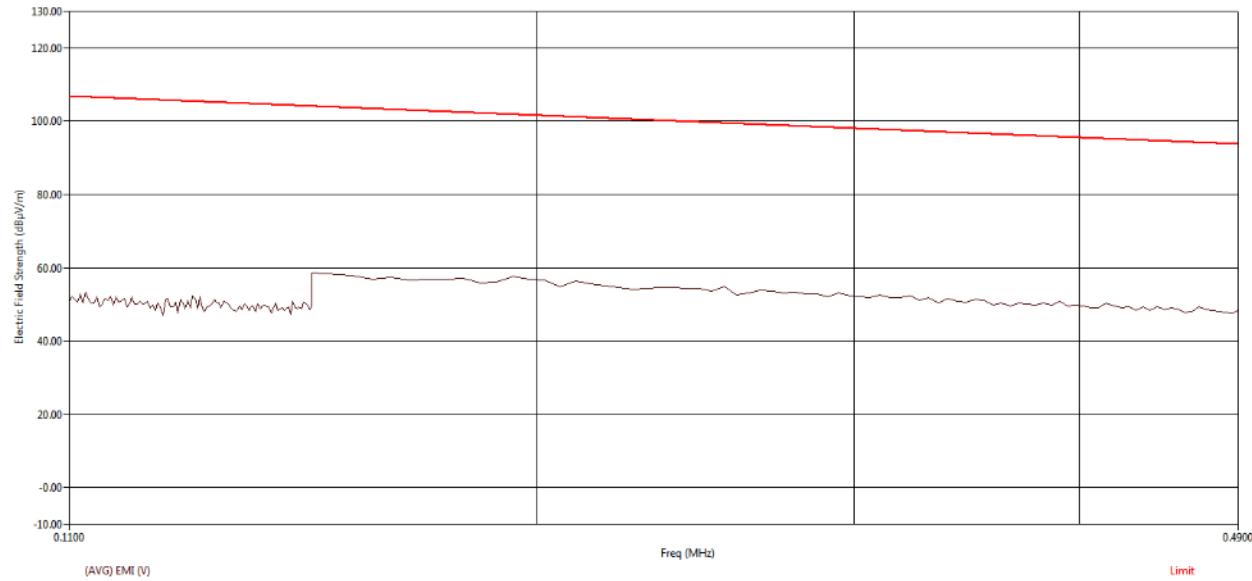


Figure 99: Average RE from 110 kHz to 490 kHz - Perpendicular


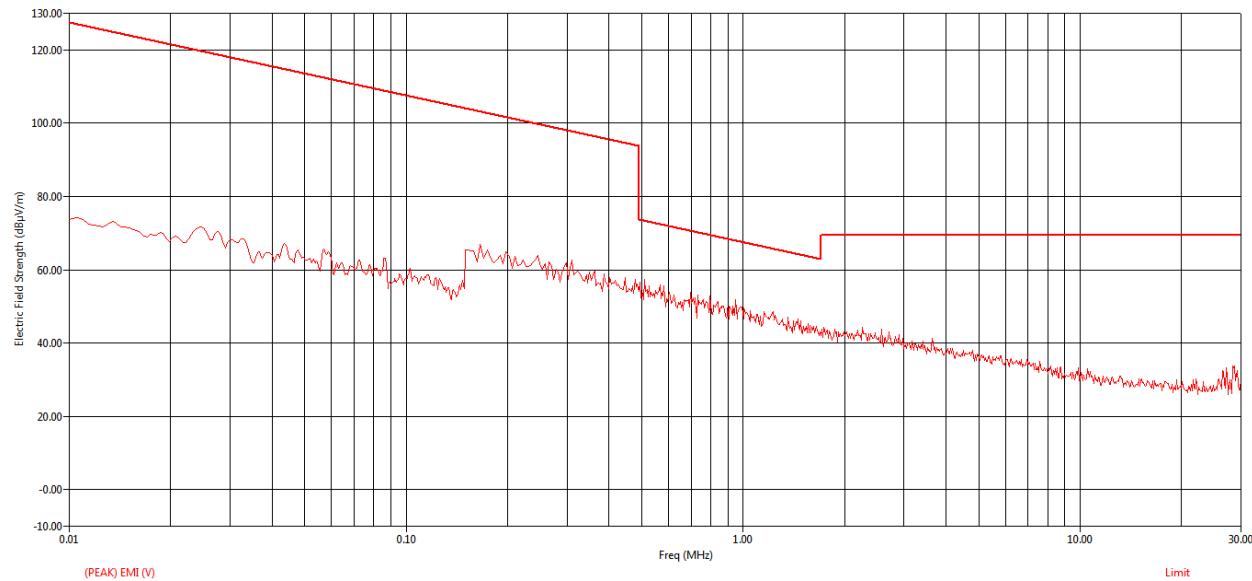



Figure 100: Peak RE from 9 kHz to 30MHz - Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
0.17	0.16	327.70	44.87	0.33	17.58	62.78	103.41	-40.63
28.17	28.17	292.50	5.93	1.25	16.44	23.62	69.54	-45.92

Figure 101: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

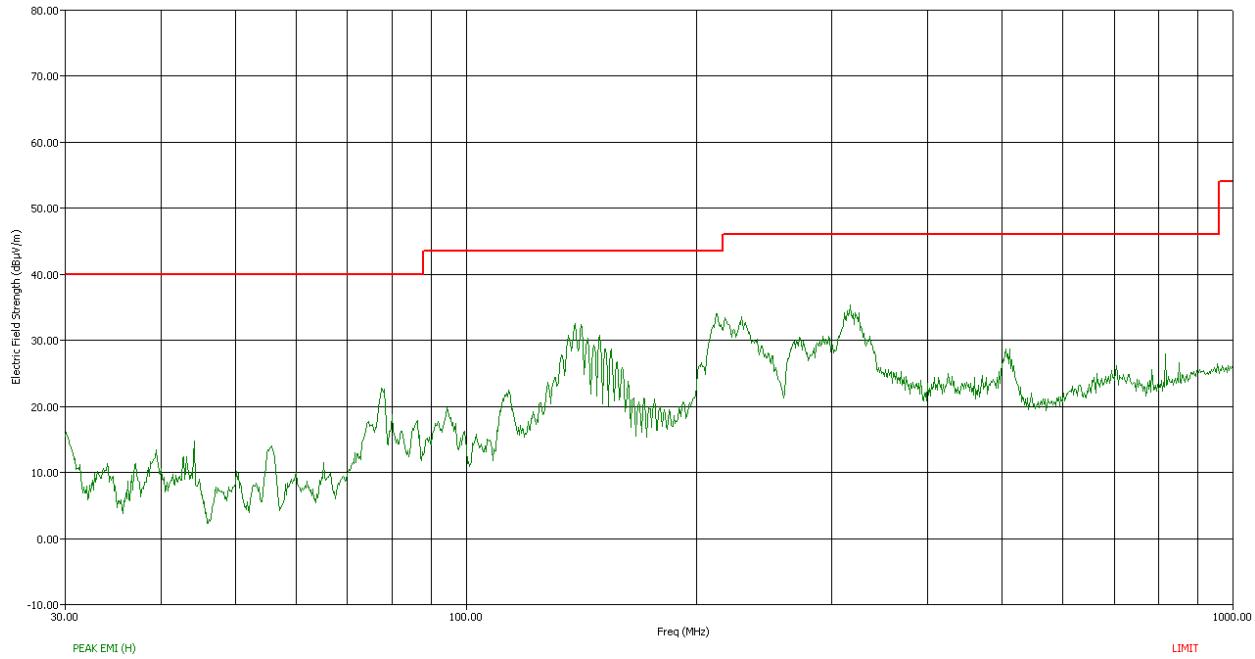


**Figure 102: Peak RE from 30MHz to 1GHz - Horizontal polarization**

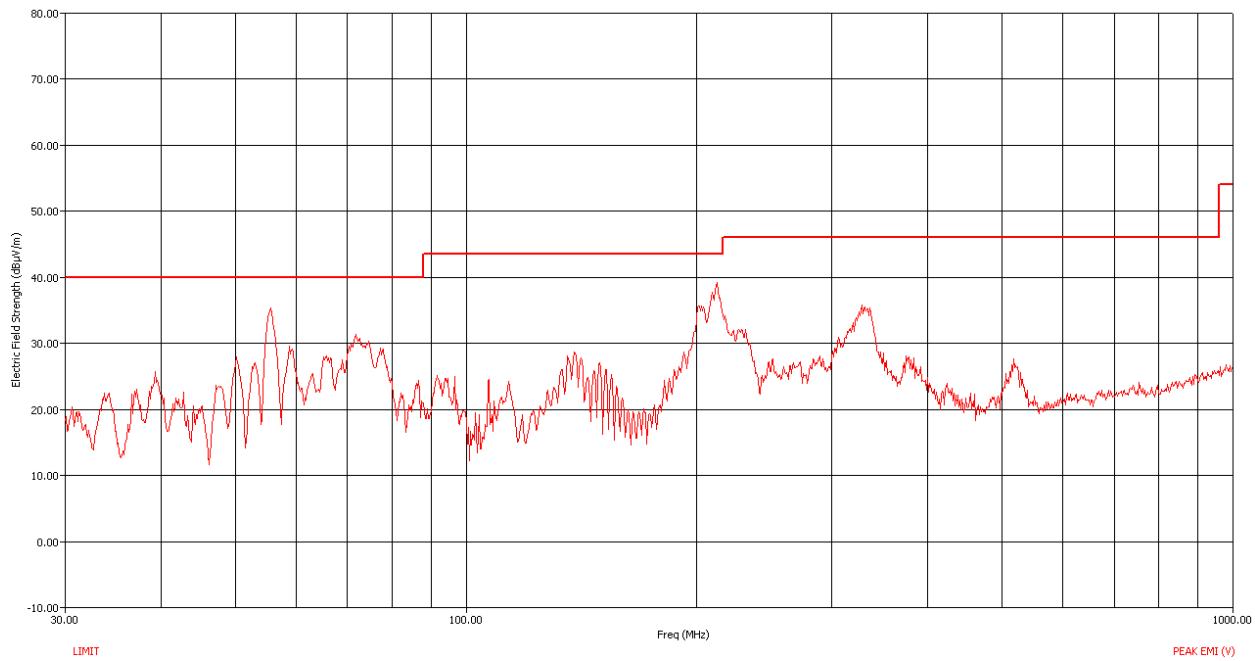


**Figure 103: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
55.60	55.56	V	172.80	230.00	50.79	1.61	9.88	32.18	30.09	40.00	-9.91
71.88	71.82	V	257.40	103.00	50.12	1.84	9.41	32.15	29.23	40.00	-10.77
138.72	138.66	H	340.70	237.00	50.14	2.56	11.75	32.05	32.40	43.52	-11.12
149.20	149.31	H	333.70	210.00	45.42	2.64	12.26	32.04	28.27	43.52	-15.25
212.16	212.11	V	322.00	100.00	46.78	3.14	13.51	31.99	31.44	43.52	-12.08
316.44	316.55	H	292.60	101.00	47.54	3.85	14.84	31.90	34.34	46.02	-11.68
328.16	328.12	V	264.80	101.00	41.45	3.90	15.07	31.90	28.53	46.02	-17.49

**Table 19: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz**

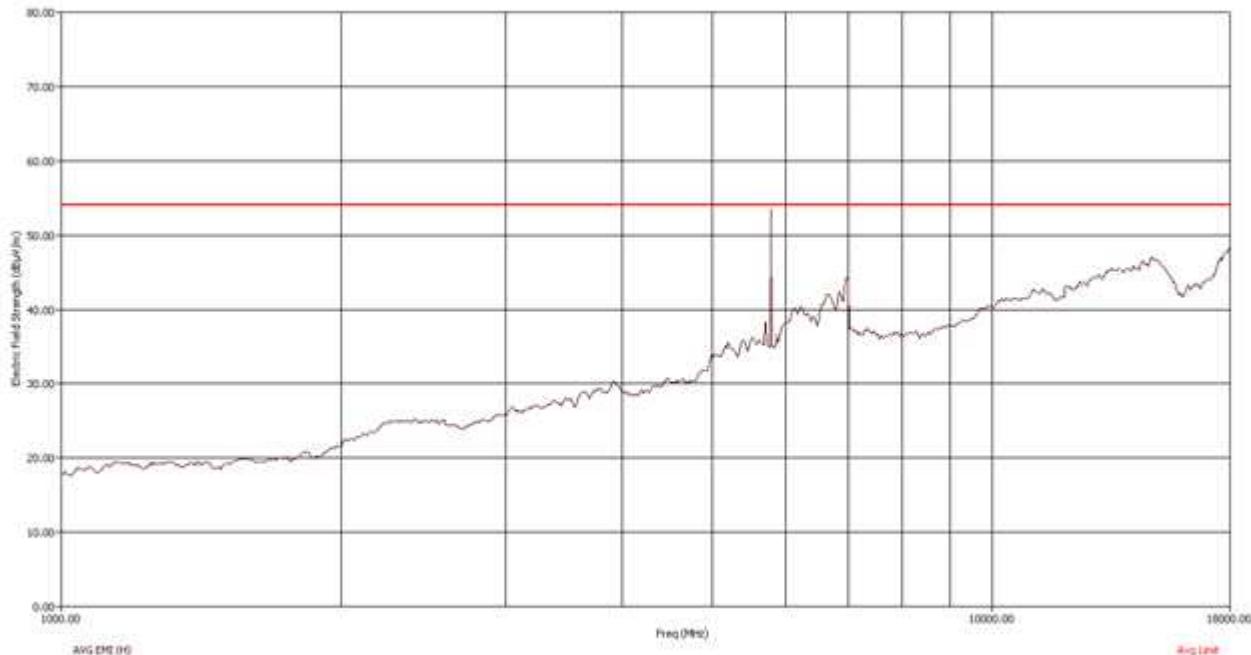


**Figure 104: Average RE from 1GHz to 18GHz - Horizontal polarization**

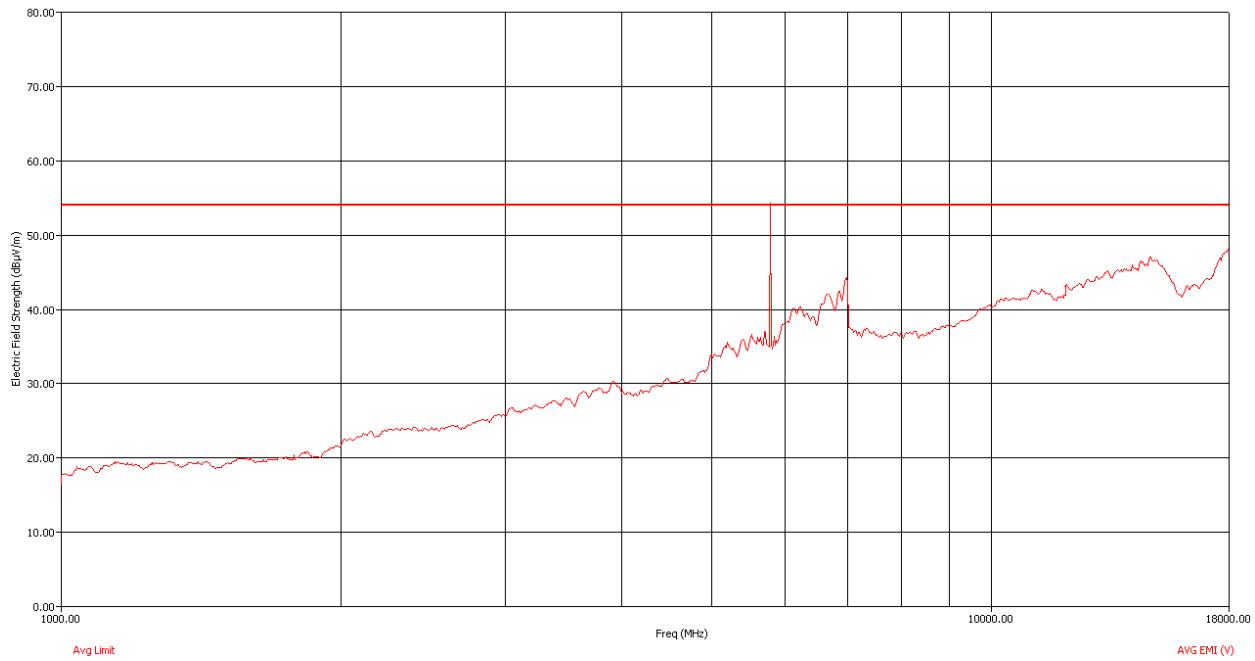


**Figure 105: Average RE from 1GHz to 18GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(AVG) Trace (dBμV)	Cable (dB)	Transducer (dB)	Preamp (dB)	(AVG) EMI (dBμV/m)	(AVG) Limit (dBμV/m)	(AVG) Margin AVL (dB)
6973.60	6973.60	H	217.10	198.00	36.13	3.89	32.52	28.50	44.04	53.98	-9.94
6979.60	6979.60	V	276.10	100.00	36.13	3.89	32.53	28.50	44.05	53.98	-9.93


**Table 20: Average table for RE from 1GHz to 18GHz**

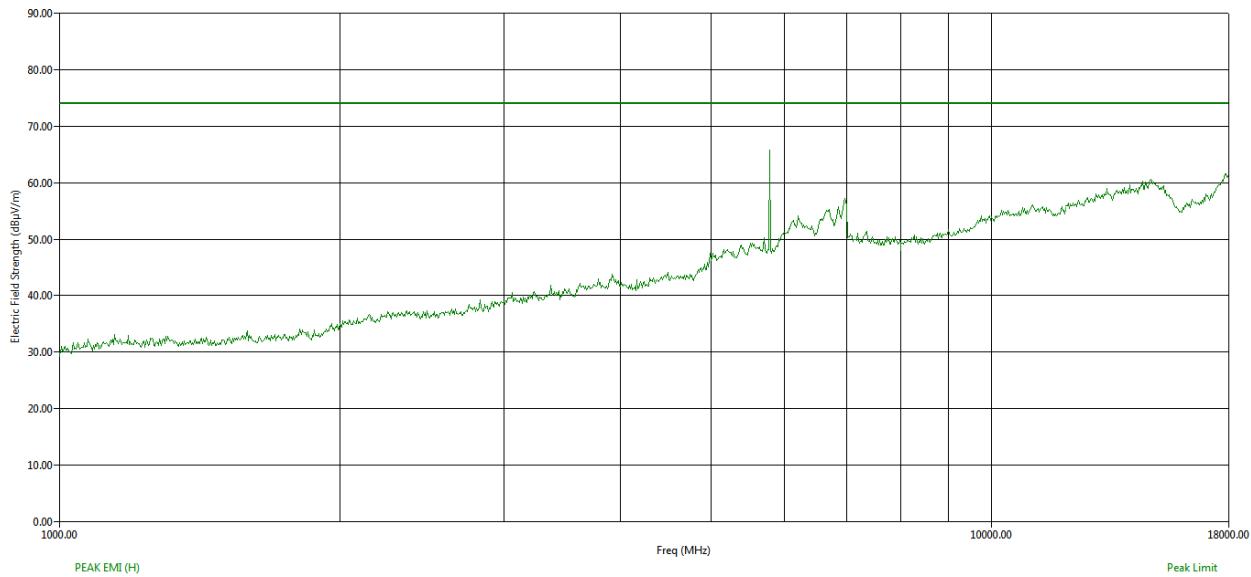


**Figure 106: Peak RE from 1GHz to 18GHz - Horizontal polarization**

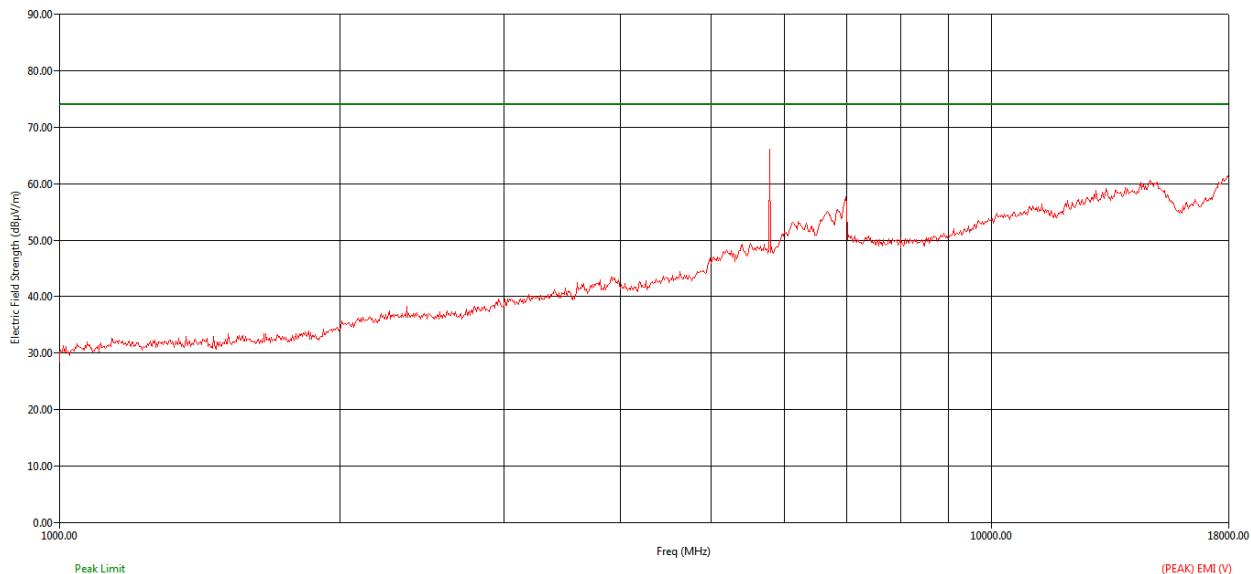


**Figure 107: Peak RE from 1GHz to 18GHz - Vertical polarization**

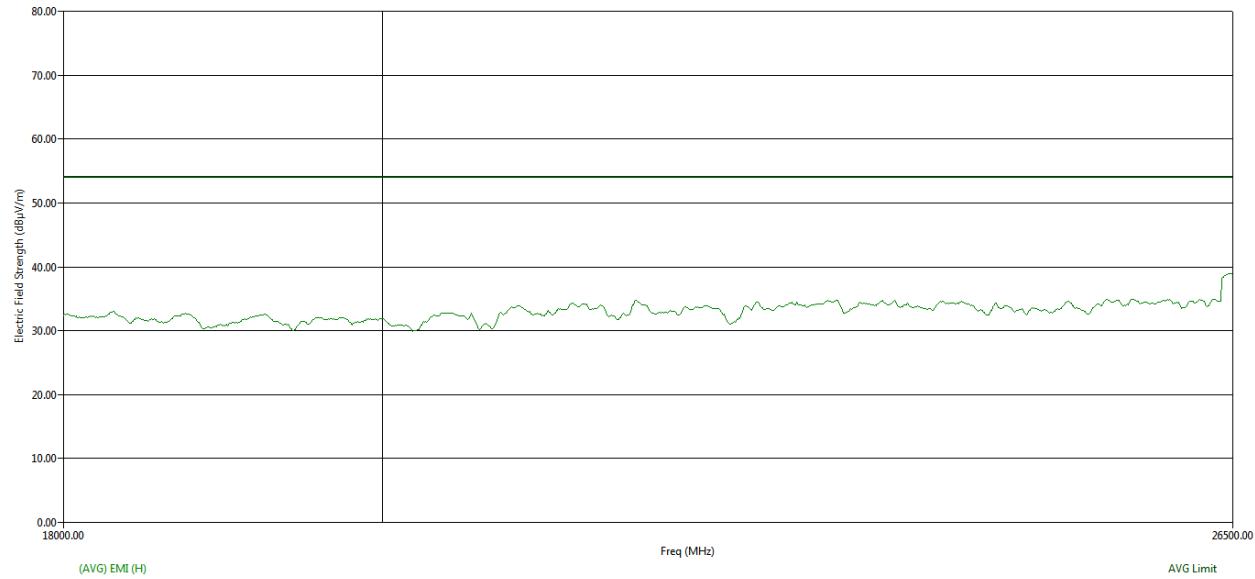


**Figure 108: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

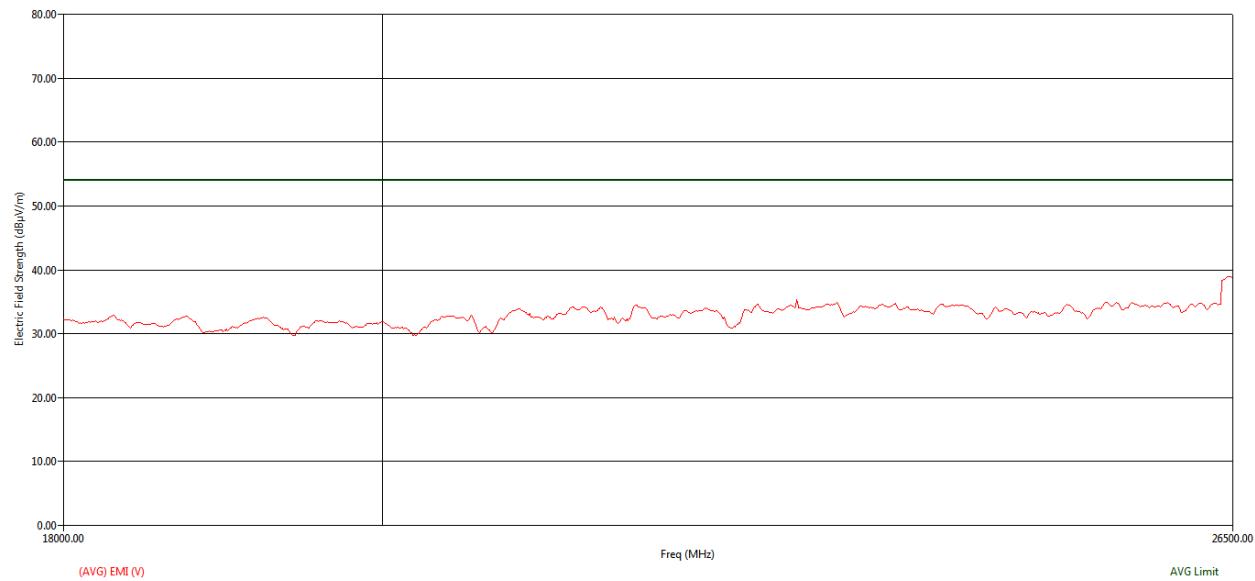


**Figure 109: Average RE from 18GHz to 26.5GHz - Vertical polarization**

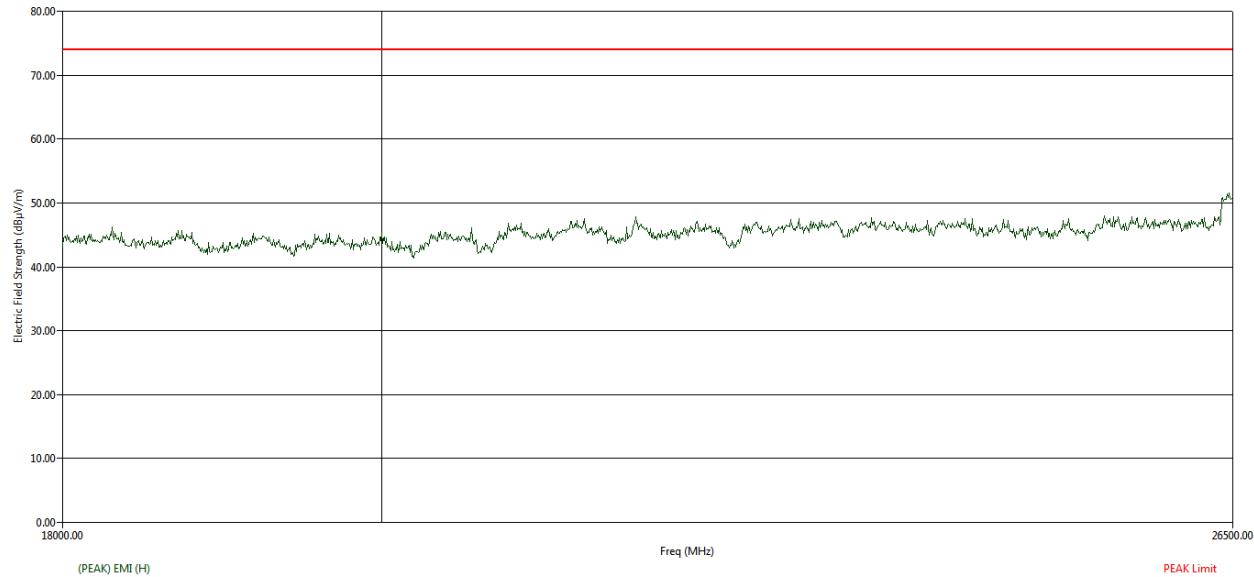


**Figure 110: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

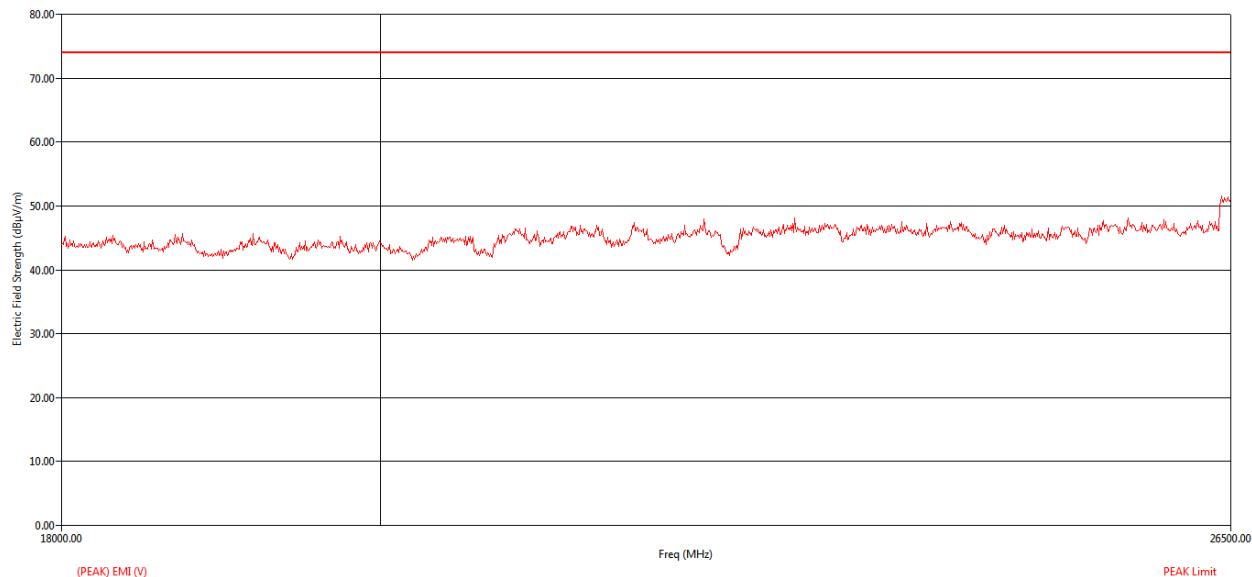


**Figure 111: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

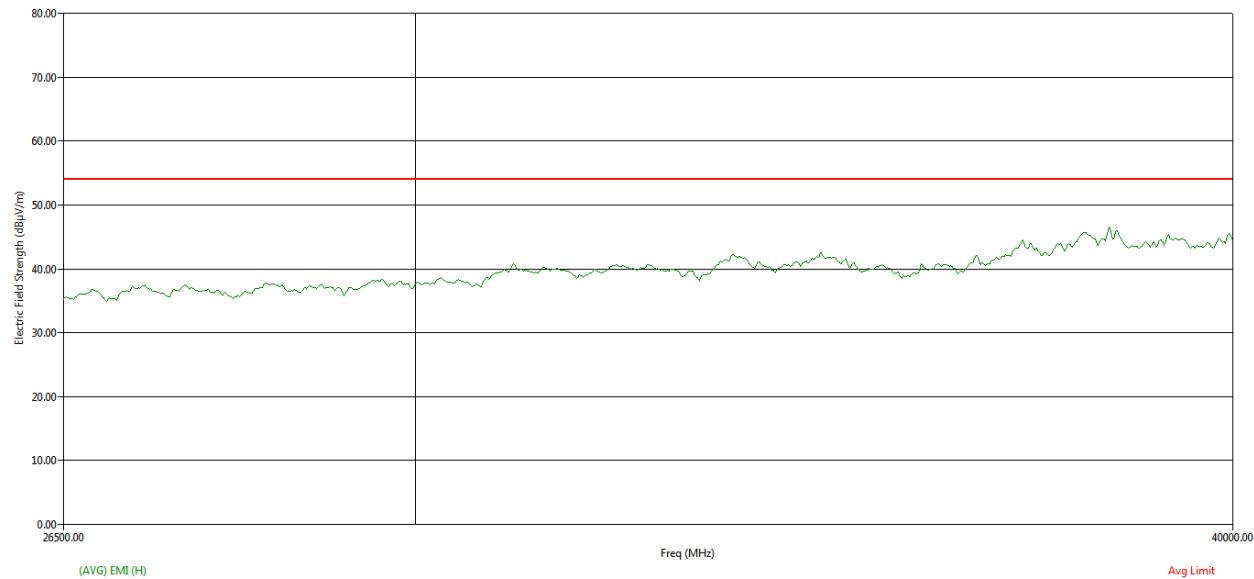


**Figure 112: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

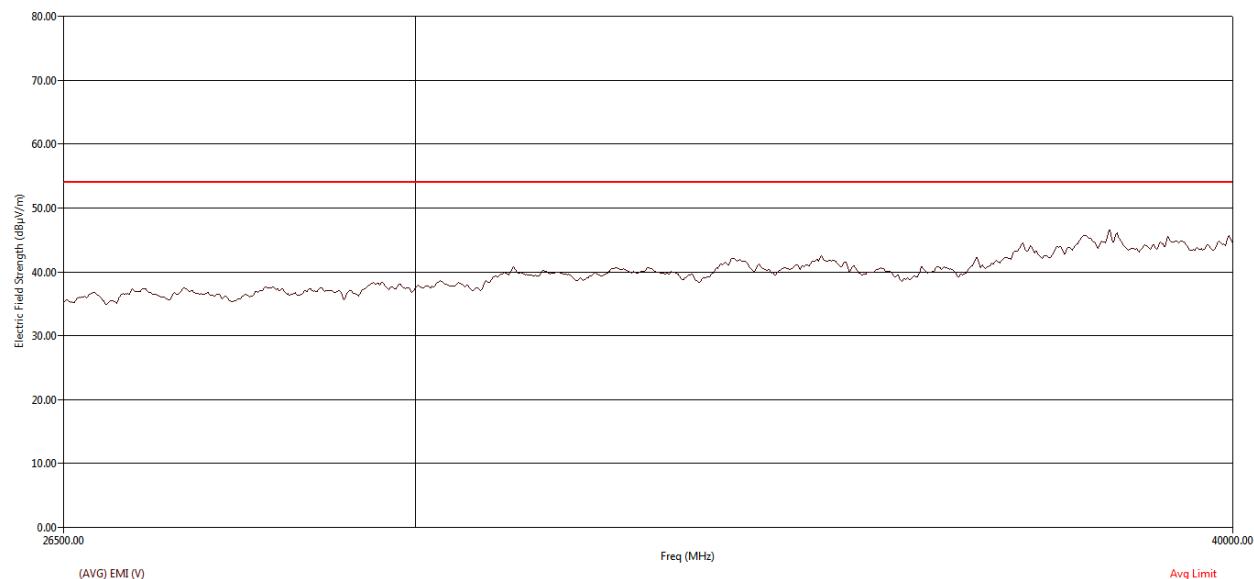

**Figure 113: Average RE from 26.5GHz to 40GHz - Vertical polarization**

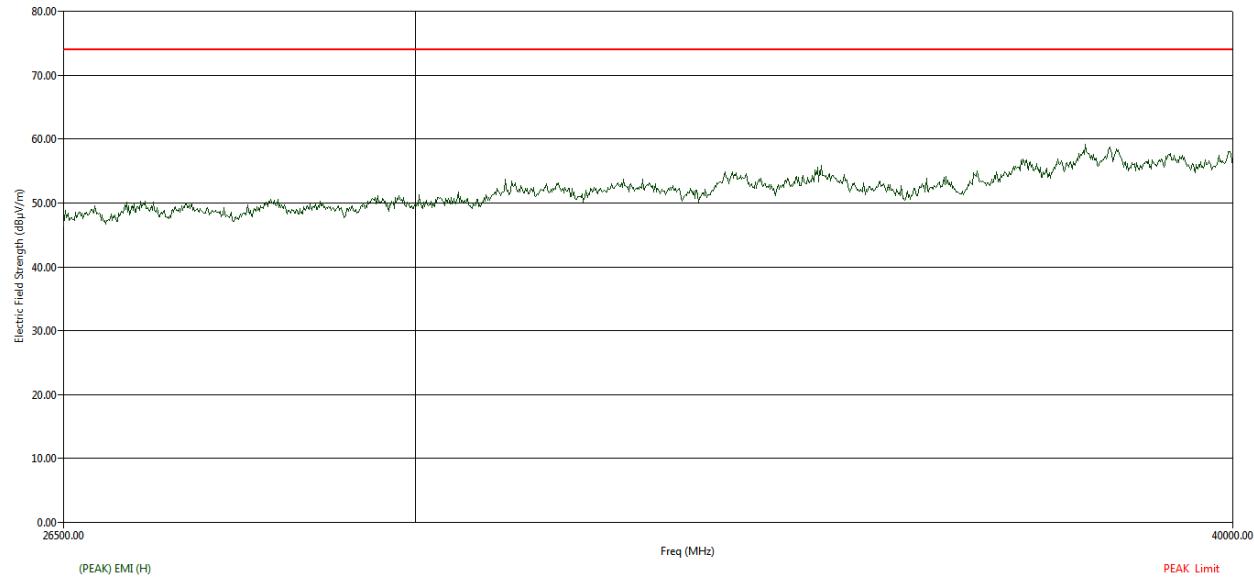

**Figure 114: Peak RE from 26.5GHz to 40GHz - Horizontal polarization**

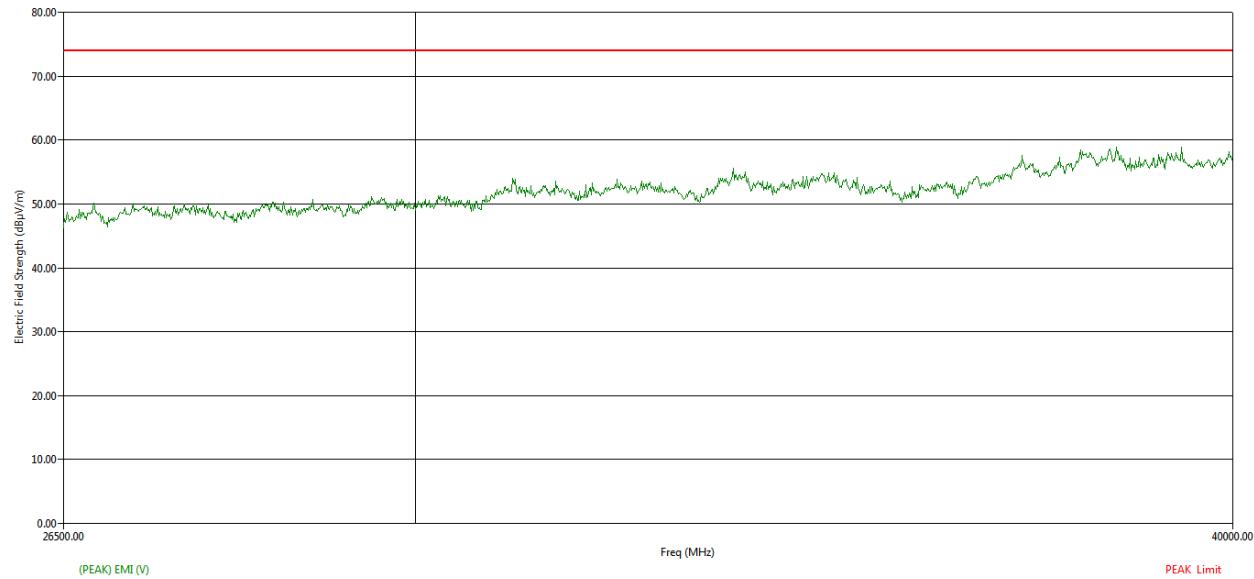

**Figure 115: Peak RE from 26.5GHz to 40GHz - Vertical polarization**

### 5.3.2.7.2 MID CHANNEL\_5775 MHz

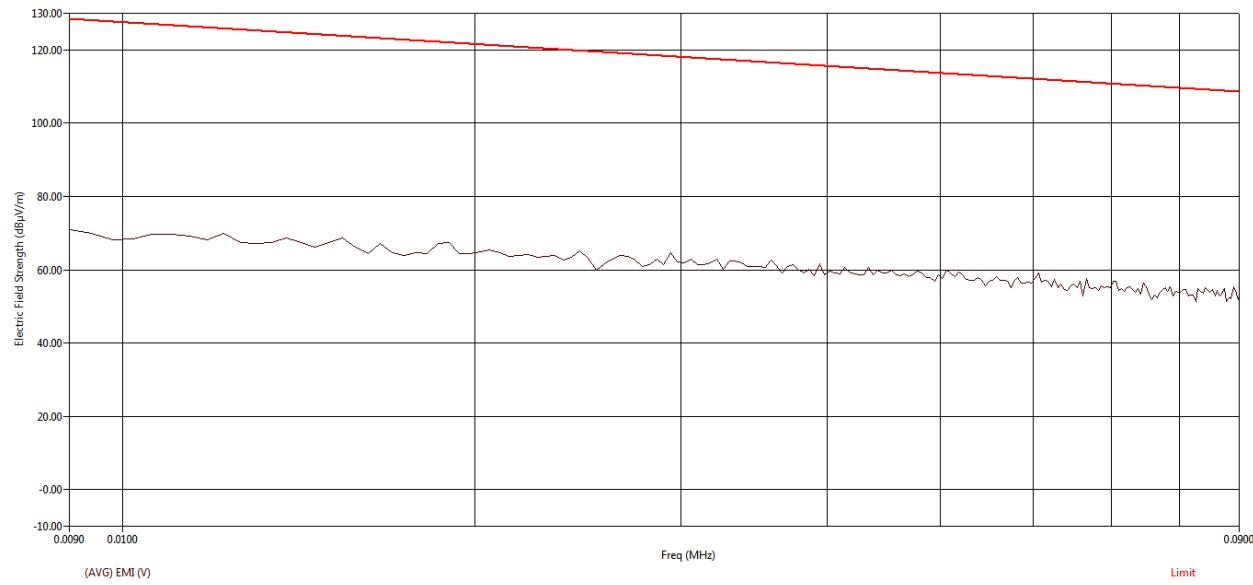


Figure 116: Average RE from 9 kHz to 90 kHz - Parallel


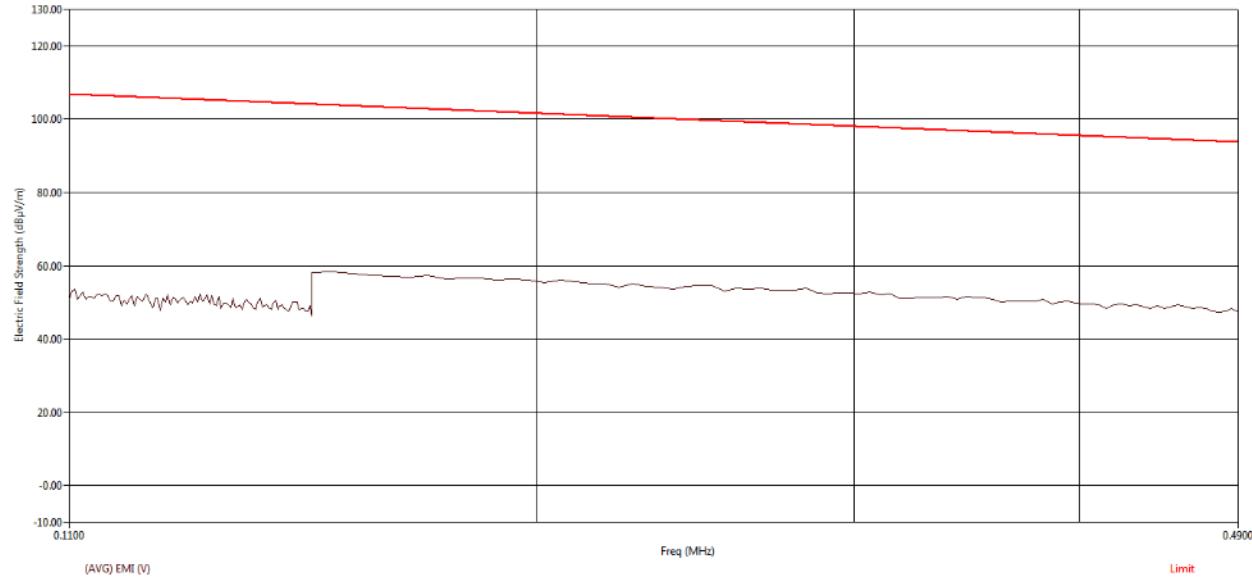



Figure 117: Average RE from 110 kHz to 490 kHz - Parallel

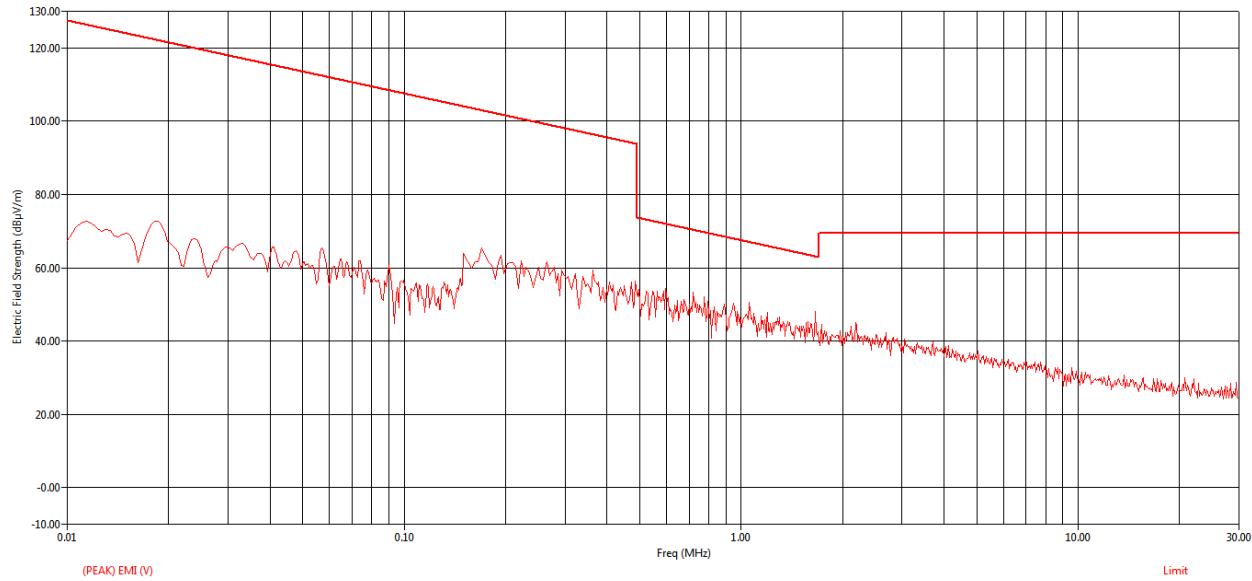

**Figure 118: Peak RE from 9 kHz to 30MHz - Parallel**

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
22.00	22.00	220.30	12.85	1.13	16.87	30.85	69.54	-38.70

**Figure 119: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel**

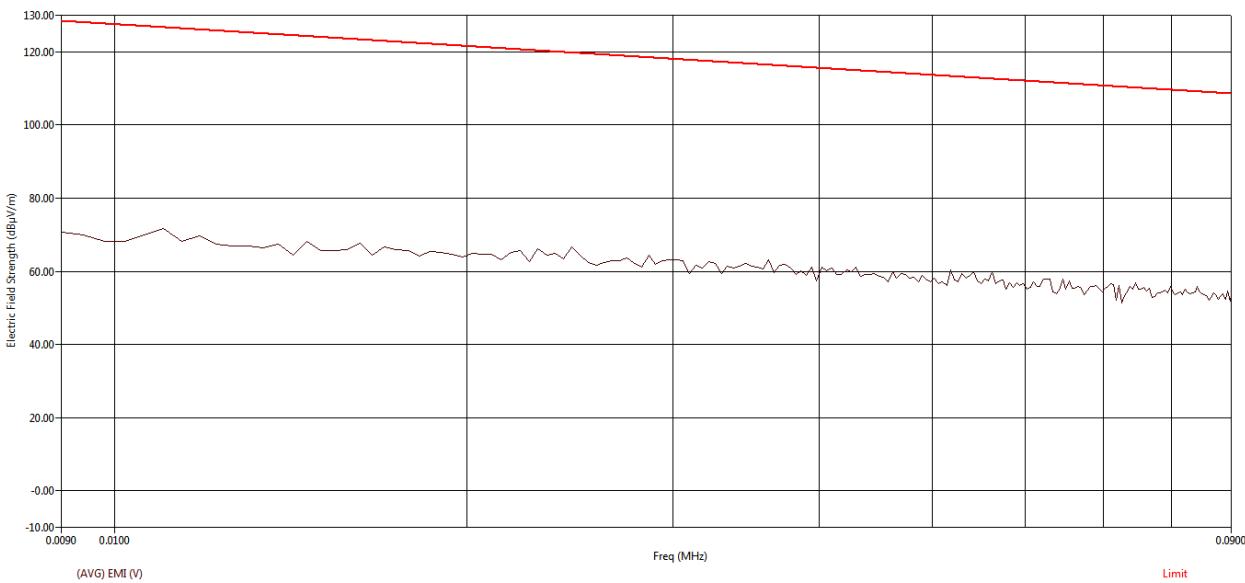

**Figure 120: Average RE from 9 kHz to 90 kHz - Perpendicular**

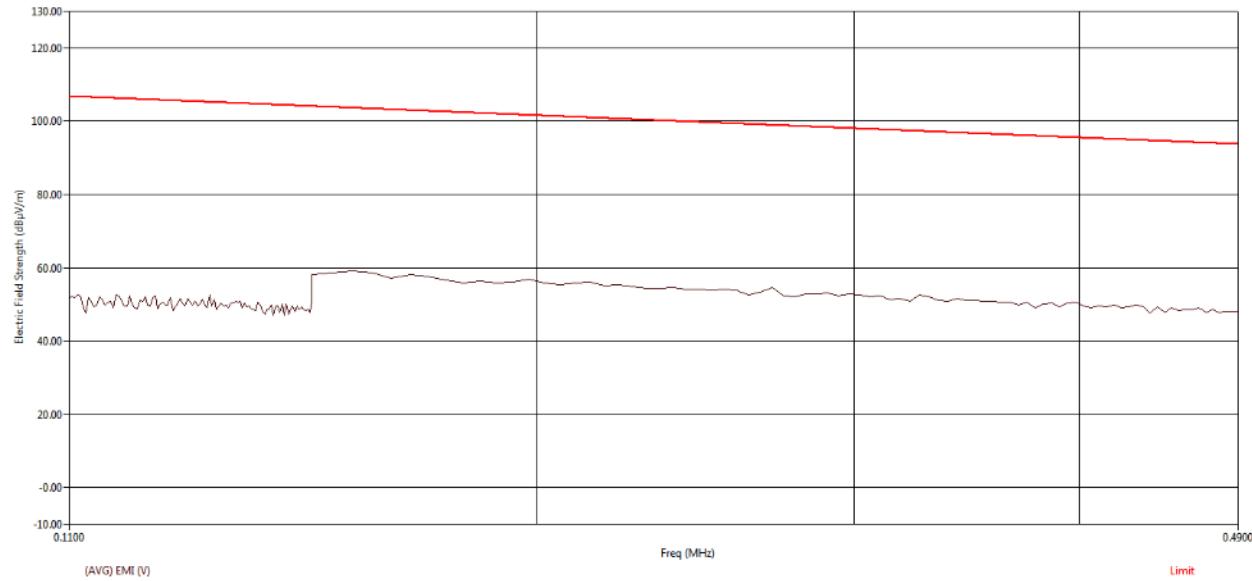


Figure 121: Average RE from 110 kHz to 490 kHz - Perpendicular


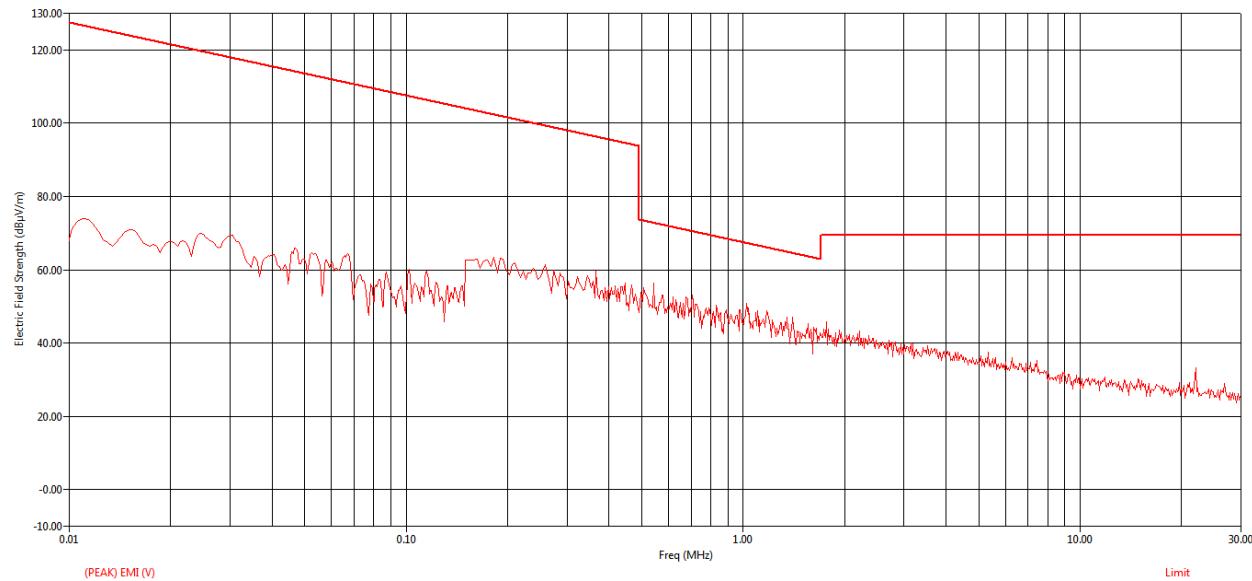



Figure 122: Peak RE from 9 kHz to 30MHz-Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
0.16	0.15	184.60	45.54	0.32	17.60	63.47	104.08	-40.61
28.71	28.70	99.10	2.88	1.26	16.40	20.54	69.54	-49.00

Figure 123: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

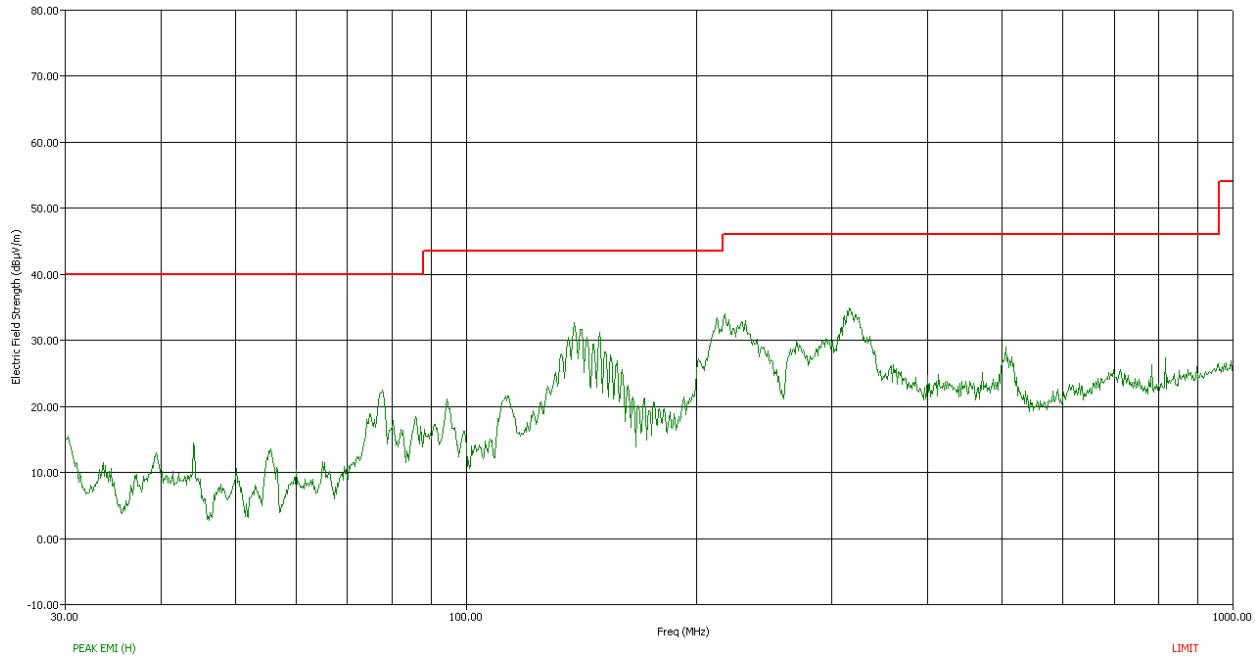


**Figure 124: Peak RE from 30MHz to 1GHz - Horizontal polarization**

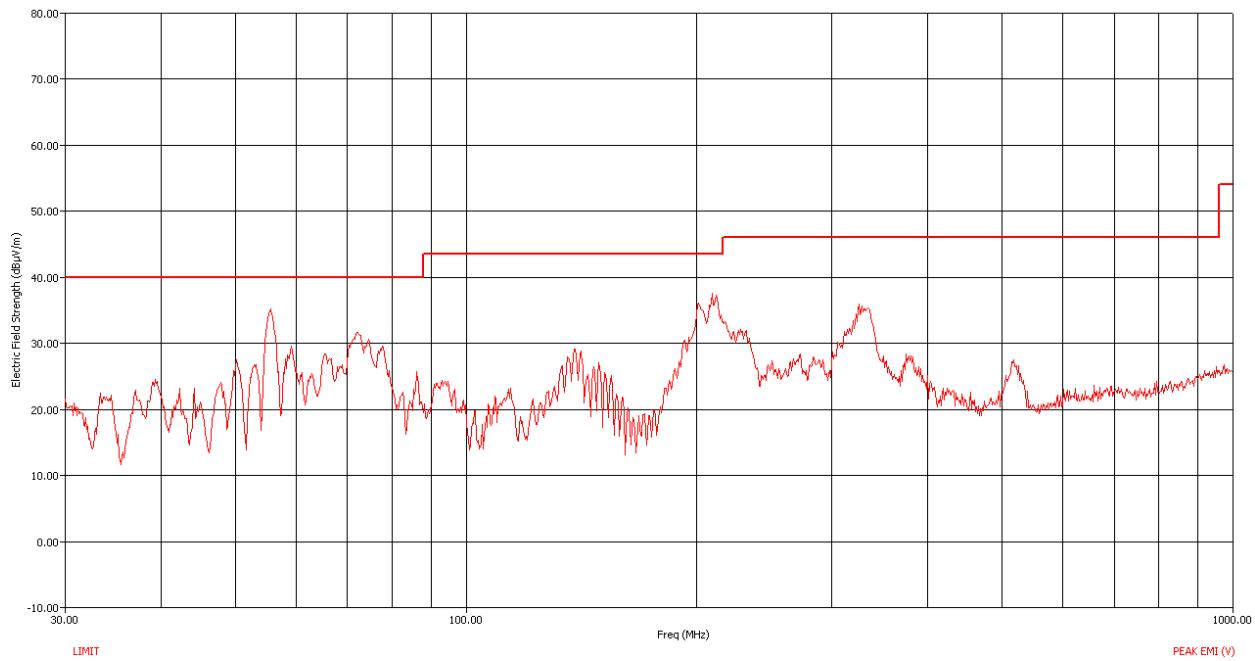


**Figure 125: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
55.60	55.70	V	180.00	100.00	54.81	1.61	9.86	32.18	34.10	40.00	-5.90
72.32	72.31	V	82.00	237.00	44.92	1.85	9.38	32.15	24.01	40.00	-15.99
138.24	138.25	H	342.50	221.00	49.62	2.55	11.74	32.05	31.86	43.52	-11.66
149.40	149.29	H	336.60	208.00	45.53	2.64	12.26	32.04	28.39	43.52	-15.13
209.36	209.36	V	215.10	100.00	50.41	3.16	13.63	31.99	35.21	43.52	-8.31
217.44	217.51	H	9.40	176.00	45.62	3.17	13.26	31.98	30.07	46.02	-15.95
315.84	315.73	H	295.70	103.00	44.76	3.84	14.83	31.90	31.53	46.02	-14.49
324.96	324.98	V	259.20	100.00	43.76	3.87	15.01	31.90	30.74	46.02	-15.28

**Table 21: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz**

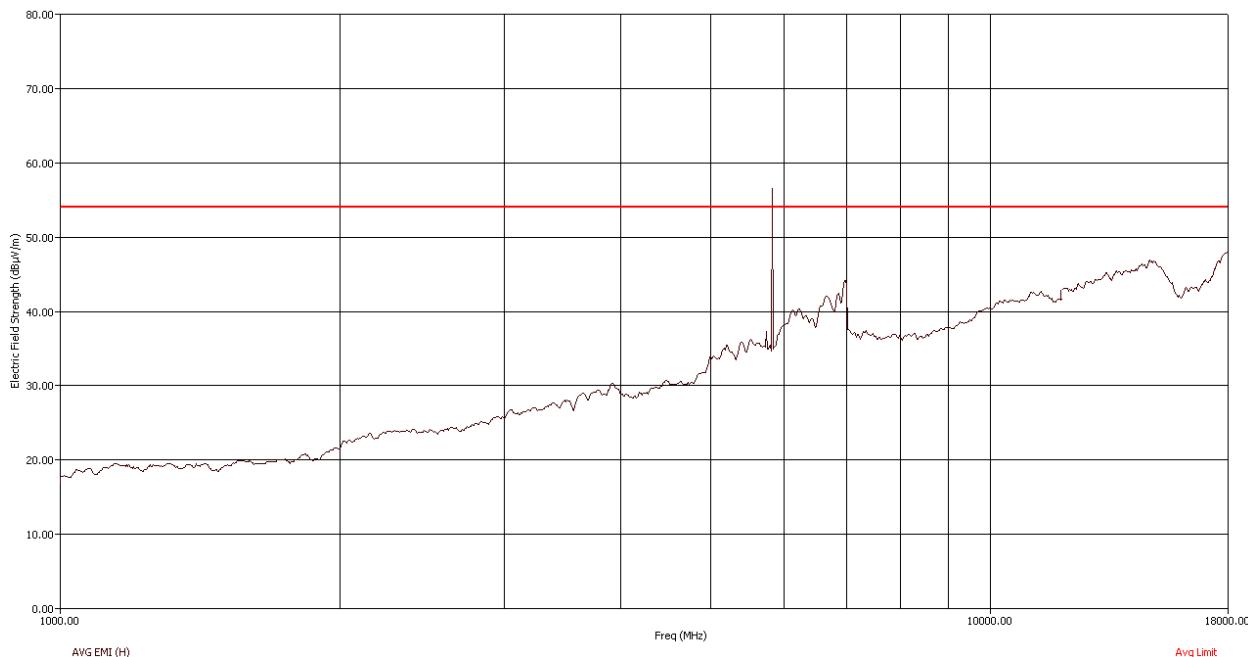


**Figure 126: Average RE from 1GHz to 18GHz - Horizontal polarization**

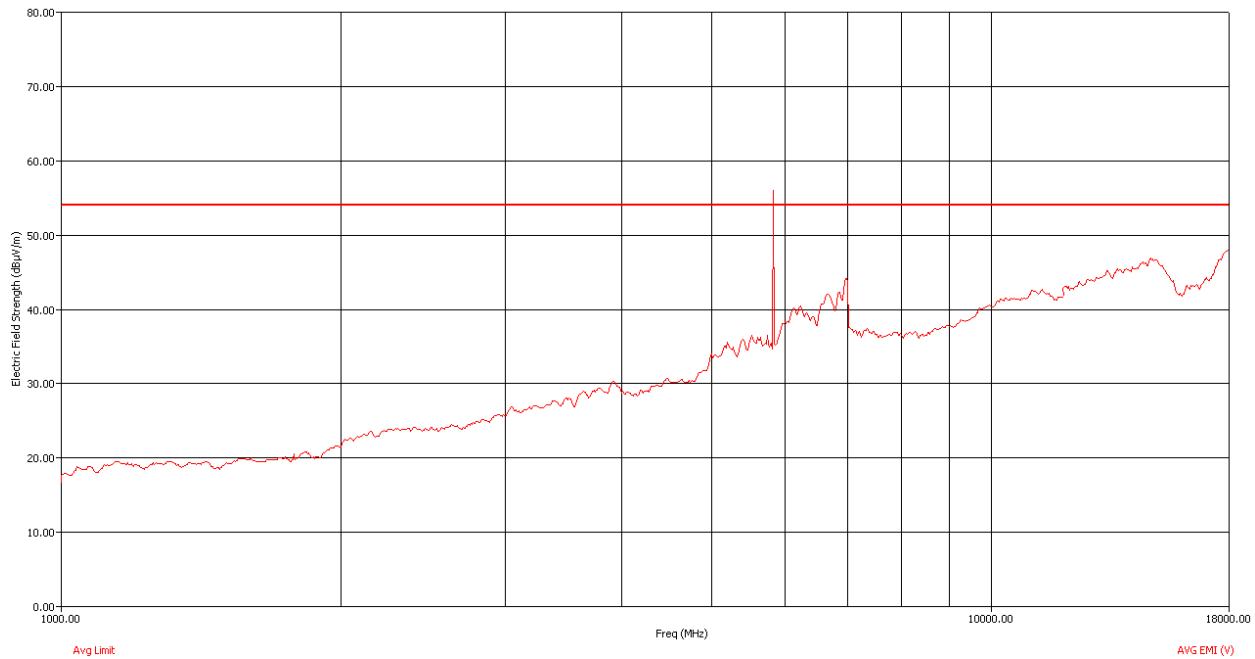


**Figure 127: Average RE from 1GHz to 18GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(AVG) Trace (dBμV)	Cable (dB)	Transducer (dB)	Preamp (dB)	(AVG) EMI (dBμV/m)	(AVG) Limit (dBμV/m)	(AVG) Margin AVL (dB)
6977.20	6977.20	V	336.20	155.00	36.09	3.89	32.53	28.50	44.01	53.98	-9.97
6982.40	6982.40	H	187.10	135.00	36.08	3.89	32.54	28.50	44.02	53.98	-9.96


**Table 22: Average table for RE from 1GHz to 18GHz**

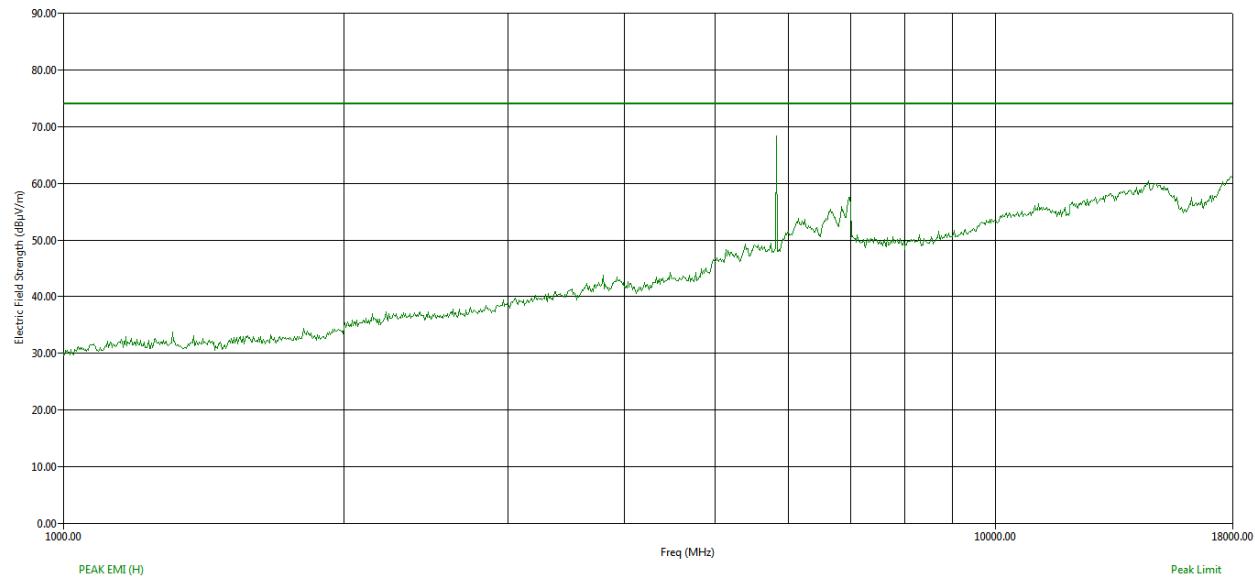


**Figure 128: Peak RE from 1GHz to 18GHz - Horizontal polarization**

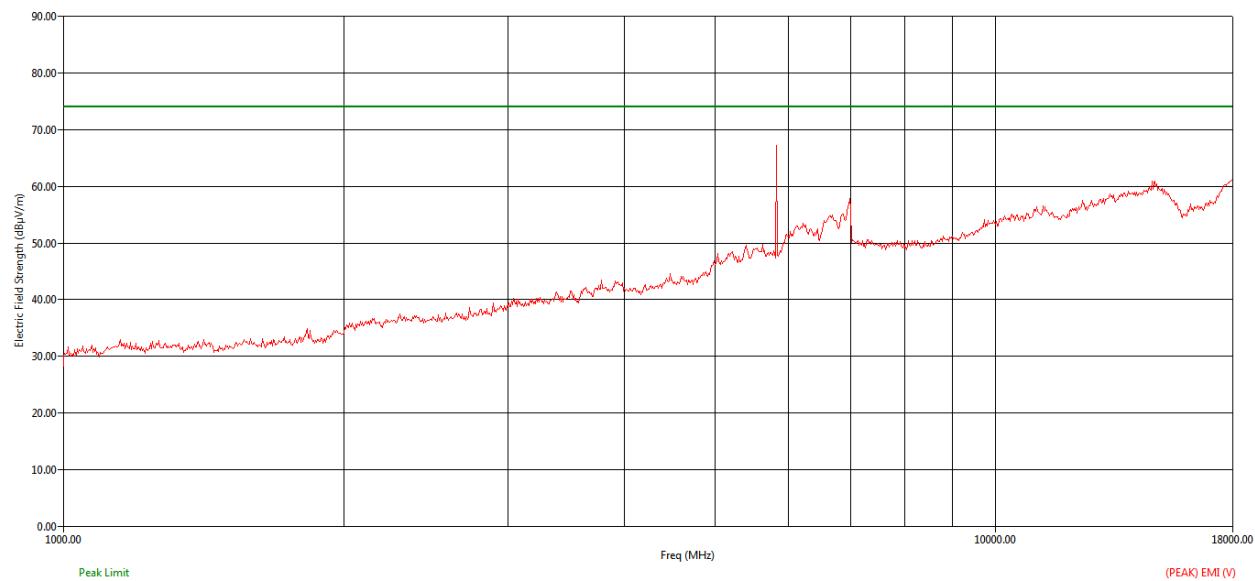


**Figure 129: Peak RE from 1GHz to 18GHz - Vertical polarization**

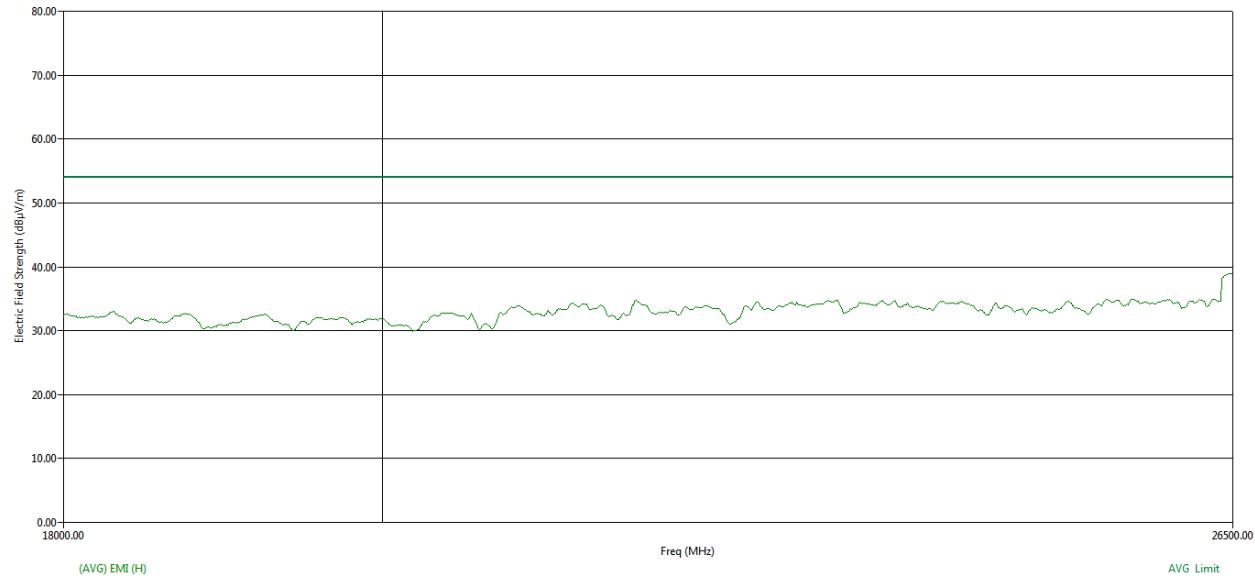


**Figure 130: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

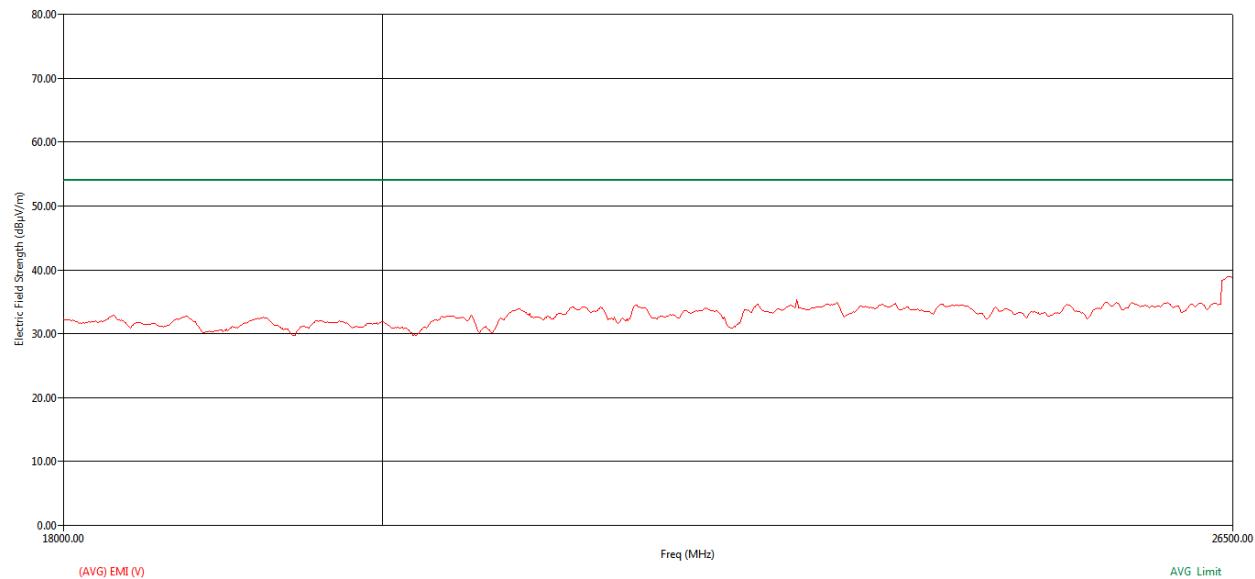


**Figure 131: Average RE from 18GHz to 26.5GHz - Vertical polarization**

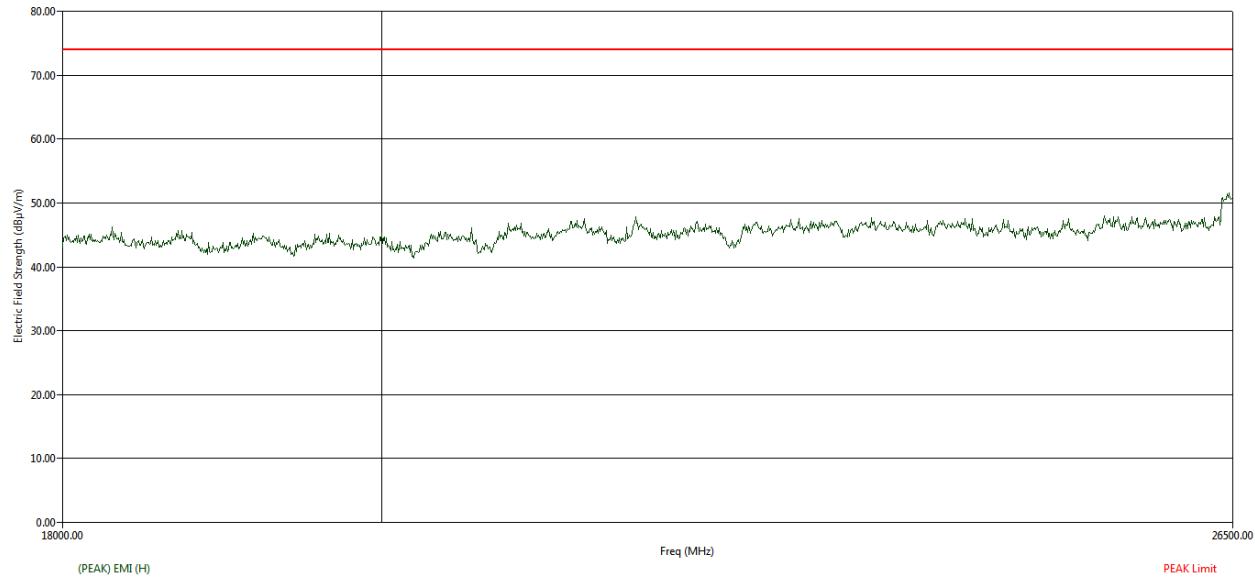


**Figure 132: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

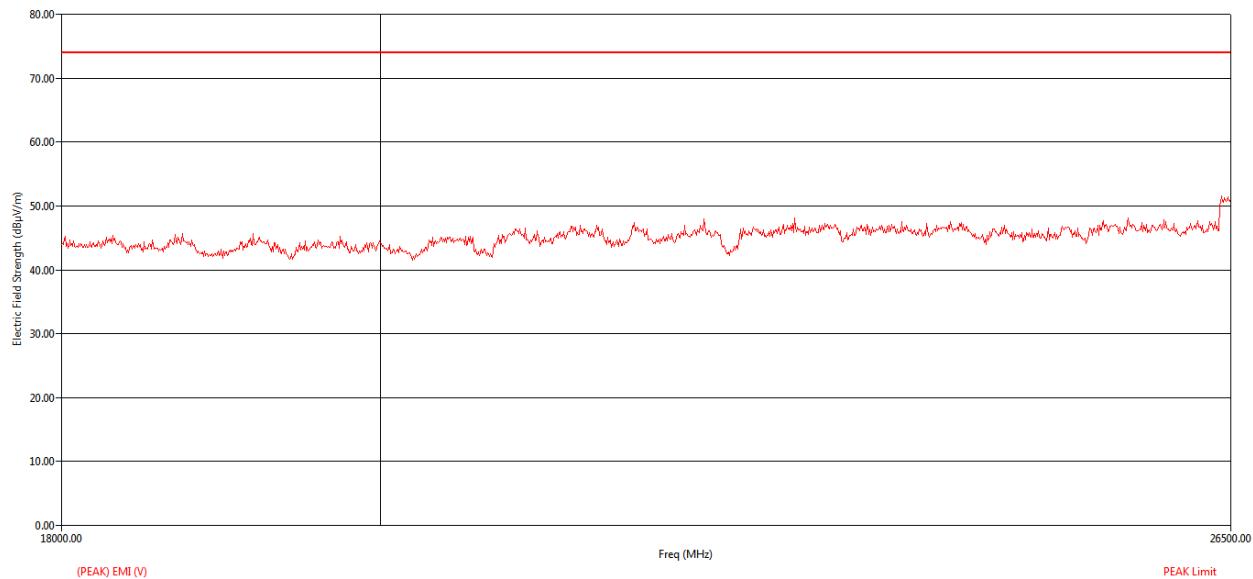


**Figure 133: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

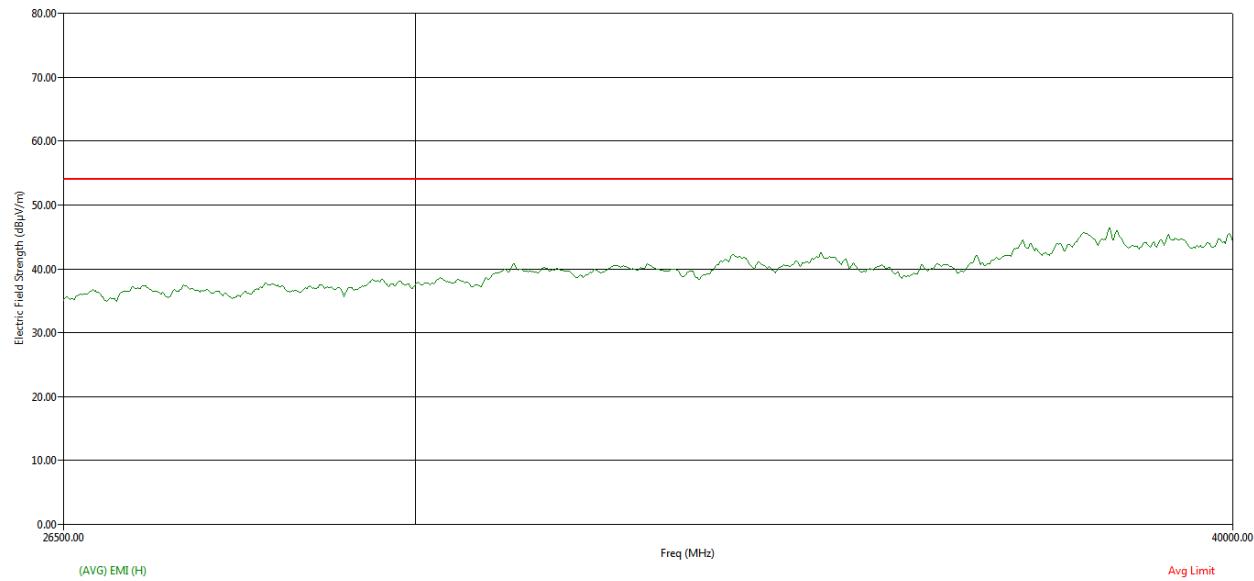


**Figure 134: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

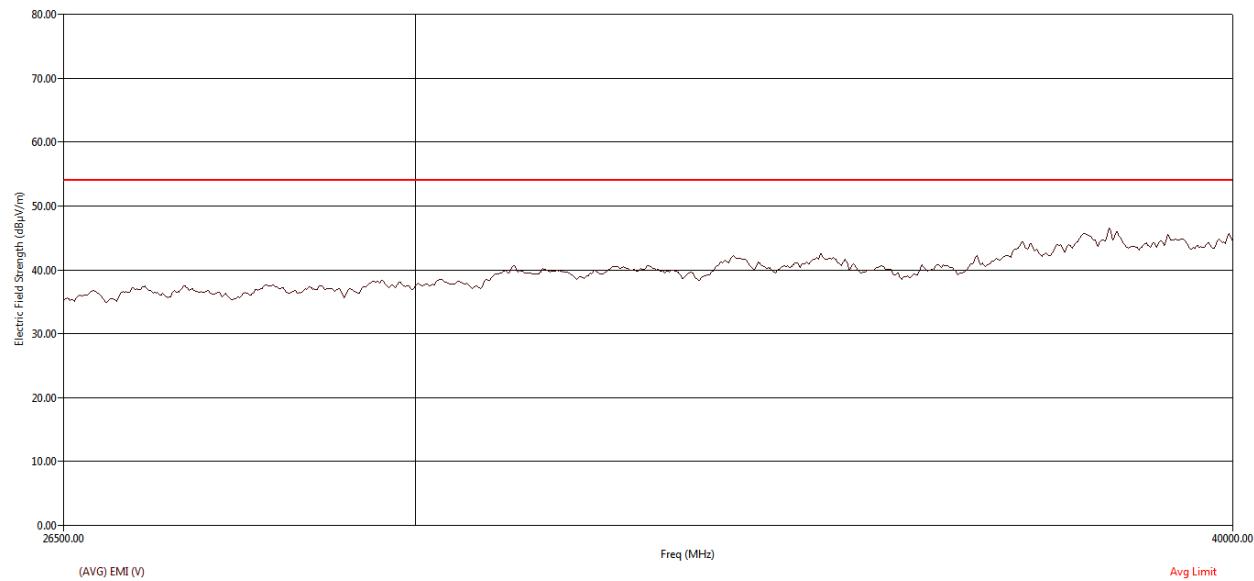

**Figure 135: Average RE from 26.5GHz to 40GHz - Vertical polarization**

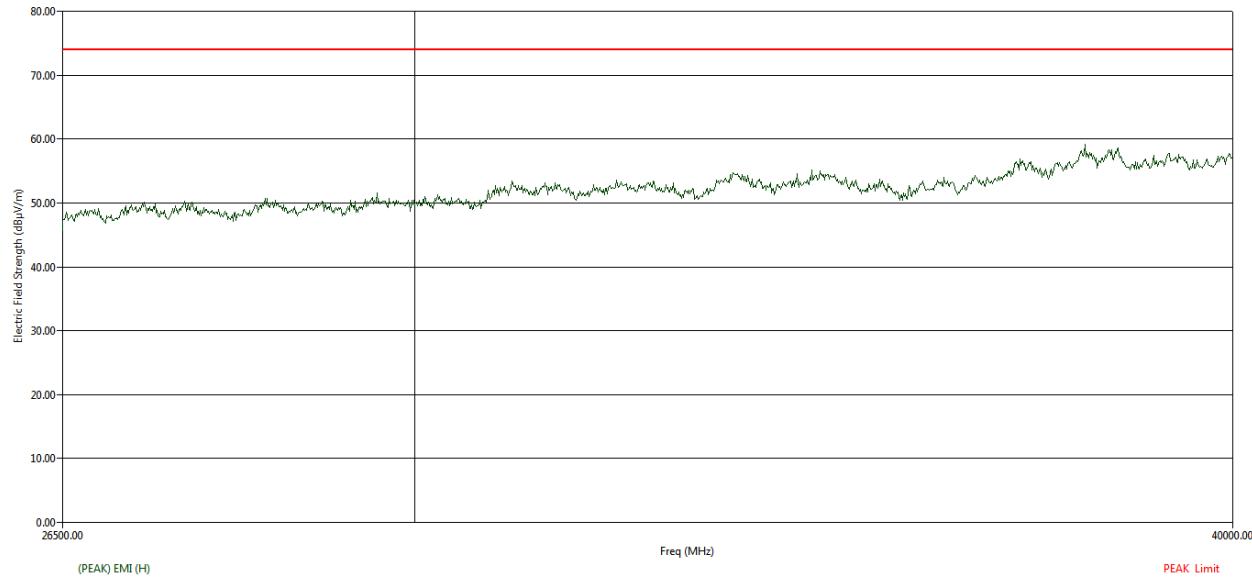

**Figure 136: Peak RE from 26.5GHz to 40GHz - Horizontal polarization**

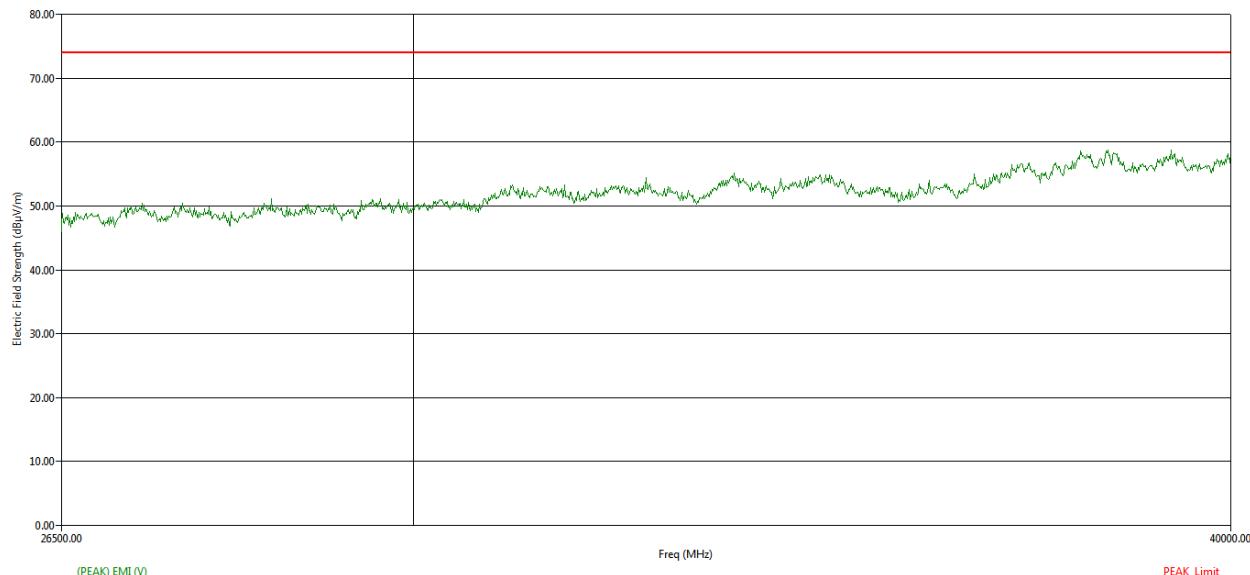

**Figure 137: Peak RE from 26.5GHz to 40GHz - Vertical polarization**

### 5.3.2.7.3 HIGH CHANNEL\_5840 MHz

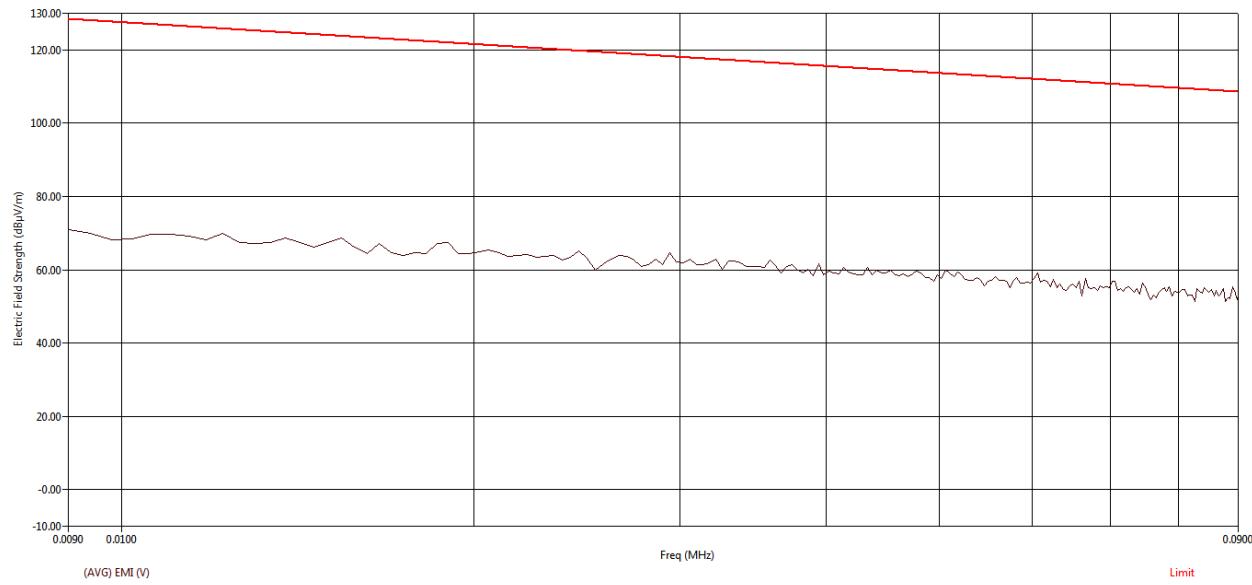


Figure 138: Average RE from 9 kHz to 90 kHz - Parallel

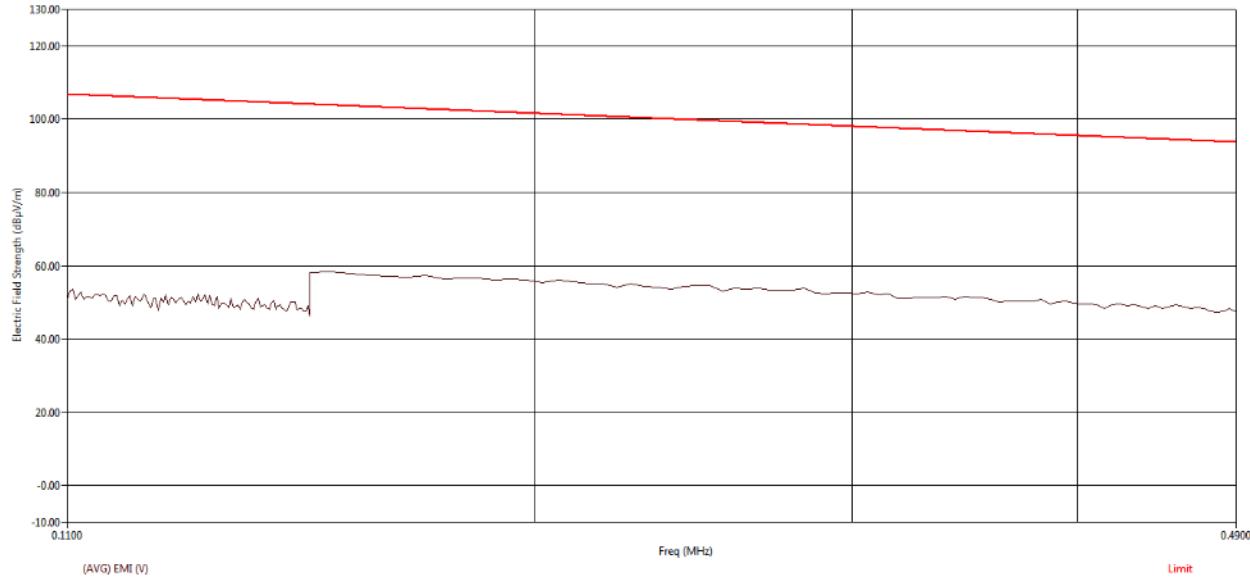


Figure 139: Average RE from 110 kHz to 490 kHz - Parallel

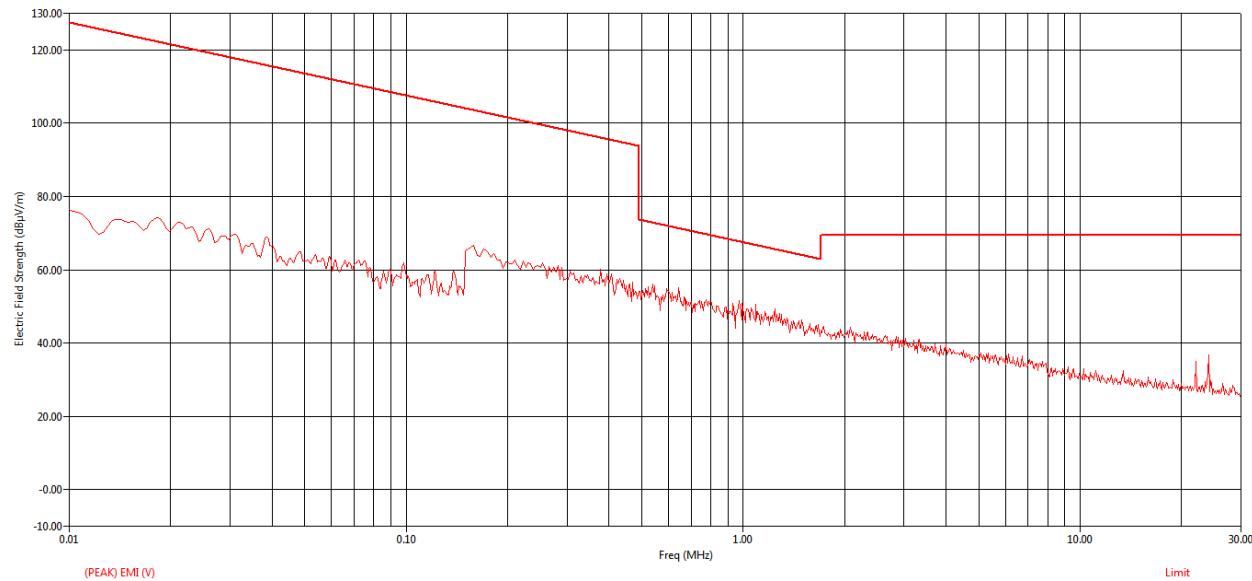


Figure 140: Peak RE from 9 kHz to 30MHz - Parallel

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
24.04	24.04	182.80	15.04	1.16	16.75	32.96	69.54	-36.59

Figure 141: Quasi Peak table for RE from 9 kHz to 30MHz - Parallel

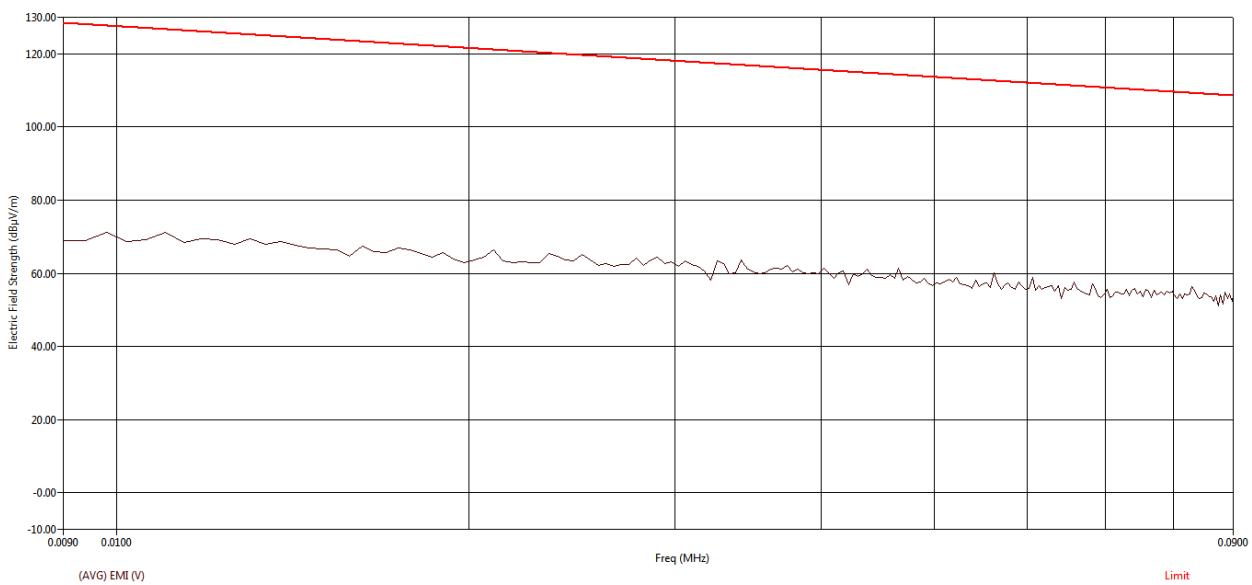


Figure 142: Average RE from 9 kHz to 90 kHz - Perpendicular

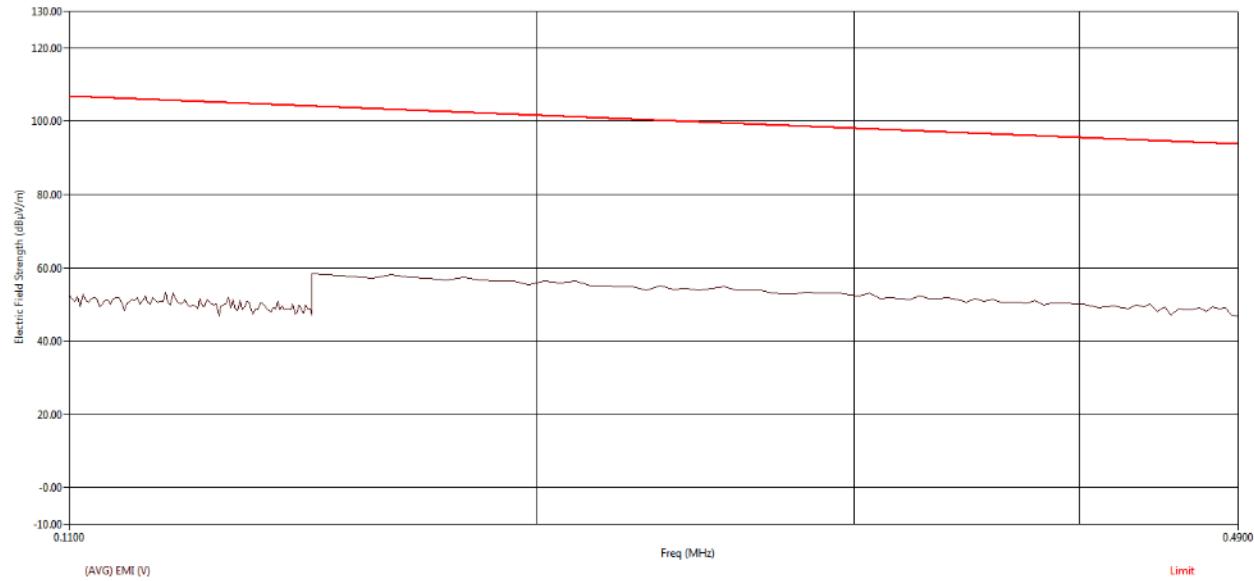


Figure 143: Average RE from 110 kHz to 490 kHz - Perpendicular


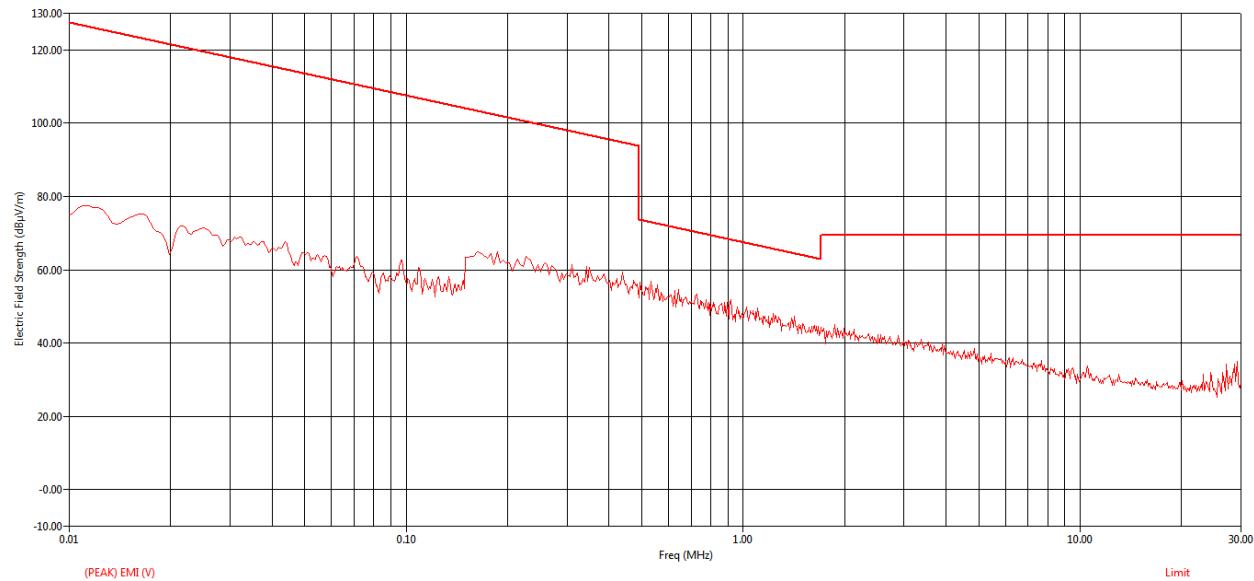



Figure 144: Peak RE from 9 kHz to 30MHz - Perpendicular

Freq (MHz)	Freq (Max) (MHz)	EUT Ttbl Agl (deg)	(QP) Trace (dBμV)	Cable (dB)	Transducer (dB)	(QP) EMI (dBμV/m)	Limit (dBμV/m)	(QP) Margin (dB)
0.31	0.30	221.00	39.42	0.34	17.50	57.26	98.06	-40.79
27.13	27.13	24.00	7.03	1.23	16.52	24.78	69.54	-44.76

Figure 145: Quasi Peak table for RE from 9 kHz to 30MHz - Perpendicular

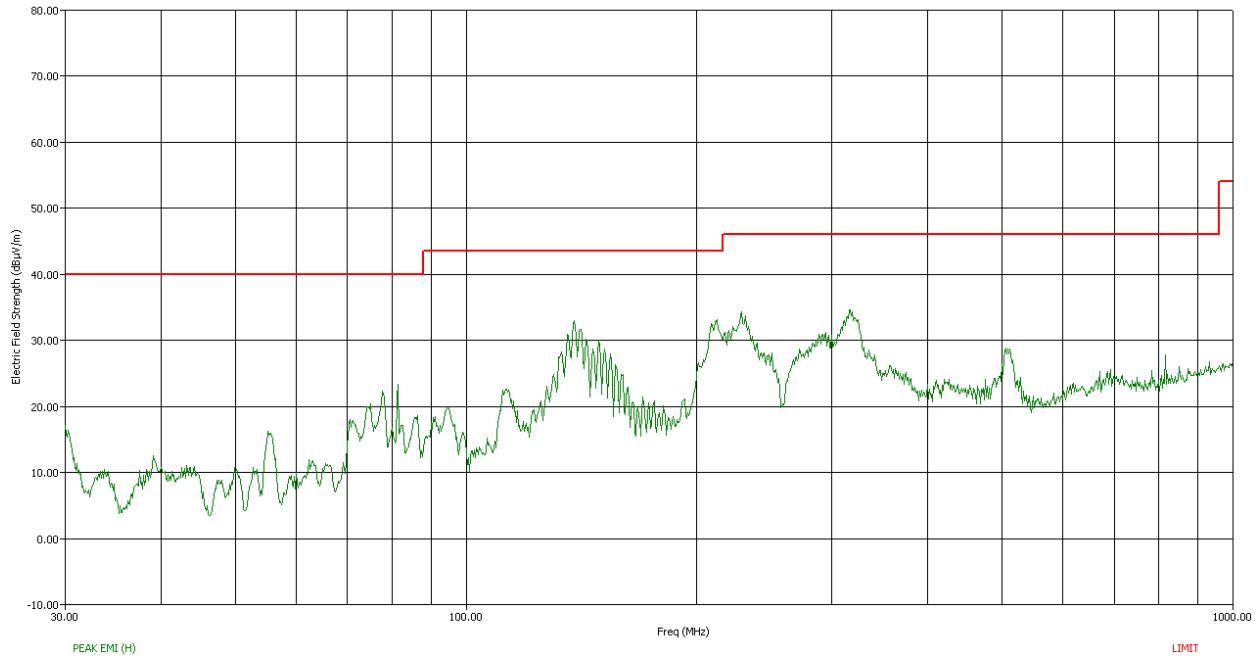


**Figure 146: Peak RE from 30MHz to 1GHz - Horizontal polarization**

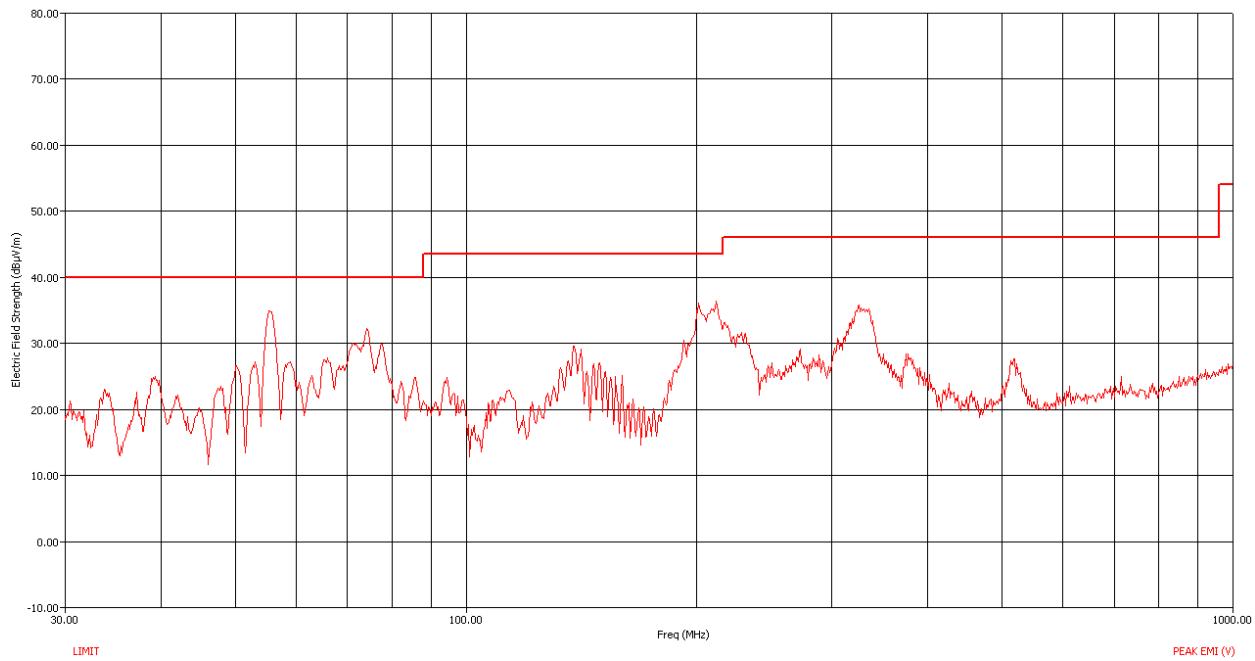

**Figure 147: Peak RE from 30MHz to 1GHz - Vertical polarization**

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Ttbl Agl (deg)	Twr Ht (cm)	(QP) Trace (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Preamp (dB)	(QP) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	(QP) Margin (dB)
55.32	55.40	V	174.20	106.00	54.38	1.61	9.89	32.19	33.70	40.00	-6.30
74.12	74.23	V	255.90	100.00	51.57	1.88	9.28	32.14	30.58	40.00	-9.42
138.24	138.22	H	339.10	249.00	49.84	2.55	11.74	32.05	32.08	43.52	-11.44
200.76	200.77	V	183.60	101.00	48.45	3.07	14.04	32.00	33.56	43.52	-9.96
211.92	211.87	V	201.10	101.00	50.91	3.14	13.52	31.99	35.58	43.52	-7.94
228.44	228.39	H	338.30	101.00	45.07	3.25	12.78	31.97	29.13	46.02	-16.89
316.56	316.63	H	294.20	103.00	47.35	3.85	14.85	31.90	34.14	46.02	-11.88
325.00	324.99	V	267.40	100.00	43.23	3.87	15.01	31.90	30.21	46.02	-15.81

**Table 23: Radiated Emission – Quasi Peak table – 30 MHz to 1 GHz**

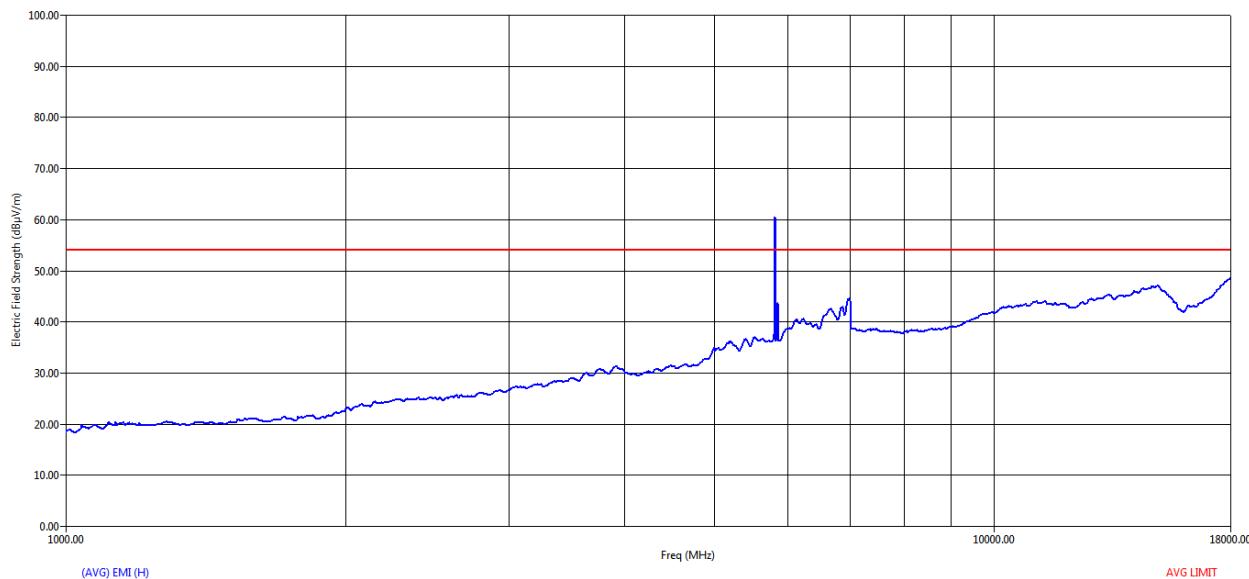

**Figure 148: Average RE from 1GHz to 18GHz - Horizontal polarization**


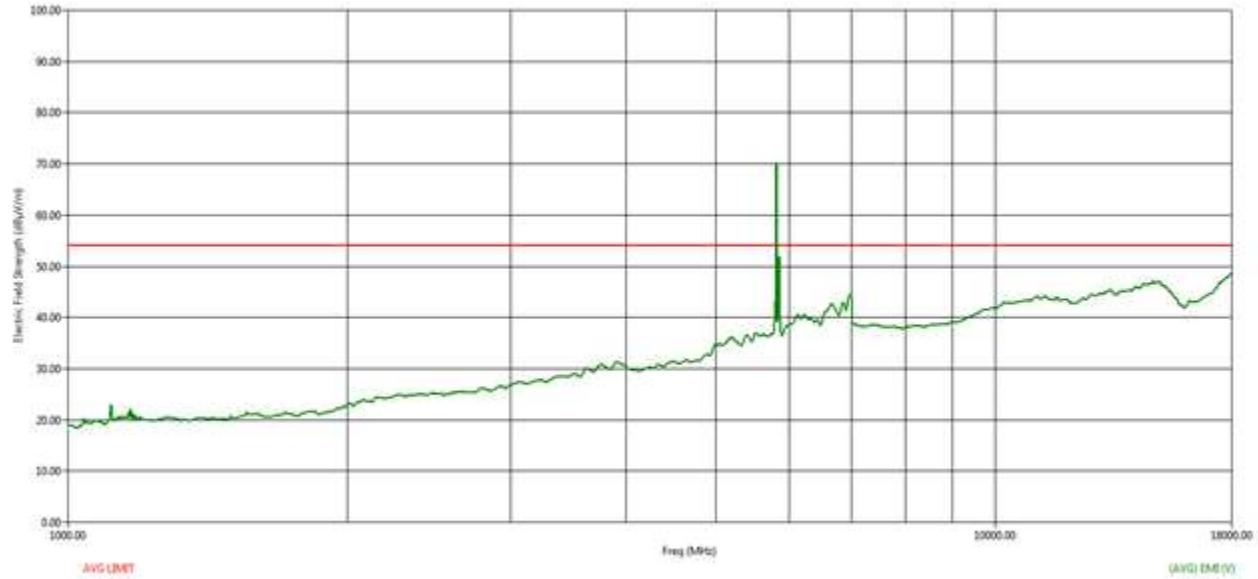



Figure 149: Average RE from 1GHz to 18GHz - Vertical polarization

Freq (MHz)	Freq (Max) (MHz)	Pol	EUT Tilt Agl (deg)	Twr Ht (cm)	(AVG) Trace (dBμV)	Cable (dB)	Transducer (dB)	Preamp (dB)	(AVG) EMI (dBμV/m)	(AVG) Limit (dBμV/m)	(AVG) Margin AVL (dB)
6953.60	6953.60	H	98.20	114.00	34.98	4.20	32.46	28.50	43.14	53.98	-10.84
6978.40	6978.40	V	22.90	180.00	35.56	4.21	32.53	28.50	43.80	53.98	-10.18


Table 24: Average table for RE from 1GHz to 18GHz

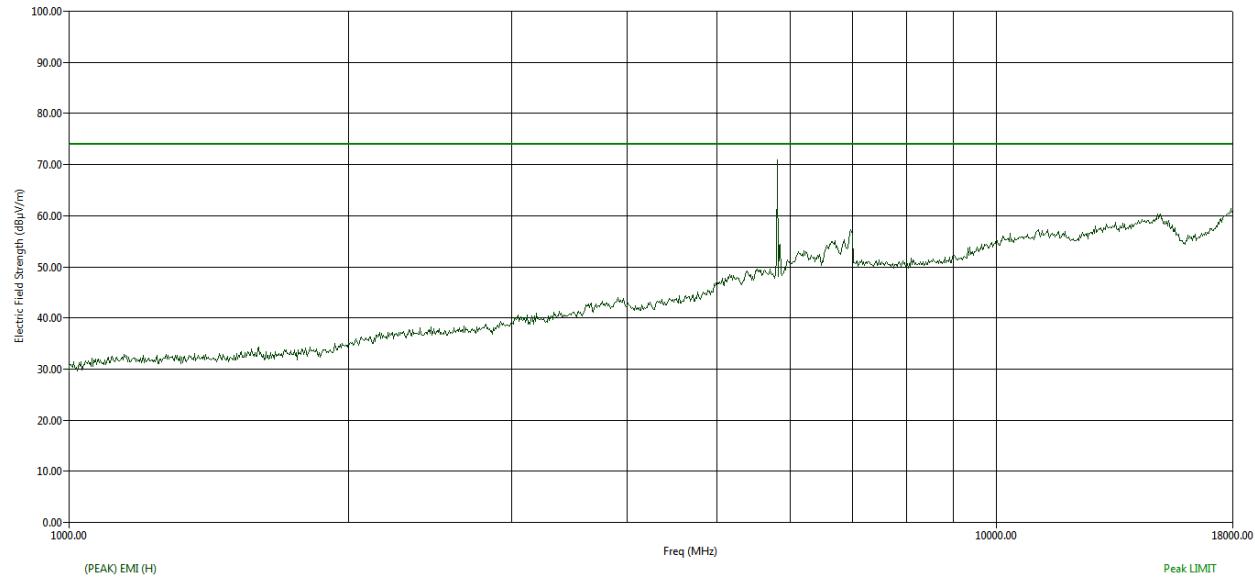


**Figure 150: Peak RE from 1GHz to 18GHz - Horizontal polarization**

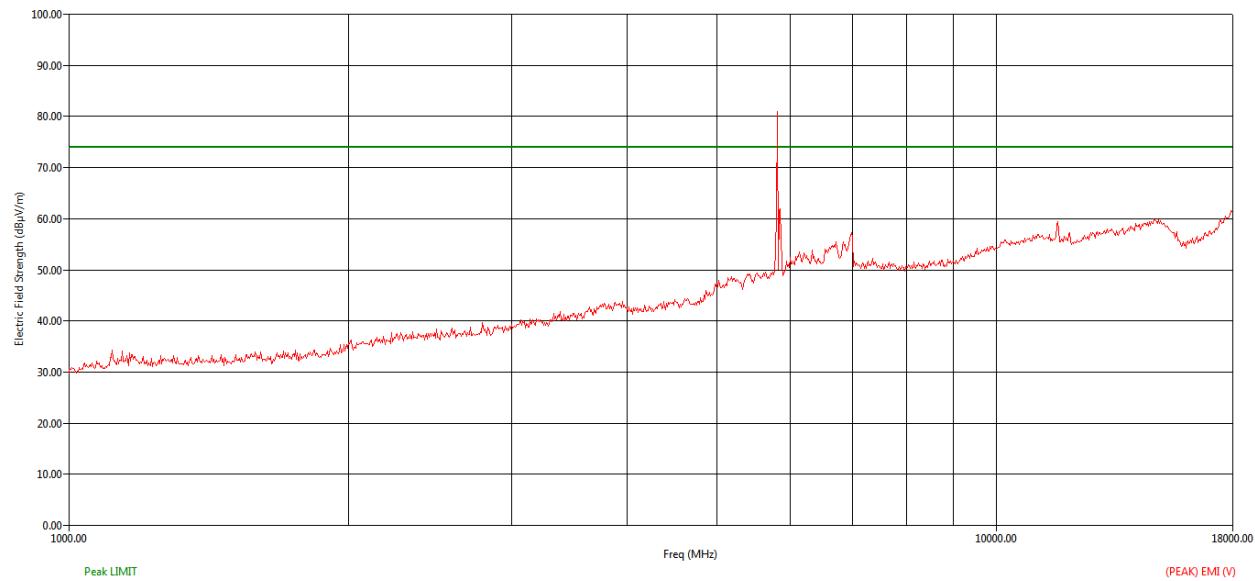


**Figure 151: Peak RE from 1GHz to 18GHz - Vertical polarization**

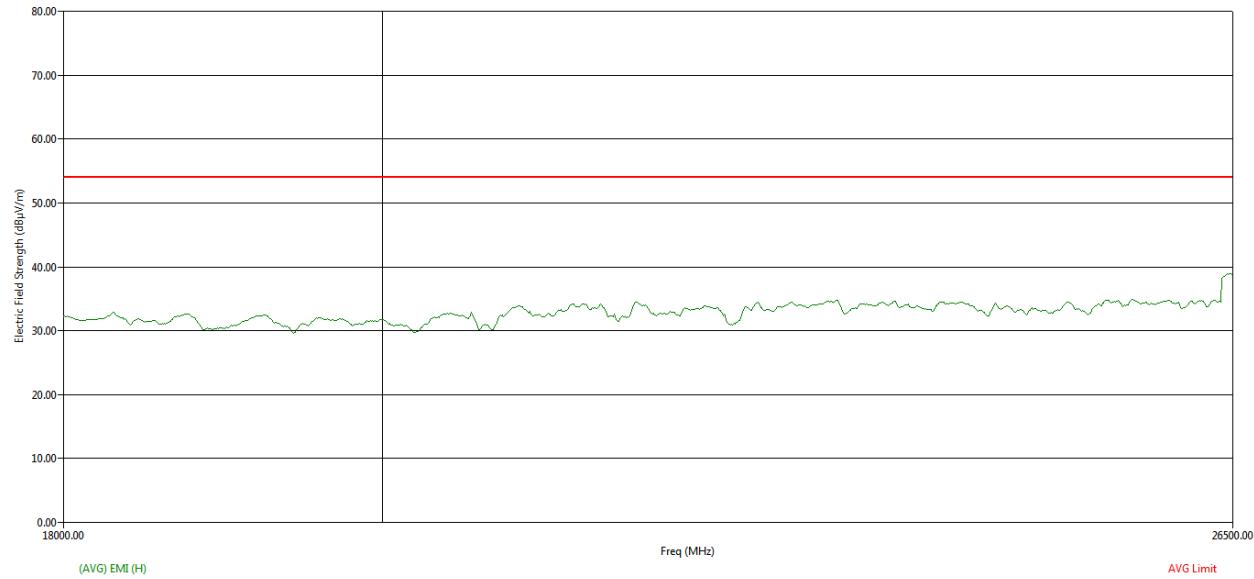


**Figure 152: Average RE from 18GHz to 26.5GHz - Horizontal polarization**

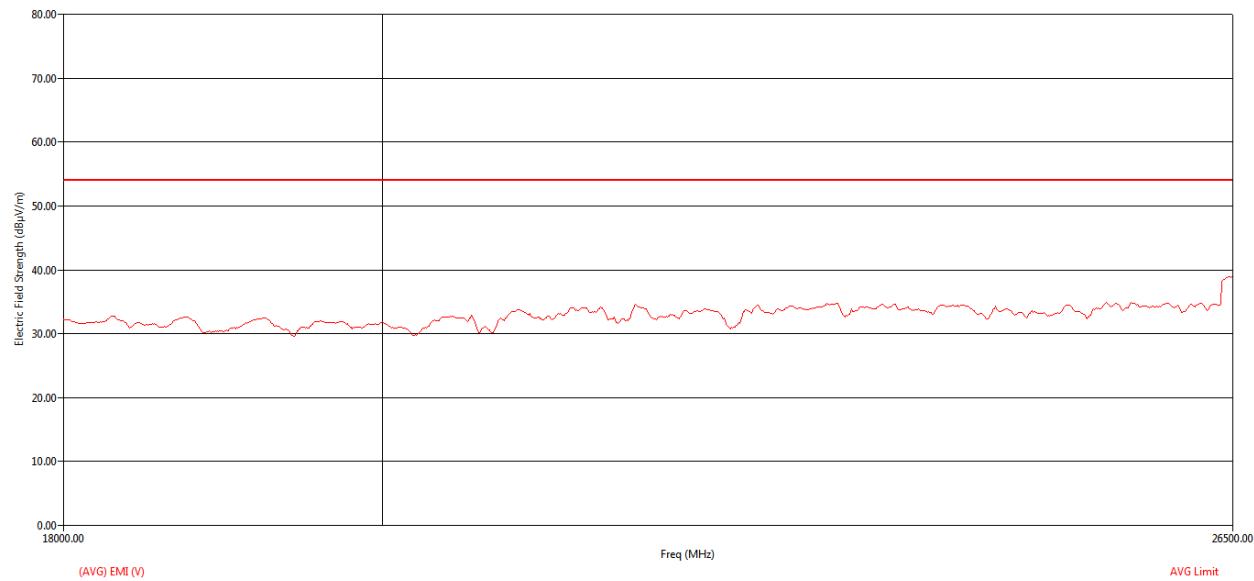


**Figure 153: Average RE from 18GHz to 26.5GHz - Vertical polarization**

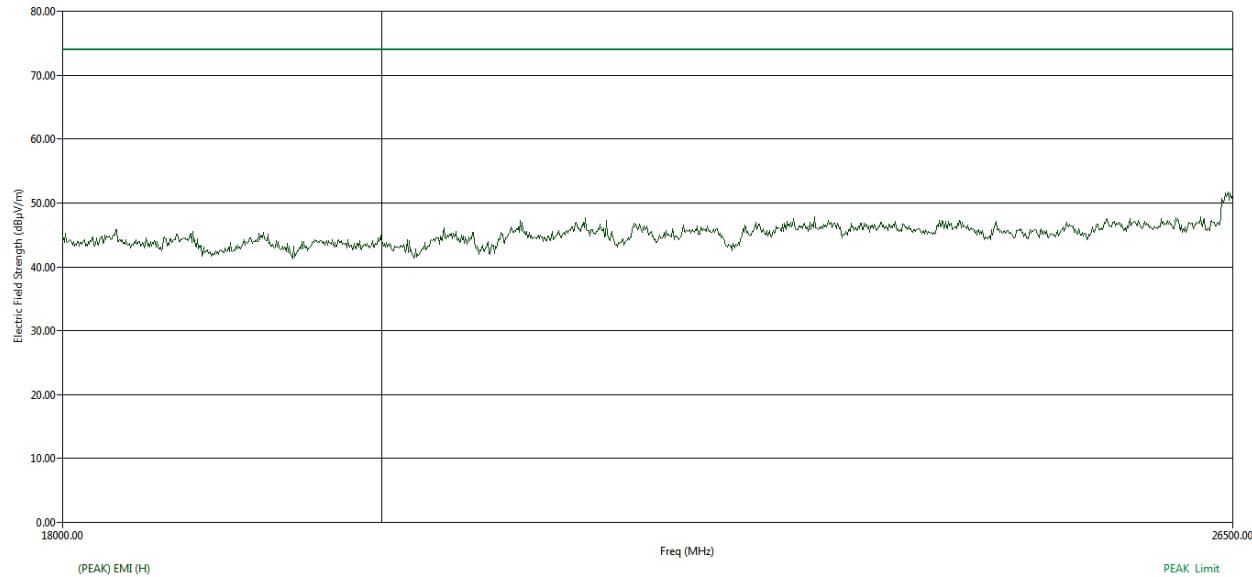


**Figure 154: Peak RE from 18GHz to 26.5GHz - Horizontal polarization**

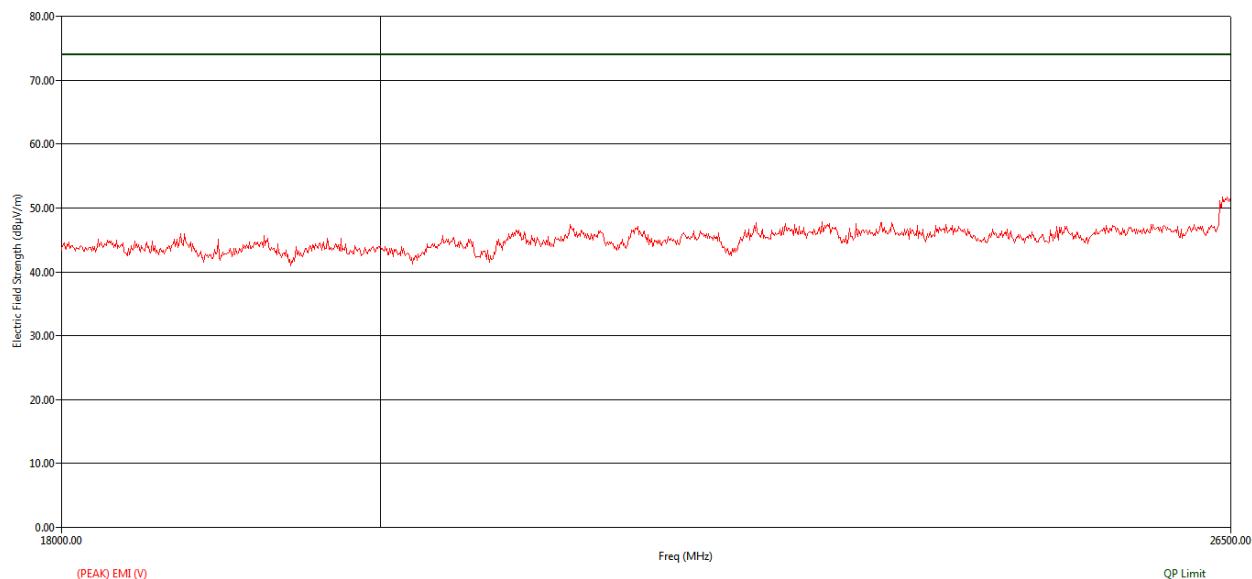


**Figure 155: Peak RE from 18GHz to 26.5GHz - Vertical polarization**

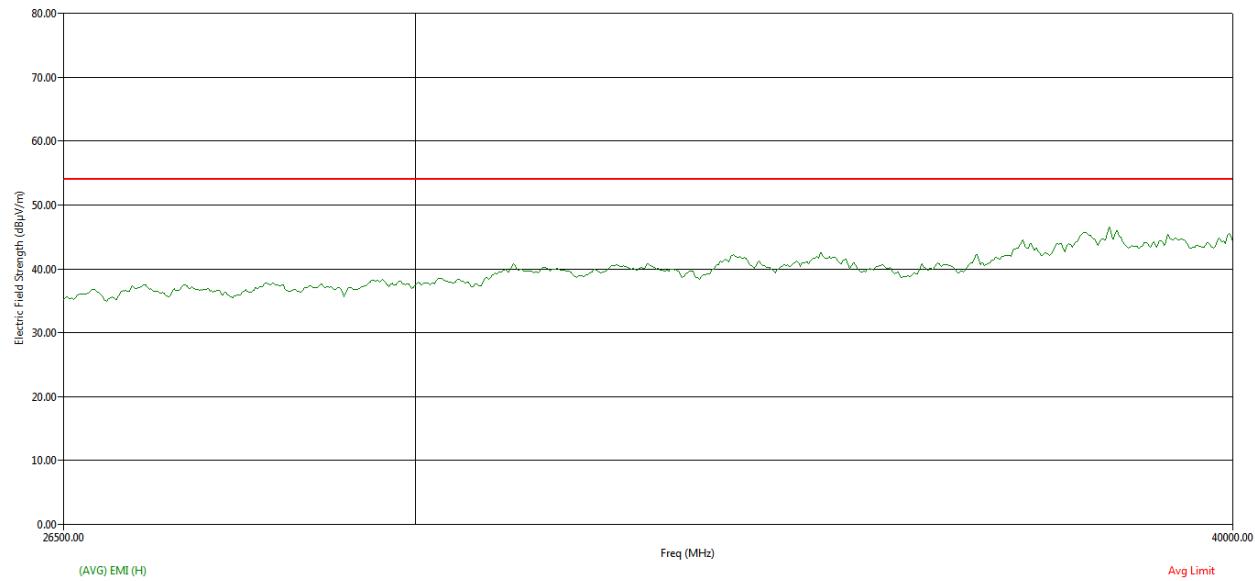


**Figure 156: Average RE from 26.5GHz to 40GHz - Horizontal polarization**

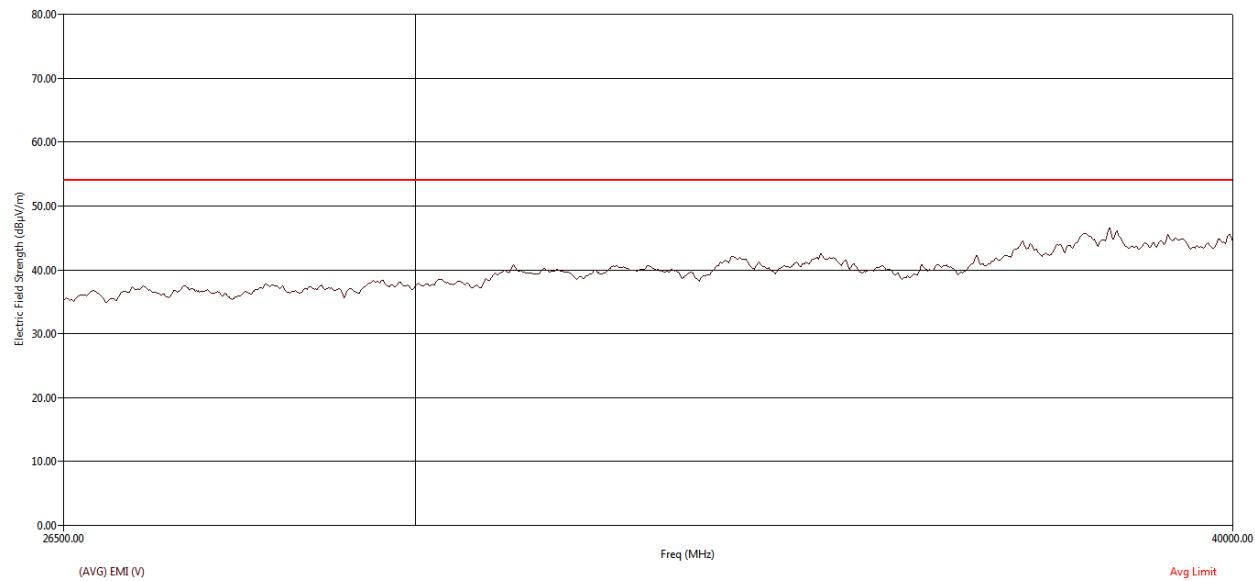

**Figure 157: Average RE from 26.5GHz to 40GHz - Vertical polarization**

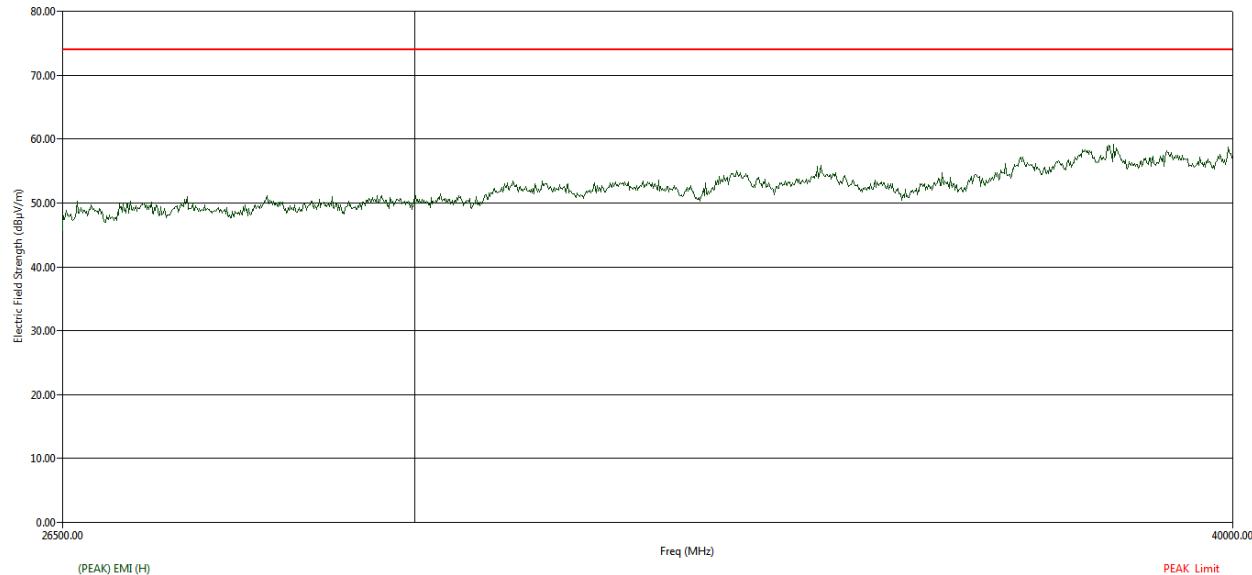

**Figure 158: Peak RE from 26.5GHz to 40GHz - Vertical polarization**

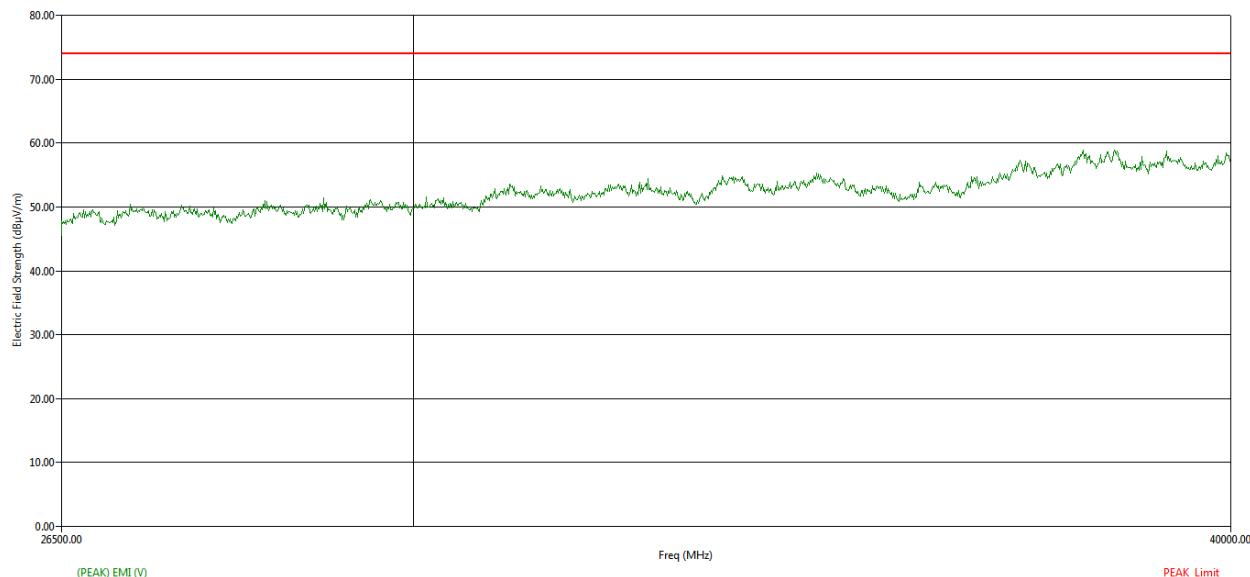

**Figure 159: Peak RE from 26.5GHz to 40GHz - Vertical polarization**

**Note:**

$QP\ EMI\ (dB\mu V/m) = QP\ Trace\ (dB\mu V) + Cable\ (dB) + Transducer\ (dB/m) - Preamp\ (dB)$

$QP\ Margin\ (dB) = QP\ EMI\ (dB\mu V/m) - Limit\ (dB\mu V/m)$

$Avg\ EMI\ (dB\mu V/m) = Avg\ Trace\ (dB\mu V) + Cable\ (dB) + Transducer\ (dB/m) - Preamp\ (dB)$

$Avg\ Margin\ (dB) = Avg\ EMI\ (dB\mu V/m) - Limit\ (dB\mu V/m)$

---

### 5.3.2.8 RESULT

Radiated Emissions from the EUT are **within the** specified Limit line.

---

## APPENDIX I – ACRONYMS

dB $\mu$ V	Decibel micro Volts
EUT	Equipment Under Test
FCC	Federal Communications Commission
GHz	Giga Hertz
kHz	Kilo Hertz
LISN	Line Impedance Stabilization Network
MHz	Mega Hertz
QP	Quasi Peak

**END OF REPORT**