

EMC TEST REPORT	
<b>TEST REPORT NUMBER</b>	DBN 1614TEL688-A
<b>TEST REPORT DATE</b>	14-Jun-2016
<b>TEST REPORT VERSION</b>	1.0
<b>MANUFACTURER</b>	Cambium Networks
<b>PRODUCT NAME</b>	ePMP2000
<b>PRODUCT MODEL</b>	C050900P031A
<b>CONDITION OF EUT WHEN RECEIVED</b>	Good and in proper working condition
<b>ISSUED TO</b>	Cambium Networks, 3800 Golf Road, Suite 360, Rolling Meadows, IL, USA 60008
<b>ISSUED BY</b>	<p><b>TARANG Lab</b>          Wipro Technologies, SJP2, Survey#70,77,78/8A,          Doddakannelli, Sarjapur road, Bangalore.          Karnataka. India - 560 035          Tel: +91-80-30292929 Fax: +91-80-30298200          Email: tarang.planet@wipro.com          Web: <a href="http://www.wipro.com">www.wipro.com</a></p>

## AMENDMENT HISTORY

Amendment Number	Amendment Date	Author of Amendment	Previous Report Version	Previous Report Date
<b>Amendment Details</b>				

## TABLE OF CONTENTS

<b>1</b>	<b>TEST REPORT SUMMARY</b>	<b>9</b>
<b>2</b>	<b>GENERAL INFORMATION</b>	<b>10</b>
2.1	ACCREDITATION DETAILS	10
2.2	MEASUREMENT UNCERTAINTY	10
<b>3</b>	<b>INSTRUMENTATION AND CALIBRATION</b>	<b>11</b>
3.1	TEST AND MEASURING EQUIPMENT	11
3.2	EQUIPMENTS USED	11
<b>4</b>	<b>PRODUCT INFORMATION</b>	<b>12</b>
4.1	DESCRIPTION OF THE PRODUCT	12
4.2	SOFTWARE AND FIRMWARE DETAILS	12
<b>5</b>	<b>TEST DETAILS</b>	<b>13</b>
5.1	PRODUCT AND TEST SETUP	13
5.1.1	PRODUCT CONFIGURATION	13
5.1.2	TEST SETUP DETAILS	14
5.1.3	ACCESSORIES	14
5.2	APPLICABLE TESTS	14
5.3	TEST RESULT	15
5.3.1	DUTY CYCLE (X) AND TRANSMISSION DURATION (T)	15
5.3.2	26 dB EMISSION BANDWIDTH	18
5.3.3	99 PERCENT OCCUPIED CHANNEL BANDWIDTH	26
5.3.4	MAXIMUM CONDUCTED OUTPUT POWER	34
5.3.5	POWER SPECTRAL DENSITY	39
5.3.6	TRANSMITTER UNWANTED EMISSIONS (CONDUCTED)	47
5.3.7	BAND EDGE EMISSIONS	105
	<b>ANNEXURE I: EUT SOFTWARE SETTINGS</b>	<b>110</b>
	<b>ANNEXURE II: ACRONYMS</b>	<b>114</b>

## LIST OF FIGURES

Figure 1: Block diagram of the EUT test setup.....	14
Figure 2: Typical test setup for Conducted RF Test .....	15
Figure 3: Measured ON time .....	16
Figure 4: Measured Transmission Period (T) .....	16
Figure 5: Typical test setup for Conducted RF Test .....	18
Figure 6: 40 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.0 – 5495 MHz .....	19
Figure 7: 40 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.1 – 5495 MHz .....	19
Figure 8: 40 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.0 - 5595 MHz.....	20
Figure 9: 40 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.1 - 5595 MHz.....	20
Figure 10: 40 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.0 - 5700 MHz .....	21
Figure 11: 40 MHz, 17 dBi, High channel: 26 dB bandwidth: measured at Ch.1 - 5700 MHz .....	21
Figure 12: 10 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.0 - 5485 MHz.....	22
Figure 13: 10 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.1 - 5485 MHz .....	22
Figure 14: 10 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.0 - 5595 MHz.....	23
Figure 15: 10 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.1 - 5595 MHz.....	23
Figure 16: 10 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.0 - 5710 MHz .....	24
Figure 17: 10 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.1 - 5710 MHz .....	24
Figure 18 Typical test setup for Conducted RF Test .....	26
Figure 19: 40 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.0 – 5495 MHz .....	27
Figure 20: 40 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.1 – 5495 MHz .....	27
Figure 21: 40 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.0 - 5595 MHz.....	28
Figure 22: 40 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.1 - 5595 MHz.....	28
Figure 23: 40 MHz, 17 dBi, High channel: 99% OBW measured at Ch.0 – 5700 MHz .....	29
Figure 24: 40 MHz, 17 dBi, High channel: 99% OBW measured at Ch.1 – 5700 MHz .....	29
Figure 25: 10 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.0 – 5485 MHz .....	30
Figure 26: 10 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.1 – 5485 MHz .....	30
Figure 27: 10 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.0 – 5595 MHz .....	31
Figure 28: 10 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.1 – 5595 MHz.....	32
Figure 29: 10 MHz, 17 dBi, High channel: 99% OBW measured at Ch.0 – 5710 MHz .....	32
Figure 30: 10 MHz, 17 dBi, High channel: 99% OBW measured at Ch.1 – 5710 MHz .....	33
Figure 31: Typical test setup for Conducted RF Test .....	34
Figure 32: 40 MHz, 17 dBi, Low channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5495 MHz .....	35
Figure 33: 40 MHz, 17 dBi, Mid channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5595 MHz.....	35
Figure 34: 40 MHz, 17 dBi, High channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5700 MHz .....	36
Figure 35: 10 MHz, 17 dBi, Low channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5485 MHz .....	36
Figure 36: 10 MHz, 17 dBi, Mid channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5595 MHz.....	37
Figure 37: 10 MHz, 17 dBi, High channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5710 MHz .....	37
Figure 38: Typical test setup for Conducted Test .....	39
Figure 39: 40 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 0 – 5495 MHz.....	40
Figure 40: 40 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 1 – 5495 MHz.....	40
Figure 41: 40 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 0 – 5595 MHz .....	41
Figure 42: 40 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 1 – 5595 MHz .....	41
Figure 43: 40 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 0 – 5700 MHz .....	42
Figure 44: 40 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 1 – 5700 MHz .....	42
Figure 45: 10 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 0 – 5485 MHz.....	43
Figure 46: 10 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 1 – 5485 MHz.....	43
Figure 47: 10 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 0 – 5595 MHz .....	44
Figure 48: 10 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 1 – 5595 MHz .....	44
Figure 49: 10 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 0 – 5710 MHz .....	45
Figure 50: 10 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 1 – 5710 MHz .....	45
Figure 51: Typical test setup for Conducted Test .....	48
Figure 52: 40 MHz, 17 dBi, Low channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 – 5495 MHz .....	49

Figure 53: 40 MHz, 17 dBi, Low channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5495 MHz.....	49
Figure 54: 40 MHz, 17 dBi, Low channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5495 MHz.....	50
Figure 55: 40 MHz, 17 dBi, Low channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5495 MHz.....	50
Figure 56: 40 MHz, 17 dBi, Low channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5495 MHz.....	51
Figure 57: 40 MHz, 17 dBi, Low channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5495 MHz.....	51
Figure 58: 40 MHz, 17 dBi, Low channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5495 MHz .....	52
Figure 59: 40 MHz, 17 dBi, Low channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5495 MHz .....	52
Figure 60: 40 MHz, 17 dBi, Low channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5495 MHz .....	53
Figure 61: 40 MHz, 17 dBi, Low channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5495 MHz .....	53
Figure 62: 40 MHz, 17 dBi, Low channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5495 MHz.....	54
Figure 63: 40 MHz, 17 dBi, Low channel: Peak emission from 30 MHz to 1 GHz at Ch. 1 –5495 MHz.....	54
Figure 64: 40 MHz, 17 dBi, Low channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5495 MHz.....	55
Figure 65: 40 MHz, 17 dBi, Low channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5495 MHz.....	55
Figure 66: 40 MHz, 17 dBi, Low channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5495 MHz.....	56
Figure 67: 40 MHz, 17 dBi, Low channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5495 MHz .....	56
Figure 68: 40 MHz, 17 dBi, Low channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5495 MHz .....	57
Figure 69: 40 MHz, 17 dBi, Low channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5495 MHz .....	57
Figure 70: 40 MHz, 17 dBi, Mid channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 –5595 MHz.....	58
Figure 71: 40 MHz, 17 dBi, Mid channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5595MHz .....	58
Figure 72: 40 MHz, 17 dBi, Mid channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5595 MHz .....	59
Figure 73: 40 MHz, 17 dBi, Mid channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5595 MHz .....	59
Figure 74: 40 MHz, 17 dBi, Mid channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5595 MHz .....	60
Figure 75: 40 MHz, 17 dBi, Mid channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5595 MHz .....	60
Figure 76: 40 MHz, 17 dBi, Mid channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5595 MHz .....	61
Figure 77: 40 MHz, 17 dBi, Mid channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5595 MHz .....	61
Figure 78: 40 MHz, 17 dBi, Mid channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5595 MHz .....	62
Figure 79: 40 MHz, 17 dBi, Mid channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5595 MHz .....	62
Figure 80: 40 MHz, 17 dBi, Mid channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5595 MHz .....	63
Figure 81: 40 MHz, 17 dBi, Mid channel: Peak emission from 30 MHz to 1 GHz at Ch. 1–5595 MHz .....	63
Figure 82: 40 MHz, 17 dBi, Mid channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5595 MHz .....	64
Figure 83: 40 MHz, 17 dBi, Mid channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5595 MHz .....	64
Figure 84: 40 MHz, 17 dBi, Mid channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5595 MHz .....	65
Figure 85: 40 MHz, 17 dBi, Mid channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5595 MHz .....	65
Figure 86: 40 MHz, 17 dBi, Mid channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5595 MHz .....	66
Figure 87: 40 MHz, 17 dBi, Mid channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5595 MHz .....	66
Figure 88: 40 MHz, 17 dBi, High channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 –5700 MHz.....	67
Figure 89: 40 MHz, 17 dBi, High channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5700 MHz .....	67
Figure 90: 40 MHz, 17 dBi, High channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5700 MHz .....	68
Figure 91: 40 MHz, 17 dBi, High channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5700 MHz .....	68
Figure 92: 40 MHz, 17 dBi, High channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5700 MHz .....	69
Figure 93: 40 MHz, 17 dBi, High channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5700 MHz .....	69
Figure 94: 40 MHz, 17 dBi, High channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5700 MHz.....	70
Figure 95: 40 MHz, 17 dBi, High channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5700 MHz.....	70
Figure 96: 40 MHz, 17 dBi, High channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5700 MHz.....	71
Figure 97: 40 MHz, 17 dBi, High channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5700 MHz.....	71
Figure 98: 40 MHz, 17 dBi, High channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5700 MHz .....	72
Figure 99: 40 MHz, 17 dBi, High channel: Peak emission from 30 MHz to 1 GHz at Ch. 1 –5700 MHz .....	72
Figure 100: 40 MHz, 17 dBi, High channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5700 MHz .....	73
Figure 101: 40 MHz, 17 dBi, High channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5700 MHz .....	73
Figure 102: 40 MHz, 17 dBi, High channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5700 MHz .....	74
Figure 103: 40 MHz, 17 dBi, High channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5700 MHz.....	74
Figure 104: 40 MHz, 17 dBi, High channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5700 MHz.....	75
Figure 105: 40 MHz, 17 dBi, High channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5700 MHz.....	75

Figure 106: 10 MHz, 17 dBi, Low channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 –5485 MHz .....	76
Figure 107: 10 MHz, 17 dBi, Low channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5485 MHz.....	76
Figure 108: 10 MHz, 17 dBi, Low channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5485 MHz.....	77
Figure 109: 10 MHz, 17 dBi, Low channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5485 MHz.....	77
Figure 110: 10 MHz, 17 dBi, Low channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5485 MHz.....	78
Figure 111: 10 MHz, 17 dBi, Low channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5485 MHz.....	78
Figure 112: 10 MHz, 17 dBi, Low channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5485 MHz .....	79
Figure 113: 10 MHz, 17 dBi, Low channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5485 MHz .....	79
Figure 114: 10 MHz, 17 dBi, Low channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5485 MHz .....	80
Figure 115: 10 MHz, 17 dBi, Low channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5485 MHz .....	80
Figure 116: 10 MHz, 17 dBi, Low channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5485 MHz.....	81
Figure 117: 10 MHz, 17 dBi, Low channel: Peak emission from 30 MHz to 1 GHz at Ch. 1 –5485 MHz.....	81
Figure 118: 10 MHz, 17 dBi, Low channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5485 MHz.....	82
Figure 119: 10 MHz, 17 dBi, Low channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5485 MHz.....	82
Figure 120: 10 MHz, 17 dBi, Low channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5485 MHz.....	83
Figure 121: 10 MHz, 17 dBi, Low channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5485 MHz .....	83
Figure 122: 10 MHz, 17 dBi, Low channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5485 MHz .....	84
Figure 123: 10 MHz, 17 dBi, Low channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5485 MHz .....	84
Figure 124: 10 MHz, 17 dBi, Mid channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 –5595 MHz.....	85
Figure 125: 10 MHz, 17 dBi, Mid channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5595 MHz .....	85
Figure 126: 10 MHz, 17 dBi, Mid channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5595 MHz .....	86
Figure 127: 10 MHz, 17 dBi, Mid channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5595 MHz .....	86
Figure 128: 10 MHz, 17 dBi, Mid channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5595 MHz .....	87
Figure 129: 10 MHz, 17 dBi, Mid channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5595 MHz .....	87
Figure 130: 10 MHz, 17 dBi, Mid channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5595 MHz .....	88
Figure 131: 10 MHz, 17 dBi, Mid channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5595 MHz .....	88
Figure 132: 10 MHz, 17 dBi, Mid channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5595 MHz .....	89
Figure 133: 10 MHz, 17 dBi, Mid channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5595 MHz .....	89
Figure 134: 10 MHz, 17 dBi, Mid channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5595 MHz .....	90
Figure 135: 10 MHz, 17 dBi, Mid channel: Peak emission from 30 MHz to 1 GHz at Ch. 1 –5595 MHz .....	90
Figure 136: 10 MHz, 17 dBi, Mid channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5595 MHz .....	91
Figure 137: 10 MHz, 17 dBi, Mid channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5595 MHz .....	91
Figure 138: 10 MHz, 17 dBi, Mid channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5595 MHz .....	92
Figure 139: 10 MHz, 17 dBi, Mid channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5595 MHz .....	92
Figure 140: 10 MHz, 17 dBi, Mid channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5595 MHz .....	93
Figure 141: 10 MHz, 17 dBi, Mid channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5595 MHz .....	93
Figure 142: 10 MHz, 17 dBi, High channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 –5710 MHz.....	94
Figure 143: 10 MHz, 17 dBi, High channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 –5710 MHz .....	94
Figure 144: 10 MHz, 17 dBi, High channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5710 MHz .....	95
Figure 145: 10 MHz, 17 dBi, High channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5710 MHz .....	95
Figure 146: 10 MHz, 17 dBi, High channel: Average emission from 18 GHz to 26.5 GHz at Ch. 0 –5710 MHz .....	96
Figure 147: 10 MHz, 17 dBi, High channel: Average emission from 26.5 GHz to 40 GHz at Ch. 0 –5710 MHz .....	96
Figure 148: 10 MHz, 17 dBi, High channel: Peak emission from 1 GHz to 18 GHz at Ch. 0 –5710 MHz .....	97
Figure 149: 10 MHz, 17 dBi, High channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 0 –5710 MHz .....	97
Figure 150: 10 MHz, 17 dBi, High channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 0 –5710 MHz .....	98
Figure 151: 10 MHz, 17 dBi, High channel: Peak emission from 9 kHz to 150 kHz at Ch. 1 –5710 MHz .....	98
Figure 152: 10 MHz, 17 dBi, High channel: Peak emission from 150 kHz to 30 MHz at Ch. 1 –5710 MHz .....	99
Figure 153: 10 MHz, 17 dBi, High channel: Peak emission from 30 MHz to 1 GHz at Ch. 1 –5710 MHz .....	99
Figure 154: 10 MHz, 17 dBi, High channel: Average emission from 1 GHz to 18 GHz at Ch. 1 –5710 MHz .....	100
Figure 155: 10 MHz, 17 dBi, High channel: Average emission from 18 GHz to 26.5 GHz at Ch. 1 –5710 MHz .....	100
Figure 156: 10 MHz, 17 dBi, High channel: Average emission from 26.5 GHz to 40 GHz at Ch. 1 –5710 MHz .....	101
Figure 157: 10 MHz, 17 dBi, High channel: Peak emission from 1 GHz to 18 GHz at Ch. 1 –5710 MHz .....	101
Figure 158: 10 MHz, 17 dBi, High channel: Peak emission from 18 GHz to 26.5 GHz at Ch. 1 –5710 MHz .....	102

---

Figure 159: 10 MHz, 17 dBi, High channel: Peak emission from 26.5 GHz to 40 GHz at Ch. 1 –5710 MHz.....	102
Figure 160: Typical test setup for Conducted Test .....	105
Figure 161: 40 MHz, 17 dBi, Low channel: Band edge measured at Ch.0 –5495 MHz.....	106
Figure 162: 40 MHz, 17 dBi, Low channel: Band edge measured at Ch.1 –5495 MHz.....	106
Figure 163: 40 MHz, 17 dBi, High channel: Band edge measured at Ch.0 –5700 MHz .....	107
Figure 164: 40 MHz, 17 dBi, High channel: Band edge measured at Ch.1 –5700 MHz .....	107
Figure 165: 10 MHz, 17 dBi, Low channel: Band edge measured at Ch.0 –5485 MHz.....	108
Figure 166: 10 MHz, 17 dBi, Low channel: Band edge measured at Ch.1 –5485 MHz.....	108
Figure 167: 10 MHz, 17 dBi, High channel: Band edge measured at Ch.0 –5710 MHz .....	109
Figure 168: 10 MHz, 17 dBi, High channel: Band edge measured at Ch.1 –5710 MHz .....	109
Figure 169: tftpd32 application screenshot .....	110
Figure 170: tftpd32 application initialization root_ screenshot.....	110
Figure 171: Tera term application screenshot .....	111
Figure 172: Tera term application Login screenshot.....	111
Figure 173: Initializing EUT screenshot .....	112
Figure 174: Atheros Radio Test GUI screenshot-1 .....	112
Figure 175: Atheros Radio Test GUI screenshot -2 .....	113

---

## LIST OF TABLES

Table 1: List of equipment used for Conducted RF Test .....	11
Table 2: EUT details .....	12
Table 3: List of cables connected to the EUT .....	12
Table 4: Result for 26 dB bandwidth in both 40 MHz and 10 MHz modulation bandwidth .....	25
Table 5: Result for 99% Occupied bandwidth in both 40 MHz and 10 MHz modulation bandwidth .....	33
Table 6: Max RF out power for 17 dBi configuration .....	38
Table 7: Consolidated values across channels and final power for 17 dBi configuration.....	38
Table 8: Result of PSD for 17 dBi configuration for both 40 MHz and 10 MHz modulation bandwidth .....	46
Table 9: Unwanted emission Limit .....	47
Table 10: General Field strength limit below 30 MHz .....	47
Table 11: General Field strength limit above 30 MHz.....	47
Table 12: Result for 17 dBi configuration – 40 MHz modulation bandwidth .....	103
Table 13: Result for 17 dBi configuration - 10 MHz modulation bandwidth .....	104

## 1 TEST REPORT SUMMARY


<b>Applicant</b>	Cambium Networks
<b>Manufacturer</b>	Cambium Networks
<b>Product Name</b>	ePMP2000
<b>Product Model</b>	C050900P031A
<b>Product Serial Number</b>	000456D1846A
<b>Date of Test</b>	08 <sup>th</sup> Feb 2016 & 28 <sup>th</sup> Apr 2016
<b>Venue of Test</b>	Tarang Lab

<b>Applicable Standard</b>	<b>Description</b>	<b>Results</b>
47 CFR Part 15 Feb 2016	Duty cycle and Transmission Duration	NA
	§15.403 (h) (i)- 26 dB Bandwidth measurement	NA
	99 Percent Occupied Bandwidth	NA
	§15.407 (a) (2)- Maximum conducted Output Power	PASS
	§15.407 (a) (2)- Power Spectral Density	PASS
	§15.407 b (3) –Transmission Unwanted emission (Conducted)	PASS
	§15.407 b (3) - Unwanted Emissions levels-Conducted Band edge	PASS

**ePMP2000** was tested by Tarang Lab as per the standards that are listed in the table above. Based on the observations during the test and interpretations by Tarang lab, results have been indicated. The test results produced in this report shall apply only to the above sample that has been tested under the specific conditions and modes of testing as described in the report. Other similar equipment may not necessarily reproduce same result due to production tolerances and measurement uncertainties. Any measurement uncertainties listed in this report are for information purpose only.

The results shall stand invalid, in case there are any modifications / additions / removals to the hardware or software or end use atmosphere to the product tested. This report shall not be modified or in any way revised unless it is expressly permitted and endorsed by Tarang lab, through a duly authorized representative. Particulars on Manufacturer / Supplier / Product configuration / performance criteria, given in this report, are based on the information given by the customer, along with test request. Tarang does not assume any responsibility for the correctness of such information for the above mentioned equipment under test.

Customer acknowledges that this is a test report and not a certificate to gain market access for the product. To gain market access, Customer needs appropriate clearance from the Government or authorized agency for the target market. For markets that allow self-declaration, customer needs to follow the procedure defined by the target market.

<b>Prepared by</b>	<b>Reviewed by</b>	<b>Approved by</b>
		
Suresh G N	Arun Kumar .N.C	Satheesh I
EMI/EMC Test Engineer	Lead EMI/EMC Test Engineer	Technical Manager

## 2 GENERAL INFORMATION

### 2.1 ACCREDITATION DETAILS

Following are the accreditation and listing details for Tarang.

Accreditation / Listing body	Registration / Company / Certificate Number
NABL, India	Certificate No: T-1533, T-1534 <a href="http://www.nabl-india.org/">http://www.nabl-india.org/</a>
FCC (Federal Communications Commission)	Registration Number: 799247 <a href="http://www.fcc.gov/">http://www.fcc.gov/</a>
IC (Industry Canada)	Company Number: 9023A-1 <a href="http://www.ic.gc.ca">http://www.ic.gc.ca</a>

### 2.2 MEASUREMENT UNCERTAINTY

NA

### 3 INSTRUMENTATION AND CALIBRATION

#### 3.1 TEST AND MEASURING EQUIPMENT

The list of following measuring equipment used for this testing conforms to the applicable standards. Performance of all test and measuring equipment including any accessories are checked periodically to ensure accuracy.

#### 3.2 EQUIPMENTS USED

Name of Equipment	Manufacturer	Model No	Serial No	Calibration Due
Spectrum Analyzer	Keysight Technologies	N9020A	MY54420183	05 <sup>th</sup> Jul 2016
X series USB Peak and Average Power sensor	Keysight Technologies	U2021XA	MY55050001	05 <sup>th</sup> Jul 2016
X series USB Peak and Average Power sensor	Keysight Technologies	U2021XA	MY55050002	05 <sup>th</sup> Jul 2016
EMI Test Receiver	R&S	ESIB40	100306	21 <sup>st</sup> Jan 2017 / 04 <sup>th</sup> Jul 2016

Table 1: List of equipment used for Conducted RF Test

## 4 PRODUCT INFORMATION

### 4.1 DESCRIPTION OF THE PRODUCT

EUT is a point to point & point to multipoint fixed outdoor Transceiver with the following defined channels.

<b>40 MHz channel for 17 dBi antenna</b>	<b>10 MHz channel for 17 dBi antenna</b>
Low – 5495 MHz	Low – 5485 MHz
Mid - 5595 MHz	Mid – 5595 MHz
High - 5700 MHz	High – 5710 MHz

<b>Product</b>	ePMP2000
<b>Model Number</b>	C050900P031A
<b>Serial Number</b>	000456D1846A
<b>Product Category / Type of Equipment</b>	ITE
<b>EUT Operating Voltage</b>	120 V AC
<b>EUT Operating frequency range</b>	60 Hz
<b>Max EUT Operating Current</b>	<1 A

Table 2: EUT details

<b>Cable No.</b>	<b>Cable Name</b>	<b>Cable Length</b>	<b>Power / Interconnection cable</b>	<b>Shielded / Unshielded</b>
Cable - 1	Power cable	0.8 meter	Power	Unshielded
Cable - 2	Ethernet Cable	1.5 meter	Interconnection	Unshielded
Cable - 3	Ethernet Cable	3.0 meter	Interconnection	Unshielded

Table 3: List of cables connected to the EUT

### 4.2 SOFTWARE AND FIRMWARE DETAILS

Atheros Radio Test 2 (ART2-GUI) Version 2.3

## 5 TEST DETAILS

### 5.1 PRODUCT AND TEST SETUP

#### 5.1.1 PRODUCT CONFIGURATION

The EUT was powered through AC power supply (120 V AC / 60 Hz). The EUT was connected to Ethernet switch by using RJ45 cable. Figure 1 shows the product configuration during the tests. POE module was used during the test to power ON the EUT.

The 5.4 GHz ePMP Integrated Radio was configured with test software and configured to have the following settings during the course of testing:

- 40 MHz modulation bandwidth for low, mid & high channels
  - Rate - HT40,
  - 54 Mbps OFDM, MCS15 / 270 Mbps
  - Tx Power is 10.5 dBm Tx99 for 17 dBi antenna configuration-Low channel
  - Tx Power is 11.5 dBm Tx99 for 17 dBi antenna configuration-Mid channel
  - Tx Power is 12 dBm Tx99 for 17 dBi antenna configuration-High channel
- 10 MHz modulation bandwidth for low, mid & high channels
  - Rate – Legacy,
  - 54 Mbps OFDM, MCS15 / 130 Mbps
  - Tx Power is 9 dBm Tx99 for 17 dBi antenna configuration-Low channel
  - Tx Power is 9 dBm Tx99 for 17 dBi antenna configuration-Mid channel
  - Tx Power is 9 dBm Tx99 for 17 dBi antenna configuration-High channel

The unit was continuously monitored for transmission using an auxiliary antenna during the radiated tests.

### 5.1.2 TEST SETUP DETAILS

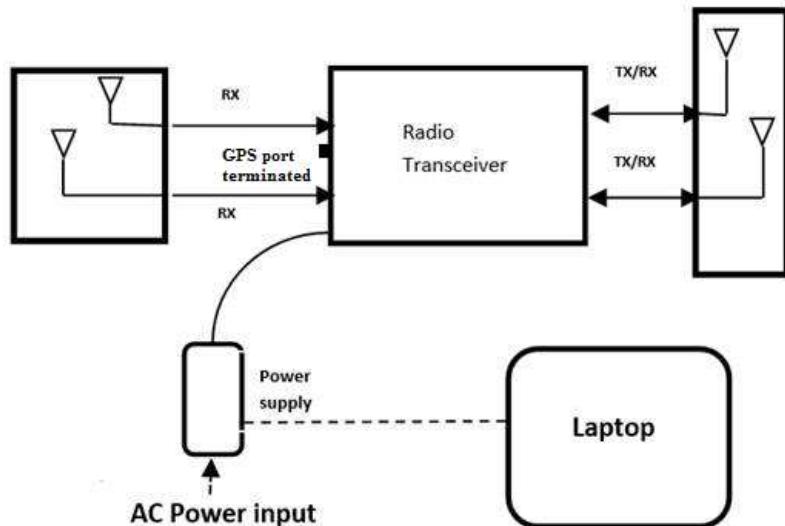


Figure 1: Block diagram of the EUT test setup

### 5.1.3 ACCESSORIES

Name of the Equipment	Manufacturer	Model Number	Serial Number
17 dBi Antenna Beam steer- Rx	Cambium Networks	C050900D020A	NA
17 dBi Antenna sector- Tx	Cambium Networks	C050900D021A	NA
Power Supply	Cambium Networks	NET P30 56	031-326-6719
Switching Power Supply Gigabit Compatible	Cambium Networks	NET-P30-56	N000000L034A

## 5.2 APPLICABLE TESTS

Applicable Standard	Description	Test level / Test Voltage	Applicability
47 CFR Part 15, Feb 2016	Duty Cycle and transmission duration	NA	Antenna port
	26 dB Bandwidth measurement	NA	Antenna port
	99 Percent Occupied Bandwidth	NA	Antenna port
	Maximum Conducted Output Power	$\leq 250$ mW	Antenna port
	Power Spectral Density	Power spectral density should be $\leq 11$ dBm in 1 MHz bandwidth	Antenna port
	Transmitter Unwanted emission (Conducted)	9 kHz to 40 GHz	Antenna port
	Unwanted Emission(Band edge)	EIRP of $< -27$ dBm/MHz	Antenna port

## 5.3 TEST RESULT

### 5.3.1 DUTY CYCLE (X) AND TRANSMISSION DURATION (T)

#### 5.3.1.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016
<b>Test Procedure</b>	789033 D2 General U-NII Test Procedures New Rule V01r01
<b>Resolution Bandwidth</b>	8 MHz
<b>Video Bandwidth</b>	8 MHz
<b>Sweep Time</b>	Auto
<b>Attenuation</b>	Auto
<b>Test Mode</b>	Conducted
<b>Detector</b>	RMS
<b>Input Voltage</b>	120 V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	55.0 %
<b>Tested By</b>	Dikshit Raviteja / Suresh.G.N
<b>Test Date</b>	8 <sup>th</sup> Feb 2016

#### 5.3.1.2 LIMITS

NA

#### 5.3.1.3 TEST SETUP



Figure 2: Typical test setup for Conducted RF Test

#### 5.3.1.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per section II B of “**789033 D2 General U-NII Test Procedures New Rule V01r01**”. The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. The graph and data captured from spectrum analyzer and recorded.

### 5.3.1.5 MEASUREMENT GRAPHS / DATA

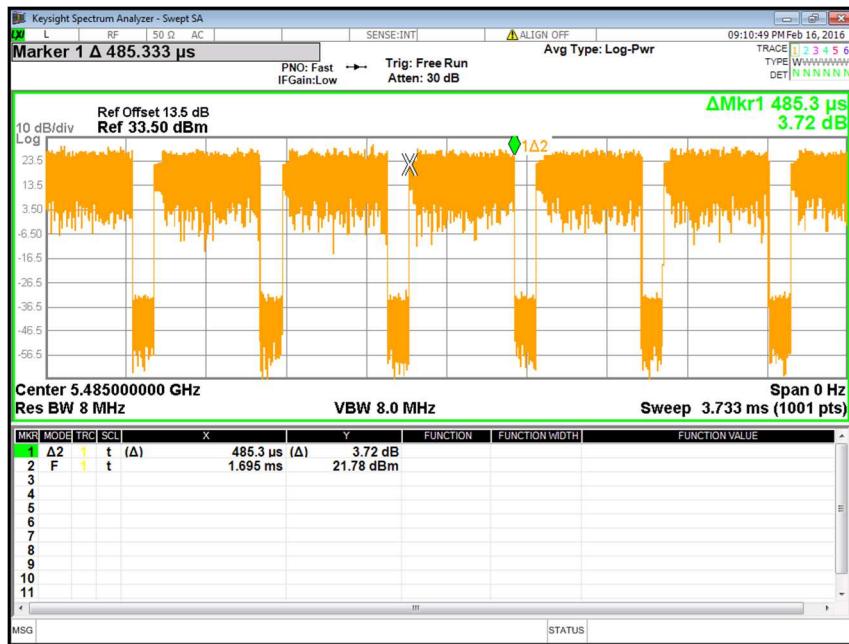


Figure 3: Measured ON time

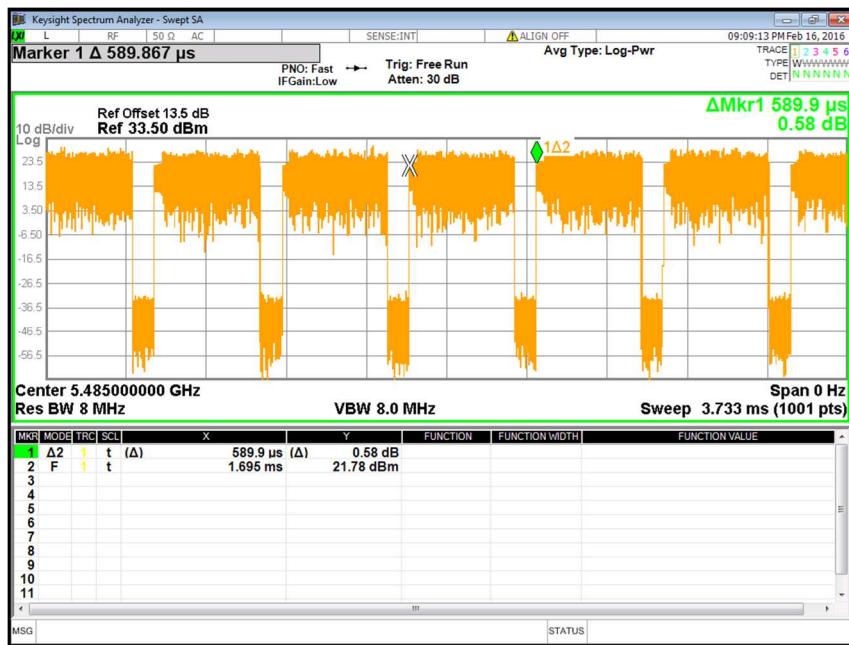


Figure 4: Measured Transmission Period (T)

### 5.3.1.6 RESULT

The Duty cycle and Transmission duration data were recorded.

Mode	ON time (μsec)	T (μsec)	Duty Cycle X (Linear)	Duty Cycle (%)	50/T Minimum RBW and VBW (kHz)
Tx ON	485.3	589.9	0.822	82.2%	847.6

*Note: Duty cycle = (ON time / Period)\*100*

### 5.3.2 26 dB EMISSION BANDWIDTH

#### 5.3.2.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016
<b>Test Procedure</b>	789033 D2 General U-NII Test Procedures New Rule V01r01
<b>Resolution Bandwidth</b>	100 kHz, 300 kHz
<b>Video Bandwidth</b>	300 kHz, 1 MHz
<b>Sweep Time</b>	Auto
<b>Attenuation</b>	Auto
<b>Test Mode</b>	Conducted
<b>Detector</b>	Peak
<b>Input Voltage</b>	120 V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	55.0 %
<b>Tested By</b>	Dikshit Raviteja / Suresh.G.N
<b>Test Date</b>	08 <sup>th</sup> Feb 2016

#### 5.3.2.2 LIMITS

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit</b>
47 CFR, Part 15 Feb 2016	§15.403 (h) (i)	5470 MHz to 5725 MHz	NA

#### 5.3.2.3 TEST SETUP



Figure 5: Typical test setup for Conducted RF Test

#### 5.3.2.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per the **“789033 D2 General U-NII Test Procedures New Rule V01r01”**. The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. The graph and data captured from spectrum analyzer and recorded.

### 5.3.2.5 MEASUREMENT GRAPHS / DATA

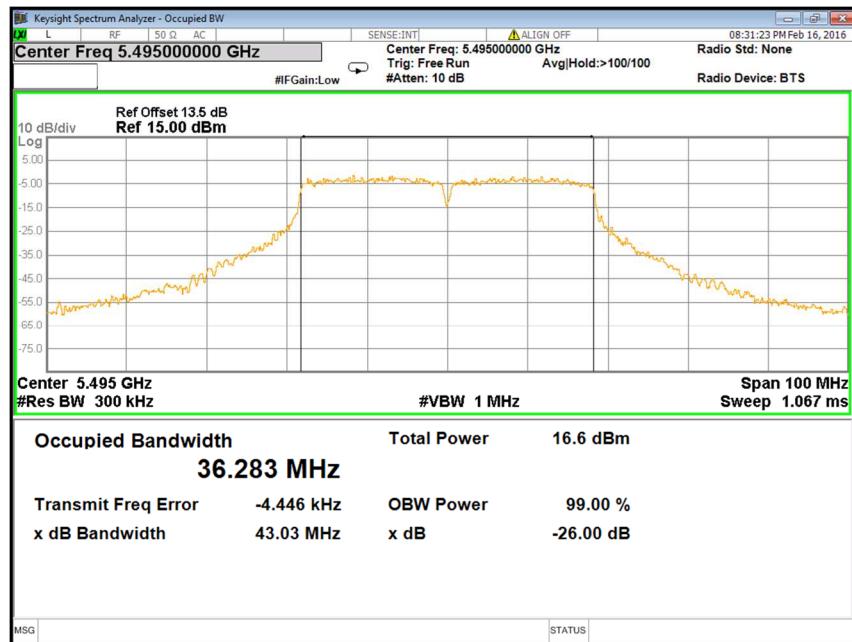


Figure 6: 40 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.0 – 5495 MHz

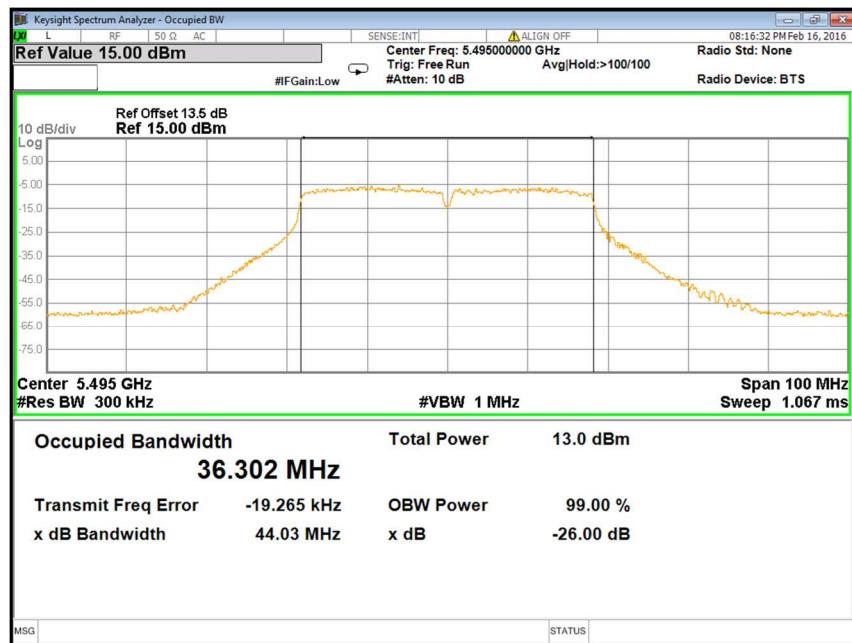


Figure 7: 40 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.1 – 5495 MHz

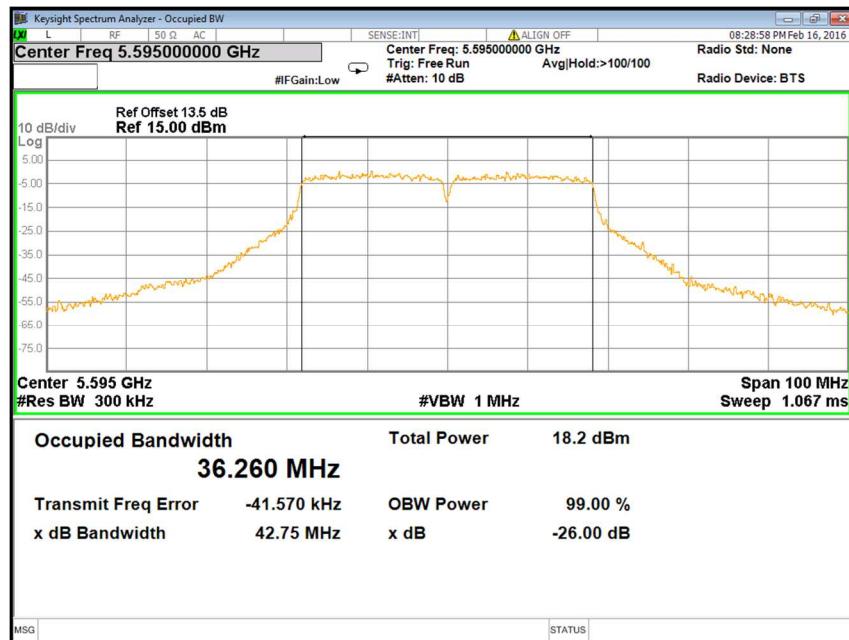


Figure 8: 40 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.0 - 5595 MHz

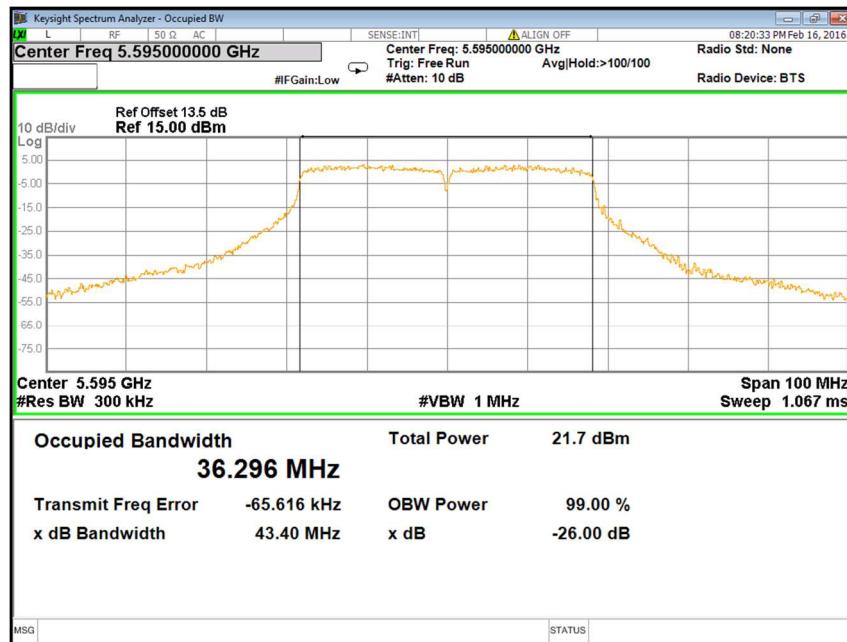


Figure 9: 40 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.1 - 5595 MHz

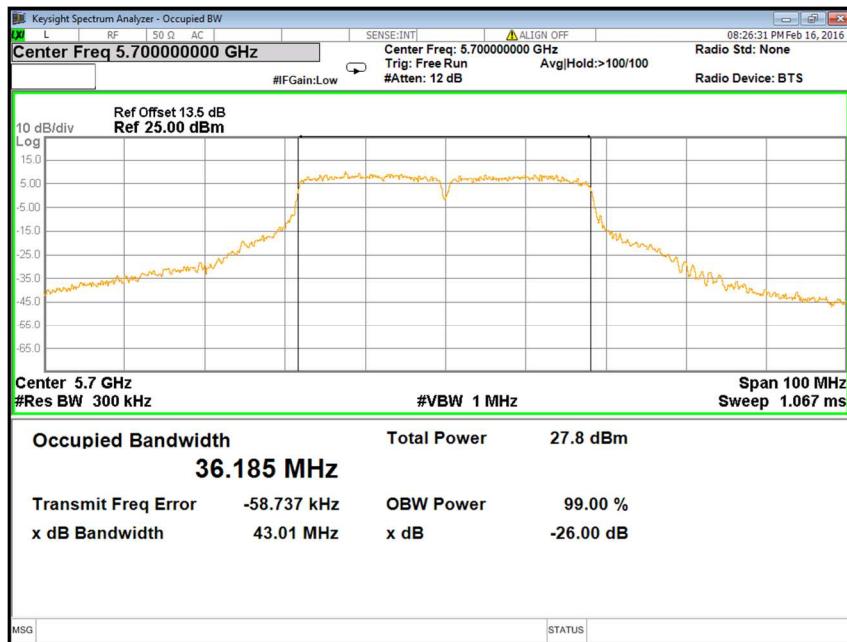


Figure 10: 40 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.0 - 5700 MHz

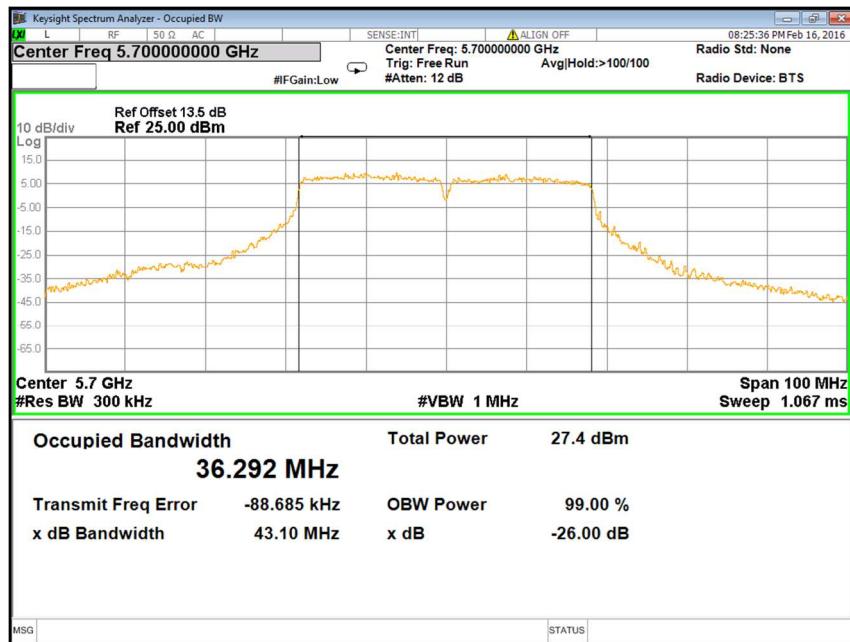


Figure 11: 40 MHz, 17 dBi, High channel: 26 dB bandwidth: measured at Ch.1 - 5700 MHz



Figure 12: 10 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.0 - 5485 MHz

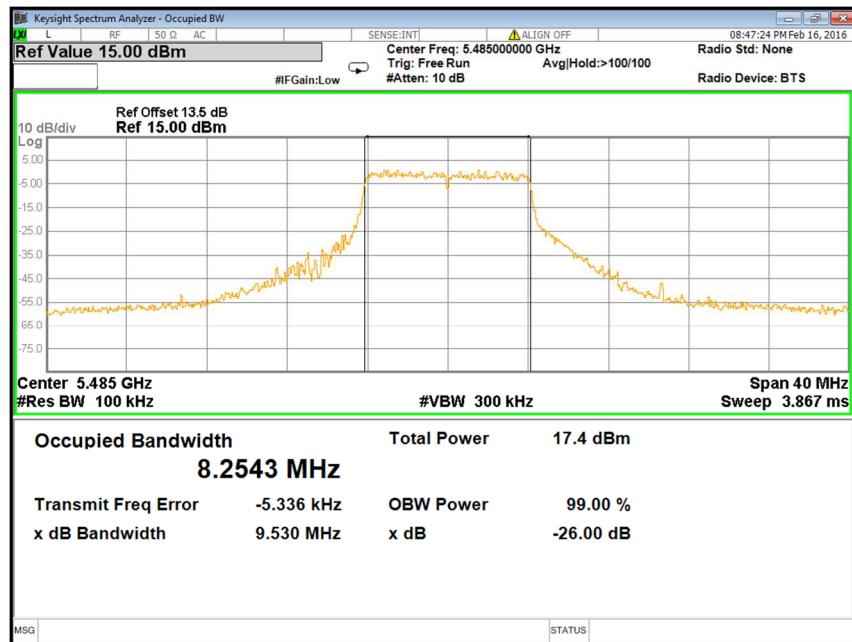


Figure 13: 10 MHz, 17 dBi, Low channel: 26 dB bandwidth measured at Ch.1 - 5485 MHz

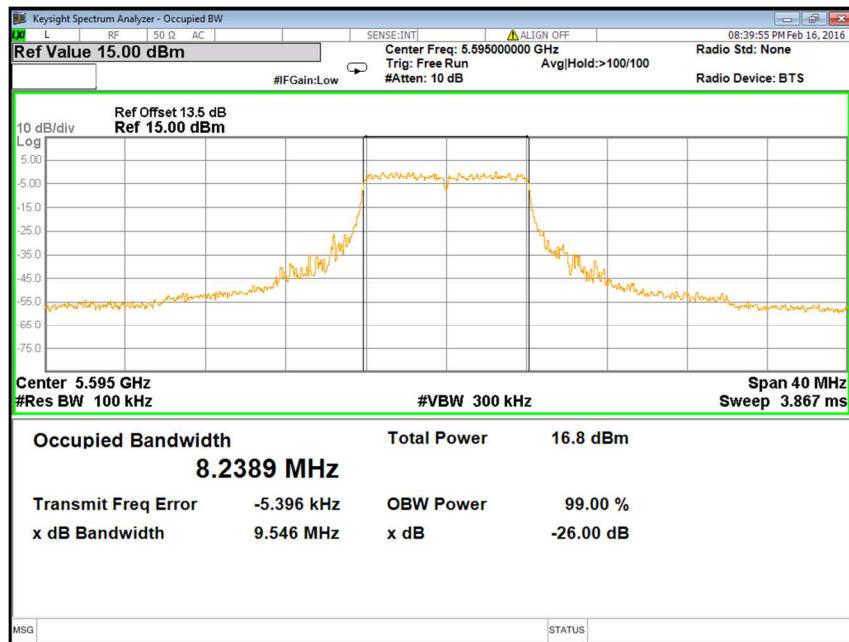


Figure 14: 10 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.0 - 5595 MHz

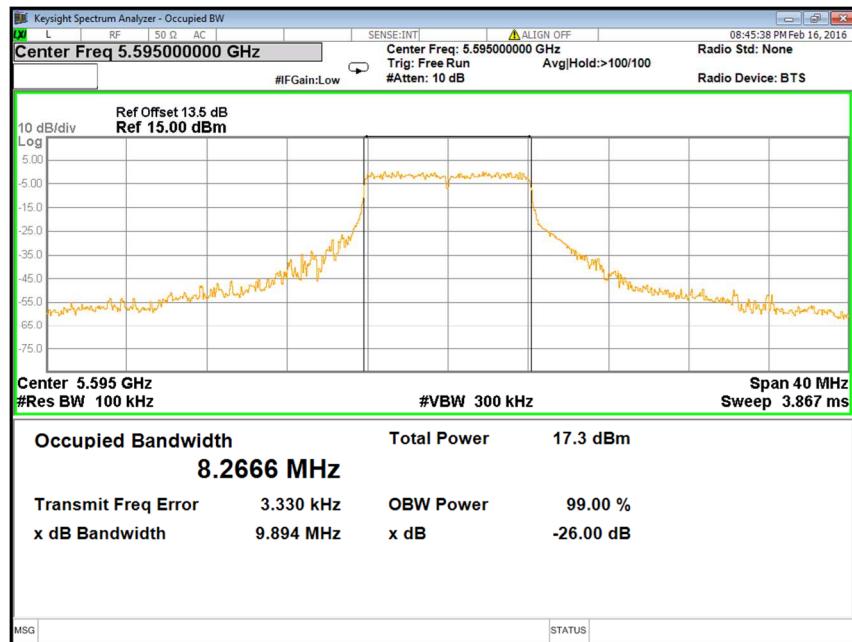


Figure 15: 10 MHz, 17 dBi, Mid channel: 26 dB bandwidth measured at Ch.1 - 5595 MHz

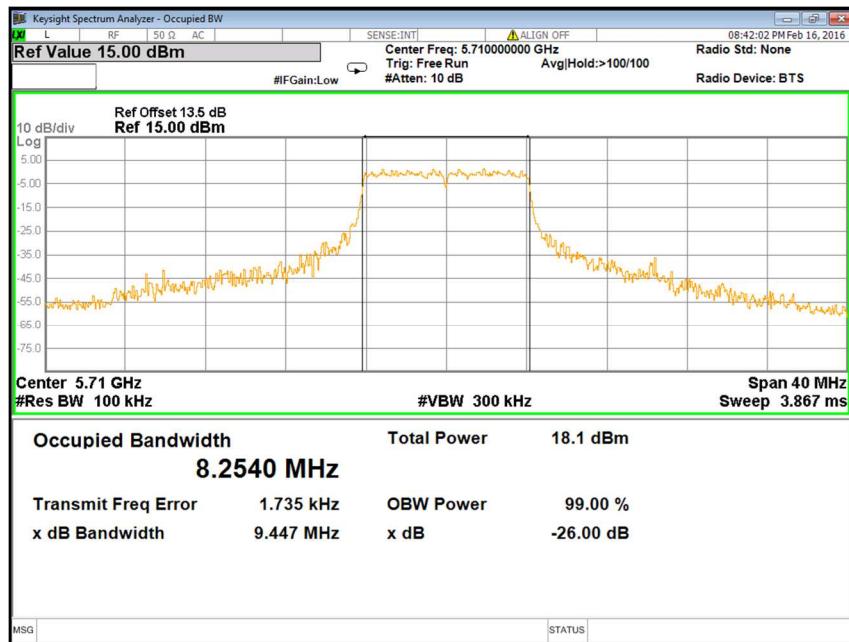


Figure 16: 10 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.0 - 5710 MHz

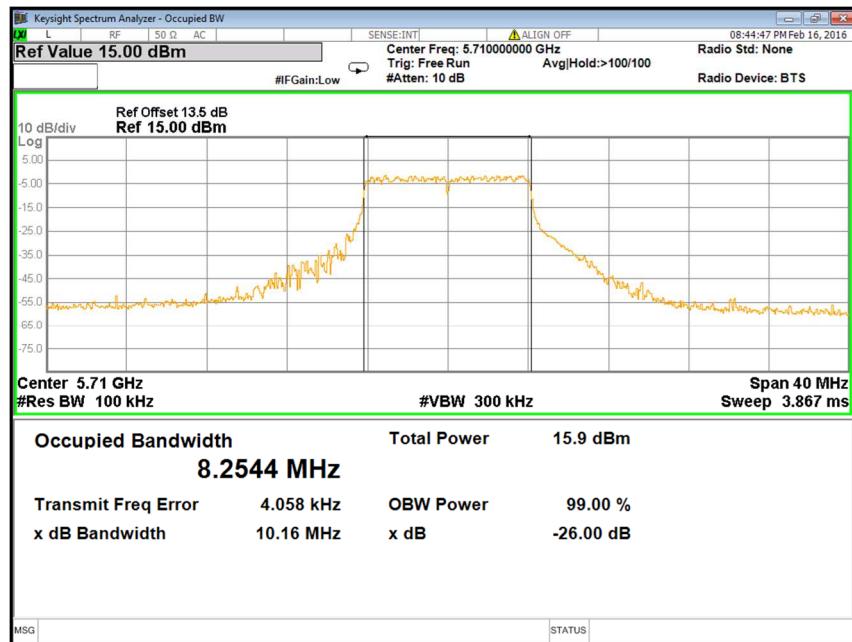


Figure 17: 10 MHz, 17 dBi, High channel: 26 dB bandwidth measured at Ch.1 - 5710 MHz

### 5.3.2.6 RESULT

The 26 dB Emission bandwidth is measured for all channels in both 40 MHz & 10 MHz modulation bandwidth. Refer below table for consolidated data.

Configuration	Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (MHz)
17 dBi Antenna Condition	40	Ch. 0	5495	43.03
	40	Ch. 0	5595	42.75
	40	Ch. 0	5700	43.01
	40	Ch. 1	5495	44.03
	40	Ch. 1	5595	43.40
	40	Ch. 1	5700	43.10
	10	Ch. 0	5485	10.10
	10	Ch. 0	5595	9.546
	10	Ch. 0	5710	9.447
	10	Ch. 1	5485	9.530
	10	Ch. 1	5595	9.894
	10	Ch. 1	5710	10.16

**Table 4: Result for 26 dB bandwidth in both 40 MHz and 10 MHz modulation bandwidth**

### 5.3.3 99 PERCENT OCCUPIED CHANNEL BANDWIDTH

#### 5.3.3.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016
<b>Test Procedure</b>	789033 D2 General U-NII Test Procedures New Rule V01r01
<b>Resolution Bandwidth</b>	100 kHz, 300 kHz
<b>Video Bandwidth</b>	300 kHz, 1 MHz
<b>Sweep Time</b>	Auto
<b>Attenuation</b>	Auto
<b>Test Mode</b>	Conducted
<b>Detector</b>	Peak
<b>Input Voltage</b>	120 V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	55.0 %
<b>Tested By</b>	Dikshit Raviteja
<b>Test Date</b>	8 <sup>th</sup> Feb 2016

#### 5.3.3.2 LIMITS

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit</b>
47 CFR, Part 15 Feb 2016	NA	5470 MHz to 5725 MHz	NA

#### 5.3.3.3 TEST SETUP



Figure 18 Typical test setup for Conducted RF Test

#### 5.3.3.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per the **“789033 D2 General U-NII Test Procedures New Rule V01r01”**. The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. The graph and data captured from spectrum analyzer and recorded.

### 5.3.3.5 MEASUREMENT GRAPHS / DATA

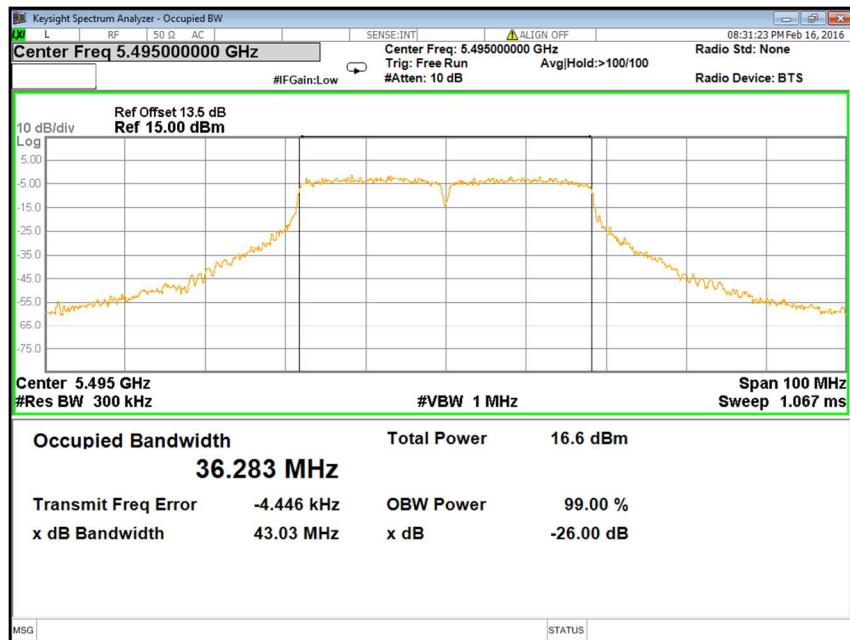


Figure 19: 40 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.0 – 5495 MHz

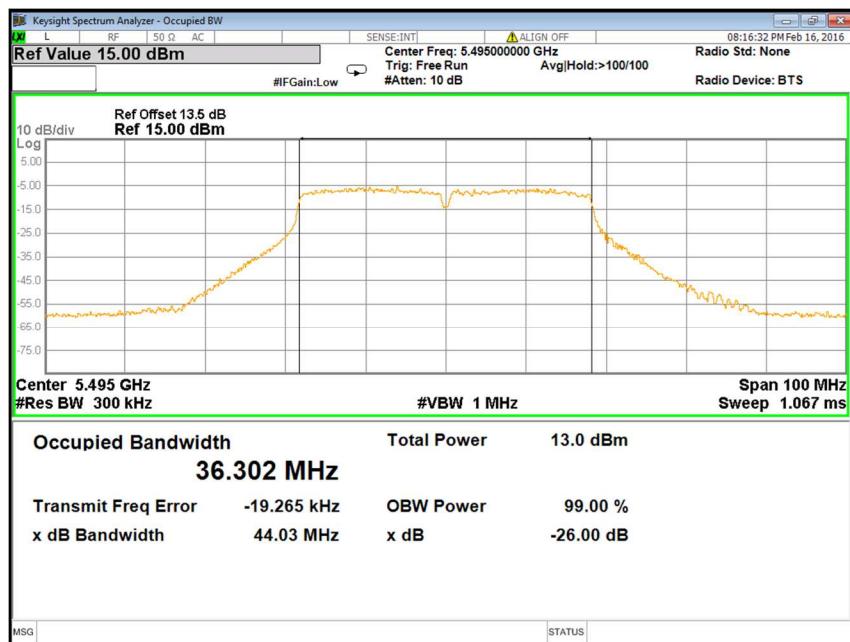


Figure 20: 40 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.1 – 5495 MHz

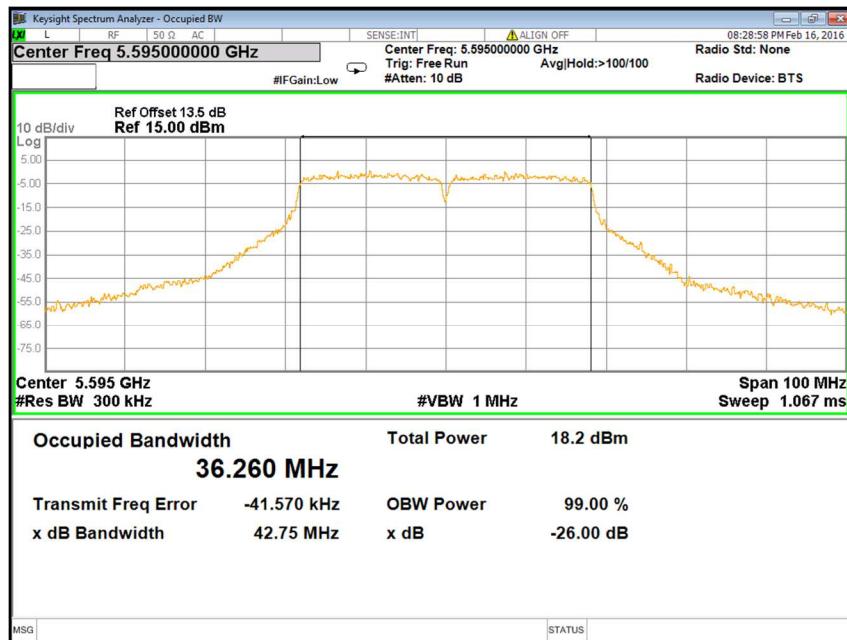


Figure 21: 40 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.0 – 5595 MHz

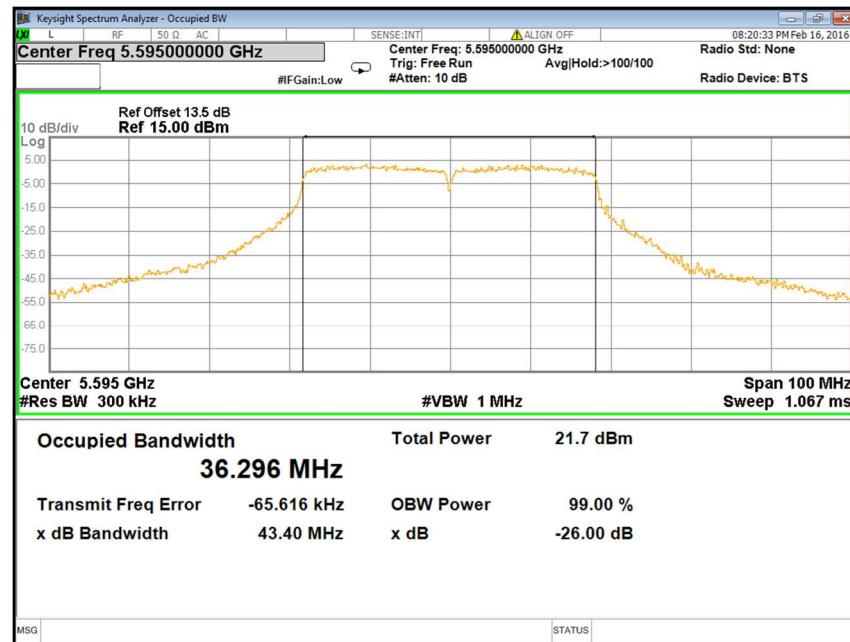


Figure 22: 40 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.1 – 5595 MHz

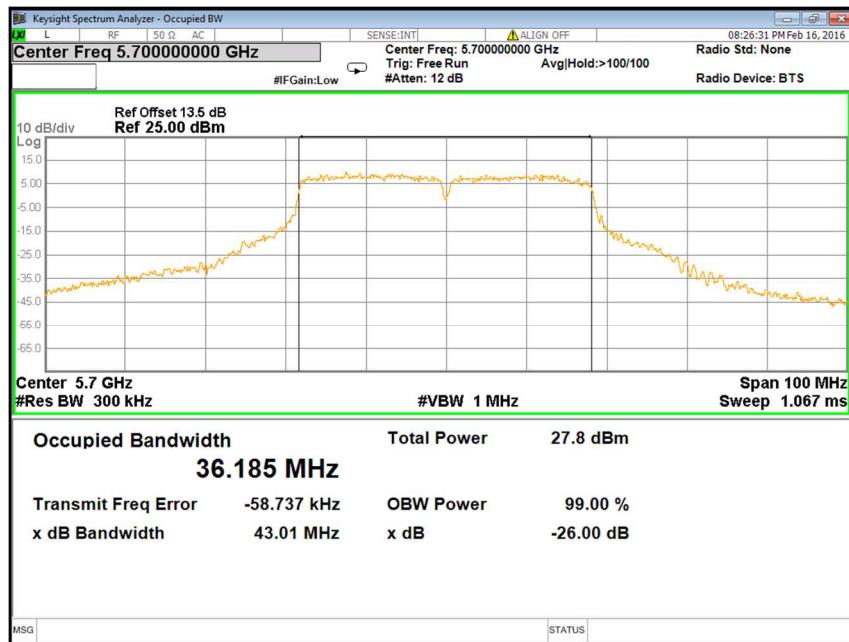


Figure 23: 40 MHz, 17 dBi, High channel: 99% OBW measured at Ch.0 – 5700 MHz

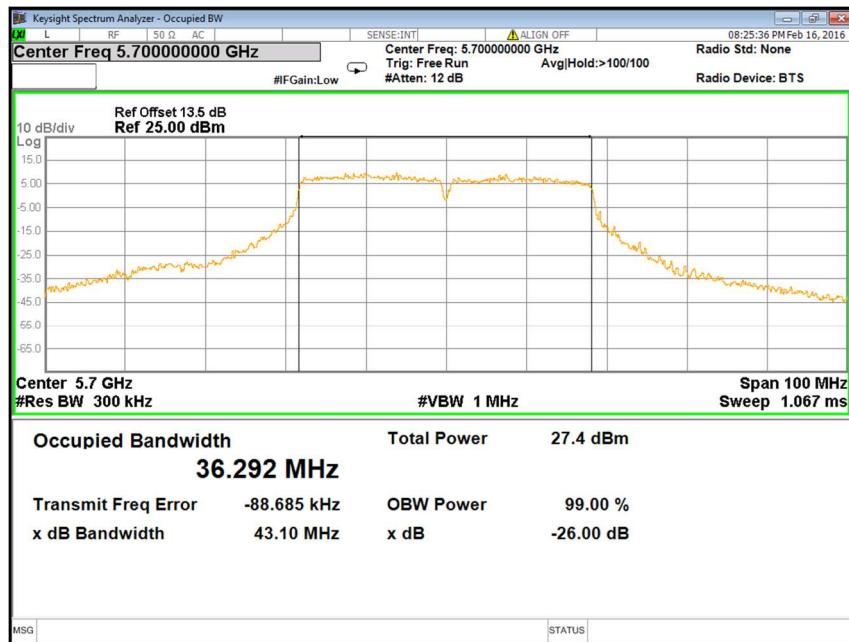


Figure 24: 40 MHz, 17 dBi, High channel: 99% OBW measured at Ch.1 – 5700 MHz

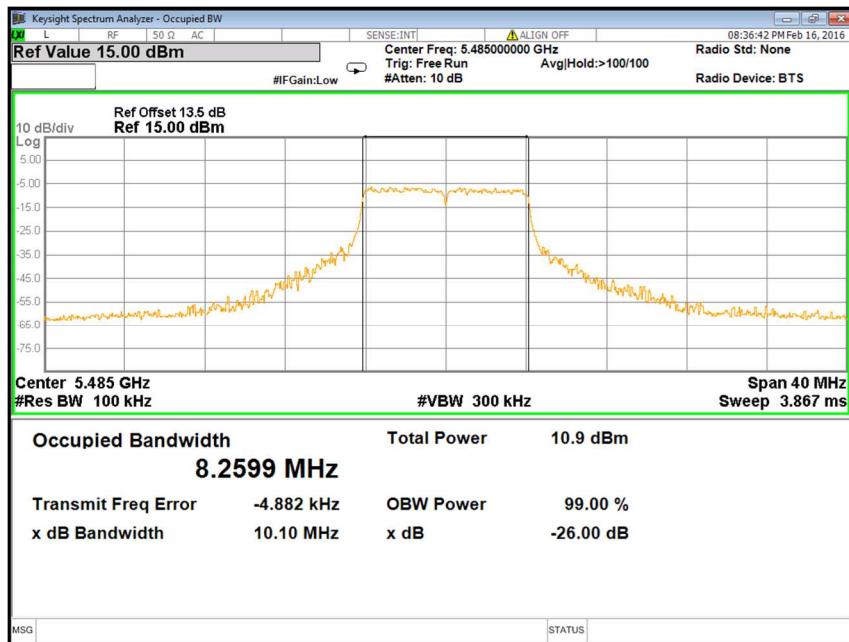


Figure 25: 10 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.0 – 5485 MHz

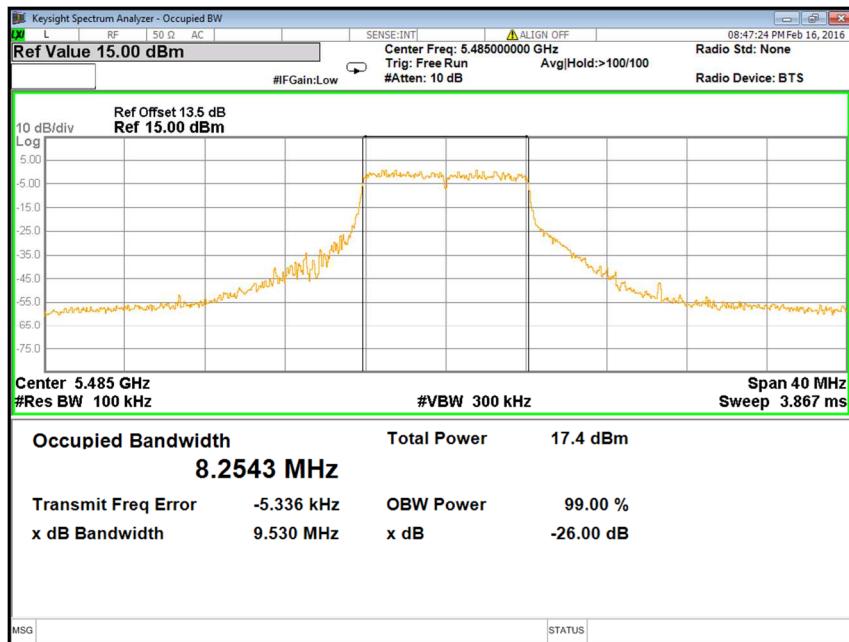


Figure 26: 10 MHz, 17 dBi, Low channel: 99% OBW measured at Ch.1 – 5485 MHz

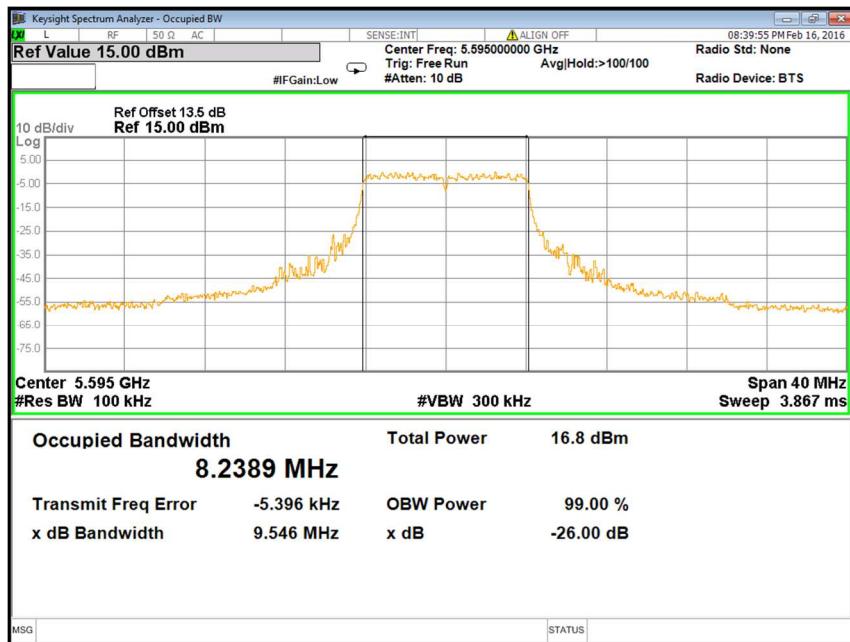


Figure 27: 10 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.0 – 5595 MHz

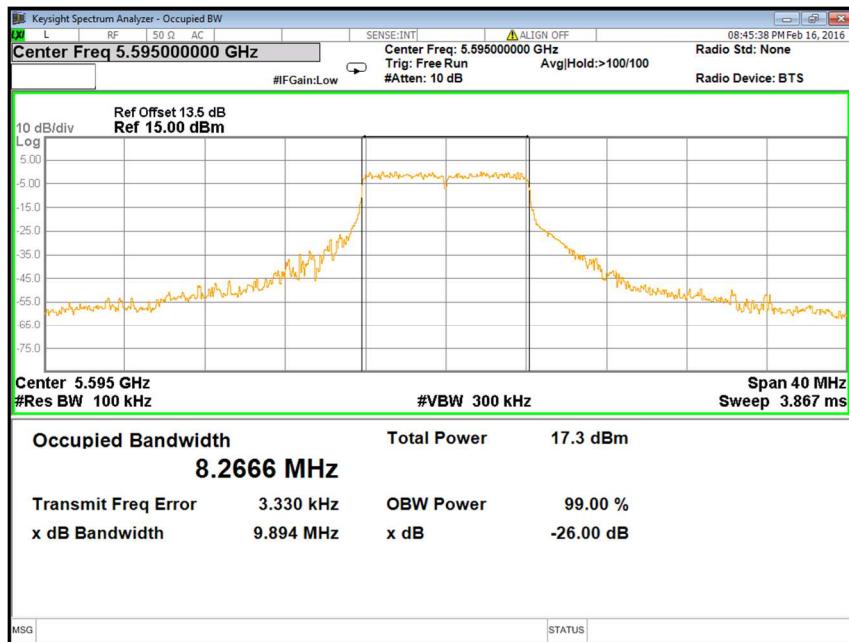


Figure 28: 10 MHz, 17 dBi, Mid channel: 99% OBW measured at Ch.1 – 5595 MHz

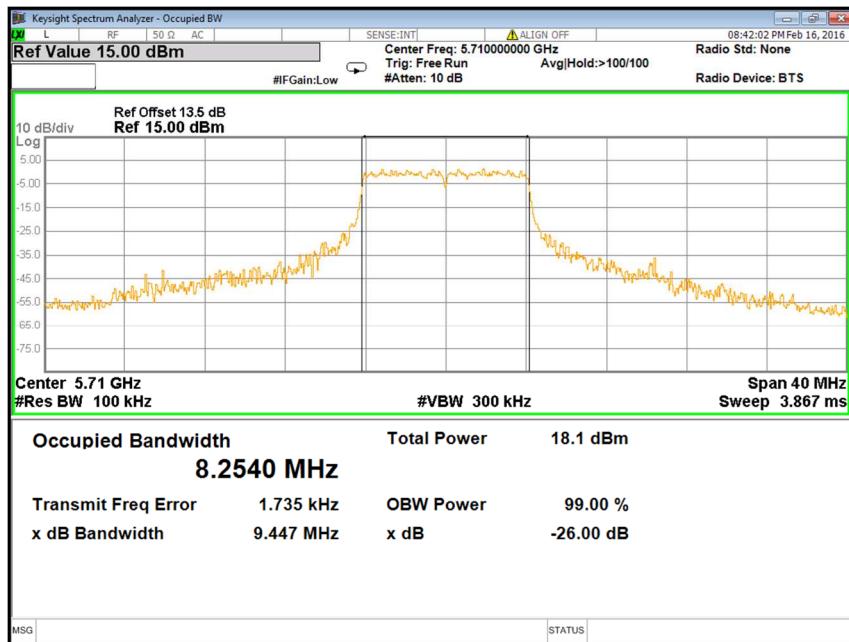


Figure 29: 10 MHz, 17 dBi, High channel: 99% OBW measured at Ch.0 – 5710 MHz

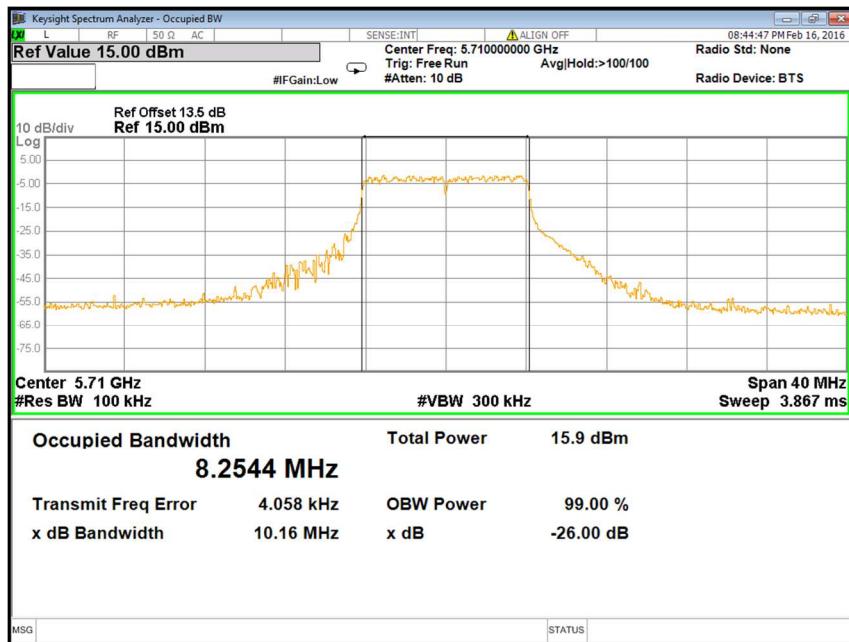


Figure 30: 10 MHz, 17 dBi, High channel: 99% OBW measured at Ch.1 – 5710 MHz

### 5.3.3.6 RESULT

The 99% Occupied Channel Bandwidth for all channels in both 40 MHz & 10 MHz Modulation Bandwidths has been measured and tabulated in below table.

Configuration	Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (MHz)
17 dBi Antenna Condition	40	Ch. 0	5495	36.283
	40	Ch. 0	5595	36.260
	40	Ch. 0	5700	36.185
	40	Ch. 1	5495	36.302
	40	Ch. 1	5595	36.296
	40	Ch. 1	5700	36.292
	10	Ch. 0	5485	8.259
	10	Ch. 0	5595	8.238
	10	Ch. 0	5710	8.254
	10	Ch. 1	5485	8.254
	10	Ch. 1	5595	8.266
	10	Ch. 1	5710	8.254

Table 5: Result for 99% Occupied bandwidth in both 40 MHz and 10 MHz modulation bandwidth

## 5.3.4 MAXIMUM CONDUCTED OUTPUT POWER

### 5.3.4.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016
<b>Test Procedure</b>	789033 D2 General U-NII Test Procedures New Rule V01r01
<b>Test Mode</b>	Conducted
<b>Detector</b>	Average
<b>Input Voltage</b>	120 V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	55.0 %
<b>Tested By</b>	Dikshit Raviteja / Suresh GN
<b>Test Date</b>	08 <sup>th</sup> Feb 2016

### 5.3.4.2 LIMITS

Standard	Reference section	Frequency range	Limit
47 CFR, Part 15 Feb 2016	§15.407 a (2)	5470 MHz to 5725 MHz	max conducted Tx power $\leq 23.97 \text{ dBm}$ (250 mW) max Limit (for 17 dBi antenna) : $\leq 12.97 \text{ dBm}$

### 5.3.4.3 TEST SETUP



Figure 31: Typical test setup for Conducted RF Test

### 5.3.4.4 TEST PROCEDURE

The Conducted test was performed using the power meter. Measurements were done as per Section II E 3.b (Method PM-G) of KDB “**789033 DO2 General UNII Test Procedures New Rules v01r01**”. The RF output of the EUT was connected to the input port of Power meter using an attenuator. The graph and data captured from power meter and compared with the limits specified in the standard.

#### 5.3.4.5 MEASUREMENT GRAPHS / DATA

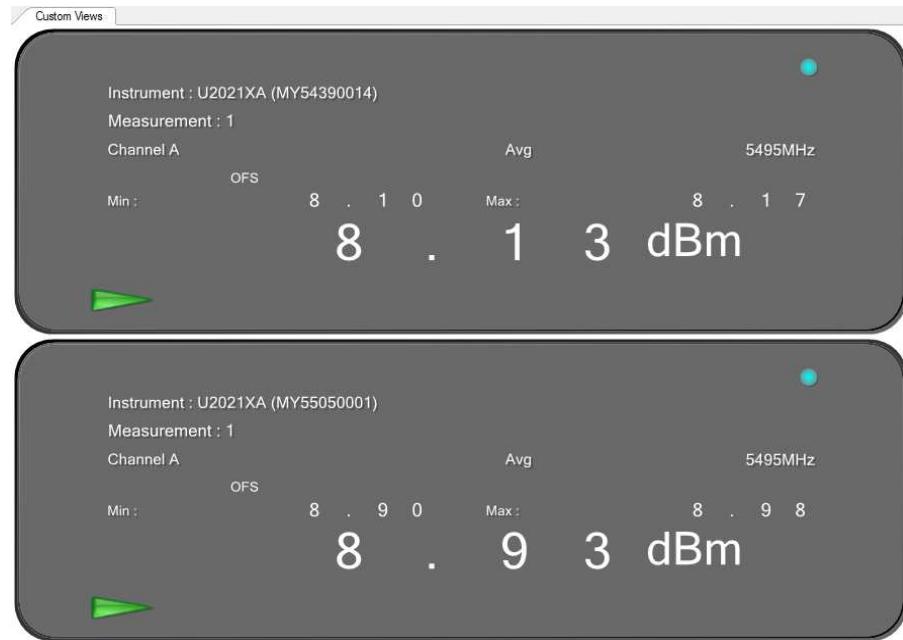


Figure 32: 40 MHz, 17 dBi, Low channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5495 MHz

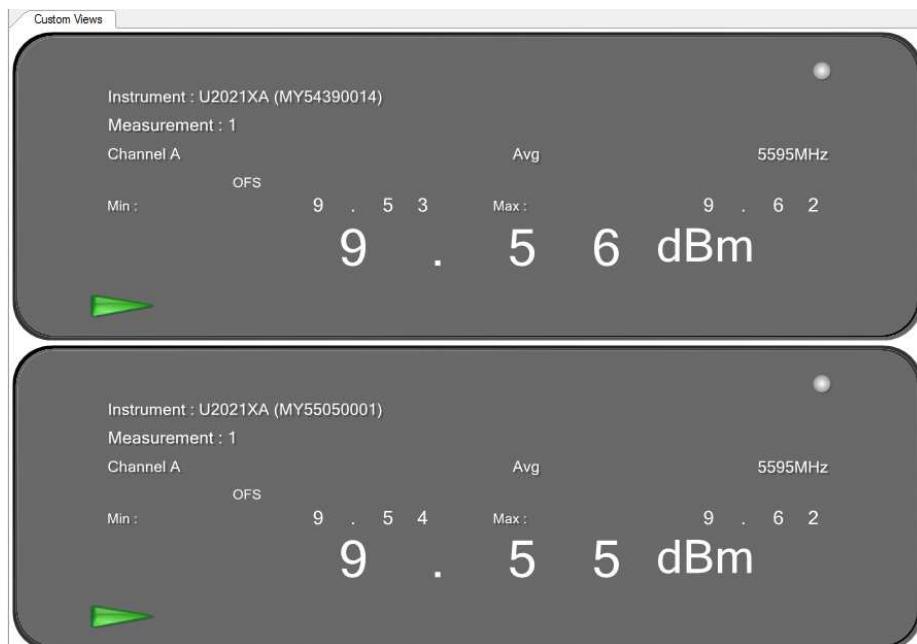


Figure 33: 40 MHz, 17 dBi, Mid channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5595 MHz

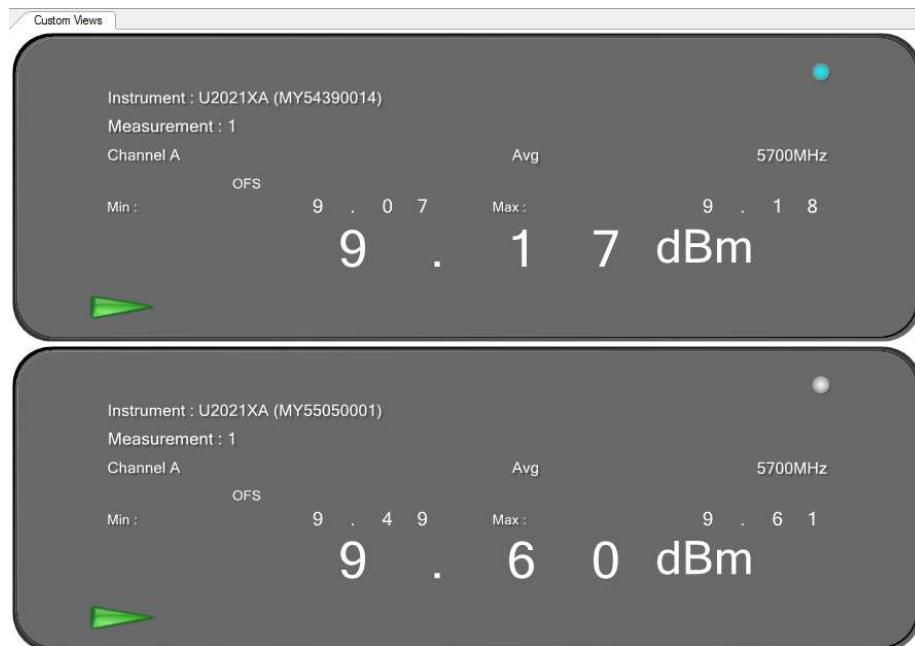


Figure 34: 40 MHz, 17 dBi, High channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5700 MHz

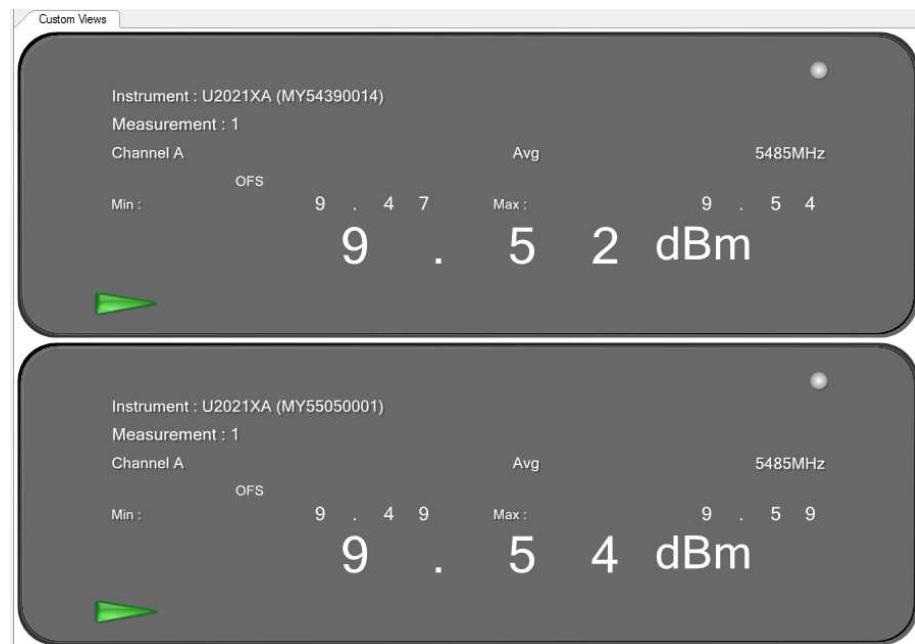


Figure 35: 10 MHz, 17 dBi, Low channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5485 MHz

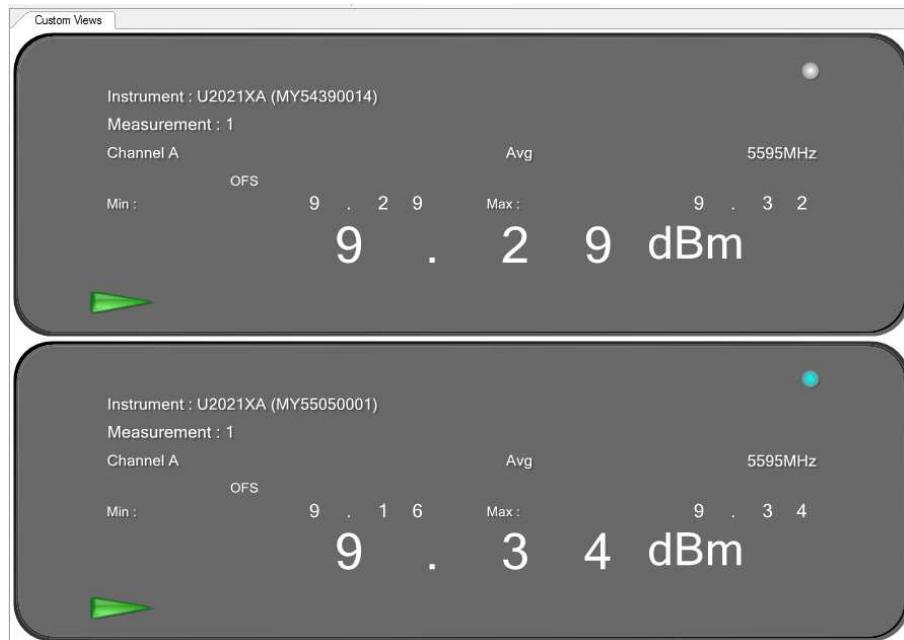


Figure 36: 10 MHz, 17 dBi, Mid channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5595 MHz

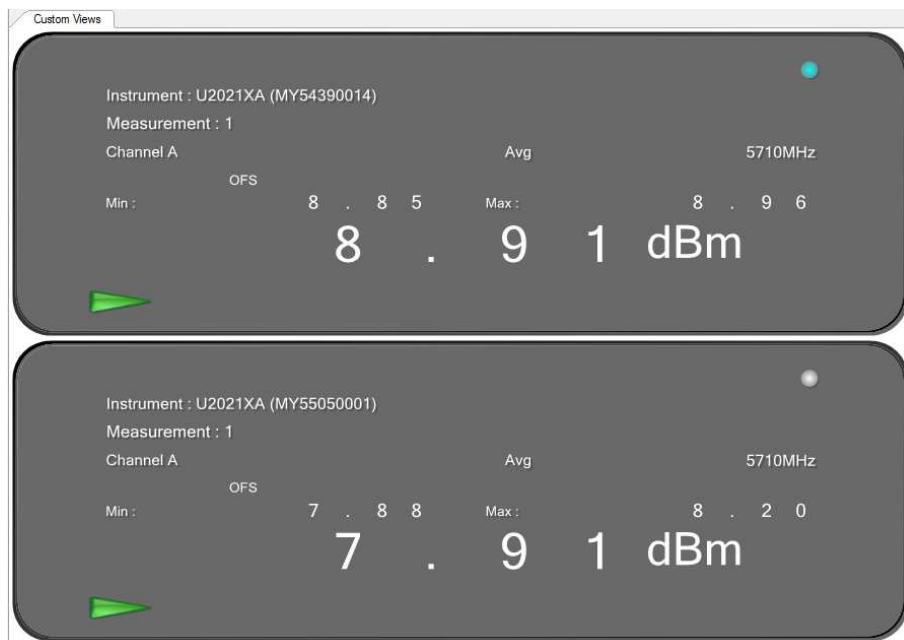


Figure 37: 10 MHz, 17 dBi, High channel: Maximum conducted output power measured at Ch.0 & Ch.1 – 5710 MHz

### 5.3.4.6 RESULT

Maximum Conducted Output Power for all channels in both 40 MHz & 5 MHz modulation bandwidth is within the specified limits. Refer below table for consolidated data.

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm)
40	Ch. 0	5495	8.13
40	Ch. 1	5495	8.93
40	Ch. 0	5595	9.56
40	Ch. 1	5595	9.55
40	Ch. 0	5700	9.17
40	Ch. 1	5700	9.60
10	Ch. 0	5485	9.52
10	Ch. 1	5485	9.54
10	Ch. 0	5595	9.29
10	Ch. 1	5595	9.34
10	Ch. 0	5710	8.91
10	Ch. 1	5710	7.97

Table 6: Max RF out power for 17 dBi configuration

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Consolidated Power (dBm)	Limit (dBm)	Result
40	Ch. 0 & Ch. 1	5495	11.55	12.97	PASS
40	Ch. 0 & Ch. 1	5595	12.55	12.97	PASS
40	Ch. 0 & Ch. 1	5700	12.38	12.97	PASS
10	Ch. 0 & Ch. 1	5485	12.50	12.97	PASS
10	Ch. 0 & Ch. 1	5595	12.27	12.97	PASS
10	Ch. 0 & Ch. 1	5710	11.39	12.97	PASS

Table 7: Consolidated values across channels and final power for 17 dBi configuration

The recorded power in dBm was converted into Watt, and then added and convert the result back to dBm  

$$dBm \text{ to } mW = \log(mW) * 10$$
  

$$mW \text{ to } dBm = 10^{\log(mW) / 10}$$

## 5.3.5 POWER SPECTRAL DENSITY

### 5.3.5.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016
<b>Test Procedure</b>	789033 D2 General U-NII Test Procedures New Rule V01r01
<b>Frequency Range</b>	5470 MHz to 5725 MHz
<b>Resolution Bandwidth</b>	1 MHz
<b>Video Bandwidth</b>	3 MHz
<b>Sweep Time</b>	1 ms
<b>Attenuation</b>	Auto
<b>Test Mode</b>	Conducted
<b>Detector</b>	RMS
<b>Input Voltage</b>	120 V AC
<b>Input Frequency</b>	60 Hz
<b>Temperature</b>	24.0 °C
<b>Humidity</b>	55.0 %
<b>Tested By</b>	Dikshit Raviteja
<b>Test Date</b>	08 <sup>th</sup> Feb 2016

### 5.3.5.2 LIMITS

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit</b>
47 CFR, Part 15 Feb 2016	§15.407 a(2)	5470 MHz to 5725 MHz	≤ 11 dBm in any 1MHz band Limit (for 17 dBi antenna configuration) : ≤ 0 dBm\MHz

### 5.3.5.3 TEST SETUP



Figure 38: Typical test setup for Conducted Test

### 5.3.5.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per Section II F (PSD) of KDB ‘789033 D02 General UNII Test Procedures New Rules v01r01’. The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. The graph and data captured from spectrum analyzer and compared with the limits specified in the standard.

### 5.3.5.5 MEASUREMENT GRAPHS / DATA

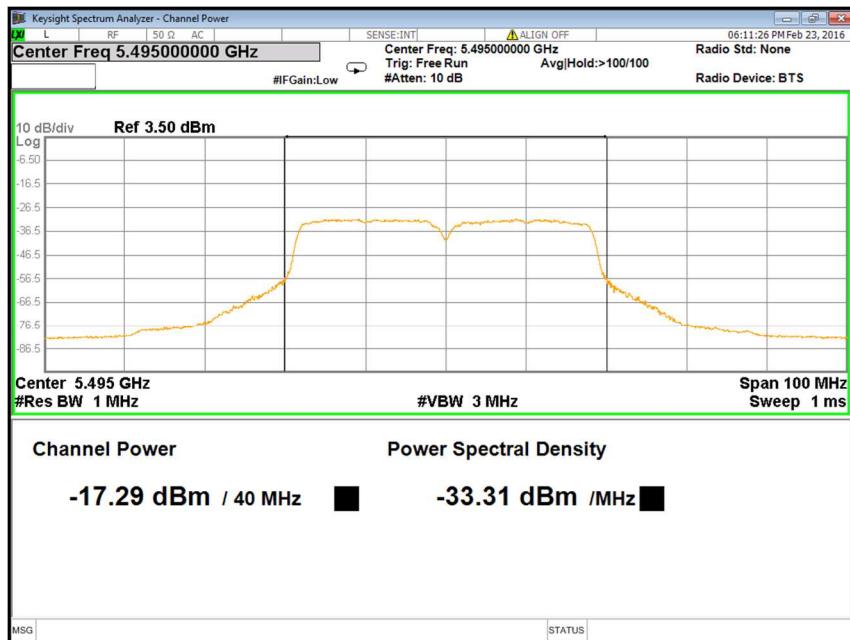


Figure 39: 40 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 0 – 5495 MHz



Figure 40: 40 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 1 – 5495 MHz

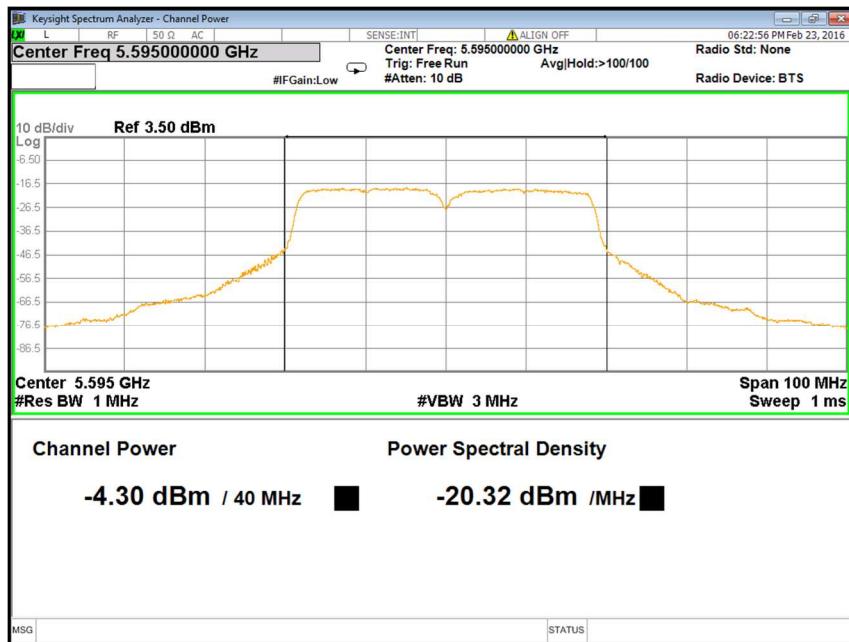


Figure 41: 40 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 0 – 5595 MHz



Figure 42: 40 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 1 – 5595 MHz



Figure 43: 40 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 0 – 5700 MHz

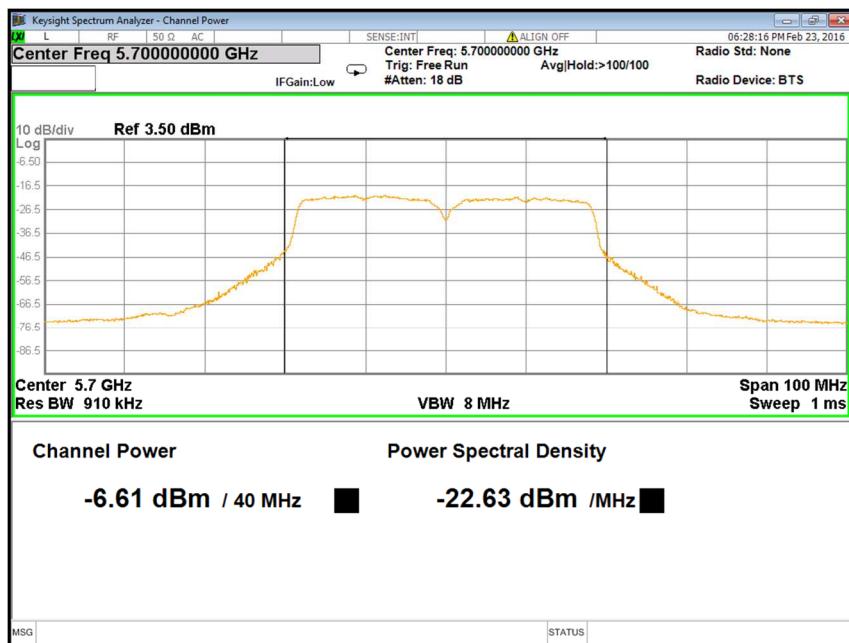


Figure 44: 40 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 1 – 5700 MHz



Figure 45: 10 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 0 – 5485 MHz



Figure 46: 10 MHz, 17 dBi, Low channel: Power spectral density measured at Ch. 1 – 5485 MHz

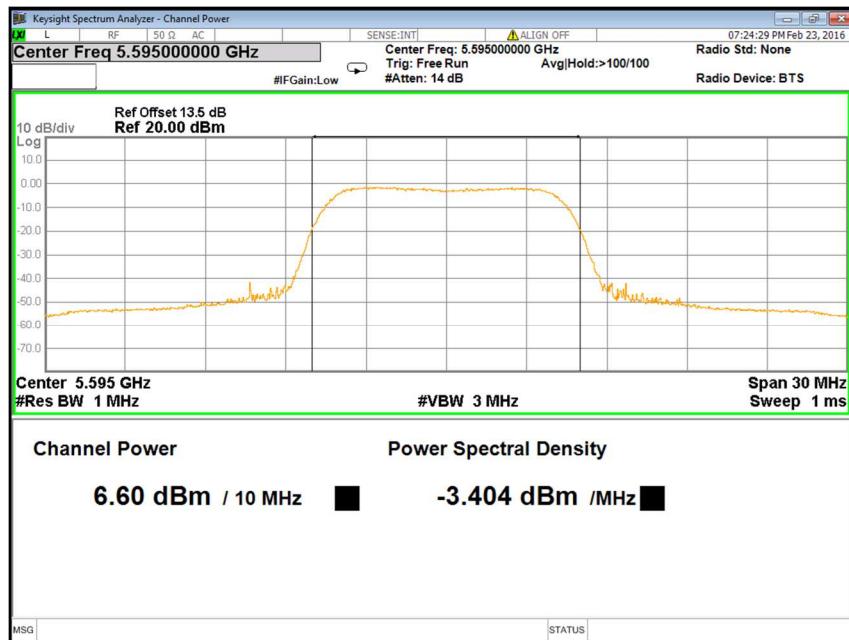


Figure 47: 10 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 0 – 5595 MHz

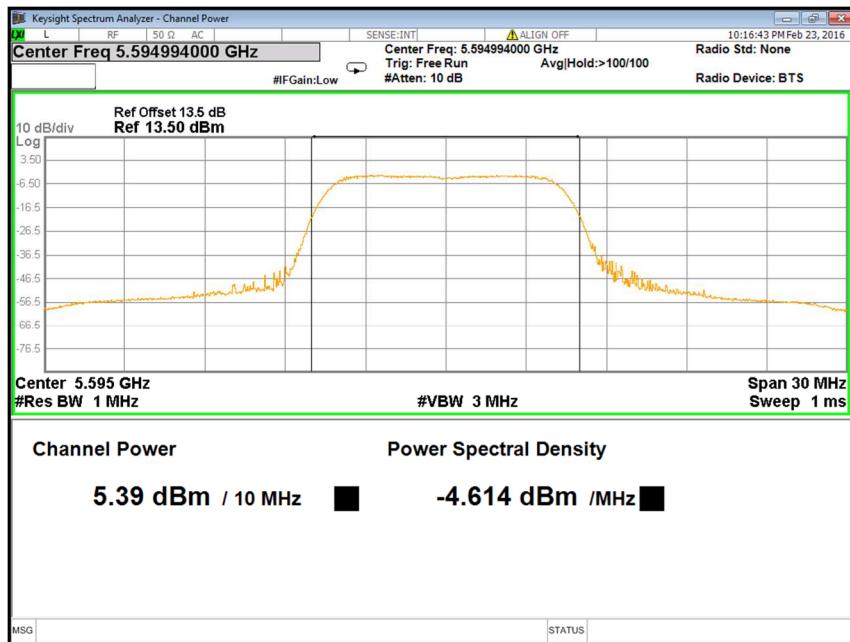


Figure 48: 10 MHz, 17 dBi, Mid channel: Power spectral density measured at Ch. 1 – 5595 MHz



Figure 49: 10 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 0 – 5710 MHz

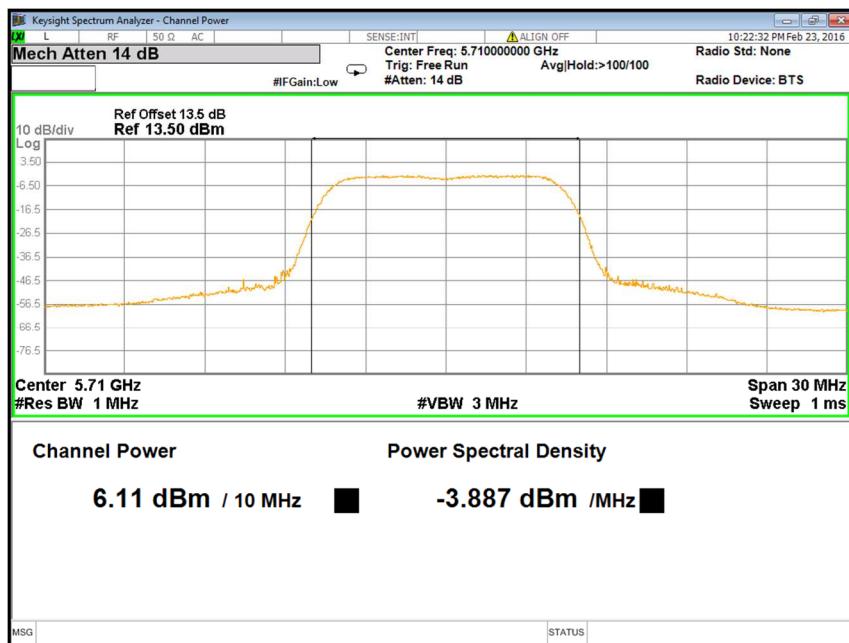


Figure 50: 10 MHz, 17 dBi, High channel: Power spectral density measured at Ch. 1 – 5710 MHz

### 5.3.5.6 RESULT

Power Spectral Density for all channels in both 40 MHz & 10 MHz Modulation Bandwidths is within the Specified limit. Refer below table for consolidated result.

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm/MHz)	Limit (dBm/MHz)	Result
40	Ch. 0	5495	-33.31	-3	Pass
40	Ch. 0	5595	-20.32	-3	Pass
40	Ch. 0	5700	-20.58	-3	Pass
40	Ch. 1	5495	-20.85	-3	Pass
40	Ch. 1	5595	-20.34	-3	Pass
40	Ch. 1	5700	-22.63	-3	Pass
10	Ch. 0	5485	-3.190	-3	Pass
10	Ch. 0	5595	-3.404	-3	Pass
10	Ch. 0	5710	-3.887	-3	Pass
10	Ch. 1	5485	-3.190	-3	Pass
10	Ch. 1	5595	-4.614	-3	Pass
10	Ch. 1	5710	-3.887	-3	Pass

**Table 8: Result of PSD for 17 dBi configuration for both 40 MHz and 10 MHz modulation bandwidth**

## 5.3.6 TRANSMITTER UNWANTED EMISSIONS (CONDUCTED)

### 5.3.6.1 TEST SPECIFICATION

<b>Test Standard</b>	47 CFR, Part 15 Feb 2016			
<b>Test Procedure</b>	ANSI C63.10-2013			
<b>Frequency Range</b>	9 kHz - 150 kHz	150 kHz -30 MHz	30 MHz-1 GHz	1 GHz – 40 GHz
<b>Resolution Bandwidth</b>	200 Hz	9 kHz	120 kHz	1 MHz
<b>Video Bandwidth</b>	1 kHz	30 kHz	300 kHz	3 MHz
<b>Sweep Time</b>	Auto	Auto	Auto	Auto
<b>Detector</b>	Peak	Peak	Peak	Peak & Average
<b>Attenuation</b>	Auto			
<b>Test Mode</b>	Conducted			
<b>Input Voltage</b>	120 V AC			
<b>Input Frequency</b>	60 Hz			
<b>Temperature</b>	23.0 °C			
<b>Humidity</b>	54.0 %			
<b>Tested By</b>	Suresh G N			
<b>Test Date</b>	28 <sup>th</sup> Apr 2016			

### 5.3.6.2 LIMITS

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit EIRP (dBm/MHz)</b>
47 CFR, Part 15 Feb 2016	§15.407 b (3)	Outside 5470-5725 MHz	-27

Table 9: Unwanted emission Limit

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit (dB<math>\mu</math>V/m)</b>
47 CFR, Part 15 Feb 2016	§15.209	9 kHz to 490 kHz 490 kHz to 1.705 MHz 1.705 MHz to 30 MHz	128.5194 to 93.8003* 73.8003 to 62.9697* 69.5429

Table 10: General Field strength limit below 30 MHz

Note: \* Decreases with the logarithm of the frequency

<b>Standard</b>	<b>Reference section</b>	<b>Frequency range</b>	<b>Limit (dB<math>\mu</math>V/m) as per Section 5.209</b>
47 CFR, Part 15 Feb 2016	§15.209	30 MHz to 88 MHz 88 MHz to 216 MHz 216 MHz to 960 MHz 960 MHz to 40 GHz	40 43.52 46.02 53.98

Table 11: General Field strength limit above 30 MHz

Above table specifies limit with Average detector above 1 GHz. 73.98 dB $\mu$ V/m is considered as the limit when Peak detector is employed for the measurements above 1 GHz.

### 5.3.6.3 TEST SETUP



Figure 51: Typical test setup for Conducted Test

### 5.3.6.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer/EMI receiver. Measurements were done as per Section II G.0 of KDB **“789033 DO2 General UNII Test Procedure New Rules v01r01”**. The RF output of the EUT was connected to the input port of Spectrum analyzer/EMI receiver using an attenuator. The graph and data captured from spectrum analyzer and performed required calculations to attain the Electric Field value and compared with the limits specified in the standard.

In the frequency range 9 kHz to 1 GHz, the measurement was performed with peak detector. In the frequency range 1 GHz to 40 GHz, measurement was performed employing both peak & average detector as specified in the standard. Detectors were selected based on FCC KDB document.

Peak search option was used to capture the frequency with maximum amplitude in the respective bands and final calculations have been performed on these frequencies to show compliance with the limits specified.

### 5.3.6.5 MEASUREMENT GRAPHS / DATA

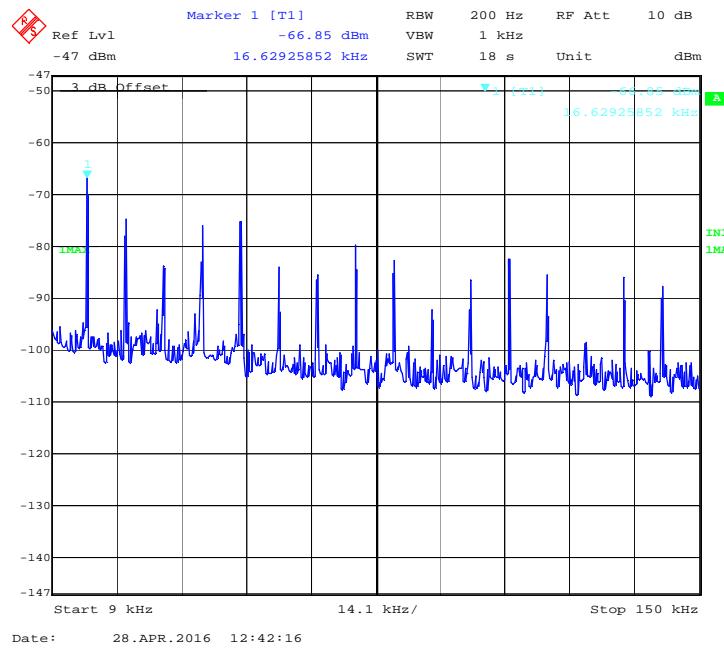


Figure 52: 40 MHz, 17 dBi, Low channel: Peak emission from 9 kHz to 150 kHz at Ch. 0 – 5495 MHz

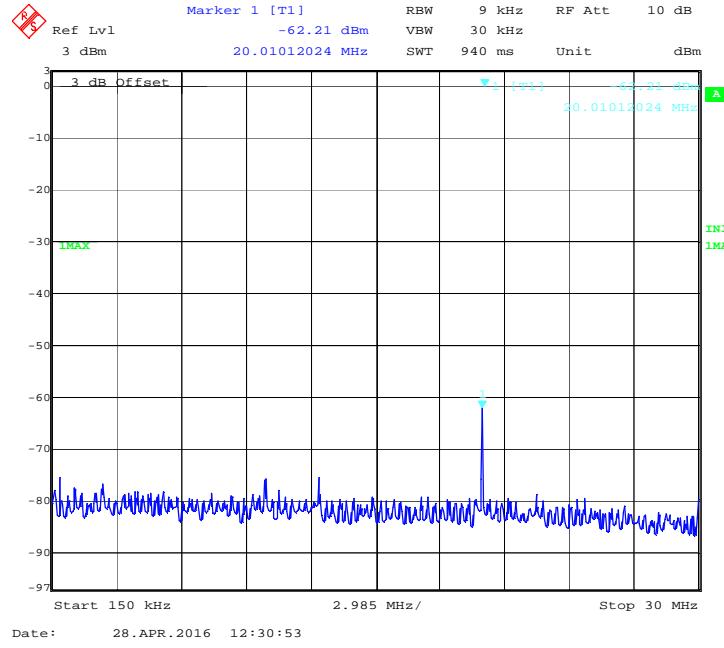


Figure 53: 40 MHz, 17 dBi, Low channel: Peak emission from 150 kHz to 30 MHz at Ch. 0 – 5495 MHz

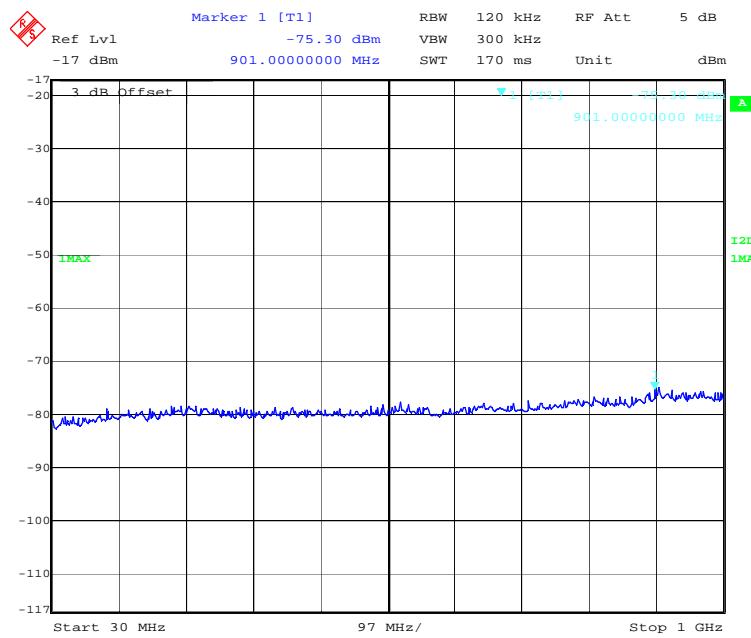


Figure 54: 40 MHz, 17 dBi, Low channel: Peak emission from 30 MHz to 1 GHz at Ch. 0 –5495 MHz

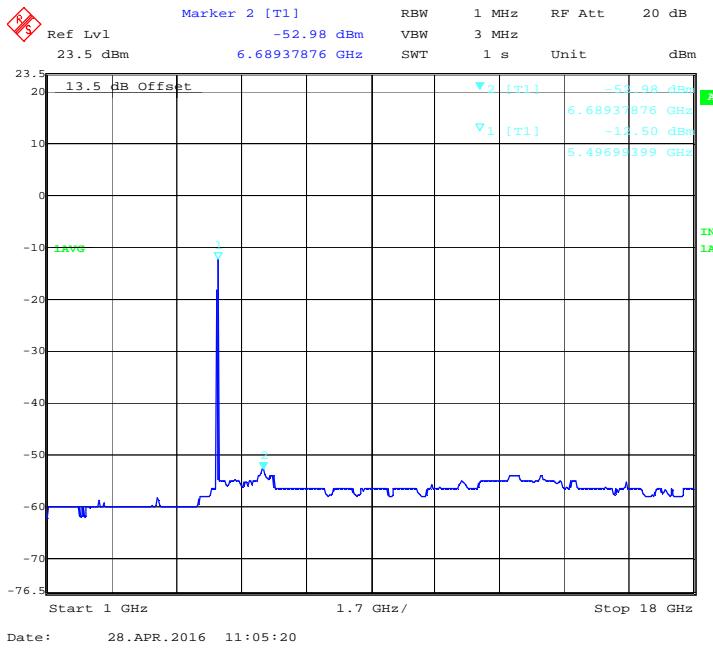


Figure 55: 40 MHz, 17 dBi, Low channel: Average emission from 1 GHz to 18 GHz at Ch. 0 –5495 MHz