

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Docking Speaker with Bluetooth; Bluetooth Speaker

MODEL No.: DS413B, BT413, CIL-E-9

TRADE MARK: RSR, Chelsea home Imports

FCC ID: Z8M-DS413

REPORT NO: KAD131106009E

ISSUE DATE: November 21, 2013

Prepared for

Zhong Shan City Richsound Electronic Industrial Ltd.

Qunle Industrial Area, East ShaGang Road, GangKou, ZhongShan, GuangDong, China.

Prepared by

DONGGUAN EMTEK CO., LTD.

No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China TEL: 86-769-22807078

FAX: 86-769-22807079



VERIFICATION OF COMPLIANCE

Applicant:	Zhongshan City Richsound Electronic Industrial Ltd. Qunle Industrial Area, East ShaGang Road, GangKou, Zhongshan, Guangdong, China
Manufacturer:	Zhongshan City Richsound Electronic Industrial Ltd. Qunle Industrial Area, East ShaGang Road, GangKou, Zhongshan, Guangdong, China
Product Description:	Docking Speaker with Bluetooth; Bluetooth Speaker
Trade Mark:	RSR, Chelsea home Imports
Model Number:	DS413B, BT413, CIL-E-9 (Note: The samples are the same except trade mark and model number. So we prepare DS413B for EMC test.)
Serial Number:	N/A
Kind of Device:	Bluetooth Ver. 2.1+EDR
File Number:	KAD131106009E
Date of Test:	November 06, 2013 to November 21, 2013

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2012).

The test results of this report relate only to the tested sample identified in this report.

Approved By

Sam Lv / Q.A. Manager DONGGUAN EMTEK CO., LTD.



Modified History

Rev.	Summary	Date of Rev.	Report No.
V1.0	Original Report	2013-11-21	KAD131106009E



Table of Contents

1.	GENERAL INFORMATION	6
1.1	PRODUCT DESCRIPTION	6
1.2	RELATED SUBMITTAL(S) / GRANT (S)	6
1.3	TEST METHODOLOGY	6
1.4	SPECIAL ACCESSORIES	6
1.5	EQUIPMENT MODIFICATIONS	6
1.6	TEST FACILITY	7
2.	SYSTEM TEST CONFIGURATION	8
2.1	EUT CONFIGURATION	8
2.2	EUT EXERCISE	8
2.3	Test Procedure	8
2.4	LIMITATION	
2.5	CONFIGURATION OF TESTED SYSTEM	12
3.	SUMMARY OF TEST RESULTS	13
4.	DESCRIPTION OF TEST MODES	13
5.	CONDUCTED EMISSIONS TEST	14
5.1	MEASUREMENT PROCEDURE:	14
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.3	MEASUREMENT EQUIPMENT USED:	
5.4	MEASUREMENT RESULT:	14
5.5	CONDUCTED MEASUREMENT PHOTOS:	17
6.	RADIATED EMISSION TEST	18
6.1	MEASUREMENT PROCEDURE	18
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
6.3	MEASUREMENT EQUIPMENT USED:	20
6.4	MEASUREMENT RESULT	20
6.5	RADIATED MEASUREMENT PHOTOS:	26
7.	CHANNEL SEPARATION TEST	27
7.1	MEASUREMENT PROCEDURE	27
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
7.3	MEASUREMENT EQUIPMENT USED:	27
7.4	MEASUREMENT RESULTS:	27
8.	20DB BANDWIDTH TEST	33
8.1	MEASUREMENT PROCEDURE	33
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
8.3	MEASUREMENT EQUIPMENT USED:	33





8.4	MEASUREMENT RESULTS:	33
9.	QUANTITY OF HOPPING CHANNEL TEST	39
9.1	MEASUREMENT PROCEDURE	39
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
9.3	MEASUREMENT EQUIPMENT USED:	39
9.4	MEASUREMENT RESULTS:	39
10.	TIME OF OCCUPANCY (DWELL TIME) TEST	40
10.1	TEST DESCRIPTION	40
10.2	Page 1 Test Requirements / Limits	40
10.3		
10.4	TEST RESULT: DWELL TIME	41
11.	M AX IMUM PEAK OUTPUT POWER TEST	43
11.1	MEASUREMENT PROCEDURE	43
11.2	Page 12 Test SET-UP (Block Diagram of Configuration)	43
	MEASUREMENT EQUIPMENT USED:	
11.4	MEASUREMENT RESULTS:	44
12.	BAND EDGE TEST	49
12.1	MEASUREMENT PROCEDURE	49
12.2	? TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	49
12.3		
12.4	MEASUREMENT RESULTS:	50
13.	ANTENNA APPLICATION	54
13.1	ANTENNA REQUIREMENT	54
13.2	RESULT	54
14.	RF EXPOSURE EVALUATION	55
14.1	FRIIS TRANSMISSION FORMULA: PD=(POUT*G)\(4*PI*R ²)	55
14.2	P MEASUREMENT RESULT	56



1. GENERAL INFORMATION

1.1 Product Description

The Zhong Shan City Richsound Electronic Industrial Ltd. Model: DS413B (referred to as the EUT in this report) The EUT is an short range, lower power, Docking Speaker with Bluetooth designed as an Input Device. It is designed by way of utilizing the following modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: 2402-2480MHz B). Modulation: GFSK, π/4DQPSK, 8DPSK

C). Number of Channel: 79 D). Channel space: 1MHz

E). Rated RF Output Power: -3.78 dBm F). Antenna Type: Internal PCB antenna

G). Antenna GAIN: 2dBi

H). Input Rating: AC 120V, 60Hz, 25W

The basic data rate of 1Mbps uses GFSK modulation and the enhanced data rate uses PSK modulation. For the enhanced data rate of 3Mbps 8DPSK modulation and of 2Mbps $\pi/4DQPSK$ modulation is used.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: Z8M-DS413 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and FCC Public Notice DA 00-705.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.



1.6 Test Facility

Site Description

EMC Lab. : Accredited by FCC, Aug. 18, 2011

The Certificate Number is 247565.

Accredited by Industry Canada, January 13, 2011

The Certificate Number is 9444A

Name of Firm

DONGGUAN EMTEK CO., LTD.

Site Location

No.281, Guantai Road, Nancheng District,

Dongguan, Guangdong, China



2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz



(2) 20dB Bandwidth

Frequency		Limit(kHz)			
Range(MHz)	Quantity of Hopping Channel	50	25	15	75
	902-928	<250	>250	NA	NA
	2400-2483.5	NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

·	Limit(Quantity of Hopping Channel)				
Frequency Range (MHz)	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz	
902-928	50	25	NA	NA	
2400-2483.5	NA	NA	15	15	
5725-5850	NA	NA	75	NA	

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency		LIMIT(rms)			
Range (MHz)	20dB bandwidth	20dB bandwidth	20dB bandwidth		
rtarige (iiii iz)	<250kHz(50Channel)	>250kHz(25Channel)	<1MHz(75Channel)		
902-928	400(20S)	400(10S)	NA		
2400-2483.5	NA	NA	400(30S)		
5725-5850	NA	NA	400(30S)		
Note: The "()" is all channel's average time of occupancy.					

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

			LIMIT(W)		
Frequency Range (MHz)	Quantity of Hopping Channel	50	25	15	75
902-9	928	1(30dBm)	0.125(21dBm)	NA	NA
2400-24 5725-5		NA NA	NA NA	0.125(21dBm) NA	1(30dBm) 1(30dBm)
0, 20		, .	, .	, .	. (3342111)

Report No.: KAD131106009E Rev1.0



(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating	Operating Spurious		t
Frequency Range(MHz)	emission frequency	Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength µV/m	Distance(m)	Field strength at 3m dB _µ V/m
0.009-0.490	2400/F(kHz)	300	1.
0.490-1.705	24000/F(kHz)	30	1
1.705-30.0	30	30	1
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A(dB	⁸ μV/m)(at 3m)	Class B(dB	μV/m)(at 3m)
	PEAK `	ÁVERAGE	PEAK `	ÁVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)		trength of ental(at 3m)	Filed Strength of Harmonics(at 3m)		
	PEAK	ÀVERÁGE	PEAK	`AVERAGE	
902-928	114	94	74.0	54.0	
2400-2483.5	114	94	74.0	54.0	
5725-5875	114	94	74.0	54.0	
24000-24250	128	108	88.0	68.0	



2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Docking Speaker with Bluetooth	RSR	DS413B	Z8M-DS143	N/A	EUT

Note:

(1) Unless otherwise denoted as EUT in <code>[Remark]</code> column , device(s) used in tested system is a support equipment.



3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209 Radiated Emission		Compliant
		Compliant
§1.1310	RF Exposure	Compliant

4. Description of test modes

The EUT (Docking Speaker with Bluetooth) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 79 Channels are provided by EUT. The operating modes of the EUTs used for testing are described as follows:

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	The EUT transmits on 2402 MHz	Basic data rate 1 Mbps
op-mode 2	The EUT transmits on 2441 MHz	Basic data rate 1 Mbps
op-mode 3	The EUT transmits on 2480 MHz	Basic data rate 1 Mbps
op-mode 4	The EUT is in hopping mode	The EUT is hopping on 79
		channels, Basic data rate 1Mbps
op-mode 6	The EUT transmits on 2402 MHz	Enhanced data rate 3 Mbps
op-mode 7	The EUT transmits on 2441 MHz	Enhanced data rate 3 Mbps
op-mode 8	The EUT transmits on 2480 MHz	Enhanced data rate 3 Mbps
op-mode 10	The EUT transmits on 2402 MHz	Enhanced data rate 2 Mbps
op-mode 11	The EUT transmits on 2441 MHz	Enhanced data rate 2 Mbps
op-mode 12	The EUT transmits on 2480 MHz	Enhanced data rate 2 Mbps




5. Conducted Emissions Test

5.1 Measurement Procedure:

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Equipment Used:


Conducted Emission Test Site # 4										
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
	Dahala 0 Oakoos			NA= 40 0040	M 47 0040					
Test Receiver	Rohde & Schwarz	ESCS30	100018	May 18, 2013	May 17, 2013					
L.I.S.N	Rohde & Schwarz	ENV216	100017	May 18, 2013	May 17, 2013					
RF Switching Unit	CDS	RSU-M2	38401	May 18, 2013	May 17, 2013					

5.4 Measurement Result:

Pass.

Please refer to the following data.



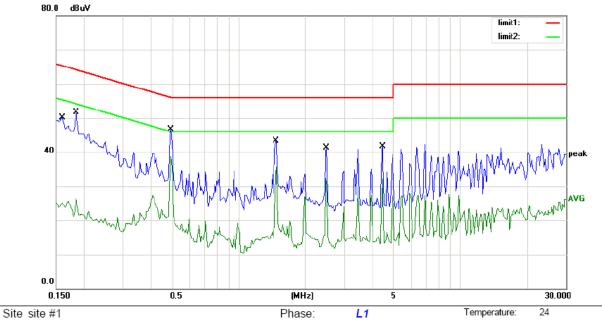

Limit: (CE)FCC PART 15 class C_QP

Power:

AC 120V/60Hz

Temperature: Humidity:

55 %


Report No.: KAD131106009E Rev1.0

Mode: TX Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1600	46.80	0.00	46.80	65.46	-18.66	QP	
2	0.1600	25.11	0.00	25.11	55.46	-30.35	AVG	
3	0.1850	46.80	0.00	46.80	64.26	-17.46	QP	
4	0.1850	26.21	0.00	26.21	54.26	-28.05	AVG	
5	0.4950	43.50	0.00	43.50	56.08	-12.58	QP	
6 *	0.4950	38.70	0.00	38.70	46.08	-7.38	AVG	
7	1.4750	41.30	0.00	41.30	56.00	-14.70	QP	
8	1.4750	35.70	0.00	35.70	46.00	-10.30	AVG	
9	2.4900	37.90	0.00	37.90	56.00	-18.10	QP	
10	2.4900	32.38	0.00	32.38	46.00	-13.62	AVG	
11	4.4600	38.40	0.00	38.40	56.00	-17.60	QP	
12	4.4600	32.02	0.00	32.02	46.00	-13.98	AVG	

^{*:}Maximum data Comment: Factor build in receiver. x:Over limit !:over margin



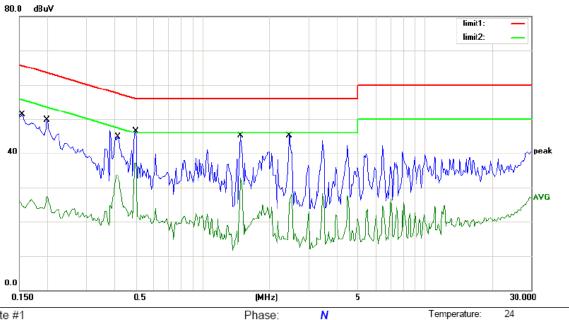

Site site #1

Limit: (CE)FCC PART 15 class C_QP

Mode: TX Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1550	47.60	0.00	47.60	65.73	-18.13	QP	
2	0.1550	26.36	0.00	26.36	55.73	-29.37	AVG	
3	0.2000	45.30	0.00	45.30	63.61	-18.31	QP	
4	0.2000	27.52	0.00	27.52	53.61	-26.09	AVG	
5	0.4150	41.70	0.00	41.70	57.55	-15.85	QP	
6	0.4150	33.56	0.00	33.56	47.55	-13.99	AVG	
7	0.5000	45.20	0.00	45.20	56.00	-10.80	QP	
8 *	0.5000	37.13	0.00	37.13	46.00	-8.87	AVG	
9	1.4850	42.70	0.00	42.70	56.00	-13.30	QP	
10	1.4850	32.51	0.00	32.51	46.00	-13.49	AVG	
11	2.4600	42.50	0.00	42.50	56.00	-13.50	QP	
12	2.4600	28.30	0.00	28.30	46.00	-17.70	AVG	

Power:

AC 120V/60Hz

Humidity:

55 %

Report No.: KAD131106009E Rev1.0

^{*:}Maximum data x:Over limit !:over margin Comment: Factor build in receiver.



5.5 Conducted Measurement Photos:





6. Radiated Emission Test


6.1 Measurement Procedure

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.
- 5. For range 9KHz~30MHz, The measured value is really too low to be recorded.




6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

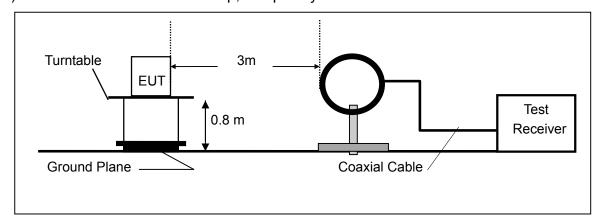

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

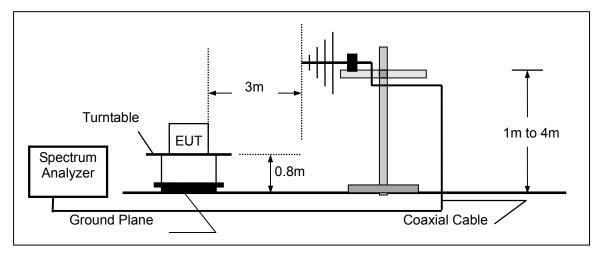

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

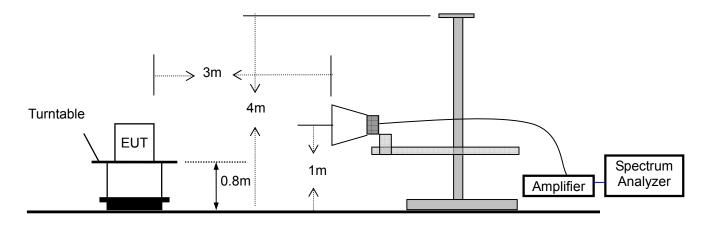



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	May 18, 2013	May 17, 2014
Spectrum Analyzer	HP	E4407B	839840481	May 11, 2013	May 10, 2014
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.2 6	May 28, 2013	May 27, 2014
Pre-Amplifier	HP	8447D	2944A07999	May 28, 2013	May 27, 2014
Bilog Antenna	Schwarzbeck	VULB9163	142	May 18, 2013	May 17, 2014
Loop Antenna	ARA	PLA-1030/B	1029	May 29, 2013	May 28, 2014
Horn Antenna	Electro-Metrics	EM-6961	103314	May 29, 2013	May 27, 2014
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 29, 2013	May 27, 2014

6.4 Measurement Result

Operation Mode: TX Mode (CH1: 2402MHz) Test Date: November 10, 2013

Frequency Range: $30\sim1000 \text{MHz}$ Temperature: $25~^{\circ}\text{C}$ Test Result: PASS Humidity: 50~% Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)	
30.9700	V	27.85	40.00	-12.15	PK
37.8121	V	24.07	40.00	-15.93	PK
57.1600	V	22.07	40.00	-17.93	PK
143.4900	V	22.60	43.50	-20.90	PK
203.6300	V	25.42	43.50	-18.08	PK
227.8800	V	22.67	46.00	-23.33	PK
32.9100	Н	21.24	40.00	-18.76	PK
101.7800	Н	14.50	43.50	-29.00	PK
143.8295	Н	18.79	43.50	-24.71	PK
203.6300	Н	20.82	43.50	-22.68	PK
227.8800	Н	21.53	46.00	-24.47	PK
551.8600	Н	26.21	46.00	-19.79	PK

Note: (1) All Readings are Peak Value.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.



PΚ

PK

PΚ

Report No.: KAD131106009E Rev1.0

Operation Mode: TX Mode (CH40: 2441MHz) Test Date: November 10, 2013

Frequency Range: $30\sim1000 \text{MHz}$ Temperature: $25~^{\circ}\text{C}$ Test Result: PASS Humidity: 50~% Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)	
30.0700	V	27.12	40.00	-12.88	PK
37.4400	V	24.45	40.00	-15.55	PK
57.1600	V	22.57	40.00	-17.43	PK
143.3400	V	22.26	43.50	-21.24	PK
203.6300	V	25.45	43.50	-18.05	PK
257.5200	V	22.12	46.00	-23.88	PK
32.9100	Н	21.45	40.00	-18.55	PK
101.7800	Н	14.56	43.50	-28.94	PK
142.8200	Н	18.56	43.50	-24.94	PK

Note: (1) All Readings are Peak Value.

Η

Н

Η

(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.

20.32

21.56

26.31

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

43.50

46.00

46.00

-23.18

-24.44

-19.69

(4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.

213.6300

227.1400

451.5600



Report No.: KAD131106009E Rev1.0

Operation Mode: TX Mode (CH79: 2480MHz) Test Date: November 10, 2013

Frequency Range: $30\sim1000 \text{MHz}$ Temperature: $25~^{\circ}\text{C}$ Test Result: PASS Humidity: 50~% Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)	
30.3700	V	27.15	40.00	-12.85	PK
37.8300	V	24.34	40.00	-15.66	PK
67.1600	V	21.45	40.00	-18.55	PK
143.2300	V	22.60	43.50	-20.90	PK
203.5300	V	25.45	43.50	-18.05	PK
227.5700	V	26.15	46.00	-19.85	PK
32.3100	Н	21.57	40.00	-18.43	PK
101.5600	Н	14.56	43.50	-28.94	PK
143.3295	Н	18.79	43.50	-24.71	PK
203.6300	Н	20.82	43.50	-22.68	PK
267.4800	Н	24.54	46.00	-21.46	PK
541.5600	Н	26.51	46.00	-19.49	PK

Note: (1) All Readings are Peak Value.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.



Report No.: KAD131106009E Rev1.0

Operation Mode: TX Mode (CH1: 2402MHz) Test Date: November 10, 2013

Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission L	evel(dBuV/m	Limit 3m	(dBuV/m)	Margi	n(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
2402	V	52.23	46.12	74	54	-21.77	-7.88
4804	V	53.56	47.34	74	54	-20.44	-6.66
7206	V	53.15	46.34	74	54	-20.85	-7.66
9608	V	61.44	41.56	74	54	-12.56	-12.44
12010	V	53.67	46.37	74	54	-20.33	-7.63
2402	Н	52.42	46.69	74	54	-21.58	-7.31
4804	Н	53.45	43.44	74	54	-20.55	-10.56
7206	Н	53.16	47.67	74	54	-20.84	-6.33
9608	Н	52.56	47.37	74	54	-21.44	-6.63
12010	Н	53.75	40.67	74	54	-20.25	-13.33

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.



Report No.: KAD131106009E Rev1.0

Operation Mode: TX Mode (CH40: 2441MHz) Test Date: November 10, 2013

Frequency Range: 1-25GHz Temperature: 25 $^{\circ}$ C Test Result: PASS Humidity: 50 $^{\circ}$ Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Level(dBuV/m		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
2441	V	54.29	43.52	74	54	-19.71	-10.48
4882	V	58.24	44.56	74	54	-15.76	-9.44
7323	V	54.14	45.47	74	54	-19.86	-8.53
9764	V	52.55	40.21	74	54	-21.45	-13.79
12205	V	60.23	46.56	74	54	-13.77	-7.44
2441	Н	57.49	43.11	74	54	-16.51	-10.89
4882	Н	51.44	45.45	74	54	-22.56	-8.55
7323	Н	58.56	44.35	74	54	-15.44	-9.65
9764	Н	55.57	43.31	74	54	-18.43	-10.69
12205	Н	61.42	41.58	74	54	-12.58	-12.42

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.



Report No.: KAD131106009E Rev1.0

Operation Mode: TX Mode (CH79: 2480MHz) Test Date: September 07, 2012

Frequency Range: 1-25GHz Temperature: 25 $^{\circ}$ C Test Result: PASS Humidity: 50 $^{\circ}$ Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission L	evel(dBuV/m	Limit 3m((dBuV/m)	Margi	n(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
2480	V	60.13	46.36	74	54	-13.87	-7.64
4960	V	52.45	46.45	74	54	-21.55	-7.55
7440	V	54.57	45.62	74	54	-19.43	-8.38
9920	V	52.24	45.56	74	54	-21.76	-8.44
12400	V	61.64	44.34	74	54	-12.36	-9.66
2480	Н	62.56	46.48	74	54	-11.44	-7.52
4960	Н	53.67	45.56	74	54	-20.33	-8.44
7440	Н	59.27	46.55	74	54	-14.73	-7.45
9920	Н	54.27	45.33	74	54	-19.73	-8.67
12400	Н	62.52	40.44	74	54	-11.48	-13.56

Other harmonics emissions are lower than 20dB below the allowable limit.


Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.



6.5 Radiated Measurement Photos:



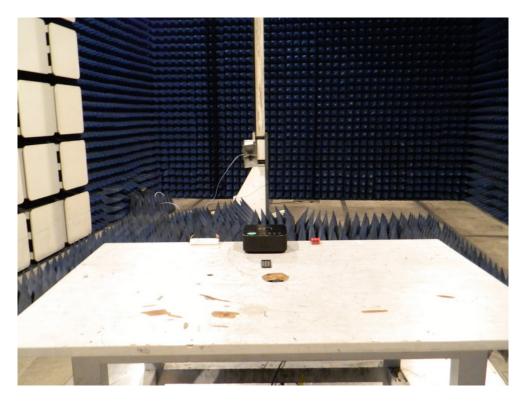



7. Channel Separation test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK Test Date : November 10, 2013

Test By: Andy Temperature : $25 \,^{\circ}\text{C}$ Test Result: PASS Humidity : $50 \,^{\circ}\text{M}$


Channel	Separation Read	Separation Limit	Data Rate
frequency (MHz)	Value (KHz)	· (KHz)	
2402	1.005	>837	1Mbps
2441	1.002	>837	1Mbps
2480	1.002	>840	1Mbps
2402	1.005	>750	2Mbps
2441	1.002	>750	2Mbps
2480	1.005	>744	2Mbps
2402	1.002	>734	3Mbps
2441	1.002	>730	3Mbps
2480	1.005	>724	3Mbps


Remark:

1. The limit of data rates 2Mbps and 3Mbps is 2/3 of 20dB BW;




1Mbps:

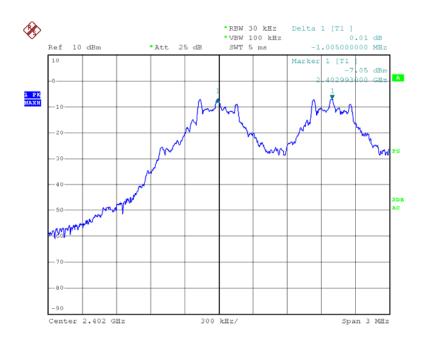


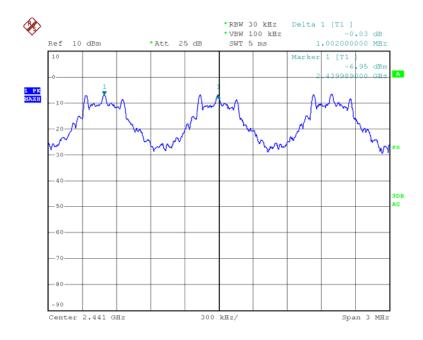




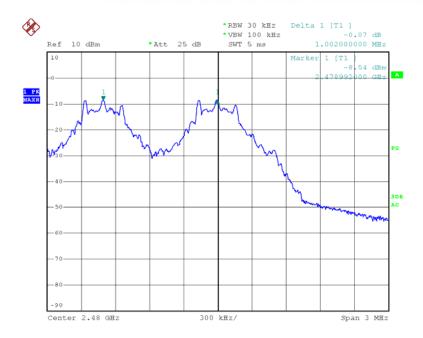


2Mbps:

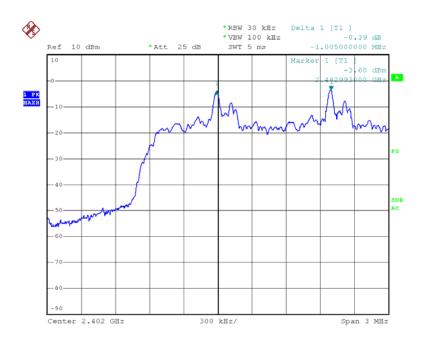




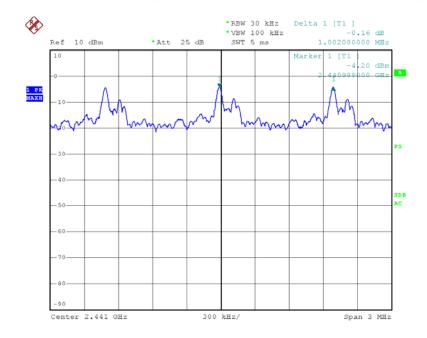


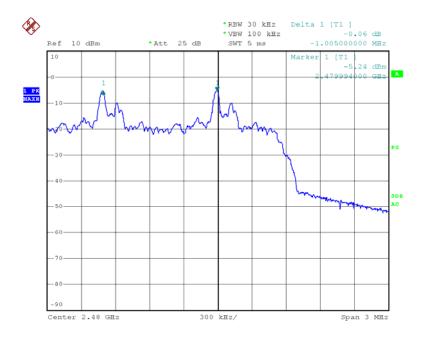




3Mbps:

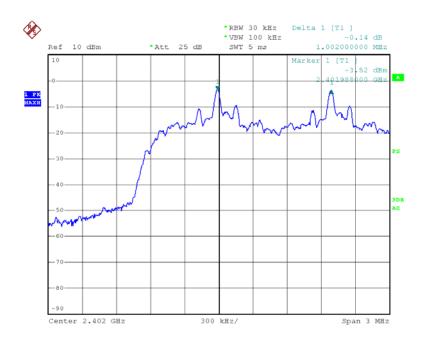

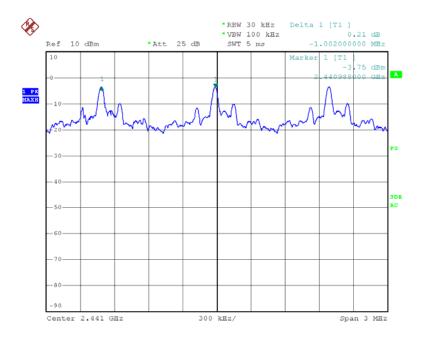



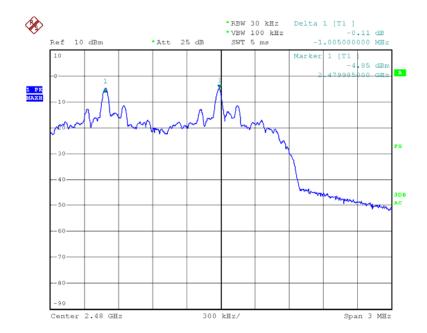



8. 20dB Bandwidth test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

8.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector: PK Test Date: November 10, 2013

Test By: Andy Temperature : 25 $^{\circ}$ C Test Result: PASS Humidity : 50 $^{\circ}$


Operating Mode	Channel frequency (MHz)	20dB Down BW(kHz)
op-mode 1	2402	837
op-mode 2	2441	837
op-mode 3	2480	840
op-mode 6	2402	1101
op-mode 7	2441	1095
op-mode 8	2480	1086
op-mode 10	2402	1125
op-mode 11	2441	1125
op-mode 12	2480	1116



op-mode 1:

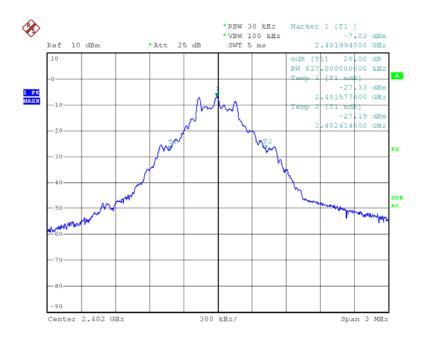


op-mode 2:

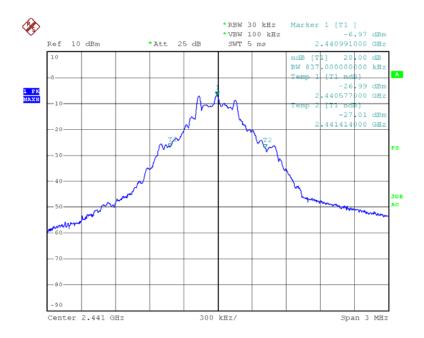




op-mode 3:

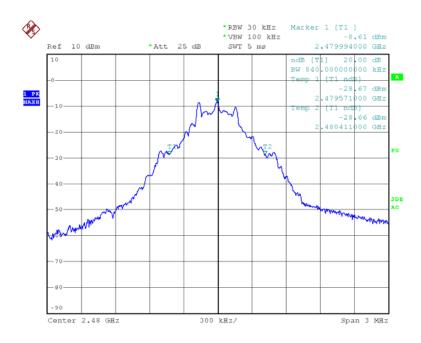


op-mode 6:

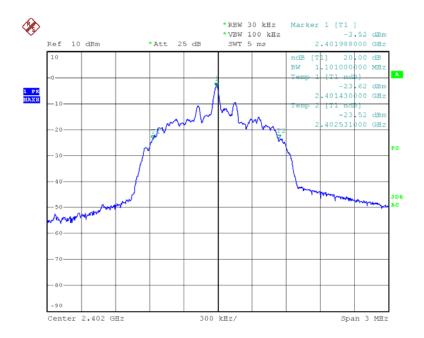




op-mode 7:

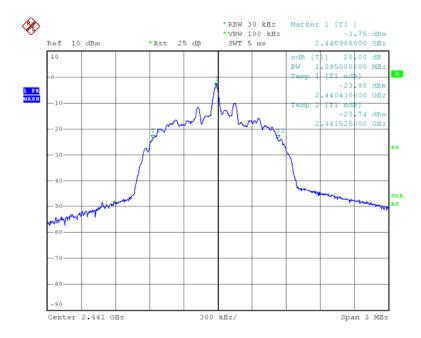


op-mode 8:

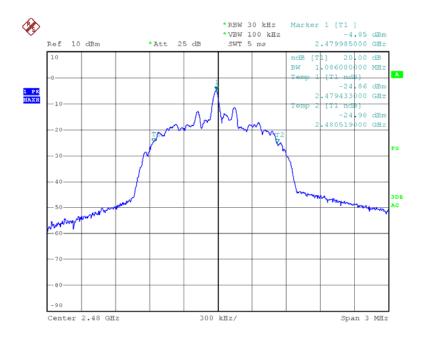




op-mode 10:

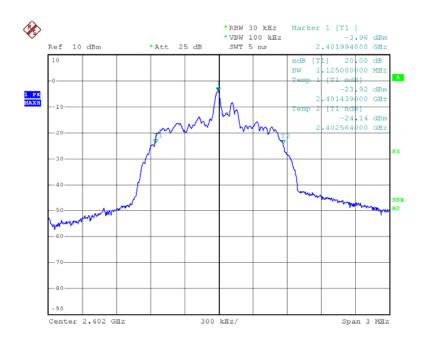


op-mode 11:

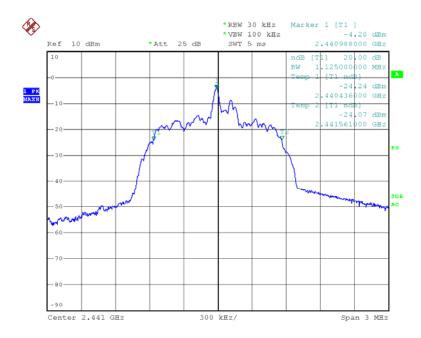



op-mode 12:

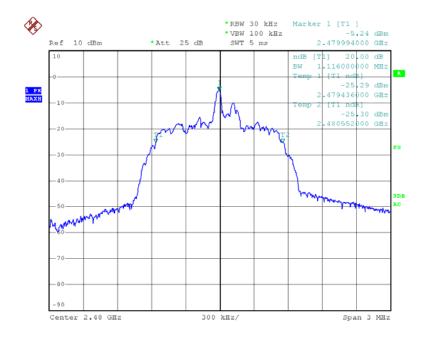



9. Quantity of Hopping Channel Test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.


9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK Test Date: November 10, 2013

Test By: Andy Temperature : 25 $^{\circ}$ C Test Result: PASS Humidity : 50 $^{\circ}$

Operating Mode	Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
op-mode 4	2402-2480	79	>15

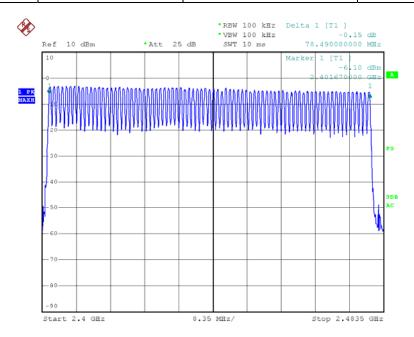



10. Time of Occupancy (Dwell Time) test

10.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6s

with:

- hop rate = 1600 * 1/s for DH1 packets = $1600 s^{-1}$
- hop rate = 1600/3 * 1/s for DH3 packets = $533.33 s^{-1}$
- hop rate = 1600/5 * 1/s for DH5 packets = $320 s^{-1}$
- number of hopping channels = 79
- 31.6 s = 0.4 seconds multiplied by the number of hopping channels = 0.4 s * 79

The highest value of the dwell time is reported.

10.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds. Refer to attached data chart.

10.3 Test Protocol

Packet type	Time slot length(ms)	Dwell time	Dwell time(ms)
DH1	0.489	time slot length *1600/1 /79 * 31.6	312.96
DH3	1.742	time slot length *1600/3 /79 * 31.6	371.63
DH5	2.999	time slot length *1600/5 /79 * 31.6	383.87

Remark:


1. The results of different data rate(1Mbps, 2Mbps, 3Mbps) are the same.




10.4 Test result: Dwell time

PASS.

DH1:

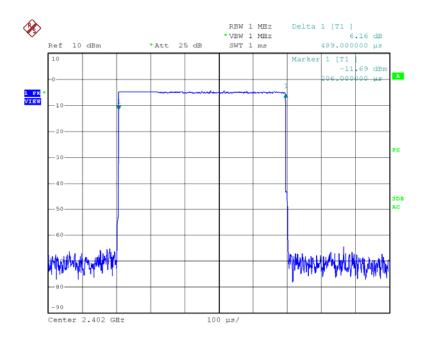


DH3:

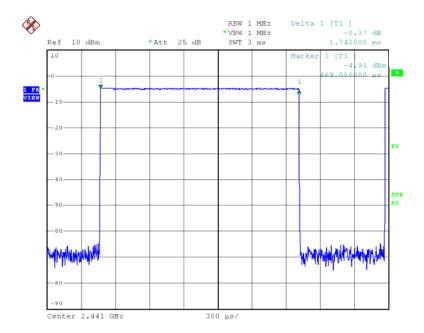



DH5:

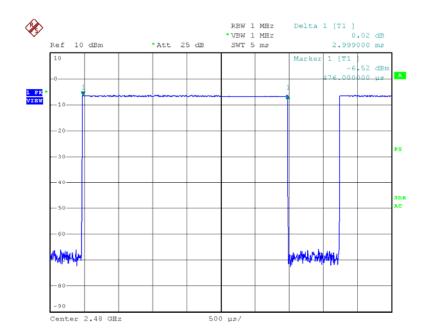



11. M AX IMUM PEAK OUTPUT POWER TEST

11.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

11.2Test SET-UP (Block Diagram of Configuration)

EUT		Spectrum
-----	--	----------

11.3Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2013	05/28/2014



11.4Measurement Results:

Refer to attached data chart.

Spectrum Detector:

PΚ

Test Date:

November 10, 2013

Report No.: KAD131106009E Rev1.0

Test By:

Andy


Temperature :

25 ℃

Test Result:	PASS		Humidity:	
Operating	Channel	Peak	Peak Power	Peak I


Operating Mode	Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
op-mode 1	2402	0.319	-4.96	125	PASS
op-mode 2	2441	0.308	-5.11	125	PASS
op-mode 3	2480	0.191	-7.20	125	PASS
op-mode 6	2402	0.406	-3.91	125	PASS
op-mode 7	2441	0.395	-4.03	125	PASS
op-mode 8	2480	0.282	-5.49	125	PASS
op-mode 10	2402	0.406	-3.92	125	PASS
op-mode 11	2441	0.419	-3.78	125	PASS
op-mode 12	2480	0.296	-5.29	125	PASS

op-mode 1:

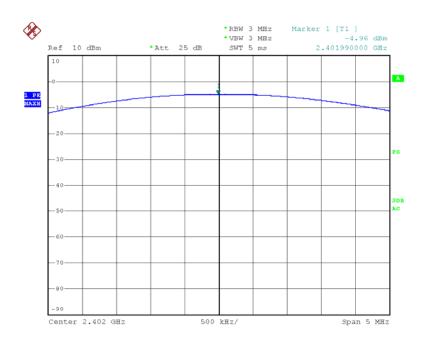




op-mode 2:

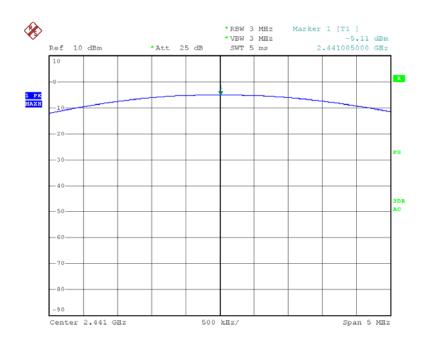


op-mode 3:

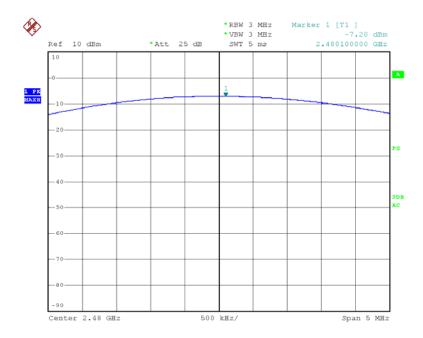




op-mode 6:

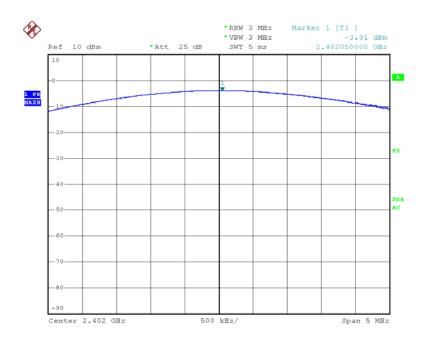


op-mode 7:

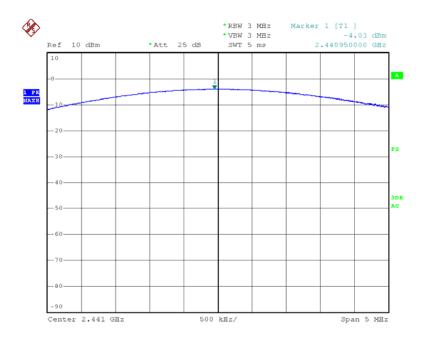




op-mode 8:

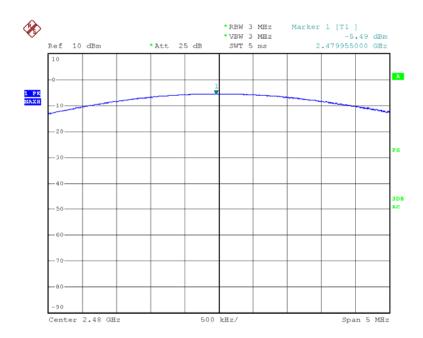


op-mode 10:

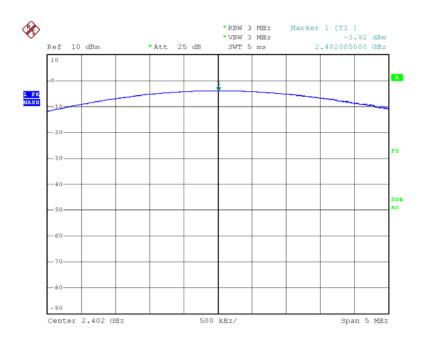




op-mode 11:

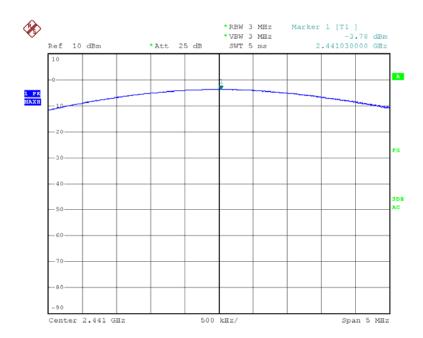

op-mode 12:

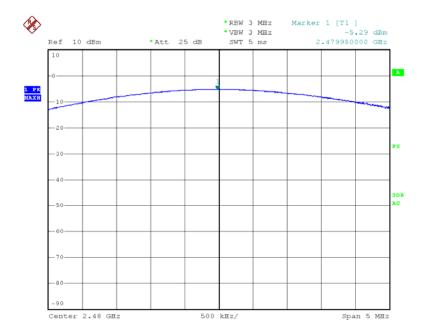



12. Band EDGE test

12.1 Measurement Procedure

- 1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane.
- 3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Repeat above procedures until all frequency measured were complete.

12.2Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Set-up.

12.3Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.



12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:

PK

Test Date:

November 10, 2013

Report No.: KAD131106009E Rev1.0

Test By:

Andy

Temperature:

25 ℃

Test Result:

PASS

Humidity:

50 %

1.Conducted Test

Frequency	Operating	Peak Power	Peak Power Emission read		Band edge
(MHz)	Mode	Output(dBm)	Value(dBm)	edge(dBc)	Limit(dBc)
	op-mode 1	-5.31	-46.28	40.97	>20dBc
<2400	op-mode 6	-4.05	-47.63	43.58	>20dBc
	op-mode 10	-3.96	-47.05	43.09	>20dBc
	op-mode 3	-7.01	-50.65	43.64	>20dBc
>2483.5	op-mode 8	-5.63	-50.98	45.35	>20dBc
	op-mode 12	-5.41	-50.98	45.57	>20dBc


2.Radiated emission Test

Frequency (MHz)	Operating Mode	Antenna polarization	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		(H/V)	PK	ÁV	PK	AV
	op-mode 1	V	51.19	38.15	74.00	54.00
<2400	op-mode 6	V	50.34	39.45	74.00	54.00
	op-mode 10	V	48.54	37.22	74.00	54.00
	op-mode 3	V	42.44	33.45	74.00	54.00
>2483.5	op-mode 8	V	41.45	36.43	74.00	54.00
	op-mode 12	V	49.56	33.56	74.00	54.00


Remark: The results of Horizontal polarization and Vertical polarization are same.



op-mode 1:

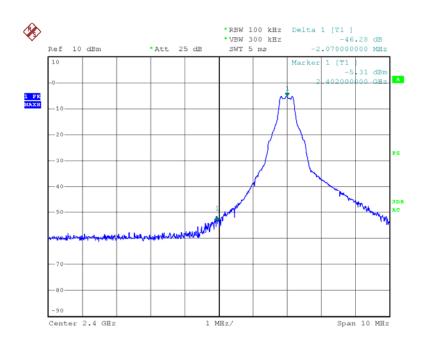


op-mode 3:

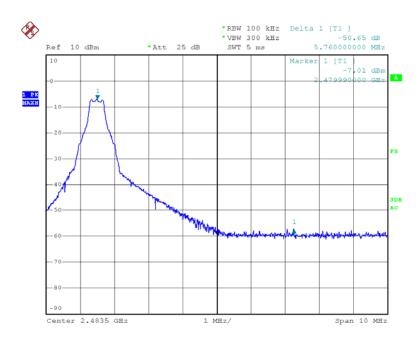




op-mode 6:

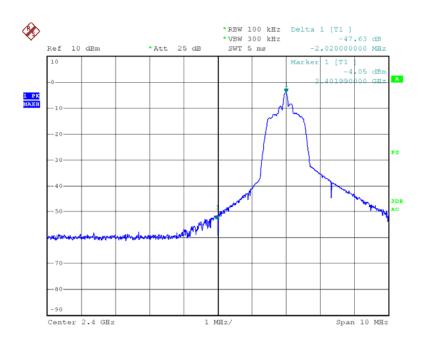


op-mode 8:

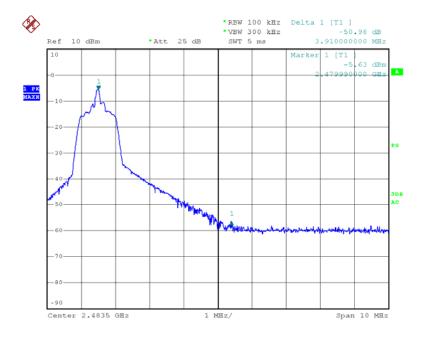




op-mode 10:

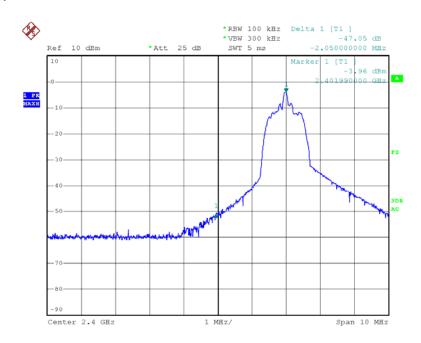

op-mode 12:

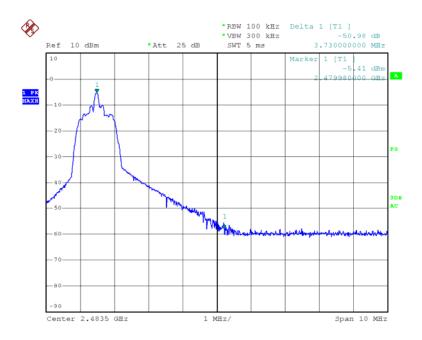



13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 2dBi and meets the requirement.



14. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in §1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency	Electric Field	Magnetic Field	Power	Average Time		
Range(MHz)	Strength(V/m)	Strength(A/m)	Density(mW/cm ²)	_		
(A) Limits for Occupational/Control Exposures						
300-1500			F/300	6		
1500-100000			5	6		
	(B) Limits for General Population/Uncontrol Exposures					
300-1500			F/1500	6		
1500-100000			1	30		

14.1 Friis transmission formula: Pd=(Pout*G)\(4*pi*R²)

Where

Pd= Power density in mW/cm²
Pout=output power to antenna in Mw
G= gain of antenna in linear scale

Pi=3.1416

R= distance between observation point and center of the radiator in cm

Pd the limit of MPE, 1mW/cm2. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.



14.2 Measurement Result.

Operating Mode	Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Power density at 20cm (mW/ cm ²)	Power density Limits (mW/cm²)
op-mode 1	2402	0.319	2	1.01E-04	1
op-mode 2	2441	0.308	2	9.72E-05	1
op-mode 3	2480	0.191	2	6.03E-05	1
op-mode 6	2402	0.406	2	1.28E-04	1
op-mode 7	2441	0.395	2	1.25E-04	1
op-mode 8	2480	0.282	2	8.90E-05	1
op-mode 10	2402	0.406	2	1.28E-04	1
op-mode 11	2441	0.419	2	1.32E-04	1
op-mode 12	2480	0.296	2	9.34E-05	1

The Tune-up tolerance is -6dBm \sim 4dBm, the calculation of MPE is: 4dBm= 2.51mW

The result= (Pout*G)(4*pi*R2)= (2.51*1)/(4*3.1416*400)= 4.993e-4



General Appearance of the EUT









