FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Network Media Player

Model: TV-303D, Zappiti Player Mini

Trade Name: DUNE HD

Issued to

HDI Dune Limited 1101-1104,11/F.,Nan Fung Tower,173 Des Voen Hong Kong, Hong Kong

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
http://www.ccsrf.com
service@ccsrf.com
Issued Date: April 1, 2013





Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Page 1 / 90 Rev. 00

Revision History

Report No.: T121128W01-RP

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 1, 2013	Initial Issue	ALL	Kelly Cheng

Page 2 Rev. 00

TABLE OF CONTENTS

1. T	EST RESULT CERTIFICATION	4
2. E	UT DESCRIPTION	5
3. T	TEST METHODOLOGY	6
3.1	EUT CONFIGURATION	6
3.2	EUT EXERCISE	6
3.3		
3.4		
3.5	DESCRIPTION OF TEST MODES	8
4. IN	NSTRUMENT CALIBRATION	9
4.1	MEASURING INSTRUMENT CALIBRATION	9
4.2		
4.3	MEASUREMENT UNCERTAINTY	11
5. F	ACILITIES AND ACCREDITATIONS	12
5.1	FACILITIES	12
5.2		
5.3	TABLE OF ACCREDITATIONS AND LISTINGS	13
6. SI	ETUP OF EQUIPMENT UNDER TEST	14
6.1	SETUP CONFIGURATION OF EUT	14
6.2	SUPPORT EQUIPMENT	14
7. F	CC PART 15.247 REQUIREMENTS	15
7.1	6DB BANDWIDTH	15
7.2	PEAK POWER	26
7.3	AVERAGE POWER	
7.4	BAND EDGES MEASUREMENT	
7.5	PEAK POWER SPECTRAL DENSITY	
7.6		
7.7	RADIATED EMISSIONS	
7.8	POWERLINE CONDUCTED EMISSIONS	85
APPE	ENDIX I PHOTOGRAPHS OF TEST SETUP	88
APPE	ENDIX 1 - PHOTOGRAPHS OF EUT	



Report No.: T121128W01-RP

TEST RESULT CERTIFICATION

HDI Dune Limited Applicant:

1101-1104,11/F., Nan Fung Tower,173 Des Voen Hong Kong, Hong

Equipment Under Test: Network Media Player

Trade Name: DUNE HD

Model: TV-303D, Zappiti Player Mini

March 21 ~ 26, 2013 **Date of Test:**

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Miller Lee

Section Manager

Compliance Certification Services Inc.

Willer Lee

Gina Lo

Section Manager

Compliance Certification Services Inc.

Jina Lo

Page 4 Rev. 00

2. EUT DESCRIPTION

Product	Network Media Player		
Trade Name	DUNE HD		
Model Number	TV-303D, Zappiti Player Mini		
Model Discrepancy	Market Segmentation		
Received Date	December 27, 2012		
Power Ratting	Power Adapter Asian Power Devices Inc. / WA-18Q12R I/P: 100-240V, 50/60Hz, 0.5A max O/P: 12V, 1.5A		
Frequency Range	2412 ~ 2462 MHz		
Transmit Power	IEEE 802.11g mode: 20.72 dBm IEEE 802.11n HT 20 MHz mode: 19.54 dBm IEEE 802.11n HT 40 MHz mode: 20 dBm		
Modulation Technique	IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps)		
Number of Channels	IEEE 802.11g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels		
Antenna Specification	 Master Wave Technology CO.,LCD / 98242MRSX000 Dipole Antenna / Gain: 2dBi (Reverse polarity SMA) Dail Fong Electronics CO., LTD./ AN-DF073007 Dipole Antenna / Gain: 2dBi (Reverse polarity SMA) 		

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>Z8P-KTTV303DW</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 5 Rev. 00

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247 and KDB558074.

Report No.: T121128W01-RP

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 6 Rev. 00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz MHz		GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 7 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: TV-303D) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

Report No.: T121128W01-RP

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low (2422MHz), Channel Mid (2442MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

Page 8 Rev. 00

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Report No.: T121128W01-RP

Page 9 Rev. 00

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site							
Name of Equipment	Serial Number	Calibration Due					
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/20/2014			
Power Meter	Anritsu	ML2495A	1012009	06/05/2013			
Power Sensor	Anritsu	MA2411A	0917072	06/05/2013			

3M Chamber Test Site							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
Spectrum Analyzer	Spectrum Analyzer Agilent		US42510268	11/06/2013			
EMI Test Receiver	R&S	ESCI	100064	02/28/2014			
Pre-Amplifier	Mini-Circults	ZFL-1000LN	SF350700823	01/12/2014			
Pre-Amplifier	MITEQ	AFS44-00102650- 42-10P-44	1415367	11/19/2013			
Bilog Antenna	Sunol Sciences	JB3	A030105	10/02/2013			
Horn Antenna	EMCO	3117	00055165	02/13/2014			
Horn Antenna	EMCO	3116	2487	10/10/2013			
Loop Antenna	EMCO	6502	8905/2356	06/10/2013			
Turn Table	CCS	CC-T-1F	N/A	N.C.R			
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R			
Controller	CCS	CC-C-1F	N/A	N.C.R			
Site NSA	CCS	N/A	N/A	12/22/2013			
Test S/W	Test S/W EZ-EMC (CCS-3A1RE)						

Conducted Emission room # A							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
EMI Test Receiver	R&S	ESCI	101203	09/13/2013			
LISN	R&S	ESH3-Z5	848773/014	12/10/2013			
ISN	FCC	FCC-TLISN-T8-02-09	101131	09/05/2013			
Coaxial Cable	Commate	CFD300-NL	NA	12/06/2013			
Test S/W	CCS-3A1-CE						

Page 10 Rev. 00



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2159
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Page 11 Rev. 00

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at	
No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.	
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029	
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045	
☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C	l ·•
Tel: 886-3-324-0332 / Fax: 886-3-324-5235	
The sites are constructed in conformance with the requirements of ANSI C63.7. ANSI C63.4.a	n

Report No.: T121128W01-RP

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 12 Rev. 00



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA		3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12,2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method –47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	Testing Laboratory 1309
Lanada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	Canada IC 2324G-1 IC 2324G-2

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

Page 13 Rev. 00

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	7663 (T61)	L3E9812	N/A	N/A	Unshielded, 1.8m
2.	Notebook PC	DELL	PP19L	7B3ZP1S	N/A	N/A	Unshielded, 1.8m with a core

Report No.: T121128W01-RP

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 14 Rev. 00

7. FCC PART 15.247 REQUIREMENTS


7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Report No.: T121128W01-RP

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Page 15 Rev. 00

Test Data

Test mode: IEEE 802.11g mode

1000 mouto 1222 002011g mouto				
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.5833		PASS
Mid	2437	16.5833	>500	PASS
High	2462	16.5833		PASS

Report No.: T121128W01-RP

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.8334		PASS
Mid	2437	17.8334	>500	PASS
High	2462	17.8334		PASS


Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.3333		PASS
Mid	2437	36.3333	>500	PASS
High	2452	36.3333		PASS

Page 16 Rev. 00

IEEE 802.11g mode

6dB Bandwidth (CH Low)

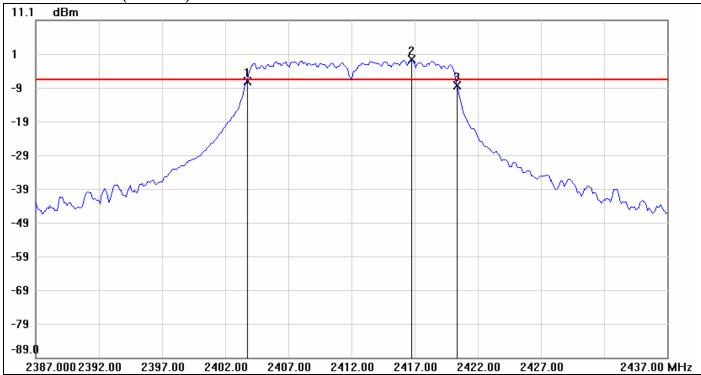


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7500	-7.04	-6.67	-0.37
2	2416.7500	-0.67	-6.67	6.00
3	2420.3333	-8.34	-6.67	-1.67

No.		△Frequency(MHz)	\triangle Level(dB)
1	mk3-mk1	16.5833	-1.3

Page 17 Rev. 00

6dB Bandwidth (CH Mid)

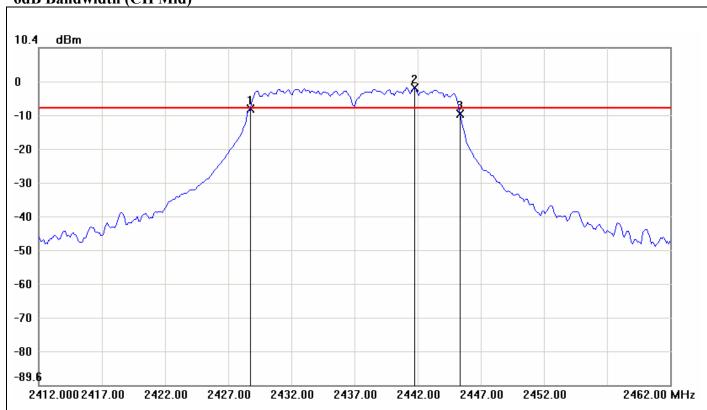


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.7500	-7.75	-7.44	-0.31
2	2441.7500	-1.44	-7.44	6.00
3	2445.3333	-9.12	-7.44	-1.68

N	lo.		△Frequency(MHz)	△Level(dB)
	1	mk3-mk1	16.5833	-1.37

Page 18 Rev. 00

6dB Bandwidth (CH High)

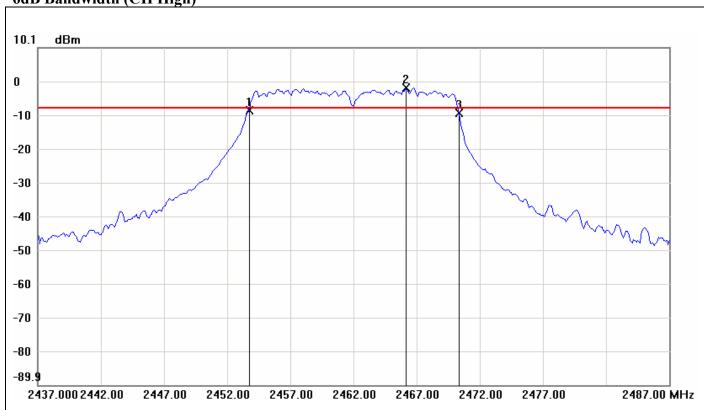


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.7500	-8.38	-7.82	-0.56
2	2466.1667	-1.82	-7.82	6.00
3	2470.3333	-9.36	-7.82	-1.54

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.5833	-0.98

Page 19 Rev. 00

IEEE 802.11n HT 20 MHz mode

6dB Bandwidth (CH Low)

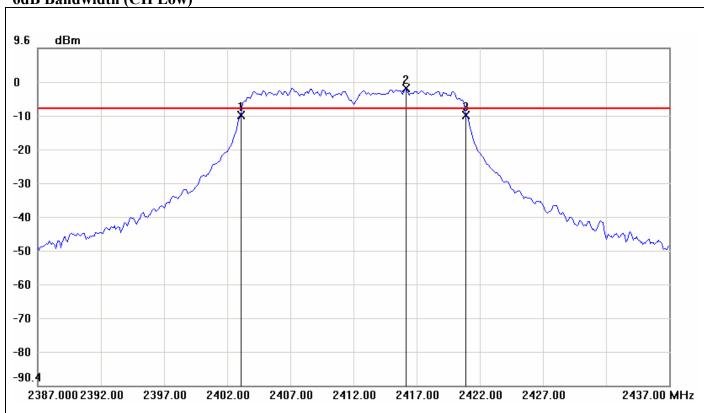


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.0833	-10.13	-8.25	-1.88
2	2416.1667	-2.25	-8.25	6.00
3	2420.9167	-10.16	-8.25	-1.91

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334	-0.03

Page 20 Rev. 00

6dB Bandwidth (CH Mid)

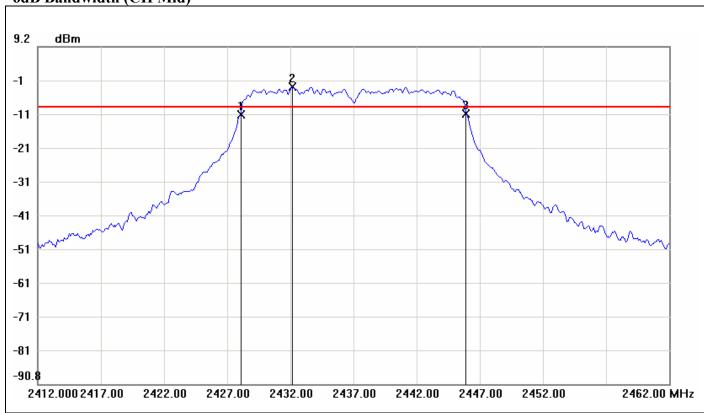


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0833	-10.83	-8.66	-2.17
2	2432.1667	-2.66	-8.66	6.00
3	2445.9167	-10.63	-8.66	-1.97

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334	0.2

Page 21 Rev. 00



6dB Bandwidth (CH High)

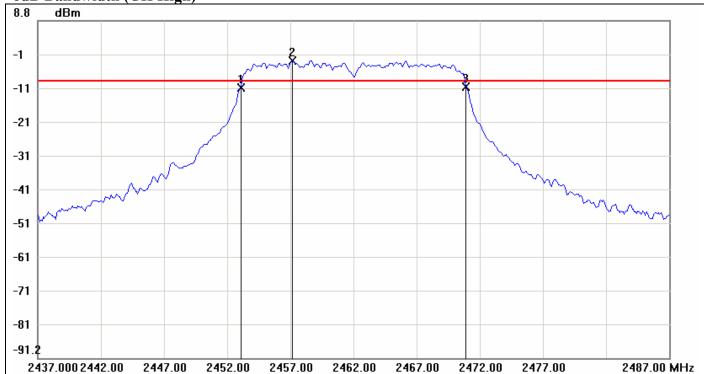


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.0833	-11.05	-8.95	-2.10
2	2457.1667	-2.95	-8.95	6.00
3	2470.9167	-10.89	-8.95	-1.94

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334	0.16

Page 22 Rev. 00

IEEE 802.11n HT 40 MHz mode

6dB Bandwidth (CH Low)

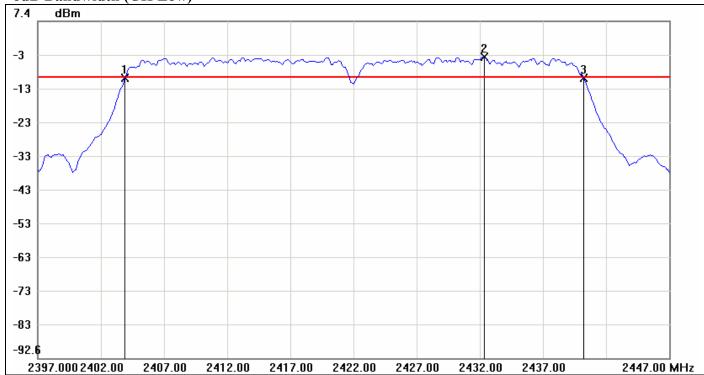


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.9167	-9.55	-9.12	-0.43
2	2432.3333	-3.12	-9.12	6.00
3	2440.2500	-9.37	-9.12	-0.25

No.		△Frequency(MHz)	\triangle Level(dB)
1	mk3-mk1	36.3333	0.18

Page 23 Rev. 00



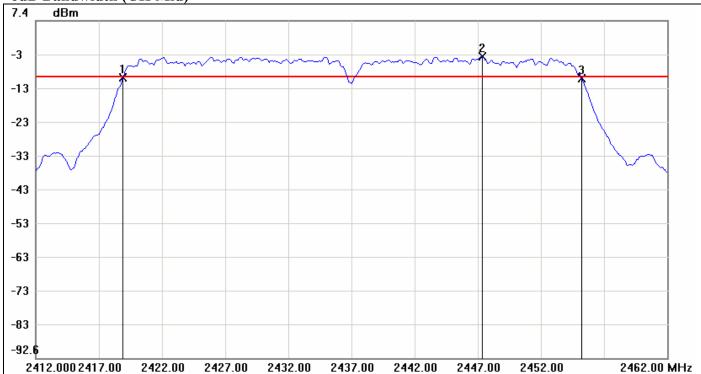


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.9167	-9.33	-9.18	-0.15
2	2447.3333	-3.18	-9.18	6.00
3	2455.2500	-9.77	-9.18	-0.59

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	36.3333	-0.44

Page 24 Rev. 00



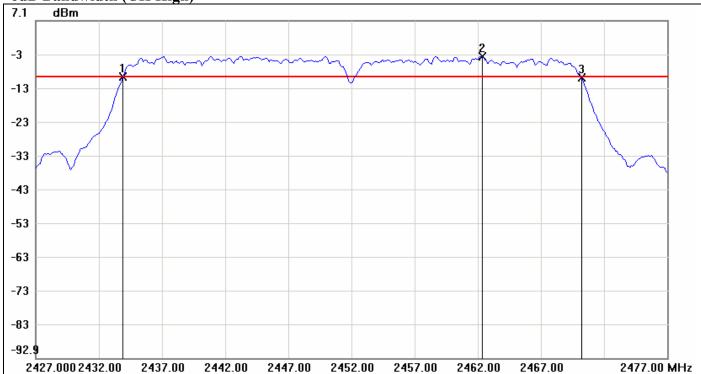

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.9167	-9.49	-9.42	-0.07
2	2462.3333	-3.42	-9.42	6.00
3	2470.2500	-9.85	-9.42	-0.43

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	36.3333	-0.36

Page 25 Rev. 00

7.2 PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

Report No.: T121128W01-RP

- 1. According to \$15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Page 26 Rev. 00



Test Data

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	20.54	0.1132		PASS
Mid	2437	20.62	0.1153	1.00	PASS
High	2462	*20.72	0.1180		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.53	0.0897		PASS
Mid	2437	*19.54	0.0899	1.00	PASS
High	2462	19.71	0.0935		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	19.66	0.0925		PASS
Mid	2437	19.89	0.0975	1.00	PASS
High	2452	*20	0.1000		PASS

Page 27 Rev. 00




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

Page 28 Rev. 00



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	11.95	0.0157
Mid	2442	11.82	0.0152
High	2462	11.86	0.0153

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	10.87	0.0122
Mid	2442	10.71	0.0118
High	2462	10.79	0.0120

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	10.78	0.0120
Mid	2442	10.9	0.0123
High	2452	10.94	0.0124

Page 29 Rev. 00


7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

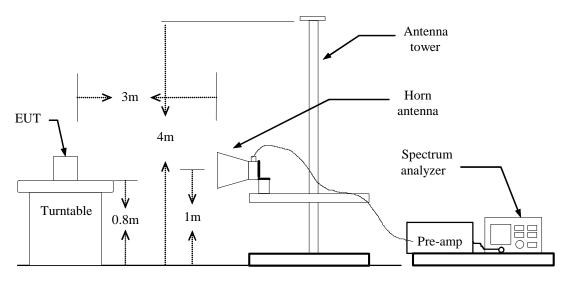

For Conducted



Page 30 Rev. 00

TEST PROCEDURE

For Radiated

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Report No.: T121128W01-RP

- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


TEST RESULTS

Refer to attach spectrum analyzer data chart.


Page 31 Rev. 00

Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak Polarity: Vertical

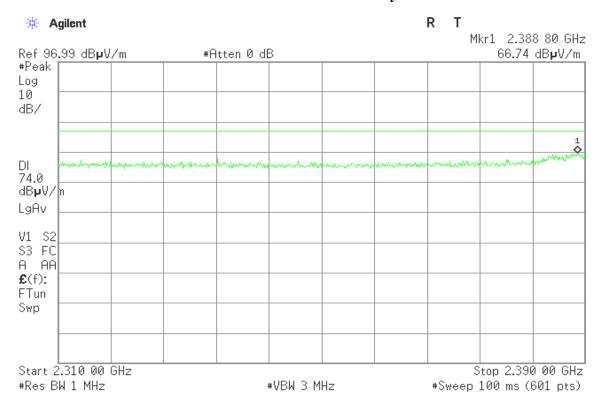


Detector mode: Average Polarity: Vertical

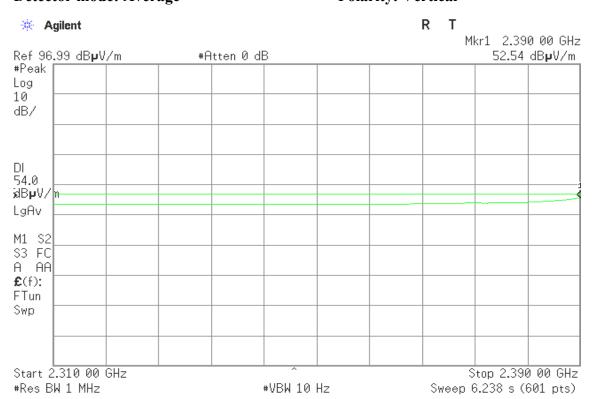


Page 32 Rev. 00

Detector mode: Peak Polarity: Horizontal

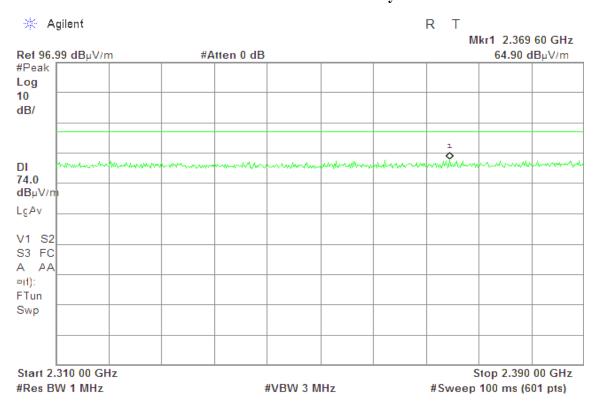


Detector mode: Average Polarity: Horizontal

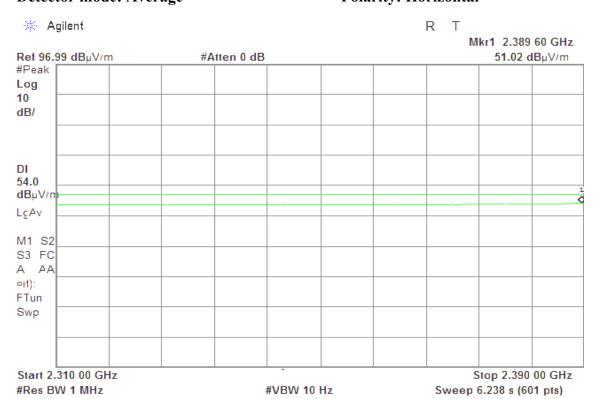


Page 33 Rev. 00

Band Edges (IEEE 802.11g mode / CH High)

Detector mode: Peak Polarity: Vertical

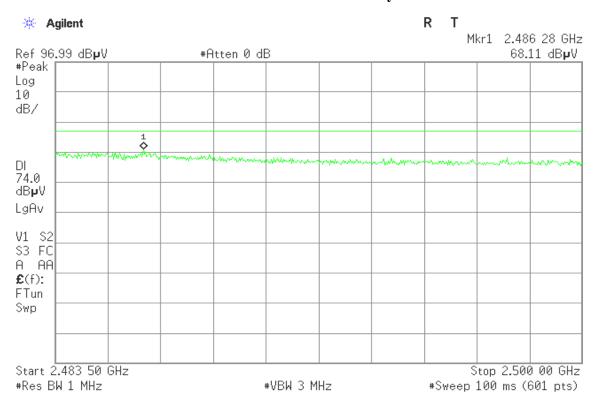


Detector mode: Average Polarity: Vertical

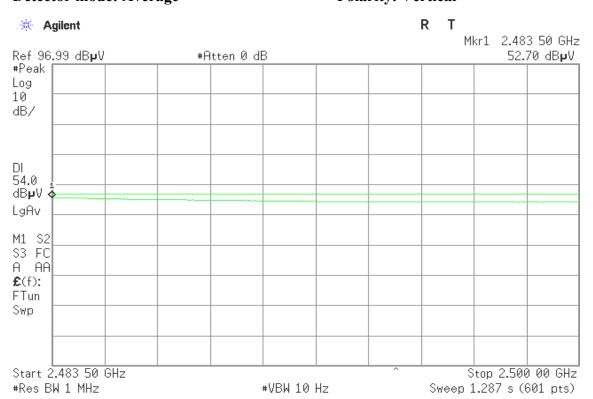


Page 34 Rev. 00

Detector mode: Peak Polarity: Horizontal

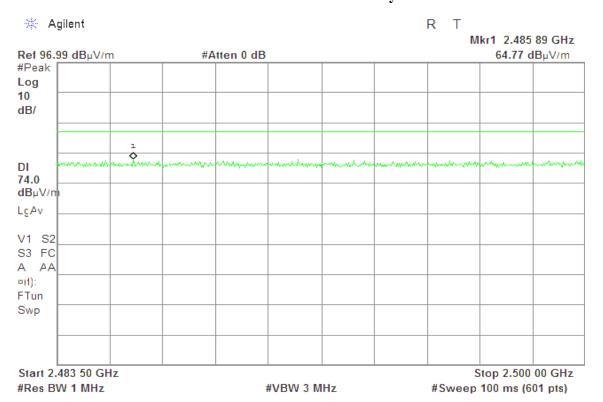


Detector mode: Average Polarity: Horizontal

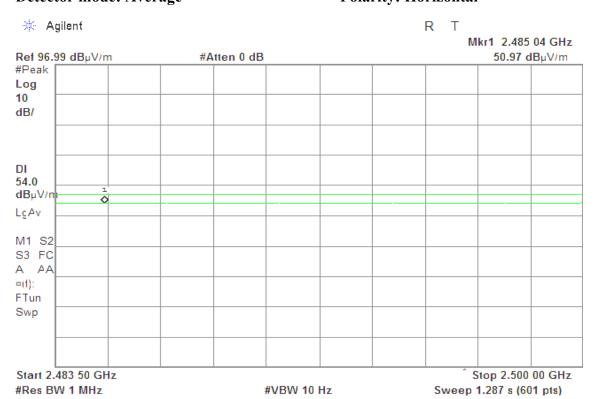


Page 35 Rev. 00

Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

Detector mode: Peak Polarity: Vertical

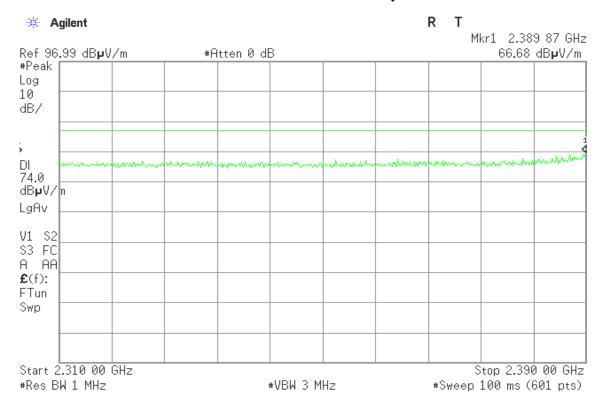


Detector mode: Average Polarity: Vertical

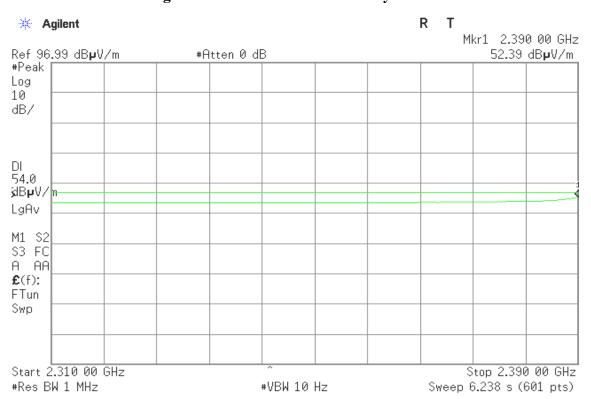


Page 36 Rev. 00

Detector mode: Peak Polarity: Horizontal

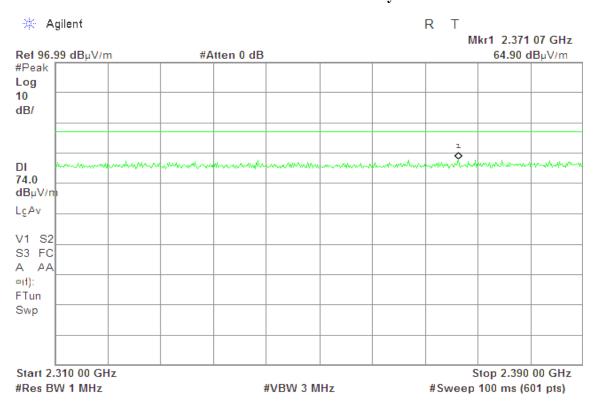


Detector mode: Average Polarity: Horizontal

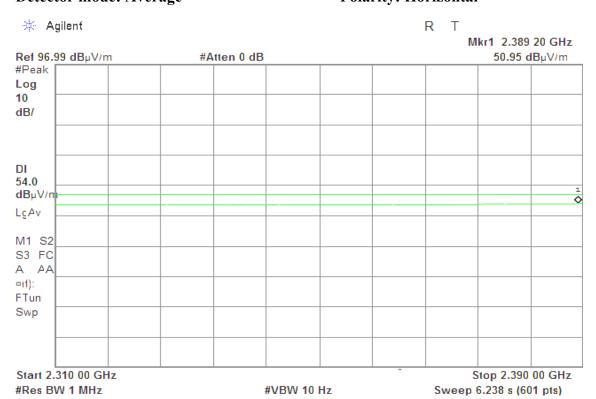


Page 37 Rev. 00

Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

Detector mode: Peak Polarity: Vertical

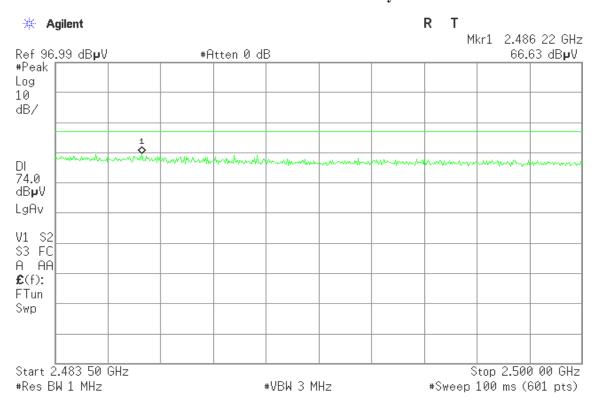


Detector mode: Average Polarity: Vertical

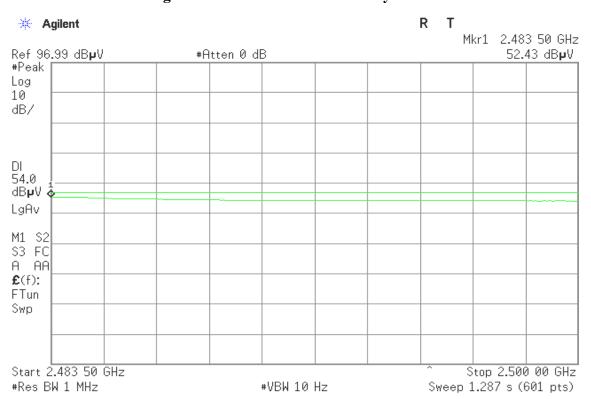


Page 38 Rev. 00

Detector mode: Peak Polarity: Horizontal

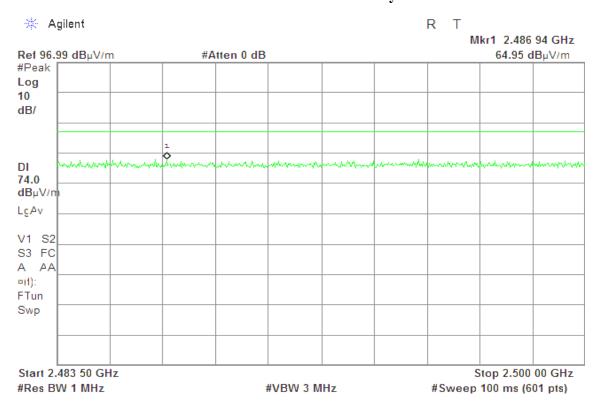


Detector mode: Average Polarity: Horizontal

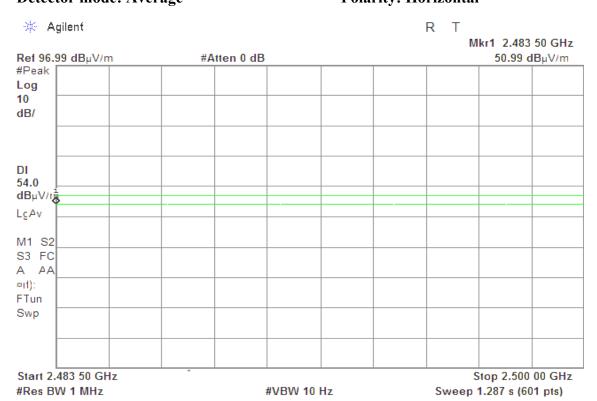


Page 39 Rev. 00

Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)


Detector mode: Peak Polarity: Vertical

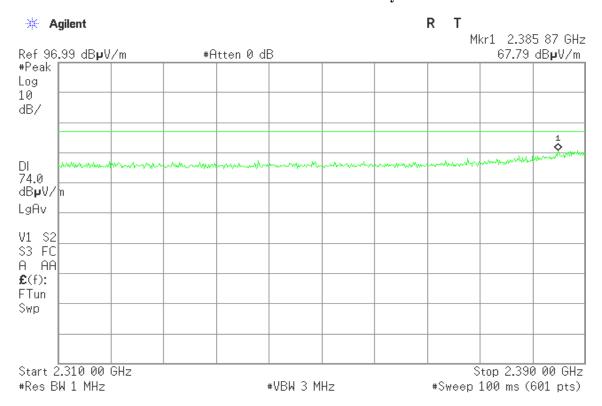


Detector mode: Average Polarity: Vertical

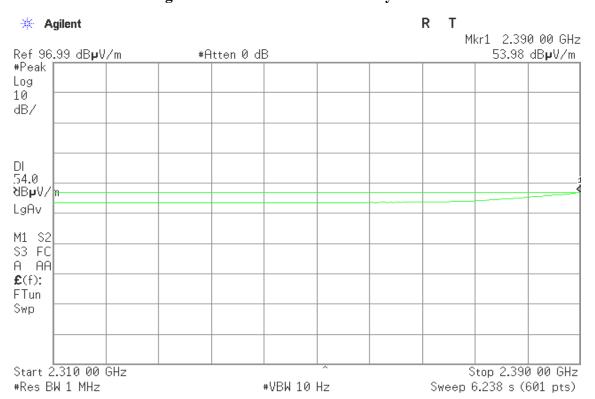


Page 40 Rev. 00



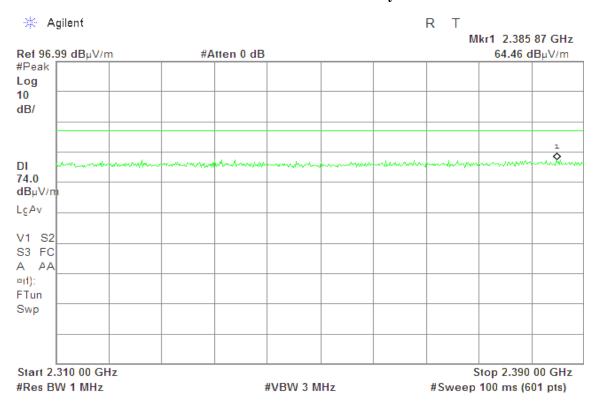


Detector mode: Average Polarity: Horizontal

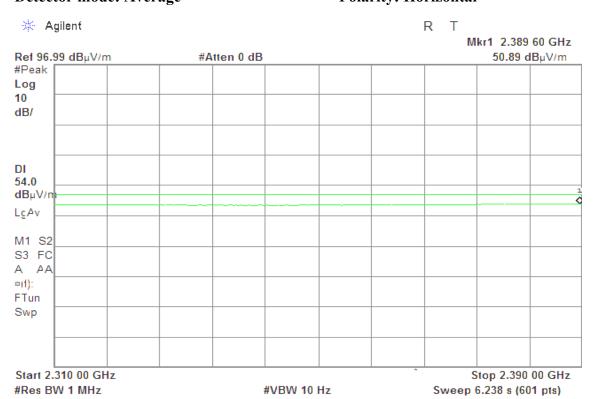


Page 41 Rev. 00

Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

Detector mode: Peak Polarity: Vertical

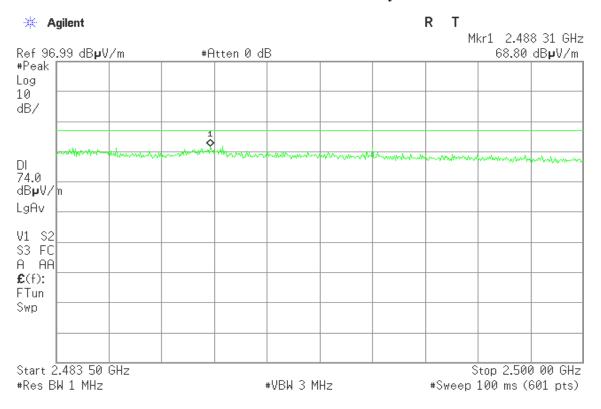


Detector mode: Average Polarity: Vertical

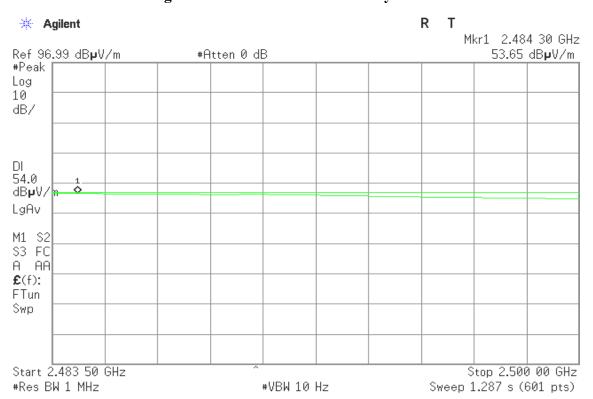


Page 42 Rev. 00



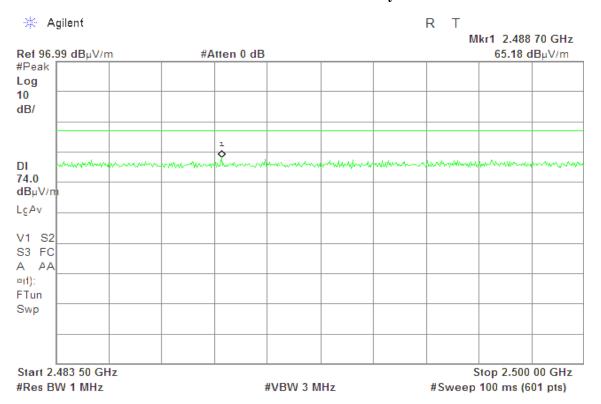


Detector mode: Average Polarity: Horizontal

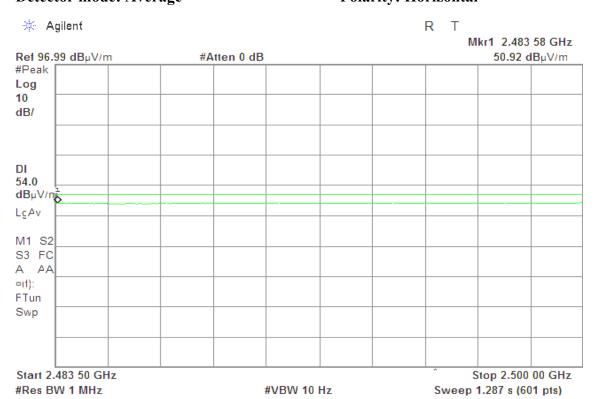

Page 43 Rev. 00

Test Plot


Conducted Band Edges (IEEE 802.11 mode / CH Low)

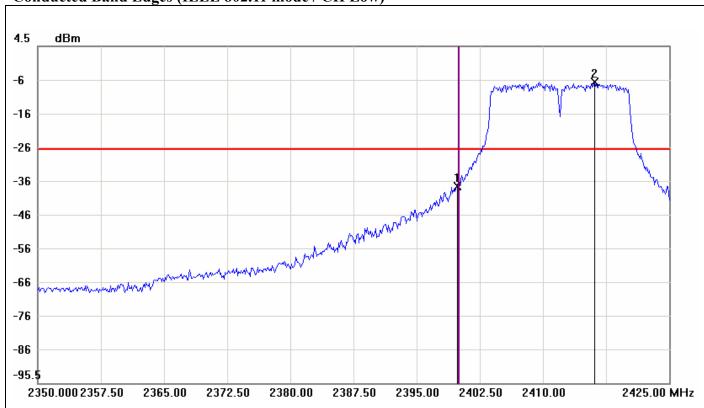

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.8750	-37.16	-26.18	-10.98
2	2416.1250	-6.18	-26.18	20.00

Page 44 Rev. 00


Conducted Band Edges (IEEE 802.11g mode / CH High)

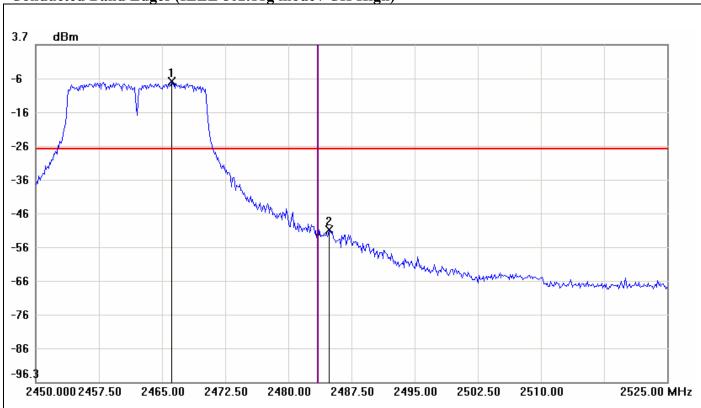

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2466.1250	-7.22	-27.22	20.00
2	2484.8750	-51.03	-27.22	-23.81

Page 45 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)

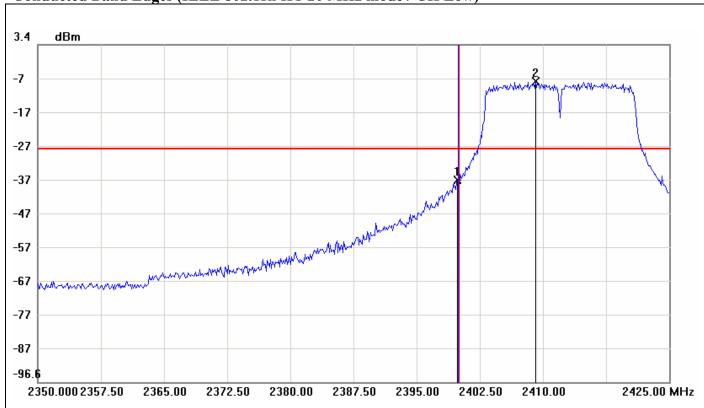

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.8750	-36.77	-27.41	-9.36
2	2409.1250	-7.41	-27.41	20.00

Page 46 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)

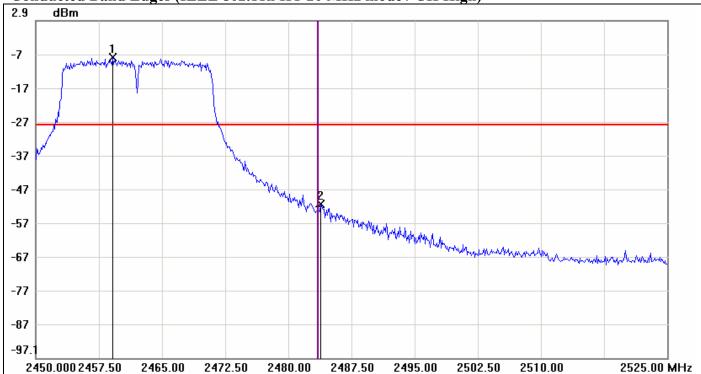

	No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
Ī	1	2459.1250	-7.94	-27.94	20.00
ſ	2	2483.8750	-51.52	-27.94	-23.58

Page 47 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)

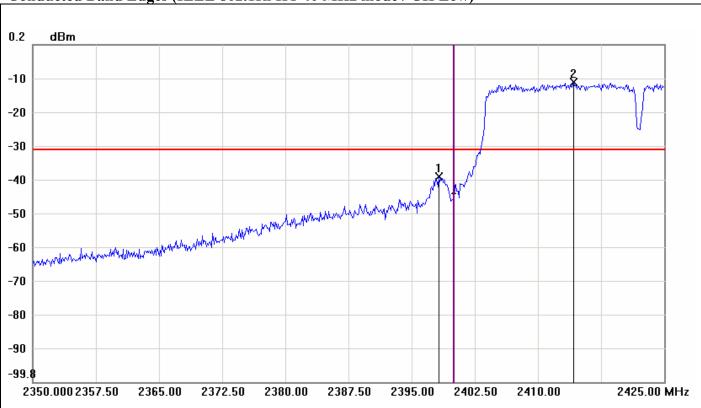

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2398.2500	-38.99	-30.80	-8.19
2	2414.2500	-10.80	-30.80	20.00

Page 48 Rev. 00

Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)

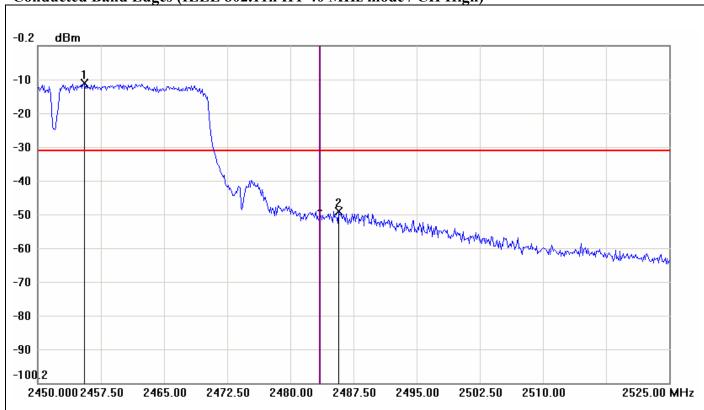

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2455.5000	-11.38	-31.38	20.00
2	2485.7500	-49.24	-31.38	-17.86

Page 49 Rev. 00

7.5 PEAK POWER SPECTRAL DENSITY


LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Report No.: T121128W01-RP

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.

 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
- 3. Record the max reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed.

Page 50 Rev. 00



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.85	8.00	PASS
Mid	2437	-14.57		PASS
High	2462	-14.93		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.26	8.00	PASS
Mid	2437	-14.80		PASS
High	2462	-15.14		PASS

Test mode: IEEE 802.11n HT 40 MHz mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-18.12		PASS
Mid	2437	-16.93	8.00	PASS
High	2452	-16.80		PASS

Page 51 Rev. 00

Test Plot

IEEE 802.11g mode


PPSD (CH Low)

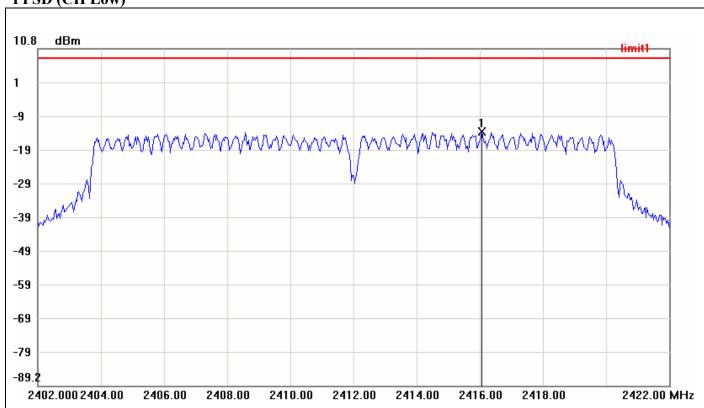

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2416.0667	-13.85	8.00	-21.85

Page 52 Rev. 00




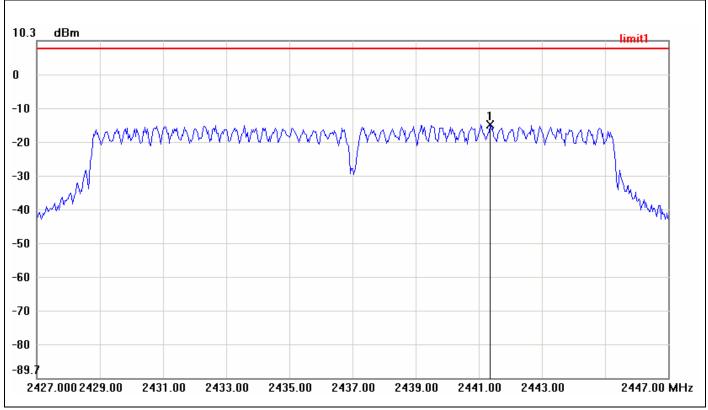

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2441.3667	-14.57	8.00	-22.57

Page 53 Rev. 00



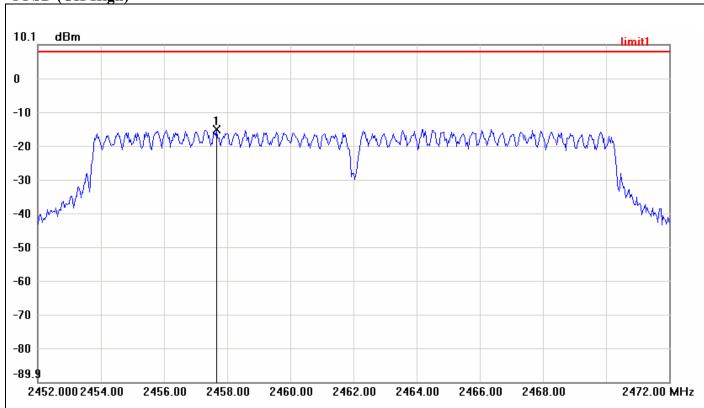


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2457.6667	-14.93	8.00	-22.93

Page 54 Rev. 00

IEEE 802.11n HT 20 MHz mode


PPSD (CH Low)

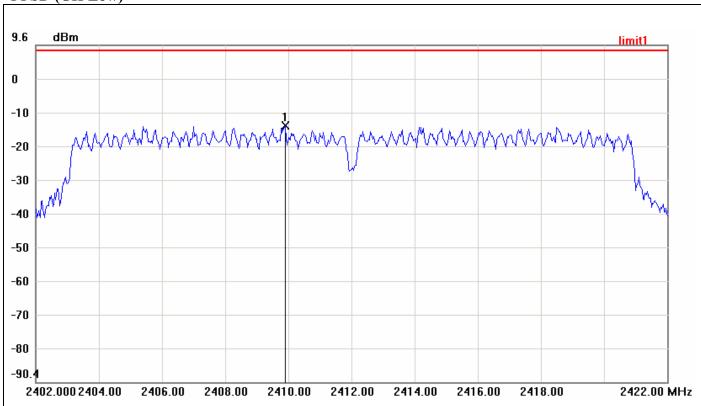

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2409.9000	-14.26	8.00	-22.26

Page 55 Rev. 00


PPSD (CH Mid)

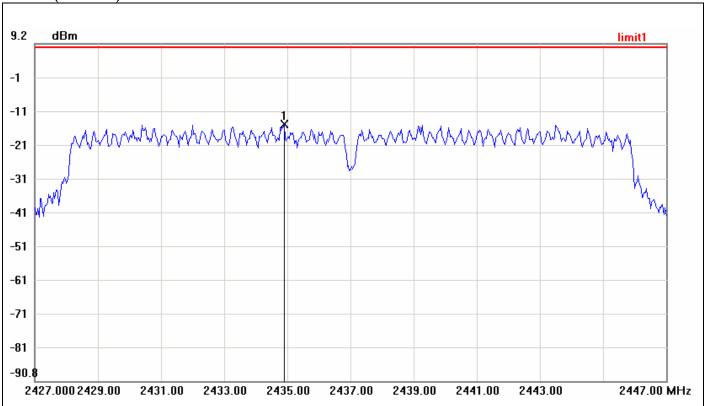

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2434.9000	-14.80	8.00	-22.80

Page 56 Rev. 00



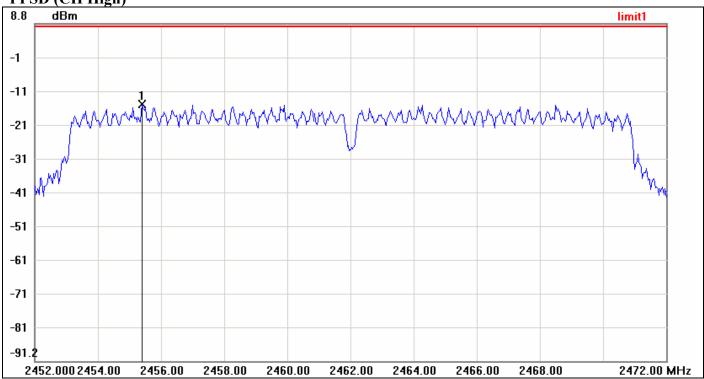


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2455.4000	-15.14	8.00	-23.14

Page 57 Rev. 00

IEEE 802.11n HT 40 MHz mode


PPSD (CH Low)

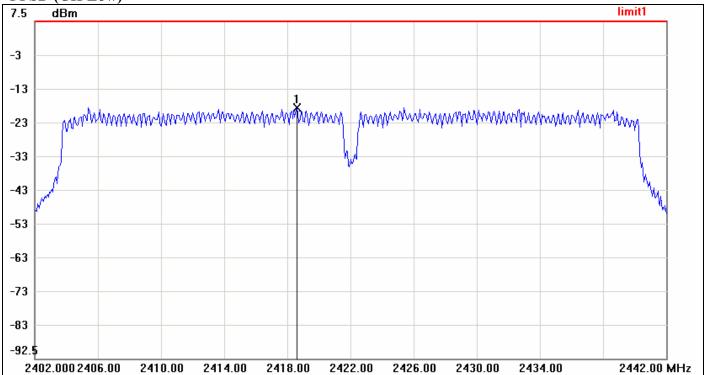

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.6000	-18.12	8.00	-26.12

Page 58 Rev. 00


PPSD (CH Mid)

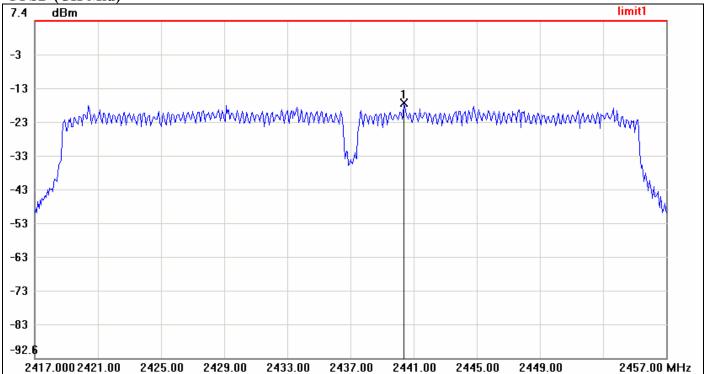

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4000	-16.93	8.00	-24.93

Page 59 Rev. 00



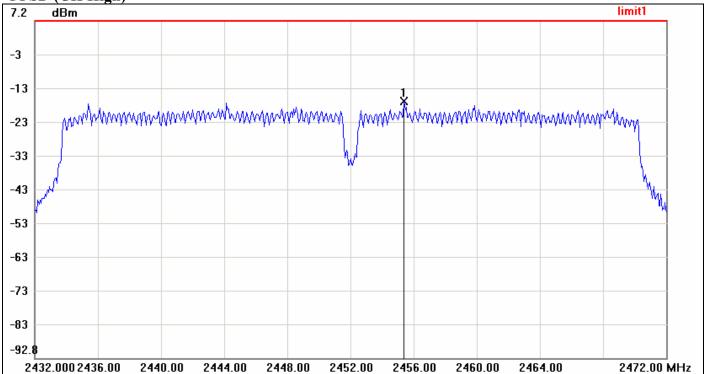

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2455.4000	-16.80	8.00	-24.80

Page 60 Rev. 00



Report No.: T121128W01-RP


7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.

Page 61 Rev. 00

Test Plot

IEEE 802.11g mode

CH Low



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-49.38	-25.87	-23.51
2	23576.7100	-50.54	-25.87	-24.67

Page 62 Rev. 00


CH Mid



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1203.5900	-56.95	-26.68	-30.27
2	23576.7100	-59.59	-26.68	-32.91

Page 63 Rev. 00



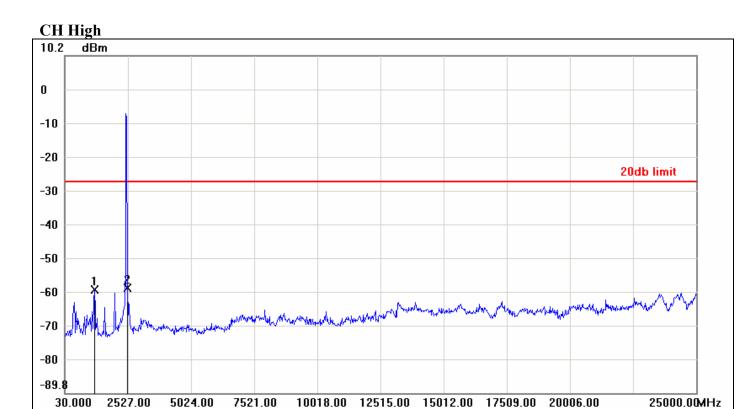

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1203.5900	-59.17	-27.17	-32.00
2	2502.0300	-58.81	-27.17	-31.64

Page 64 Rev. 00

IEEE 802.11n HT 20 MHz mode

CH Low



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1203.5900	-53.58	-27.13	-26.45
2	25000.0000	-59.51	-27.13	-32.38

Page 65 Rev. 00

CH Mid



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1203.5900	-58.83	-27.56	-31.27
2	25000.0000	-60.22	-27.56	-32.66

Page 66 Rev. 00





No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1203.5900	-57.79	-27.95	-29.84
2	2502.0300	-58.13	-27.95	-30.18

Page 67 Rev. 00

IEEE 802.11n HT 40 MHz mode

CH Low



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-48.39	-30.73	-17.66
2	24275.8700	-60.84	-30.73	-30.11

Page 68 Rev. 00







No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-56.10	-30.72	-25.38
2	2502.0300	-59.74	-30.72	-29.02

Page 69 Rev. 00





No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2002.6300	-59.47	-30.89	-28.58
2	2502.0300	-53.23	-30.89	-22.34

Page 70 Rev. 00

7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Report No.: T121128W01-RP

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz) +80	20LOG((240/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((2400/F(kHz))+40)
1.705 – 30.0	70	36.9
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Page 71 Rev. 00

Test Configuration

$9kHz \sim 30MHz$

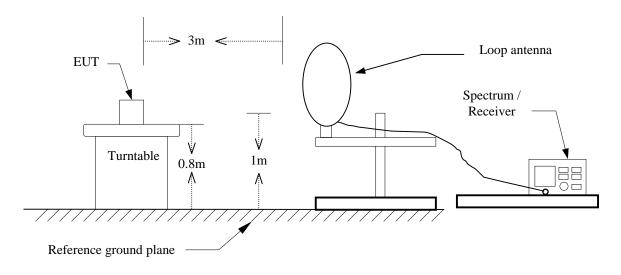


$30MHz \sim 1GHz$

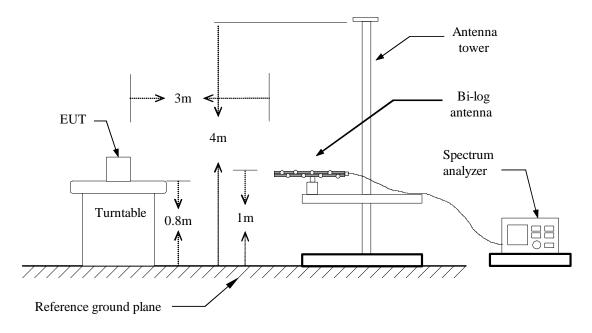

Page 72 Rev. 00

Above 1 GHz

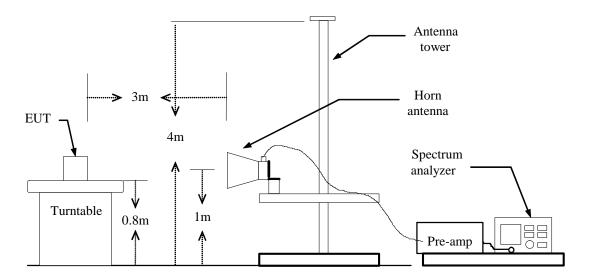

Page 73 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

Report No.: T121128W01-RP

- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Page 74 Rev. 00

TEST RESULTS

Below 1GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30 MHz.

Below 1GHz(30MHz ~ 1GHz)

Operation Mode: Normal Link **Test Date:** March 25, 2013

Temperature: 27°C **Tested by:** Shawn Wu

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
88.2000	70.26	-34.11	36.15	43.50	-7.35	peak	V
251.4833	64.99	-29.54	35.45	46.00	-10.55	peak	V
324.2333	62.85	-27.16	35.69	46.00	-10.31	peak	V
398.6000	62.22	-25.56	36.66	46.00	-9.34	peak	V
594.2167	61.34	-22.52	38.82	46.00	-7.18	peak	V
624.9333	60.02	-21.60	38.42	46.00	-7.58	peak	V
76.8833	68.70	-33.73	34.97	40.00	-5.03	peak	Н
214.3000	70.80	-29.72	41.08	43.50	-2.42	QP	Н
246.6333	74.69	-29.70	44.99	46.00	-1.01	QP	Н
324.2333	67.83	-27.16	40.67	46.00	-5.33	peak	Н
749.4167	62.20	-19.53	42.67	46.00	-3.33	peak	Н
796.3000	59.21	-19.08	40.13	46.00	-5.87	peak	Н

Remark:

- 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin(dB) = Result(dBuV/m) Limit(dBuV/m).

Page 75 Rev. 00

Report No.: T121128W01-RP

Above 1 GHz

Operation Mode: TX / IEEE 802.11g / CH Low **Test Date:** March 21, 2013

Report No.: T121128W01-RP

Temperature: 27°C **Tested by:** Shawn Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2786.667	63.04	-13.63	49.41	74.00	-24.59	peak	V
4825.000	66.22	-8.65	57.57	74.00	-16.43	peak	V
4825.000	56.85	-8.65	48.20	54.00	-5.80	AVG	V
N/A							
2646.667	63.77	-13.92	49.85	74.00	-24.15	peak	Н
4825.000	63.22	-8.65	54.57	74.00	-19.43	peak	Н
4825.000	52.72	-8.65	44.07	54.00	-9.93	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result\ (dBuV/m) Average\ limit\ (dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 76 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Mid **Test Date:** March 21, 2013

Report No.: T121128W01-RP

Temperature: 27°C Tested by: Shawn Wu
Humidity: 53 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2786.667	63.19	-13.63	49.56	74.00	-24.44	peak	V
4875.000	63.74	-8.52	55.22	74.00	-18.78	peak	V
4875.000	54.46	-8.52	45.94	54.00	-8.06	AVG	V
N/A							
2913.333	63.18	-13.36	49.82	74.00	-24.18	peak	Н
4875.000	62.61	-8.52	54.09	74.00	-19.91	peak	Н
4875.000	52.52	-8.52	44.00	54.00	-10.00	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 77 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH High **Test Date:** March 21, 2013

Report No.: T121128W01-RP

Temperature: 27°C Tested by: Shawn Wu
Humidity: 53 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2786.667	63.89	-13.63	50.26	74.00	-23.74	peak	V
4925.000	62.96	-8.39	54.57	74.00	-19.43	peak	V
4925.000	52.33	-8.39	43.94	54.00	-10.06	AVG	V
N/A							
2756.667	64.32	-13.69	50.63	74.00	-23.37	peak	Н
4925.000	61.59	-8.39	53.20	74.00	-20.80	peak	Н
4925.000	48.60	-8.39	40.21	54.00	-13.79	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 78 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low Test Date: March 21, 2013

Report No.: T121128W01-RP

Temperature: 27°C Tested by: Shawn Wu
Humidity: 53 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	actor Result Limit		Margin (dB)	Remark	Ant.Pol. (H/V)
2790.000	62.98	-13.62	49.36	74.00	-24.64	peak	V
4825.000	64.52	-8.65	55.87	74.00	-18.13	peak	V
4825.000	52.85	-8.65	44.20	54.00	-9.80	AVG	V
N/A							
2760.000	63.64	-13.68	49.96	74.00	-24.04	peak	Н
4825.000	61.37	-8.65	52.72	74.00	-21.28	peak	Н
4825.000	47.56	-8.65	38.91	54.00	-15.09	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 79 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid Test Date: March 21, 2013

Report No.: T121128W01-RP

Temperature:27°CTested by: Shawn WuHumidity:53 % RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2803.333	63.18	-13.59	49.59	74.00	-24.41	peak	V
4875.000	63.36	-8.52	54.84	74.00	-19.16	peak	V
4875.000	53.14	-8.52	44.62	54.00	-9.38	AVG	V
N/A							
2706.667	63.71	-13.80	49.91	74.00	-24.09	peak	Н
4875.000	61.25	-8.52	52.73	74.00	-21.27	peak	Н
4875.000	51.57	-8.52	43.05	54.00	-10.95	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 80 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High Test Date: March 21, 2013

Report No.: T121128W01-RP

Temperature:27°CTested by: Shawn WuHumidity:53 % RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2910.000	63.38	-13.37	50.01	74.00	-23.99	peak	V
4925.000	62.15	-8.39	53.76	74.00	-20.24	peak	V
4925.000	50.47	-8.39	42.08	54.00	-11.92	AVG	V
N/A							
2900.000	63.85	-13.39	50.46	74.00	-23.54	peak	Н
4925.000	60.67	-8.39	52.28	74.00	-21.72	peak	Н
4925.000	50.58	-8.39	42.19	54.00	-11.81	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 81 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode Test Date: March 21, 2013

Temperature: 27°C Tested by: Shawn Wu

Report No.: T121128W01-RP

Humidity: 53 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2963.333	64.17	-13.26	50.91	74.00	-23.09	peak	V
4850.000	60.68	-8.59	52.09	74.00	-21.91	peak	V
4850.000	51.43	-8.59	42.84	54.00	-11.16	AVG	V
N/A							
2676.667	63.40	-13.86	49.54	74.00	-24.46	peak	Н
4850.000	58.46	-8.59	49.87	74.00	-24.13	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 82 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH Mid Test Date: March 21, 2013

Temperature: 27°C **Tested by:** Shawn Wu

Humidity: 53 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2863.333	63.35	-13.47	49.88	74.00	-24.12	peak	V
4875.000	60.22	-8.52	51.70	74.00	-22.30	peak	V
N/A							
2796.667	63.25	-13.61	49.64	74.00	-24.36	peak	Н
4866.667	58.78	-8.54	50.24	74.00	-23.76	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result\ (dBuV/m) Average\ limit\ (dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 83 Rev. 00

Report No.: T121128W01-RP

Operation Mode: TX / IEEE 802.11n HT 40 MHz mode Test Date: March 21, 2013

Report No.: T121128W01-RP

Temperature: 27°C Tested by: Shawn Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2653.333	63.46	-13.91	49.55	74.00	-24.45	peak	V
4908.333	59.67	-8.44	51.23	74.00	-22.77	peak	V
N/A							
2646.667	64.39	-13.92	50.47	74.00	-23.53	peak	Н
4908.333	58.85	-8.44	50.41	74.00	-23.59	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark \ result(dBuV/m) Average \ limit(dBuV/m)$. Peak detector mode and average detector mode of the emission shown in Result column.

Page 84 Rev. 00

7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to $\S15.207(a)$, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Report No.: T121128W01-RP

Frequency Range (MHz)	Limits (dBμV)				
(NIIIZ)	Quasi-peak	Average			
0.15 to 0.50	66 to 56*	56 to 46*			
0.50 to 5	56	46			
5 to 30	60	50			

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 85 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Report No.: T121128W01-RP

Test Data

Operation Mode: Normal Link **Test Date:** March 26, 2013

Temperature: 26°C **Tested by:** Sehni Hu

Humidity: 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)		QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1519	35.76	10.01	0.07	35.83	10.08	65.90	55.90	-30.07	-45.82	L1
0.3052	32.27	13.40	0.07	32.34	13.47	60.10	50.10	-27.76	-36.63	L1
0.4380	29.77	16.84	0.07	29.84	16.91	57.10	47.10	-27.26	-30.19	L1
1.4811	19.07	2.13	0.08	19.15	2.21	56.00	46.00	-36.85	-43.79	L1
3.6284	17.43	8.33	0.11	17.54	8.44	56.00	46.00	-38.46	-37.56	L1
14.7002	19.58	9.28	0.27	19.85	9.55	60.00	50.00	-40.15	-40.45	L1
0.1689	39.64	13.73	0.03	39.67	13.76	65.01	55.01	-25.34	-41.25	L2
0.3268	36.45	14.44	0.02	36.47	14.46	59.53	49.53	-23.06	-35.07	L2
0.4865	33.64	14.49	0.02	33.66	14.51	56.23	46.23	-22.57	-31.72	L2
1.2607	20.83	3.91	0.03	20.86	3.94	56.00	46.00	-35.14	-42.06	L2
14.7937	24.03	8.64	0.20	24.23	8.84	60.00	50.00	-35.77	-41.16	L2
25.4355	16.56	5.97	0.34	16.90	6.31	60.00	50.00	-43.10	-43.69	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
- 4. $L1 = Line \ One \ (Live \ Line) / L2 = Line \ Two \ (Neutral \ Line)$


Page 86 Rev. 00

Test Plots

Conducted emissions (Line 1)

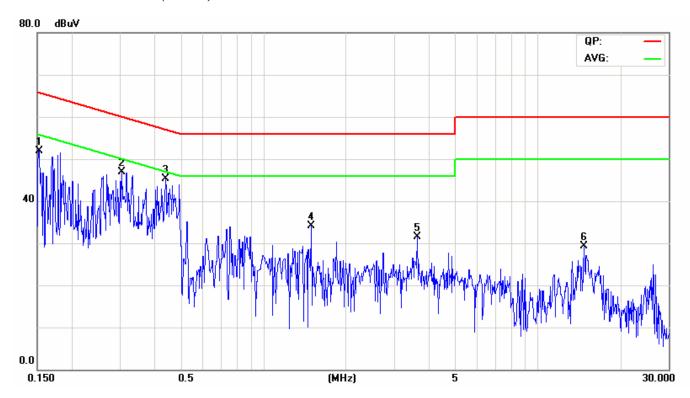

Conducted emissions (Line 2)

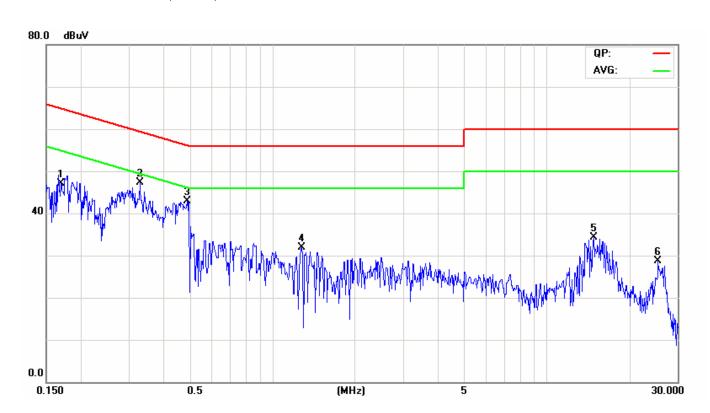

Page 87 Rev. 00