



ISO/IEC17025 Accredited Lab.

FCC ID TEST REPORT

for

USB 2.0 ComBo

Trade Mark: N/A

Model: G-C1504

FCC ID: Z8XG-C1504

Test Report Number: 1308001698E

Issued Date: August 03, 2013

Issued for:

GHI INTERNATIONAL CO., LTD

**3rd Floor, West Building, Shen Te Bian TechPark, Qiling North Road,
Buji Town, Shenzhen, China**

Issued by:

**SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD.
5/F,Block 4, Anhua Industrial Zone., No.8 Tairan Rd. Chegongmiao, Futian
District Shenzhen, China**

**TEL: +86-755-83448688
FAX: +86-755-83442996**

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	3
2 EUT DESCRIPTION	4
3 TEST METHODOLOGY.....	5
3.1. DECISION OF FINAL TEST MODE.....	5
3.2. EUT SYSTEM OPERATION.....	5
3.3. TEST MODE DESCRIPTION.....	5
4 SETUP OF EQUIPMENT UNDER TEST	6
4.1. DESCRIPTION OF SUPPORT UNITS	6
4.2. CONFIGURATION OF SYSTEM UNDER TEST	6
5 FACILITIES AND ACCREDITATIONS.....	7
5.1. FACILITIES	7
5.2. MEASUREMENT UNCERTAINTY.....	7
6 CONDUCTED EMISSION MEASUREMENT	8
6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	8
6.2. TEST INSTRUMENTS	8
6.3. TEST PROCEDURES.....	9
6.4. TEST SETUP	10
6.5. TEST RESULTS.....	10
7 RADIATED EMISSION MEASUREMENT	13
7.1. LIMITS OF RADIATED EMISSION MEASUREMENT.....	13
7.2. TEST INSTRUMENTS	13
7.3. TEST PROCEDURES.....	14
7.4. TEST SETUP	16
7.5. TEST RESULTS.....	16
8 PHOTOGRAPHS OF THE TEST CONFIGURATION	19
9 PHOTOGRAPHS OF EUT	20

1 TEST RESULT CERTIFICATION

Product:	USB 2.0 ComBo
Model:	G-C1504
Trade Mark	N/A
Applicant:	GHI INTERNATIONAL CO., LTD 3rd Floor, West Building, Shen Te Bian TechPark, Qiling North Road, Buji Town, Shenzhen, China
Manufacturer:	GHI INTERNATIONAL CO., LTD 3rd Floor, West Building, Shen Te Bian TechPark, Qiling North Road, Buji Town, Shenzhen, China
Tested:	July 23, 2013 ~ July 30, 2013
Test Voltage:	DC 5V
Applicable Standards:	FCC Part 15 rules: 2012 ANSI C63.4:2003

The above equipment has been tested by SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Brown Lu
Tested By:

Date: 2013-08-03

(Brown Lu)

Terry Tang

Check By:

Date: 2013-08-03

(Terry Tang)

Jack Chung

Approved By:

Date: 2013-08-03

(Jack Chung)

2 EUT DESCRIPTION

Product	USB 2.0 ComBo
Trade Mark	N/A
Model	G-C1504
Applicant	GHI INTERNATIONAL CO., LTD
EUT Type	<input checked="" type="checkbox"/> Engineering Sample <input type="checkbox"/> Product Sample <input type="checkbox"/> Mass Product Sample
Voltage Rating	DC 5V
DC Line	N/A

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
USB INPUT PORT	1	1
USB OUTPUT PORT	2	2
SD socket	1	1
TF socket	1	1

Model difference and model list

N/A

3 TEST METHODOLOGY

3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode		
Emission	Conducted Emission	Mode: Data Transmitting
	Radiated Emission	Mode: Data Transmitting

After the preliminary scan, the following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode: Data Transmitting
	Radiated Emission	Mode: Data Transmitting

Then, the EUT configuration and cable configuration of the above highest emission mode was chosen for all final test items.

3.2. EUT SYSTEM OPERATION

1. Set up EUT with the relative support equipments.
2. Make sure the EUT worked normally during the test.

3.3. TEST MODE DESCRIPTION

Data transmitting: the SD card, TF card and two U-disk switch data with PC.

4 SETUP OF EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	PC	dx2700	CNG7140T7P	N/A	HP	Unshielded1.4 m	Unshielded 1.6m
2	Monitor	HPL170 6V	CND74535YZ	N/A	HP	Unshielded1.2 m	Unshielded 1.6m
3	Keyboard	SK-288 0	435302-AA1	N/A	HP	Unshielded1.2 m	N/A
4	Mouse	N/A	N/A	N/A	HP	Unshielded1.2 m	N/A
5	U-disk*2	HP Compaq dx2290 MT	CNX74417JC	N/A	HP	N/A	N/A
6	SD card	PID-6335	058F63356336	N/A	Kingston	N/A	N/A
7	TF card	Pid-1307	110074973765	N/A	Kingston	N/A	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2. CONFIGURATION OF SYSTEM UNDER TEST

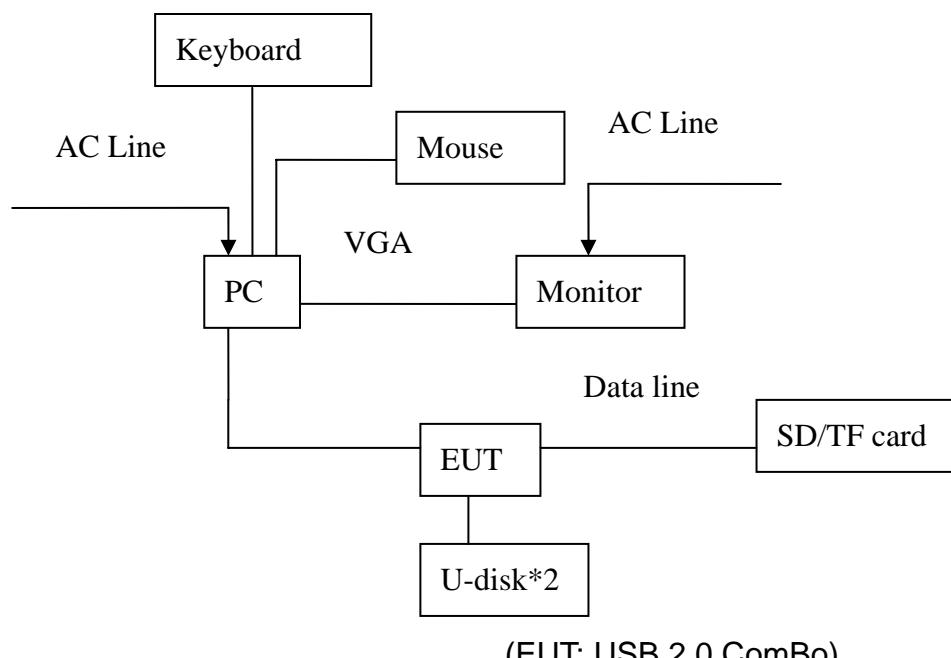

5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	150kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6 CONDUCTED EMISSION MEASUREMENT

6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system shall not exceed the level of field strengths specified above.

6.2. TEST INSTRUMENTS

Conducted Emission Shielding Room Test Site 843				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	12/16/2013
LISN	AFJ	LS16	16010222119	12/16/2013
LISN	Meestec	AN3016	04/10040	12/16/2013

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).
2. N.C.R = No Calibration Request.

6.3. TEST PROCEDURES

Procedure of Preliminary Test

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.


Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

6.4. TEST SETUP

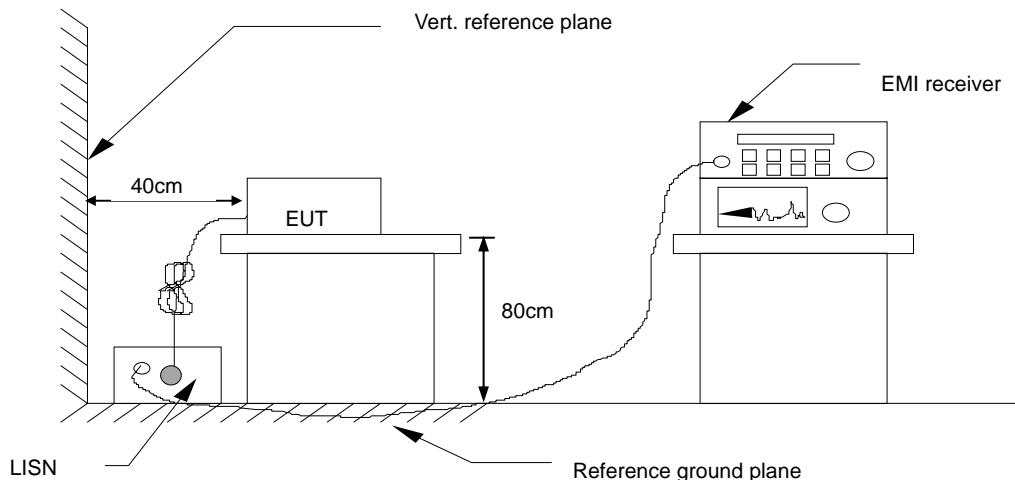

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.5. TEST RESULTS

Model No.	G-C1504	6dB Bandwidth	120 KHz
Environmental Conditions	26°C, 60% RH	Test Mode	Data Transmitting
Detector Function	Peak / Quasi-peak/AV	Test Result	Pass
Test By	Brown Lu		

NOTE: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. “--” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level(dBuV) = Receiver reading

Corr. Factor (dB) = Attenuator Factor+ Cable loss

Level (dBuV) = Reading level(dBuV) + Corr. Factor (dB)


Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Q.P.=Quasi-Pea


Please refer to following diagram for individual

L:

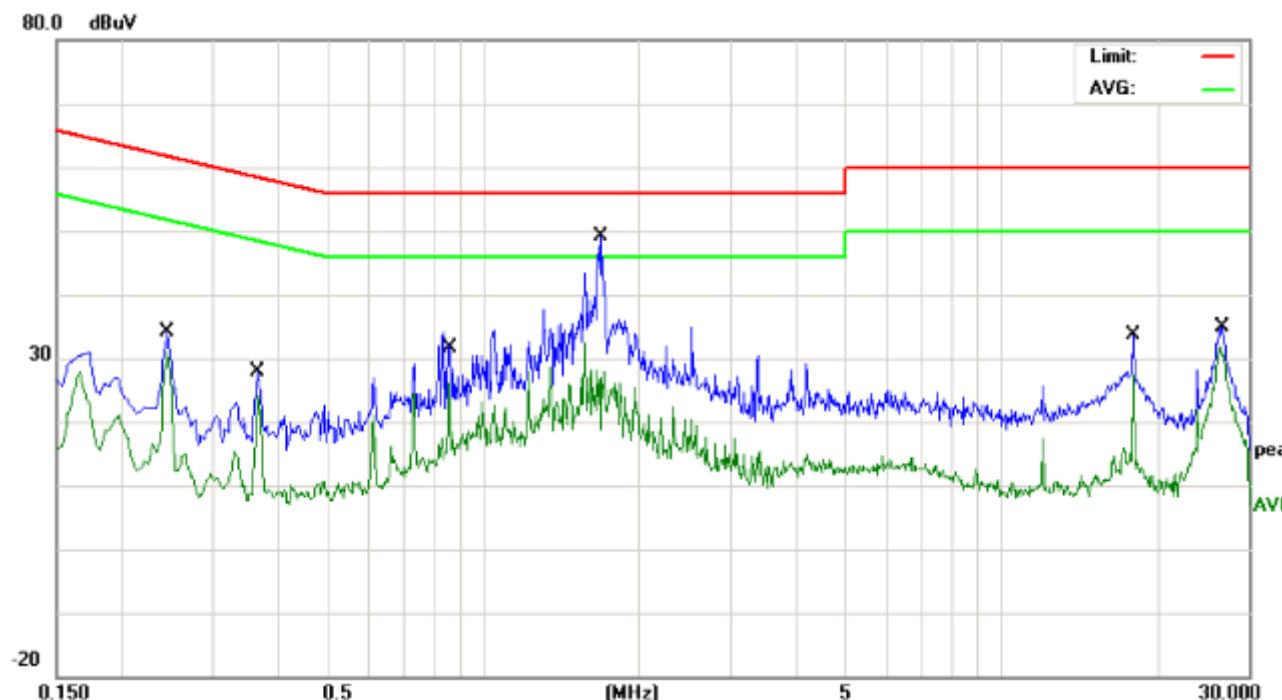

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment		dB	Detector
1		0.2460	23.59	10.46	34.05	61.89	-27.84	QP
2		0.2460	20.54	10.46	31.00	51.89	-20.89	AVG
3		0.3673	16.64	10.55	27.19	58.56	-31.37	QP
4		0.3673	13.33	10.55	23.88	48.56	-24.68	AVG
5		0.8620	20.73	10.78	31.51	56.00	-24.49	QP
6		0.8620	10.64	10.78	21.42	46.00	-24.58	AVG
7	*	1.6900	38.37	10.72	49.09	56.00	-6.91	QP
8		1.6900	16.23	10.72	26.95	46.00	-19.05	AVG
9		18.0059	23.18	10.48	33.66	60.00	-26.34	QP
10		18.0059	16.82	10.48	27.30	50.00	-22.70	AVG
11		26.7380	24.31	10.57	34.88	60.00	-25.12	QP
12		26.7380	19.91	10.57	30.48	50.00	-19.52	AVG

N:

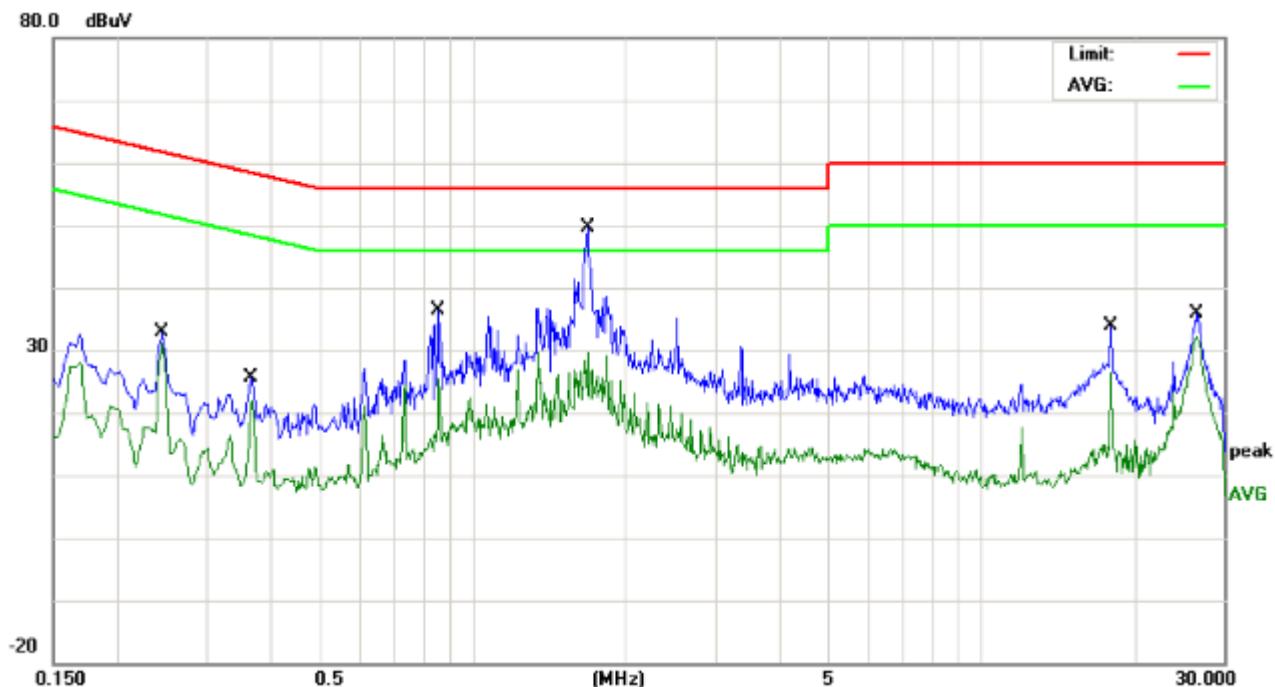

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.2460	22.51	10.46	32.97	61.89	-28.92	QP	
2		0.2460	20.70	10.46	31.16	51.89	-20.73	AVG	
3		0.3673	15.01	10.55	25.56	58.56	-33.00	QP	
4		0.3673	10.87	10.55	21.42	48.56	-27.14	AVG	
5		0.8580	25.54	10.76	36.30	56.00	-19.70	QP	
6		0.8580	14.53	10.76	25.29	46.00	-20.71	AVG	
7	*	1.6780	37.15	10.72	47.87	56.00	-8.13	QP	
8		1.6780	13.45	10.72	24.17	46.00	-21.83	AVG	
9		18.0019	23.39	10.48	33.87	60.00	-26.13	QP	
10		18.0019	15.85	10.48	26.33	50.00	-23.67	AVG	
11		26.6380	24.08	10.57	34.65	60.00	-25.35	QP	
12		26.6380	21.67	10.57	32.24	50.00	-17.76	AVG	

7 RADIATED EMISSION MEASUREMENT

7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	dBuV/m (At 3m)
	Class B
30~88	40.00
88~216	43.50
216~960	46.00
960~1000	54.00

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

7.2. TEST INSTRUMENTS

Radiated Emission Test Site 966				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	G-C1504	ESCI	100005	12/16/2013
Spectrum Analyzer	R&S	FSU	100114	12/16/2013
Pre Amplifier	H.P.	HP8447E	2945A02715	12/16/2013
Bilog Antenna	SUNOL Sciences	JB3	A021907	12/16/2013
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	12/16/2013
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.

7.3. TEST PROCEDURES

Procedure of Preliminary Test

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per ANSI C63.4.

All I/O cables were positioned to simulate typical usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT and worse cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

When measuring emissions above 1GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beam width, the measurement antenna shall be aligned with the EUT.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

For the measurement above 1GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

The antenna may have to be higher or lower than the EUT, depending on the EUT's size and mounting height, but the antenna should be restricted to a range of height of from 1m to 4m above the ground or reference ground plane.


If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of the measurements.

using the procedures above to measure with peak detector function, if the result comply with the average limit specified by the appropriate regulation, record the EUT arrangement, mode of operation, and cable positions used for final radiated emission measurement , this can be done with either diagrams or photographs.

Set the detector function of the measuring instrument to average mode, using the procedures above and remeasure only those emissions that complied with the peak limits but exceeded the average limits.

Recorded at least the six highest emissions.

7.4. TEST SETUP

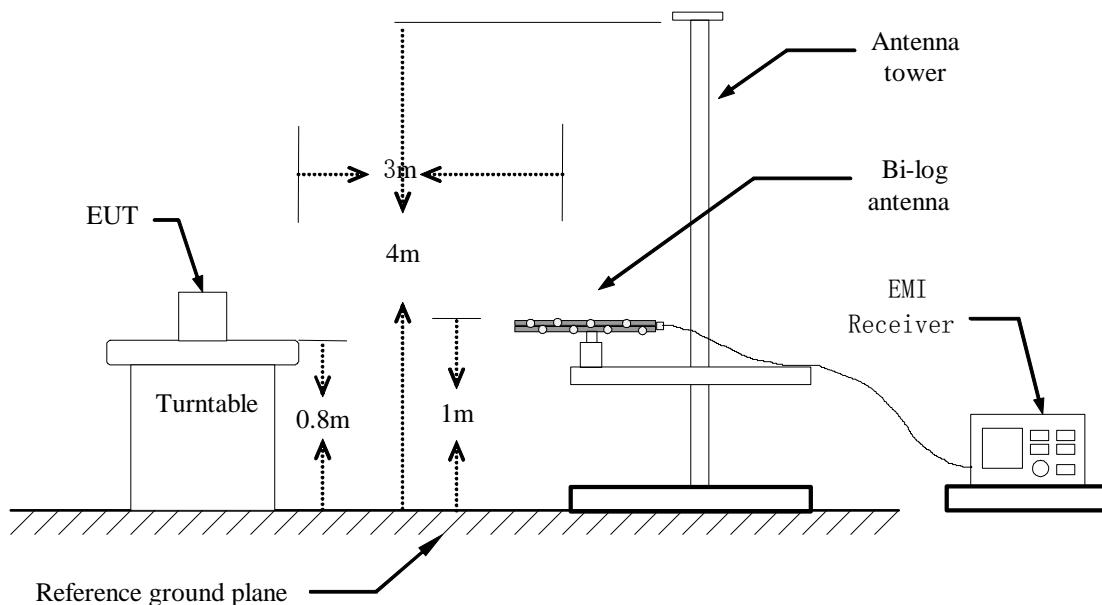

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. TEST RESULTS

Model No.	G-C1504	Test Mode	Data Transmitting
Environmental Conditions	26°C, 55% RH	6dB Bandwidth	120 KHz
Antenna Pole	Vertical / Horizontal	Antenna Distance	3m
Detector Function	Peak / Quasi-peak	Test Result	Pass

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading


Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Please refer to following diagram for individual
Horizontal:

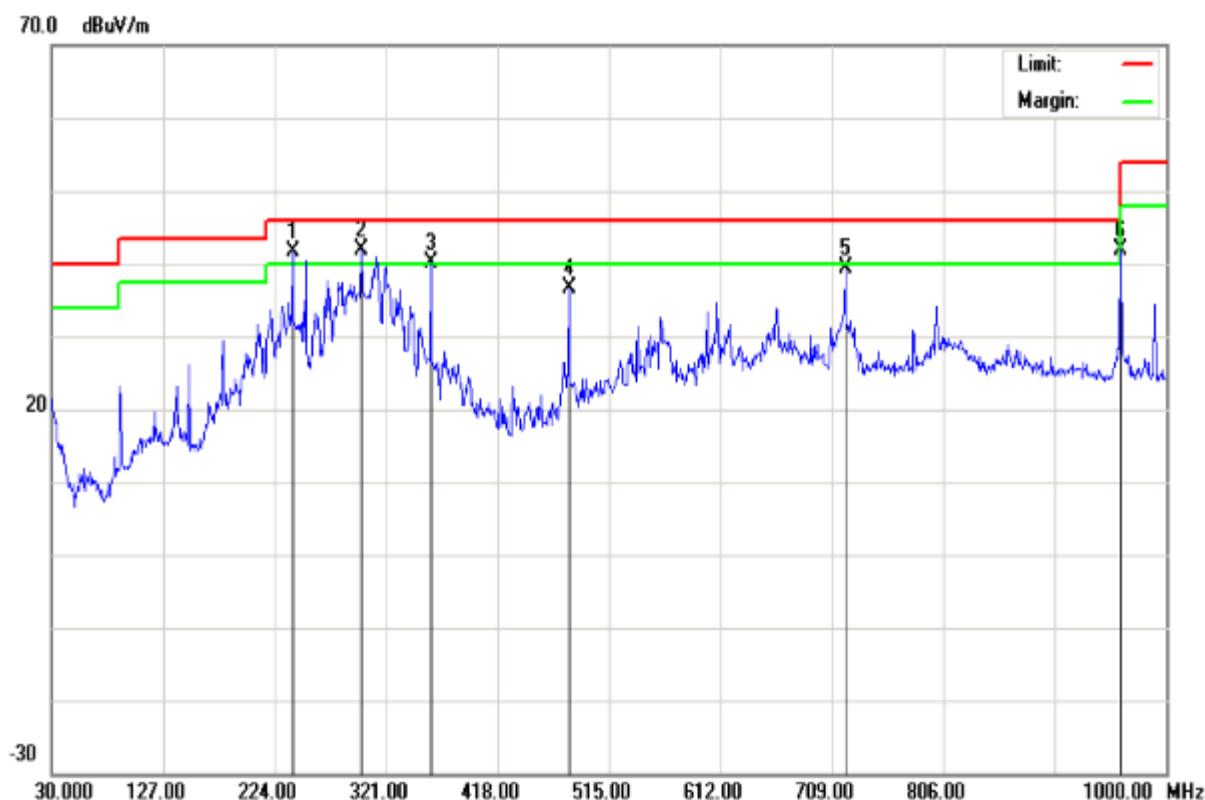

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	!	239.5200	48.07	-6.32	41.75	46.00	-4.25	QP			
2	*	299.6600	46.80	-4.99	41.81	46.00	-4.19	QP			
3	!	359.8000	42.75	-2.62	40.13	46.00	-5.87	QP			
4		480.0799	39.12	-2.49	36.63	46.00	-9.37	QP			
5		720.6399	36.00	3.29	39.29	46.00	-6.71	QP			
6		960.2300	38.92	3.00	41.92	54.00	-12.08	QP			

Vertical:

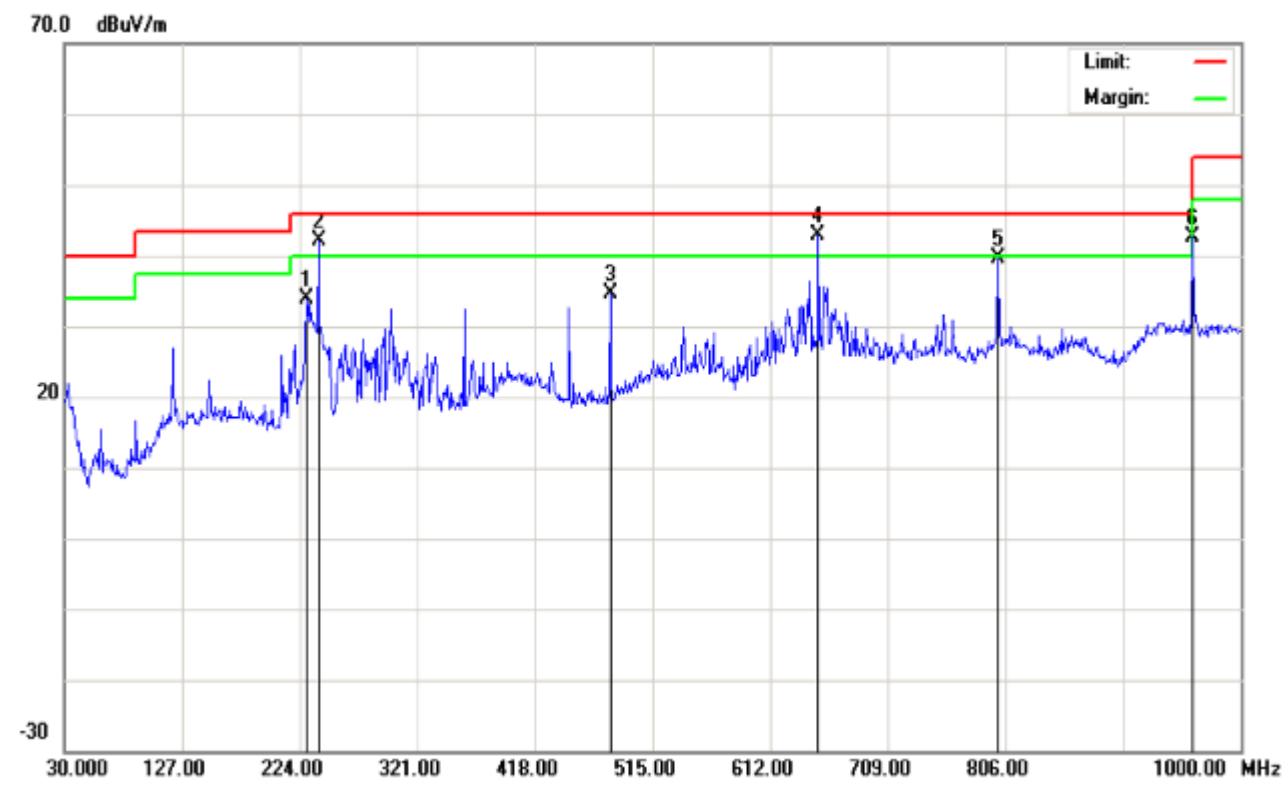


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
		dBuV	dB	dBuV/m					
1	229.8199	38.28	-4.44	33.84	46.00	-12.16	QP		
2	! 239.5200	47.49	-5.27	42.22	46.00	-3.78	QP		
3	480.0799	37.23	-2.49	34.74	46.00	-11.26	QP		
4	* 651.7698	37.98	4.99	42.97	46.00	-3.03	QP		
5	800.1799	33.89	5.67	39.56	46.00	-6.44	QP		
6	960.2300	35.05	7.60	42.65	54.00	-11.35	QP		

8 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST




RADIATED EMISSION TEST (30MHz-1GHz)

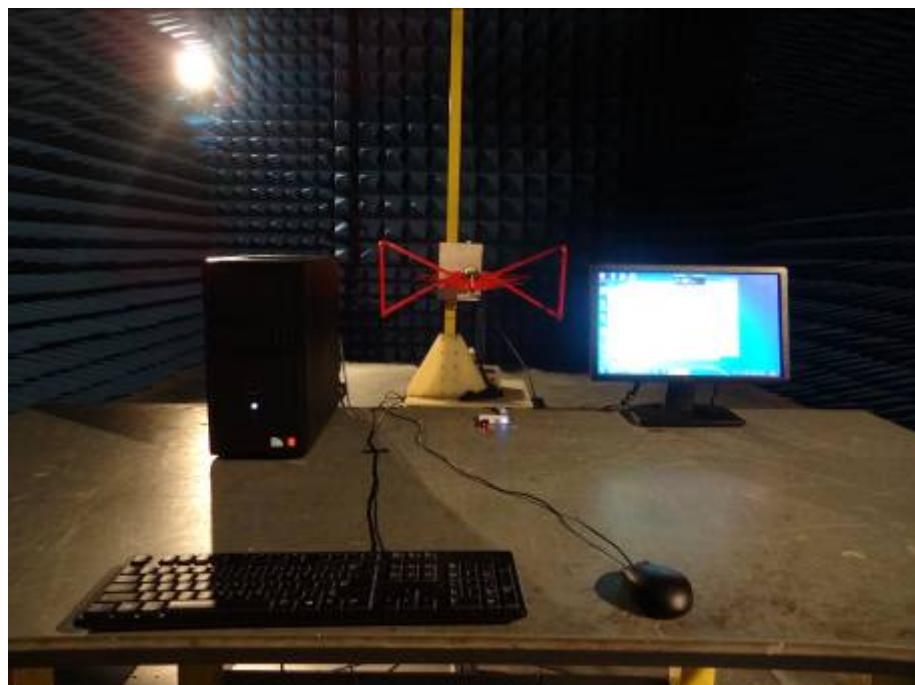


9 PHOTOGRAPHS OF EUT


Appearance photograph of EUT

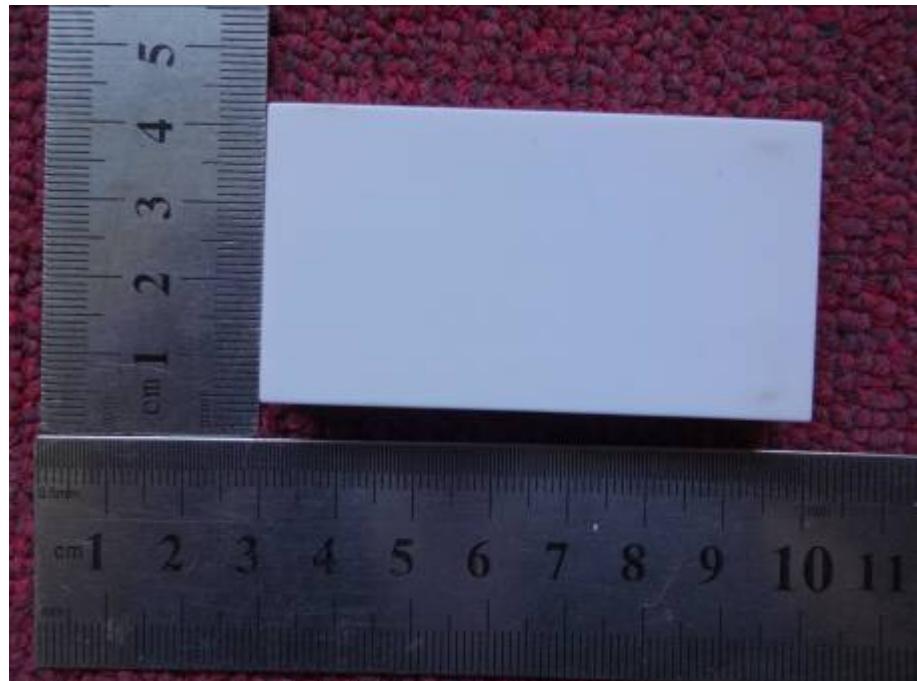

Appearance photograph of EUT

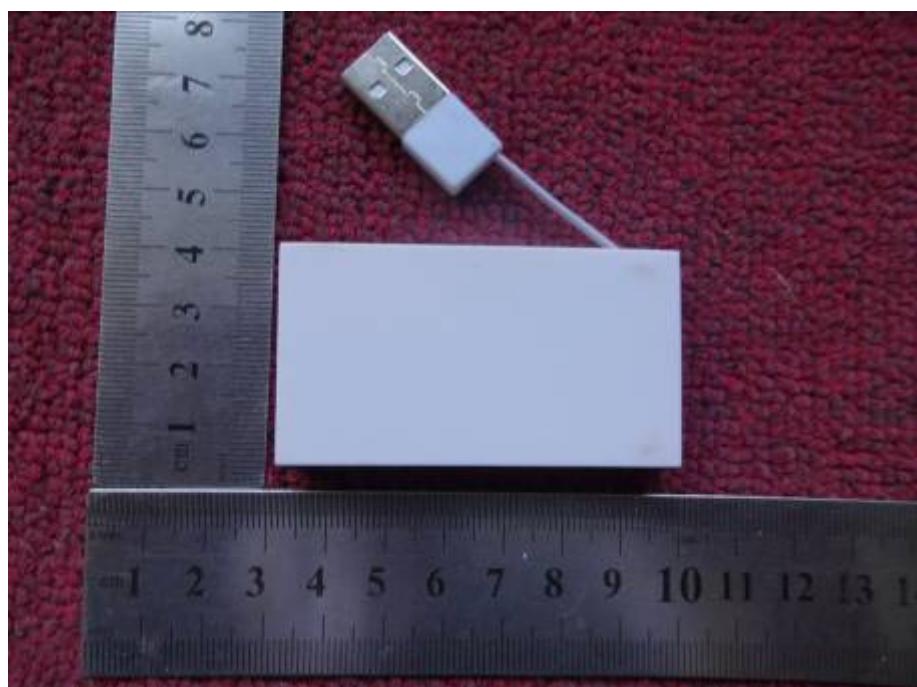

Appearance photograph of EUT

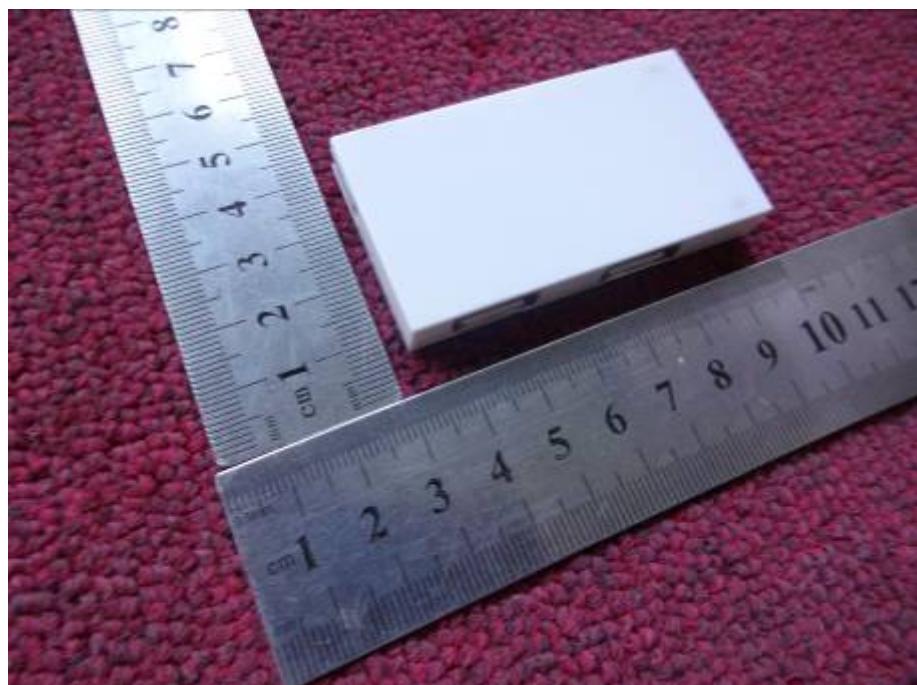

Appearance photograph of EUT



Report No.: 1308001698E Issued: August 03, 2013 Revised: None
FCC ID: Z8XG-C1504

Ports photograph of EUT



Ports photograph of EUT




Report No.: 1308001698E Issued: August 03, 2013 Revised: None
FCC ID: Z8XG-C1504

Ports photograph of EUT




Internal photograph of EUT

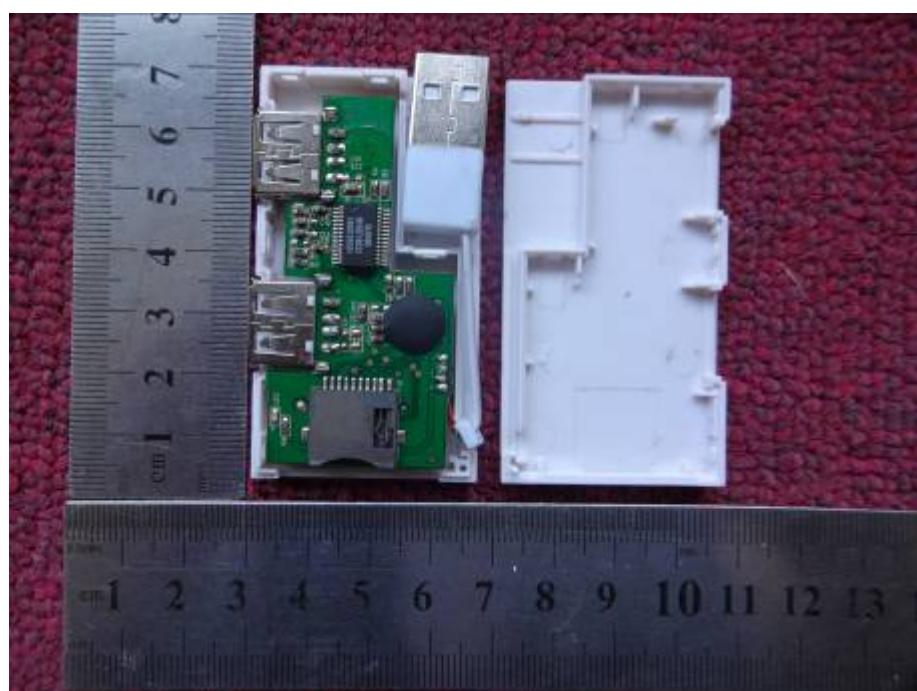


Report No.: 1308001698E Issued: August 03, 2013 Revised: None
FCC ID: Z8XG-C1504

Internal photograph of EUT

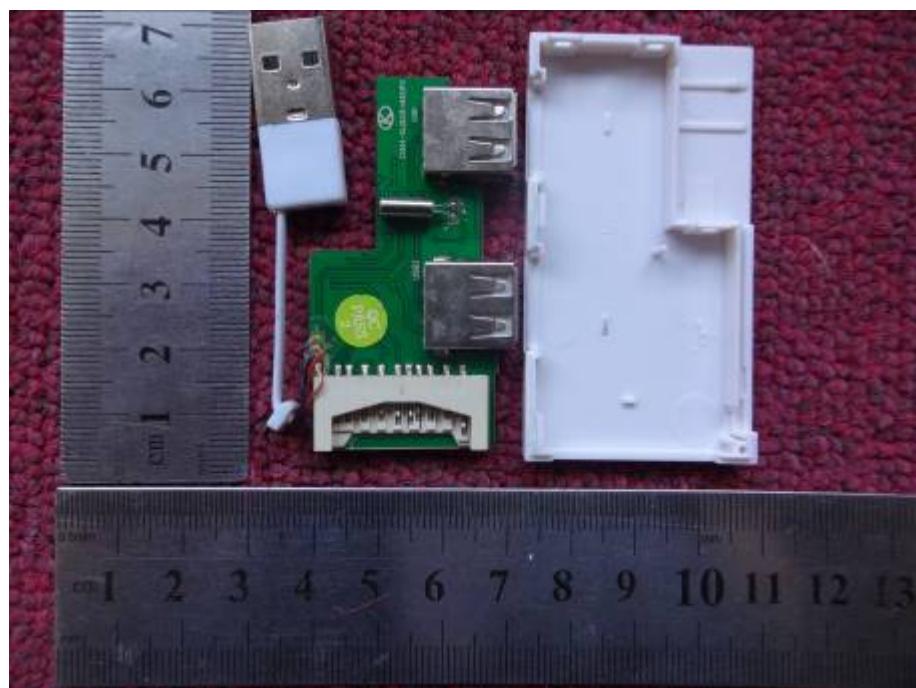


PCB photograph of EUT

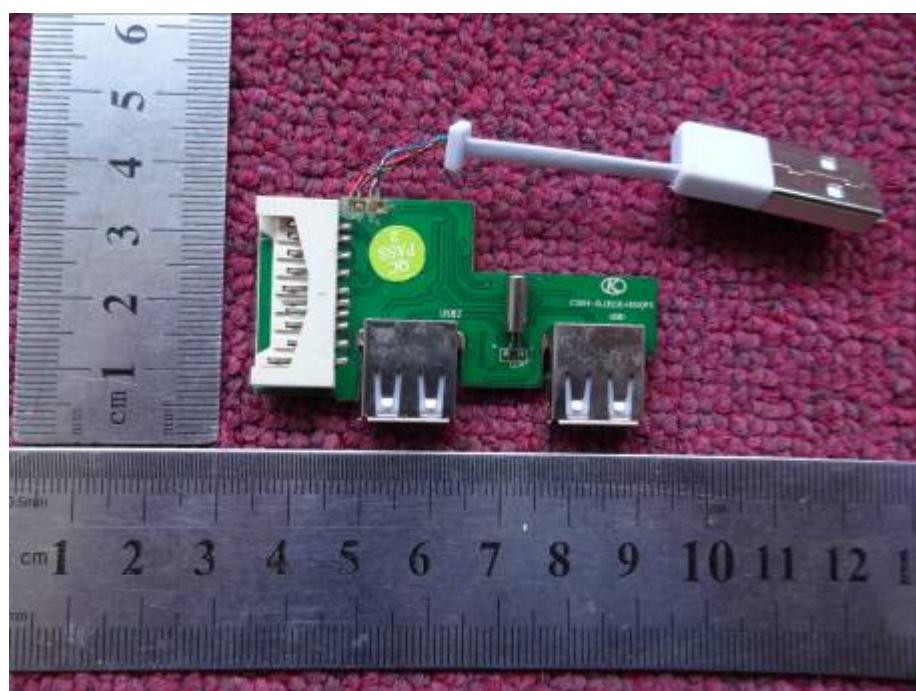

Report No.: 1308001698E Issued: August 03, 2013 Revised: None
FCC ID: Z8XG-C1504

PCB photograph of EUT

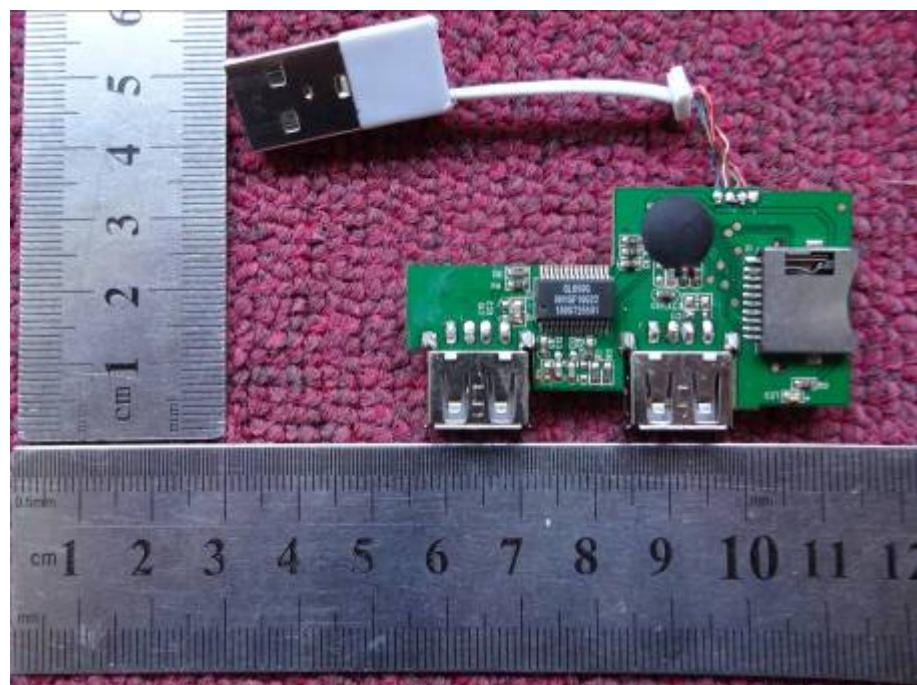

---END OF REPORT---