

FCC TEST REPORT
for
NetView Technologies (Shenzhen) Co., Ltd.

VueBell
Model No.: NI-4101, NI-4102, NI-4103, NI-4104, NI-4105,
NI-4106, NI-4107, NI-4108, NI-4109, NI-4110

Prepared for : NetView Technologies (Shenzhen) Co., Ltd.
Address : A501-502, Academy of Aerospace Technology, 10th Kejinan
Road, Nanshan District, Shenzhen, 518057, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011603587Z
Date of Test : Mar. 17~25, 2016
Date of Report : Mar. 25, 2016

TABLE OF CONTENTS

Description	Page
Test Report	
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility.....	6
1.3. Description of Test Facility.....	6
1.4. Measurement Uncertainty.....	6
1.5. Test Summary.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT.....	8
3. Conducted Emission Test.....	9
3.1. Block Diagram of Test Setup.....	9
3.2. Power Line Conducted Emission Measurement Limits (15.207).....	9
3.3. Configuration of EUT on Measurement.....	9
3.4. Operating Condition of EUT.....	9
3.5. Test Procedure.....	10
3.6. Test equipment.....	10
3.7. Power Line Conducted Emission Measurement Results.....	10
4. Test Procedure.....	15
5. Radiation Interference.....	16
5.1. Requirements (15.231):.....	16
5.2. Test Procedure.....	16
5.3. Test Results.....	16
6. 20dB Bandwidth.....	19
6.1. Requirements (15.231):.....	19
6.2. EUT Setup.....	19
6.3. Test Results.....	19
7. DUTY CYCLE.....	21
7.1. EUT Setup.....	21
7.2. Test Procedure.....	21
7.3. Requirements & Result.....	21
8. Antenna Application.....	24
8.1. Antenna Requirement.....	24
8.2. Result.....	24
9. TEST PHOTO.....	25

9.1. Photo of Conducted Emission Measurement.....	25
9.2. Photo of Radiation Emission Test.....	25
APPENDIX I (EXTERNAL PHOTOS).....	27
APPENDIX II (INTERNAL PHOTOS).....	31

Anbotek

TEST REPORT


Applicant : NetView Technologies (Shenzhen) Co., Ltd.
Manufacturer : NetView Technologies (Shenzhen) Co., Ltd.
EUT : VueBell
Model No. : NI-4101, NI-4102, NI-4103, NI-4104, NI-4105, NI-4106, NI-4107, NI-4108, NI-4109, NI-4110
Serial No. : N.A.
Trade Mark : NetVue
Rating : TX: DC 9-36V, 1.0A / AC 8-24V, 1.0A, 50/60Hz
RX: AC 100-240V, 50/60Hz, 0.5A
(Adapter: Input: AC 100-240V, 50/60Hz, 0.3A, Output: DC 12V, 500mA)

Measurement Procedure Used:
FCC Part15 Subpart C 2015, Paragraph 15.231

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited


Date of Test : Mar. 17~25, 2016



Prepared by : (Tested Engineer / Kebo Zhang)



Reviewer : (Project Manager / Dolly Mo)



Approved & Authorized Signer : (Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: VueBell
Model Number	: NI-4101, NI-4102, NI-4103, NI-4104, NI-4105, NI-4106, NI-4107, NI-4108, NI-4109, NI-4110 (Note: All samples are the same except the model number and colour, so we prepare “NI-4101” for test only.)
Test Power Supply	: AC 120V, 60Hz for adapter AC 240V, 60Hz for adapter
Adapter	: Model No.: DS1200500W Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 12V, 500mA
Frequency	: 433.92MHz WiFi: 2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Antenna Type	: Integrated
Antenna Gain	: 433.92MHz: 2dBi WiFi: 2 dBi
Applicant Address	: NetView Technologies (Shenzhen) Co., Ltd. : A501-502, Academy of Aerospace Technology, 10th Kejinan Road, Nanshan District, Shenzhen, 518057, China
Manufacturer Address	: NetView Technologies (Shenzhen) Co., Ltd. : A501-502, Academy of Aerospace Technology, 10th Kejinan Road, Nanshan District, Shenzhen, 518057, China
Factory Address	: NetView Technologies (Shenzhen) Co., Ltd. : A501-502, Academy of Aerospace Technology, 10th Kejinan Road, Nanshan District, Shenzhen, 518057, China
Date of receiver	: Mar. 17, 2015
Date of Test	: Mar. 17~25, 2016

1.2. Description of Test Facility

N/A

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, February 22, 2013.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1 dB (Horizontal)
Ur = 4.3 dB (Vertical)

Conduction Uncertainty : Uc = 3.4dB

1.5. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart C Section 15.231 for Emissions

Tests Carried Out Under FCC Part 15 Subpart C

Standard	Test Items	Status	Application
Part 15 Subpart C Section 15.231	Disturbance Voltage at The Mains Terminals	x	N/A, without AC power supply
	Conducted Emission Test	√	
	Radiation Emission	√	
	20dB Bandwidth	√	
	Duty Cycle	√	

√ Indicates that the test is applicable.
x Indicates that the test is not applicable.

2. MEASURING DEVICE AND TEST EQUIPMENT


The following test equipments were used during test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2015	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2015	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2015	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2015	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2015	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2015	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8	Power Sensor	DAER	RPR3006 W	15I00041SN0 46	Jun 30, 2015	1 Year
9	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2015	1 Year
10	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun 30, 2015	1 Year
11	Signal Generator	Agilent	E4421B	MY41000743	Jun 30, 2015	1 Year
12	DC Power supply	IV	IV-8080	YQSB0096	Jun 30, 2015	1 Year
13	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-1 50M8	SE-0137	Mar 16, 2016	1 Year

3. Conducted Emission Test

3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

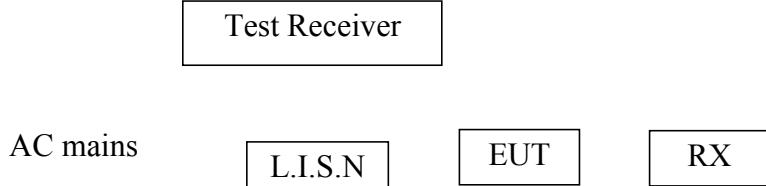

3.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (ON) and measure it.

3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 17, 2015	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 17, 2015	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 17, 2015	1 Year

3.7. Power Line Conducted Emission Measurement Results


PASS.

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.

CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.:24°C Hum.:49%

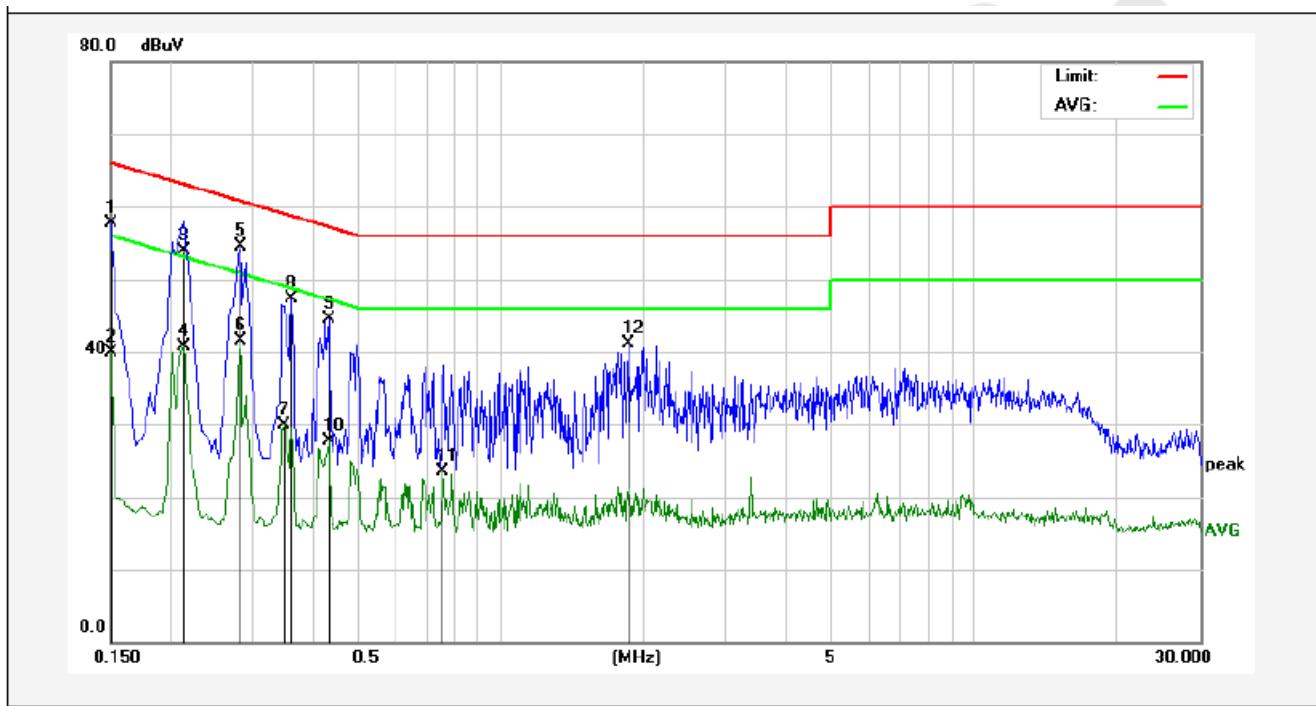

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.74	20.00	57.74	65.99	-8.25	QP	
2	0.1500	19.91	20.00	39.91	55.99	-16.08	AVG	
3	0.2140	33.87	20.00	53.87	63.04	-9.17	QP	
4	0.2140	20.75	20.00	40.75	53.04	-12.29	AVG	
5	0.2819	34.44	20.00	54.44	60.76	-6.32	QP	
6	0.2819	21.56	20.00	41.56	50.76	-9.20	AVG	
7	0.3500	9.94	20.00	29.94	48.96	-19.02	AVG	
8	0.3620	27.40	20.00	47.40	58.68	-11.28	QP	
9	0.4340	24.59	20.00	44.59	57.18	-12.59	QP	
10	0.4340	7.64	20.00	27.64	47.18	-19.54	AVG	
11	0.7580	3.59	20.00	23.59	46.00	-22.41	AVG	
12	1.8660	21.04	20.00	41.04	56.00	-14.96	QP	

CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:24°C Hum.:49%

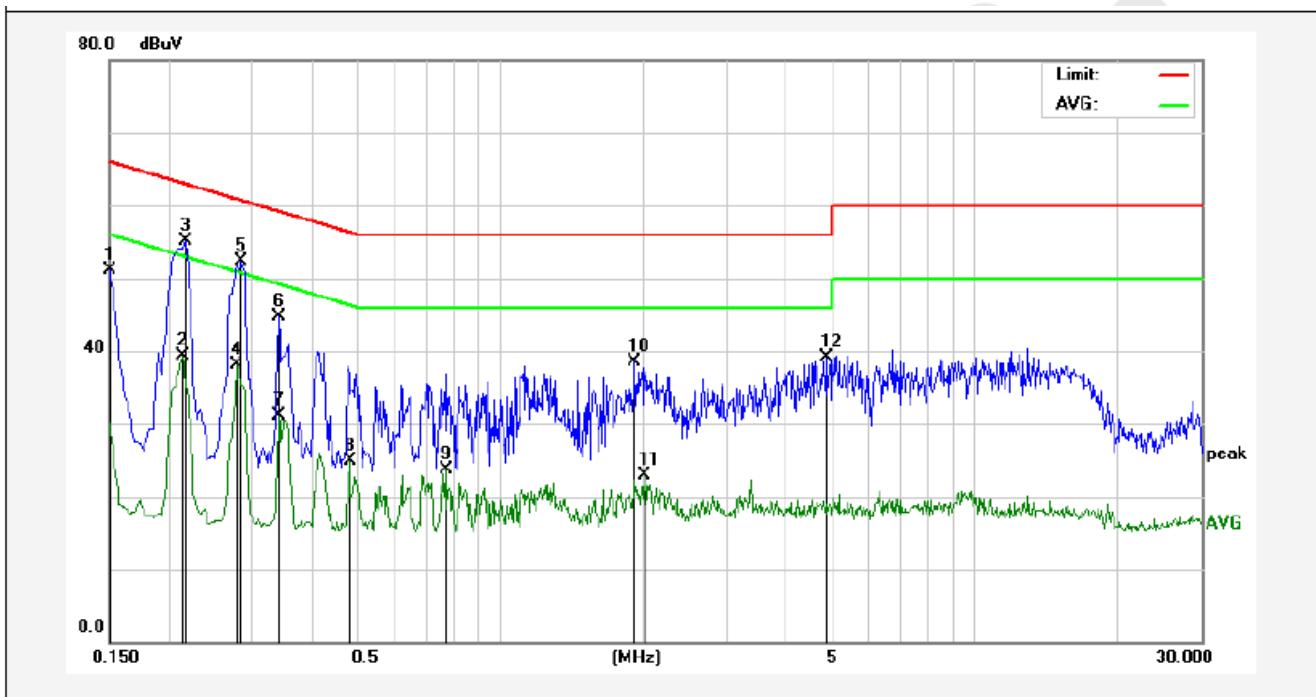

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	31.04	20.00	51.04	65.99	-14.95	QP	
2	0.2140	19.28	20.00	39.28	53.04	-13.76	AVG	
3	0.2180	35.19	20.00	55.19	62.89	-7.70	QP	
4	0.2779	18.13	20.00	38.13	50.88	-12.75	AVG	
5	0.2860	32.24	20.00	52.24	60.64	-8.40	QP	
6	0.3420	24.61	20.00	44.61	59.15	-14.54	QP	
7	0.3420	11.02	20.00	31.02	49.15	-18.13	AVG	
8	0.4820	4.82	20.00	24.82	46.30	-21.48	AVG	
9	0.7700	3.67	20.00	23.67	46.00	-22.33	AVG	
10	1.9220	18.55	20.00	38.55	56.00	-17.45	QP	
11	2.0140	2.92	20.00	22.92	46.00	-23.08	AVG	
12	4.8700	19.04	20.00	39.04	56.00	-16.96	QP	

CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.:24°C Hum.:49%

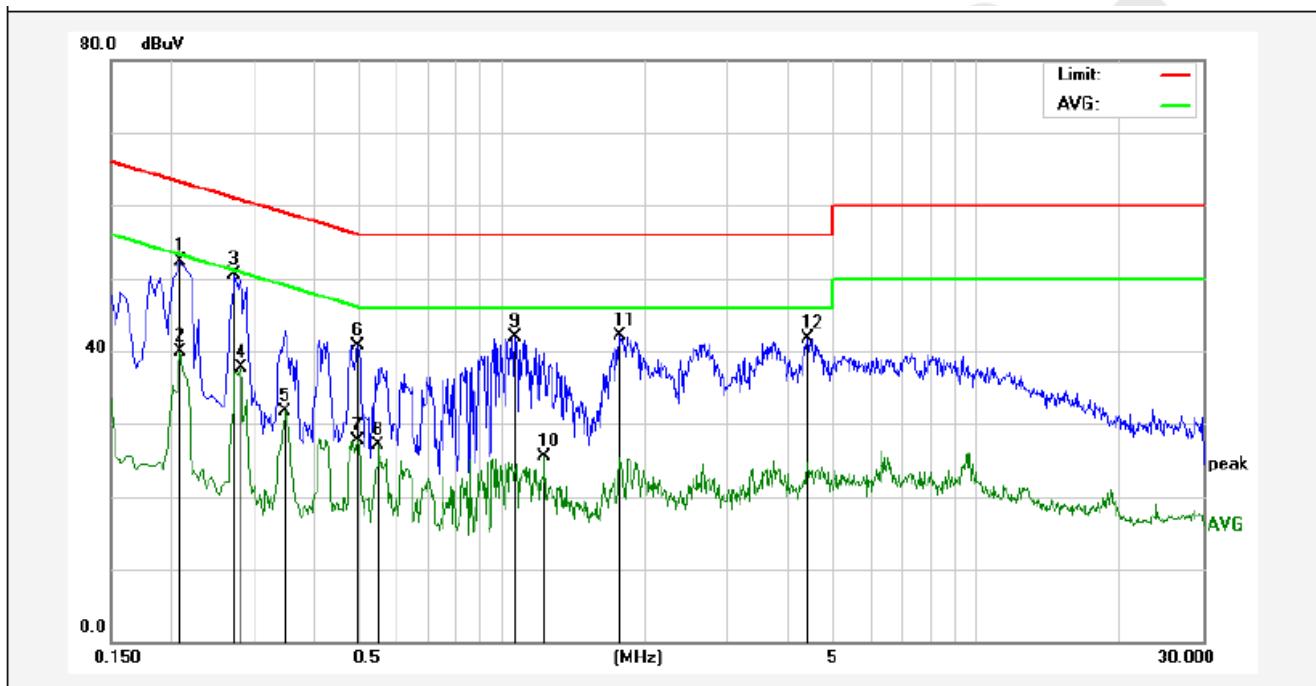

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2100	32.29	20.00	52.29	63.20	-10.91	QP	
2	0.2100	19.95	20.00	39.95	53.20	-13.25	AVG	
3	0.2740	30.53	20.00	50.53	60.99	-10.46	QP	
4	0.2819	17.65	20.00	37.65	50.76	-13.11	AVG	
5	0.3500	11.65	20.00	31.65	48.96	-17.31	AVG	
6	0.4980	20.64	20.00	40.64	56.03	-15.39	QP	
7	0.4980	7.67	20.00	27.67	46.03	-18.36	AVG	
8	0.5500	7.01	20.00	27.01	46.00	-18.99	AVG	
9	1.0700	21.81	20.00	41.81	56.00	-14.19	QP	
10	1.2340	5.54	20.00	25.54	46.00	-20.46	AVG	
11	1.7780	22.15	20.00	42.15	56.00	-13.85	QP	
12	4.4260	21.78	20.00	41.78	56.00	-14.22	QP	

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:24°C Hum.:49%

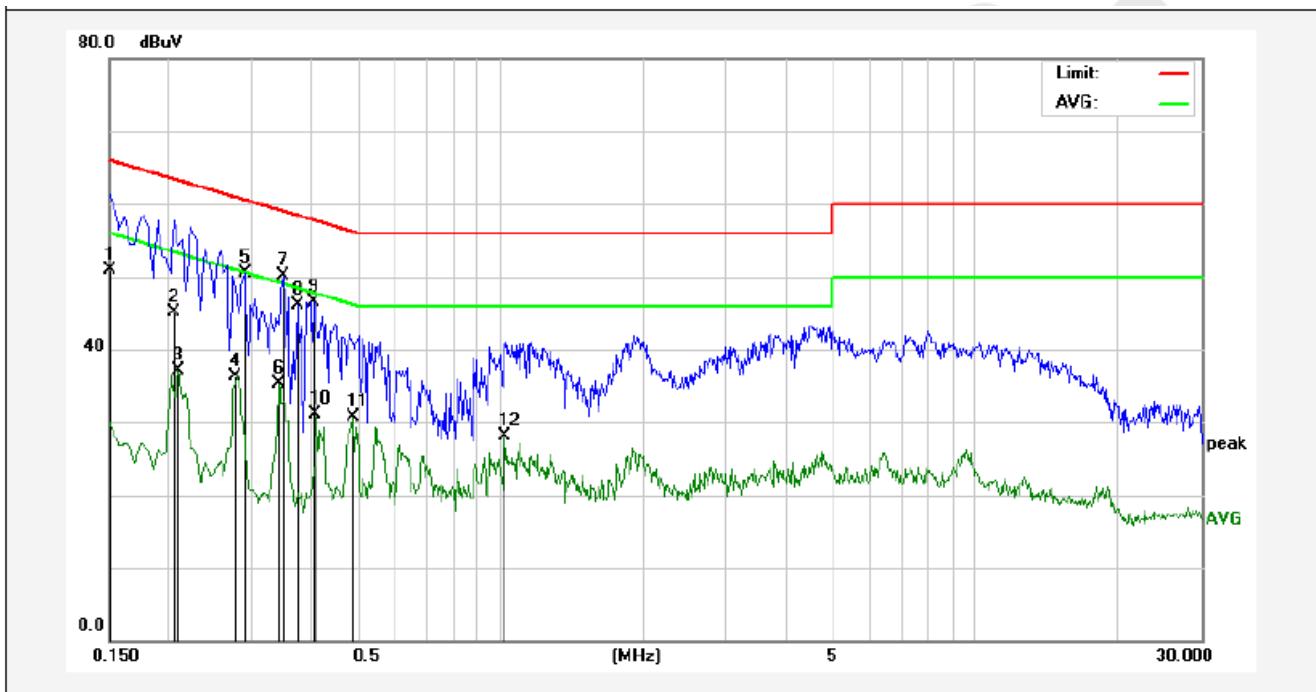

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	30.81	20.00	50.81	65.99	-15.18	QP	
2	0.2060	25.20	20.00	45.20	63.36	-18.16	QP	
3	0.2100	17.17	20.00	37.17	53.20	-16.03	AVG	
4	0.2779	16.23	20.00	36.23	50.88	-14.65	AVG	
5	0.2900	30.51	20.00	50.51	60.52	-10.01	QP	
6	0.3420	15.26	20.00	35.26	49.15	-13.89	AVG	
7	0.3500	30.18	20.00	50.18	58.96	-8.78	QP	
8	0.3740	26.17	20.00	46.17	58.41	-12.24	QP	
9	0.4060	26.53	20.00	46.53	57.73	-11.20	QP	
10	0.4100	11.05	20.00	31.05	47.65	-16.60	AVG	
11	0.4900	10.74	20.00	30.74	46.17	-15.43	AVG	
12	1.0220	8.07	20.00	28.07	46.00	-17.93	AVG	

4. Test Procedure

JUSTIFICATION

ANSI C63.10 2013 section 12.1.4.1 requires that hand-held or body-worn devices shall include rotation of the EUT through three orthogonal axes to determine the attitude that maximizes the emissions. The EUT is a hand-held device. As such, preliminary tests were performed to determine the orientation that produced the highest level of emissions. This was with the DUT orientated vertically as shown in Section 7.1.

GENERAL:

This report shall NOT be reproduced except in full without the written approval of Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.10-2013 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33.20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.10-2013 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

5. Radiation Interference

5.1. Requirements (15.231):

According to 15.231(b), the field strength of emissions from Intentional Radiators operated under this section shall not exceed the following:

5.2. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.
For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

5.3. Test Results

PASS.

The test data please refer the following pages. Only the worst case (x orientation).

Data:

Horizontal

Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB	
291.03	1.47	12.35	41.77	58.41	30.46	46.00	-15.54	QP
433.92	1.51	12.53	41.33	94.23	66.94	100.82	-33.88	PK
867.88	1.64	13.33	41.42	75.24	48.79	80.82	-32.03	PK
**1301.82	2.36	18.56	39.95	63.08	44.05	74.00	-29.95	PK
1735.76	3.00	21.32	38.30	60.38	46.40	80.82	-34.42	PK
2169.68	3.10	24.05	38.41	58.47	47.21	80.82	-33.61	PK
2603.60	3.11	25.75	38.82	53.98	44.02	80.82	-36.80	PK
3037.52	---	---	---	---	---	---	---	---
3471.44	---	---	---	---	---	---	---	---
**3905.36	---	---	---	---	---	---	---	---
4339.28	---	---	---	---	---	---	---	---
	---	---	---	---	---	---	---	---

Duty Cycle= 0.2455 AV Factor = -12.19 dB

AV= PK+AV Factor

Frequency	PK Level	AV Factor	AV Level	Limit	Over Limit	Remark
MHz	dB μ V/m	dB	dB μ V/m	dB μ V/m	dB	
433.92	66.94	-12.19	54.75	80.82	-26.07	AV
867.84	48.79	-12.19	36.60	60.82	-24.22	AV
**1301.76	44.05	-12.19	31.86	54.00	-22.14	AV
1735.68	46.40	-12.19	34.21	60.82	-26.61	AV
2169.62	47.21	-12.19	35.02	60.82	-25.80	AV
2603.52	44.02	-12.19	31.83	60.82	-28.99	AV

NOTE: 1. All values measured above 1GHz are recorded as Peak and Average values.

2. “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. “**” in the table above means the restricted band.

4. Pulse Desensitization Correction Factor

Pulse Width (PW)= 0.345ms

2/PW=2/0.345=5.80kHz

RBW(100kHz)> 2/PW (5.80kHz)

Therefore PDCF is not needed.

Vertical

Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB	
52.94	0.85	9.47	43.68	60.52	27.16	40.00	-12.84	QP
433.92	1.51	12.53	41.33	96.39	69.10	100.82	-31.72	PK
867.88	1.64	13.33	41.42	83.45	57.00	80.82	-23.82	PK
**1301.75	2.36	18.56	39.95	60.48	41.45	74.00	-32.55	PK
1735.60	3.00	21.32	38.30	70.96	56.98	80.82	-23.84	PK
2169.63	3.10	24.05	38.41	66.13	54.87	80.82	-25.95	PK
2603.52	3.11	25.75	38.82	60.25	50.29	80.82	-30.53	PK
3037.44	---	---	---	---	---	---	---	
3471.39	---	---	---	---	---	---	---	
**3905.18	---	---	---	---	---	---	---	
4339.20	---	---	---	---	---	---	---	

Duty Cycle= 0.2455 AV Factor = -12.19 dB

AV= PK+AV Factor

Frequency	PK	AV Factor	Level	Limit	Over Limit	Remark
MHz	dB	dB	dB μ V/m	dB μ V/m	dB	
433.92	69.10	-12.19	56.91	80.82	-23.91	AV
867.88	57.00	-12.19	44.81	60.82	-16.01	AV
**1301.75	41.45	-12.19	29.26	54.00	-24.74	AV
1735.60	56.98	-12.19	44.79	60.82	-16.03	AV
2169.63	54.87	-12.19	42.68	60.82	-18.14	AV
2603.52	50.29	-12.19	38.10	60.82	-22.72	AV

NOTE: 1. All values measured above 1GHz are recorded as Peak and Average values.

2. “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. “**” in the table above means the restricted band.

4. Pulse Desensitization Correction Factor

Pulse Width (PW)= 0.345ms

2/PW=2/0.345=5.80kHz

RBW(100kHz)> 2/PW (5.80kHz)

Therefore PDCF is not needed.

6. 20dB Bandwidth

6.1. Requirements (15.231):

In accordance with Part15.231(c), the fundamental frequency bandwidth was kept within 0.25% of the center frequency for devices operating >70MHz and <900MHz.

Fundamental Frequency (MHz)	Limit of 20dB Bandwidth (kHz)
433.92	433920x0.0025=1084.8

6.2. EUT Setup

The radiated emission tests were performed in the in the 3m Semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013.


The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

6.3. Test Results

Pass.

Please refer the following plot.

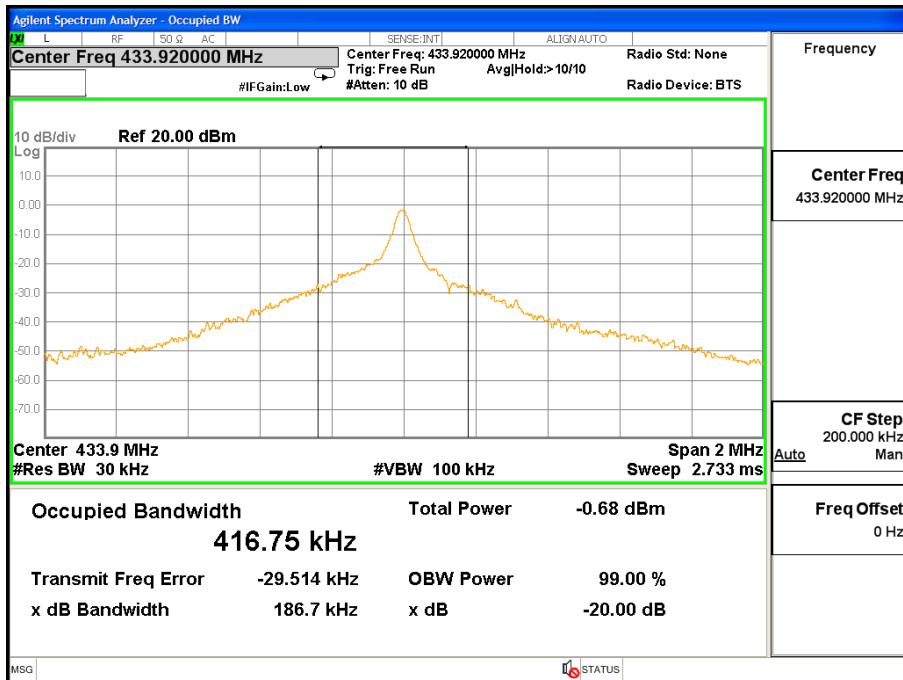

7. DUTY CYCLE

7.1. EUT Setup

The radiated emission tests were performed in the in the 3m Semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013.

The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

7.2. Test Procedure

The EUT was placed on a turntable which is 0.8m above ground plane.

Set EUT operating in continuous transmitting mode

Set Test Receiver into spectrum analyzer mode, Tune the spectrum analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth(RBW) to 100kHz and video bandwidth(VBW) to 100kHz, Span was set to 0Hz.

The Duty Cycle was measured and recorded.

7.3. Requirements & Result

1. Regulation 15.231(a) The provisions of this Section are restricted to periodic operation within the band 40.66 -40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted.

Result:

The EUT is a remote switch without audio or video transmitted.

The EUT meets the requirements of this section.

2. Regulation 15.231(a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

The lasting time of EUT is 0.358ms after being released.

$$T_{on}=0.358\text{ms}$$

$$T_{on+off}=(1.586-0.128)=1.458\text{ms}$$

$$\text{Duty Cycle} = T_{on}/T_{on+off} = 0.358/1.458 = 0.2455$$

$$\text{Duty Cycle Factor} = 20\log(\text{Duty Cycle}) = -12.19 \text{ dB}$$

Test plots see following pages.

The EUT meets the requirements of this section.



3. Regulation 15.231(a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT doesn't have automatic transmission.

4. Regulation 15.231(a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than one seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed one seconds per hour.

Result:

The EUT doesn't employ periodic transmission.

5. Regulation 15.231(a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.

The results: The unit does meet the FCC PART 15 C Section 15.231 requirements.

8. Antenna Application

8.1. Antenna Requirement

The EUT'S antenna should meet the requirement of FCC part 15C section 15.203.


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- 1) Antenna must be permanently attached to device.
- 2) The antenna must use a unique type of connector to attach to the device.
- 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

8.2. Result

The EUT's antenna used a Integrated antenna which is permanently attached, The antenna's gain is 2dBi and meets the requirement.

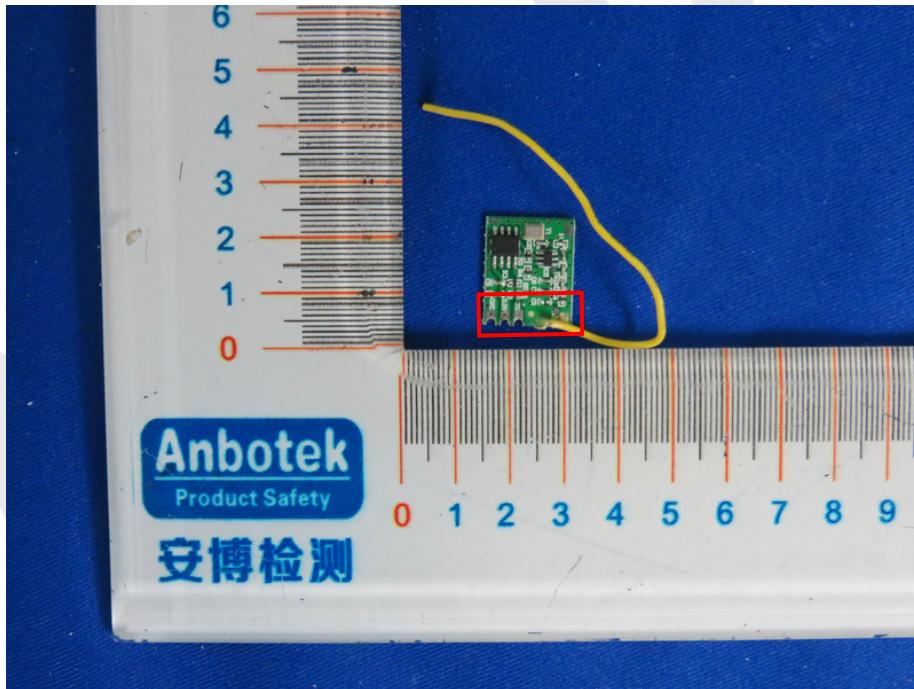



9. TEST PHOTO

9.1. Photo of Conducted Emission Measurement



9.2. Photo of Radiation Emission Test

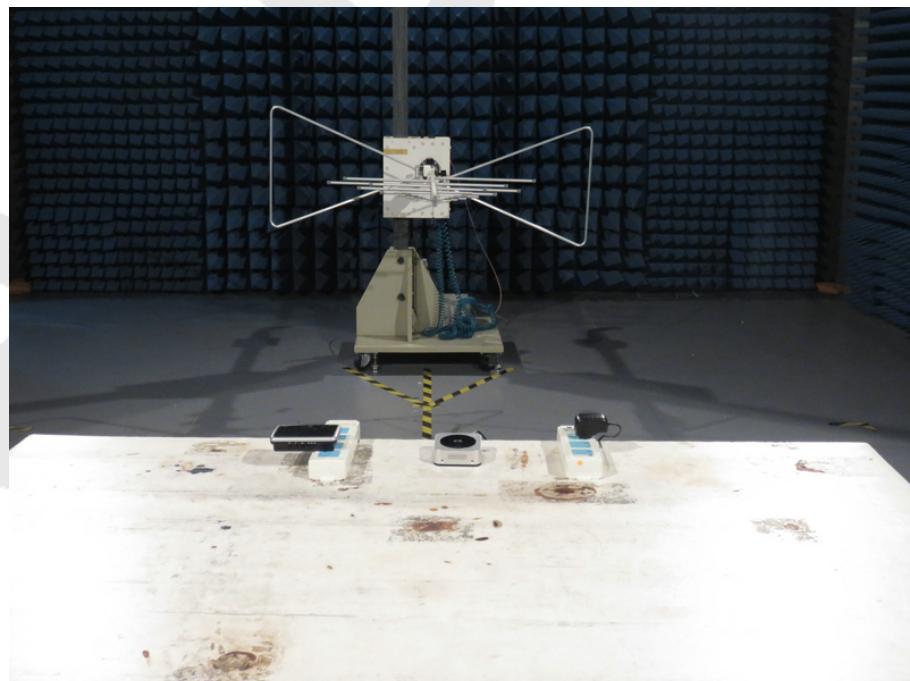

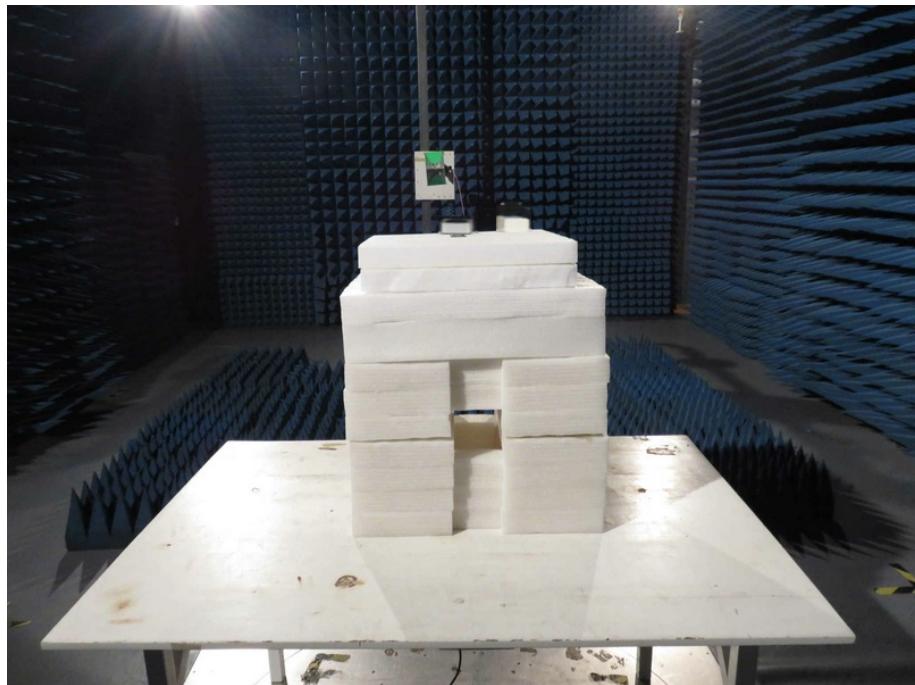

Anbotek

APPENDIX I (EXTERNAL PHOTOS)


1. Figure

The EUT-Overall View



2. Figure

The EUT-Top View

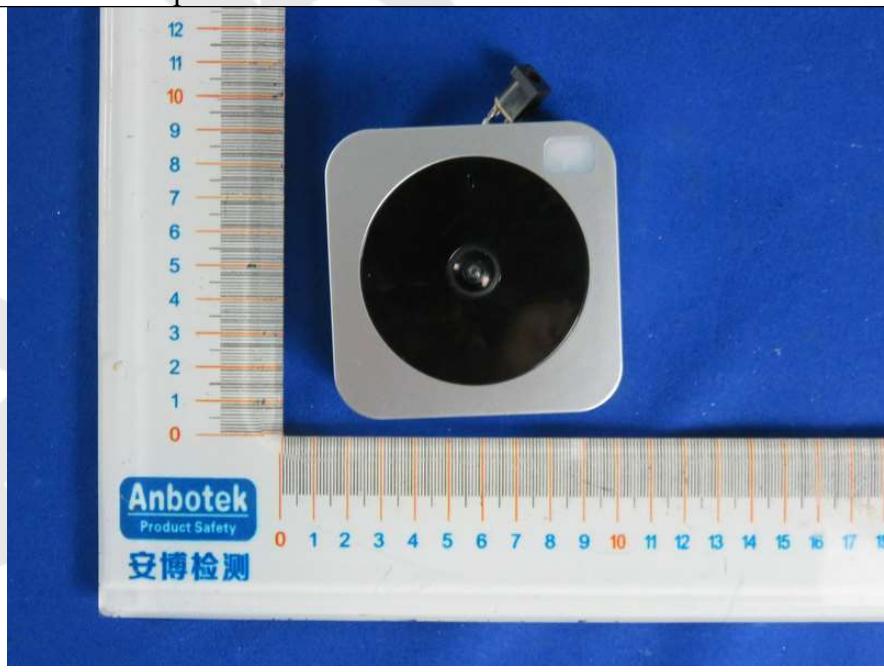


3. Figure

The EUT-Bottom View




4. Figure

The EUT-Front View

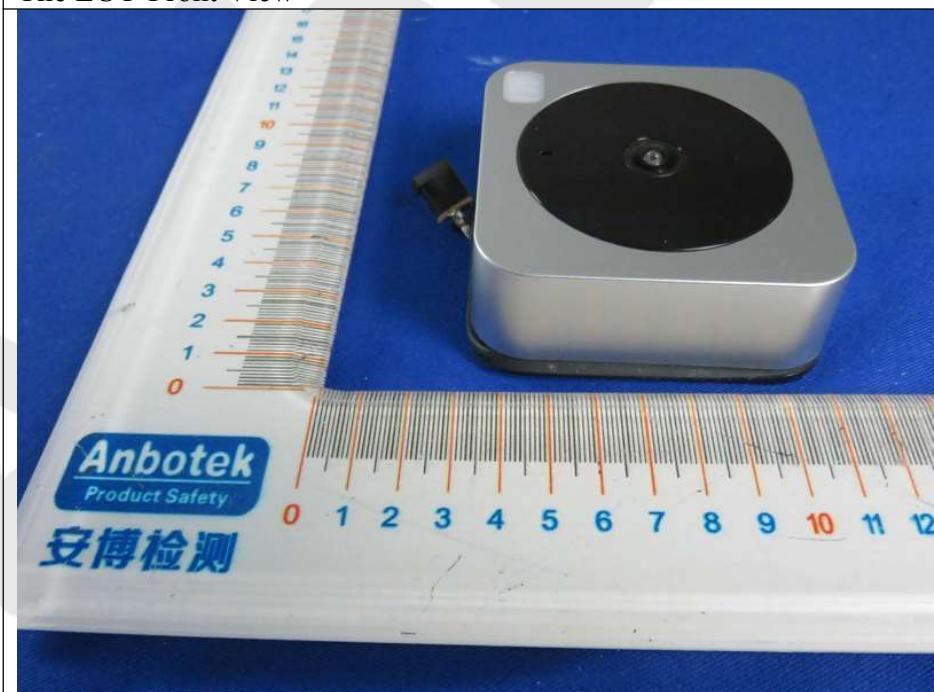


5. Figure

The EUT-Back View

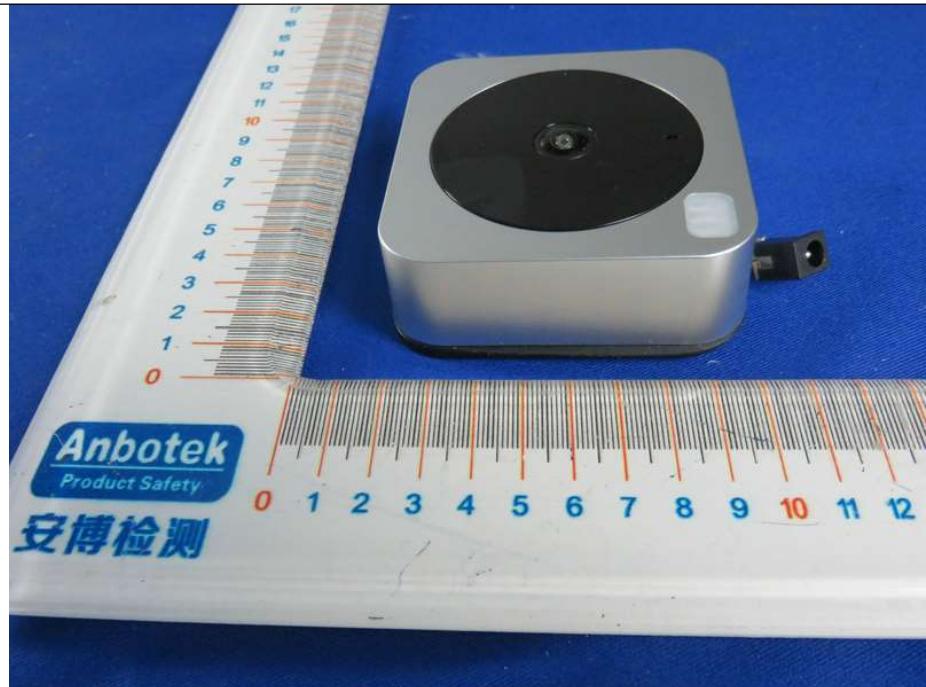


6. Figure

The EUT-Right View

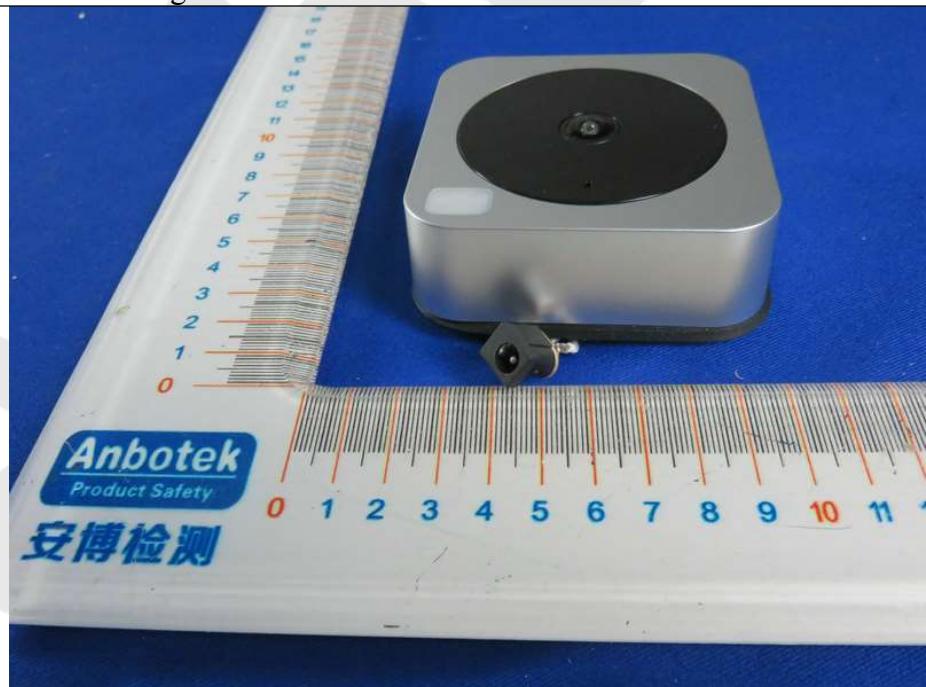


7. Figure
The EUT-Left View

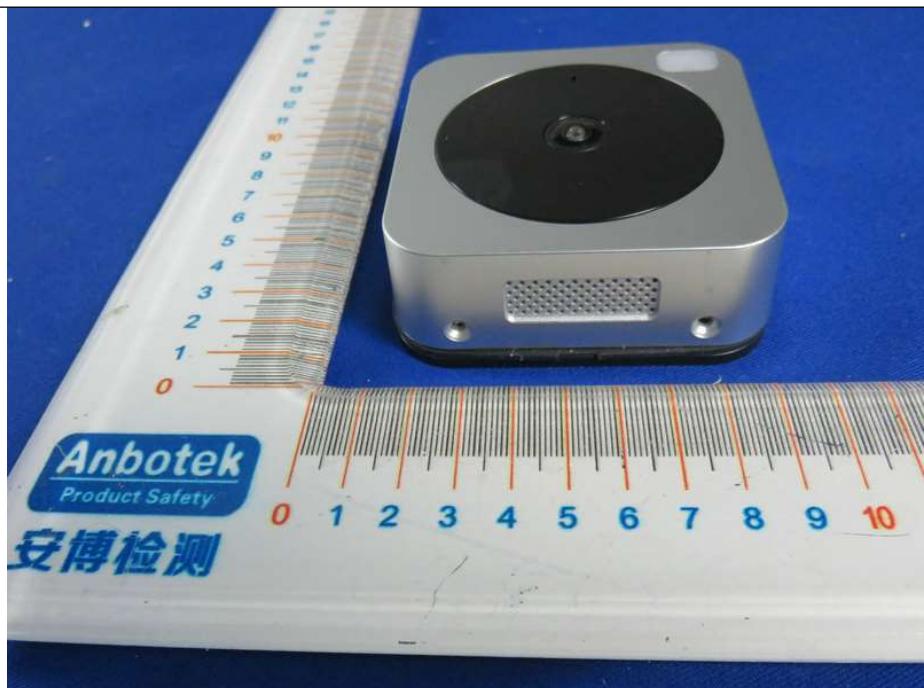

APPENDIX II (INTERNAL PHOTOS)

1. Figure

The EUT-Inside View

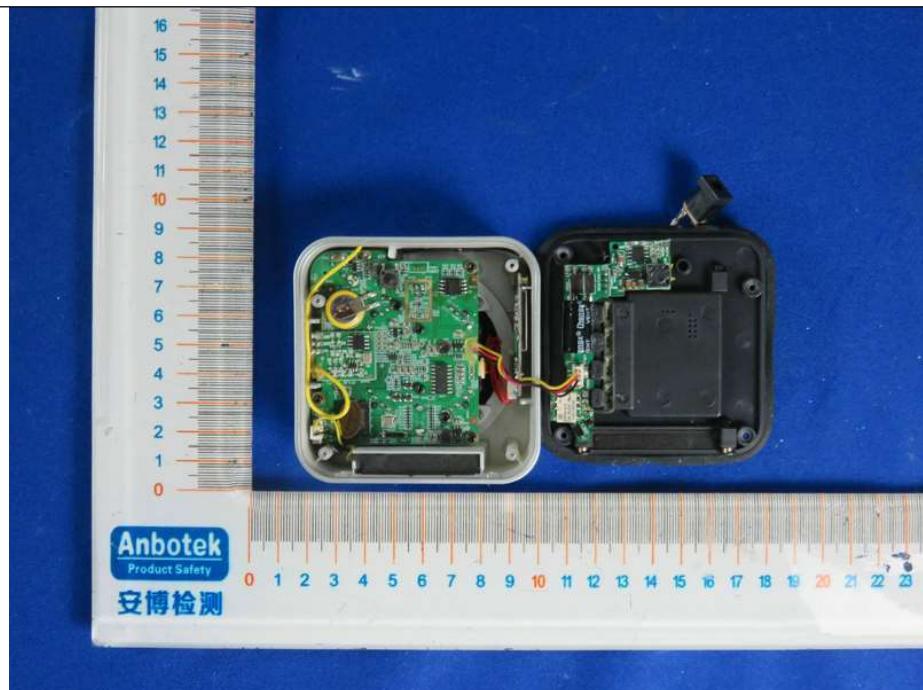


2. Figure


The EUT-Inside View




3. Figure
PCB of the EUT-Front View

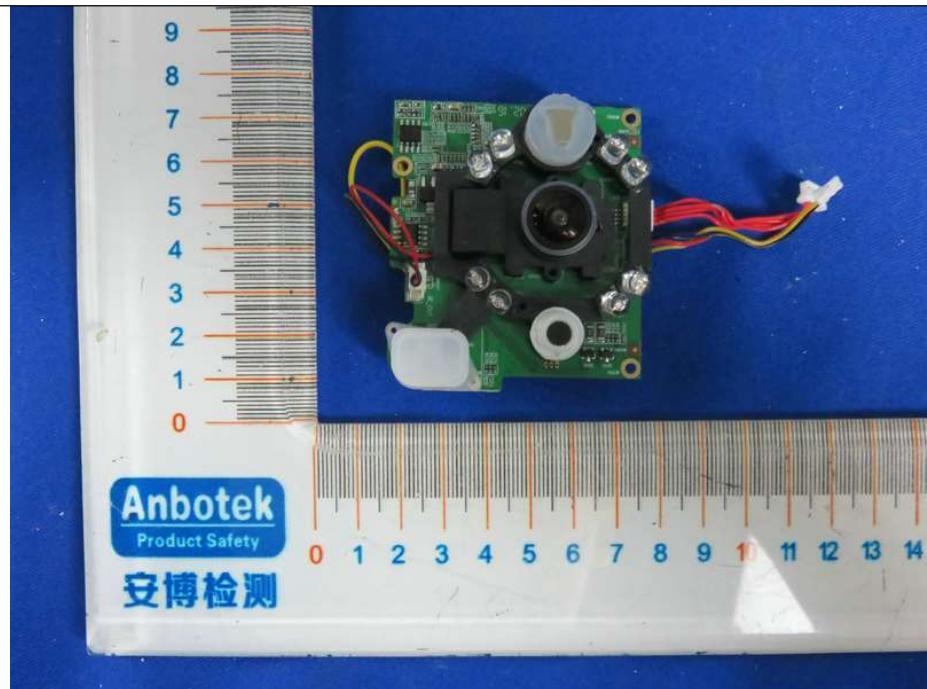

4. Figure
PCB of the EUT-Back View

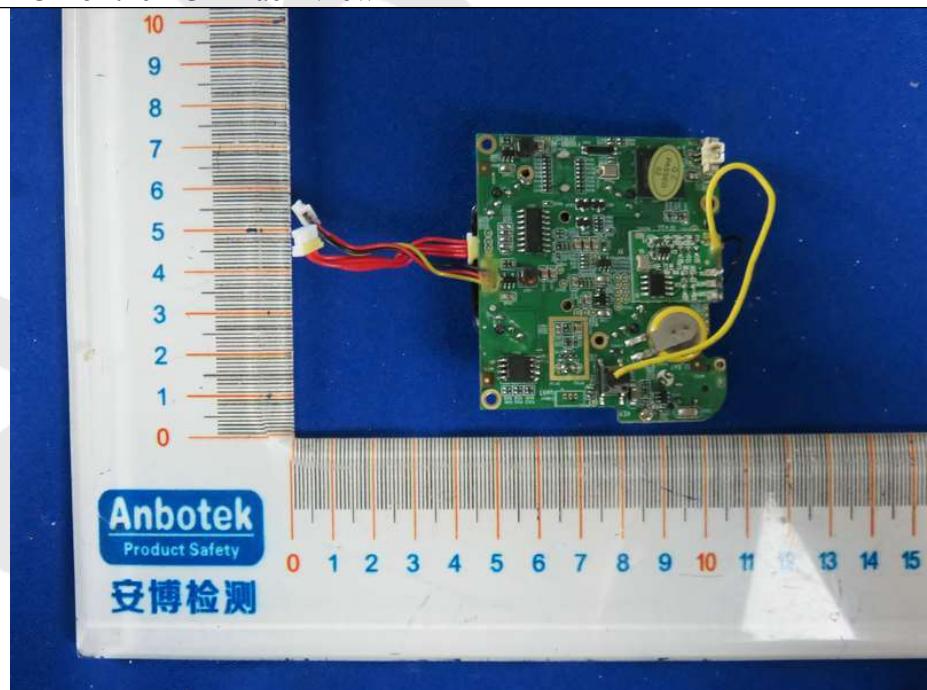


5. Figure
PCB of the EUT-Front View

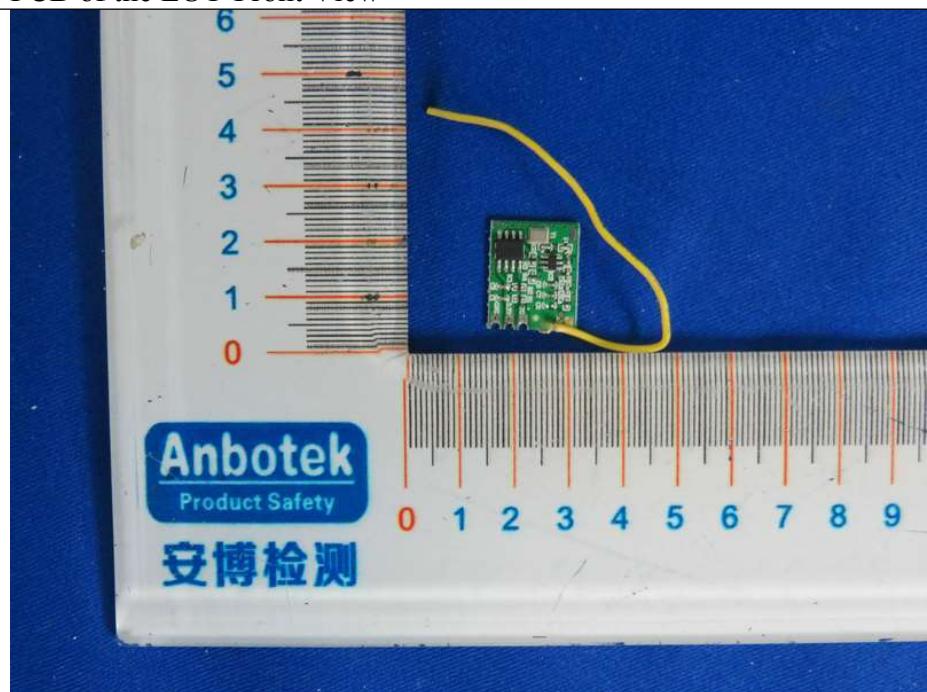


6. Figure
PCB of the EUT-Back View



7. Figure
PCB of the EUT-Front View

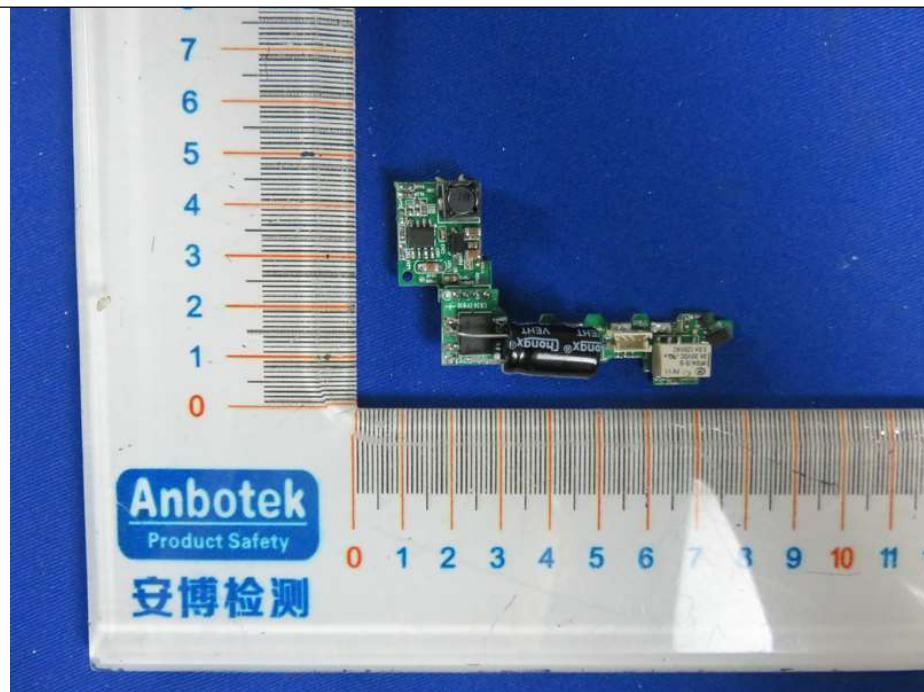


8. Figure
PCB of the EUT-Back View

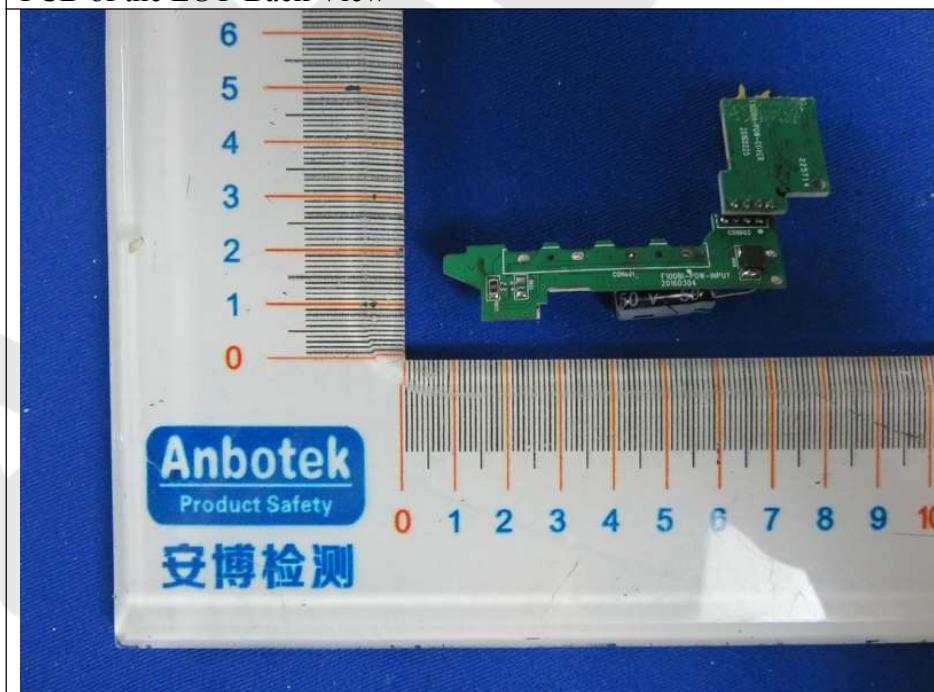


9. Figure
PCB of the EUT-Front View



10. Figure
PCB of the EUT-Back View

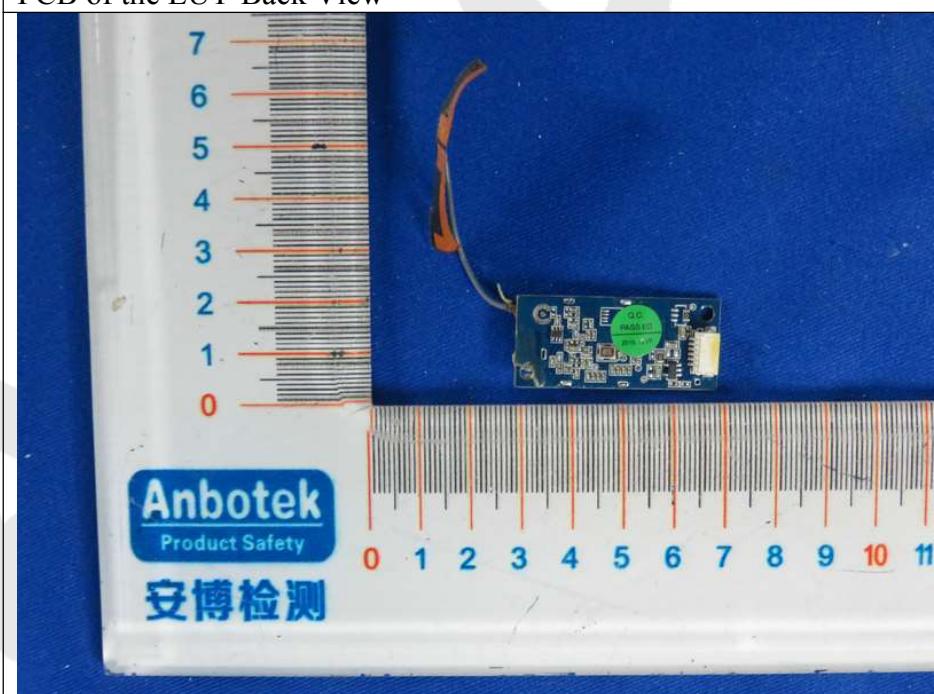

11. Figure
PCB of the RF board-Front View

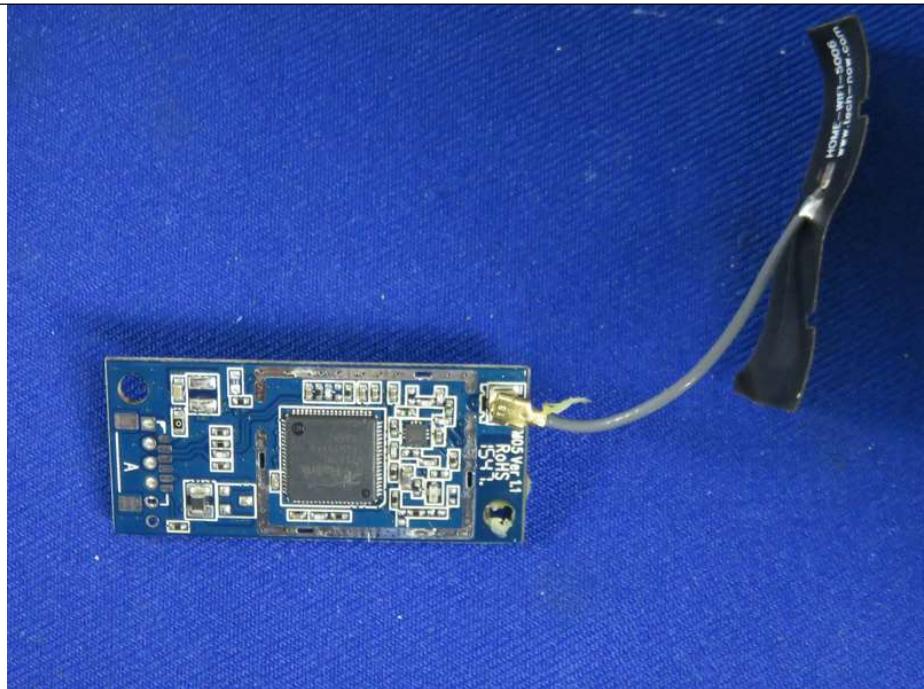

12. Figure
PCB of the RF board-Back View

