



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC 47CFR part 15 subpart C § 15.209 and
RSS-210 issue 8 section 2.5.1**

FOR:

**LogiTag Systems Ltd.
One Channel Exciter
Model: LTG2-04
Single Location Unit
Model: LTG2-04-PRF
FCC ID:Z97LTG2-04**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Changes made in the EUT	5
6.4	Test configuration.....	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements.....	7
7.1	Field strength of emissions with internal antenna.....	7
7.2	Field strength of emissions with external Door Antenna.....	16
7.3	Field strength of emissions with external Ceiling Antenna	25
7.4	Occupied bandwidth test.....	34
7.5	Conducted emissions.....	37
7.6	Antenna requirements	40
8	APPENDIX A Test equipment and ancillaries used for tests.....	41
9	APPENDIX B Measurement uncertainties.....	42
10	APPENDIX C Test laboratory description	43
11	APPENDIX D Specification references	43
12	APPENDIX E Test equipment correction factors.....	44
13	APPENDIX F Abbreviations and acronyms.....	50
14	APPENDIX G Manufacturer's declaration of identity	51

1 Applicant information

Client name: LogiTag Systems Ltd.
Address: 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel
Telephone: +972 9835 4848
Fax: +972 9865 6262
E-mail: golank@Logi-tag.com
Contact name: Mr. Golan Kormian

2 Equipment under test attributes

Product name: One Channel Exciter
Model: LTG2-04
Serial number: LTG2-04-1312-078
Hardware version: C01
Software release: V2.00
Receipt date 17-Apr-14

3 Manufacturer information

Manufacturer name: LogiTag Systems Ltd.
Address: 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel
Telephone: +972 9835 4848
Fax: +972 9865 6262
E-Mail: golank@Logi-tag.com
Contact name: Mr. Golan Kormian

4 Test details

Project ID: 25494
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 17-Apr-14
Test completed: 09-May-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.209;
RSS-210 issue 8 section 2.5.1, RSS-Gen issue 3 Table 6



5 Tests summary

Test	Status
FCC section 15.209, RSS-Gen section 7.2.5, Field strength of emissions	Pass
FCC section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission	Pass
FCC section 15.203, RSS-Gen section 7.1.2, Antenna requirement	Pass
RSS-Gen, Section 4.6.1, Occupied bandwidth	Tested

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer Mr. V. Einem, test engineer	May 9, 2014	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	May 21, 2014	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 2, 2014	

6 EUT description

6.1 General information

The EUT, One Channel Exciter, has 2 main functions:

- To generate RF field at 125 kHz. The One Channel Exciter carries a unique number as identifier to the location/area where the RF field is operated.
- To communicate with RFID tags and a Base Station unit

The Exciter is a system which generates the RF field at 125 kHz, when RFID tag is within the range of the field, the tag is awaked and communicates with the Exciter via wireless transmitter at frequency of 433 MHz.

The Exciter communicates with the Base Station unit wireless at UHF frequency (902-928 MHz). The Exciter has an internal 125 kHz antenna, and has option to connect to external LF antenna (Ceiling or Door antenna). Only one antenna can transmit.

The EUT has the following features/ports:

- 1) The 125 kHz antenna driver outputs, 3 kinds of antennas: integrated, Ceiling and Door;
- 2) Transceivers
 - a) Tx/Rx with a base station in 902-928 MHz (UHF4)
 - b) Tx/Rx with a tamper tag at 433 MHz (UHF3)
 - c) Tx to tag at 433 MHz (UHF1)
 - d) Rx from tag at 433 MHz (UHF2);
- 3) General use relay;
- 4) USB ports;
- 5) Digital input.

According to manufacturer's declaration of identity provided in Appendix G of the test report, both One Channel Exciter, model LTG2-04 and Single Location Unit, model LTG2-04-PRF are electronically/electrically/mechanically identical and have only different design of Led lexan and different cover shape. That is why only model LTG2-04 was tested.

The present test report involves the test results for certification of 125 kHz transmitters as a part of a composite application for certification.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adapter	1	Unshielded	1.5
Power	DC	AC/DC adapter	EUT	1	Unshielded	3
Control	Input	EUT	Open circuit	1	Unshielded	3
Control	Relay	EUT	Open circuit	1	Unshielded	3
Control	USB	EUT	No used	1	NA	NA
RF	Antenna	EUT	Antenna	4	NA	NA
RF	LF	EUT	Antenna	1	Unshielded	3

6.3 Changes made in the EUT


To withstand the standard requirements the following changes were implemented in the EUT:

- 1) an inductor of 68 μ H was installed instead of L4;
- 2) a 10 μ F/50 V capacitor was added between pins of J5;
- 3) a 1nF/250 V capacitor was added between the following pins:
 - J8 pin 1 to J1 pin 2
 - J8 pin 2 to J1 pin 2
 - between pins of J1;
- 4) capacitors C150=1 μ F/25 V, C141=1 nF/50 V
- 5) a toroid p/n 5975004901 with 2x10 turns was connected between J5 and D13.

It is manufacturer responsibility to implement the change in the production version of the EUT. In any case the test report applies to the tested item only.



6.4 Test configuration

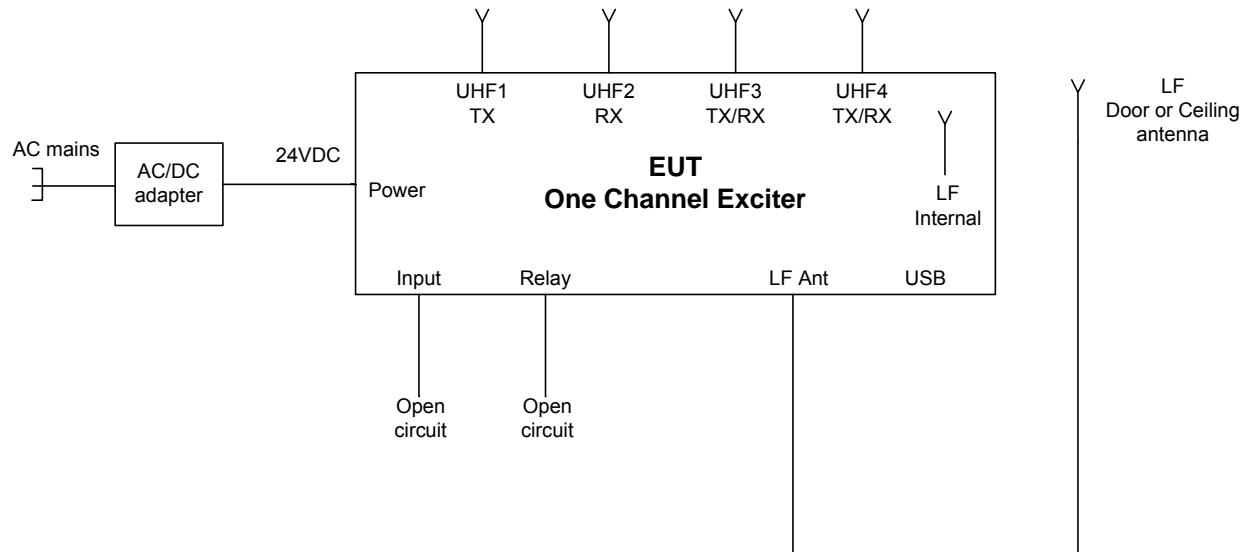



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks:	Internal antenna		

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

7.1 Field strength of emissions with internal antenna

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.1.1 and Table 7.1.2.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, kHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
125	125.69	105.69

Table 7.1.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 – 1000		54.0	
1000 – 10 th harmonic	74.0	NA	54.0

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log \left(\frac{S_1}{S_2} \right),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

7.1.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.3 and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.3 The worst test results (the lowest margins) were recorded in Table 7.1.4 and shown in the associated plots.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks:	Internal antenna		

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz


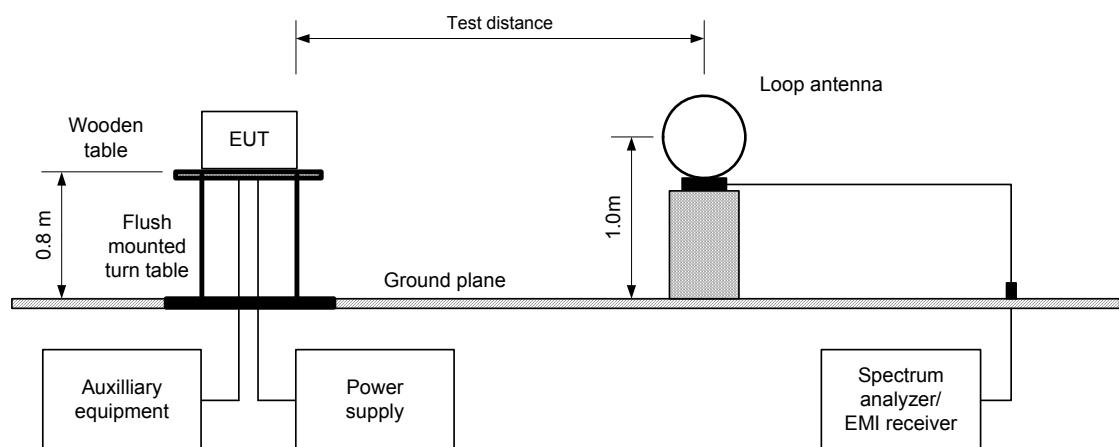


Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz



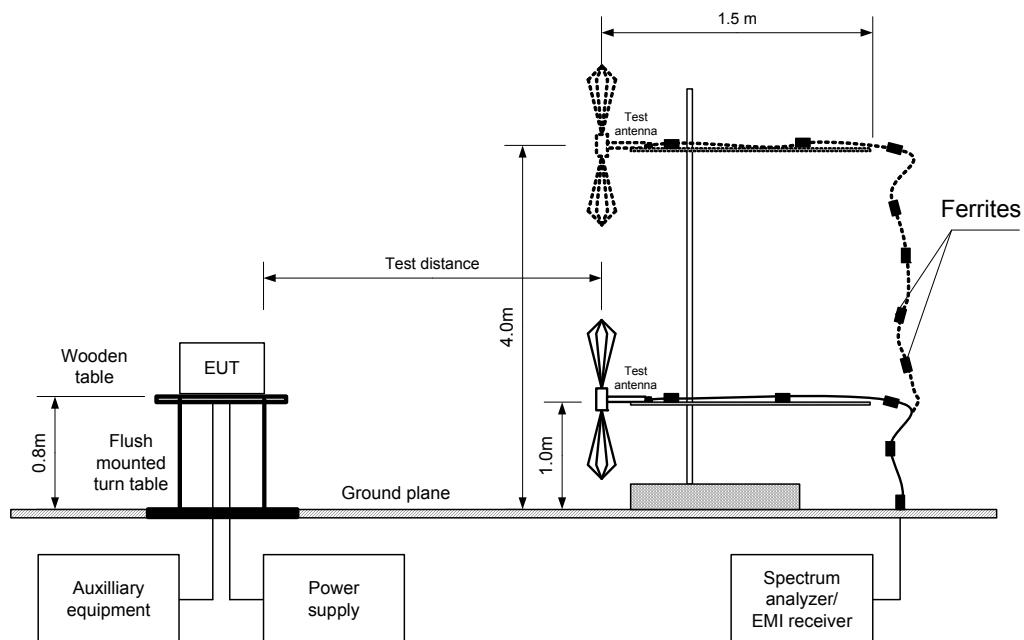

HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			

Table 7.1.3 Field strength of fundamental emission

TEST DISTANCE:	3 m
RF CHAIN:	Internal antenna
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical, Horizontal)
MODULATION:	ASK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz)

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
125.0	V	1.0	180	125.30	125.69	-0.39	100.7	105.69	-4.99	Pass

Note: The recorded value was obtained during measurements in the EUT vertical position.

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin (dB) = measured result - specification limit.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			

Table 7.1.4 Field strength of spurious emissions

TEST DISTANCE:	3 m
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical)
MODULATION:	ASK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
25.0	49.0	46.7	69.5	-22.8	V	1.0	270	Pass
480	35.5	34.0	46.0	-12.0	V	1.0	180	
188.2	34.4	32.0	43.5	-11.5	V	1.0	300	
215.0	34.2	32.2	43.5	-11.3	V	1.0	275	
59.98	30.3	25.8	40.0	-14.2	V	1.0	255	
300.0	40.6	39.5	46.0	-6.5	H	1.0	180	
240.0	36.1	34.8	46.0	-11.2	H	1.0	170	
205.7	30.4	29.1	43.5	-14.4	H	1.0	170	

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
150	V	1.0	250	80.5	124.1	-43.6	70.7	104.1	-33.4	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			

Table 7.1.5 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.1.6 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			

Plot 7.1.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

EUT POSITION: Typical (Vertical)



FREQ 125.0 kHz
PEAK 125.3 dB μ V/m
OP NOT SELECTED
AVO 100.7 dB μ V/m

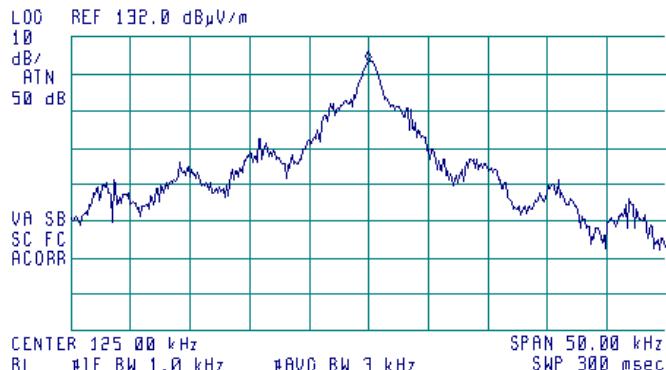

Plot 7.1.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

EUT POSITION: Typical (Horizontal)



FREQ 125.3 kHz
PEAK 108.2 dB μ V/m
OP NOT SELECTED
AVO 83.7 dB μ V/m

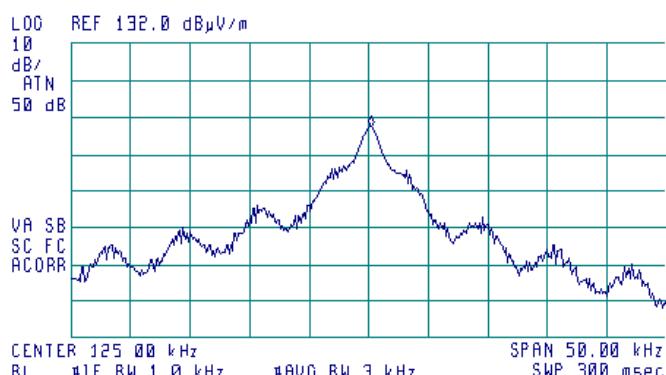



HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			


Plot 7.1.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 115%Unom

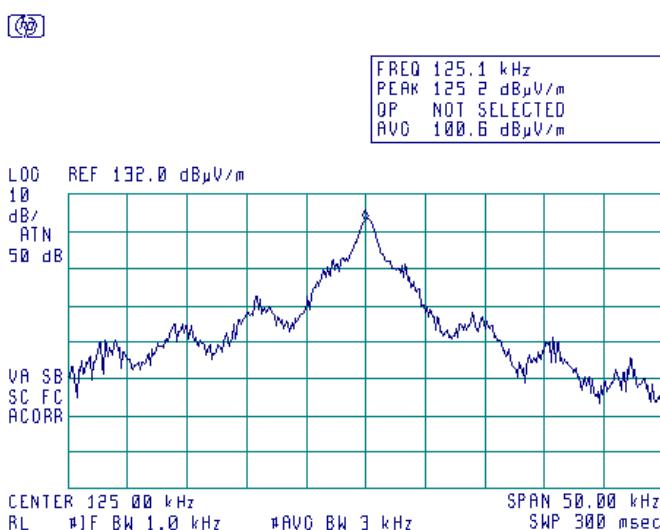

Plot 7.1.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 85%Unom

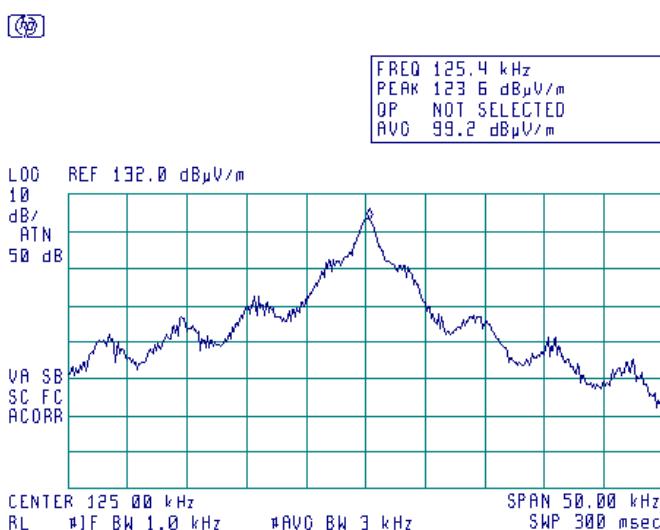



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks: Internal antenna			

Plot 7.1.5 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 123.8 kHz
119.34 dB μ V/m

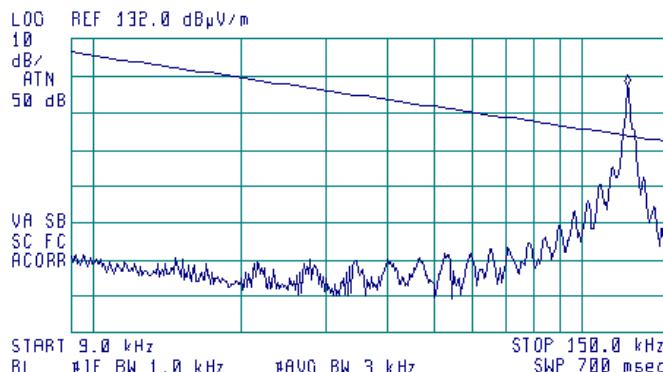

Plot 7.1.6 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
77.34 dB μ V/m

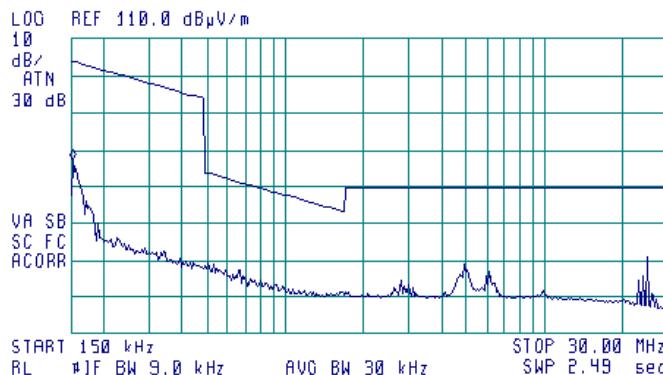



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Apr-14 - 01-May-14		
Temperature: 25 °C	Air Pressure: 1020 hPa	Relative Humidity: 45 %	Power Supply: 24 VDC
Remarks:	Internal antenna		

Plot 7.1.7 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 478.7 MHz
33.76 dB μ V/m

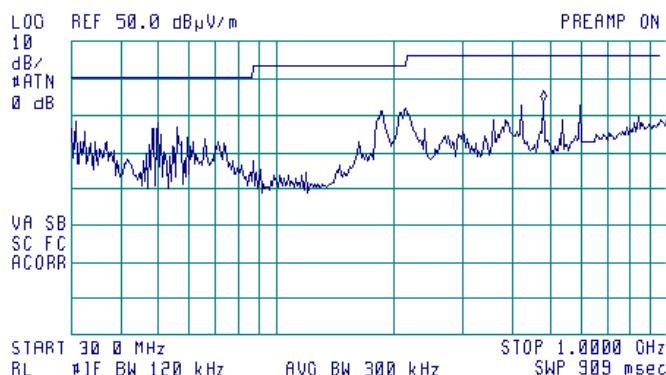

Plot 7.1.8 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Horizontal

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 297.9 MHz
37.35 dB μ V/m

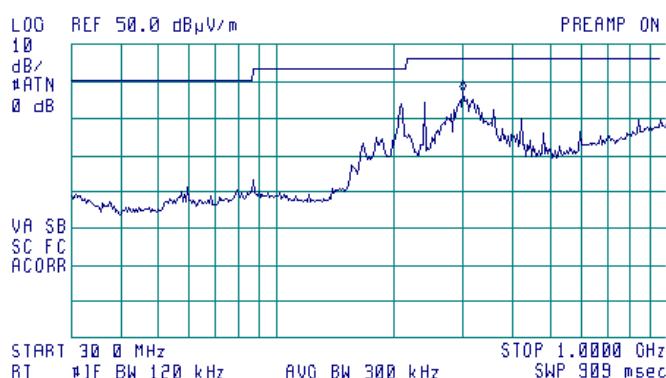



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			

7.2 Field strength of emissions with external Door Antenna

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, kHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
125	125.69	105.69

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 – 1000		54.0	
1000 – 10 th harmonic	74.0	NA	54.0

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

7.2.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.4 and shown in the associated plots.



HERMON LABORATORIES

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz


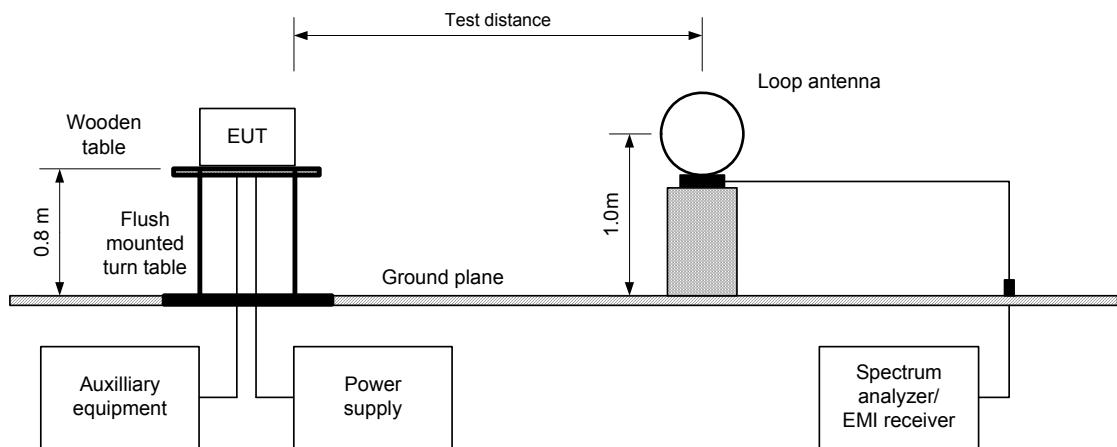


Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz



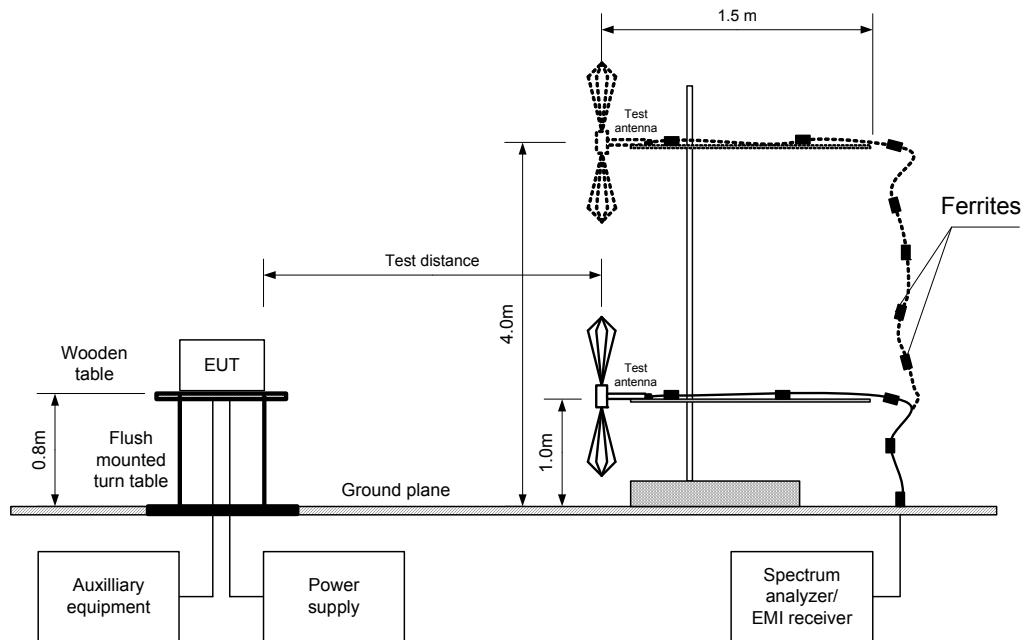

HERMON LABORATORIES

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			

Table 7.2.3 Field strength of fundamental emission

TEST DISTANCE:	3 m
RF CHAIN:	External Door Antenna
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical, Horizontal)
MODULATION:	ASK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz)

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
124.9	V	1.0	10	114.8	125.69	-10.89	89.9	105.69	-15.79	Pass

Note: The recorded value was obtained during measurements in the EUT vertical position.

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin (dB) = measured result - specification limit.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			

Table 7.2.4 Field strength of spurious emissions

TEST DISTANCE:	3 m
RF CHAIN:	External Door antenna
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical)
MODULATION:	ASK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
39.0050	38.73	35.67	40.0	-4.33	V	1.0	126	Pass
41.0035	35.50	33.26	40.0	-6.74	V	1.0	283	
240.0130	37.20	35.20	46.0	-10.8	V	1.0	54	
480.0113	33.69	31.61	46.0	-14.39	V	1.0	301	
840.0000	36.20	33.49	46.0	-12.51	V	1.1	31	
300.0053	39.10	37.12	46.0	-8.88	H	1.3	202	

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
155.1	V	1	355	91.1	123.82	-32.72	52.8	103.82	-51.02	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance			Verdict:	PASS
Date(s):	08-May-14 - 09-May-14				
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %		Power Supply: 24 VDC	
Remarks: External Door Antenna					

Table 7.2.5 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.6 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)



FREQ 125.3 kHz
PEAK 113.9 dB μ V/m
OP NOT SELECTED
AVO 89.0 dB μ V/m




Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)



FREQ 125.2 kHz
PEAK 101.4 dB μ V/m
OP NOT SELECTED
AVO 76.6 dB μ V/m

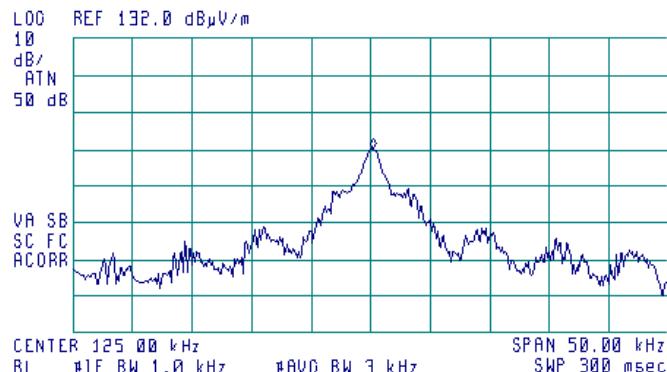




HERMON LABORATORIES

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Door Antenna			


Plot 7.2.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 115%Unom

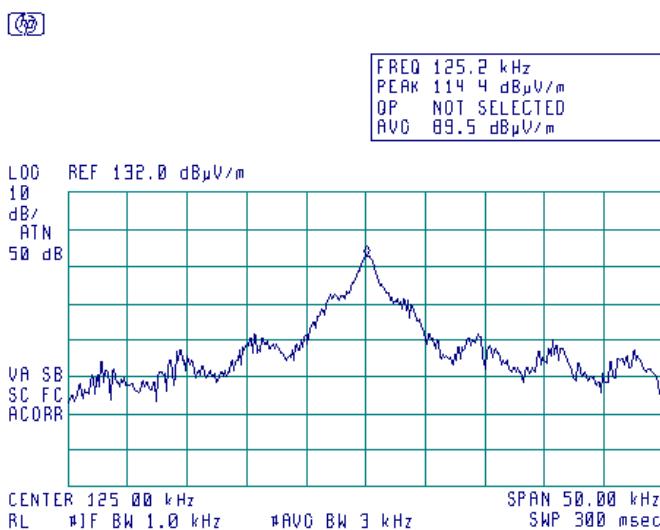

Plot 7.2.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 85%Unom

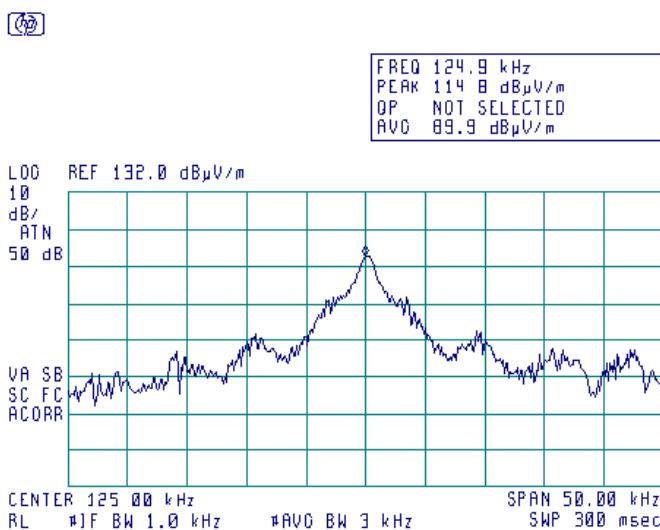



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Door Antenna		

Plot 7.2.5 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 124.8 kHz
111.25 dB μ V/m

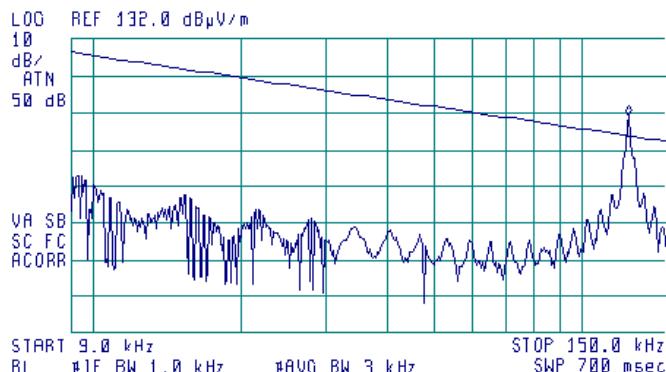

Plot 7.2.6 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
90.99 dB μ V/m

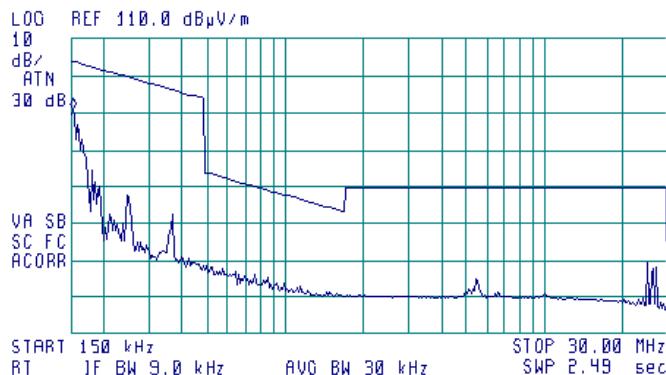



HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Door Antenna		


Plot 7.2.7 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

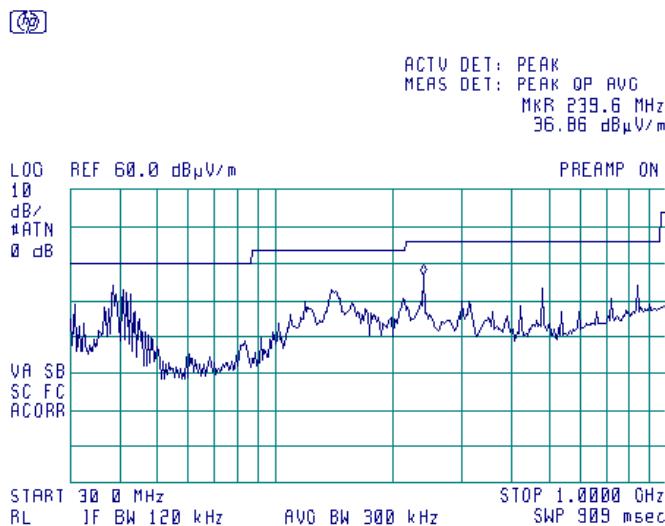

Plot 7.2.8 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

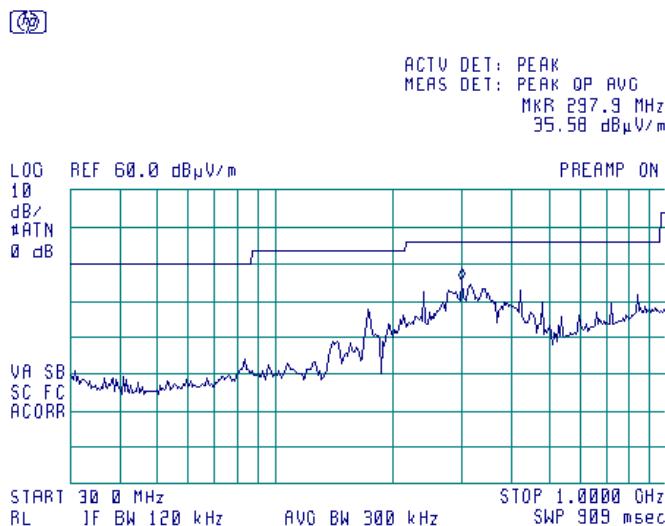



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Ceiling Antenna			

7.3 Field strength of emissions with external Ceiling Antenna

7.3.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.3.1 and Table 7.3.2.

Table 7.3.1 Radiated fundamental emission limits

Fundamental frequency, kHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
125	125.69	105.69

Table 7.3.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 – 1000		54.0	
1000 – 10 th harmonic	74.0	NA	54.0

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

7.3.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.3.2.3 The worst test results (the lowest margins) were recorded in Table 7.3.3 and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded in Table 7.3.4 and shown in the associated plots.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Ceiling Antenna			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


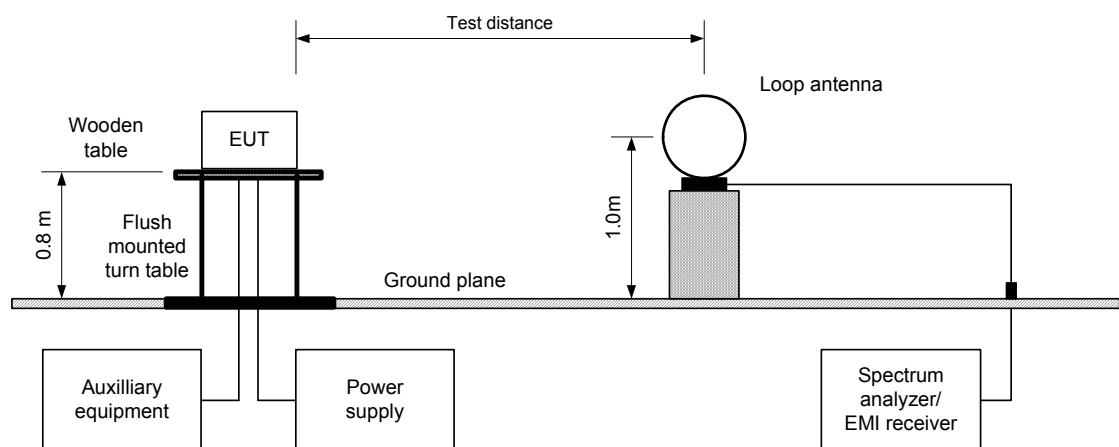


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz



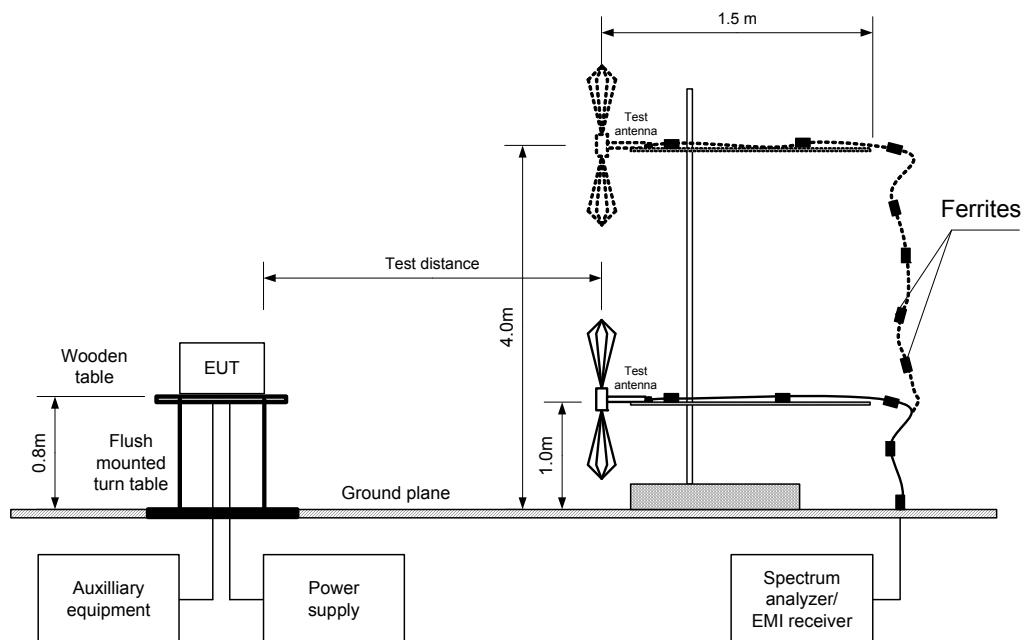

HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Ceiling Antenna			

Table 7.3.3 Field strength of fundamental emission

TEST DISTANCE:	3 m
RF CHAIN:	Ceiling Antenna
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical, Horizontal)
MODULATION:	ASK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz)

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
124.95	V	1.0	1	125.25	125.69	-0.44	98.80	105.69	-6.89	Pass

Note: The recorded value was obtained during measurements in the EUT vertical position.

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin (dB) = measured result - specification limit.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 2871	HL 4353				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Ceiling Antenna			

Table 7.3.4 Field strength of spurious emissions

TEST DISTANCE:	3 m
Rx CHAIN:	Ceiling Antenna
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical)
MODULATION:	ASK
BIT RATE:	160kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
39.0013	37.60	34.89	40.0	-5.11	V	1.0	360	Pass
41.0033	34.00	32.20	40.0	-7.8	V	1.0	41	
145.1653	36.10	35.30	43.5	-8.2	V	1.0	83	
240.0078	38.2	35.40	46.0	-10.6	V	1.0	193	
300.0038	42.4	40.54	46.0	-5.46	H	1.1	22	
480.0095	36.9	35.20	46.0	-10.8	H	1.0	245	

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
155.13	V	1	2	90.8	123.82	-33.02	48.0	103.82	-55.82	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks: External Ceiling Antenna			

Table 7.3.5 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.3.6 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14


Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Ceiling Antenna		

Plot 7.3.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 124.95 kHz
125.20 dB μ V/m

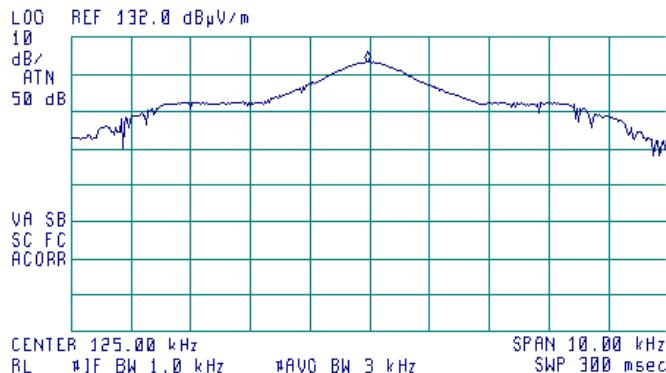


Plot 7.3.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 124.98 kHz
111.12 dB μ V/m

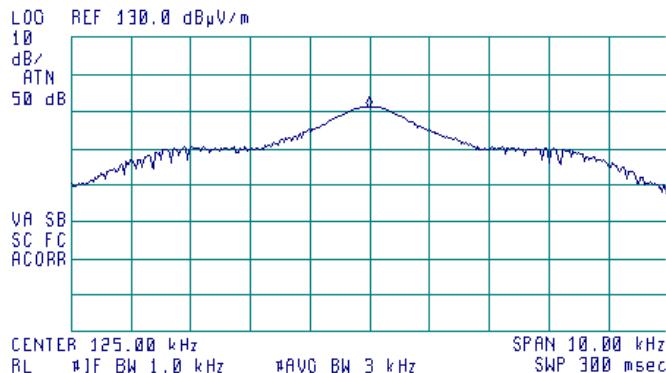



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14


Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Ceiling Antenna		

Plot 7.3.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 115%Unom



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 124.95 kHz
125.25 dB μ V/m

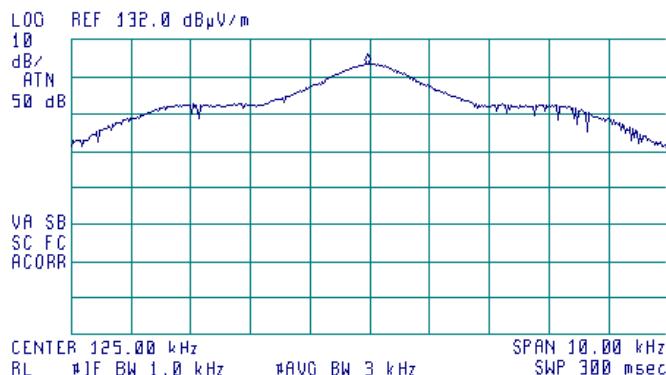


Plot 7.3.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)
VOLTAGE: 85%Unom



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 124.98 kHz
125.20 dB μ V/m

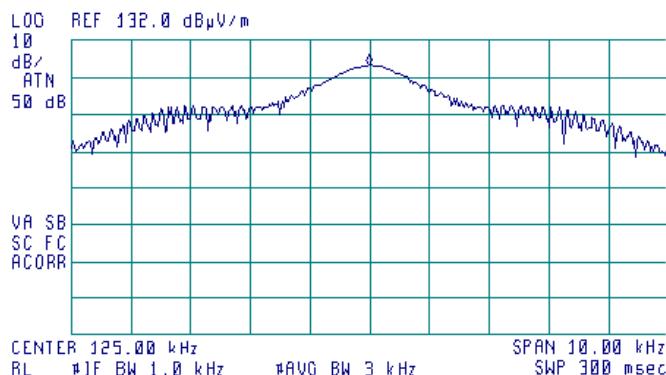



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Ceiling Antenna		

Plot 7.3.5 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 123.8 kHz
124.83 dB μ V/m

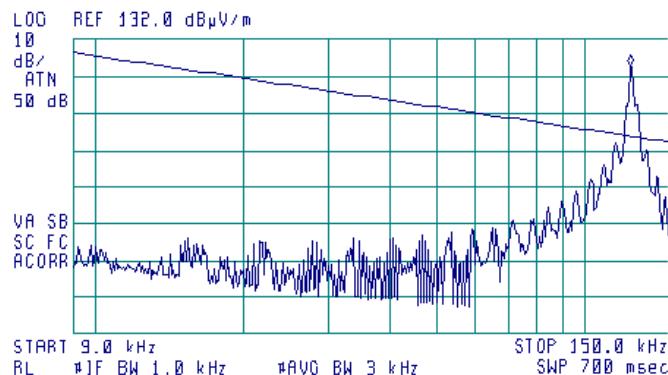

Plot 7.3.6 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 160 kHz
88.40 dB μ V/m





HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Section 15.209 / RSS-Gen section 7.2.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-May-14 - 09-May-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 67 %	Power Supply: 24 VDC
Remarks:	External Ceiling Antenna		


Plot 7.3.7 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

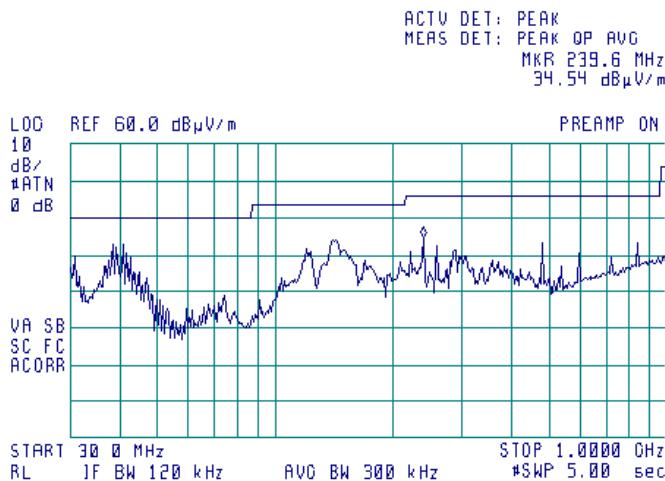

Plot 7.3.8 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

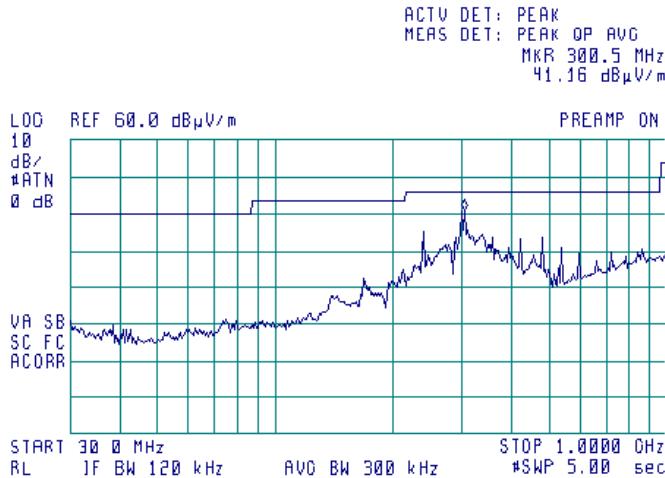



HERMON LABORATORIES

Test specification:	RSS-Gen, Section 4.6.1, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to measure transmitter occupied bandwidth not specified by the standard.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.4.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.1 and the associated plots.

Figure 7.4.1 Occupied bandwidth test setup





HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	RSS-Gen, Section 4.6.1, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Table 7.4.1 Occupied bandwidth test results

DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 1 kHz
VIDEO BANDWIDTH: 3 kHz
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc / 99%
MODULATION: ASK
MODULATING SIGNAL: ID code

Carrier frequency, kHz	Occupied bandwidth 20 dBc, kHz	Occupied bandwidth 99%, kHz	Margin, kHz	Verdict
125	9.330	10.6942	NA	Tested

Reference numbers of test equipment used

HL 0446	HL 0521	HL 2871	HL 3623				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	RSS-Gen, Section 4.6.1, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Plot 7.4.1 Occupied bandwidth test result

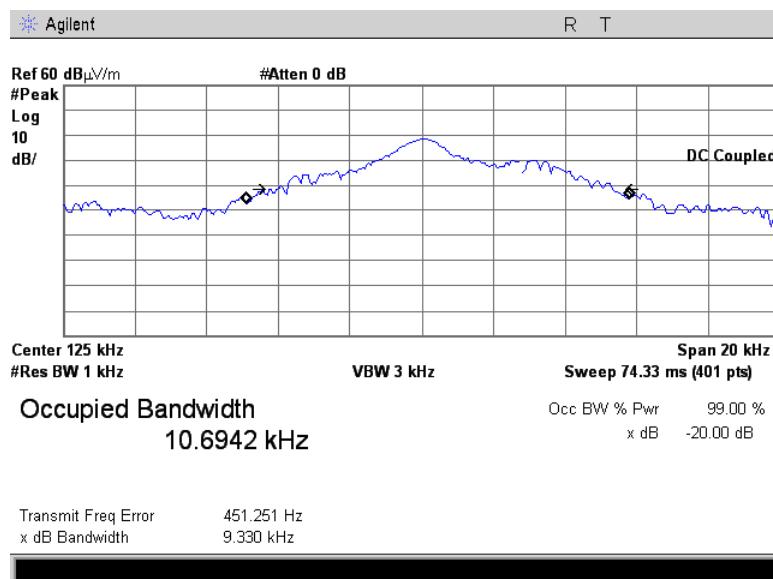



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7.5 Conducted emissions

7.5.1 General

This test was performed to measure common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.5.1.

Table 7.5.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1 and the associated photographs, energized and the EUT performance was checked.
- 7.5.2.2 The measurements were performed at the EUT power terminals with the LISN, connected to the EMI receiver in the frequency range referred to in Table 7.5.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.
- 7.5.2.3 The position of the EUT cables was varied to find the highest emission.
- 7.5.2.4 The worst test results with respect to the limits were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for conducted emission measurements, table-top EUT

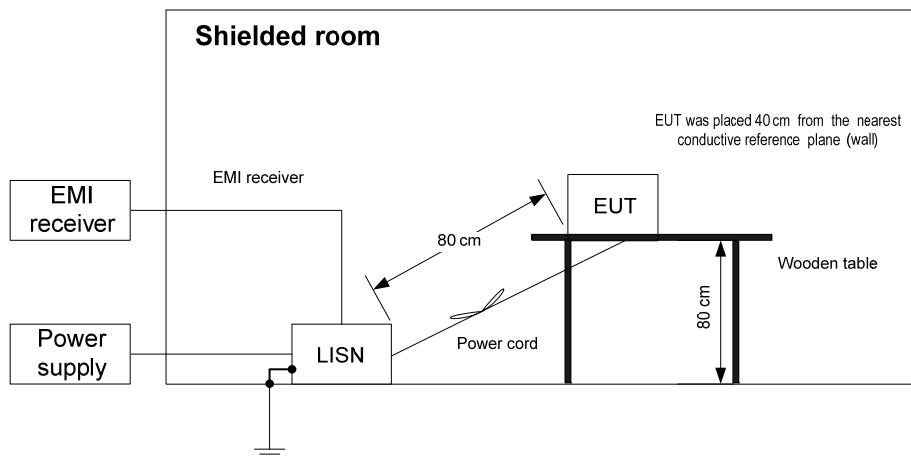



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Table 7.5.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.194963	41.76	38.48	63.85	-25.37	27.94	53.85	-25.91	L1	Pass
0.352538	44.21	41.96	58.96	-17.00	25.70	48.96	-23.26		
0.423950	49.38	46.32	57.42	-11.10	29.03	47.42	-18.39		
0.444825	45.06	42.06	57.03	-14.97	24.27	47.03	-22.76		
0.508600	44.08	41.59	56.00	-14.41	24.45	46.00	-21.55		
0.989000	45.52	42.60	56.00	-13.40	27.47	46.00	-18.53		
0.354010	46.51	43.81	58.93	-15.12	25.45	48.93	-23.48		
0.415030	50.70	47.59	57.59	-10.00	33.47	47.59	-14.12		
0.444875	45.90	43.07	57.03	-13.96	24.26	47.03	-22.77		
0.759580	45.66	38.90	56.00	-17.10	25.59	46.00	-20.41		
0.919675	46.47	41.97	56.00	-14.03	25.43	46.00	-20.57		
1.074950	45.22	40.67	56.00	-15.33	31.70	46.00	-14.30		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL 3612			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			


Plot 7.5.1 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L1
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 420 kHz
47.67 dB μ V/m

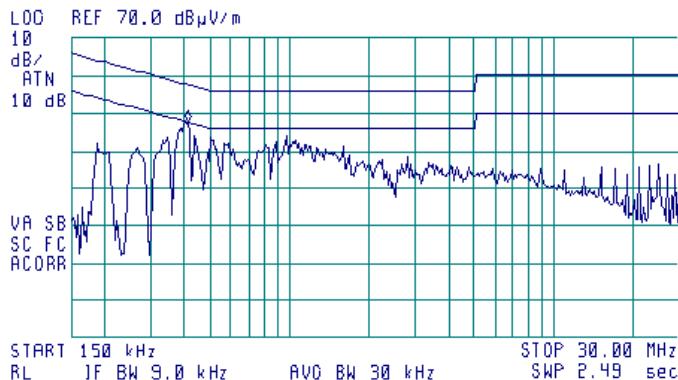


Plot 7.5.2 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L2
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 410 kHz
48.53 dB μ V/m

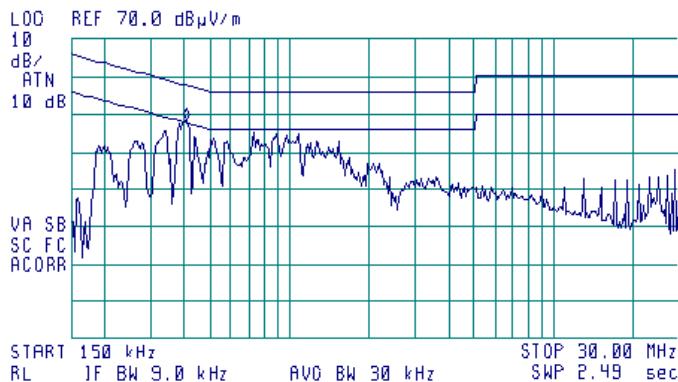



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.209.docx

Date of Issue: 21-May-14

Test specification:	FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7.6 Antenna requirements



The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Supplier declaration	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.6.1 Antenna view

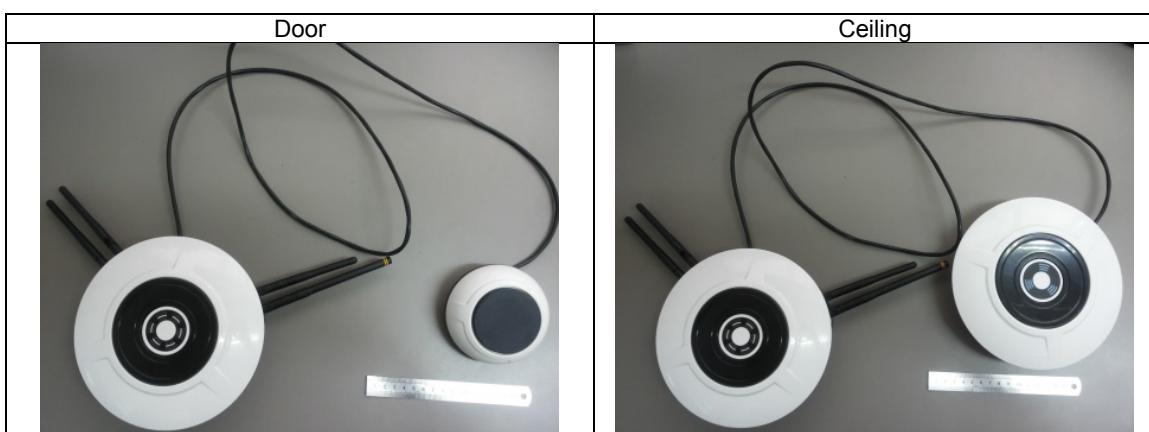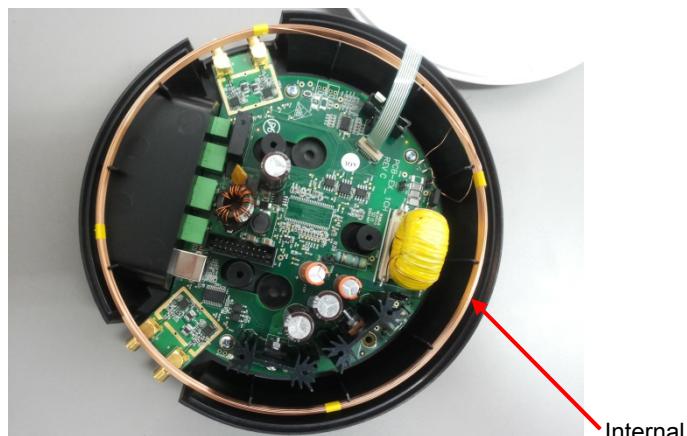



HERMON LABORATORIES

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	23-Oct-13	23-Oct-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	13-Oct-13	13-Oct-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	25-Oct-13	25-Dec-14
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	05-Nov-13	05-Nov-14
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	05-Dec-13	05-Dec-14
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	08-May-14	08-May-15
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	16-Mar-14	16-Mar-15



HERMON LABORATORIES

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement



HERMON LABORATORIES

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

**Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



HERMON LABORATORIES

Cable loss
Cable coaxial, MIL C-17, N type-N type, 6 m
Belden, HL 3623

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	2600	4.35	5300	7.67
50	0.30	2700	4.54	5400	7.79
100	0.45	2800	4.70	5500	7.89
200	0.69	2900	4.87	5600	7.94
300	0.89	3000	5.04	5700	8.01
400	1.06	3100	5.19	5800	8.12
500	1.24	3200	5.35	5900	8.19
600	1.38	3300	5.50	6000	8.30
700	1.54	3400	5.65	6100	8.35
800	1.69	3500	5.79	6200	8.45
900	1.83	3600	5.92	6300	8.55
1000	1.96	3700	6.07	6400	8.65
1100	2.14	3800	6.17	6500	8.75
1200	2.31	3900	6.30		
1300	2.38	4000	6.43		
1400	2.51	4100	6.53		
1500	2.63	4200	6.65		
1600	2.76	4300	6.75		
1700	2.90	4400	6.85		
1800	3.04	4500	7.01		
1900	3.19	4600	7.09		
2000	3.35	4700	7.20		
2100	3.51	4800	7.24		
2200	3.67	4900	7.31		
2300	3.84	5000	7.41		
2400	4.01	5100	7.48		
2500	4.18	5200	7.56		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF TEST REPORT

14 APPENDIX G Manufacturer's declaration of identity



Declaration of Identity

We, the undersigned,

Company: LOGITAG SYSTEMS

Address: Hamelach 2 Ntanya

Country: Israel

Telephone number: 972-9-8354848

Fax number: 972-9-8656262

Declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
One Channel Exciter	LTG2-04	Exciter and transceiver console for active RFID transponders

is electronically/electrically/mechanically identical to the following equipment (including Software/Hardware version(s)):

Brand/Item	Type/Model	Short Product description
Single Location Unit	LTG2-04-PRF	Exciter and transceiver console for active RFID transponders

The reason for name change is: **different design of Led lexan**

...28/05/2014.....

(date)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel
+ 972 9 835 4848 | + 972 9 865 6262 | info@logi-tag.com

www.logi-tag.com



... Golan Kormian.....

(signature)

(printed name)

Logitag systems.....

... Engineering manager.....

(company stamp)

(position)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel
+ 972 9 835 4848 | + 972 9 865 6262 | info@logi-tag.com

www.logi-tag.com

END OF DOCUMENT