

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 66 von 110
Page 66 of 110


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9298	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/25
Temp. (C)/Hum.(%) 24 C / 48 %	Time: 0:49:23
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: RX 2441MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

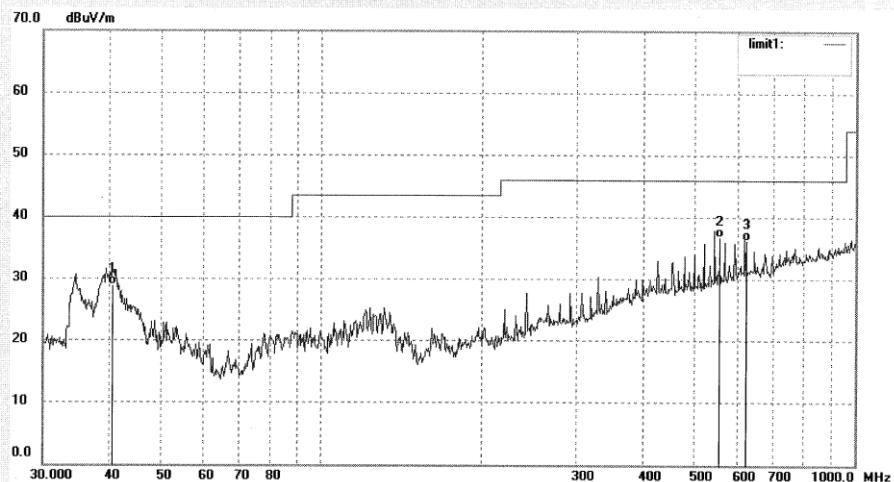

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.5837	14.43	14.54	28.97	40.00	-11.03	QP			
2	552.9670	11.58	25.32	36.90	46.00	-9.10	QP			
3	626.7068	10.32	26.06	36.38	46.00	-9.62	QP			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 67 von 110
Page 67 of 110

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9300
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp. (C)/Hum.(%) 24 C / 48 %
EUT: MULTIMEDIA SPEAKER
Mode: RX 2480MHz
Model: iF330BT
Manufacturer: EDIFIER

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/06/25
Time: 1:05:28
Engineer Signature: PEI
Distance: 3m

Note:

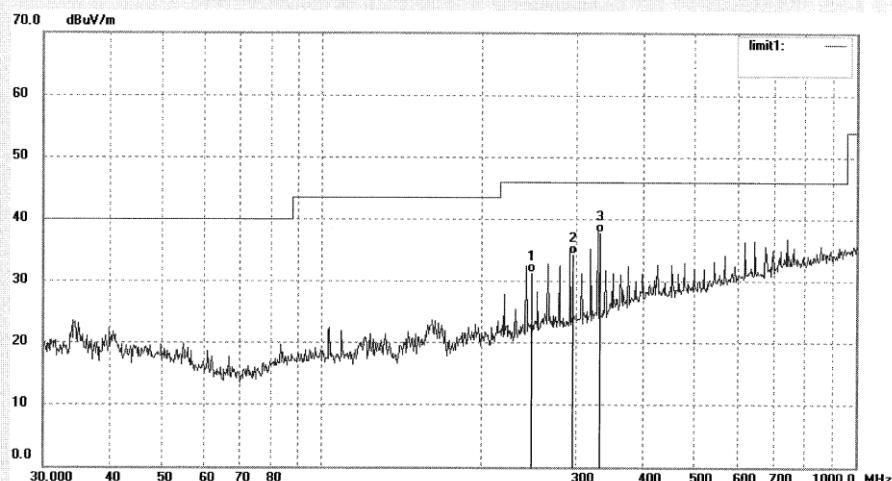

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	245.7620	14.22	17.16	31.38	46.00	-14.62	QP			
2	294.9199	15.83	18.59	34.42	46.00	-11.58	QP			
3	331.7887	18.18	19.79	37.97	46.00	-8.03	QP			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 68 von 110
Page 68 of 110


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	pei #9301	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012/06/25
Temp. (C)/Hum. (%)	24 C / 48 %	Time:	1:13:12
EUT:	MULTIMEDIA SPEAKER	Engineer Signature:	PEI
Mode:	RX 2480MHz	Distance:	3m
Model:	iF330BT		
Manufacturer:	EDIFIER		

Note:

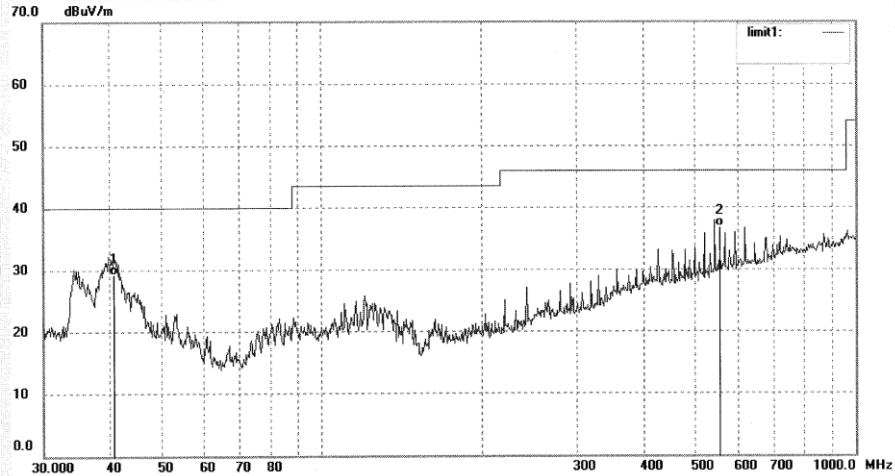

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.7371	14.80	14.53	29.33	40.00	-10.67	QP			
2	552.9827	11.57	25.32	36.89	46.00	-9.11	QP			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 69 von 110
Page 69 of 110

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9302
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp. (C)/Hum.(%) 24 C / 48 %
EUT: MULTIMEDIA SPEAKER
Mode: RX 2402MHz
Model: iF330BT
Manufacturer: EDIFIER

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/06/25
Time: 1:22:43
Engineer Signature: PEI
Distance: 3m

Note:

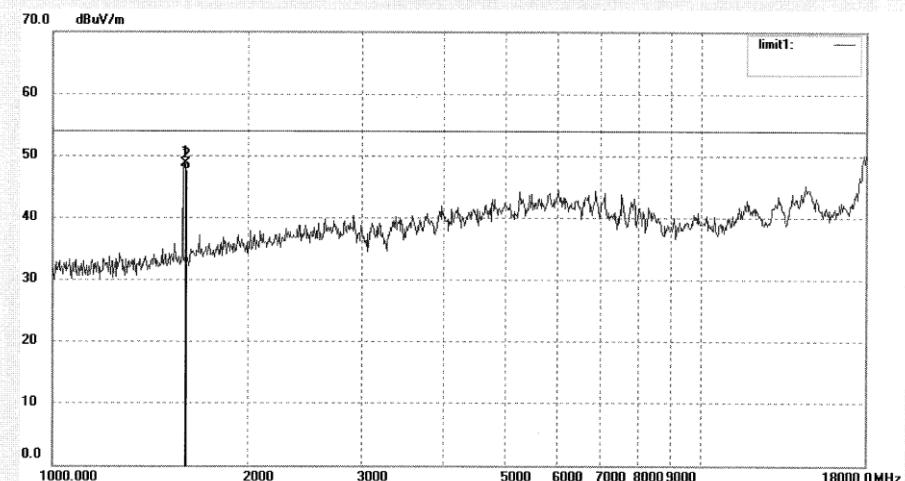

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1602.356	59.85	-11.07	48.78	74.00	-25.22	peak			
2	1602.356	58.76	-11.07	47.69	54.00	-6.31	AVG			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 70 von 110
Page 70 of 110

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9303
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp. (C)/Hum.(%) 24 C / 48 %
EUT: MULTIMEDIA SPEAKER
Mode: RX 2402MHz
Model: iF330BT
Manufacturer: EDIFIER

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/06/25
Time: 1:28:38
Engineer Signature: PEI
Distance: 3m

Note:

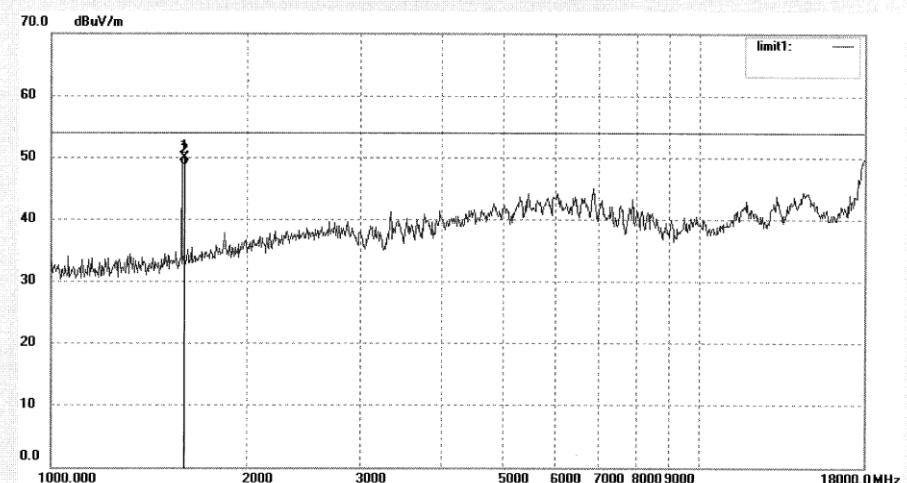

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1602.266	61.02	-11.07	49.95	74.00	-24.05	peak			
2	1602.266	59.78	-11.07	48.71	54.00	-5.29	AVG			


Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 71 von 110
Page 71 of 110

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	pei #9305	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012/06/25
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	1:43:37
EUT:	MULTIMEDIA SPEAKER	Engineer Signature:	PEI
Mode:	RX 2441MHz	Distance:	3m
Model:	iF330BT		
Manufacturer:	EDIFIER		
Note:			

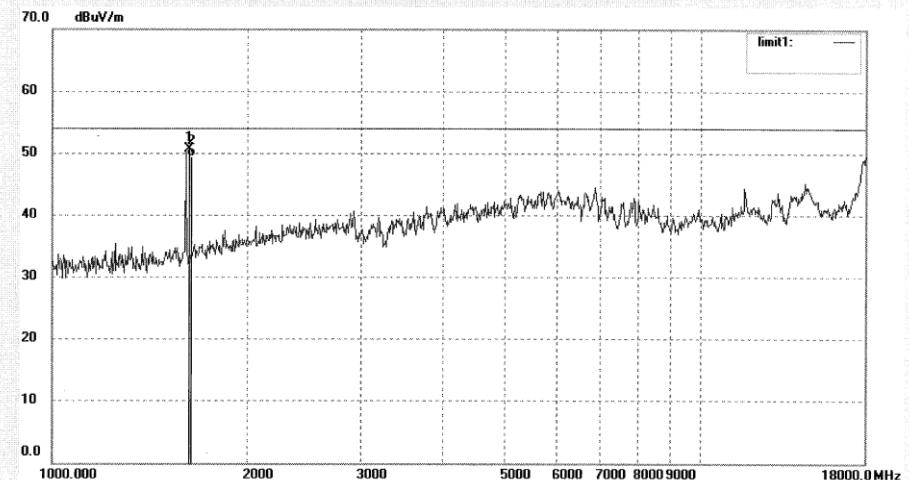

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1628.302	61.64	-10.90	50.74	74.00	-23.26	peak			
2	1628.302	60.35	-10.90	49.45	54.00	-4.55	AVG			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 72 von 110
Page 72 of 110

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9304
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MULTIMEDIA SPEAKER
Mode: RX 2441MHz
Model: iF330BT
Manufacturer: EDIFIER

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/06/25
Time: 1:36:18
Engineer Signature: PEI
Distance: 3m

Note:

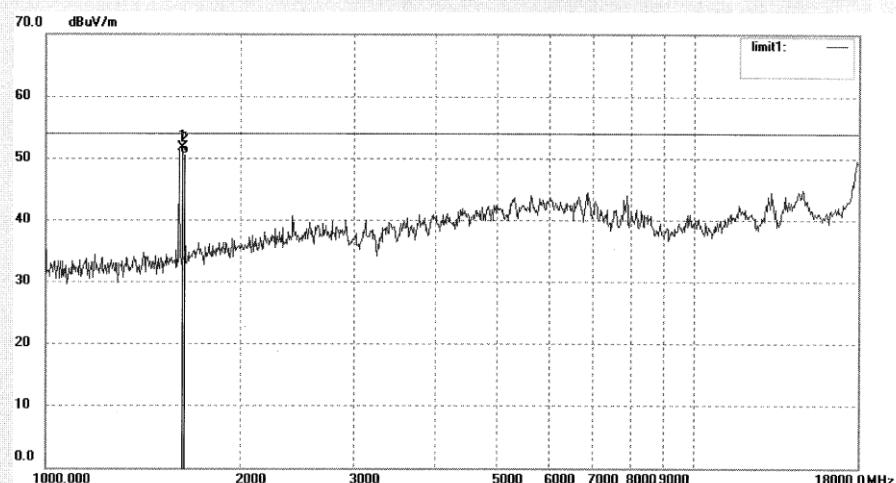

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1628.371	62.55	-10.90	51.65	74.00	-22.35	peak			
2	1628.371	61.58	-10.90	50.68	54.00	-3.32	AVG			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 73 von 110
Page 73 of 110


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	pei #9306	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012/06/25
Temp. (C)/Hum. (%)	24 C / 48 %	Time:	1:52:30
EUT:	MULTIMEDIA SPEAKER	Engineer Signature:	PEI
Mode:	RX 2480MHz	Distance:	3m
Model:	iF330BT		
Manufacturer:	EDIFIER		

Note:

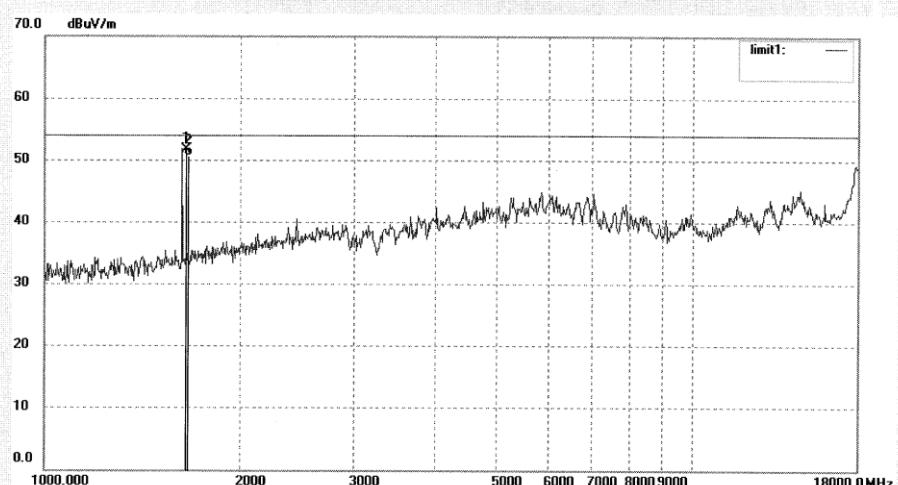

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1654.247	62.52	-10.72	51.80	74.00	-22.20	peak			
2	1654.247	61.46	-10.72	50.74	54.00	-3.26	AVG			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 74 von 110
Page 74 of 110


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9307	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/25
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2:00:26
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: RX 2480MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

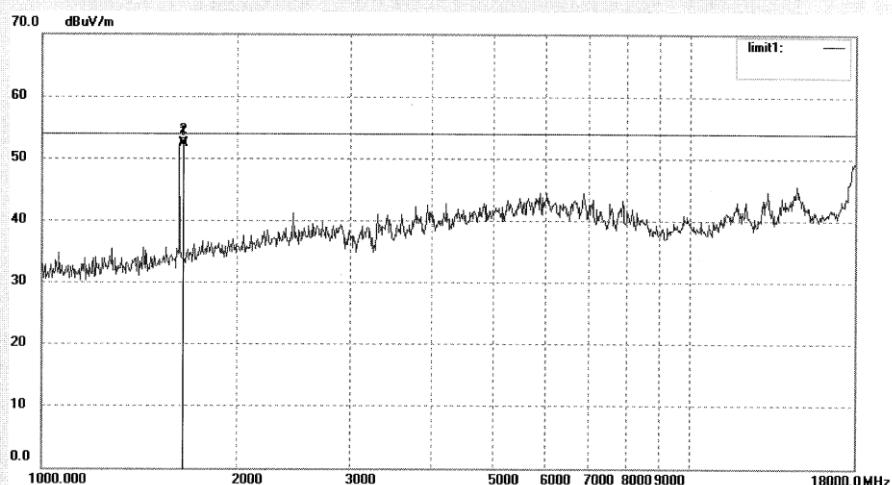

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1654.340	63.11	-10.72	52.39	74.00	-21.61	peak			
2	1654.340	62.72	-10.72	52.00	54.00	-2.00	AVG			

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 75 von 110
Page 75 of 110

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9285

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2012/06/24

Temp. (C)/Hum.(%) 24 C / 48 %

Time: 23:04:45

EUT: MULTIMEDIA SPEAKER

Engineer Signature: PEI


Mode: RX 2402MHz

Distance: 3m

Model: iF330BT

Manufacturer: EDIFIER

Note:

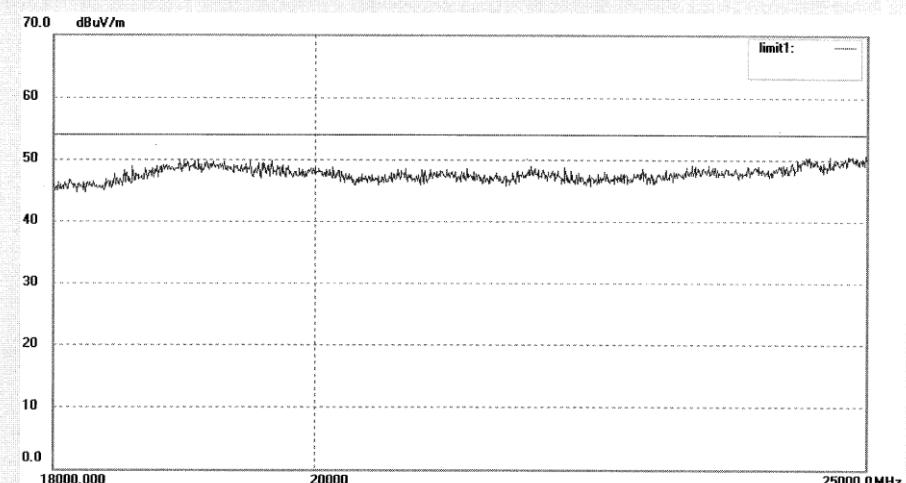

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 76 von 110
Page 76 of 110

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9284

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2012/06/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 22:57:18

EUT: MULTIMEDIA SPEAKER

Engineer Signature: PEI


Mode: RX 2402MHz

Distance: 3m

Model: iF330BT

Manufacturer: EDIFIER

Note:

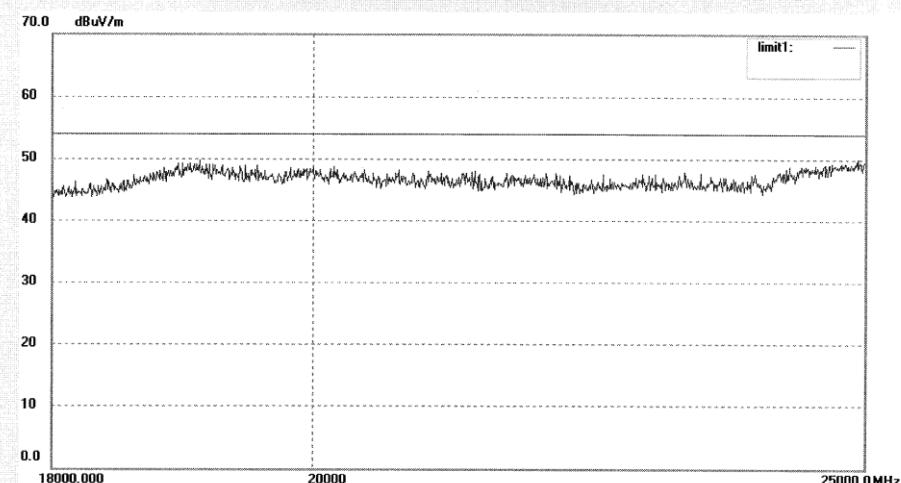

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 77 von 110
Page 77 of 110


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	pei #9286	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012/06/24
Temp.(C)/Hum.(%)	24 C / 48 %	Time:	23:12:25
EUT:	MULTIMEDIA SPEAKER	Engineer Signature:	PEI
Mode:	RX 2441MHz	Distance:	3m
Model:	iF330BT		
Manufacturer:	EDIFIER		

Note:

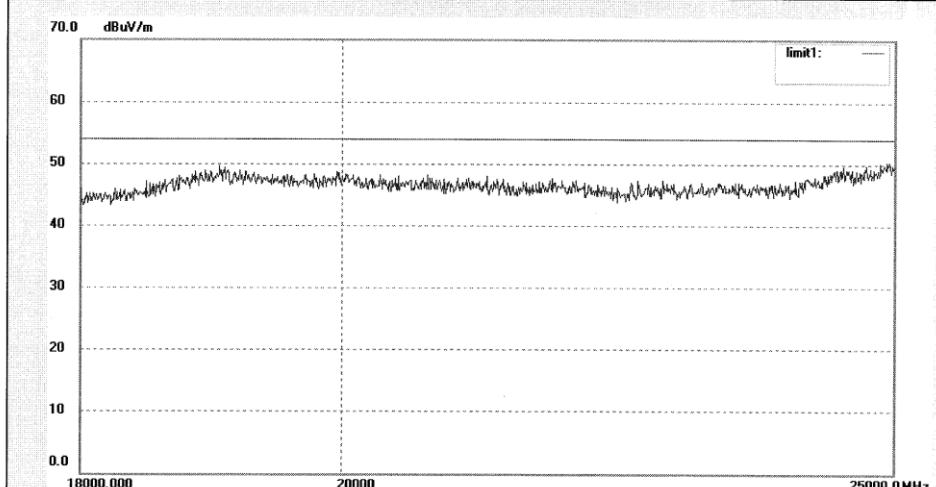

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 78 von 110
Page 78 of 110

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9287

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2012/06/24

Temp. (C)/Hum.(%) 24 C / 48 %

Time: 23:20:47

EUT: MULTIMEDIA SPEAKER

Engineer Signature: PEI


Mode: RX 2441MHz

Distance: 3m

Model: iF330BT

Manufacturer: EDIFIER

Note:

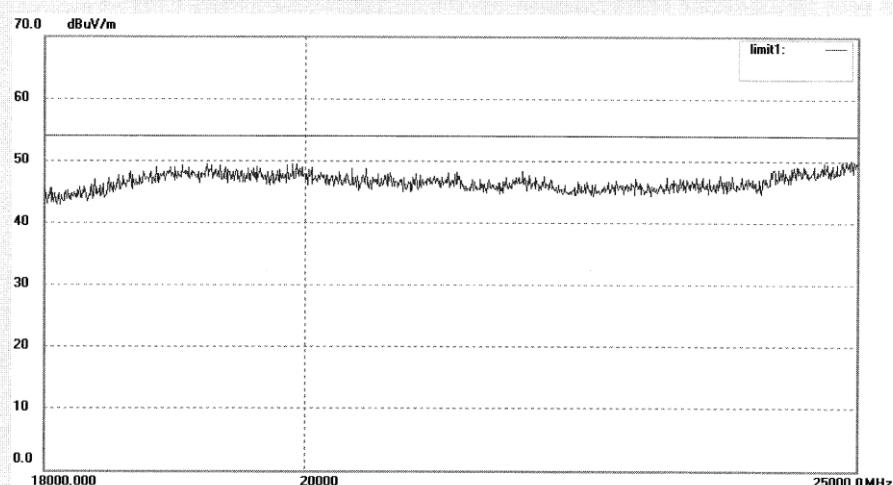

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 79 von 110
Page 79 of 110

ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9288
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp. (C)/Hum.(%) 24 C / 48 %
EUT: MULTIMEDIA SPEAKER
Mode: RX 2480MHz
Model: iF330BT
Manufacturer: EDIFIER

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/06/24
Time: 23:27:45
Engineer Signature: PEI
Distance: 3m

Note:

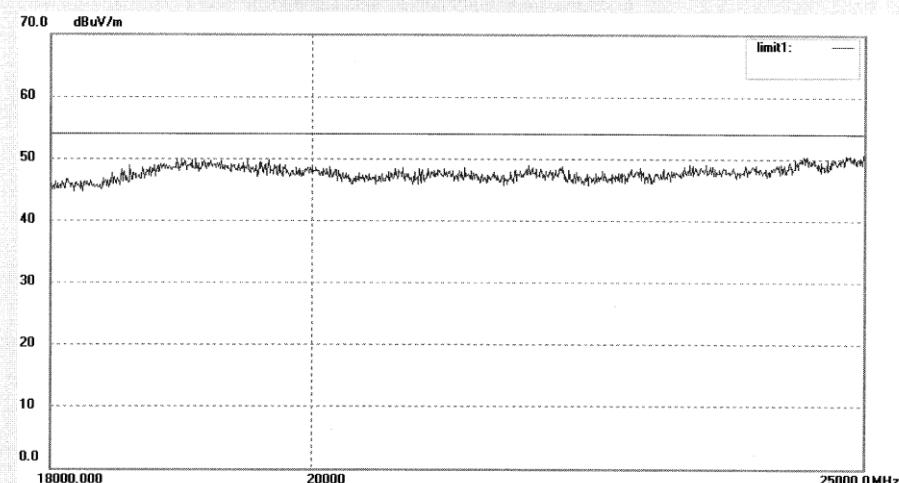

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

Prüfbericht - Nr.: **17026835 001**
Test Report No.
Seite 80 von 110
Page 80 of 110

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: pei #9289

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2012/06/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 23:35:16

EUT: MULTIMEDIA SPEAKER

Engineer Signature: PEI


Mode: RX 2480MHz

Distance: 3m

Model: iF330BT

Manufacturer: EDIFIER

Note:

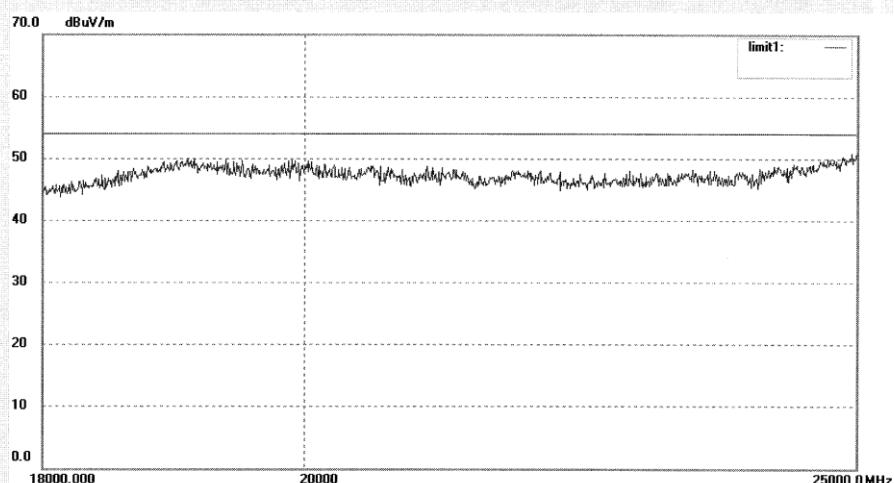

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------